



STC Test Report

Date : 2012-11-02

Page 1 of 51

No. : HM167966

Applicant (MUE001): Musical Electronics Limited
Flat H, J, K, 12/F, World Tech Centre,
95 How Ming Street, Kwun Tong, Kowloon, Hong Kong

Manufacturer: Musical Electronics (Qing Yuan) Limited
Tai He Industrail Park, Qing Xin Country, Qing Yuan City,
Guang Dong Province, China.

Description of Sample(s): Product: G-BOOM Wireless Boombox
Brand Name: G-PROJECT
Model Number: G-650
FCC ID: AUIG650

Date Sample(s) Received: 2012-10-24

Date Tested: 2012-10-31 to 2012-11-01

Investigation Requested: Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2011 and ANSI C63.4:2009 for FCC Certification.

Conclusion(s): The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remark(s): ---

Dr. LEE Kam Chuen
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
The Hong Kong Standards and Testing Centre Ltd.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre Ltd.
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.



STC Test Report

Date : 2012-11-02

Page 2 of 51

No. : HM167966

CONTENT:

Cover	Page 1 of 51
Content	Page 2 of 51
<u>1.0</u> <u>General Details</u>	
1.1 Test Laboratory	Page 3 of 51
1.2 Equipment Under Test [EUT] Description of EUT operation	Page 3 of 51
1.3 Date of Order	Page 3 of 51
1.4 Submitted Sample	Page 3 of 51
1.5 Test Duration	Page 3 of 51
1.6 Country of Origin	Page 3 of 51
1.7 RF Module Details	Page 4 of 51
1.8 Antenna Details	Page 4 of 51
<u>2.0</u> <u>Technical Details</u>	
2.1 Investigations Requested	Page 5 of 51
2.2 Test Standards and Results Summary	Page 5 of 51
2.3 Table for Test Modes	Page 6 of 51
<u>3.0</u> <u>Test Results</u>	
3.1 Emission	Page 7 – 43 of 51
<u>Appendix A</u>	
List of Measurement Equipment	Page 44 of 51
<u>Appendix B</u>	
Ancillary Equipment	Page 44 of 51
<u>Appendix C</u>	
Photographs	Page 45 - 51 of 51

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 3 of 51

No. : HM167966

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate
New Territories, Hong Kong

1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: G-BOOM Wireless Boomobx
Manufacturer: Musical Electronics (Qing Yuan) Limited
Tai He Industrail Park, Qing Xin Country, Qing Yuan City,
Guang Dong Province, China.
Brand Name: G-PROJECT
Model Number: G-650
Rating: The AC/DC Adaptor used for the tests was provided by the
applicant with the following details: Two pins (Live / Neutral)
only adaptor, Model Number: GQ30-120200-AU, Input: 100-
240Va.c. 50/60Hz 1.0A Max., Output: 12Vd.c. 2.0A.
Output: 5V 1A for Charge any phones or any device with a USB jack.

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Musical Electronics Limited, G-BOOM Wireless Boomobx, it is Audio System, modulation by IC; and type is frequency hopping speed spectrum Modulation.

1.3 Date of Order

2012-10-24

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2012-10-31 to 2012-11-01

1.6 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2012-11-02

Page 4 of 51

No. : HM167966

1.7 RF Module Details

Module Model Number: BM160
Module FCC ID: N/A
Module Transmission Type: Bluetooth V2.1+EDR
Modulation: FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rates:
1MBps: GFSK
2 MBps: $\pi/4$ -DQPSK
3 MBps: 8DPSK
Frequency Range: 2400-2483.5MHz
Carrier Frequencies: 2402MHz – 2800MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: PCB Layout Inverted F
Antenna Gain: 0dBi

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 5 of 51

No. : HM167966

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2011 Regulations and ANSI C63.4:2009 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Fail	N/A
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(1)	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RF Conducted Spurious Emission	FCC 47CFR 15.247(c)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC Mains Conducted Emissions	FCC 47CFR 15.207	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Number of Operating Channel	FCC 47CFR 15.247(a)(2)(b)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band-edge compliance of Conducted Emission	FCC 47CFR 15.247(c)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy	FCC 47CFR 15.247(a)(1)(iii)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A – Not Applicable

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 6 of 51

No. : HM167966

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Max. Conducted Output Power	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	8DPSK	3MBps
Number of Hopping Frequency	8DPSK	3MBps
Dwell Time	DH1 / DH3 / DH5	3MBps
Radiated Emissions Below 1GHz	GFSK	1MBps
Radiated Emission Above 1GHz	GFSK	1MBps
Band Edge Emissions	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 7 of 51

No. : HM167966

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Output Power

Test Requirement:	FCC 47CFR 15.247(b)(1)
Test Method:	N/A
Test Date:	2012-10-31
Mode of Operation:	Bluetooth Communication mode (Fundamental Power)


Test Method:

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW = 3MHz, Sweep = Auto, Span = 10MHz
Detector = Peak, Trace = Max. hold

Test Setup:

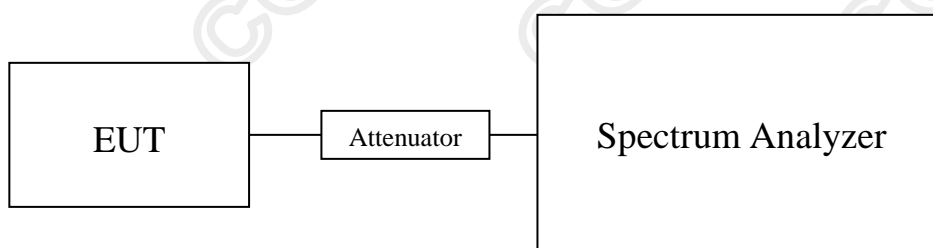

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 8 of 51

No. : HM167966

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits:
For frequency hopping systems employing at least 75 hopping channels: 1 Watt
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts
For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass Maximum conducted output power

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000641

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000749

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000791

Results of Bluetooth Communication mode ($\pi/4$ -DQPSK) (Fundamental Power): Pass Maximum conducted output power

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000543

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000597

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000641

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass Maximum conducted output power

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000531

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000613

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000691

Limit: 0.125W (125mW)

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 18GHz 1.7dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2012-11-02

Page 9 of 51

No. : HM167966

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2009
Test Date: 2012-10-31
Mode of Operation: Bluetooth Communication mode / Aux in connected to iPod with charging function

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of "The Hong Kong Standards and Testing Centre Ltd." with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 10 of 51

No. : HM167966

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)

RBW: 10kHz
VBW: 30kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold


30MHz – 1GHz (QP)

RBW: 120kHz
VBW: 120kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Above 1GHz (Pk & Av)

RBW: 3MHz
VBW: 3MHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Test Setup:

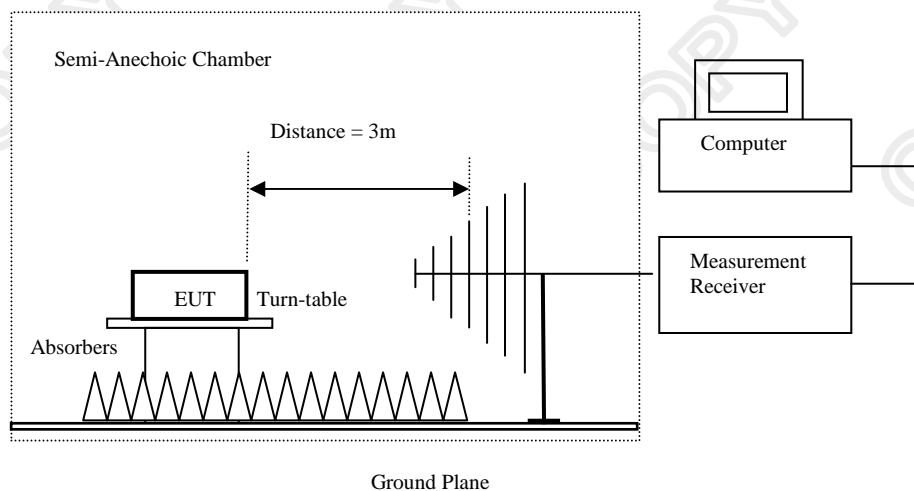

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 11 of 51

No. : HM167966

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V/m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode – CH0 (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB μV	Correction Factor dB/m	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit $\mu\text{V/m}$	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Results of Bluetooth Communication mode (30MHz – 1000MHz): PASS

Field Strength of Spurious Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB μV	Correction Factor dB/m	Field Strength dB $\mu\text{V/m}$	Limit @3m dB $\mu\text{V/m}$	Margin dB $\mu\text{V/m}$	E-Field Polarity
32.8	12.5	16.8	29.3	40.0	10.7	Vertical
45.8	21.3	10.1	31.4	40.0	8.6	Vertical
60.8	20.7	7.4	28.1	40.0	11.9	Vertical
72.0	20.2	7.5	27.7	40.0	12.3	Vertical
97.4	17.6	8.9	26.5	43.5	17.0	Vertical
166.8	21.4	11	32.4	43.5	11.1	Vertical
295.0	11.3	15.5	26.8	43.5	16.7	Horizontal

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 12 of 51

No. : HM167966

Result of Bluetooth Communication mode – CH0 (1GHz – 26GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
2402.0	65.3	28	93.3	--	--	Vertical
4804.0	4.0	32.7	36.7	74.0	37.3	Vertical

Result of Bluetooth Communication mode – CH0 (1GHz – 26GHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
2402.0	45.3	28	73.3	--	--	Vertical
4804.0	1.4	32.7	34.1	54.0	19.9	Vertical

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 13 of 51

No. : HM167966

Result of Bluetooth Communication mode – CH40 (9kHz – 30MHz): Pass[

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Results of Bluetooth Communication mode – CH40 (30MHz – 1000MHz): PASS

Field Strength of Spurious Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
32.8	12.5	16.8	29.3	40.0	10.7	Vertical
45.8	21.3	10.1	31.4	40.0	8.6	Vertical
60.8	20.7	7.4	28.1	40.0	11.9	Vertical
72.0	20.2	7.5	27.7	40.0	12.3	Vertical
97.4	17.6	8.9	26.5	43.5	17.0	Vertical
166.8	21.4	11	32.4	43.5	11.1	Vertical
295.0	11.3	15.5	26.8	43.5	16.7	Horizontal

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 14 of 51

No. : HM167966

Result of Bluetooth Communication mode – CH40 (1GHz – 26GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
2441.0	65.9	28.0	93.9	--	--	Vertical
4882.0	3.5	32.8	36.3	74.0	37.7	Vertical

Result of Bluetooth Communication mode – CH40 (1GHz – 26GHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
2441.0	65.9	28	93.9	--	--	Vertical
4882.0	1.1	32.8	33.9	54.0	20.1	Vertical

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 15 of 51

No. : HM167966

Result of Bluetooth Communication mode – CH79 (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Results of Bluetooth Communication mode – CH79 (30MHz – 1000MHz): PASS

Field Strength of Spurious Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
32.8	12.5	16.8	29.3	40.0	10.7	Vertical
45.8	21.3	10.1	31.4	40.0	8.6	Vertical
60.8	20.7	7.4	28.1	40.0	11.9	Vertical
72.0	20.2	7.5	27.7	40.0	12.3	Vertical
97.4	17.6	8.9	26.5	43.5	17.0	Vertical
166.8	21.4	11	32.4	43.5	11.1	Vertical
295.0	11.3	15.5	26.8	43.5	16.7	Horizontal

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 17 of 51

No. : HM167966

Result of Band-edge measurement:

Bluetooth Communication mode (GFSK mode) (out of band measurement):

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
2395.0	3.3	28.0	31.3	36.7	5,000.0	Vertical
2490.0	2.4	28.0	30.4	33.1	5,000.0	Vertical

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
2395.0	1.6	28.0	29.6	30.2	500.0	Vertical
2490.0	0.9	28.0	28.9	27.9	500.0	Vertical

Bluetooth Communication mode ($\pi/4$ -DQPSK mode) (out of band measurement):

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
2395.0	3.3	28.0	31.3	36.7	5,000.0	Vertical
2490.0	2.4	28.0	30.4	33.1	5,000.0	Vertical

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength μ V/m	Limit μ V/m	E-Field Polarity
2395.0	1.6	28.0	29.6	30.2	500.0	Vertical
2490.0	0.9	28.0	28.9	27.9	500.0	Vertical

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 19 of 51

No. : HM167966

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Aux in connected to iPod with charging function (9kHz – 30MHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

Result of Aux in connected to iPod with charging function (30MHz – 1GHz): Pass

Field Strength of Spurious Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
30.9	19.0	17.9	36.9	40.0	3.1	Vertical
42.6	17.1	11.5	28.6	40.0	11.4	Vertical
116.5	13.3	11	24.3	43.5	19.2	Vertical
336.0	23.2	17.1	40.3	46.0	5.7	Horizontal
240.0	20.2	13.6	33.8	46.0	12.2	Horizontal
147.7	19.4	10.3	29.7	46.0	16.3	Horizontal
432.0	21.5	18.8	40.3	47.0	6.7	Horizontal

Result of Aux in connected to iPod with charging function (1GHz – 26GHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

Remarks:

- * Denotes restricted band of operation.
Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty :

30MHz to 1GHz	4.9dB
1GHz to 6GHz	4.02dB
6GHz to 18GHz	4.03dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2012-11-02

Page 20 of 51

No. : HM167966


3.1.3 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.4:2009
Test Date: 2012-10-31
Mode of Operation: Bluetooth Communication Mode / Aux-in mode connected to iPod with charging function
Test Voltage: 117V a.c., 60Hz

Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

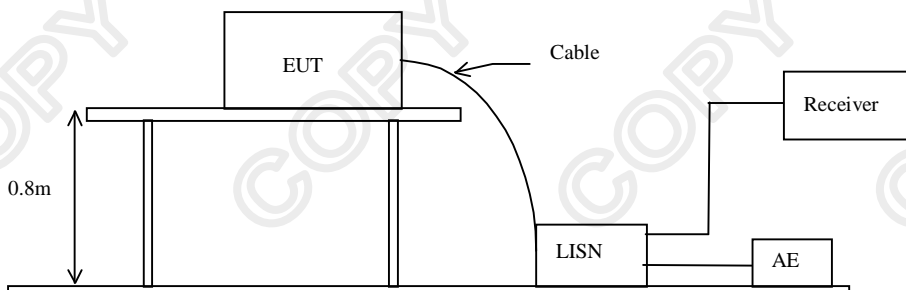

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 21 of 51

No. : HM167966

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication Mode: Pass

Please refer to the following diagram for individual results.

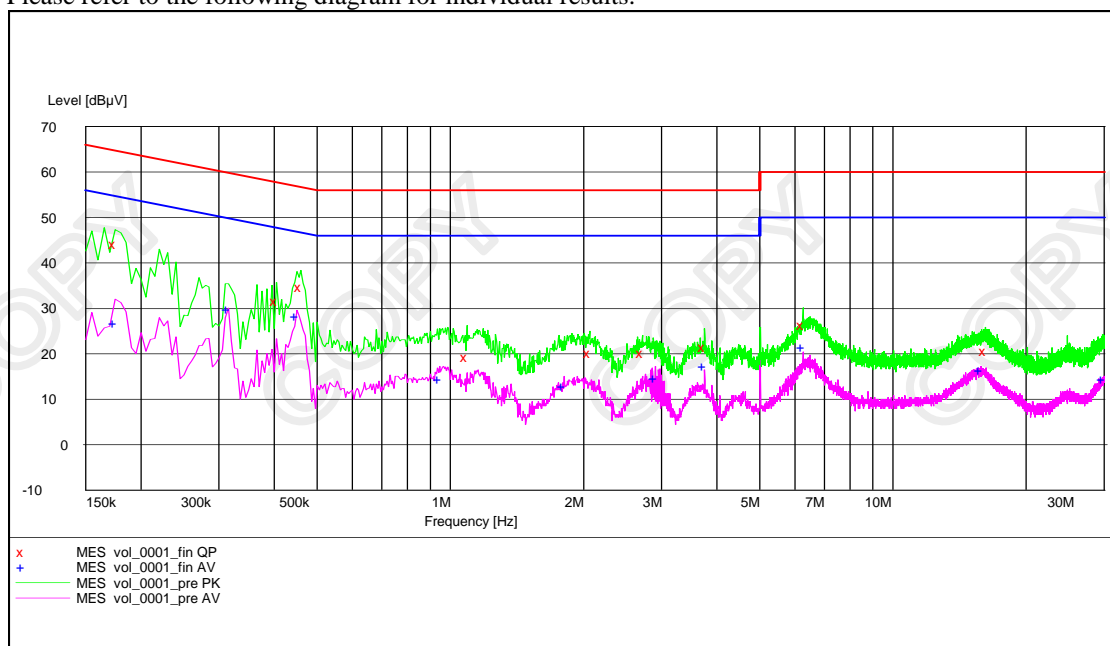

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 22 of 51

No. : HM167966

Results of Bluetooth Communication Mode: Pass

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Live	0.315	-*-	-*-	29.9	50.0
Live	0.450	-*-	-*-	28.3	47.0
Live	1.805	-*-	-*-	12.9	46.0
Live	2.715	20.1	56.0	-*-	-*-
Live	3.755	-*-	-*-	17.3	46.0
Live	6.260	26.4	60.0	21.6	50.0
Live	15.810	-*-	-*-	16.4	50.0
Neutral	0.175	44.2	65.0	26.9	55.0
Neutral	0.405	31.7	58.0	-*-	-*-
Neutral	0.460	34.8	57.0	-*-	-*-
Neutral	0.945	-*-	-*-	14.5	46.0
Neutral	1.090	19.4	56.0	-*-	-*-
Neutral	2.065	20.1	56.0	-*-	-*-
Neutral	2.905	-*-	-*-	14.6	46.0
Neutral	3.755	21.5	56.0	-*-	-*-
Neutral	16.185	20.7	60.0	-*-	-*-
Neutral	29.915	-*-	-*-	14.5	50.0

Remarks:

Calculated measurement uncertainty : 3.25dB

-*- Emission(s) that is far below the corresponding limit line.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 23 of 51

No. : HM167966

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Aux-in mode connected to iPod with charging function: Pass

Please refer to the following diagram for individual results.

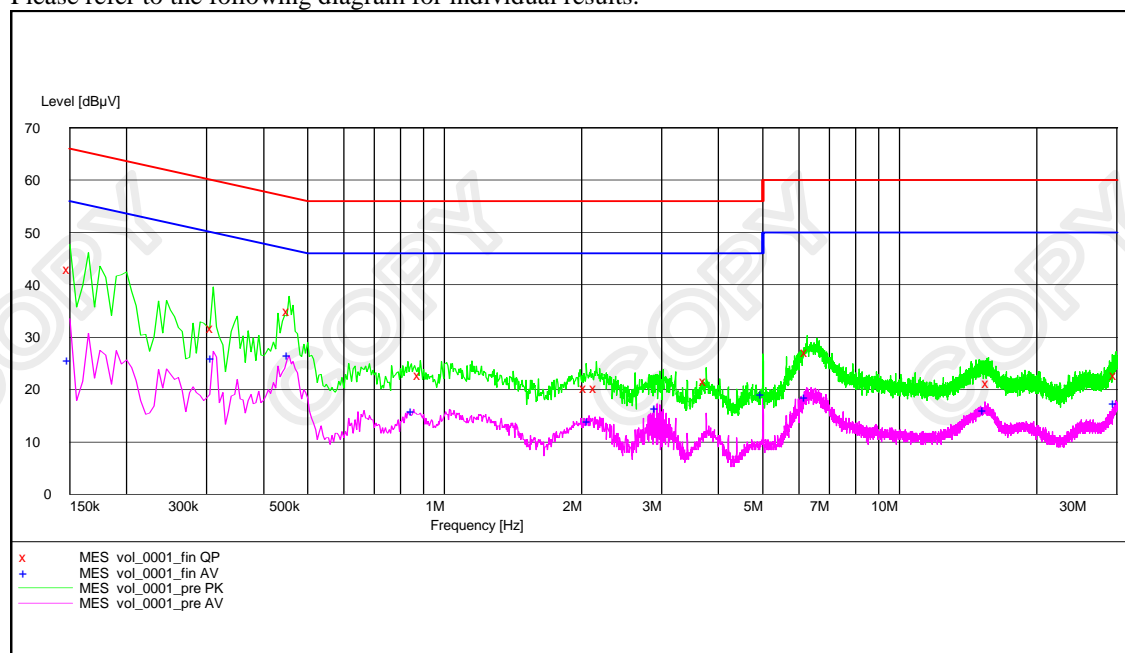

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 24 of 51

No. : HM167966

Results of Aux-in mode connected to iPod with charging function: Pass

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Live	0.150	43.0	66.0	-*-	-*-
Live	0.455	-*-	-*-	26.6	47.0
Live	2.930	-*-	-*-	16.5	46.0
Live	3.755	21.7	56.0	-*-	-*-
Live	5.010	-*-	-*-	19.2	50.0
Live	6.260	27.2	60.0	-*-	-*-
Live	15.410	-*-	-*-	16.2	50.0
Live	15.655	21.2	60.0	-*-	-*-
Live	29.955	22.7	60.0	-*-	-*-
Neutral	0.150	-*-	-*-	25.6	56.0
Neutral	0.310	31.7	60.0	26.0	50.0
Neutral	0.455	35.0	57.0	-*-	-*-
Neutral	0.855	-*-	-*-	15.9	46.0
Neutral	0.885	22.7	56.0	-*-	-*-
Neutral	2.050	20.3	56.0	-*-	-*-
Neutral	2.075	-*-	-*-	13.9	46.0
Neutral	2.155	20.3	56.0	-*-	-*-
Neutral	6.245	-*-	-*-	18.5	50.0
Neutral	29.865	-*-	-*-	17.5	50.0

Remarks:

Calculated measurement uncertainty : 3.97dB

-*- Emission(s) that is far below the corresponding limit line.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 25 of 51

No. : HM167966

3.1.4 20dB Bandwidth Measurement

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.4:2009
Test Date: 2012-11-01
Mode of Operation: Communication Mode (8DPSK)

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2012-11-02


Page 26 of 51

No. : HM167966

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2402	1.39	Within 2400-2483.5

(Lowest Operating Frequency)


 Marker 1 [T1 ndB] RBW 100 kHz RF Att 10 dB
 Ref Lvl ndB 20.00 dB VBW 100 kHz
 107 dBpW BW 1.38677355 MHz SWT 5 ms Unit dBpW

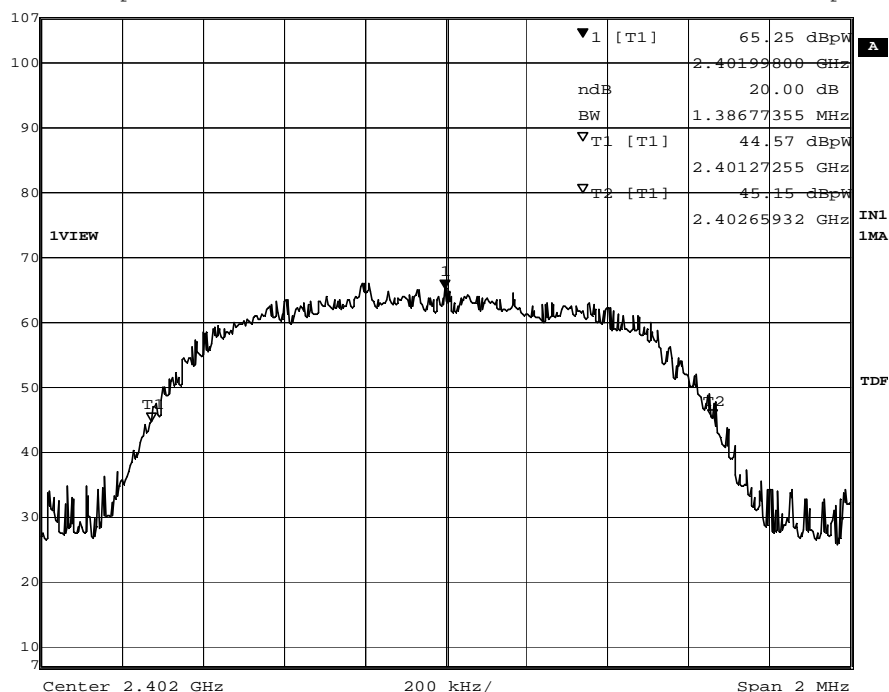

Date: 1.NOV.2012 09:25:16

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02


Page 27 of 51

No. : HM167966

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2441	1.39	Within 2400-2483.5

(Middle Operating Frequency)

	Marker 1 [T1 ndB]	RBW 100 kHz	RF Att 10 dB
Ref Lvl	ndB 20.00 dB	VBW 100 kHz	
107 dBpW	BW 1.38677355 MHz	SWT 5 ms	Unit dBpW

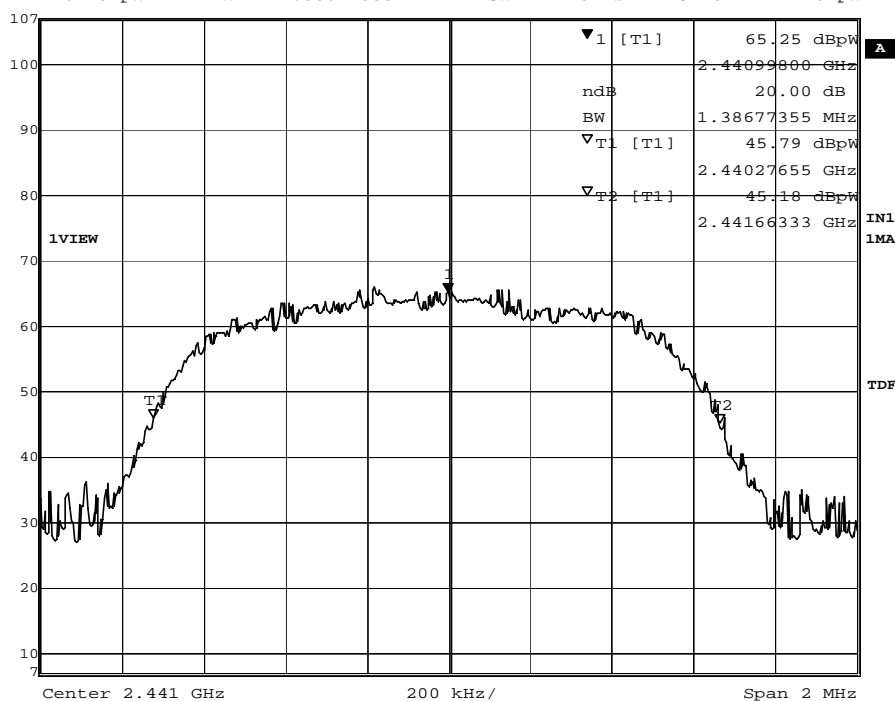

Date: 1.NOV.2012 09:27:41

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02


Page 28 of 51

No. : HM167966

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2480	1.39	Within 2400-2483.5

(Highest Operating Frequency)

	Marker 1 [T1 ndB]	RBW 100 kHz	RF Att 10 dB
Ref Lvl	ndB 20.00 dB	VBW 100 kHz	
107 dBpW	BW 1.39478958 MHz	SWT 5 ms	Unit dBpW

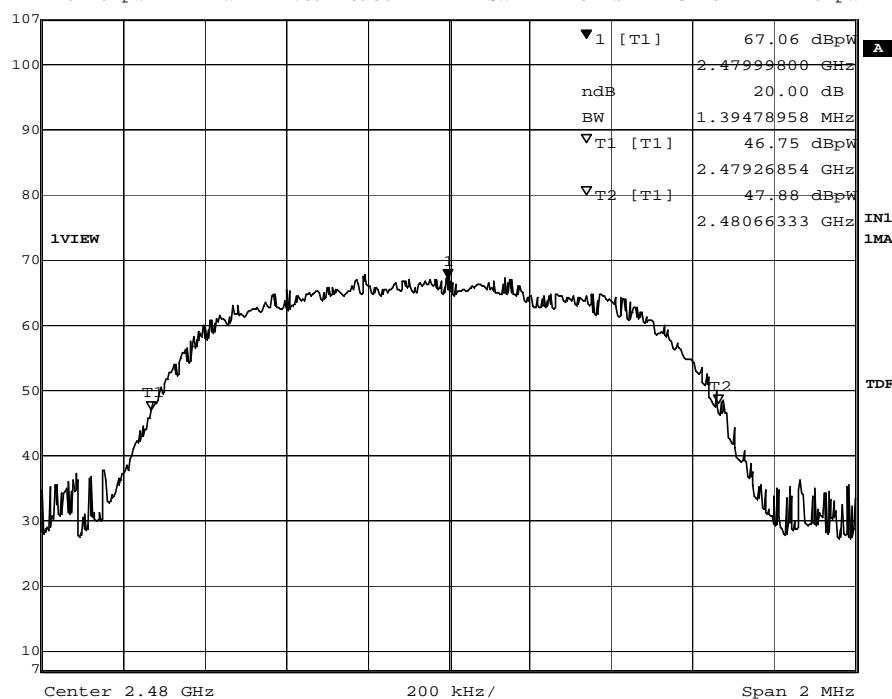

Date: 1.NOV.2012 09:31:32

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 29 of 51

No. : HM167966

Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz

Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)

Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit:

The measured minimum bandwidth * 2/3 = 1.320MHz * 2/3 = 880kHz

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02


Page 30 of 51

No. : HM167966

Channel separation = 1MHz (>880kHz)

Channel 0 – Channel 1, Pass

Marker 2 [T1]	RBW	100 kHz	RF Att	10 dB
Ref Lvl	67.33 dBpW	VBW	100 kHz	
107 dBpW	2.40300000 GHz	SWT	5 ms	Unit dBpW

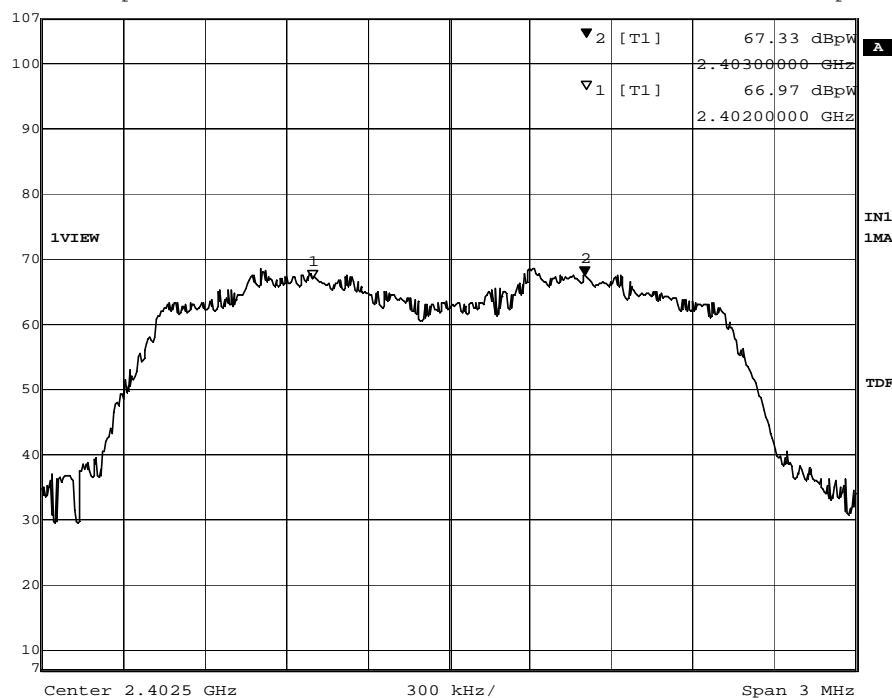

Date: 1.NOV.2012 09:37:36

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2012-11-02

Page 31 of 51

No. : HM167966

Channel 39 – Channel 40, Pass

Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	10 dB
107 dBpW	67.29 dBpW	VBW	100 kHz		
	2.44100000 GHz	SWT	5 ms	Unit	dBpW

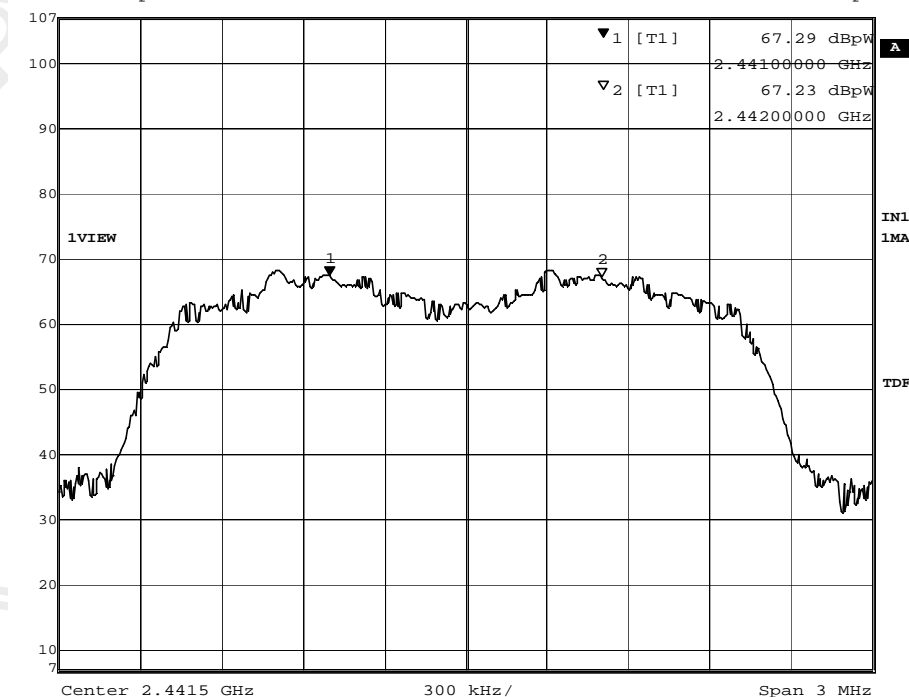

Date: 1.NOV.2012 09:39:03

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2012-11-02

Page 32 of 51

No. : HM167966

Channel 78 – Channel 79, Pass

Marker 1 [T1] RBW 100 kHz RF Att 10 dB
Ref Lvl 66.64 dBpW VBW 100 kHz
107 dBpW 2.47900000 GHz SWT 5 ms Unit dBpW

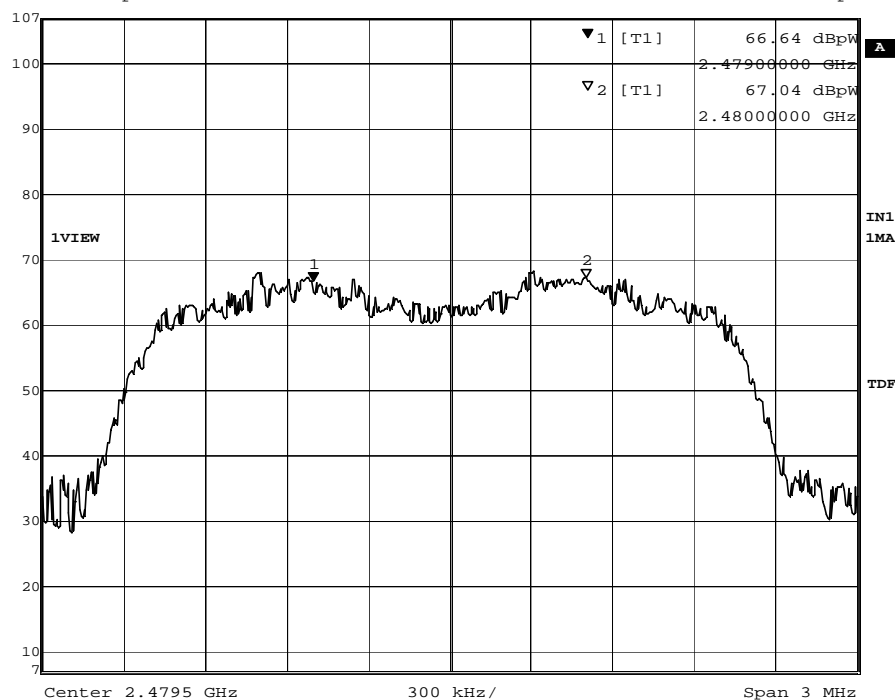

Date: 1.NOV.2012 09:35:44

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2012-11-02

Page 33 of 51

No. : HM167966

52.8dB reduction at lower band-edge

Delta 1 [T1]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	-52.79 dB	VBW	100 kHz	
97 dB μ V	-1.86372745 MHz	SWT	5 ms	Unit dB μ V

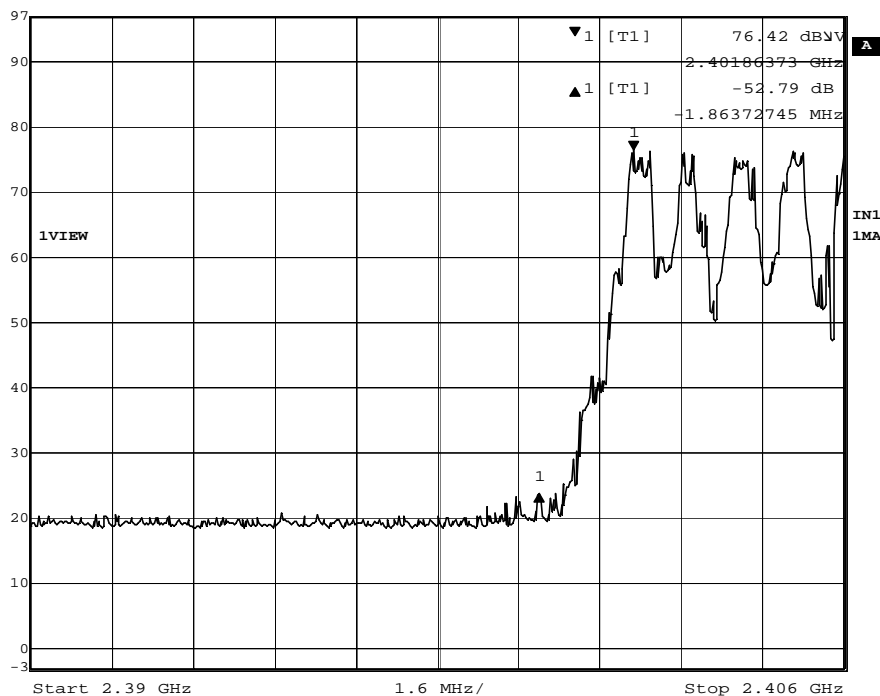

Date: 1.NOV.2012 10:07:28

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2012-11-02

Page 34 of 51

No. : HM167966

57.3dB reduction at upper band-edge

Delta 1 [T1]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	-57.31 dB	VBW	100 kHz	
97 dBV	3.32164329 MHz	SWT	5.5 ms	Unit dBV

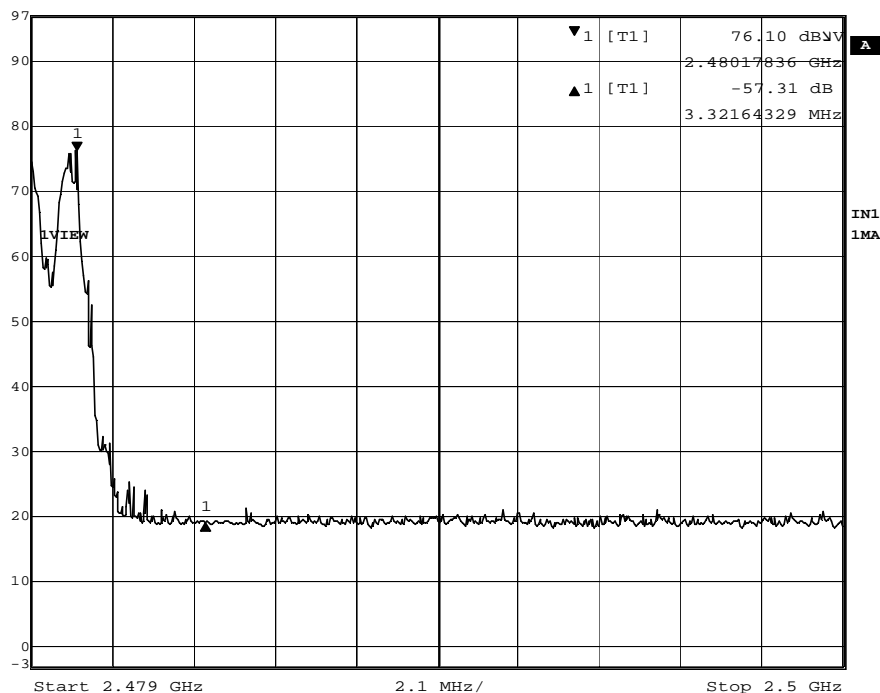

Date: 1.NOV.2012 10:16:20

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 35 of 51

No. : HM167966

Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

The EUT has 1 [Inverted-F Antenna (PCB layout)] which is permanently attached to the main unit and attached on PCB board, the antenna gain = 0dBi. All component install on inside of EUT. User unable to remove or changed the Antenna.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 36 of 51

No. : HM167966

Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 37 of 51

No. : HM167966

Occupancy Time


Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.
No requirements for Digital Transmission System.

Measurement Data:

Channel Occupied in 8DPSK: 79 of 79 Channel

Marker 2 [T1]	RBW	100 kHz	RF Att	10 dB
Ref Lvl	66.67 dBpW	VBW	100 kHz	
107 dBpW	2.48000000 GHz	SWT	21 ms	Unit dBpW

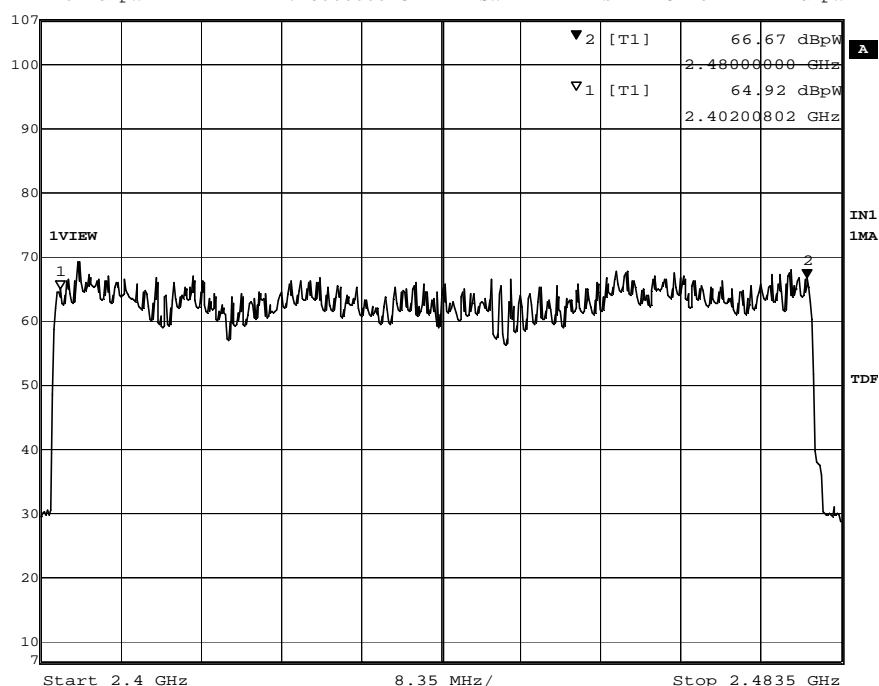

Date: 1.NOV.2012 08:40:54

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02


Page 38 of 51

No. : HM167966

DH5 Packet:

DH5 Packet permit maximum $1600/79/6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

Fig. A
[Pulse duration of Lowest Channel]

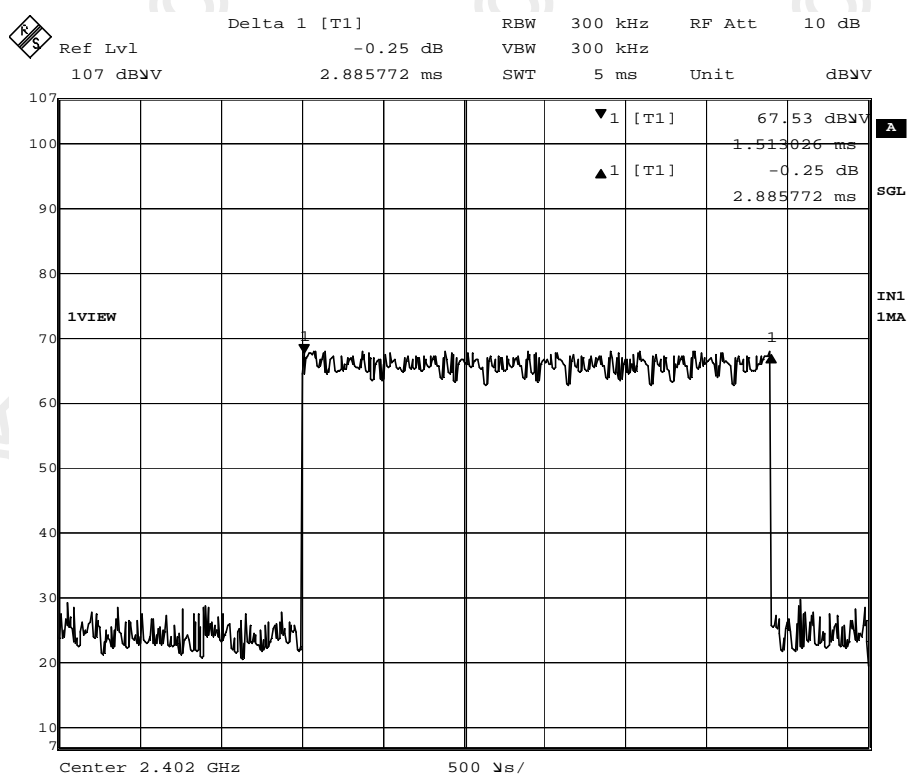

Date: 1.NOV.2012 09:49:08

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2012-11-02

Page 39 of 51

No. : HM167966

Fig. B
[Pulse duration of Middle Channel]

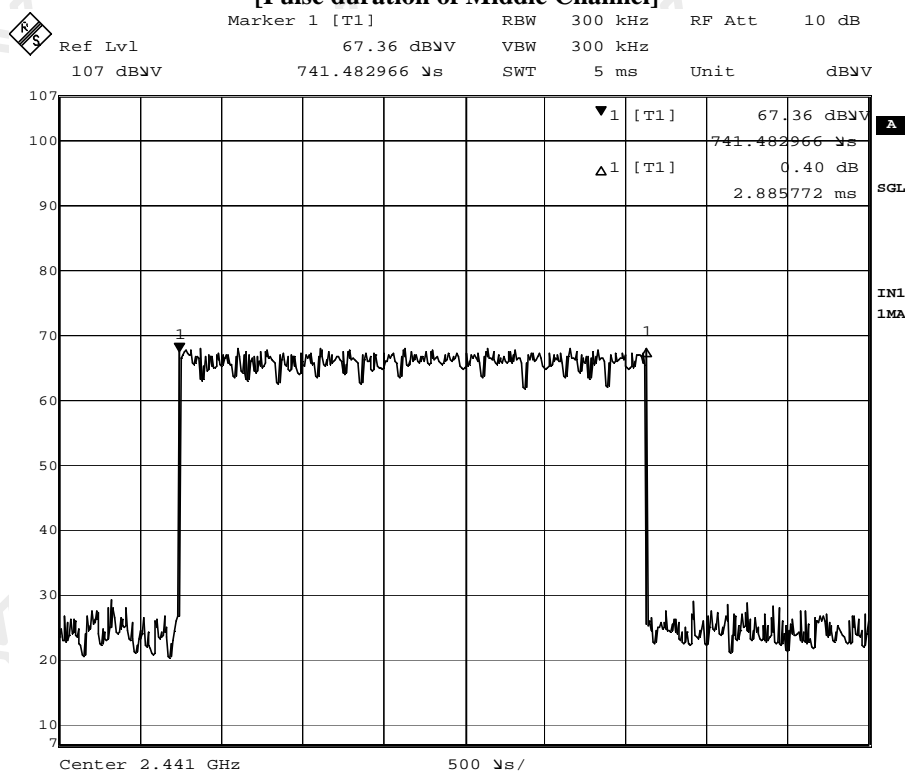

Date: 1.NOV.2012 09:41:32

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2012-11-02

Page 40 of 51

No. : HM167966

Fig. C
[Pulse duration of Highest Channel]

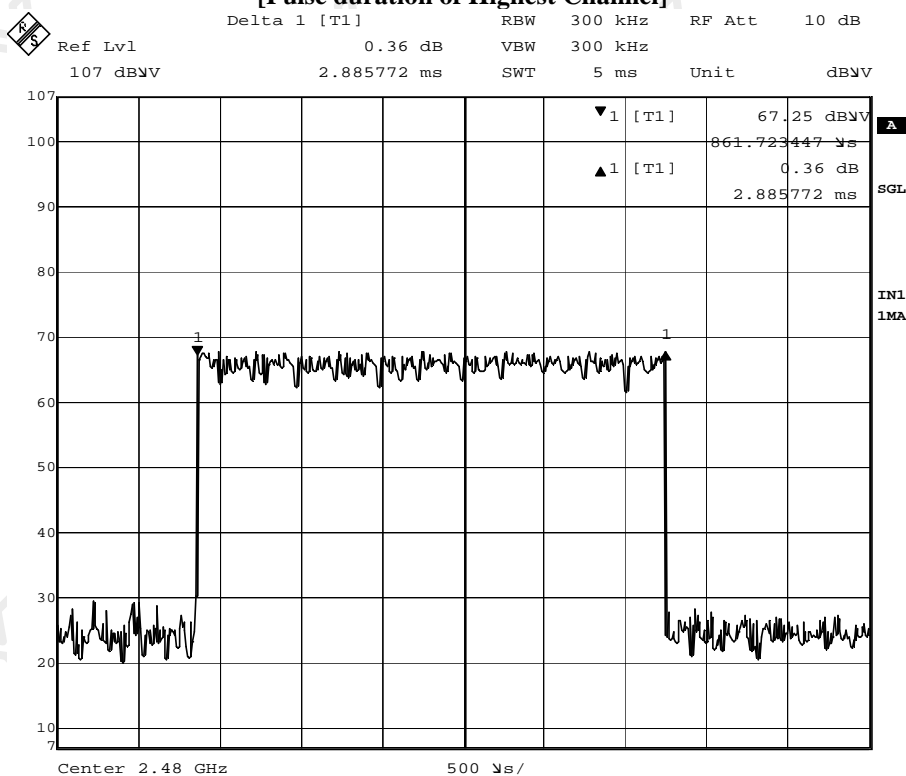

Date: 1.NOV.2012 09:48:19

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02


Page 41 of 51

No. : HM167966

DH3 Packet:

DH3 Packet permit maximum $1600/79/4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds

Fig. D
[Pulse duration of Lowest Channel]

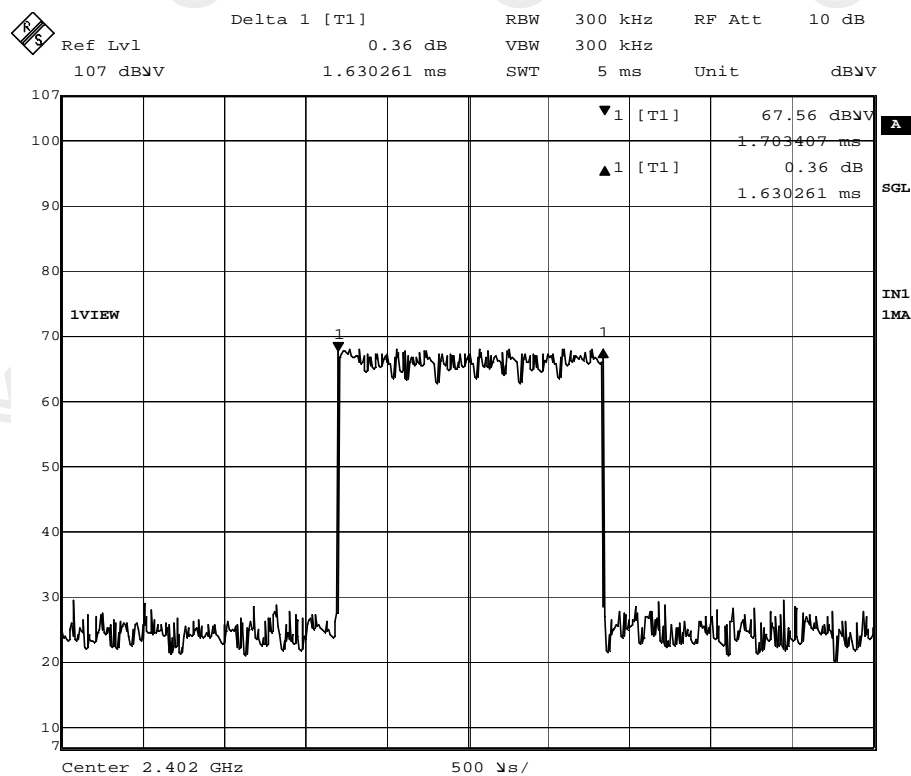

Date: 1.NOV.2012 09:50:05

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2012-11-02

Page 42 of 51

No. : HM167966

Fig. E
[Pulse duration of Middle Channel]

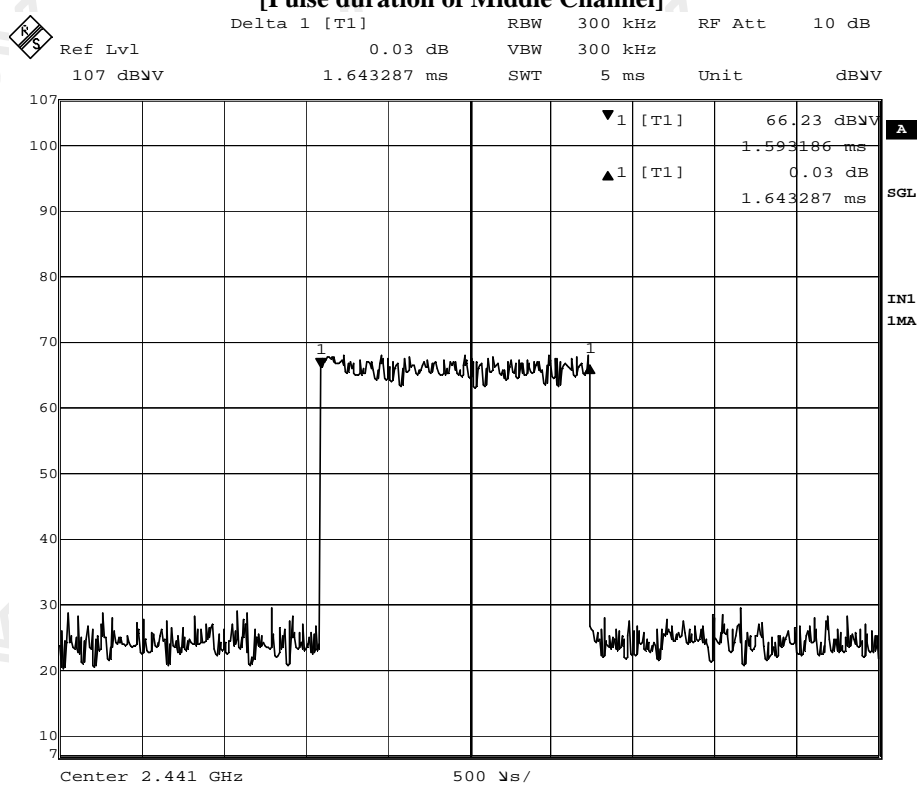

Date: 1.NOV.2012 09:42:17

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2012-11-02

Page 43 of 51

No. : HM167966

Fig. F
[Pulse duration of Highest Channel]

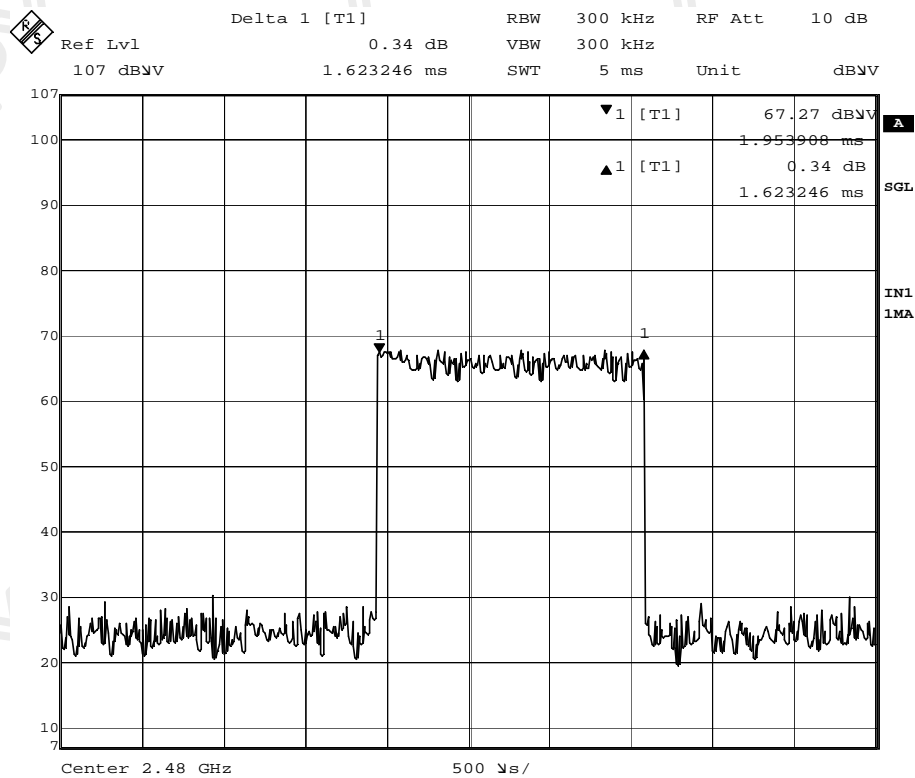

Date: 1.NOV.2012 09:47:40

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02


Page 44 of 51

No. : HM167966

DH1 Packet:

DH1 Packet permit maximum $1600/79/2 = 10.12$ hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

Fig. G
[Pulse duration of Lowest Channel]

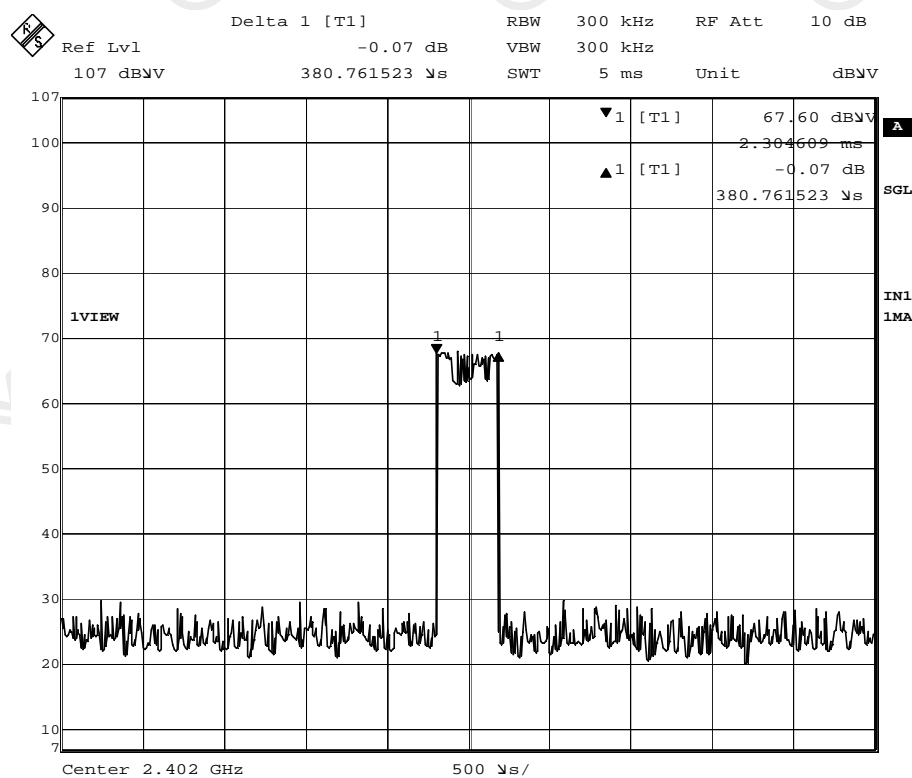

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2012-11-02

Page 45 of 51

No. : HM167966

Fig. H
[Pulse duration of Middle Channel]

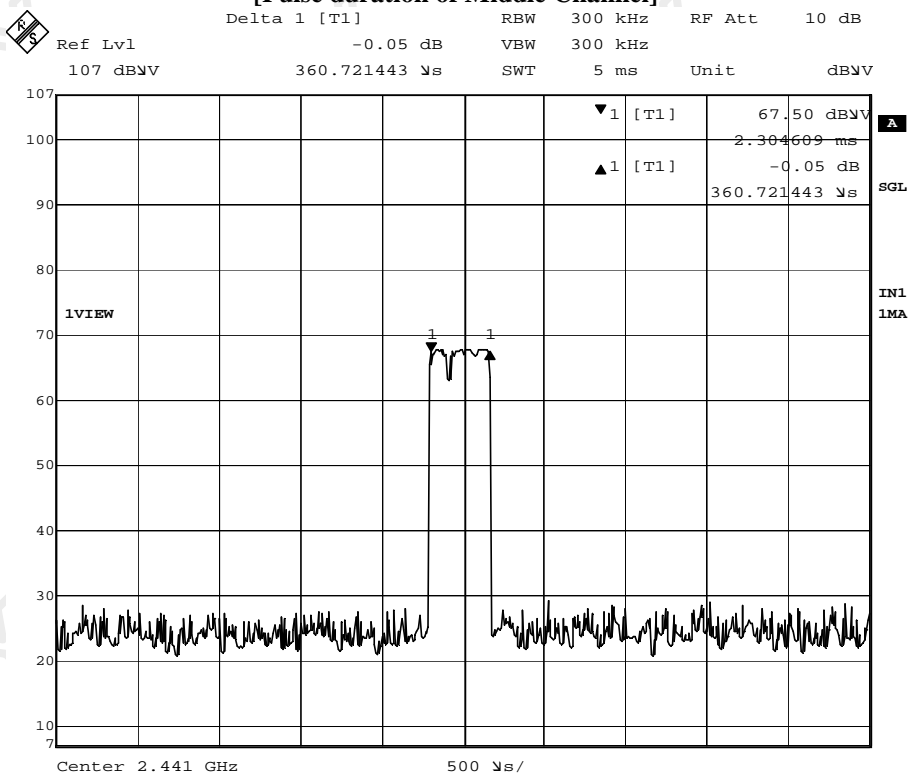

Date: 1.NOV.2012 09:45:12

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2012-11-02

Page 46 of 51

No. : HM167966

Fig. I
[Pulse duration of Highest Channel]

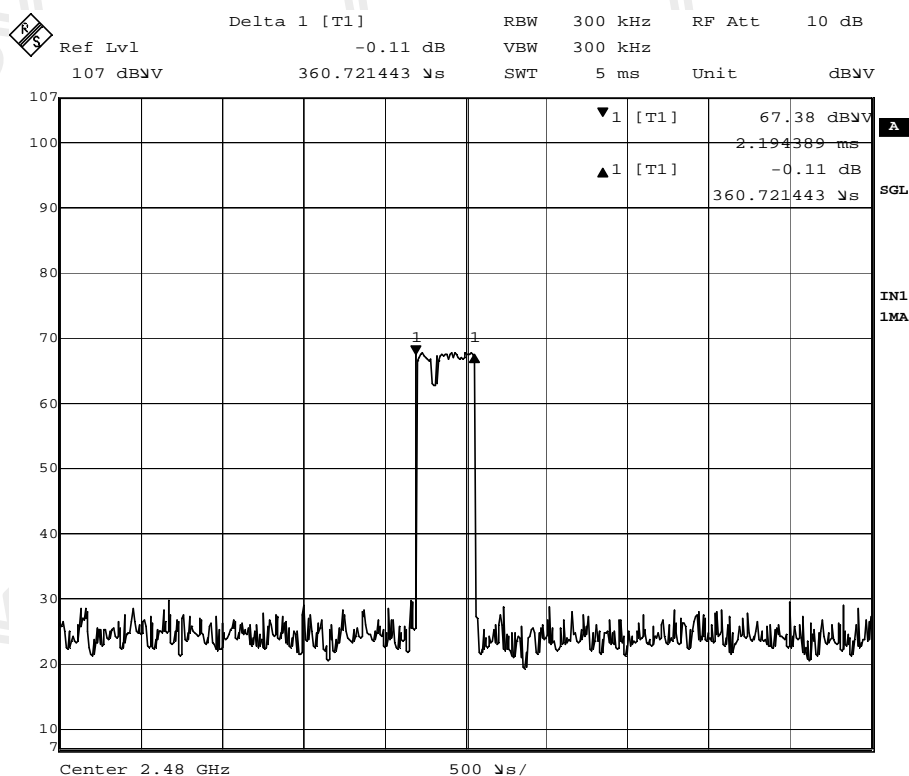

Date: 1.NOV.2012 09:47:01

Time of occupancy:

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Results
DH5	2402	2.886	0.308	0.400	Complies
DH5	2442	2.886	0.308	0.400	Complies
DH5	2480	2.886	0.308	0.400	Complies
DH3	2402	1.630	0.261	0.400	Complies
DH3	2442	1.643	0.263	0.400	Complies
DH3	2480	1.623	0.261	0.400	Complies
DH1	2402	0.361	0.116	0.400	Complies
DH1	2442	0.361	0.116	0.400	Complies
DH1	2480	0.361	0.116	0.400	Complies

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 47 of 51

No. : HM167966

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM299	DOUBLE-RIDGED WAVEGUIDE HORN ANTENNA	ETS-LINDGREN	3115	00114120	2012/01/25	2014/01/25
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3	--	2012/10/25	2013/10/25
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	2011/03/01	2013/03/01
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2012/05/03	2013/05/03
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2011/09/14	2013/09/14

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM197	LISN	EMCO	4825/2	1193	2012/05/16	2013/05/16
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2012/05/03	2013/05/03
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357-8810.52/54	2012/01/27	2013/01/27
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057-99A	2012/01/27	2013/01/27

Appendix B

Ancillary Equipment

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	iPod	A1137	N/A	Serial No. 5U603KHUSZB Rating: 5-30Vd.c. 1A Max.

Remarks:-

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 48 of 51

No. : HM167966

Appendix C

Photographs of EUT


Front View of the product




Rear View of the product



Inner Circuit Top View

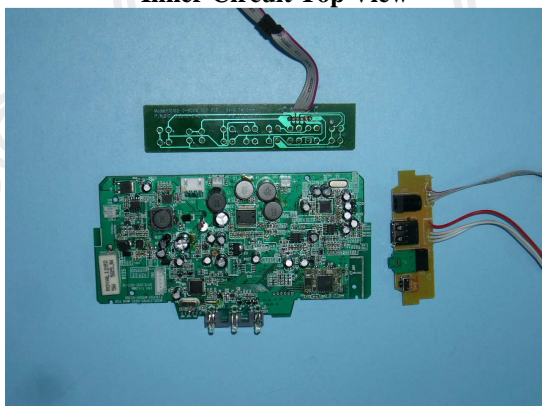

Inner Circuit Bottom View

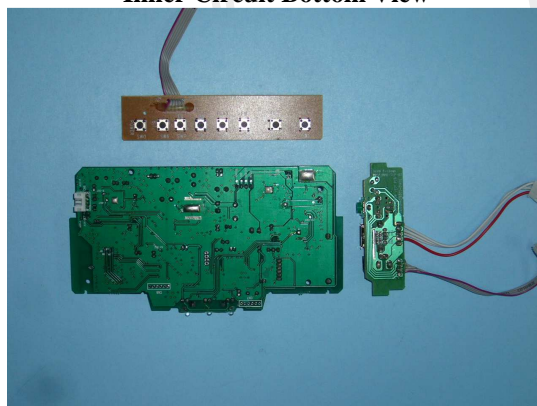

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2012-11-02

Page 49 of 51

No. : HM167966

Photographs of EUT

Measurement of Radiated Emission Test Set Up [Aux mode]

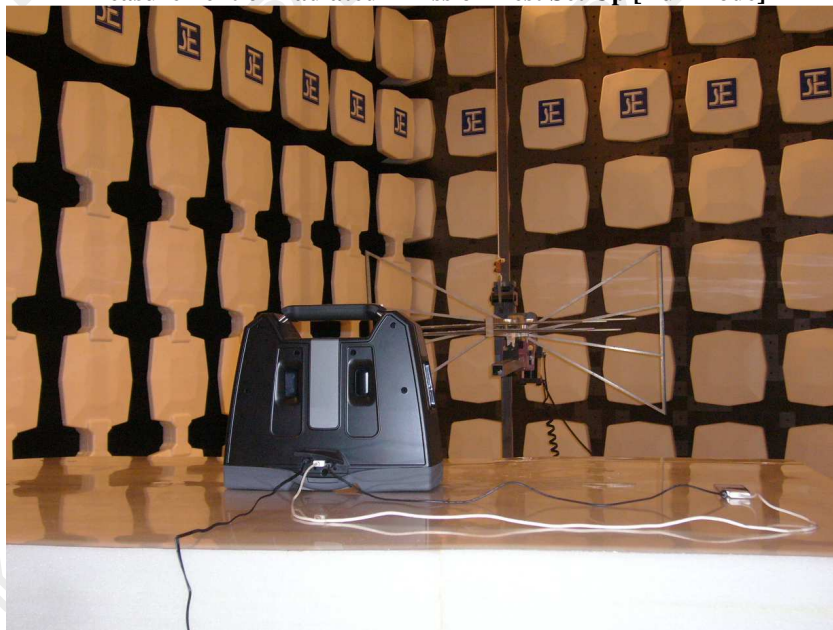

Measurement of Radiated Emission Test Set Up [communication mode]



The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 50 of 51

No. : HM167966

Photographs of EUT

Measurement of Radiated Emission Test Set Up [communication mode]



Measurement of Conducted Emission Test Set Up [Aux mode]



The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2012-11-02

Page 51 of 51

No. : HM167966

Measurement of Conducted Emission Test Set Up [Communication mode]



***** End of Test Report *****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage