

---

# FCC Test Report

---

Report No.: AGC03444170605FE03

**FCC ID** : AUSCR6019D  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Executive Deluxe USB Turntable  
**BRAND NAME** : CROSLEY  
**MODEL NAME** : See page 4  
**CLIENT** : Modern Marketing Concepts, Inc.  
**DATE OF ISSUE** : Jul12, 2017  
**STANDARD(S)**  
**TEST PROCEDURE(S)** : FCC Part 15 Subpart C Section 15.249  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



**Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul.12, 2017	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION .....	5
2.2. TABLE OF CARRIER FREQUENCYS .....	5
<b>3. MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>6</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
5.1. CONFIGURATION OF EUT SYSTEM.....	8
5.2. EQUIPMENT USED IN EUT SYSTEM.....	8
5.3. SUMMARY OF TEST RESULTS.....	8
<b>6. TEST FACILITY .....</b>	<b>9</b>
<b>7. TEST METHOD .....</b>	<b>9</b>
<b>8. ALL TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>9. RADIATED EMISSION .....</b>	<b>11</b>
9.1TEST LIMIT.....	11
9.2. MEASUREMENT PROCEDURE.....	12
9.3. TEST SETUP .....	14
9.4. TEST RESULT .....	16
<b>10. BAND EDGE EMISSION .....</b>	<b>32</b>
10.1. MEASUREMENT PROCEDURE.....	32
10.2 TEST SETUP .....	32
10.3 RADIATED TEST RESULT .....	33
<b>11. 20DB BANDWIDTH.....</b>	<b>37</b>
11.1. MEASUREMENT PROCEDURE .....	37
11.2. TEST SET-UP .....	37
11.3. LIMITS AND MEASUREMENT RESULTS .....	37
<b>12. FCC LINE CONDUCTED EMISSION TEST .....</b>	<b>44</b>
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....	44
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	44
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	45
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	45
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	46
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>48</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>51</b>

## 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	Modern Marketing Concepts, Inc.
<b>Address</b>	1220 E Oak, St. Louisville, Kentucky, United States 40204
<b>Manufacturer</b>	TIMSEN INTERNATIONAL LIMITED
<b>Address</b>	5F, No. 447, Tianhebei Road, Tianhe District, Guangzhou, Guangdong Province, 510610, China
<b>Product Designation</b>	Executive Deluxe USB Turntable
<b>Brand Name</b>	CROSLEY
<b>Test Model</b>	CR6019D-BR
<b>Series Model</b>	CR6019X-XX
<b>Difference description</b>	All the same except for the appearance color(xx represents the color, they can be replaced by letter from A to Z or blank)
<b>Date of test</b>	Jul.08, 2017 to Jul.09, 2017
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By   
Time Huang(Huang Nanhui) Jul.09, 2017

Reviewed By   
Forrest Lei(Lei Yonggang) Jul.12, 2017

Approved By   
Solger Zhang(Zhang Hongyi)  
Authorized Officer Jul.12, 2017

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	2.68dBm(Max EIRP Power=Max radiation field-95.2)
<b>Bluetooth Version</b>	V4.2
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Number of channels</b>	79
<b>Hardware Version</b>	V4.0
<b>Software Version</b>	V4.00
<b>Antenna Designation</b>	PCB Antenna
<b>Antenna Gain</b>	2dBi
<b>Power Supply(by adapter 1)</b>	INPUT: AC100-240V 50/60Hz 1.5A OUTPUT: DC 12V 500mA
<b>Power Supply(by adapter 2)</b>	INPUT: AC100-240V~50/60Hz Max 200mA OUTPUT: DC 12V---500mA
<b>Note:</b> 1. The EUT didn't support BLE. 2. The EUT is equipped with two adapters, both have been assessed and only the worst test data of adapter 1 recorded in this report.	

### 2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz


### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

### 4. DESCRIPTION OF TEST MODES


NO.	TEST MODE DESCRIPTION
1	Low channel TX(GFSK)
2	Middle channel TX (GFSK)
3	High channel TX (GFSK)
4	Low channel TX( $\pi/4$ -DQPSK)
5	Middle channel TX( $\pi/4$ -DQPSK)
6	High channel TX ( $\pi/4$ -DQPSK)
7	Low channel TX(8DPSK)
8	Middle channel TX (8DPSK)
9	High channel TX (8DPSK)
10	BT Link

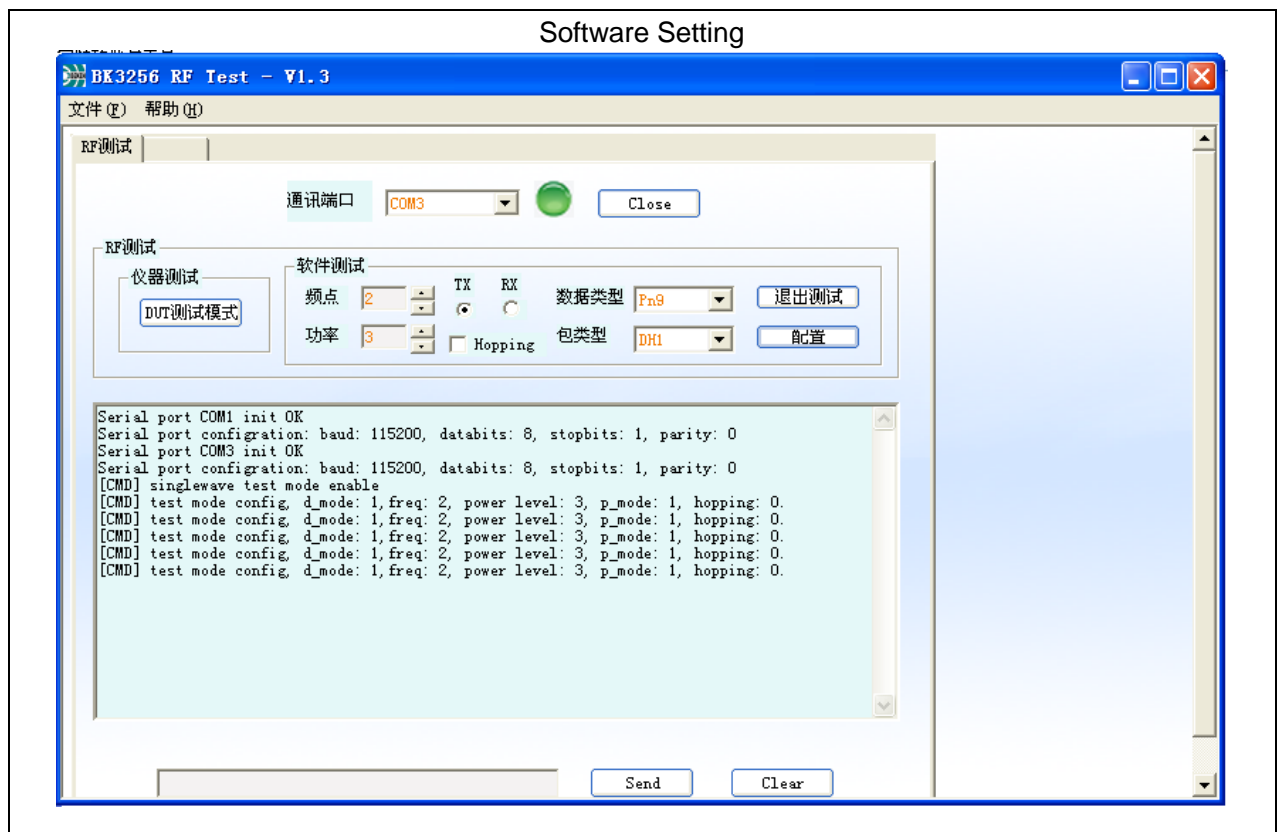


## 5. SYSTEM TEST CONFIGURATION

### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

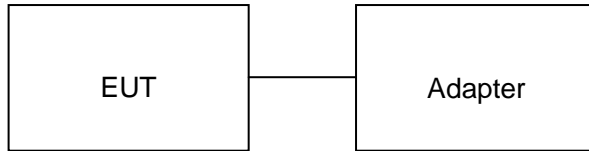

Configure 2: (Control continuous TX)

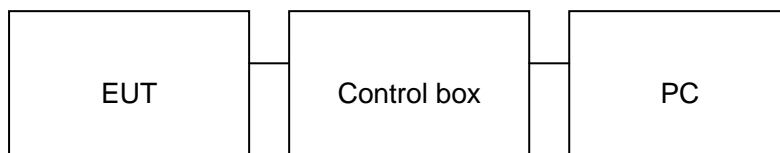

### 5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK
1	Executive Deluxe USB Turntable	CROSLEY	CR6019D-BR	EUT
2	PC	Sony	E1412AYCW	A.E
3	PC Adapter	Sony	VGP-AC19V36	A.E
4	Control box	BEKEN	N/A	A.E
5	Adapter 1	N/A	RHD10W120050	Accessory
6	Adapter 2	N/A	SW1200500-F04	Accessory
7	USB Cable	N/A	1.0m Unshielded	A.E

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant



## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

## 7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

## 8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2017	July 3, 2018
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2017	July 3, 2018
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2017	July 3, 2018
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2017	July 3, 2018
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2017	June 5, 2018
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
temporary antenna connector	N/A	S100	--	July 4, 2017	July 3, 2018

FOR RADIATED EMISSION TEST (1GHz ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2017	July 3, 2018
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2017	July 3, 2018
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2017	July 6, 2018
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2017	July 7, 2018
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2017	July 3, 2018
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2017	July 7, 2018
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2017	July 7, 2018
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2017	July 3, 2018
Shielded Room	CHENGYU	843	PTS-002	June 6, 2017	June 5, 2018
Conduction Cable	MXT	SE1	S003	June 6, 2017	June 5, 2018

## 9. RADIATED EMISSION

### 9.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 9.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/VBW 6MHz for Peak, RBW 1.5MHz/10Hz for Average
<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 9.3. TEST SETUP

#### RADIATED EMISSION TEST SETUP BELOW 30MHz



#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz



### RADIATED EMISSION TEST SETUP ABOVE 1000MHz



#### **9.4. TEST RESULT**

**(Worst modulation:GFSK)**

**FOR BR/EDR**


##### **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.



## RADIATED EMISSION BELOW 1GHz

### RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

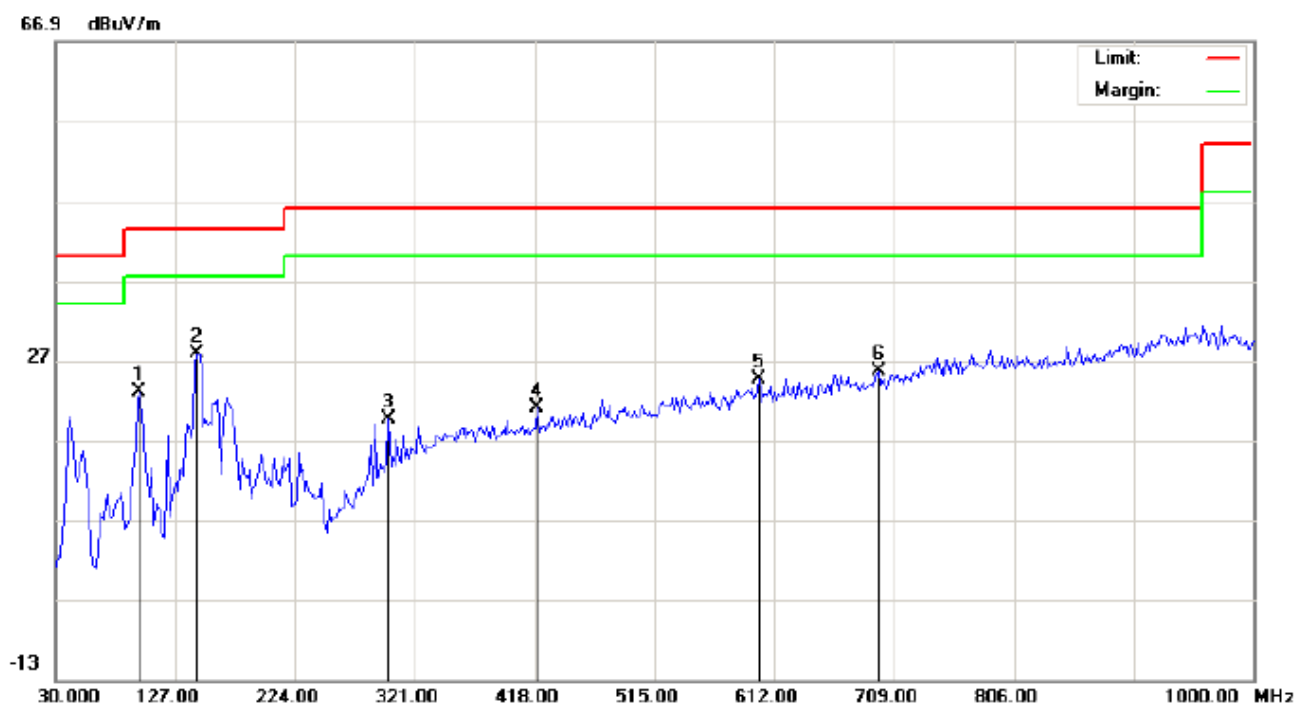

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: Executive Deluxe USB Turntable  
M/N: CR6019D-BR  
Mode: Low Channel TX  
Note:


Polarization: *Horizontal*  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq. MHz	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		97.9000	14.72	8.38	23.10	43.50	-20.40	peak			
2	*	144.7833	13.77	14.04	27.81	43.50	-15.69	peak			
3		299.9833	4.25	15.41	19.66	46.00	-26.34	peak			
4		419.6167	1.35	19.67	21.02	46.00	-24.98	peak			
5		599.0667	0.83	23.71	24.54	46.00	-21.46	peak			
6		696.0667	0.57	25.08	25.65	46.00	-20.35	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

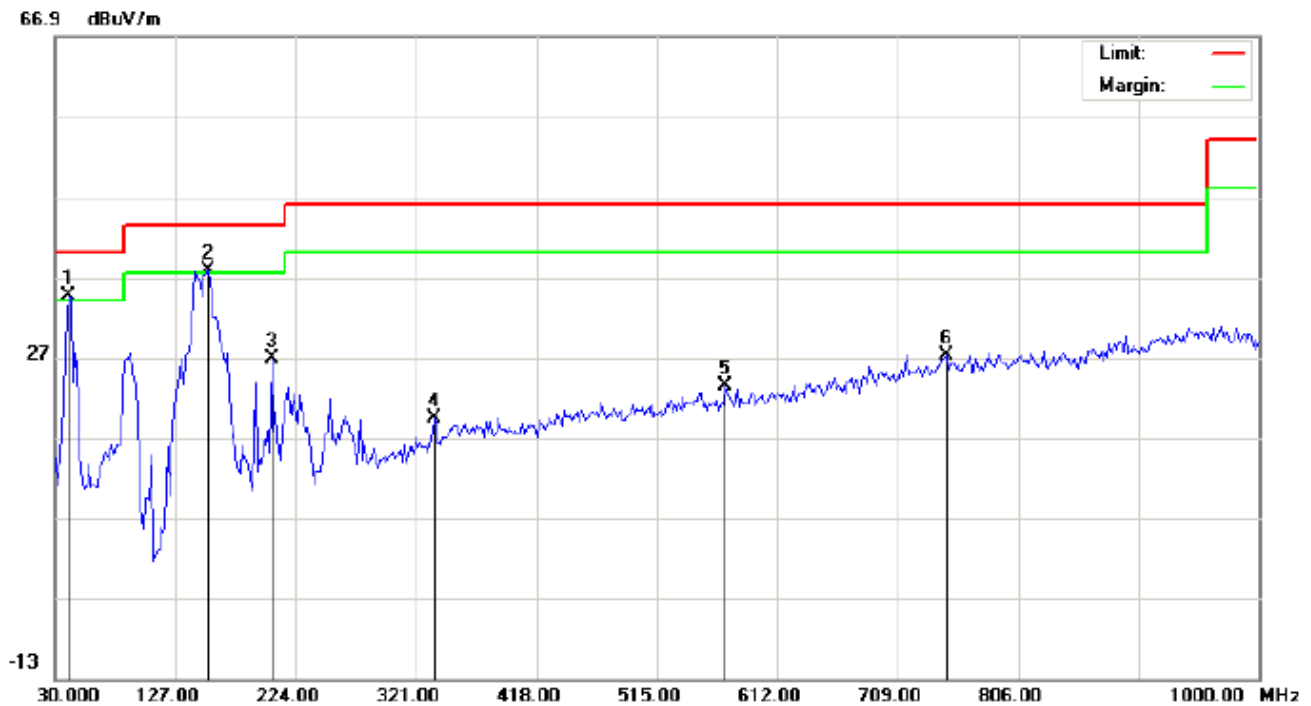

Site: site #1

Polarization: **Vertical**

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	25.77	8.81	34.58	40.00	-5.42	peak			
2	!	152.8667	22.58	15.28	37.86	43.50	-5.64	peak			
3		204.6000	17.39	9.45	26.84	43.50	-16.66	peak			
4		335.5500	1.53	17.78	19.31	46.00	-26.69	peak			
5		569.9667	0.89	22.58	23.47	46.00	-22.53	peak			
6		747.8000	0.59	26.57	27.16	46.00	-18.84	peak			

**RESULT: PASS****Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

## RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

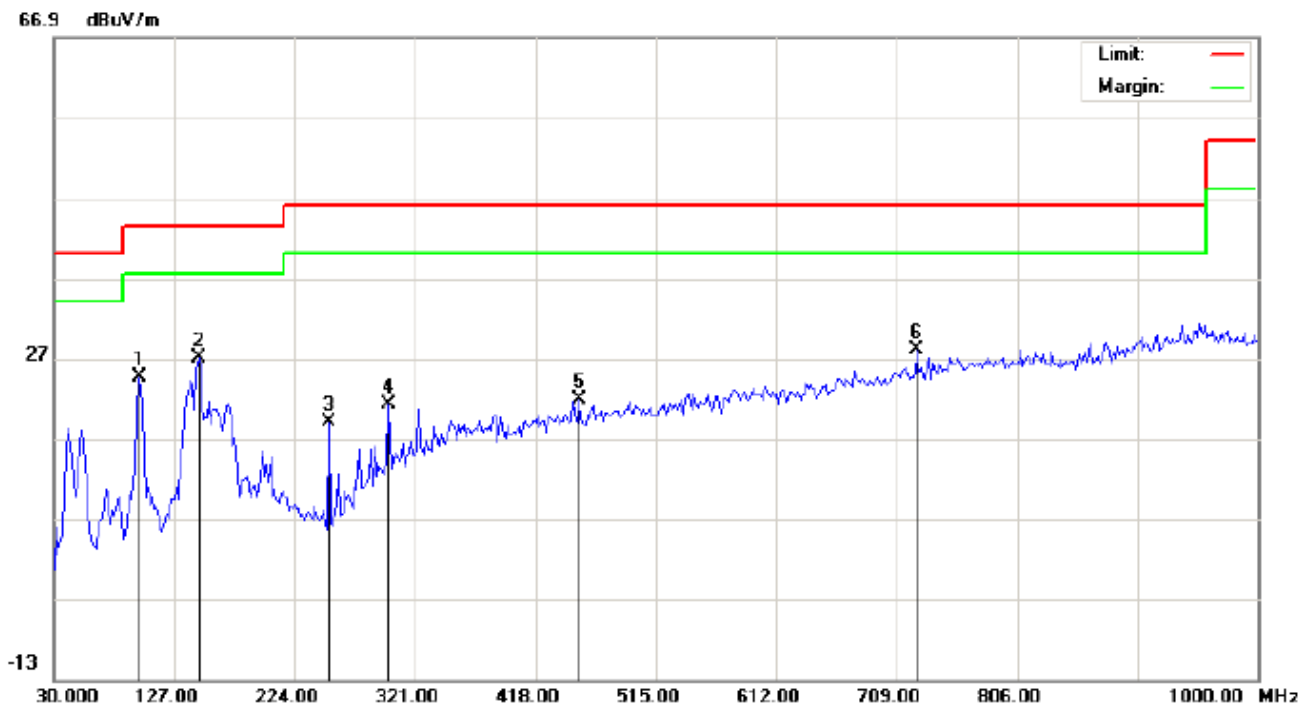

Site: site #1

Polarization: *Horizontal*

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		99.5167	14.52	10.00	24.52	43.50	-18.98	peak			
2	*	146.4000	13.29	13.64	26.93	43.50	-16.57	peak			
3		251.4833	11.90	7.15	19.05	46.00	-26.95	peak			
4		299.9833	5.82	15.41	21.23	46.00	-24.77	peak			
5		453.5667	1.11	20.63	21.74	46.00	-24.26	peak			
6		725.1667	2.09	25.91	28.00	46.00	-18.00	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL –VERTICAL

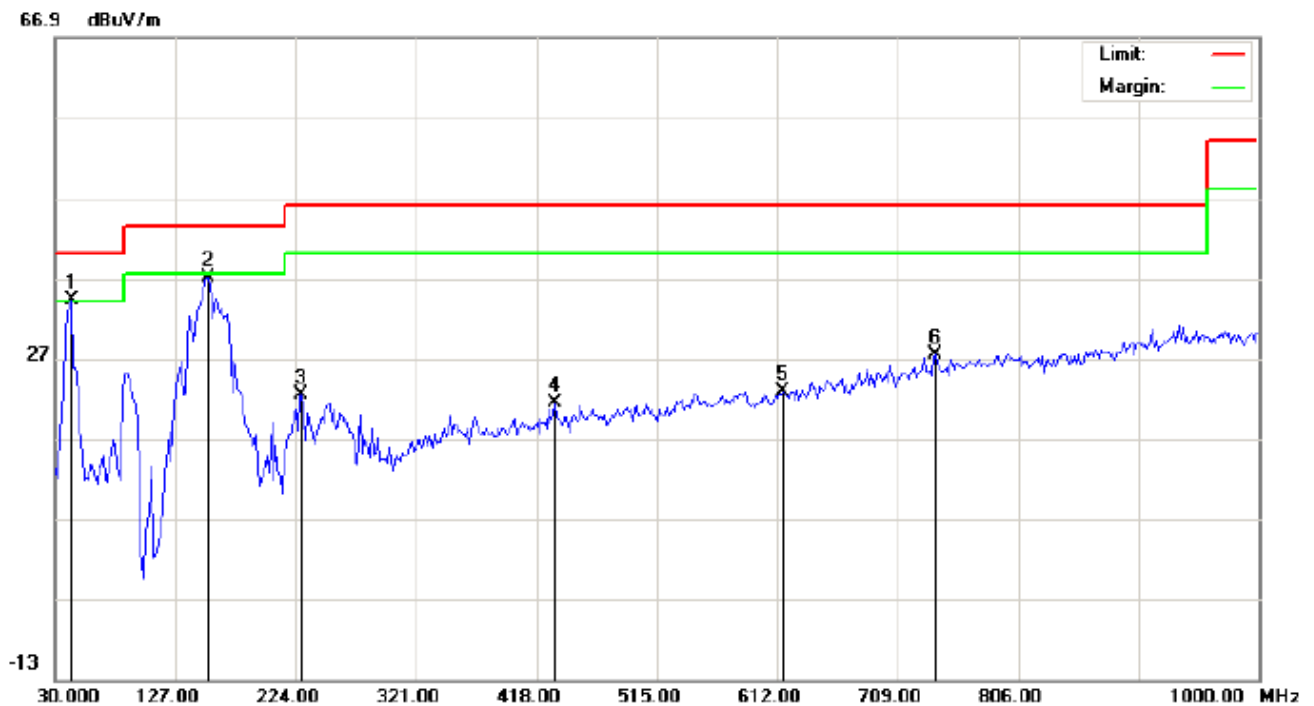

Site: site #1

Polarization: **Vertical**

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR

Mode: Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	42.9333	25.46	8.71	34.17	40.00	-5.83	peak			
2		152.8667	21.81	15.28	37.09	43.50	-6.41	peak			
3		228.8500	10.66	11.83	22.49	46.00	-23.51	peak			
4		432.5500	1.31	20.06	21.37	46.00	-24.63	peak			
5		616.8500	-0.27	23.11	22.84	46.00	-23.16	peak			
6		739.7167	1.02	26.33	27.35	46.00	-18.65	peak			

**RESULT: PASS****Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

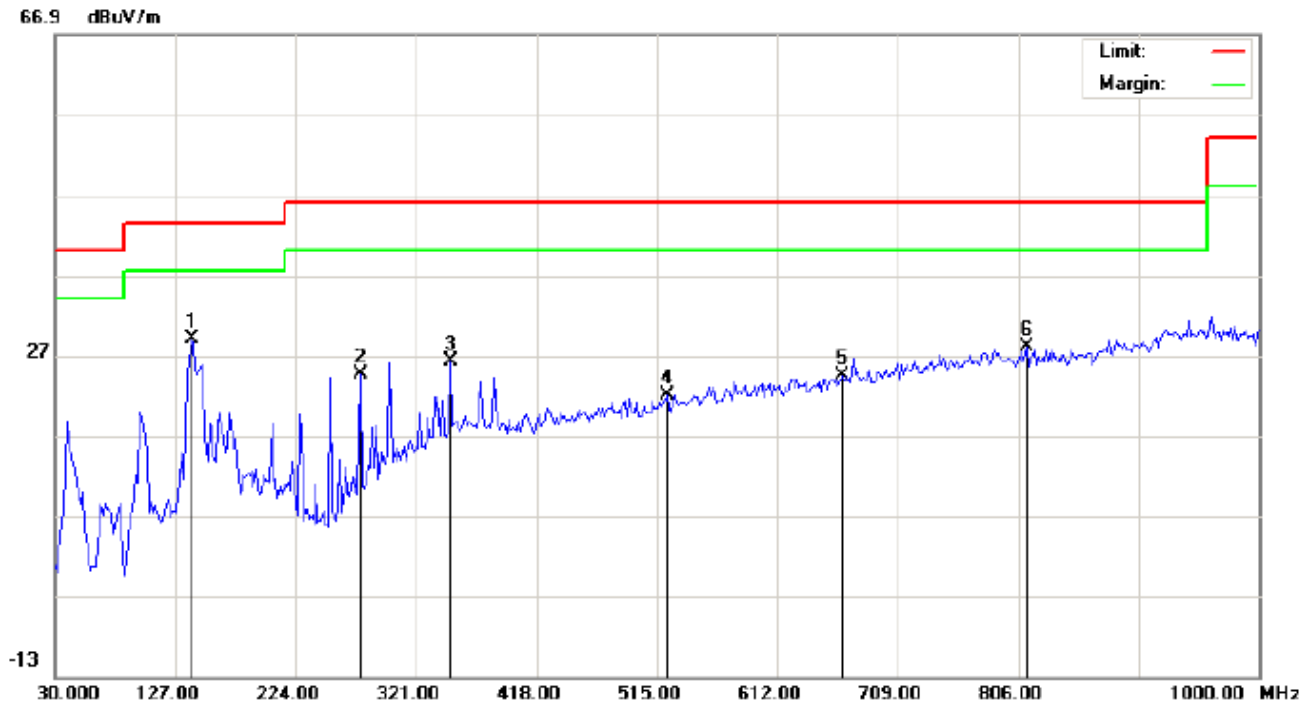

Site: site #1

Polarization: *Horizontal*

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	139.9333	13.88	15.17	29.05	43.50	-14.45	peak			
2		275.7333	13.33	11.28	24.61	46.00	-21.39	peak			
3		348.4833	7.65	18.64	26.29	46.00	-19.71	peak			
4		523.0833	0.21	21.75	21.96	46.00	-24.04	peak			
5		663.7333	0.21	24.22	24.43	46.00	-21.57	peak			
6		812.4667	0.72	27.32	28.04	46.00	-17.96	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

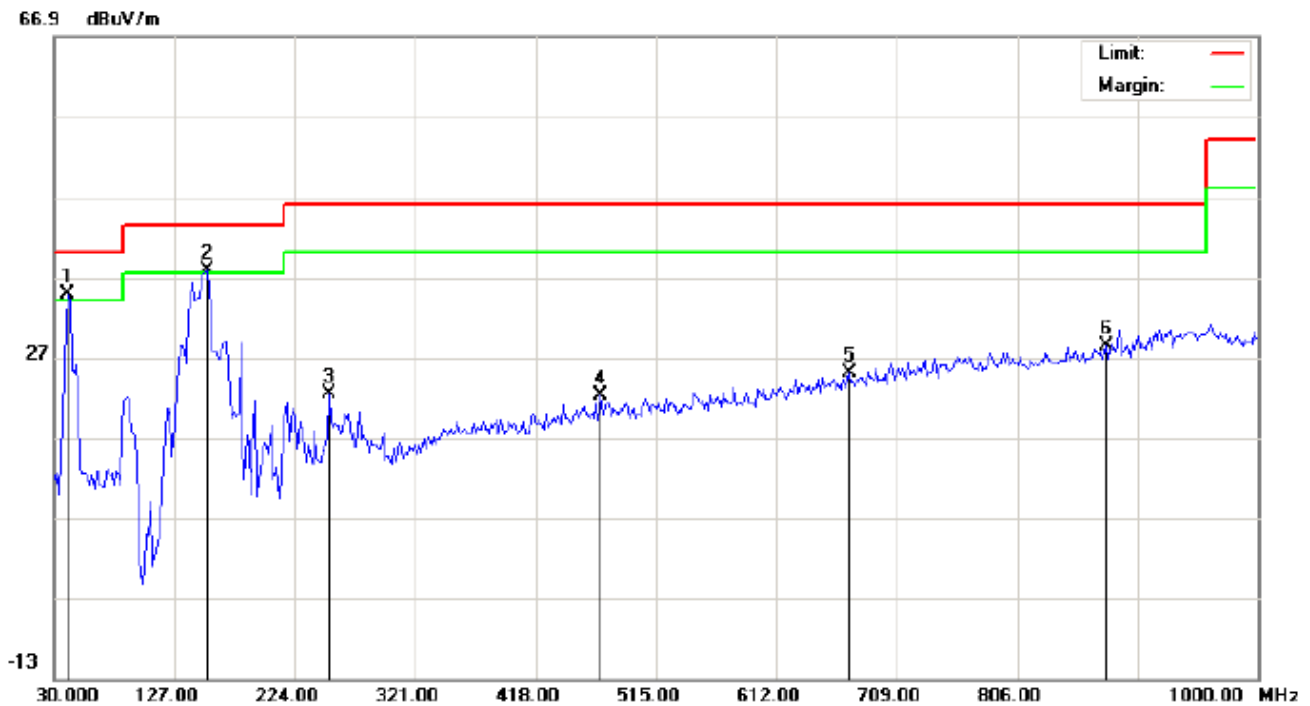

Site: site #1

Polarization: **Vertical**

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	25.92	8.81	34.73	40.00	-5.27	peak			
2	!	152.8667	22.59	15.28	37.87	43.50	-5.63	peak			
3		251.4833	8.40	13.94	22.34	46.00	-23.66	peak			
4		469.7333	1.46	20.80	22.26	46.00	-23.74	peak			
5		670.2000	0.60	24.39	24.99	46.00	-21.01	peak			
6		877.1333	0.30	28.02	28.32	46.00	-17.68	peak			

**RESULT: PASS****Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

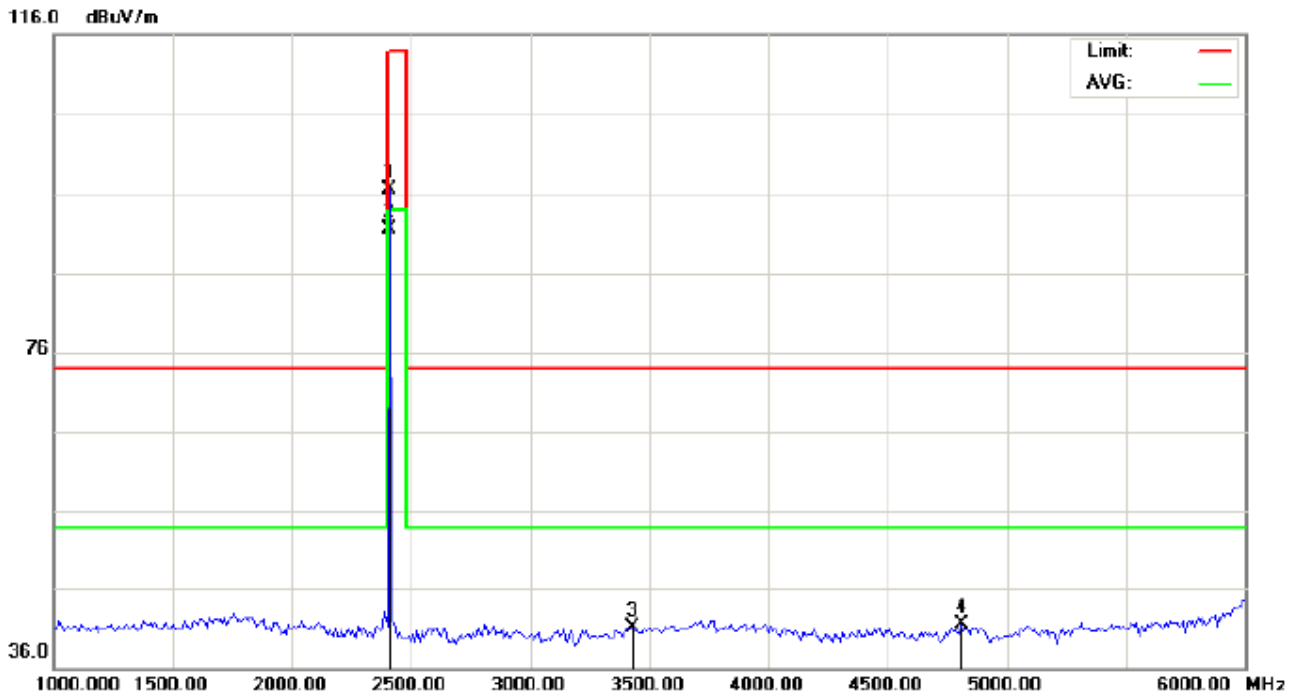**RADIATED EMISSION ABOVE 1GHz****(Worst modulation: GFSK)****FOR BR/EDR****RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

Site: site #1

Polarization: *Horizontal*

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	86.20	10.32	96.52	114.00	-17.48	peak			
2	*	2402.000	81.25	10.32	91.57	94.00	-2.43	AVG			
3		3433.333	29.09	12.05	41.14	74.00	-32.86	peak			
4		4808.334	33.73	7.70	41.43	74.00	-32.57	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

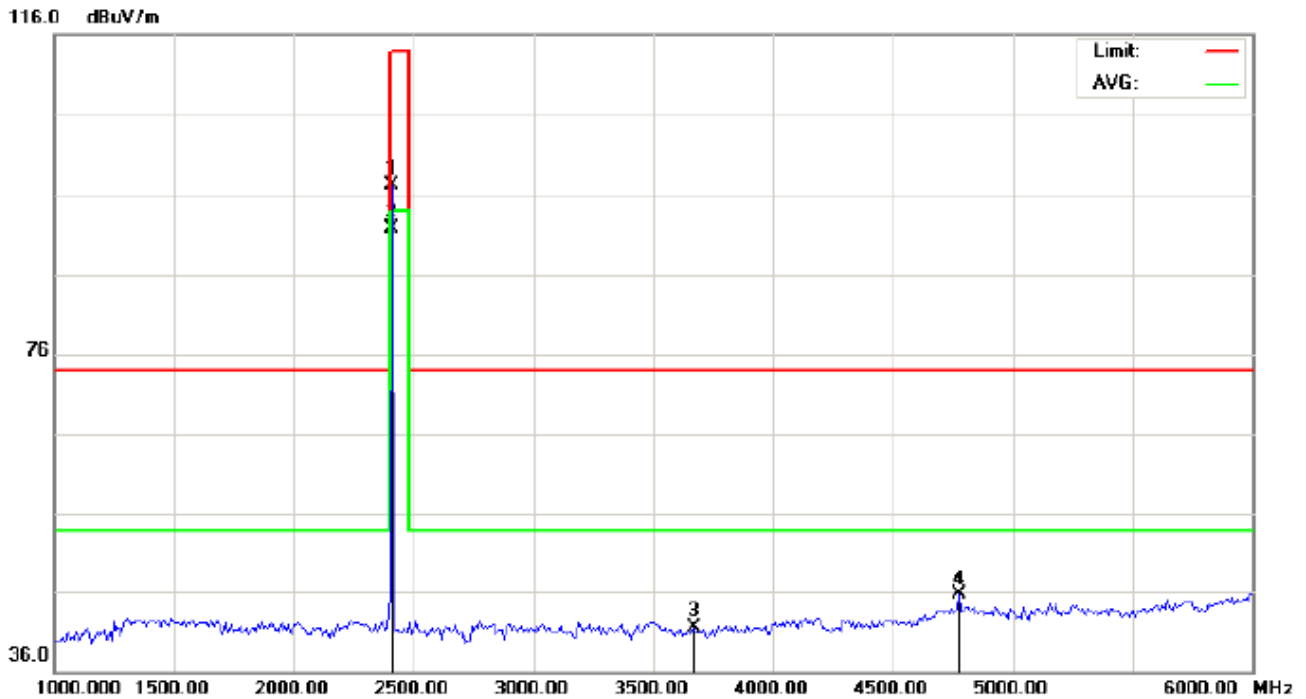

Site: site #1

Polarization: **Vertical**

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	86.81	10.32	97.13	114.00	-16.87	peak			
2	*	2402.000	81.43	10.32	91.75	94.00	-2.25	AVG			
3		3666.667	28.35	13.14	41.49	74.00	-32.51	peak			
4		4775.000	38.05	7.61	45.66	74.00	-28.34	peak			

**RESULT: PASS**



## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

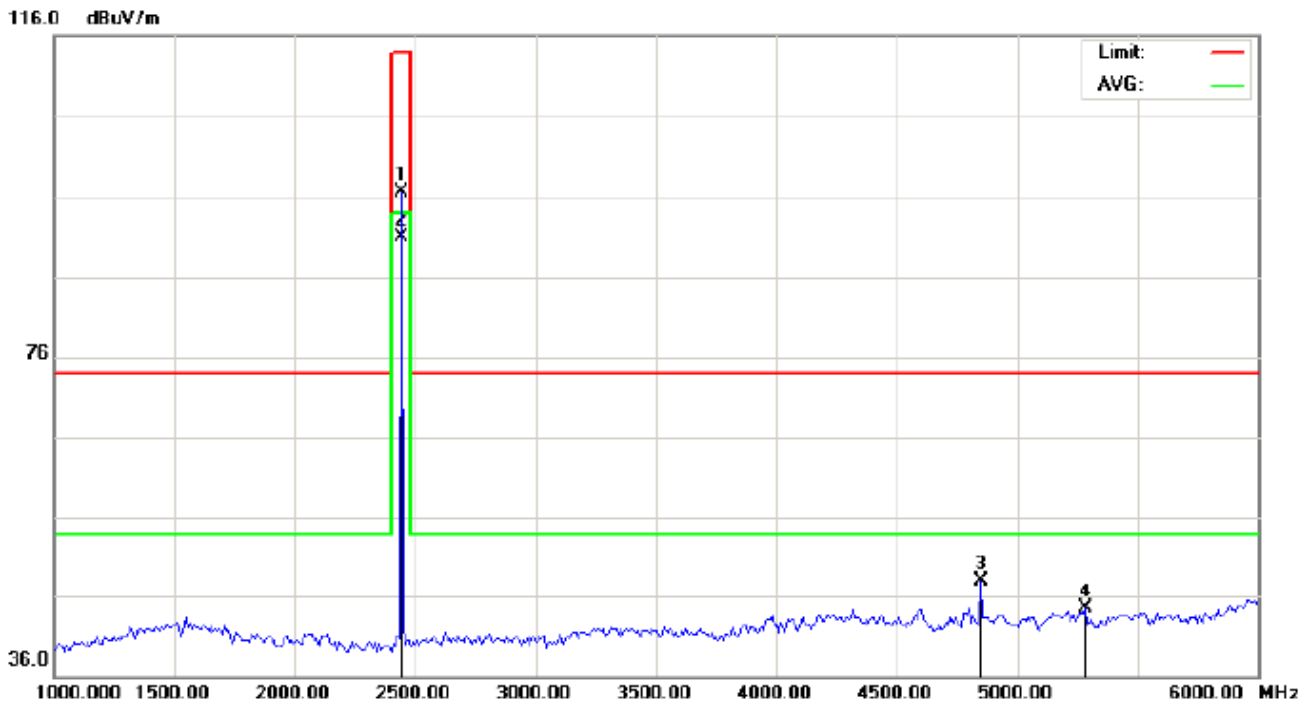

Site: site #1

Polarization: *Horizontal*

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	86.23	10.37	96.60	114.00	-17.40	peak			
2	*	2441.000	80.59	10.37	90.96	94.00	-3.04	AVG			
3		4850.000	40.28	7.81	48.09	74.00	-25.91	peak			
4		5283.333	42.02	2.53	44.55	74.00	-29.45	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

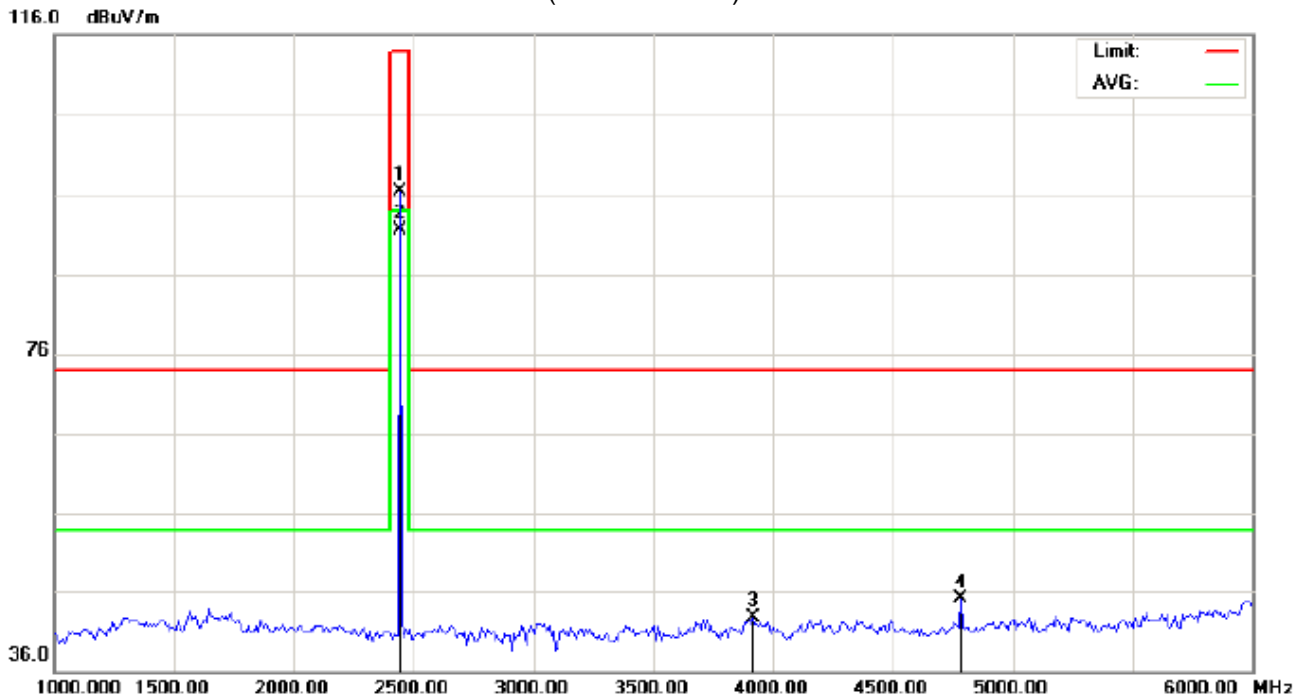

Site: site #1

Polarization: *Vertical*

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	85.98	10.37	96.35	114.00	-17.65	peak			
2	*	2441.000	81.09	10.37	91.46	94.00	-2.54	AVG			
3		3916.667	28.00	14.68	42.68	74.00	-31.32	peak			
4		4783.333	37.53	7.63	45.16	74.00	-28.84	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

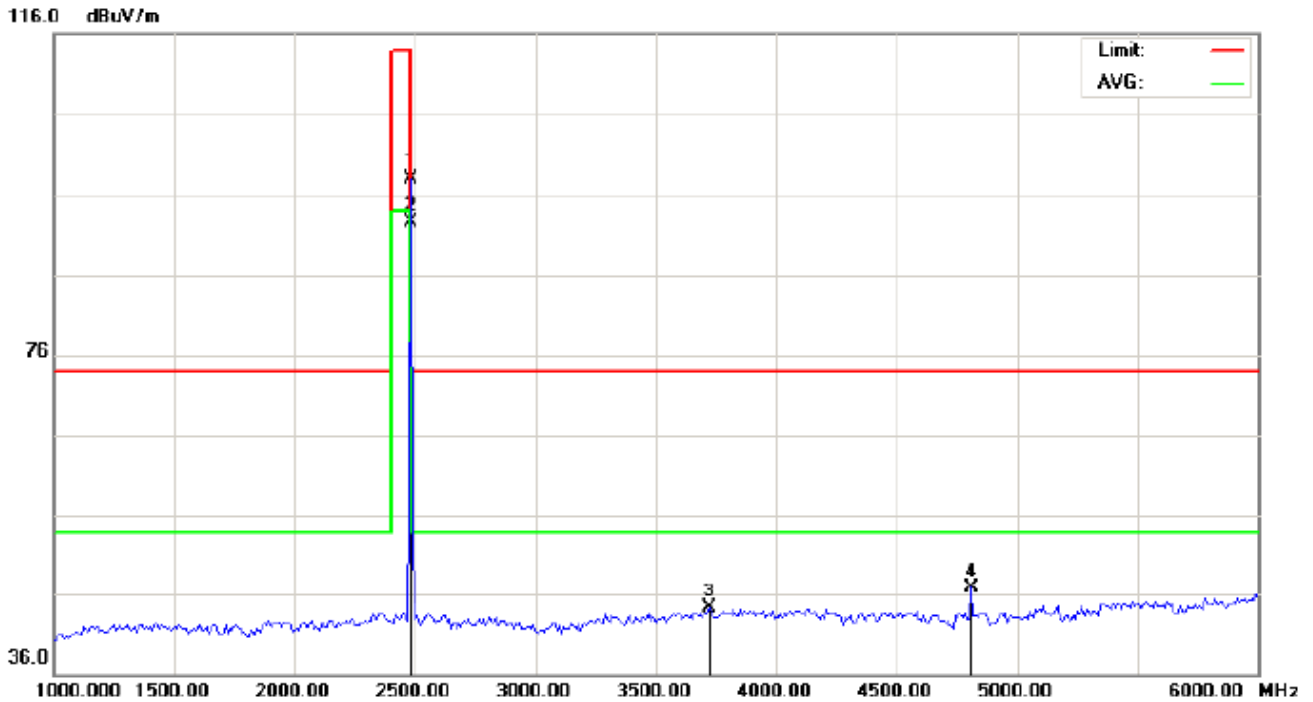

Site: site #1

Polarization: *Horizontal*

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	87.47	10.41	97.88	114.00	-16.12	peak			
2	*	2480.000	82.06	10.41	92.47	94.00	-1.53	AVG			
3		3725.000	30.73	13.50	44.23	74.00	-29.77	peak			
4		4808.333	39.22	7.70	46.92	74.00	-27.08	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

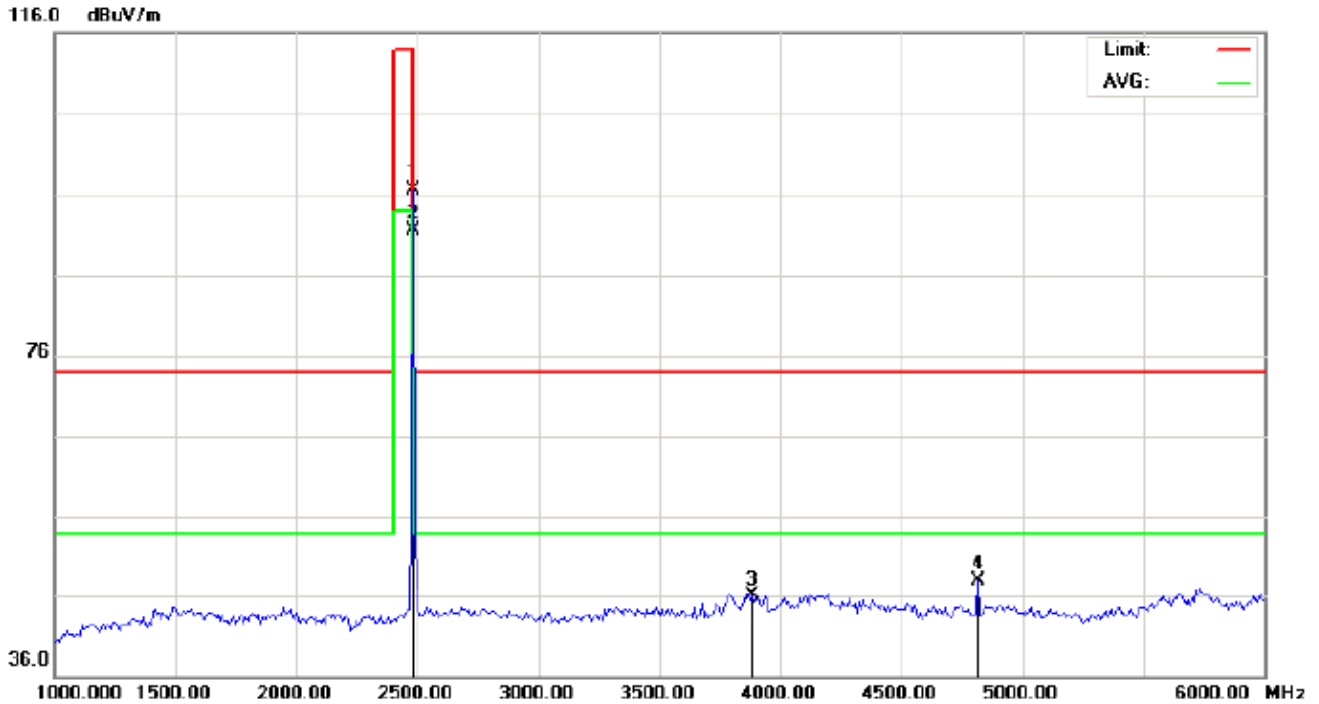

Site: site #1

Polarization: **Vertical**

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	86.19	10.41	96.60	114.00	-17.40	peak			
2	*	2480.000	81.07	10.41	91.48	94.00	-2.52	AVG			
3		3883.333	31.63	14.47	46.10	74.00	-27.90	peak			
4		4816.667	40.35	7.72	48.07	74.00	-25.93	peak			

**RESULT: PASS****Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	86.20	10.32	96.52	114	-17.48	Horizontal
2402	86.81	10.32	97.13	114	-16.87	Vertical
2441	86.23	10.36	96.60	114	-17.40	Horizontal
2441	85.98	10.36	96.35	114	-17.65	Vertical
2480	87.47	10.41	97.88	114	-16.12	Horizontal
2480	86.19	10.41	96.60	114	-17.40	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.25	10.32	91.57	94	-2.43	Horizontal
2402	81.43	10.32	91.75	94	-2.25	Vertical
2441	80.59	10.36	90.96	94	-3.04	Horizontal
2441	81.09	10.36	91.46	94	-2.54	Vertical
2480	82.06	10.41	92.47	94	-1.53	Horizontal
2480	81.07	10.41	91.48	94	-2.52	Vertical

**2Mbps Result:**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	86.70	10.32	97.02	114	-16.98	Horizontal
2402	86.59	10.32	96.91	114	-17.09	Vertical
2441	86.17	10.36	96.53	114	-17.47	Horizontal
2441	86.06	10.36	96.42	114	-17.58	Vertical
2480	87.34	10.41	97.75	114	-16.25	Horizontal
2480	87.21	10.41	97.62	114	-16.38	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.32	10.32	91.64	94	-2.36	Horizontal
2402	81.19	10.32	91.51	94	-2.49	Vertical
2441	80.49	10.36	90.85	94	-3.15	Horizontal
2441	80.38	10.36	90.74	94	-3.26	Vertical
2480	81.92	10.41	92.33	94	-1.67	Horizontal
2480	81.75	10.41	92.16	94	-1.84	Vertical

**3Mbps Result:**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	86.54	10.32	96.86	114	-17.14	Horizontal
2402	86.39	10.32	96.71	114	-17.29	Vertical
2441	85.99	10.36	96.35	114	-17.65	Horizontal
2441	85.87	10.36	96.23	114	-17.77	Vertical
2480	87.01	10.41	97.42	114	-16.58	Horizontal
2480	86.87	10.41	97.28	114	-16.72	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.09	10.32	91.41	94	-2.59	Horizontal
2402	80.97	10.32	91.29	94	-2.71	Vertical
2441	80.25	10.36	90.61	94	-3.39	Horizontal
2441	80.12	10.36	90.48	94	-3.52	Vertical
2480	81.63	10.41	92.04	94	-1.96	Horizontal
2480	81.48	10.41	91.89	94	-2.11	Vertical

## 10. BAND EDGE EMISSION


### 10.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

### 10.2 TEST SETUP

#### RADIATED EMISSION TEST SETUP

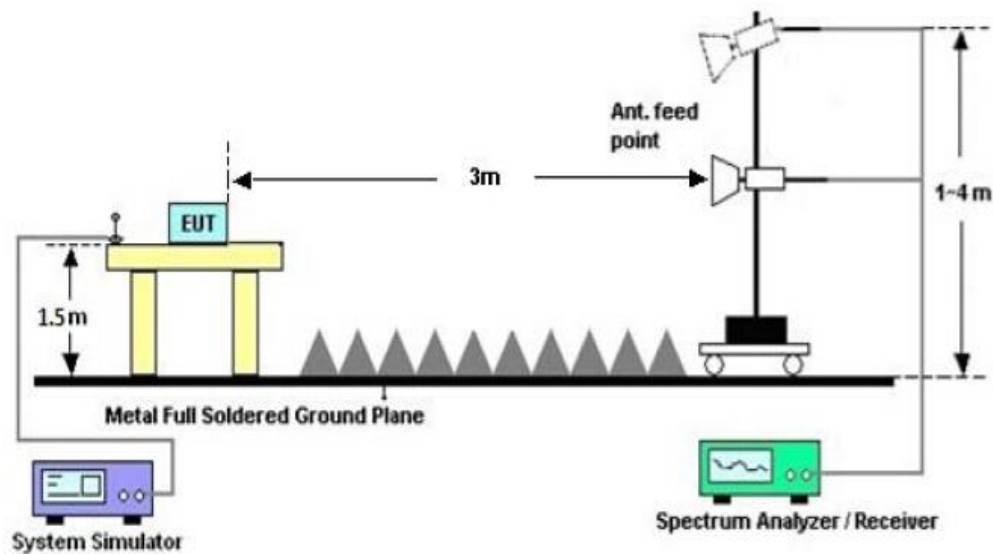




### 10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

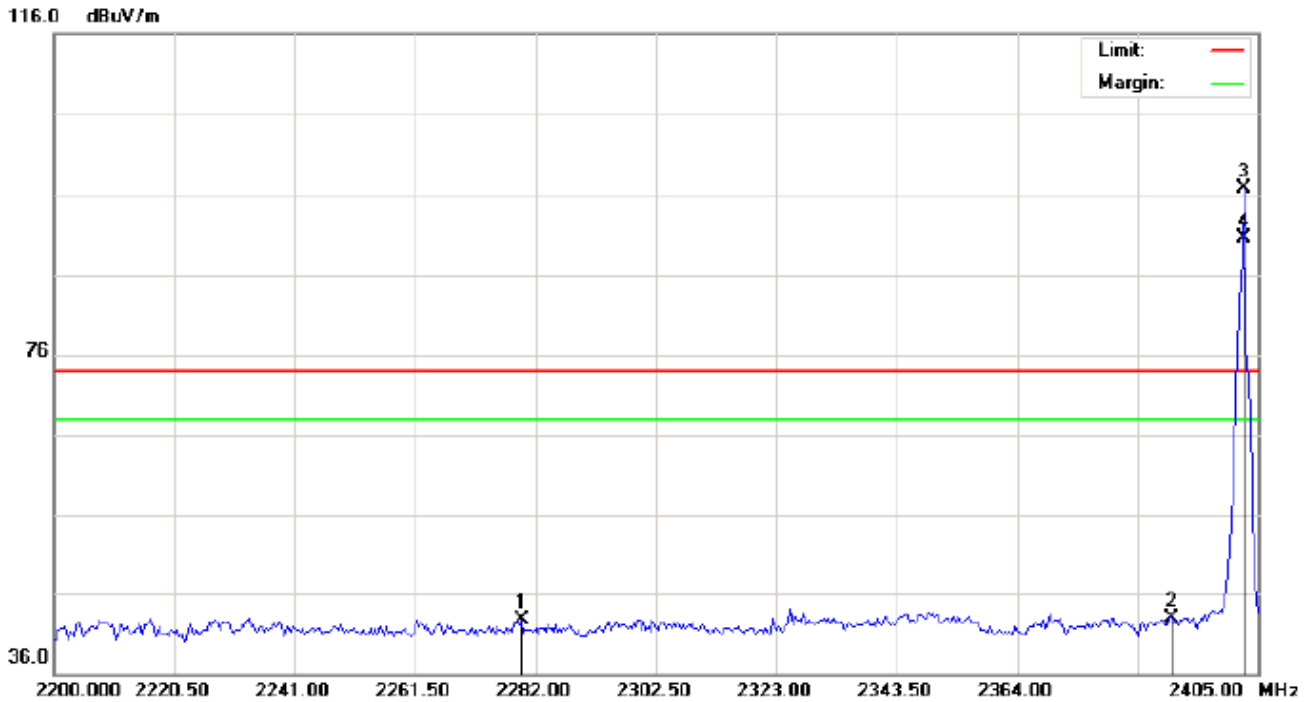

Site: site #1	Polarization: <b>Horizontal</b>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Executive Deluxe USB Turntable	Distance:	
M/N: CR6019D-BR		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2279.608	32.47	10.19	42.66	74.00	-31.34	peak			
2		2390.308	32.50	10.31	42.81	74.00	-31.19	peak			
3	*	2402.000	86.48	10.32	96.80	74.00	22.80	peak			
4	X	2402.000	80.25	10.32	90.57	74.00	16.57	AVG			

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

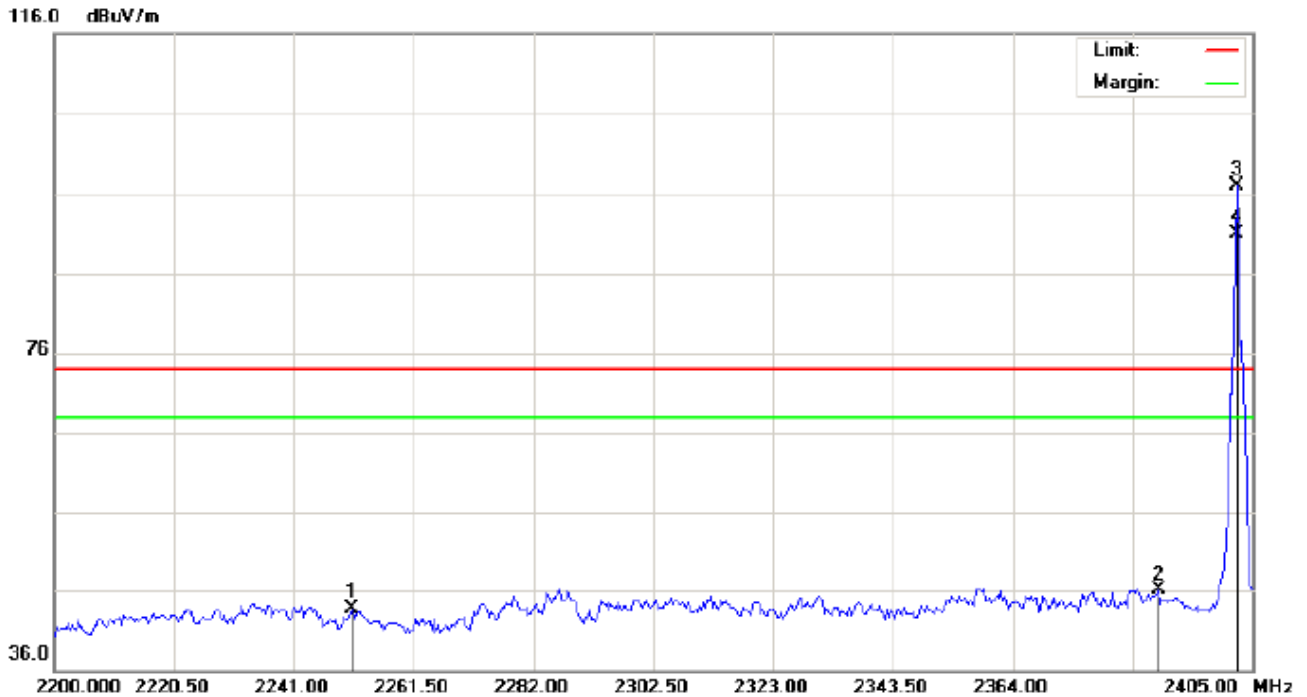

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT: Executive Deluxe USB Turntable

Distance:


M/N: CR6019D-BR

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2250.908	33.56	10.16	43.72	74.00	-30.28	peak			
2		2388.942	35.86	10.31	46.17	74.00	-27.83	peak			
3	*	2402.000	86.59	10.32	96.91	74.00	22.91	peak			
4	X	2402.000	80.56	10.32	90.88	74.00	16.88	AVG			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

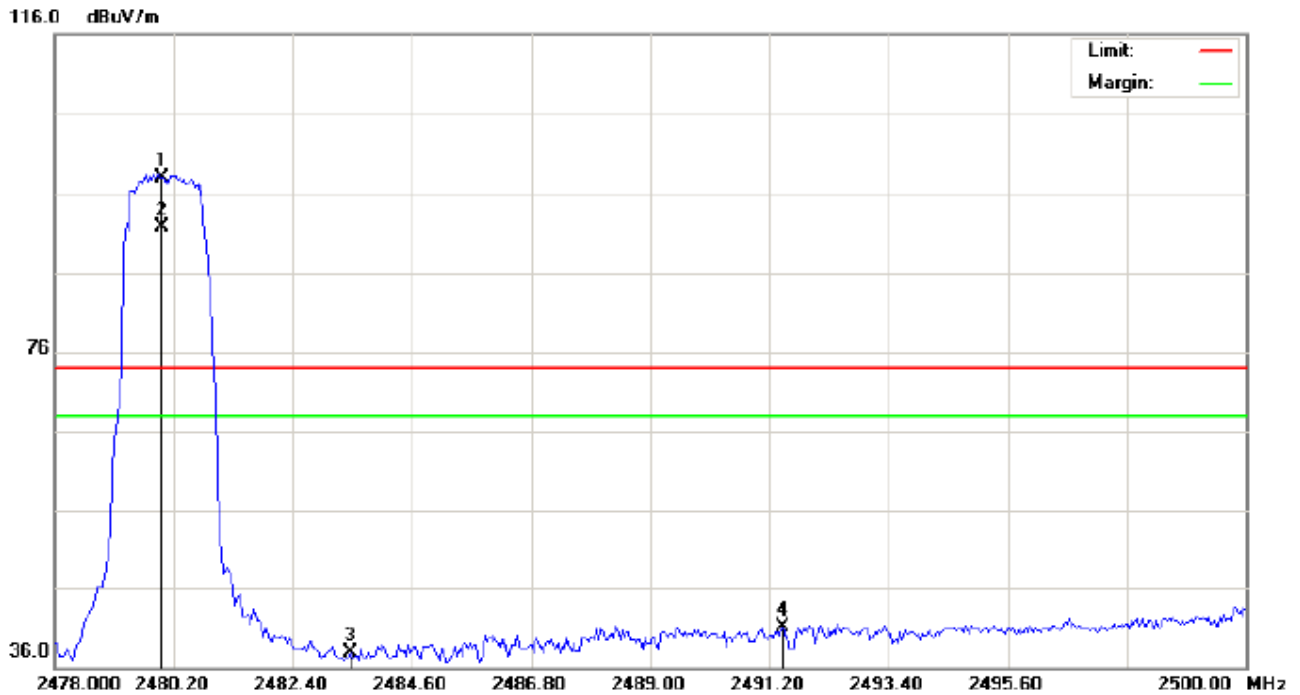

Site: site #1 Polarization: Horizontal Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %  
EUT: Executive Deluxe USB Turntable Distance:  
M/N: CR6019D-BR  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.55	10.41	97.96	74.00	23.96	peak			
2	X	2480.000	81.36	10.41	91.77	74.00	17.77	AVG			
3		2483.463	27.46	10.41	37.87	74.00	-36.13	peak			
4		2491.457	30.64	10.42	41.06	74.00	-32.94	peak			

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

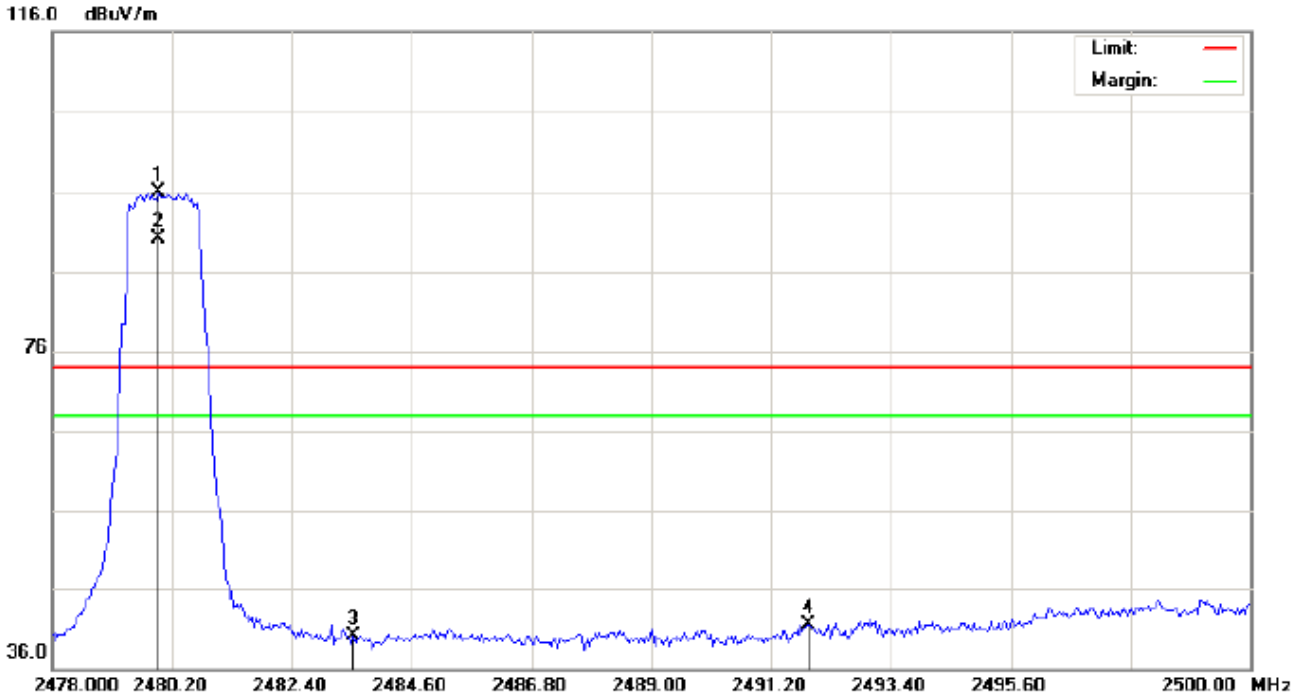

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT: Executive Deluxe USB Turntable

Distance:

M/N: CR6019D-BR

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	85.45	10.41	95.86	74.00	21.86	peak			
2	X	2480.000	79.69	10.41	90.10	74.00	16.10	AVG			
3		2483.537	29.68	10.41	40.09	74.00	-33.91	peak			
4		2491.896	31.06	10.42	41.48	74.00	-32.52	peak			

**RESULT: PASS****Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

## 11. 20DB BANDWIDTH

### 11.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

### 11.2. TEST SET-UP

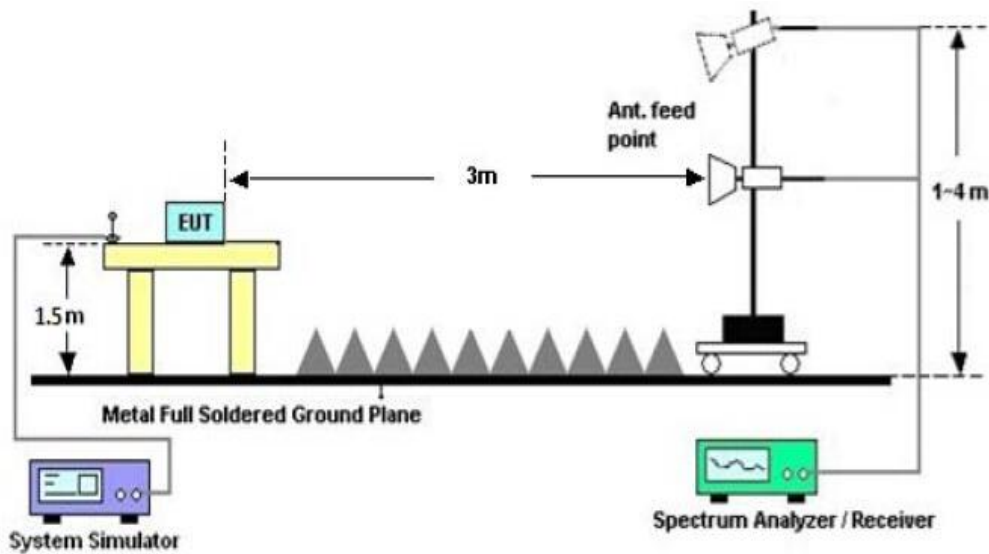


### 11.3. LIMITS AND MEASUREMENT RESULTS


#### FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.942	1.104	PASS
	Middle Channel	0.923	1.092	PASS
	High Channel	0.931	1.084	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

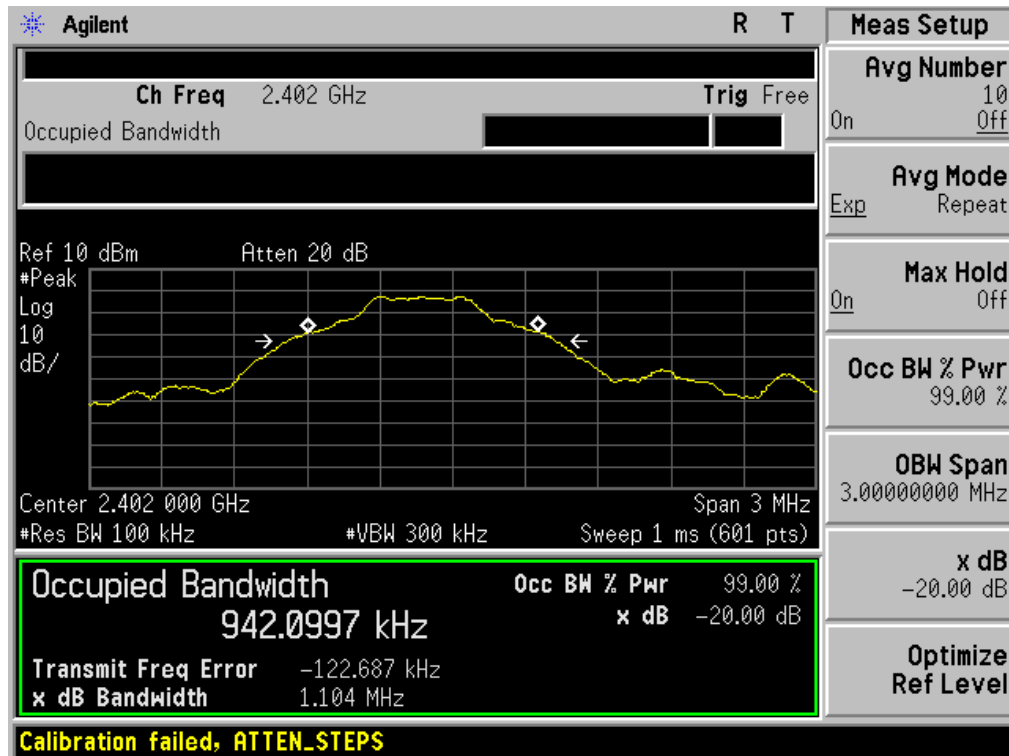

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

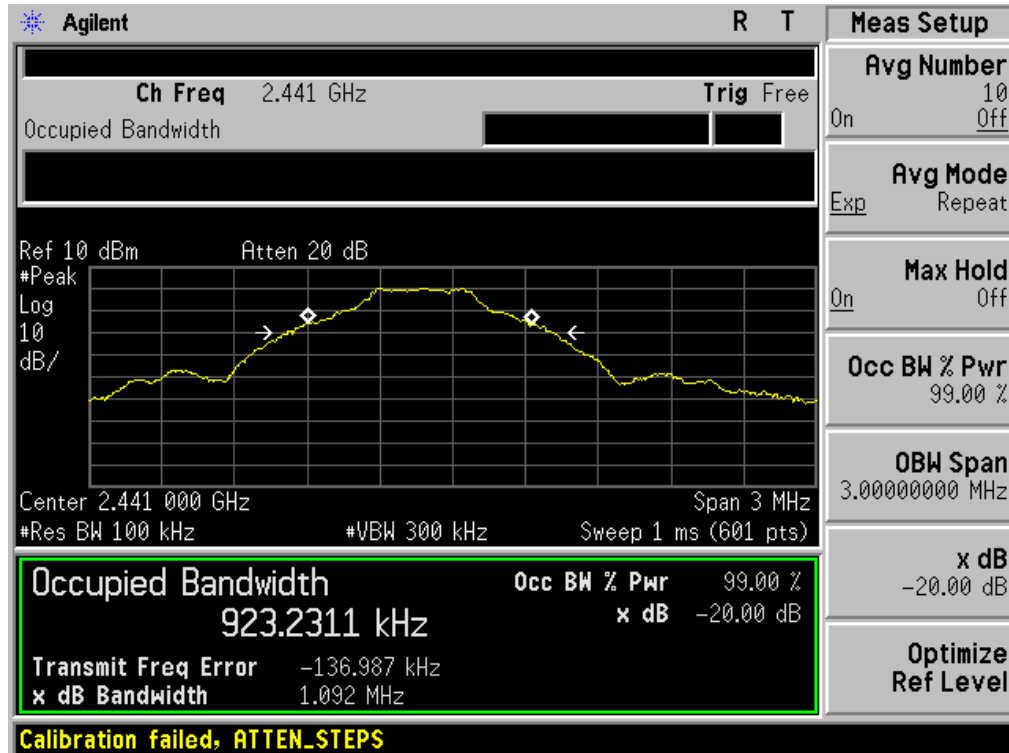


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

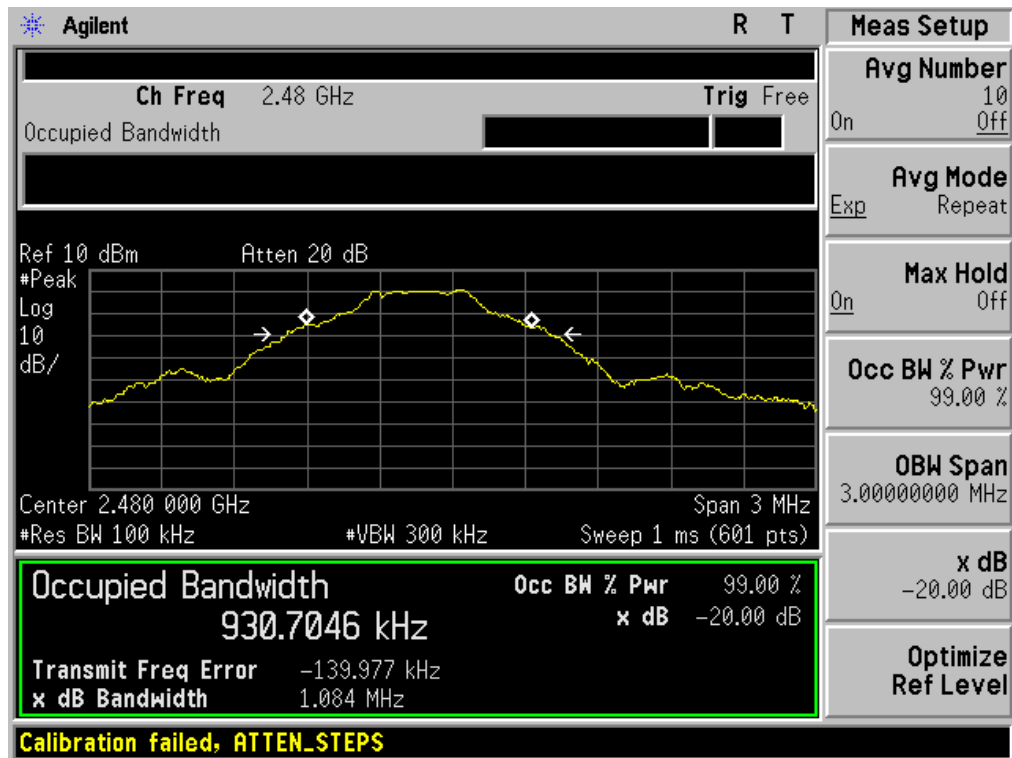


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.215	1.382	PASS
	Middle Channel	1.203	1.355	PASS
	High Channel	1.202	1.362	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

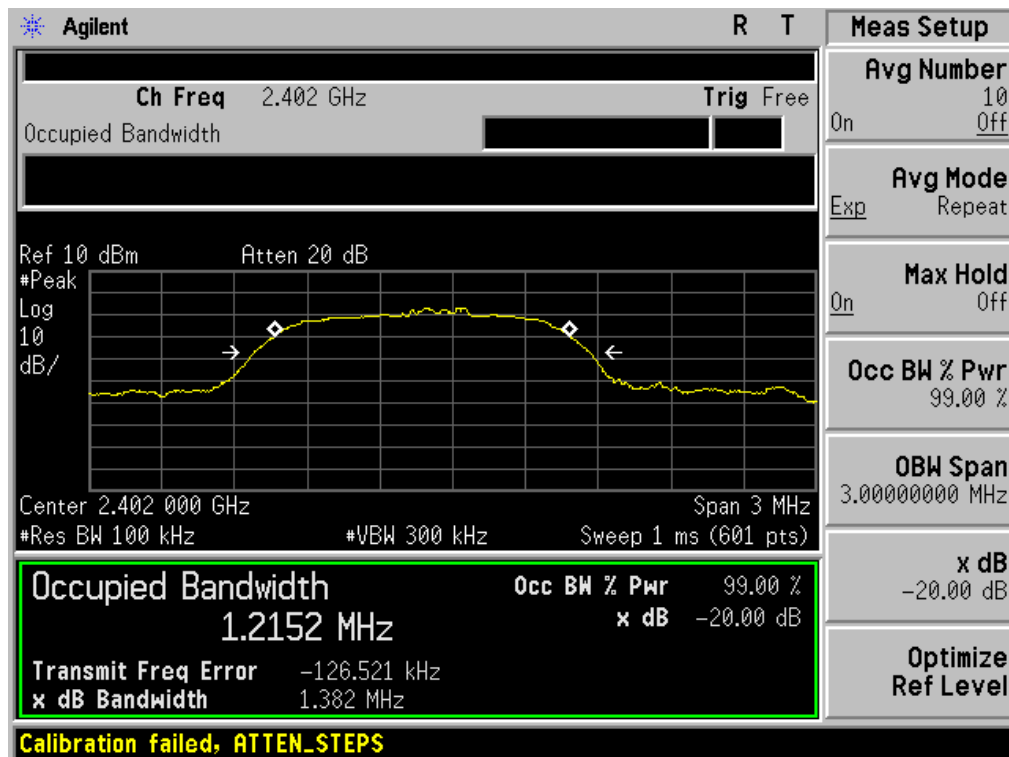




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

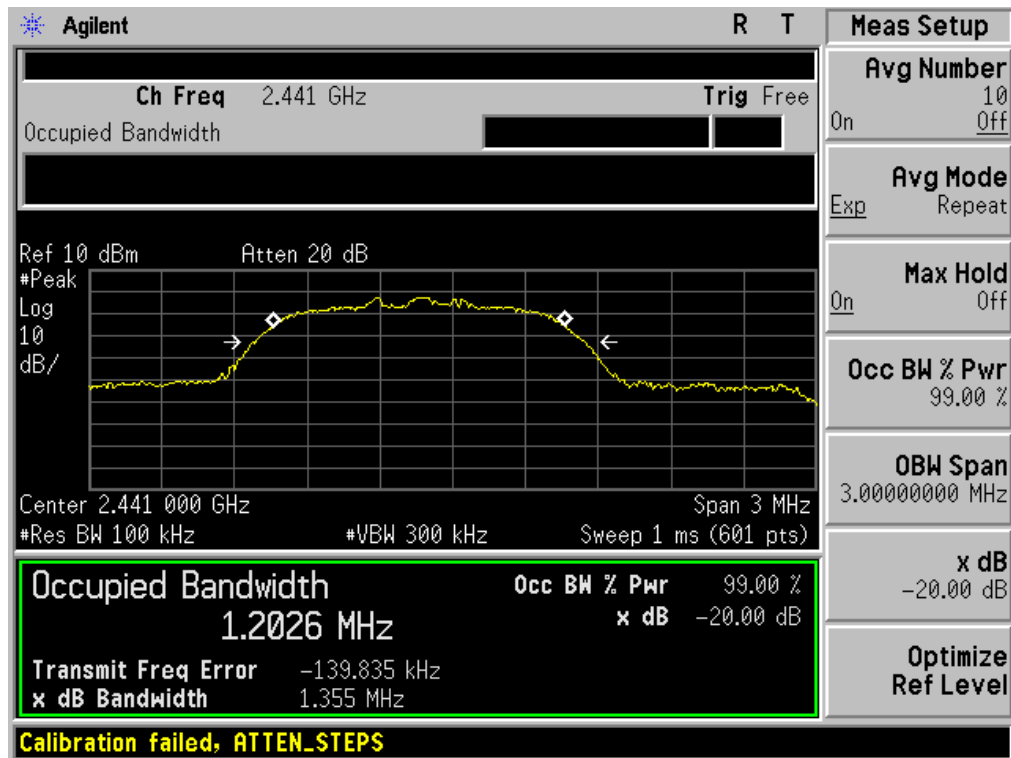


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

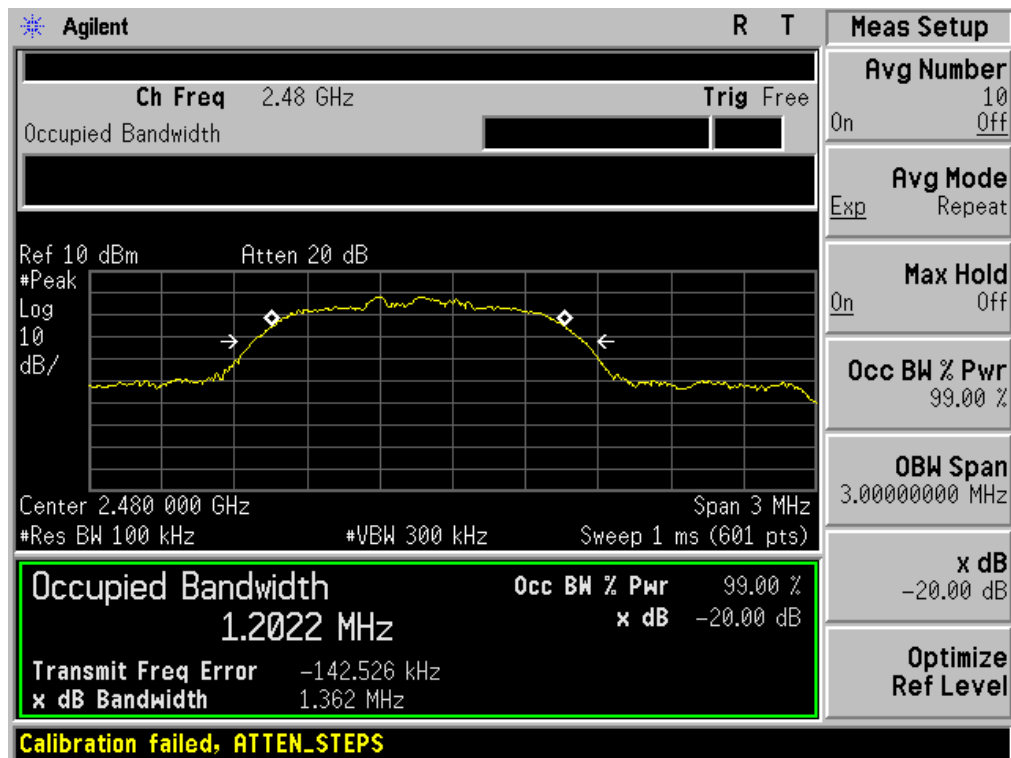


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.219	1.372	PASS
	Middle Channel	1.212	1.368	PASS
	High Channel	1.218	1.355	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

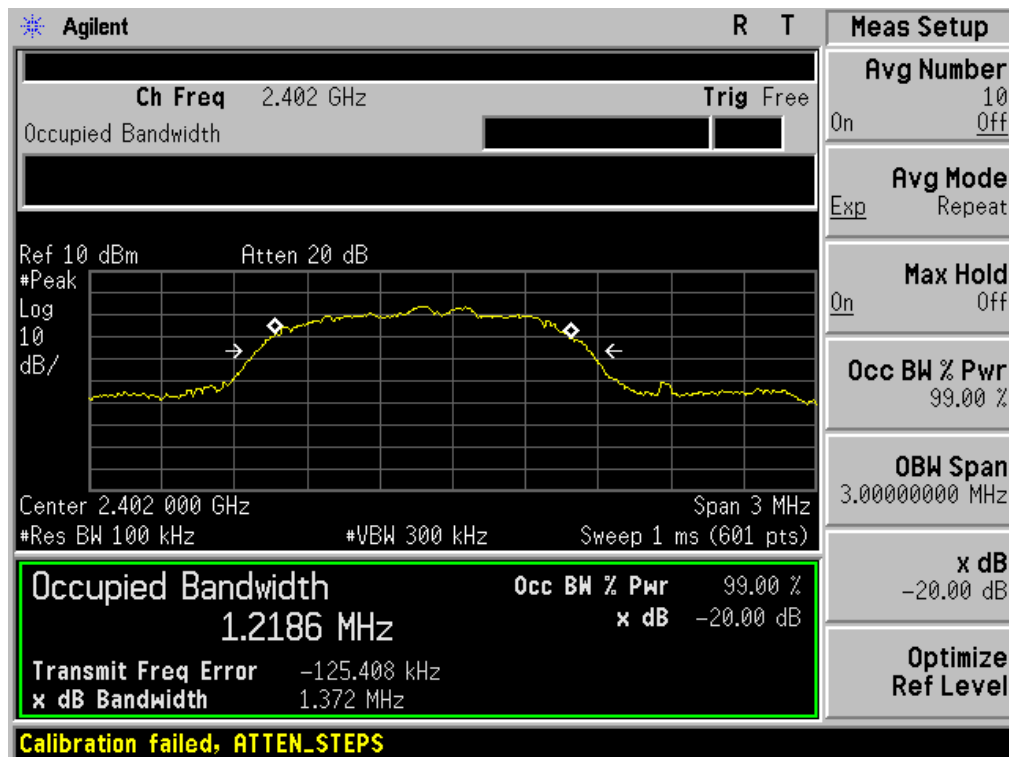

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

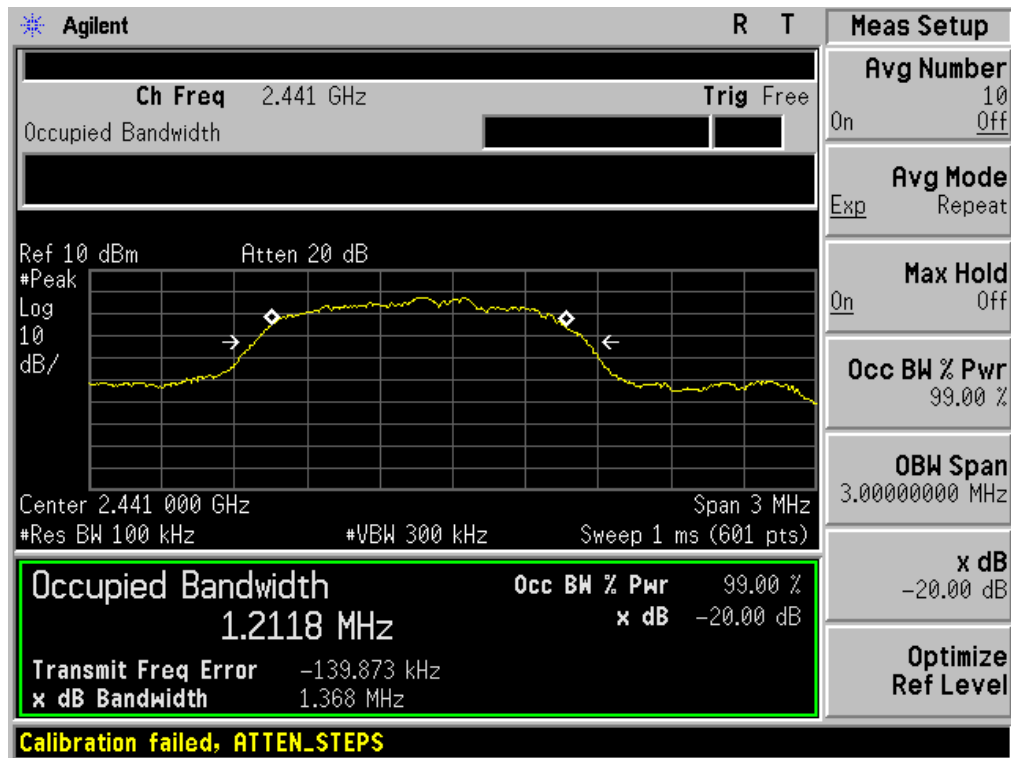

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

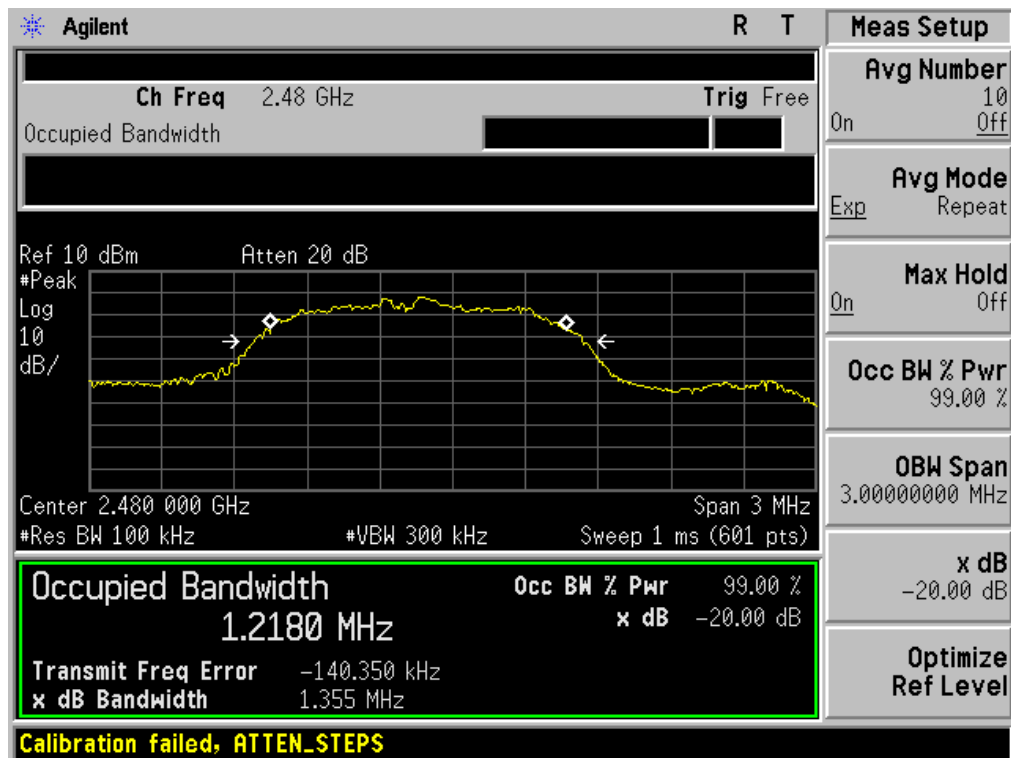

## 12. FCC LINE CONDUCTED EMISSION TEST


### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

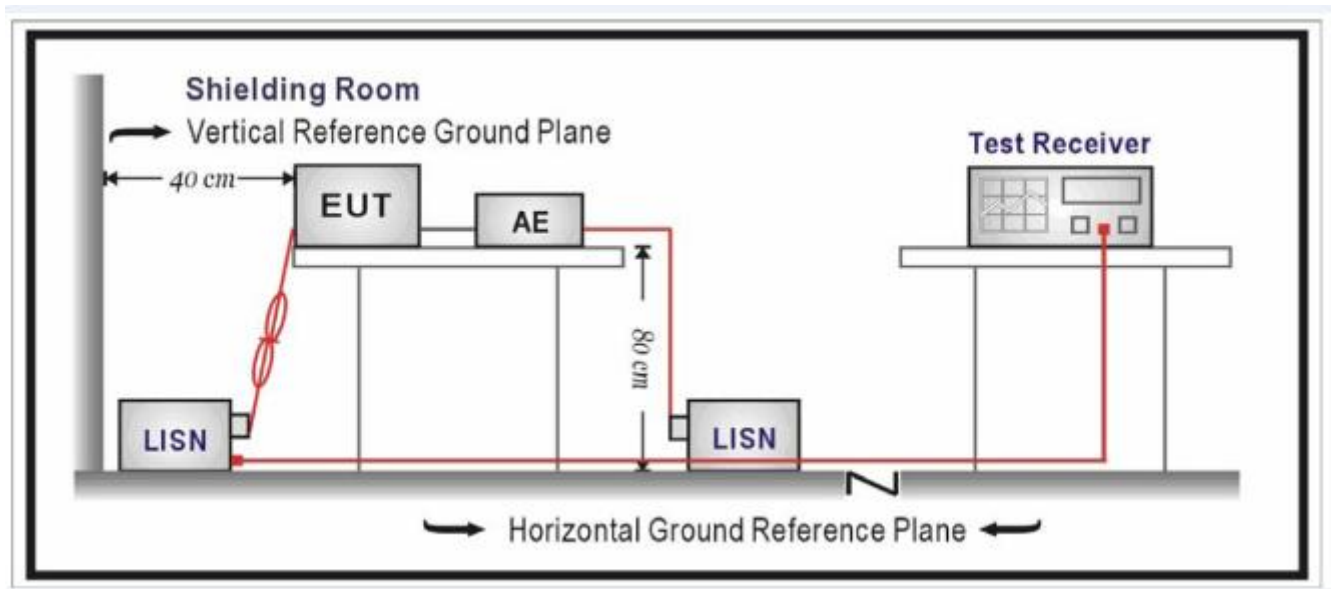

### **12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received voltage by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### **12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**


1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

## 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter 1(worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

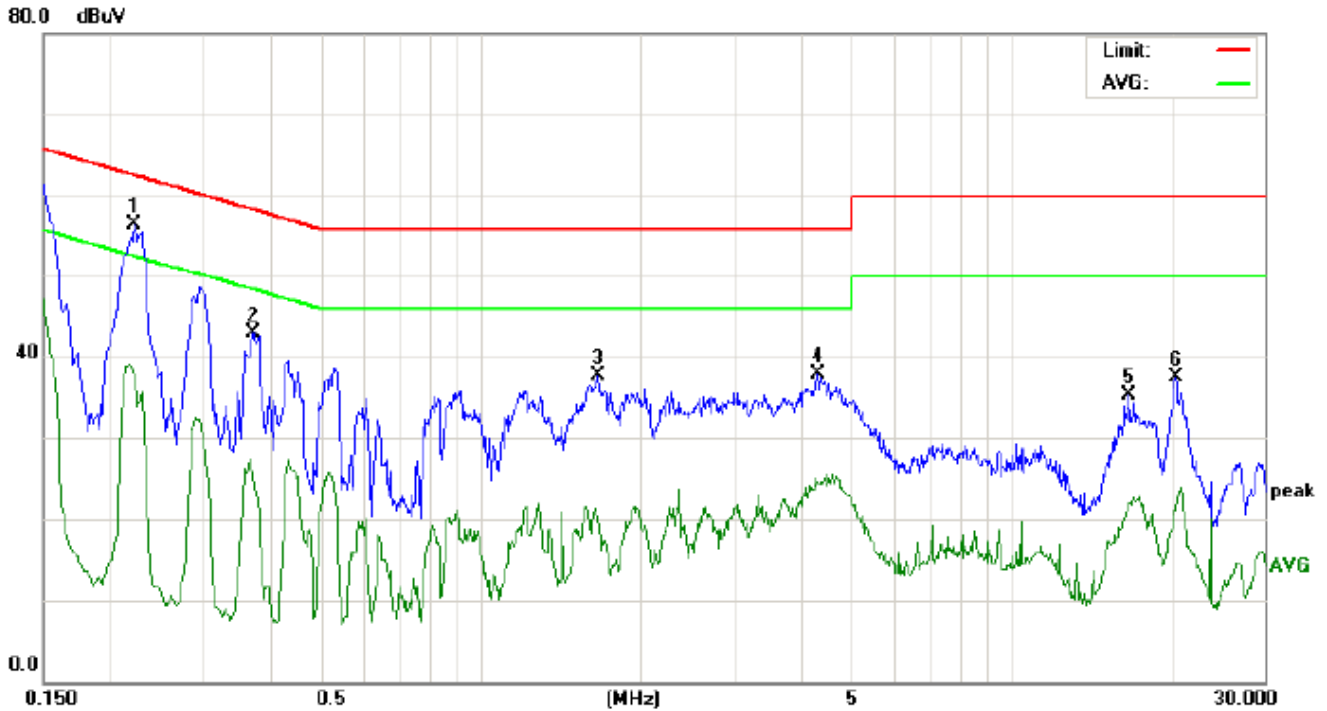


Site: Conduction  
Limit: FCC Class B Conduction(QP)  
EUT: Executive Deluxe USB Turntable  
M/N: CR6019D-BR  
Mode: BT Link  
Note:

Phase: **L1**  
Power:

Temperature: 26  
Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2220	46.17		27.63	10.24	56.41		37.87	62.74	52.74	-6.33	-14.87	P	
2	0.3709	32.67		15.32	10.32	42.99		25.64	58.48	48.48	-15.49	-22.84	P	
3	1.6658	27.41		9.68	10.33	37.74		20.01	56.00	46.00	-18.26	-25.99	P	
4	4.3258	27.67		14.41	10.29	37.96		24.70	56.00	46.00	-18.04	-21.30	P	
5	16.7337	25.24		11.73	10.12	35.36		21.85	60.00	50.00	-24.64	-28.15	P	
6	20.4578	27.45		11.06	10.12	37.57		21.18	60.00	50.00	-22.43	-28.82	P	

## Line Conducted Emission Test Line 2-N

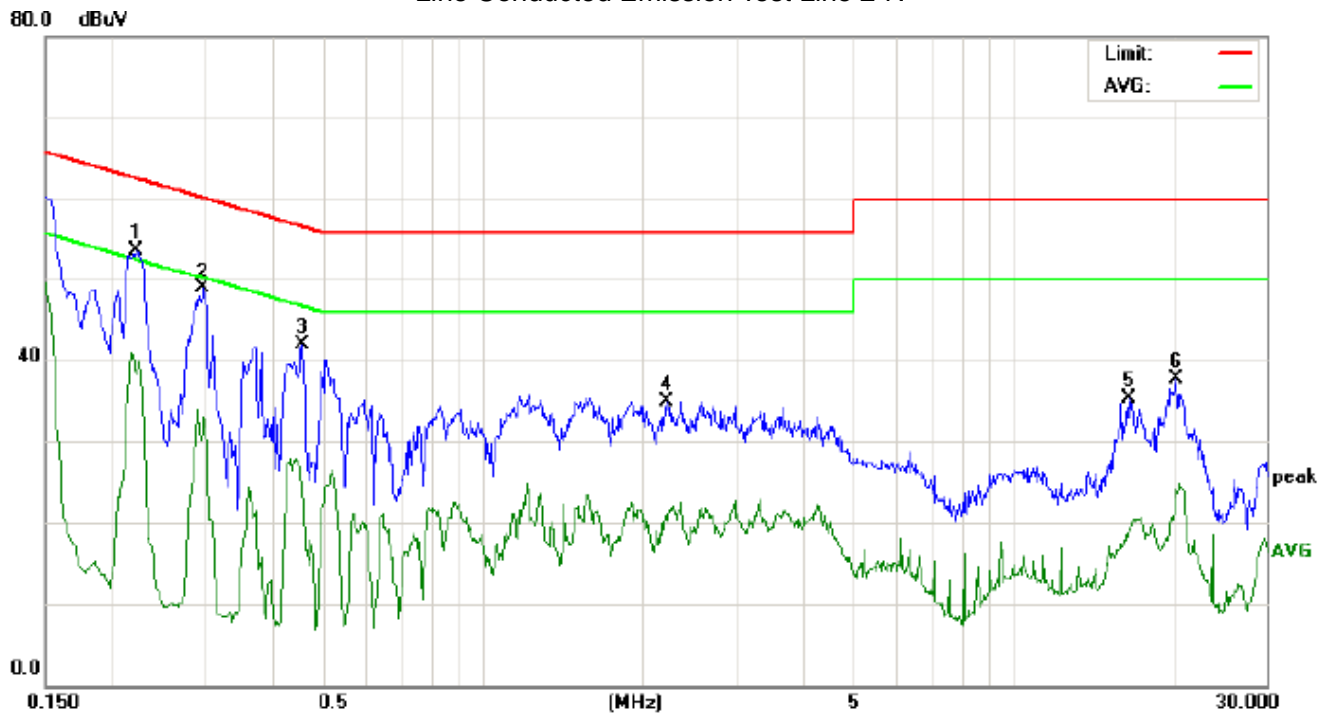

Site: Conduction

Phase: *N*

Temperature: 26

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 60 %

EUT: Executive Deluxe USB Turntable

M/N: CR6019D-BR

Mode: BT Link

Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2220	43.44		28.11	10.24	53.68		38.35	62.74	52.74	-9.06	-14.39	P	
2	0.2977	38.68		22.82	10.29	48.97		33.11	60.30	50.30	-11.33	-17.19	P	
3	0.4580	31.58		13.71	10.37	41.95		24.08	56.73	46.73	-14.78	-22.65	P	
4	2.2219	24.64		9.89	10.31	34.95		20.20	56.00	46.00	-21.05	-25.80	P	
5	16.5259	25.18		9.26	10.12	35.30		19.38	60.00	50.00	-24.70	-30.62	P	
6	20.3738	27.65		13.89	10.12	37.77		24.01	60.00	50.00	-22.23	-25.99	P	

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP



### FCC LINE CONDUCTED EMISSION TEST SETUP




### FCC RADIATED EMISSION TEST SETUP

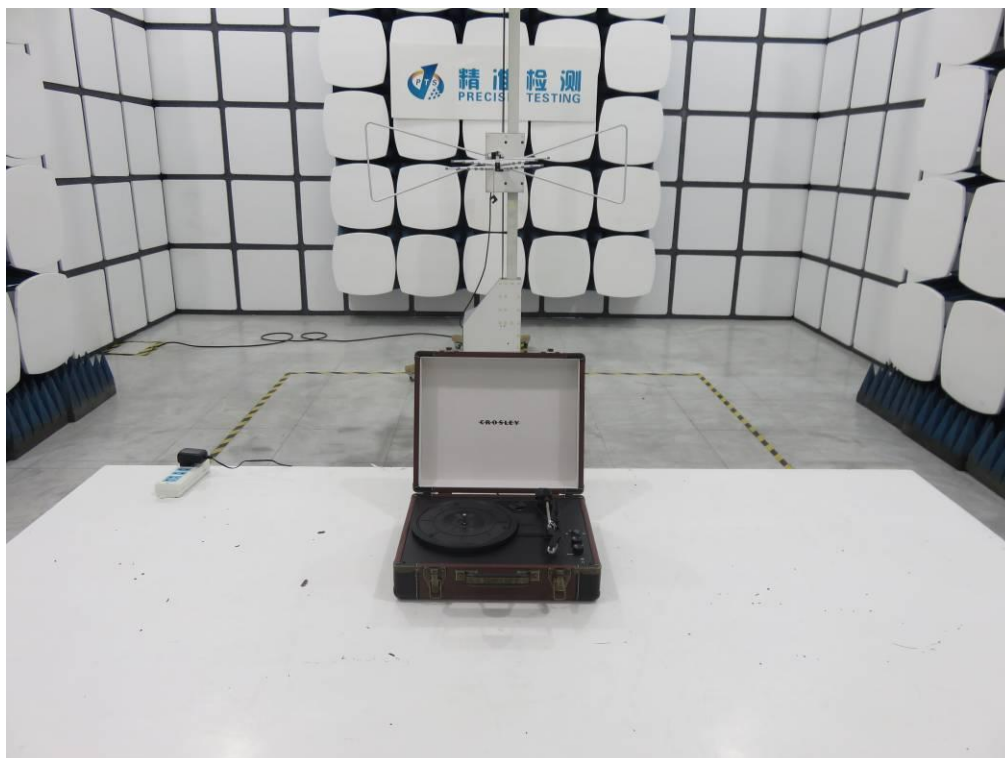



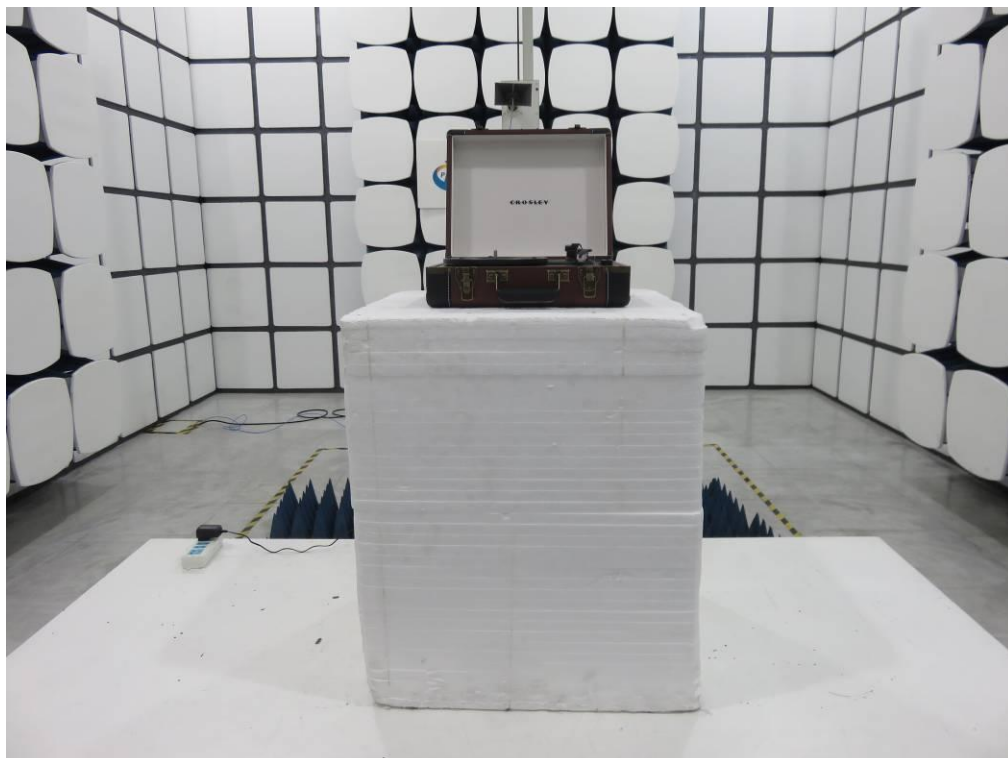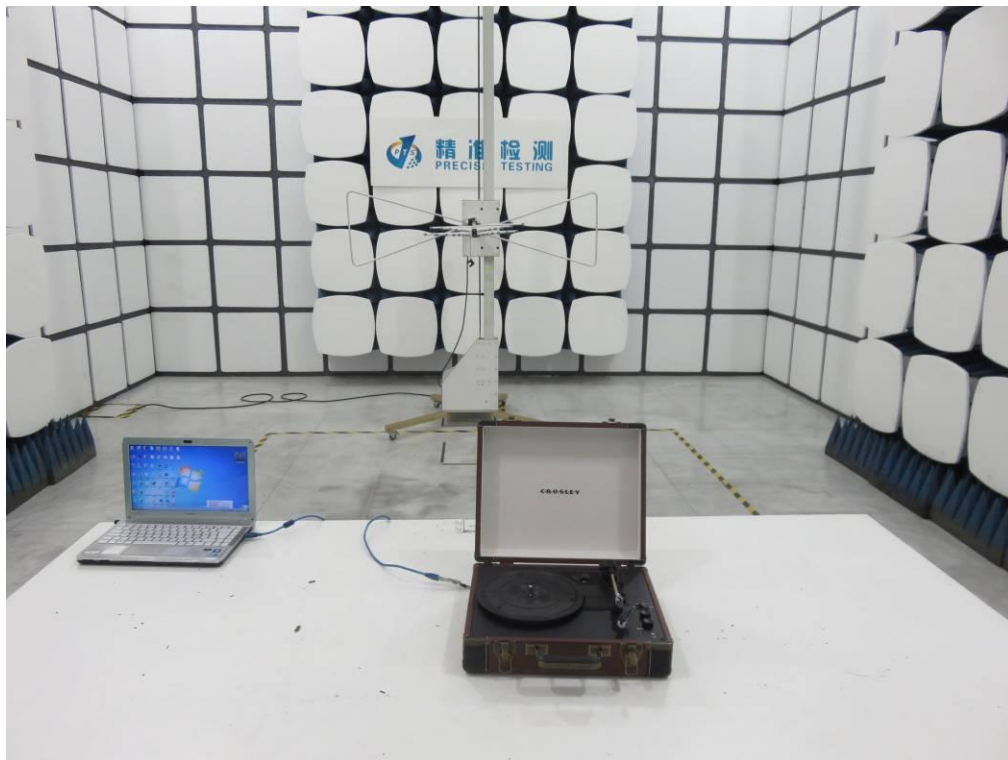

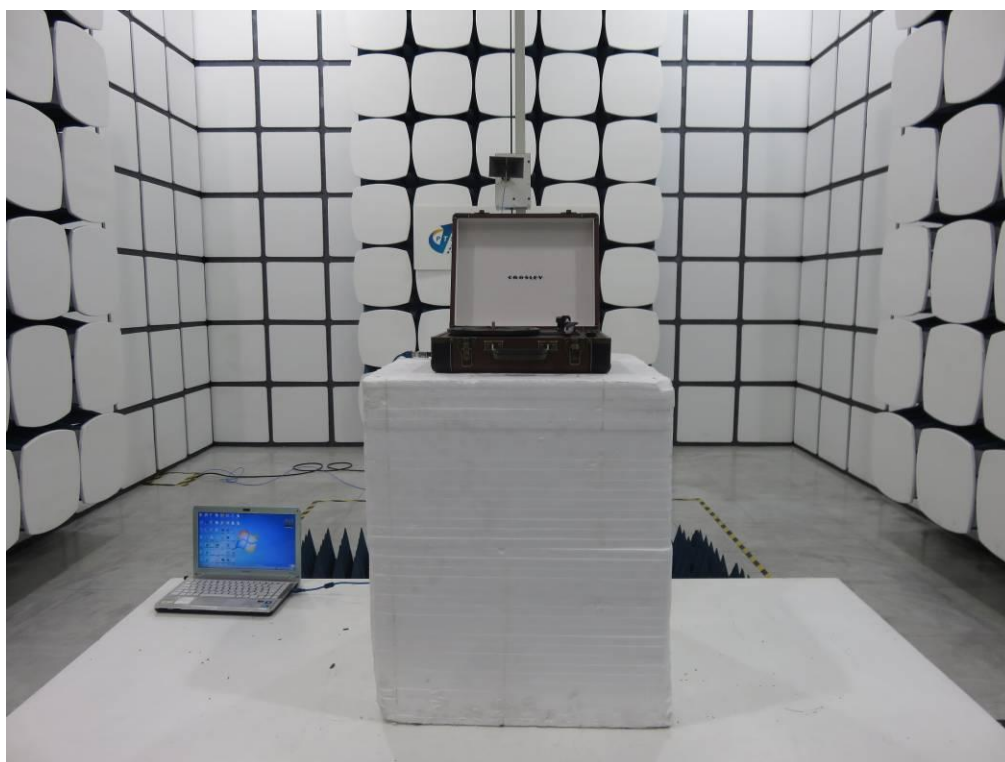


## APPENDIX B: PHOTOGRAPHS OF EUT


### ALL VIEW OF EUT



TOP VIEW OF EUT

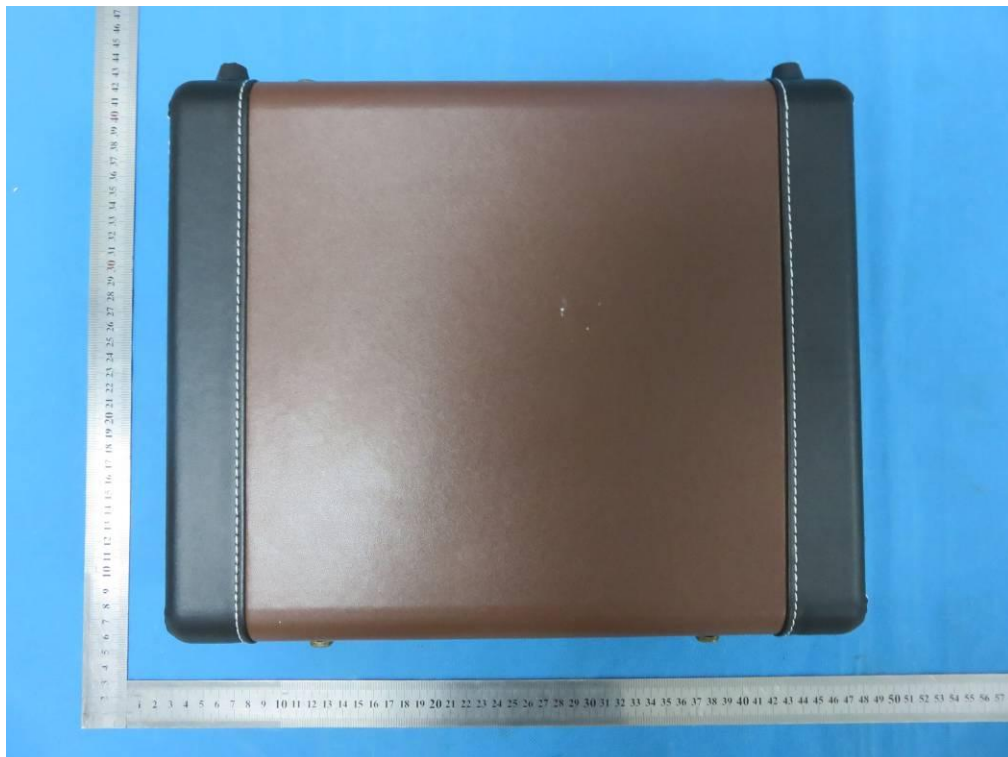

BOTTOM VIEW OF EUT

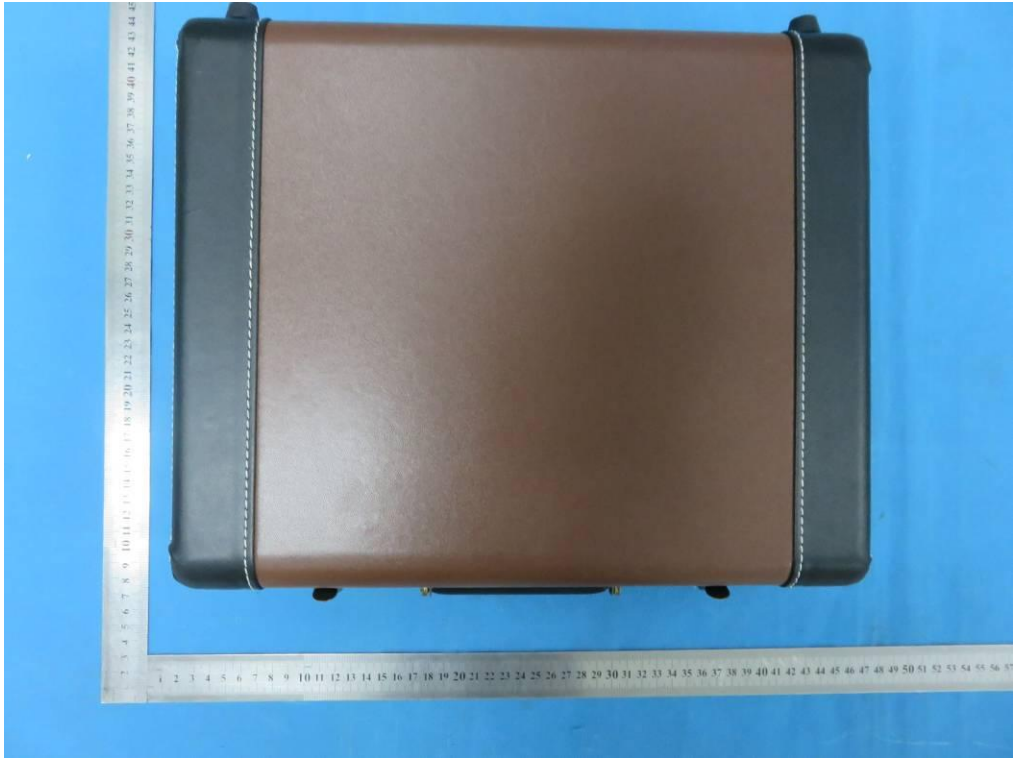

FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT






RIGHT VIEW OF EUT

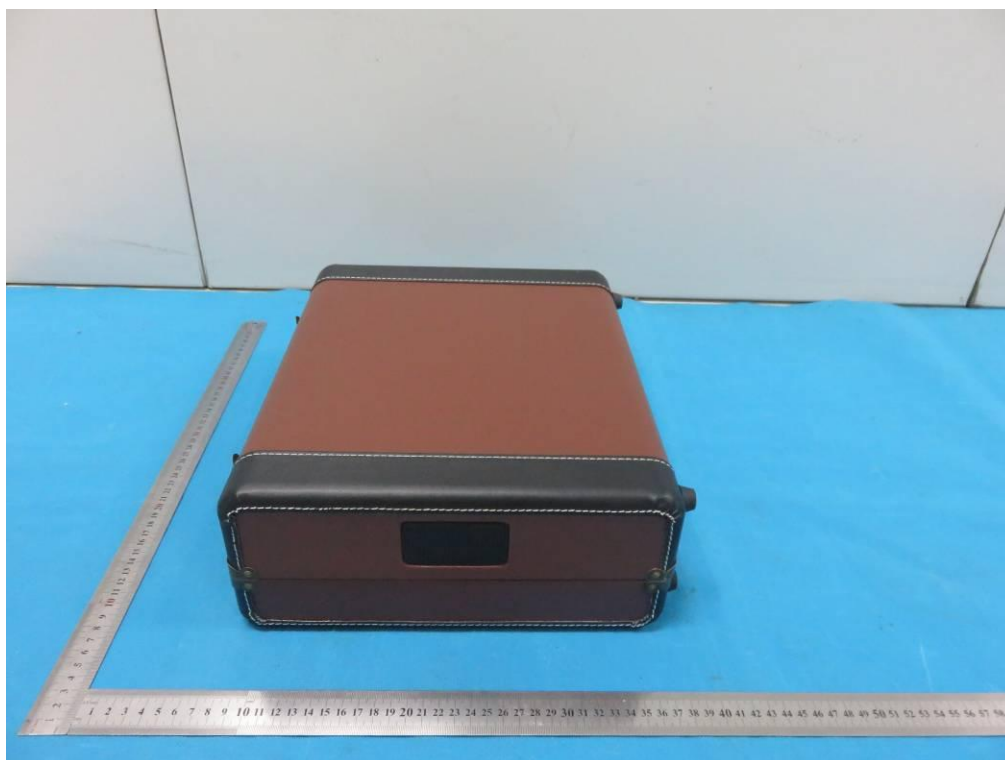

VIEW OF EUT (PORT)-1



VIEW OF EUT (PORT)-2

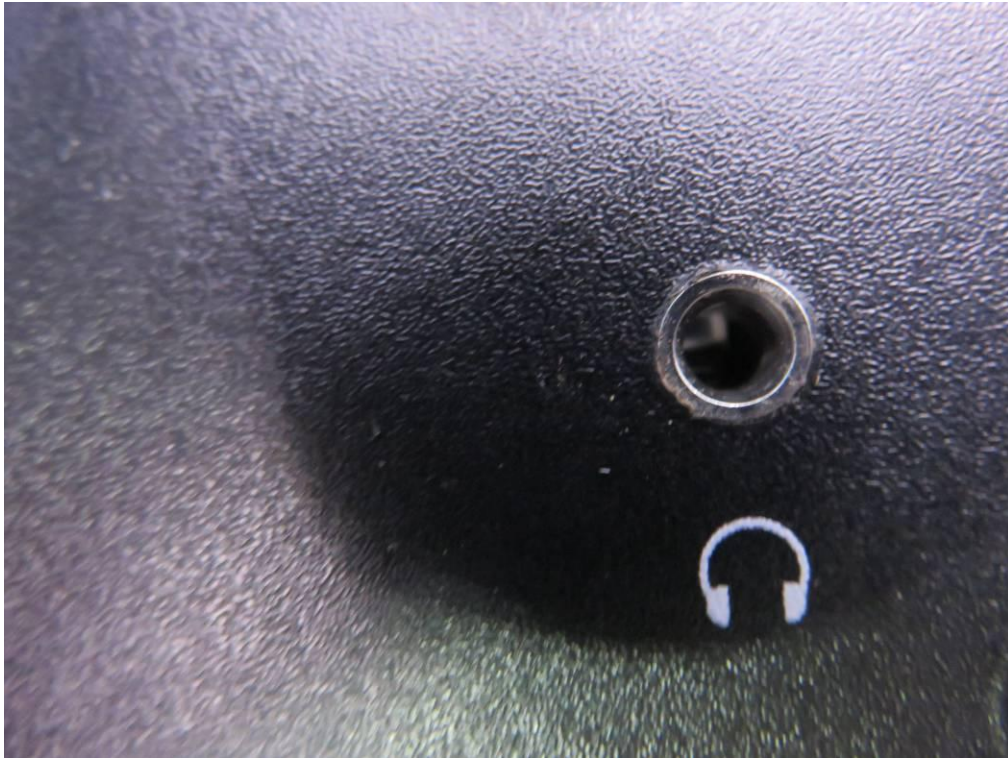

OPEN VIEW OF EUT-1






OPEN VIEW OF EUT-2




INTERNAL VIEW OF EUT-1

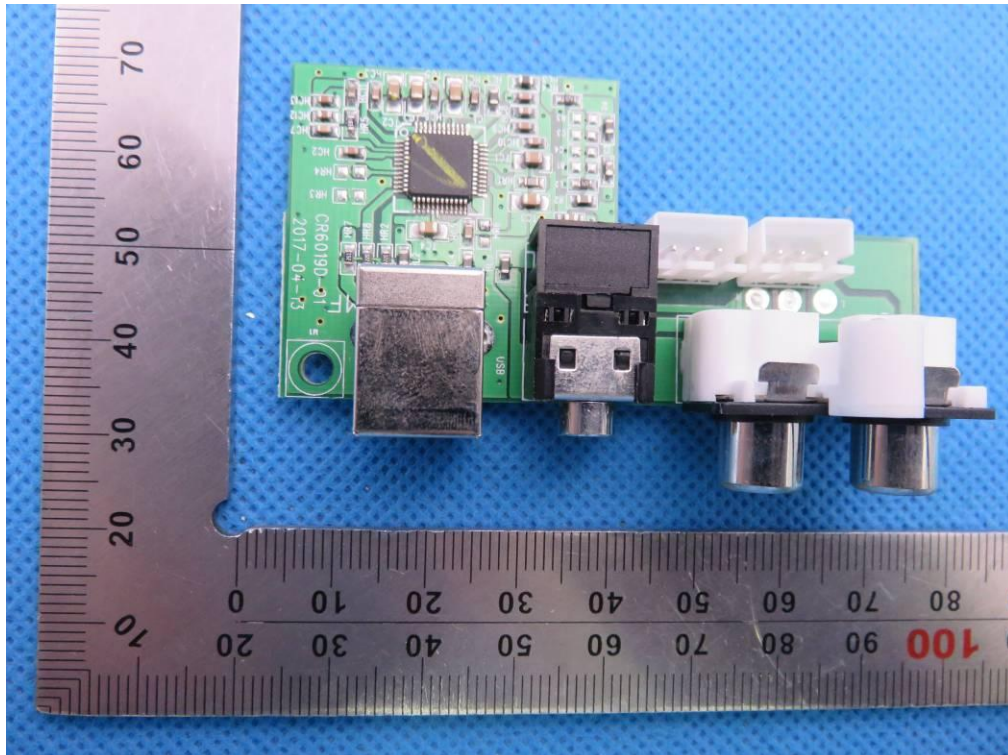





INTERNAL VIEW OF EUT-2

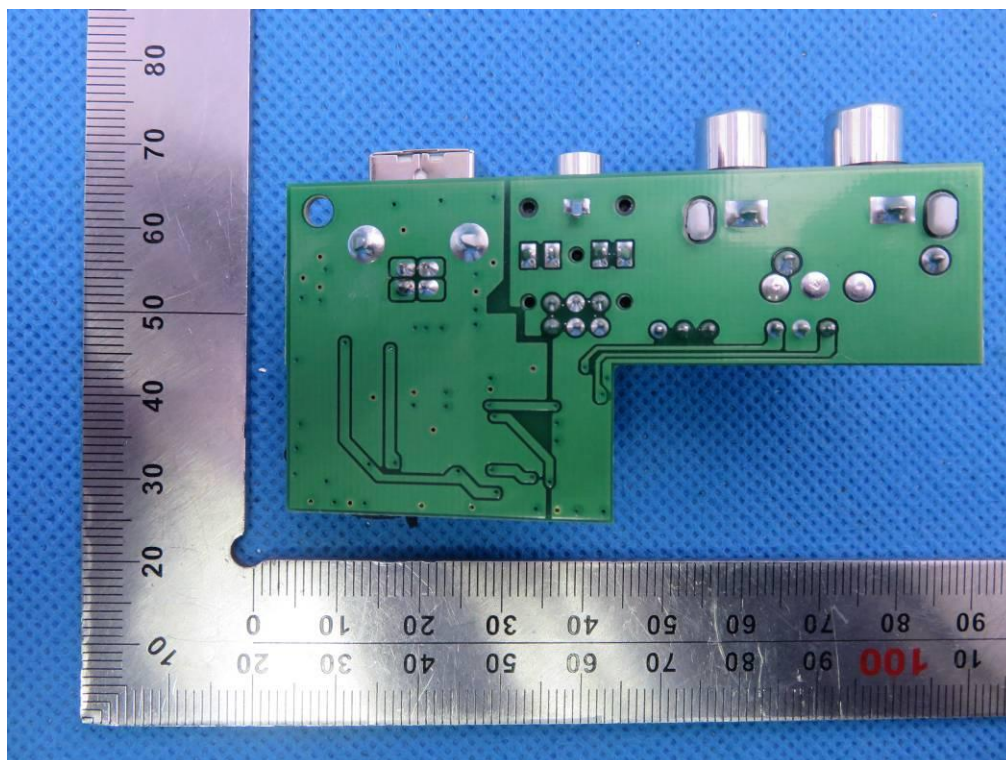


INTERNAL VIEW OF EUT-3

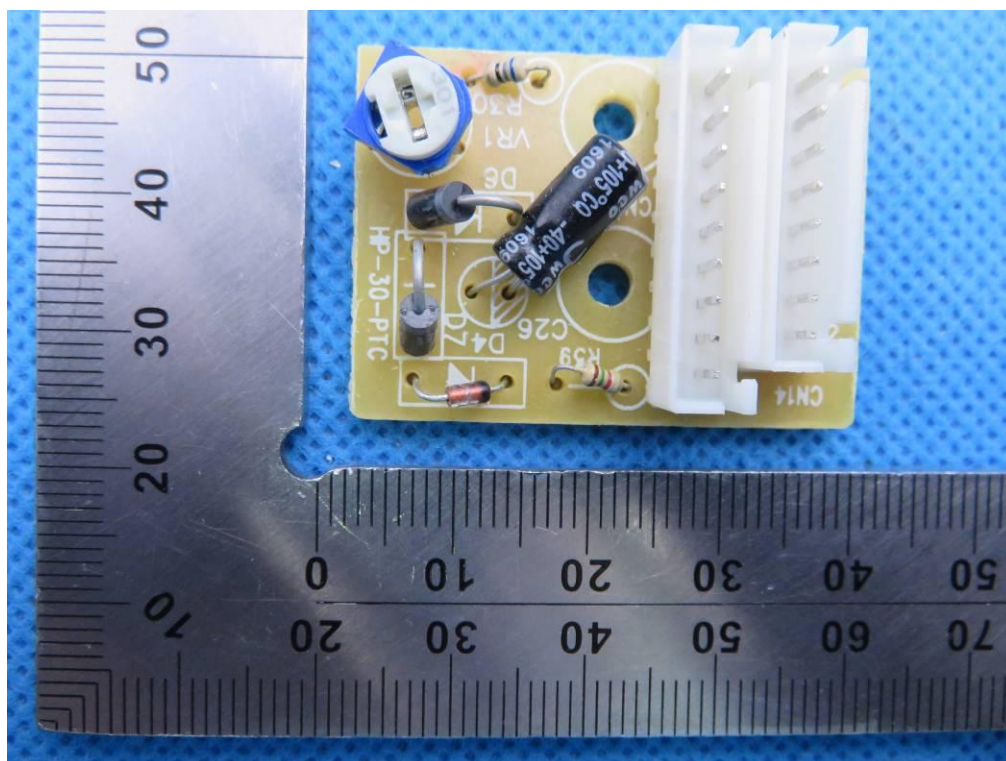

INTERNAL VIEW OF EUT-4

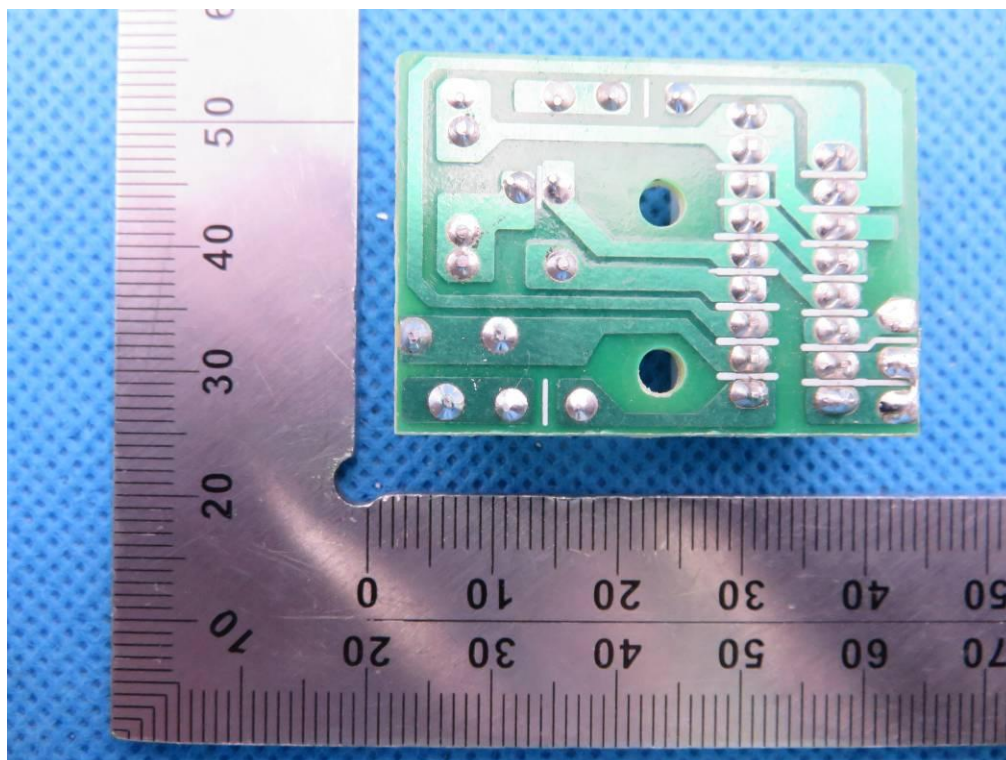


INTERNAL VIEW OF EUT-5

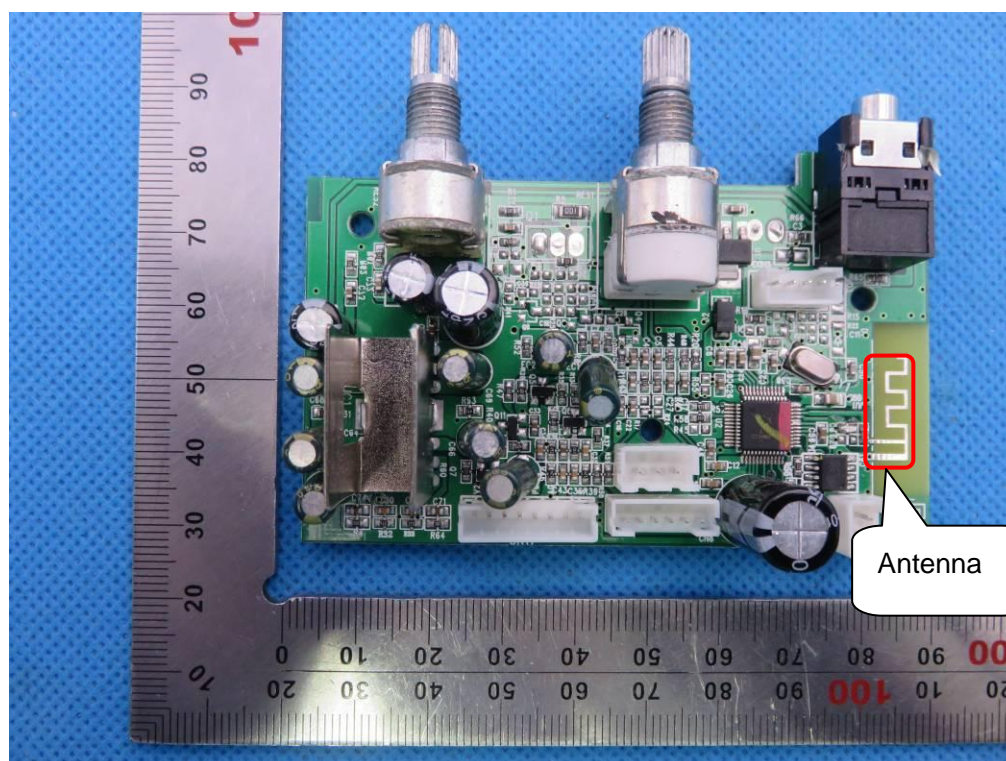




INTERNAL VIEW OF EUT-6

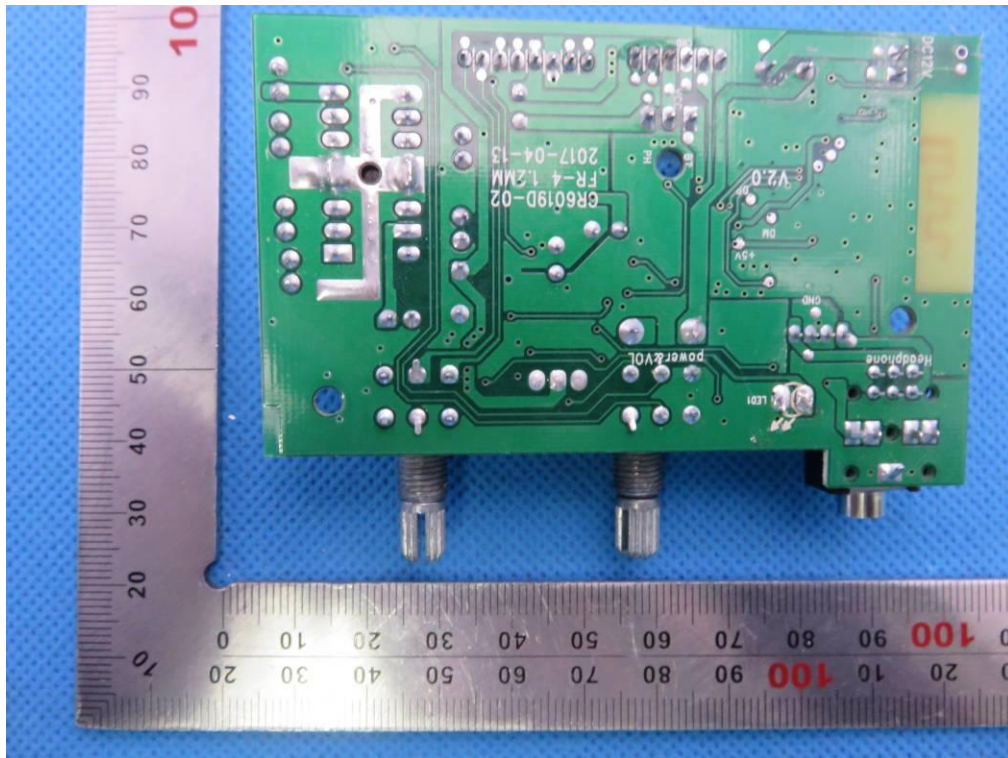

INTERNAL VIEW OF EUT-7

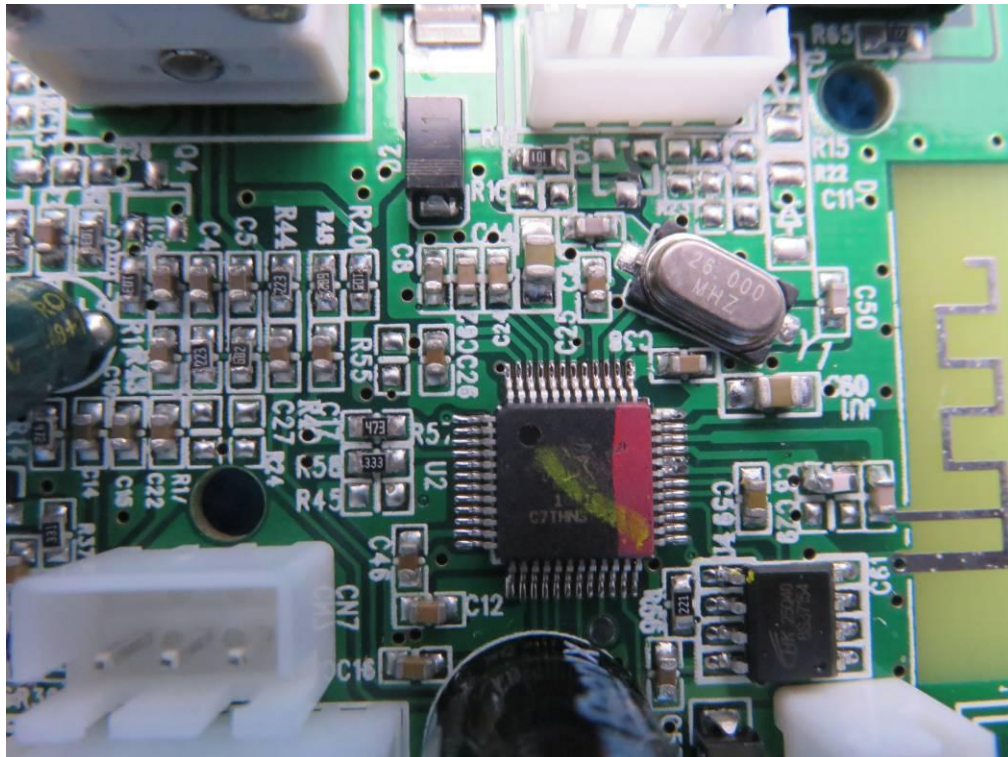

VIEW OF ADAPTER-1



VIEW OF ADAPTER-2



----END OF REPORT----