



TEST REPORT

Product Name: Medley Entertainment Center
FCC ID: AUSCR7015A
Trademark: CROSLEY
Model Number: CR7015A-WA, CR7015X-XXXX (X-XXXX can be replaced by letter from "A" to "Z", number from "0" to "9" or blank)
Prepared For: Modern Marketing Concepts, Inc
Address: 1220 E Oak, St. Louisville, KY 40204 United States
Manufacturer: Timsen Development Limited
Address: 5F, 447# Tianhebei Road, Guangzhou, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Apr. 26, 2020
Sample tested Date: Apr. 26, 2020 to Apr. 30, 2020
Issue Date: Apr. 30, 2020
Report No.: CTB200429009RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Victory

Reviewed by:

Rita Xiao

Approved by:

Sherwin Qian/ Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List.....	8
4.5 Test Mode.....	8
4.6 Test Environment.....	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure.....	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure.....	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup	26
8.2 Limit	26
8.3 Test procedure.....	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34

9.2	Limit	34
9.3	Test procedure.....	34
9.4	Test Result	35
10.	20DB OCCUPIED BANDWIDTH	39
10.1	Block Diagram Of Test Setup	39
10.2	Limit.....	39
10.3	Test procedure.....	39
10.4	Test Result.....	39
11.	CARRIER FREQUENCIES SEPARATION	43
11.1	Block Diagram Of Test Setup	43
11.2	Limit.....	43
11.3	Test procedure.....	43
11.4	Test Result.....	43
12.	HOPPING CHANNEL NUMBER	47
12.1	Block Diagram Of Test Setup	47
12.2	Limit.....	47
12.3	Test procedure.....	47
12.4	Test Result.....	47
13.	DWELL TIME	49
13.1	Block Diagram Of Test Setup	49
13.2	Limit.....	49
13.3	Test procedure.....	49
13.4	Test Result.....	50
14.	PSEUDORANDOM FREQUENCY	54
14.1	Limit.....	54
14.2	Test procedure.....	54
14.3	Test Result.....	55
15.	ANTENNA REQUIREMENT	56
16.	EUT PHOTOGRAPHS	57
17.	EUT TEST SETUP PHOTOGRAPHS	61

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB200429009RFX	Apr. 30, 2020	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10^{-7}
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	CR7015A-WA, CR7015X-XXXX (X-XXXX can be replaced by letter from "A" to "Z", number from "0" to "9" or blank)
Model Description:	All model's the function, software and electric circuit are the same, X-XXXX can be replaced by letter from "A" to "Z", number from "0" to "9" or blank
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	v003
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 4.391dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: 0.8dBi
Ratings:	AC 120V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Laptop	DELL	Inspiron5570	JR4G1A00DPC	AE
2	AC Adaptor	DELL	HA45NM140	CN-00285K-CH200-88V-OEYC-A06	AE

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK/π/4DQPSK/8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Oct. 17, 2019	Oct. 16, 2020
2	Power Sensor	Agilent	U2021XA	MY56120032	Nov. 02, 2019	Nov. 01, 2020
3	Power Sensor	Agilent	U2021XA	MY56120034	Nov. 02, 2019	Nov. 01, 2020
4	Communication test set	R&S	CMW500	118735	Nov. 02, 2019	Nov. 01, 2020
5	Spectrum Analyzer	R&S	FSP40	100550	Nov. 02, 2019	Nov. 01, 2020
6	Signal Generator	Agilent	N5181A	MY49060920	Nov. 03, 2019	Nov. 02, 2020
7	Signal Generator	Agilent	N5182A	MY47420195	Nov. 03, 2019	Nov. 02, 2020
8	Communication test set	R&S	CMU200	119978	Nov. 02, 2019	Nov. 01, 2020
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Nov. 02, 2019	Nov. 01, 2020
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Nov. 02, 2019	Nov. 01, 2020
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Nov. 02, 2019	Nov. 01, 2020
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Nov. 02, 2019	Nov. 01, 2020
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Nov. 02, 2019	Nov. 01, 2020
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 10, 2019	Nov. 09, 2020

17	Receiver	R&S	ESPI	100362	Nov. 02, 2019	Nov. 01, 2020
18	Amplifier	HP	8447E	2945A02747	Nov. 03, 2019	Nov. 02, 2020
19	Amplifier	Agilent	8449B	3008A01838	Nov. 03, 2019	Nov. 02, 2020
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	Nov. 02, 2019	Nov. 01, 2020
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2019	Nov. 01, 2020
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Nov. 02, 2019	Nov. 01, 2020
24	loop antenna	ZHINAN	ZN30900A	/	Nov. 02, 2019	Nov. 01, 2020
25	Horn antenna	A/H/System	SAS-574	588	Nov. 02, 2019	Nov. 01, 2020
26	Amplifier	AEROFLEX	/	S/N/ 097	Nov. 02, 2019	Nov. 01, 2020

Conducted emissions Test						
	Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
27	AMN	ROHDE&SC HWARZ	ESH3-Z5	831551852	Nov. 02, 2019	Nov. 01, 2020
29	Pulse limiter	ROHDE&SC HWARZ	ESH3Z2	357881052	Nov. 02, 2019	Nov. 01, 2020
30	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCS30	834115/006	Nov. 02, 2019	Nov. 01, 2020
31	Coaxial cable	ZDECL	Z302S	18091904	Nov. 02, 2019	Nov. 01, 2020
32	ISN	TESEQ	NTFM8158	NTFM8158# 183	Nov. 02, 2019	Nov. 01, 2020
33	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCI	10428	Nov. 02, 2019	Nov. 01, 2020
34	Software	Fala	EZ-EMC	EMC-CON 3A1.1	\	\

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

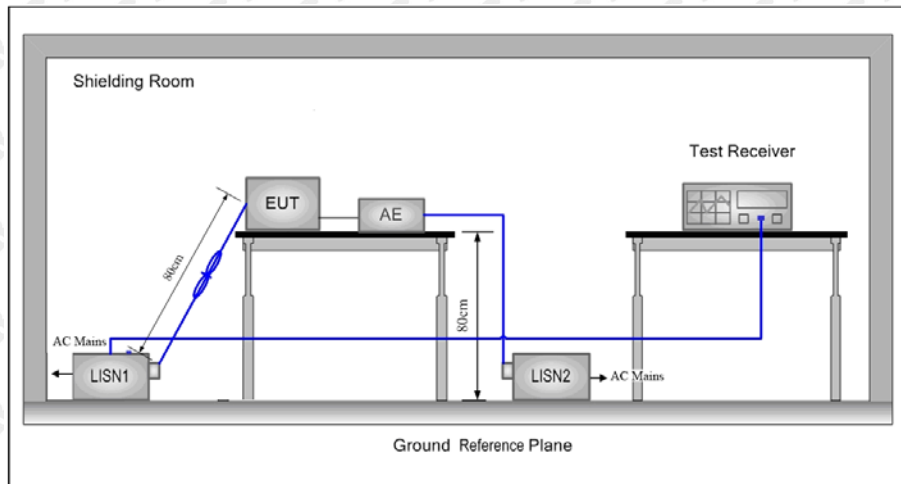

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.


6.4 Test Result

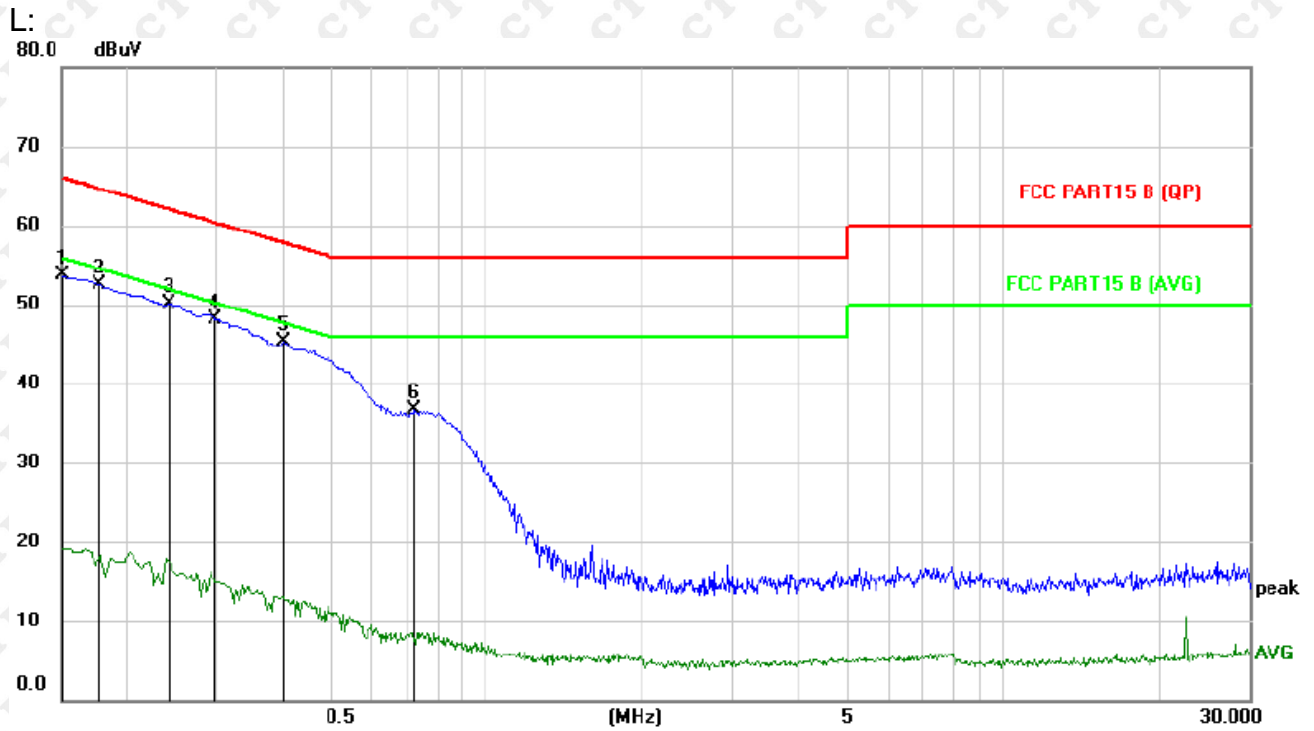

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	43.46	10.20	53.66	66.00	-12.34	peak	
2		0.1768	42.35	10.21	52.56	64.63	-12.07	peak	
3	*	0.2420	40.01	10.19	50.20	62.03	-11.83	peak	
4		0.2980	38.00	10.16	48.16	60.30	-12.14	peak	
5		0.4020	35.15	10.11	45.26	57.81	-12.55	peak	
6		0.7260	26.58	10.10	36.68	56.00	-19.32	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

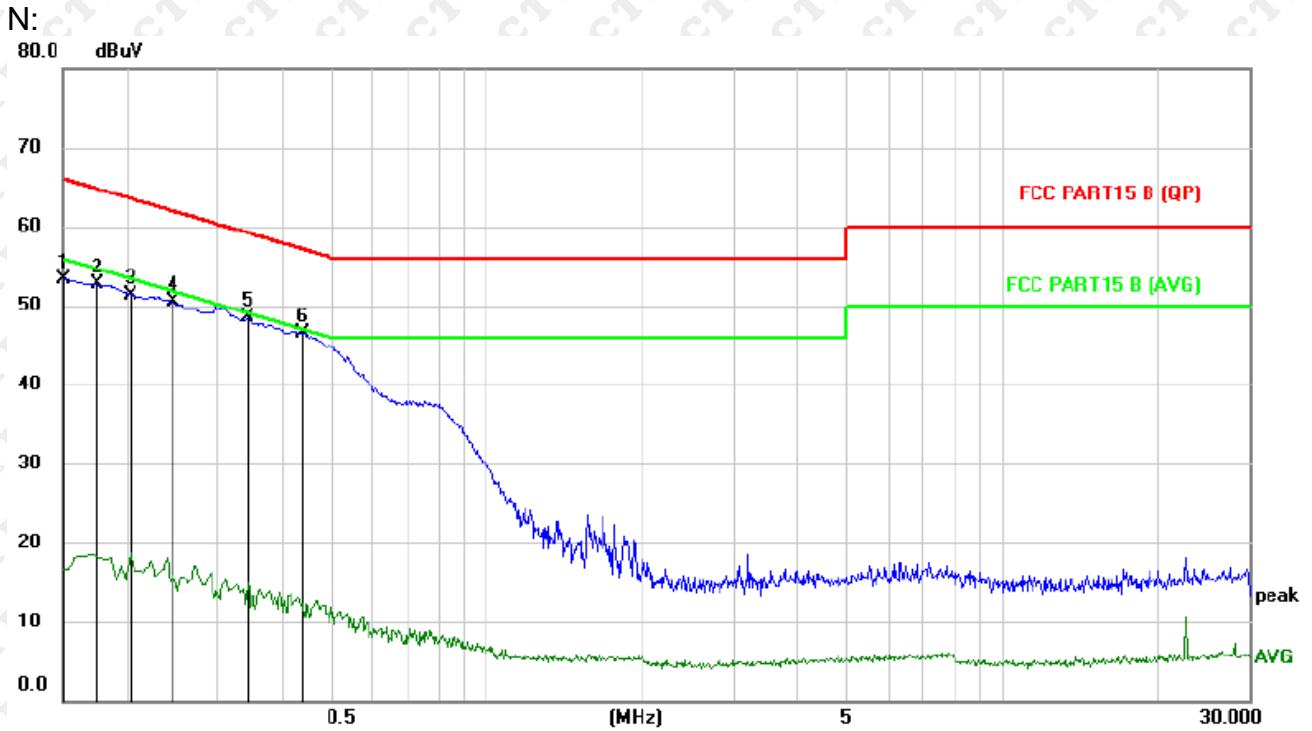

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	43.28	10.08	53.36	66.00	-12.64	peak	
2		0.1740	42.58	10.10	52.68	64.77	-12.09	peak	
3		0.2029	41.27	10.12	51.39	63.49	-12.10	peak	
4		0.2460	40.31	10.13	50.44	61.89	-11.45	peak	
5		0.3420	38.24	10.17	48.41	59.15	-10.74	peak	
6	*	0.4380	36.31	10.21	46.52	57.10	-10.58	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

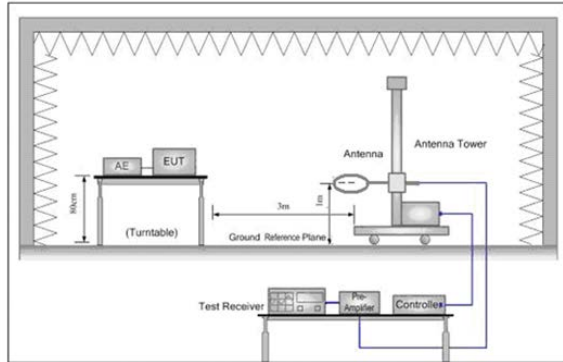


Figure 1. Below 30MHz

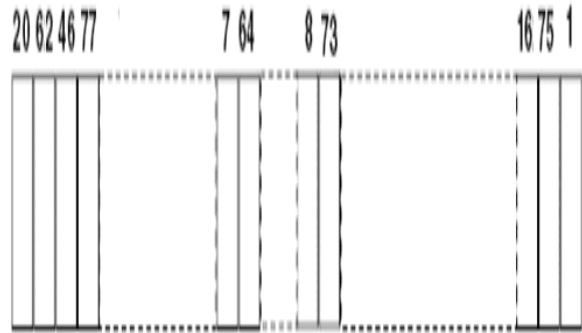


Figure 2. 30MHz to 1GHz

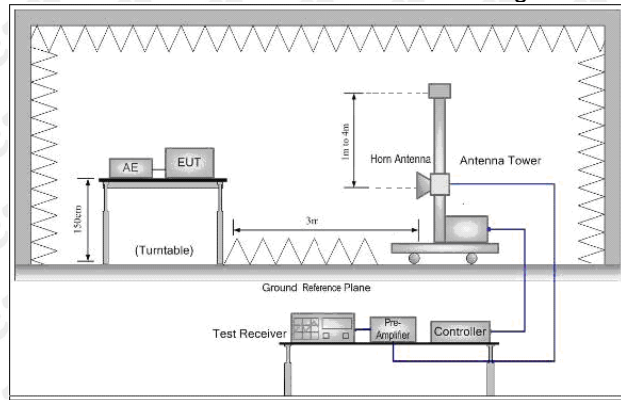


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

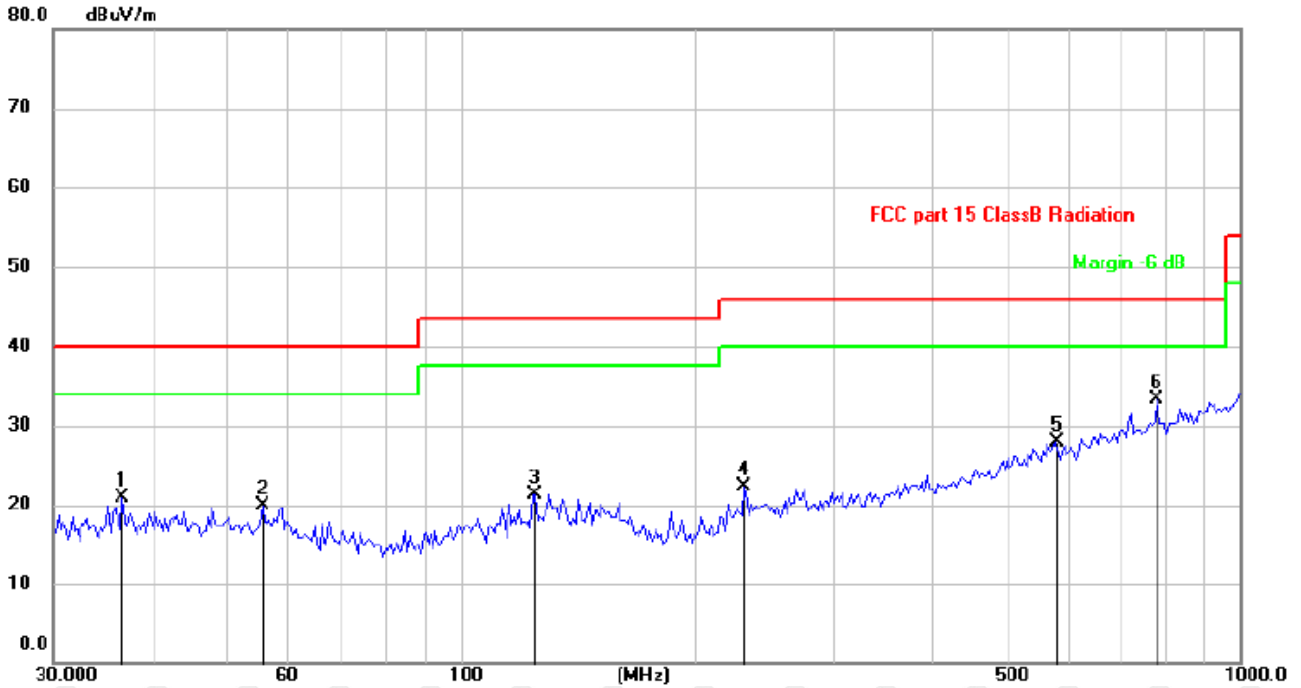

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	degree
1		36.7661	27.18	-6.37	20.81	40.00	-19.19	peak	
2		55.6092	26.42	-6.47	19.95	40.00	-20.05	peak	
3		124.5690	28.84	-7.47	21.37	43.50	-22.13	peak	
4		230.9067	29.63	-7.29	22.34	46.00	-23.66	peak	
5		578.6700	26.25	1.64	27.89	46.00	-18.11	peak	
6	*	782.3452	27.91	5.47	33.38	46.00	-12.62	peak	

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

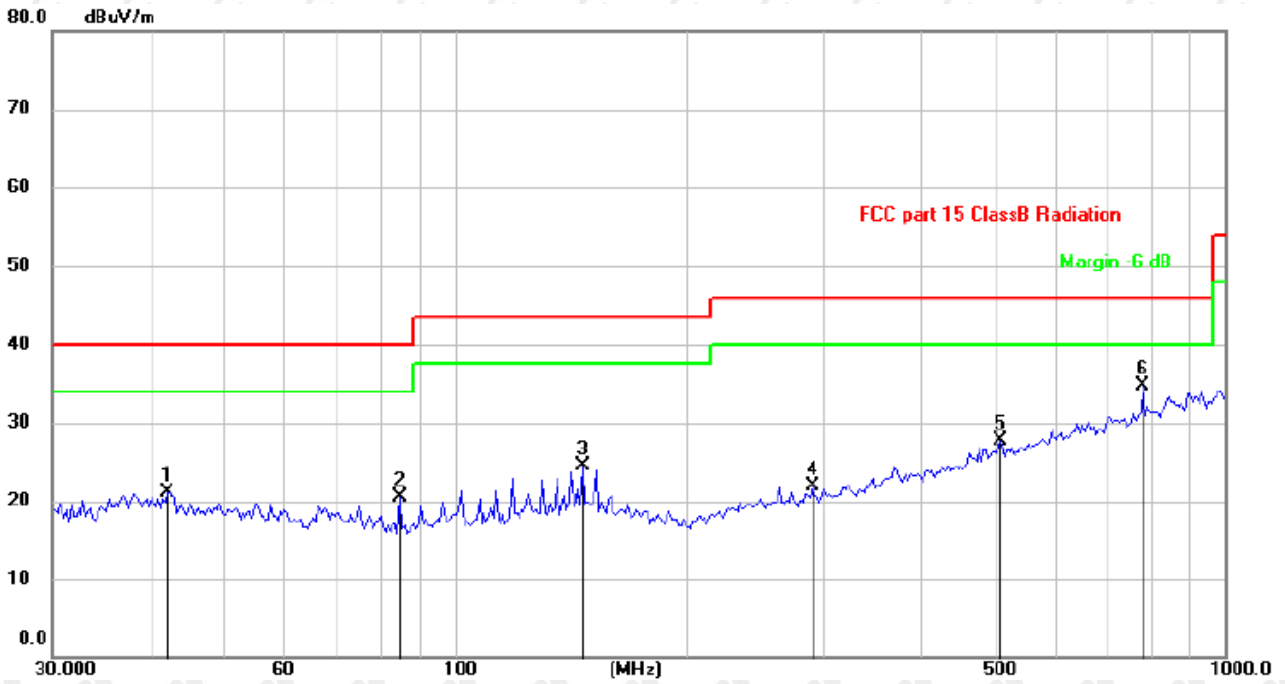

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		42.3021	26.80	-5.77	21.03	40.00	-18.97			peak
2		84.7018	31.01	-10.46	20.55	40.00	-19.45			peak
3		146.3734	30.95	-6.38	24.57	43.50	-18.93			peak
4		291.0358	27.49	-5.59	21.90	46.00	-24.10			peak
5		510.0434	27.37	0.24	27.61	46.00	-18.39			peak
6	*	782.3451	29.16	5.47	34.63	46.00	-11.37			peak

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

 CH Low (2402MHz)
 Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	58.73	-3.65	55.08	74.00	-18.92	peak
4804	48.21	-3.65	44.56	54.00	-9.44	AVG
7206	58.66	-0.95	57.71	74.00	-16.29	peak
7206	42.86	-0.95	41.91	54.00	-12.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	59.36	-3.65	55.71	74.00	-18.29	peak
4804	48.49	-3.65	44.84	54.00	-9.16	AVG
7206	61.12	-0.95	60.17	74.00	-13.83	peak
7206	42.88	-0.95	41.93	54.00	-12.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	57.69	-3.54	54.15	74.00	-19.85	peak
4882.00	49.32	-3.54	45.78	54.00	-8.22	AVG
7323.00	56.52	-0.81	55.71	74.00	-18.29	peak
7323.00	44.19	-0.81	43.38	54.00	-10.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	57.78	-3.54	54.24	74.00	-19.76	peak
4882.00	49.16	-3.54	45.62	54.00	-8.38	AVG
7323.00	58.72	-0.81	57.91	74.00	-16.09	peak
7323.00	43.08	-0.81	42.27	54.00	-11.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
 Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.73	-3.43	53.30	74.00	-20.70	peak
4960	48.80	-3.44	45.36	54.00	-8.64	AVG
7440	61.20	-0.77	60.43	74.00	-13.57	peak
7440	42.53	-0.77	41.76	54.00	-12.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.49	-3.43	55.06	74.00	-18.94	peak
4960	47.62	-3.44	44.18	54.00	-9.82	AVG
7440	61.14	-0.77	60.37	74.00	-13.63	peak
7440	41.06	-0.77	40.29	54.00	-13.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) All modes of GFSK, π/4 DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3) For BT above 1GHz test all modes of GFSK, π/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

hopping
 Operation Mode: TX CH Low (2402MHz)
 Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.37	-5.81	51.56	74.00	-22.44	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.39	-5.84	50.55	74.00	-23.45	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.75	-5.81	49.94	74.00	-24.06	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.84	-5.84	51.00	74.00	-23.00	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.73	-5.81	48.92	74.00	-25.08	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.64	-6.06	47.58	74.00	-26.42	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.66	-5.81	51.85	74.00	-22.15	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.08	-6.06	48.02	74.00	-25.98	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	56.62	-5.81	50.81	74.00	-23.19	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.76	-5.84	48.92	74.00	-25.08	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	54.98	-5.81	49.17	74.00	-24.83	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.56	-5.84	49.72	74.00	-24.28	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.01	-5.81	50.20	74.00	-23.80	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.37	-6.06	48.31	74.00	-25.69	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.89	-5.81	51.08	74.00	-22.92	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.07	-6.06	49.01	74.00	-24.99	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

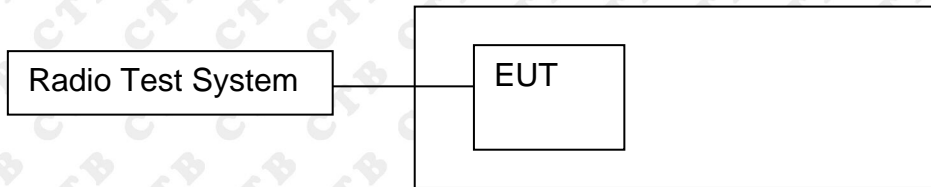


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result

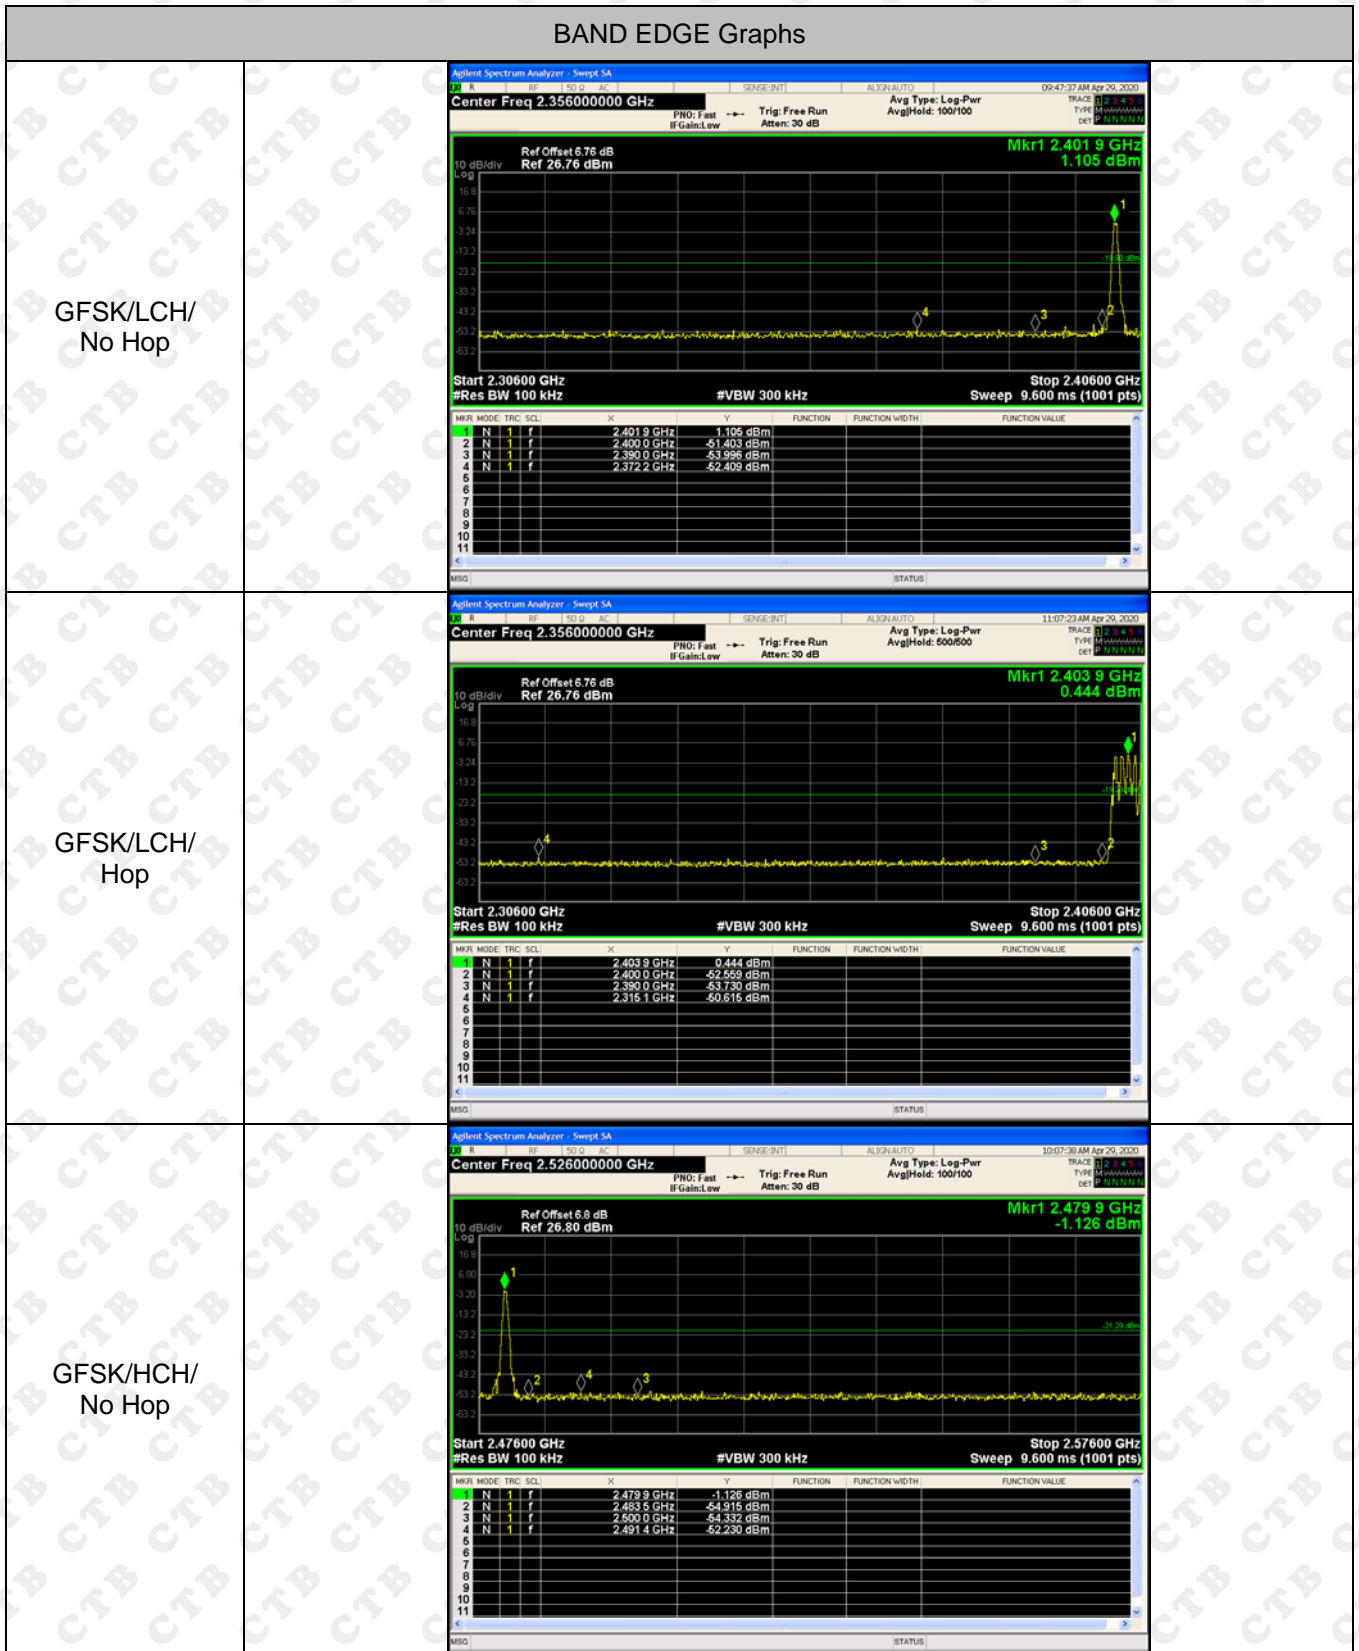


<p>GFSK/HCH/ Hop</p>	 <table border="1" data-bbox="582 571 1284 728"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.476 9 GHz</td> <td>-1.426 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td>-53.974 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td>-51.474 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 9 GHz</td> <td>-51.343 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.476 9 GHz	-1.426 dBm				2	N	1	f	2.483 5 GHz	-53.974 dBm				3	N	1	f	2.500 0 GHz	-51.474 dBm				4	N	1	f	2.488 9 GHz	-51.343 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.476 9 GHz	-1.426 dBm																																									
2	N	1	f	2.483 5 GHz	-53.974 dBm																																									
3	N	1	f	2.500 0 GHz	-51.474 dBm																																									
4	N	1	f	2.488 9 GHz	-51.343 dBm																																									
<p>π/4DQPSK/LCH/ No Hop</p>	 <table border="1" data-bbox="582 1108 1284 1265"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 0 GHz</td> <td>0.597 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 0 GHz</td> <td>-50.290 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 0 GHz</td> <td>-56.465 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.332 7 GHz</td> <td>-51.814 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 0 GHz	0.597 dBm				2	N	1	f	2.400 0 GHz	-50.290 dBm				3	N	1	f	2.390 0 GHz	-56.465 dBm				4	N	1	f	2.332 7 GHz	-51.814 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 0 GHz	0.597 dBm																																									
2	N	1	f	2.400 0 GHz	-50.290 dBm																																									
3	N	1	f	2.390 0 GHz	-56.465 dBm																																									
4	N	1	f	2.332 7 GHz	-51.814 dBm																																									
<p>π/4DQPSK/LCH/ Hop</p>	 <table border="1" data-bbox="582 1635 1284 1792"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.403 2 GHz</td> <td>0.884 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 0 GHz</td> <td>-52.674 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 0 GHz</td> <td>-53.483 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.374 2 GHz</td> <td>-50.379 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.403 2 GHz	0.884 dBm				2	N	1	f	2.400 0 GHz	-52.674 dBm				3	N	1	f	2.390 0 GHz	-53.483 dBm				4	N	1	f	2.374 2 GHz	-50.379 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.403 2 GHz	0.884 dBm																																									
2	N	1	f	2.400 0 GHz	-52.674 dBm																																									
3	N	1	f	2.390 0 GHz	-53.483 dBm																																									
4	N	1	f	2.374 2 GHz	-50.379 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 2 GHz</td> <td>-1.451 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td>-53.903 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td>-54.007 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 1 GHz</td> <td>-51.362 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-1.451 dBm				2	N	1	f	2.483 5 GHz	-53.903 dBm				3	N	1	f	2.500 0 GHz	-54.007 dBm				4	N	1	f	2.489 1 GHz	-51.362 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 2 GHz	-1.451 dBm																																									
2	N	1	f	2.483 5 GHz	-53.903 dBm																																									
3	N	1	f	2.500 0 GHz	-54.007 dBm																																									
4	N	1	f	2.489 1 GHz	-51.362 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.478 1 GHz</td> <td>-1.905 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td>-53.977 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td>-53.388 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 7 GHz</td> <td>-50.801 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 1 GHz	-1.905 dBm				2	N	1	f	2.483 5 GHz	-53.977 dBm				3	N	1	f	2.500 0 GHz	-53.388 dBm				4	N	1	f	2.490 7 GHz	-50.801 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.478 1 GHz	-1.905 dBm																																									
2	N	1	f	2.483 5 GHz	-53.977 dBm																																									
3	N	1	f	2.500 0 GHz	-53.388 dBm																																									
4	N	1	f	2.490 7 GHz	-50.801 dBm																																									
<p>8DPSK/LCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 2 GHz</td> <td>1.186 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 0 GHz</td> <td>-48.978 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 9 GHz</td> <td>-54.442 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378 9 GHz</td> <td>-50.616 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 2 GHz	1.186 dBm				2	N	1	f	2.400 0 GHz	-48.978 dBm				3	N	1	f	2.390 9 GHz	-54.442 dBm				4	N	1	f	2.378 9 GHz	-50.616 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 2 GHz	1.186 dBm																																									
2	N	1	f	2.400 0 GHz	-48.978 dBm																																									
3	N	1	f	2.390 9 GHz	-54.442 dBm																																									
4	N	1	f	2.378 9 GHz	-50.616 dBm																																									


<p>8DPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.356000000 GHz Ref Offset 6.76 dB Ref 26.76 dBm Mkr1 2.405 2 GHz 0.863 dBm Start 2.30600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.405 2 GHz</td> <td>0.863 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 0 GHz</td> <td>-53.879 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 0 GHz</td> <td>-53.739 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.382 2 GHz</td> <td>-50.632 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.405 2 GHz	0.863 dBm				2	N	1	f	2.400 0 GHz	-53.879 dBm				3	N	1	f	2.390 0 GHz	-53.739 dBm				4	N	1	f	2.382 2 GHz	-50.632 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.405 2 GHz	0.863 dBm																																									
2	N	1	f	2.400 0 GHz	-53.879 dBm																																									
3	N	1	f	2.390 0 GHz	-53.739 dBm																																									
4	N	1	f	2.382 2 GHz	-50.632 dBm																																									
<p>8DPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.526000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr1 2.480 1 GHz -1.765 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 1 GHz</td> <td>-1.765 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 5 GHz</td> <td>-55.203 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td>-53.480 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.486 1 GHz</td> <td>-51.732 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 1 GHz	-1.765 dBm				2	N	1	f	2.493 5 GHz	-55.203 dBm				3	N	1	f	2.500 0 GHz	-53.480 dBm				4	N	1	f	2.486 1 GHz	-51.732 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 1 GHz	-1.765 dBm																																									
2	N	1	f	2.493 5 GHz	-55.203 dBm																																									
3	N	1	f	2.500 0 GHz	-53.480 dBm																																									
4	N	1	f	2.486 1 GHz	-51.732 dBm																																									
<p>8DPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.526000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr1 2.476 0 GHz -3.421 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.476 0 GHz</td> <td>-3.421 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td>-52.836 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td>-52.572 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494 5 GHz</td> <td>-51.266 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.476 0 GHz	-3.421 dBm				2	N	1	f	2.483 5 GHz	-52.836 dBm				3	N	1	f	2.500 0 GHz	-52.572 dBm				4	N	1	f	2.494 5 GHz	-51.266 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.476 0 GHz	-3.421 dBm																																									
2	N	1	f	2.483 5 GHz	-52.836 dBm																																									
3	N	1	f	2.500 0 GHz	-52.572 dBm																																									
4	N	1	f	2.494 5 GHz	-51.266 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH

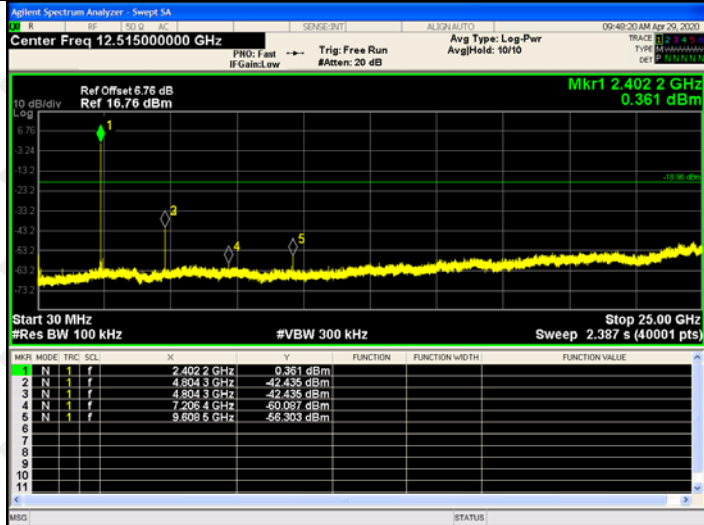


GFSK/MCH

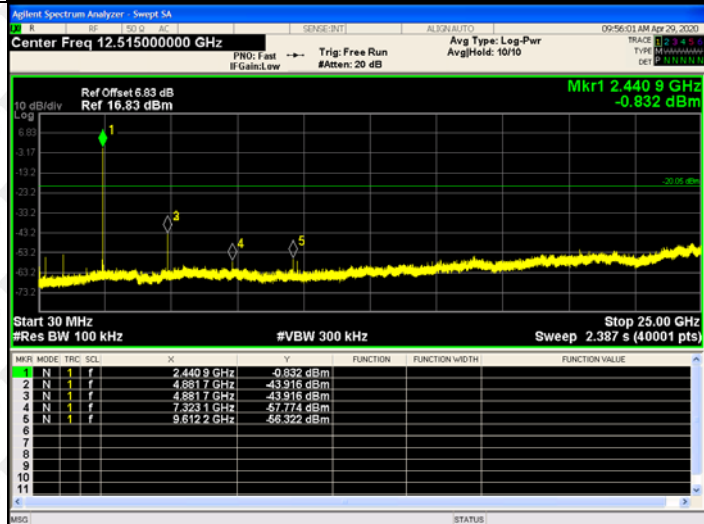

GFSK/HCH

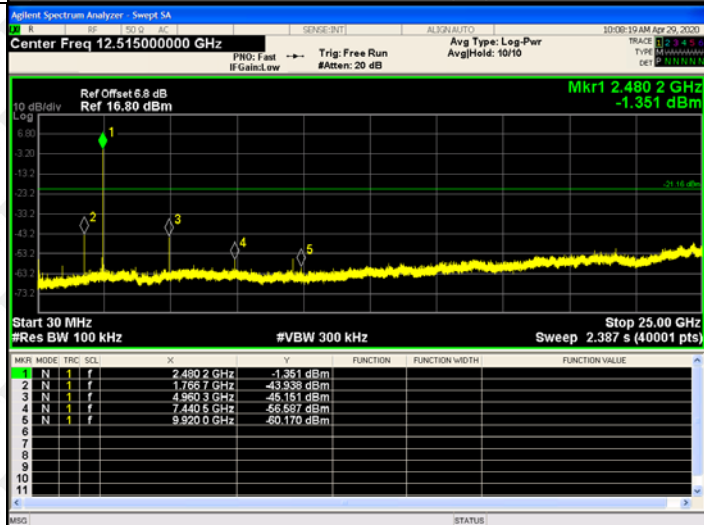
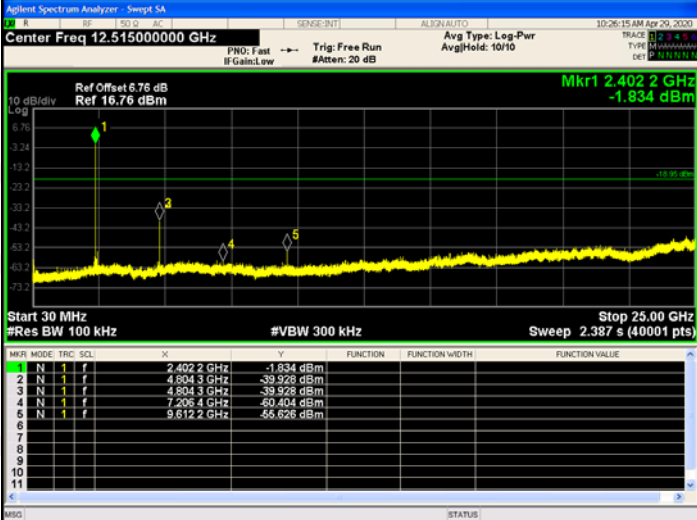
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trc</th> <th>Scl</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4022 GHz</td> <td>-1.834 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8043 GHz</td> <td>-39.928 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8043 GHz</td> <td>-39.928 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2064 GHz</td> <td>-60.404 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2064 GHz</td> <td>-60.404 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6122 GHz</td> <td>-56.626 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4022 GHz	-1.834 dBm				2	N	1	f	4.8043 GHz	-39.928 dBm				3	N	1	f	4.8043 GHz	-39.928 dBm				4	N	1	f	7.2064 GHz	-60.404 dBm				5	N	1	f	7.2064 GHz	-60.404 dBm				6	N	1	f	9.6122 GHz	-56.626 dBm				
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value																																																									
1	N	1	f	2.4022 GHz	-1.834 dBm																																																												
2	N	1	f	4.8043 GHz	-39.928 dBm																																																												
3	N	1	f	4.8043 GHz	-39.928 dBm																																																												
4	N	1	f	7.2064 GHz	-60.404 dBm																																																												
5	N	1	f	7.2064 GHz	-60.404 dBm																																																												
6	N	1	f	9.6122 GHz	-56.626 dBm																																																												
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trc</th> <th>Scl</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4409 GHz</td> <td>-0.410 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8819 GHz</td> <td>-47.973 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8819 GHz</td> <td>-47.973 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3237 GHz</td> <td>-59.681 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3237 GHz</td> <td>-59.681 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7646 GHz</td> <td>-57.016 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4409 GHz	-0.410 dBm				2	N	1	f	4.8819 GHz	-47.973 dBm				3	N	1	f	4.8819 GHz	-47.973 dBm				4	N	1	f	7.3237 GHz	-59.681 dBm				5	N	1	f	7.3237 GHz	-59.681 dBm				6	N	1	f	9.7646 GHz	-57.016 dBm				
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value																																																									
1	N	1	f	2.4409 GHz	-0.410 dBm																																																												
2	N	1	f	4.8819 GHz	-47.973 dBm																																																												
3	N	1	f	4.8819 GHz	-47.973 dBm																																																												
4	N	1	f	7.3237 GHz	-59.681 dBm																																																												
5	N	1	f	7.3237 GHz	-59.681 dBm																																																												
6	N	1	f	9.7646 GHz	-57.016 dBm																																																												
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trc</th> <th>Scl</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-4.753 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9603 GHz</td> <td>-47.480 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9603 GHz</td> <td>-47.480 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4405 GHz</td> <td>-56.362 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4405 GHz</td> <td>-56.362 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9200 GHz</td> <td>-59.969 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4802 GHz	-4.753 dBm				2	N	1	f	4.9603 GHz	-47.480 dBm				3	N	1	f	4.9603 GHz	-47.480 dBm				4	N	1	f	7.4405 GHz	-56.362 dBm				5	N	1	f	7.4405 GHz	-56.362 dBm				6	N	1	f	9.9200 GHz	-59.969 dBm				
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value																																																									
1	N	1	f	2.4802 GHz	-4.753 dBm																																																												
2	N	1	f	4.9603 GHz	-47.480 dBm																																																												
3	N	1	f	4.9603 GHz	-47.480 dBm																																																												
4	N	1	f	7.4405 GHz	-56.362 dBm																																																												
5	N	1	f	7.4405 GHz	-56.362 dBm																																																												
6	N	1	f	9.9200 GHz	-59.969 dBm																																																												