



# FCC Part 15C Test Report

## FCC ID: AUSCR8005GJYK

Applicant: Modern Marketing Concepts, Inc.

Address: 1220 E Oak, St. Louisville Kentucky United States 40204

Manufacturer: Shenzhen Jiaying Technology Holding Company Limited

Address: A1102, workshop 1, Tianan Digital Innovation Park, No. 524, Qinglin Road, huanggekeng community, Longcheng street, Longgang District, Shenzhen

EUT: TURNTABLE PLAYER

Trade Mark: CROSLEY

Model Number: ST14012-22J, ST14012-22K, ST14012-22M, CR8005G-BK, CR8005G-TN, CR8005G-WS, CR8005G-MT, CR8005-XX(XX represent the colorcode, they can be replaced by letters from A to Z)

Date of Receipt: Oct. 31, 2022

Test Date: Nov. 01, 2022 - Nov. 13, 2022

Date of Report: Nov. 14, 2022

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20221114033E

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



<b>Table of Contents</b>	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	10
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
<b>3 . EMC EMISSION TEST</b>	<b>12</b>
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	20
3.2.1 RADIATED EMISSION LIMITS	20
3.2.2 TEST PROCEDURE	21
3.2.3 DEVIATION FROM TEST STANDARD	21
3.2.4 TEST SETUP	21
3.2.5 EUT OPERATING CONDITIONS	22
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	23
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	24
3.2.8 TEST RESULTS (1GHZ~25GHZ)	30
3.3 RADIATED BAND EMISSION MEASUREMENT	31
3.3.1 TEST REQUIREMENT:	31
3.3.2 TEST PROCEDURE	31
3.3.3 DEVIATION FROM TEST STANDARD	31
3.3.4 TEST SETUP	32
3.3.5 EUT OPERATING CONDITIONS	32
<b>4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION</b>	<b>34</b>
4.1 LIMIT	34
4.1.1 TEST SETUP	34
4.1.2 TEST PROCEDURE	34



<b>Table of Contents</b>	<b>Page</b>
4.1.3 DEVIATION FROM STANDARD	34
4.1.4 TEST RESULT	35
<b>5. PEAK OUTPUT POWER</b>	<b>46</b>
5.1 APPLIED PROCEDURES / LIMIT	46
5.1.1 TEST PROCEDURE	46
5.1.2 DEVIATION FROM STANDARD	46
5.1.3 TEST SETUP	46
5.1.4 EUT OPERATION CONDITIONS	46
5.1.5 TEST RESULTS	47
<b>6. NUMBER OF HOPPING CHANNEL</b>	<b>53</b>
6.1 APPLIED PROCEDURES / LIMIT	53
6.1.1 TEST PROCEDURE	53
6.1.2 DEVIATION FROM STANDARD	53
6.1.3 TEST SETUP	53
6.1.4 EUT OPERATION CONDITIONS	53
6.1.5 TEST RESULTS	53
<b>7. BANDWIDTH TEST</b>	<b>56</b>
7.1 APPLIED PROCEDURES / LIMIT	56
7.1.1 TEST PROCEDURE	56
7.1.2 DEVIATION FROM STANDARD	56
7.1.3 TEST SETUP	56
7.1.4 EUT OPERATION CONDITIONS	56
7.1.5 TEST RESULTS	57
<b>8. HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>62</b>
8.1 APPLIED PROCEDURES / LIMIT	62
8.1.1 TEST PROCEDURE	62
8.1.2 DEVIATION FROM STANDARD	62
8.1.3 TEST SETUP	62
8.1.4 EUT OPERATION CONDITIONS	62
8.1.5 TEST RESULTS	62
<b>9. DWELL TIME OF OCCUPANCY</b>	<b>65</b>
9.1 APPLIED PROCEDURES / LIMIT	65
9.1.1 TEST PROCEDURE	65
9.1.2 DEVIATION FROM STANDARD	65
9.1.3 TEST SETUP	65
9.1.4 EUT OPERATION CONDITIONS	65
9.1.5 TEST RESULTS	66
<b>10. ANTENNA REQUIREMENT</b>	<b>72</b>



<b>Table of Contents</b>	<b>Page</b>
<b>10.1 STANDARD REQUIREMENT</b>	<b>72</b>
<b>10.2 EUT ANTENNA</b>	<b>72</b>
<b>11. TEST SEUUP PHOTO</b>	<b>73</b>
<b>12. EUT PHOTO</b>	<b>73</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.209(a)	Radiated Spurious Emission	PASS	
15.205	Restricted Band Edge	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(1)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(1)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247 (d)	Conducted Unwanted Emissions and Bandedge	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



## 1.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.:CN0118

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name:	TURNTABLE PLAYER
Model No.:	ST14012-22J
Sample ID:	DL-20221114033E
Serial No.:	ST14012-22K, ST14012-22M, CR8005G-BK, CR8005G-TN, CR8005G-WS, CR8005G-MT, CR8005-XX(XX represent the colorcode, they can be replaced by letters from A to Z)
Model Difference	PCB board, circuit, structure and internal of these model(s) are the same, Only model name is different for these model.
Operation Frequency:	2402~2480MHz
Channel numbers:	79 Channels
Channel separation:	1/2/3M
Modulation technology:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna gain:	0dBi
Power supply:	DC 5V from Adapter
Adapter1 information	
Manufacturer:	SHENZHEN SHI GUANGKAIYUAN TECHNOLOGY., LTD
Description:	SWITCHING POWER SUPPLY
Model No:	GKYPS0100050UL1
Input:	AC 100-240V 50/60Hz 0.5A
Output:	DC 5V/1A
Adapter2 information	
Manufacturer:	SHENZHEN TIANHANGXING ELECTRONICS CO., LTD
Description:	AC ADAPTER
Model No:	THX-050100Kv
Input:	AC 100-240V 50/60Hz 0.65A MAX
Output:	DC 5V/1A
Adapter3 information	
Manufacturer:	Shenzhen Qiaoheng Technology Co. Ltd.
Description:	AC/DC ADAPTER
Model No:	QH013Z-0501000GA2
Input:	AC 100-240V 50/60Hz 0.3A
Output:	DC 5V/1A



Note:

1.For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.

2.The EUT’s all information provided by client.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
~	~	~	~	~	~
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2441	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
~	~	~	~	~	~
14	2416	41	2443	68	2470
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		





## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH00	GFSK, $\pi/4$ DQPSK, 8DPSK
Mode 2	CH39	
Mode 3	CH78	
Mode 4	Link Mode	
<b>For Conducted &amp; Radiated Emission</b>		
Final Test Mode	Description	
Mode 1	CH00	GFSK, $\pi/4$ DQPSK, 8DPSK
Mode 2	CH39	
Mode 3	CH78	
Mode 4	Link Mode	


Note:

(1) The measurements are performed at the highest, middle, lowest available channels.




**2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

Radiated Spurious Emission Test



Conducted Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	TURNTABLE PLAYER	ST14012-22J	N/A	EUT
AE	Notebook	B40-80	MP07F6JD	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING**

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Test software Version	Test program: FCC Assist 1.0.2.2		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Setting of Softwave	10	10	10

**2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS**

## Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Dec. 06, 2021	Dec. 05, 2022
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Dec. 06, 2021	Dec. 05, 2022
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Dec. 06, 2021	Dec. 05, 2022
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Dec. 06, 2021	Dec. 05, 2022
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Dec. 06, 2021	Dec. 05, 2022
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Dec. 06, 2021	Dec. 05, 2022
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Dec. 06, 2021	Dec. 05, 2022
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Dec. 06, 2021	Dec. 05, 2022
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Dec. 06, 2021	Dec. 05, 2022
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Dec. 06, 2021	Dec. 05, 2022
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Dec. 06, 2021	Dec. 05, 2022
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Dec. 06, 2021	Dec. 05, 2022
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Dec. 06, 2021	Dec. 05, 2022
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Dec. 06, 2021	Dec. 05, 2022
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Dec. 06, 2021	Dec. 05, 2022
16	D.C. Power Supply	LongWei	PS-305D	010964729	Dec. 06, 2021	Dec. 05, 2022

## Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 25, 2019	Dec. 05, 2022
2	EMI Receiver	R&S	ESR	101421	Dec. 06, 2021	Dec. 05, 2022
3	LISN	R&S	ENV216	102417	Dec. 06, 2021	Dec. 05, 2022
4	843 Cable 1#	ChengYu	CE Cable	001	Dec. 06, 2021	Dec. 05, 2022

## Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

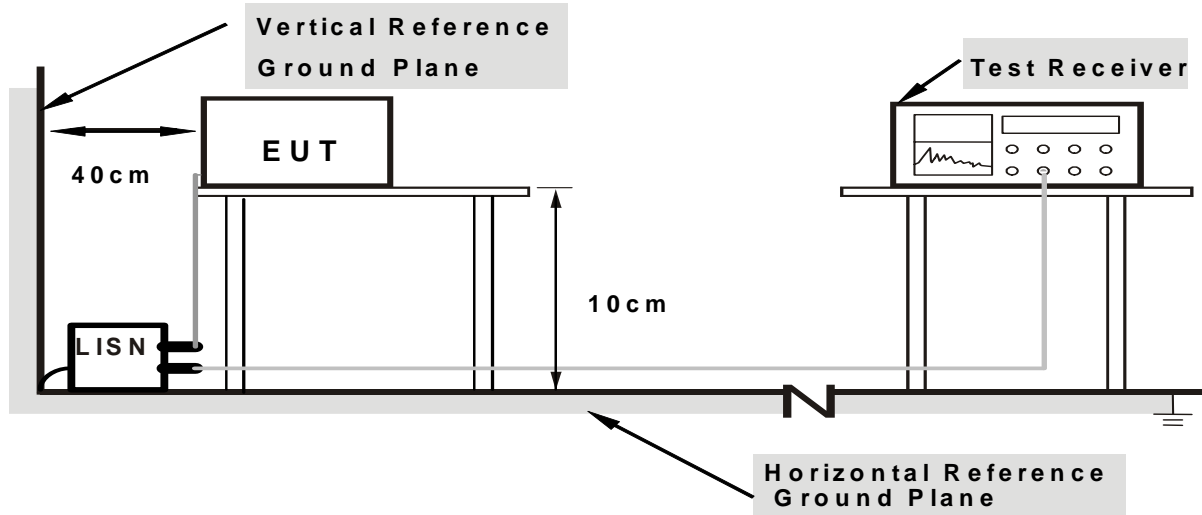

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.1.6 TEST RESULTS

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4
With Adapter1 (Model No: GKYP50100050UL1)			

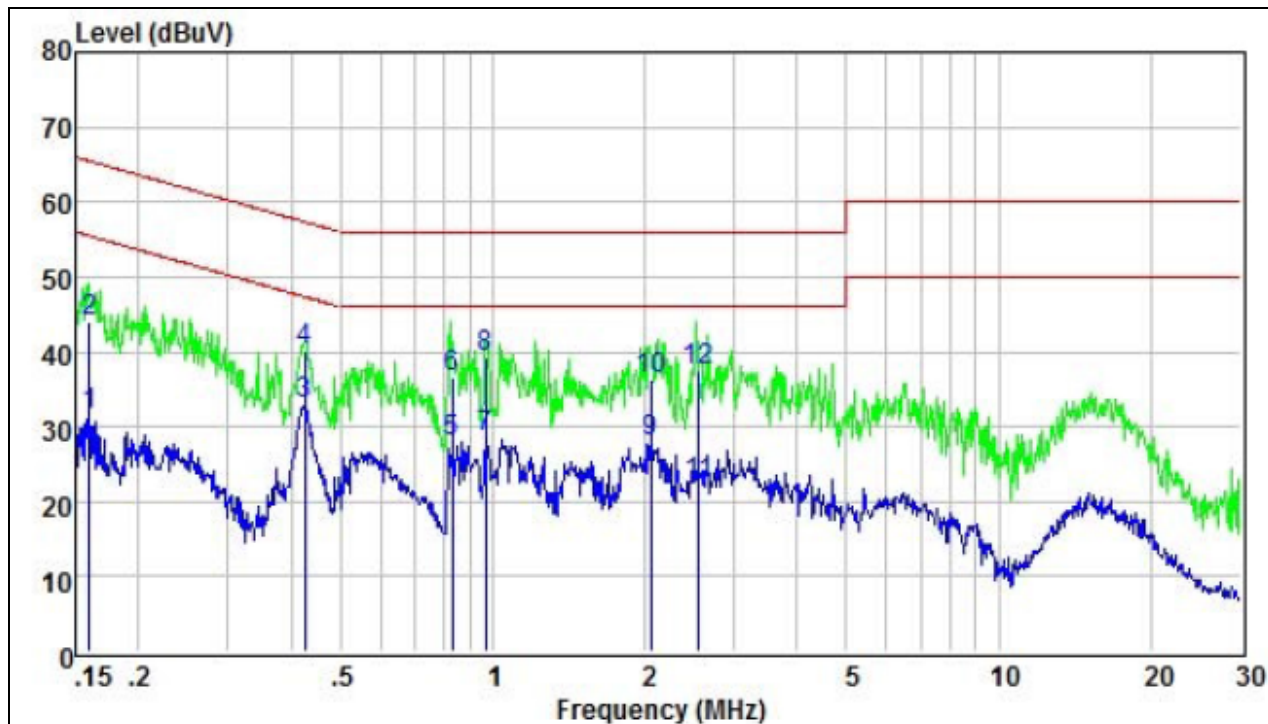


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Read Freq	Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.16	21.75	9.67	0.05	31.47	55.47	-24.00	Average
2	0.16	34.28	9.67	0.05	44.00	65.47	-21.47	QP
3	0.43	23.29	9.76	0.05	33.10	47.33	-14.23	Average
4	0.43	30.45	9.76	0.05	40.26	57.33	-17.07	QP
5	0.83	17.99	9.81	0.05	27.85	46.00	-18.15	Average
6	0.83	26.80	9.81	0.05	36.66	56.00	-19.34	QP
7	0.97	18.50	9.85	0.06	28.41	46.00	-17.59	Average
8	0.97	29.35	9.85	0.06	39.26	56.00	-16.74	QP
9	2.05	18.00	9.87	0.06	27.93	46.00	-18.07	Average
10	2.05	26.43	9.87	0.06	36.36	56.00	-19.64	QP
11	2.55	12.38	9.88	0.06	22.32	46.00	-23.68	Average
12	2.55	27.39	9.88	0.06	37.33	56.00	-18.67	QP



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4
With Adapter1 (Model No: GKYP50100050UL1)			

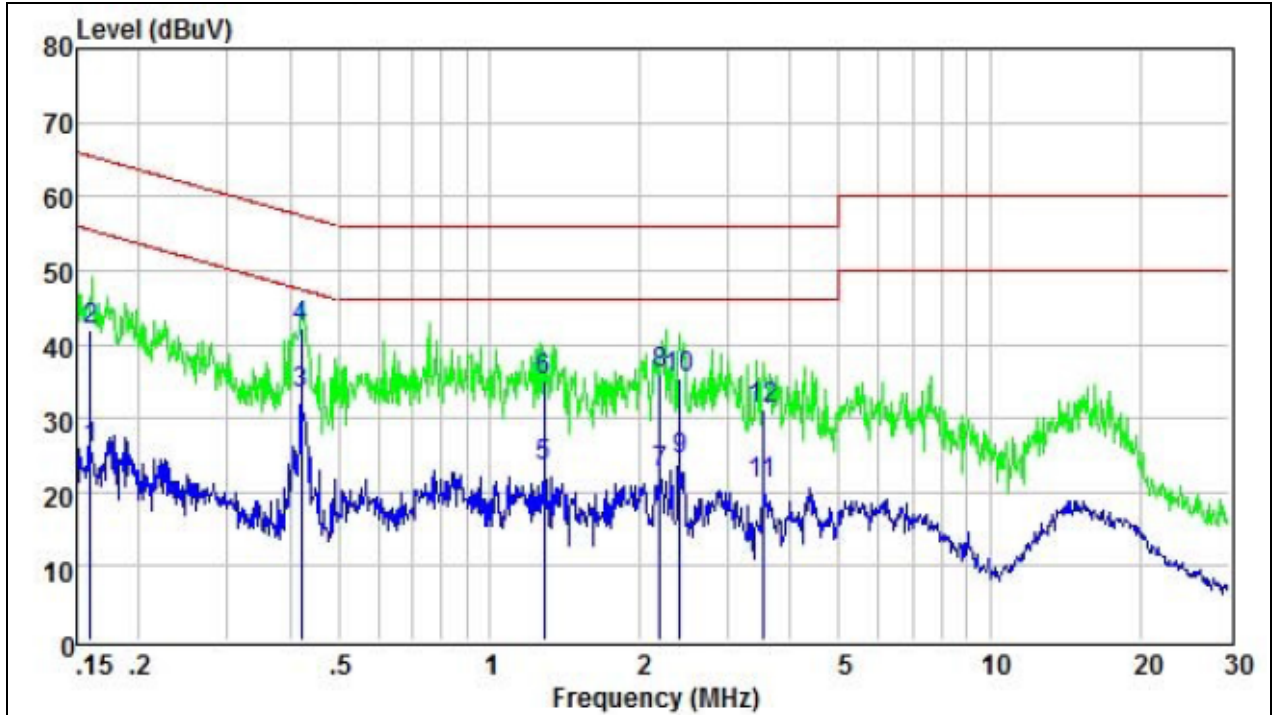


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Read Freq	Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.16	16.17	9.63	0.05	25.85	55.47	-29.62	Average
2	0.16	32.35	9.63	0.05	42.03	65.47	-23.44	QP
3	0.42	23.68	9.67	0.05	33.40	47.42	-14.02	Average
4	0.42	32.43	9.67	0.05	42.15	57.42	-15.27	QP
5	1.29	13.67	9.75	0.06	23.48	46.00	-22.52	Average
6	1.29	25.42	9.75	0.06	35.23	56.00	-20.77	QP
7	2.19	12.84	9.81	0.06	22.71	46.00	-23.29	Average
8	2.19	26.12	9.81	0.06	35.99	56.00	-20.01	QP
9	2.40	14.64	9.80	0.06	24.50	46.00	-21.50	Average
10	2.40	25.50	9.80	0.06	35.36	56.00	-20.64	QP
11	3.51	11.12	9.84	0.06	21.02	46.00	-24.98	Average
12	3.51	21.32	9.84	0.06	31.22	56.00	-24.78	QP



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4
With Adapter2 (Model No: THX-050100Kv)			

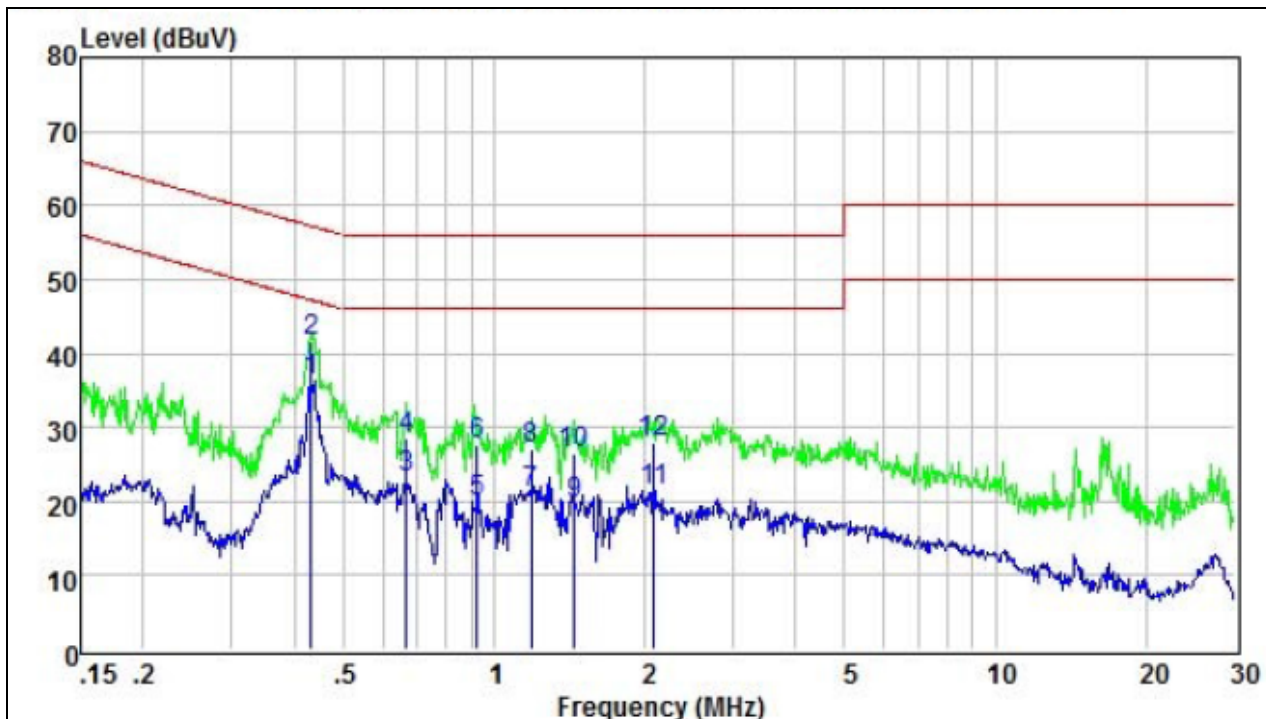

Remark:


Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Read Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.43	26.49	9.76	0.05	36.30	47.20	-10.90	Average
2	0.43	31.84	9.76	0.05	41.65	57.20	-15.55	QP
3	0.67	13.47	9.79	0.05	23.31	46.00	-22.69	Average
4	0.67	18.82	9.79	0.05	28.66	56.00	-27.34	QP
5	0.92	10.00	9.83	0.06	19.89	46.00	-26.11	Average
6	0.92	17.69	9.83	0.06	27.58	56.00	-28.42	QP
7	1.18	11.16	9.87	0.06	21.09	46.00	-24.91	Average
8	1.18	17.05	9.87	0.06	26.98	56.00	-29.02	QP
9	1.45	9.73	9.87	0.06	19.66	46.00	-26.34	Average
10	1.45	16.65	9.87	0.06	26.58	56.00	-29.42	QP
11	2.09	11.52	9.87	0.06	21.45	46.00	-24.55	Average
12	2.09	17.94	9.87	0.06	27.87	56.00	-28.13	QP





Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4
With Adapter2 (Model No: THX-050100Kv)			

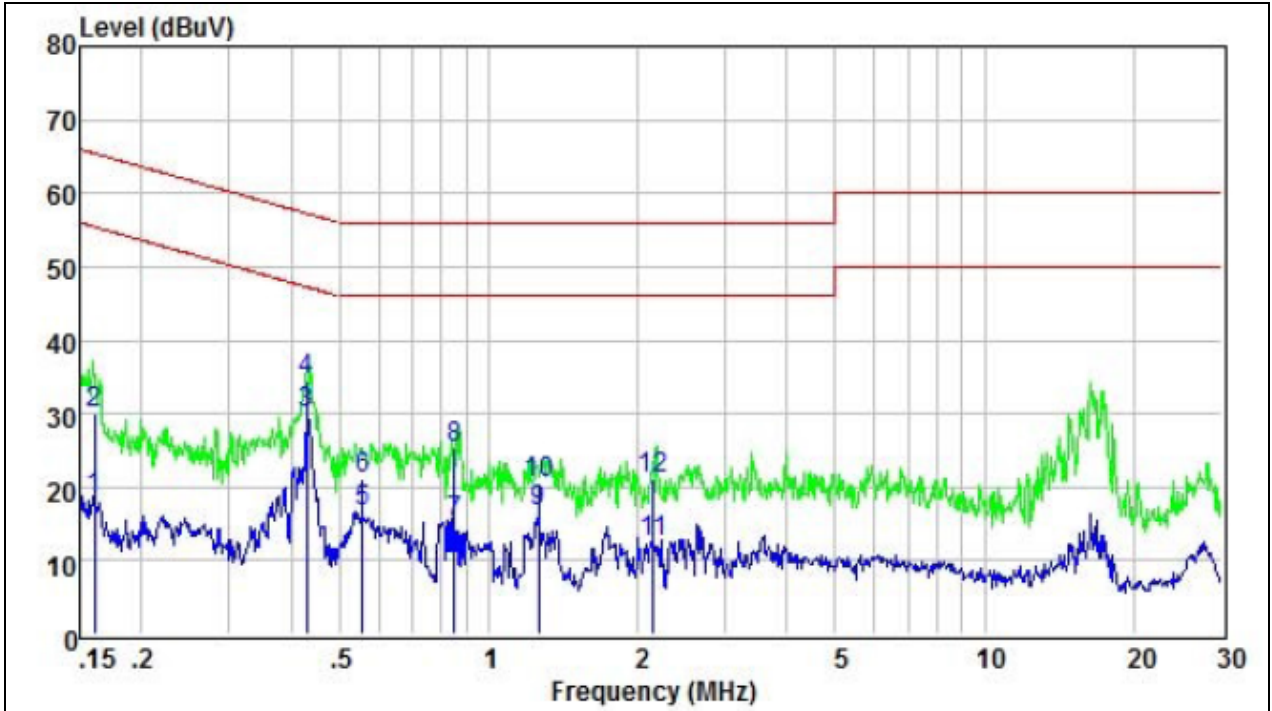


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Read Freq	LISN Level	Cable Factor	Cable Loss	Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.16	8.65	9.63	0.05	18.33	55.43	-37.10	Average
2	0.16	20.32	9.63	0.05	30.00	65.43	-35.43	QP
3	0.43	20.40	9.68	0.05	30.13	47.24	-17.11	Average
4	0.43	24.72	9.68	0.05	34.45	57.24	-22.79	QP
5	0.56	7.00	9.69	0.05	16.74	46.00	-29.26	Average
6	0.56	11.37	9.69	0.05	21.11	56.00	-34.89	QP
7	0.85	5.57	9.68	0.05	15.30	46.00	-30.70	Average
8	0.85	15.60	9.68	0.05	25.33	56.00	-30.67	QP
9	1.26	6.99	9.75	0.06	16.80	46.00	-29.20	Average
10	1.26	10.84	9.75	0.06	20.65	56.00	-35.35	QP
11	2.14	2.61	9.81	0.06	12.48	46.00	-33.52	Average
12	2.14	11.38	9.81	0.06	21.25	56.00	-34.75	QP



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4
With Adapter3 (Model No: QH013Z-0501000GA2)			

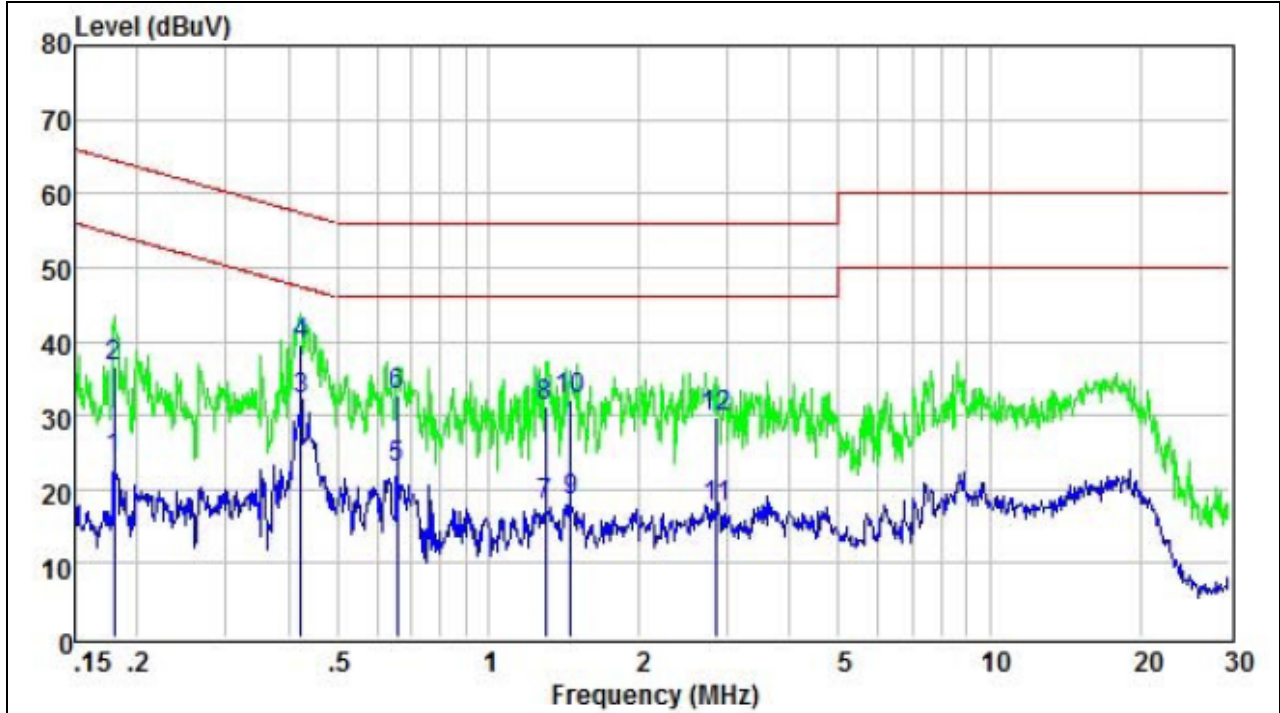


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Read Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.18	14.44	9.68	0.05	24.17	54.50	-30.33	Average
2	0.18	26.81	9.68	0.05	36.54	64.50	-27.96	QP
3	0.42	22.41	9.76	0.05	32.22	47.37	-15.15	Average
4	0.42	29.69	9.76	0.05	39.50	57.37	-17.87	QP
5	0.66	12.99	9.79	0.05	22.83	46.00	-23.17	Average
6	0.66	22.76	9.79	0.05	32.60	56.00	-23.40	QP
7	1.30	7.98	9.87	0.06	17.91	46.00	-28.09	Average
8	1.30	21.31	9.87	0.06	31.24	56.00	-24.76	QP
9	1.46	8.49	9.87	0.06	18.42	46.00	-27.58	Average
10	1.46	22.10	9.87	0.06	32.03	56.00	-23.97	QP
11	2.85	7.50	9.88	0.06	17.44	46.00	-28.56	Average
12	2.85	19.72	9.88	0.06	29.66	56.00	-26.34	QP



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4
With Adapter3 (Model No: QH013Z-0501000GA2)			

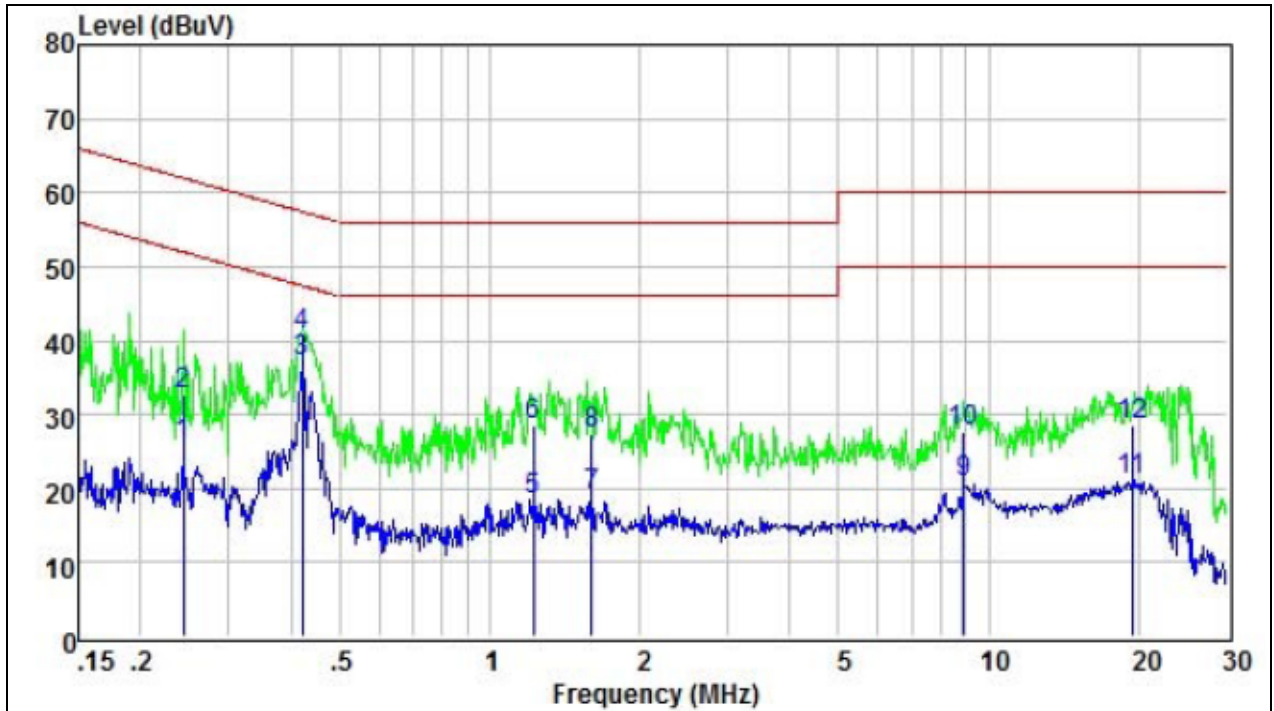

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Read Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.24	16.14	9.65	0.05	25.84	52.00	-26.16	Average
2	0.24	22.90	9.65	0.05	32.60	62.00	-29.40	QP
3	0.42	27.34	9.67	0.05	37.06	47.42	-10.36	Average
4	0.42	31.08	9.67	0.05	40.80	57.42	-16.62	QP
5	1.22	8.76	9.75	0.06	18.57	46.00	-27.43	Average
6	1.22	18.75	9.75	0.06	28.56	56.00	-27.44	QP
7	1.60	9.20	9.77	0.06	19.03	46.00	-26.97	Average
8	1.60	17.67	9.77	0.06	27.50	56.00	-28.50	QP
9	8.92	10.73	9.95	0.09	20.77	50.00	-29.23	Average
10	8.92	17.52	9.95	0.09	27.56	60.00	-32.44	QP
11	19.33	11.00	10.09	0.10	21.19	50.00	-28.81	Average
12	19.33	18.26	10.09	0.10	28.45	60.00	-31.55	QP



**3.2 RADIATED EMISSION MEASUREMENT**

**3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.1 metre to 0.1 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

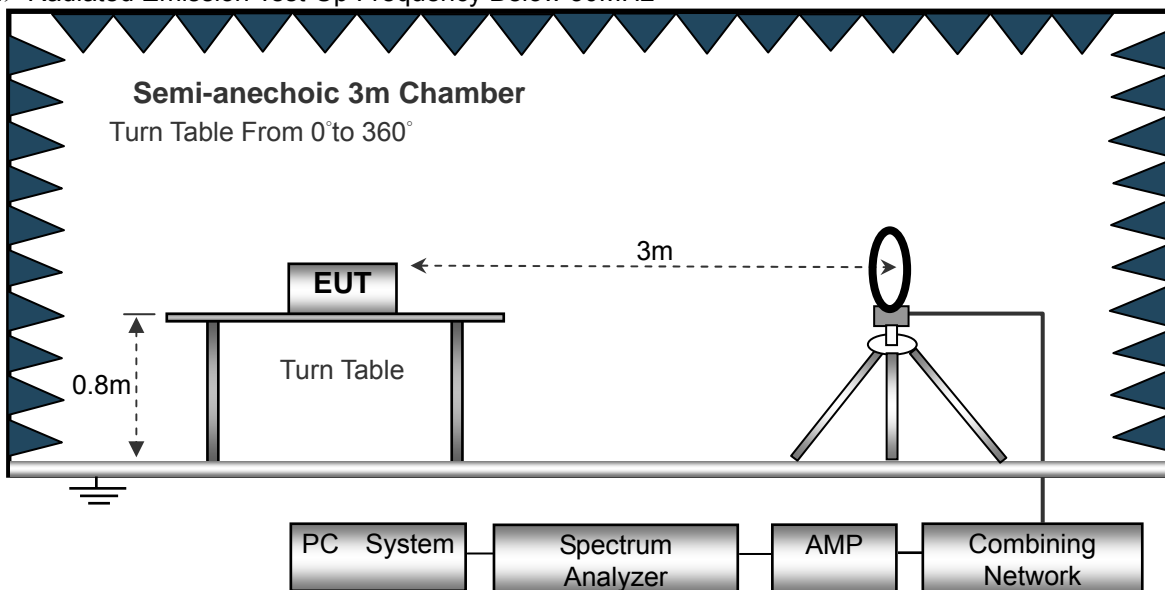

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

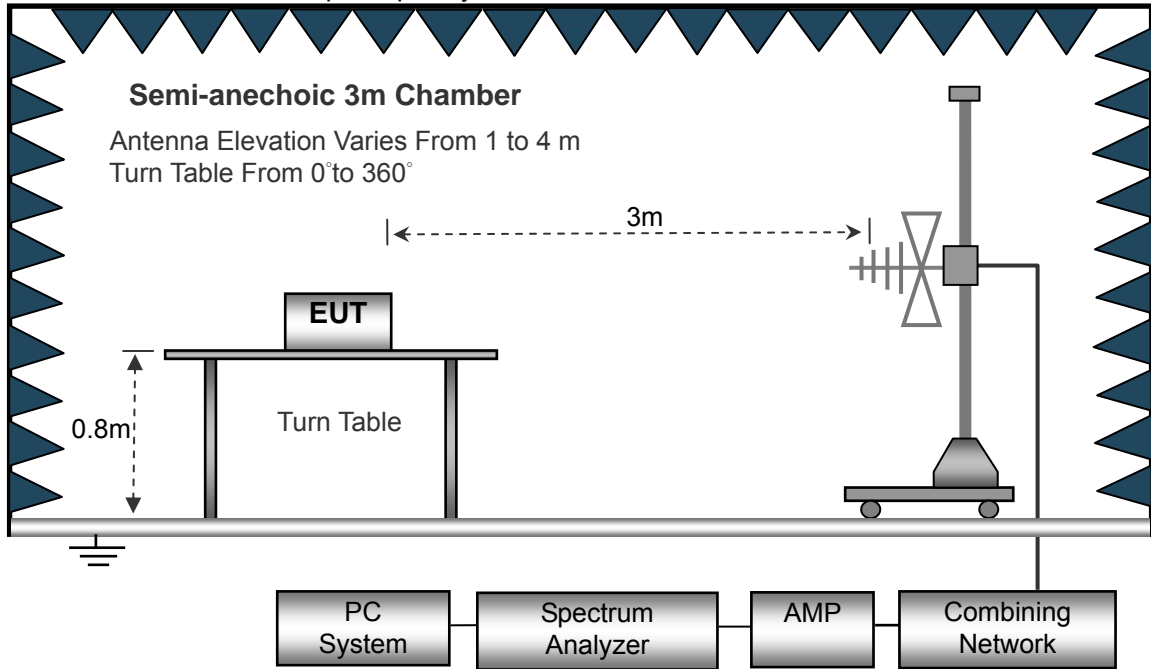

(C) Radiated Emission Test-Up Frequency Above 1GHz

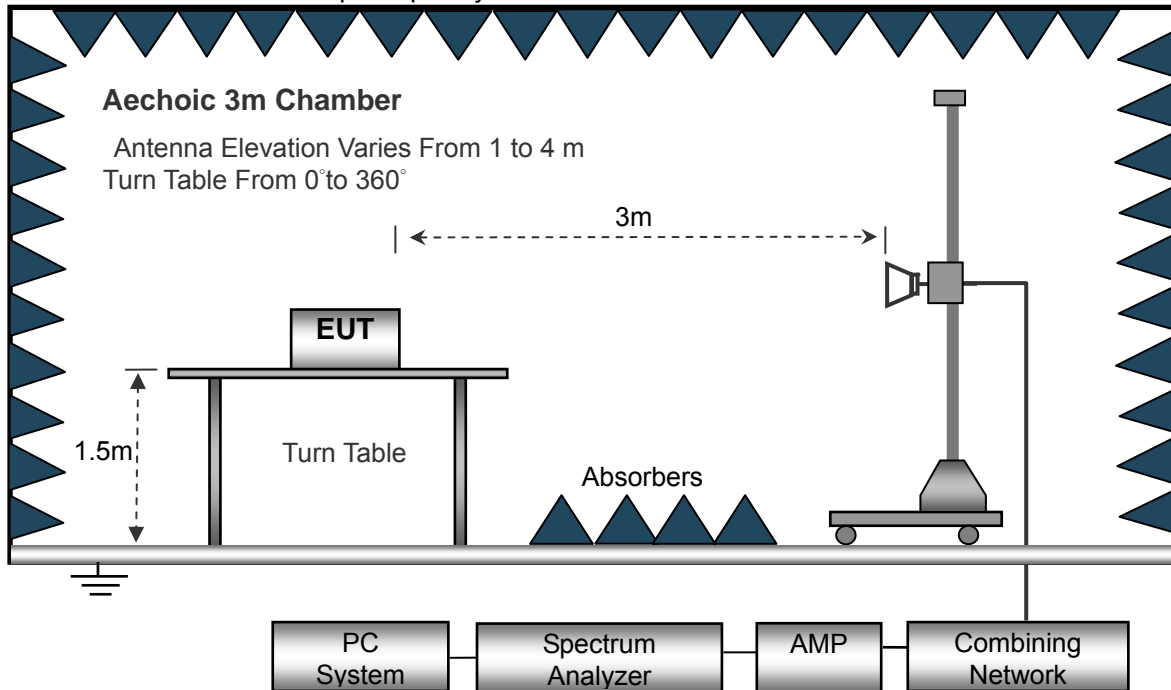

**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		
With Adapter1 (Model No: GKYP50100050UL1)			

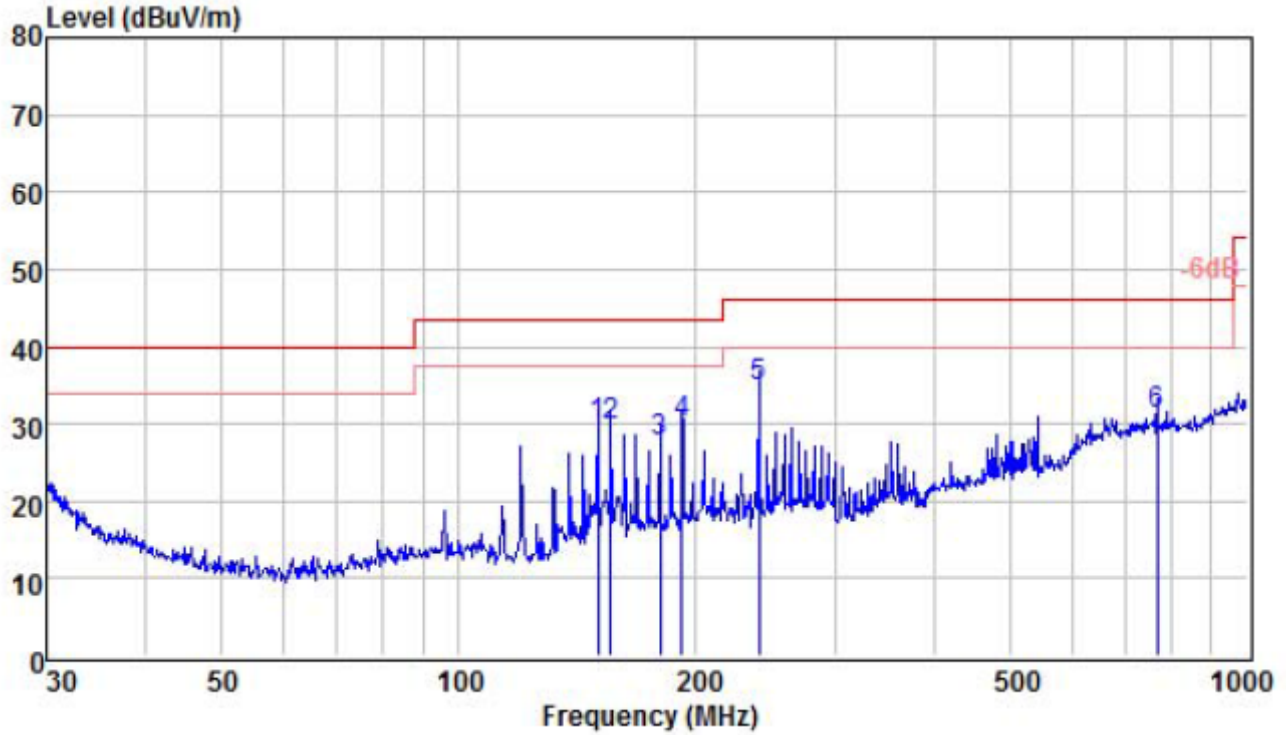

	ReadAntenna	Cable	Limit	Over			
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	150.01	19.86	9.00	0.82	29.68	43.50	-13.82 QP
2	155.91	19.64	9.20	0.83	29.67	43.50	-13.83 QP
3	180.02	16.36	10.40	0.85	27.61	43.50	-15.89 QP
4	191.75	18.54	10.55	0.86	29.95	43.50	-13.55 QP
5	239.99	21.20	12.72	0.96	34.88	46.00	-11.12 QP
6	768.75	6.68	22.73	1.78	31.19	46.00	-14.81 QP

Remark:


Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;





Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		
With Adapter1 (Model No: GKYP50100050UL1)			

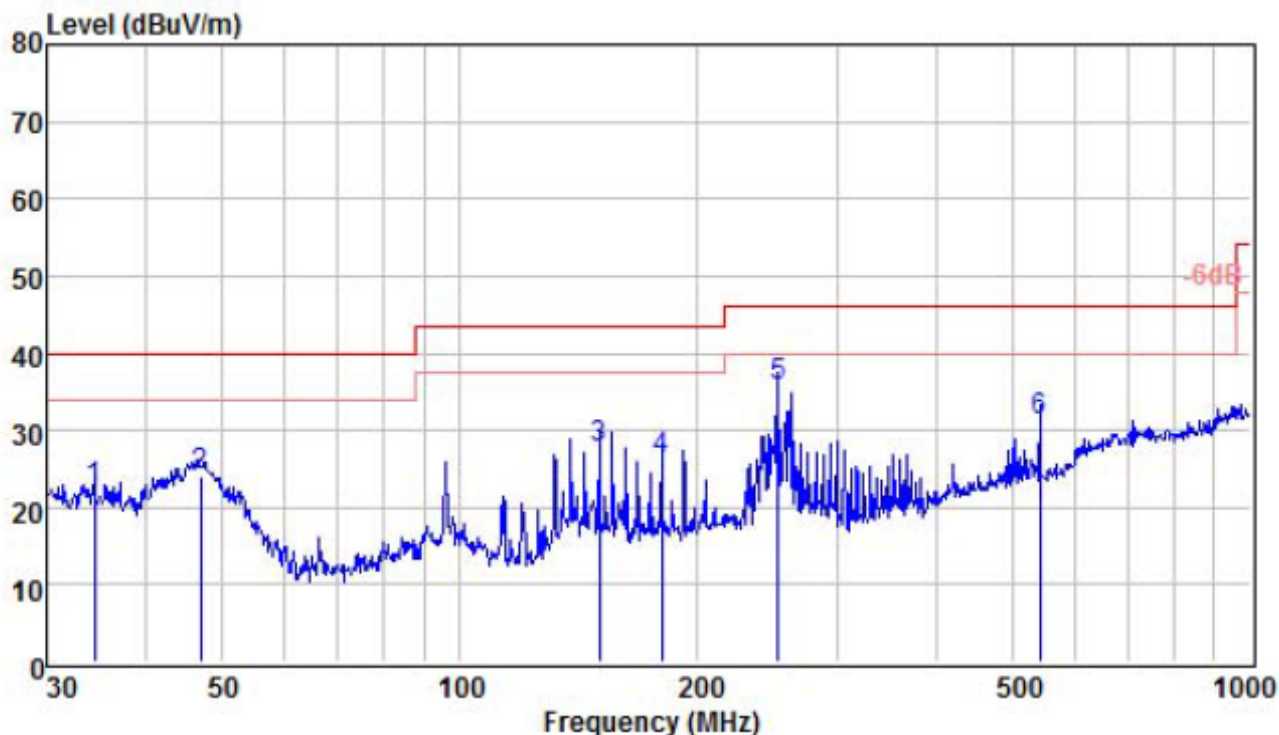

	ReadAntenna	Cable	Limit	Over			
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	34.52	5.79	16.13	0.36	22.28	40.00	-17.72 QP
2	46.99	13.89	10.03	0.27	24.19	40.00	-15.81 QP
3	150.01	17.94	9.00	0.82	27.76	43.50	-15.74 QP
4	180.02	15.04	10.40	0.85	26.29	43.50	-17.21 QP
5	252.95	21.72	12.91	0.99	35.62	46.00	-10.38 QP
6	541.37	10.37	19.40	1.56	31.33	46.00	-14.67 QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		
With Adapter2 (Model No: THX-050100Kv)			

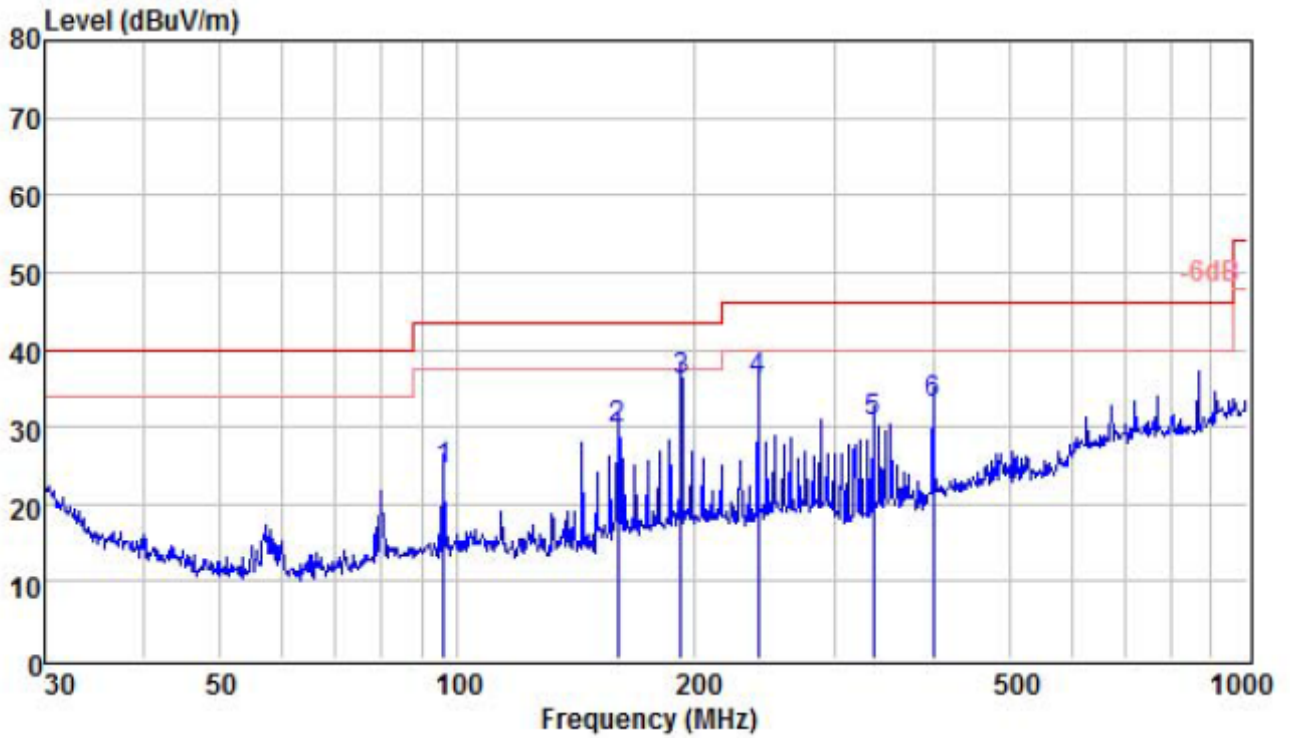

	ReadAntenna	Cable	Limit	Over			
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	96.10	14.03	9.60	0.74	24.37	43.50	-19.13 QP
2	159.78	19.69	9.20	0.83	29.72	43.50	-13.78 QP
3	191.75	24.60	10.55	0.86	36.01	43.50	-7.49 QP
4	239.99	22.17	12.72	0.96	35.85	46.00	-10.15 QP
5	336.04	14.48	15.00	1.17	30.65	46.00	-15.35 QP
6	400.43	15.38	16.30	1.32	33.00	46.00	-13.00 QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		
With Adapter2 (Model No: THX-050100Kv)			

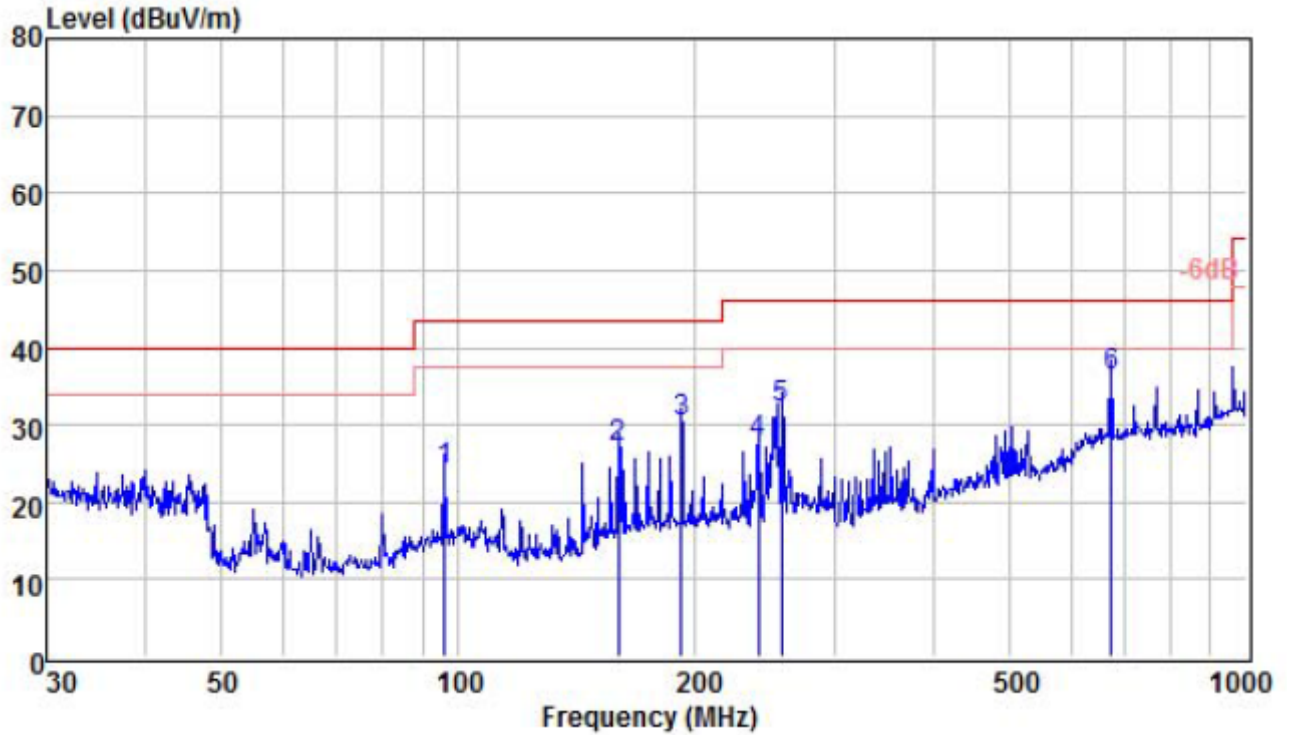

	ReadAntenna	Cable	Limit	Over				
Freq	Level	Factor	Loss	Level	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB		
1	96.10	13.91	9.40	0.74	24.05	43.50	-19.45	QP
2	159.78	16.91	9.20	0.83	26.94	43.50	-16.56	QP
3	191.75	19.13	10.26	0.86	30.25	43.50	-13.25	QP
4	239.99	14.12	12.62	0.96	27.70	46.00	-18.30	QP
5	257.42	18.26	12.93	1.00	32.19	46.00	-13.81	QP
6	672.84	12.73	21.95	1.71	36.39	46.00	-9.61	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		
With Adapter3 (Model No: QH013Z-0501000GA2)			

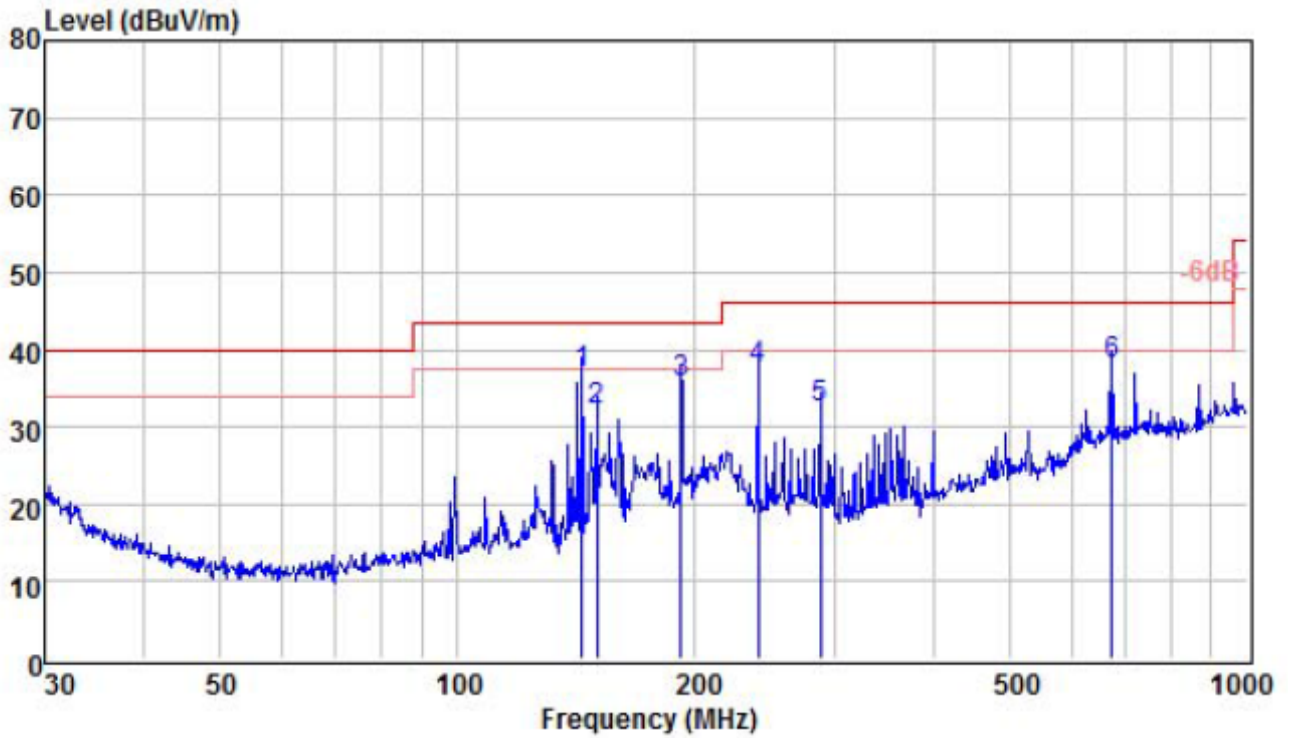

	Read	Antenna	Cable	Limit	Over		
Freq	Level	Factor	Loss	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	143.83	27.46	8.70	0.82	36.98	43.50	-6.52 QP
2	150.01	22.15	9.00	0.82	31.97	43.50	-11.53 QP
3	191.75	24.23	10.55	0.86	35.64	43.50	-7.86 QP
4	239.99	23.89	12.72	0.96	37.57	46.00	-8.43 QP
5	287.99	18.01	13.40	1.06	32.47	46.00	-13.53 QP
6	672.84	14.38	21.88	1.71	37.97	46.00	-8.03 QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		
With Adapter3 (Model No: QH013Z-0501000GA2)			

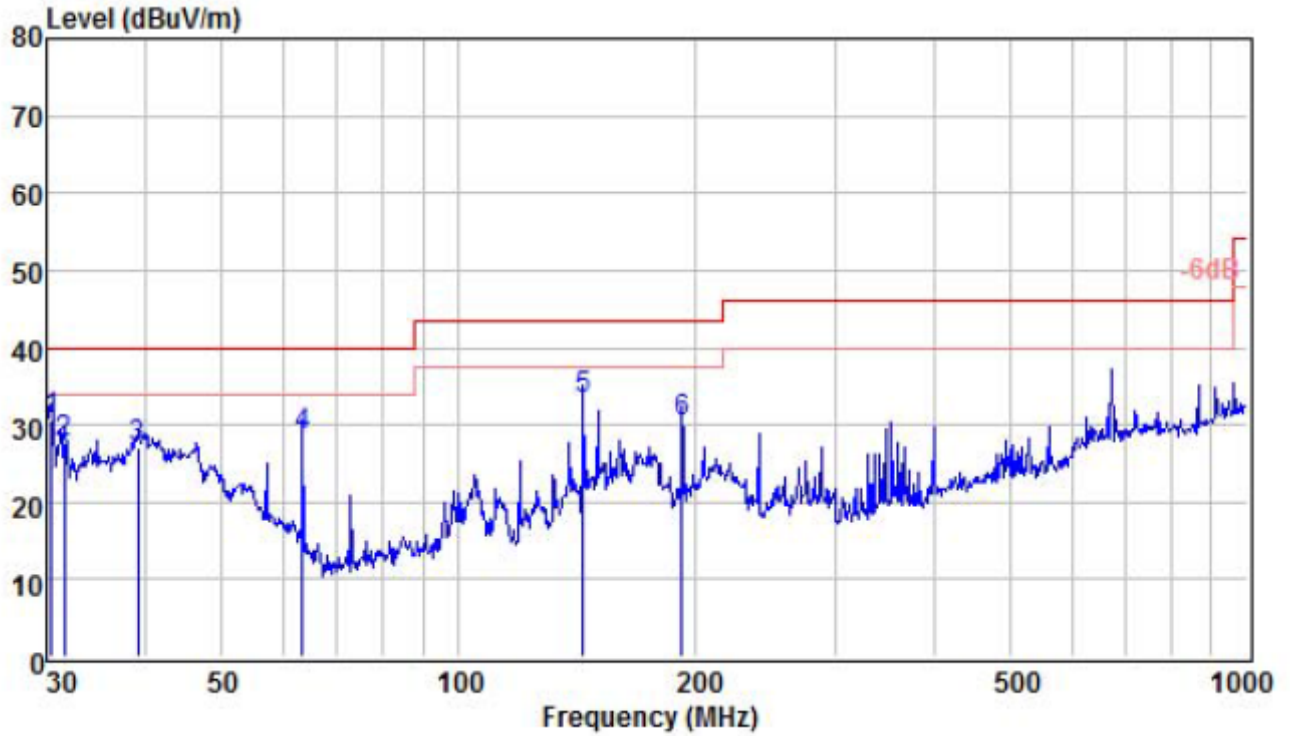

	Read	Antenna	Cable	Limit	Over		
Freq	Level	Factor	Loss	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	30.42	11.78	18.55	0.44	30.77	40.00	-9.23 QP
2	31.62	9.33	17.84	0.42	27.59	40.00	-12.41 QP
3	39.16	13.34	13.39	0.27	27.00	40.00	-13.00 QP
4	63.31	20.94	7.37	0.31	28.62	40.00	-11.38 QP
5	143.83	23.79	8.63	0.82	33.24	43.50	-10.26 QP
6	191.75	19.31	10.26	0.86	30.43	43.50	-13.07 QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

GFSK Worst Case

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	4804.00	53.64	30.55	5.77	24.66	53.52	74.00	-20.48	PK
V	4804.00	42.18	30.55	5.77	24.66	42.06	54.00	-11.94	AV
V	7206.00	53.61	30.33	6.32	24.55	54.15	74.00	-19.85	PK
V	7206.00	42.17	30.33	6.32	24.55	42.71	54.00	-11.29	AV
V	16132.00	48.97	51.56	11.36	41.57	50.34	74.00	-23.66	PK
H	4804.00	53.62	30.55	5.77	24.66	53.5	74.00	-20.5	PK
H	4804.00	45.62	30.55	5.77	24.66	45.5	54.00	-8.5	AV
H	7206.00	54.16	30.33	6.32	24.55	54.7	74.00	-19.3	PK
H	7206.00	43.61	30.33	6.32	24.55	44.15	54.00	-9.85	AV
H	16132.00	48.93	51.56	11.36	41.57	50.30	74.00	-23.70	PK
<b>operation frequency:2441</b>									
V	4882.00	52.63	30.55	5.77	24.66	52.51	74.00	-21.49	PK
V	4882.00	41.26	30.55	5.77	24.66	41.14	54.00	-12.86	AV
V	7323.00	53.62	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7323.00	42.51	30.33	6.32	24.55	43.05	54.00	-10.95	AV
V	16132.00	48.80	51.56	11.36	41.57	50.17	74.00	-23.83	PK
H	4882.00	52.16	30.55	5.77	24.66	52.04	74.00	-21.96	PK
H	4882.00	42.31	30.55	5.77	24.66	42.19	54.00	-11.81	AV
H	7323.00	51.27	30.33	6.32	24.55	51.81	74.00	-22.19	PK
H	7323.00	42.63	30.33	6.32	24.55	43.17	54.00	-10.83	AV
H	16132.00	48.76	51.56	11.36	41.57	50.13	74.00	-23.87	PK
<b>operation frequency:2480</b>									
V	4960.00	53.62	30.55	5.77	24.66	53.5	74.00	-20.5	PK
V	4960.00	43.62	30.55	5.77	24.66	43.5	54.00	-10.5	AV
V	7440.00	51.24	30.33	6.32	24.55	51.78	74.00	-22.22	PK
V	7440.00	41.56	30.33	6.32	24.55	42.1	54.00	-11.9	AV
V	16132.00	49.16	51.56	11.36	41.57	50.53	74.00	-23.47	PK
H	4960.00	51.43	30.55	5.77	24.66	51.31	74.00	-22.69	PK
H	4960.00	43.62	30.55	5.77	24.66	43.5	54.00	-10.5	AV
H	7440.00	54.21	30.33	6.32	24.55	54.75	74.00	-19.25	PK
H	7440.00	43.62	30.33	6.32	24.55	44.16	54.00	-9.84	AV
H	16132.00	49.12	51.56	11.36	41.57	50.49	74.00	-23.51	PK

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**3.3 RADIATED BAND EMISSION MEASUREMENT****3.3.1 TEST REQUIREMENT:**

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

**3.3.2 TEST PROCEDURE**

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

**3.3.3 DEVIATION FROM TEST STANDARD**

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

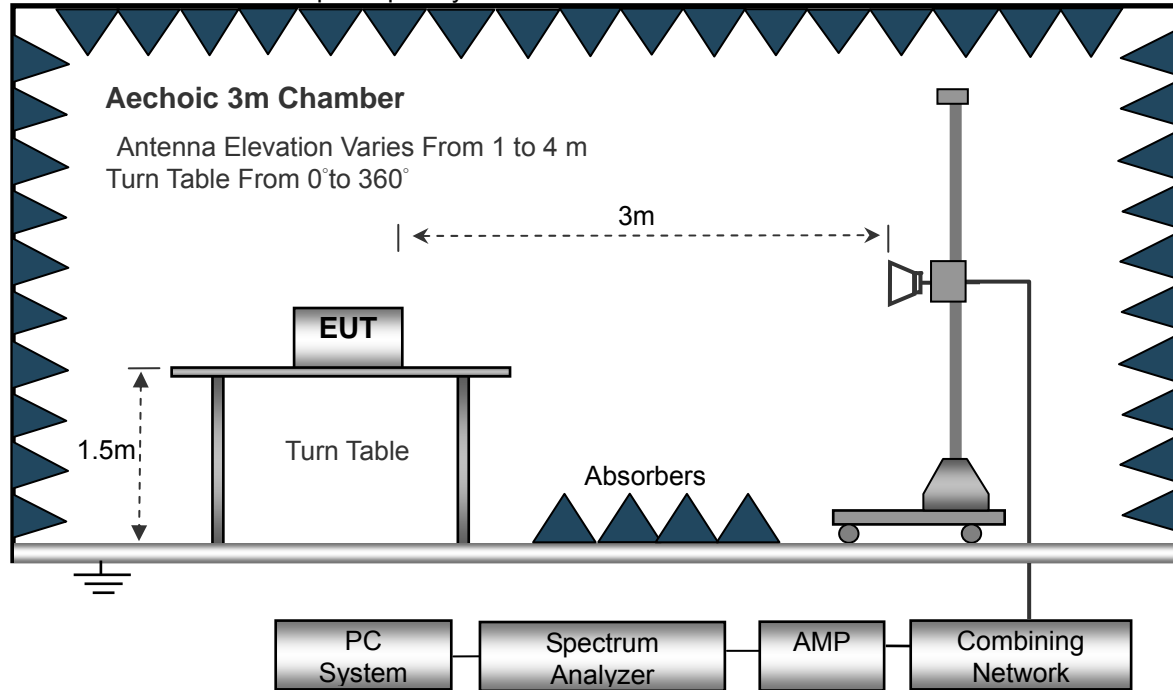

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



**3.3.6 TEST RESULT**

PASS

Remark: All modes of GFSK,  $\pi/4$  DQPSK, 8DPSK were tested, only the worst result of GFSK was reported as below.

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	2390.00	58.36	30.22	4.85	23.98	56.97	74.00	-17.03	PK
V	2390.00	50.41	30.22	4.85	23.98	49.02	54.00	-4.98	AV
V	2400.00	60.35	30.22	4.85	23.98	58.96	74.00	-15.04	PK
V	2400.00	51.24	30.22	4.85	23.98	49.85	54.00	-4.15	AV
H	2390.00	60.35	30.22	4.85	23.98	58.96	74.00	-15.04	PK
H	2390.00	49.16	30.22	4.85	23.98	47.77	54.00	-6.23	AV
H	2400.00	61.53	30.22	4.85	23.98	60.14	74.00	-13.86	PK
H	2400.00	52.16	30.22	4.85	23.98	50.77	54.00	-3.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2480</b>									
V	2483.50	58.19	30.22	4.85	23.98	56.80	74.00	-17.20	PK
V	2483.50	52.16	30.22	4.85	23.98	50.77	54.00	-3.23	AV
V	2500.00	62.35	30.22	4.85	23.98	60.96	74.00	-13.04	PK
V	2500.00	51.88	30.22	4.85	23.98	50.49	54.00	-3.51	AV
H	2483.50	59.36	30.22	4.85	23.98	57.97	74.00	-16.03	PK
H	2483.50	52.14	30.22	4.85	23.98	50.75	54.00	-3.25	AV
H	2500.00	62.36	30.22	4.85	23.98	60.97	74.00	-13.03	PK
H	2500.00	51.42	30.22	4.85	23.98	50.03	54.00	-3.97	AV

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



#### 4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

##### 4.1 LIMIT

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

##### 4.1.1 TEST SETUP



##### 4.1.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

##### 4.1.3 DEVIATION FROM STANDARD

No deviation.




### 4.1.4 TEST RESULT

Remark: Spurious Emission all modes of GFSK,  $\pi/4$  DQPSK, 8DPSK were tested, only the worst result of GFSK was reported as below:


GFSK mode:




CH:2402MHz

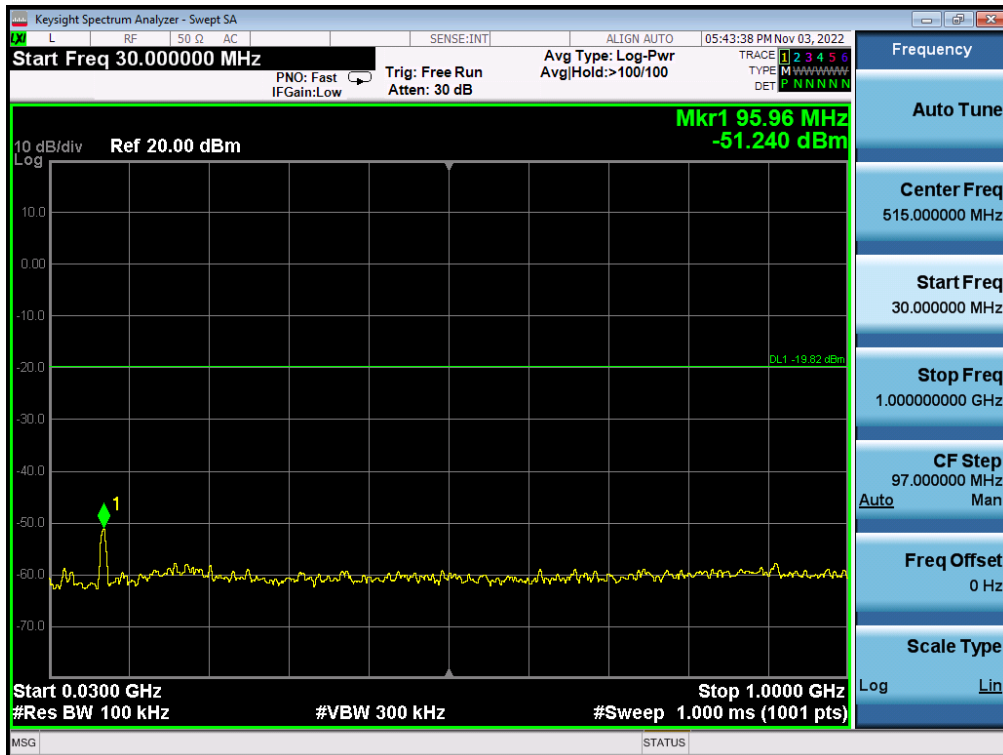


30MHz-1GHz

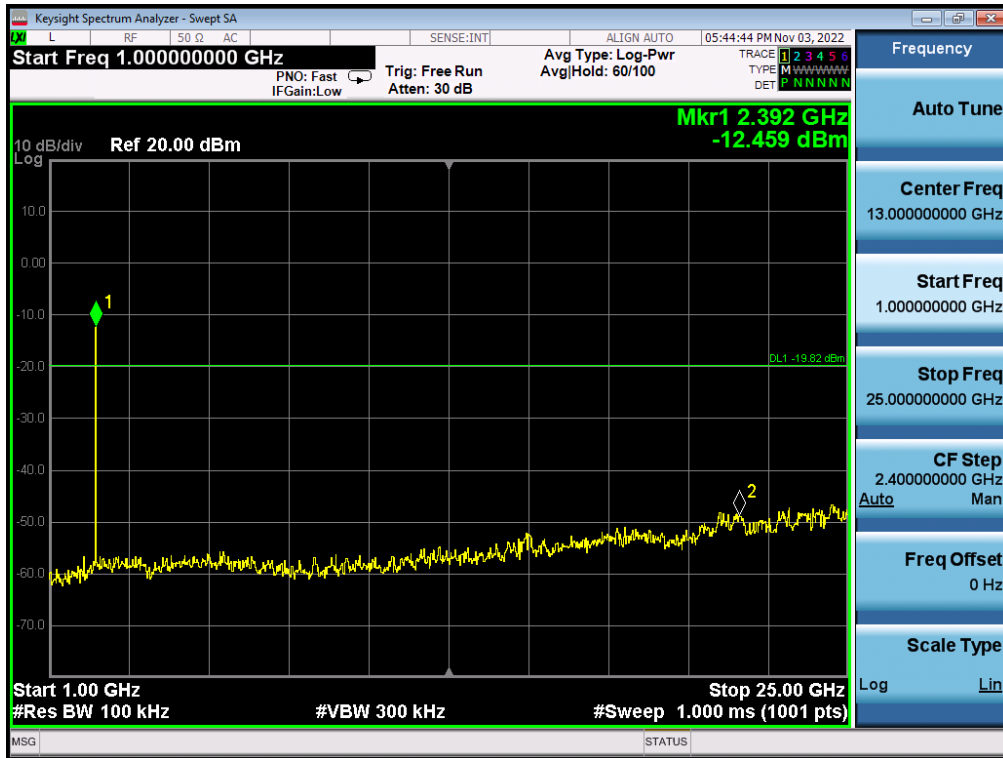


1GHz-25GHz

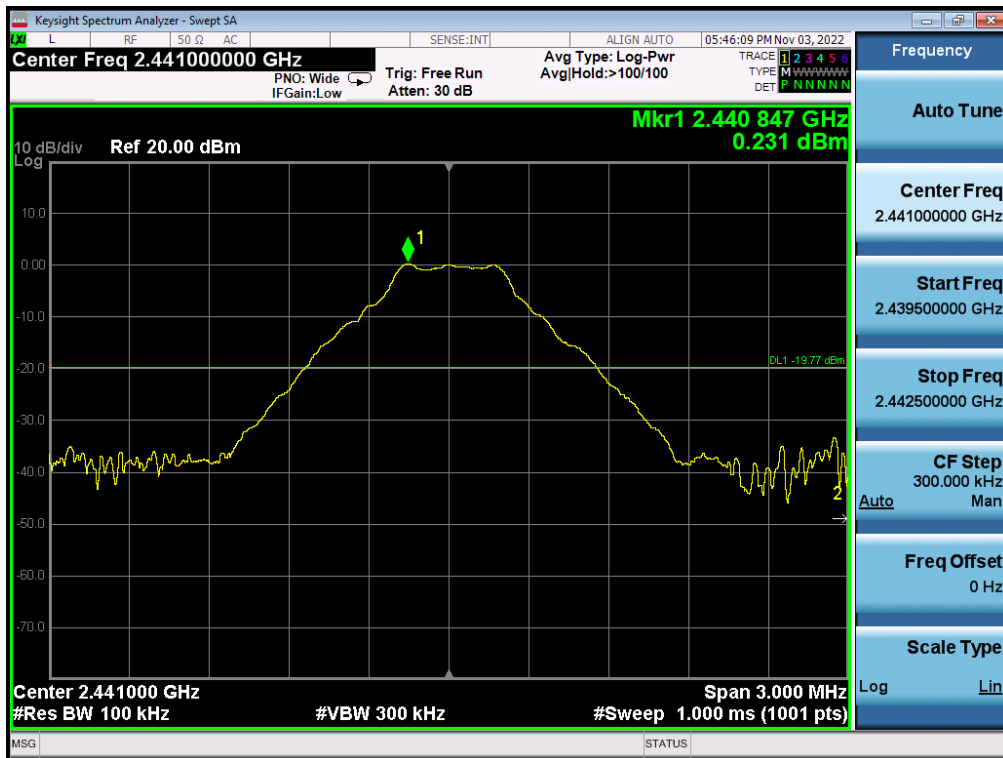

CH:2441MHz

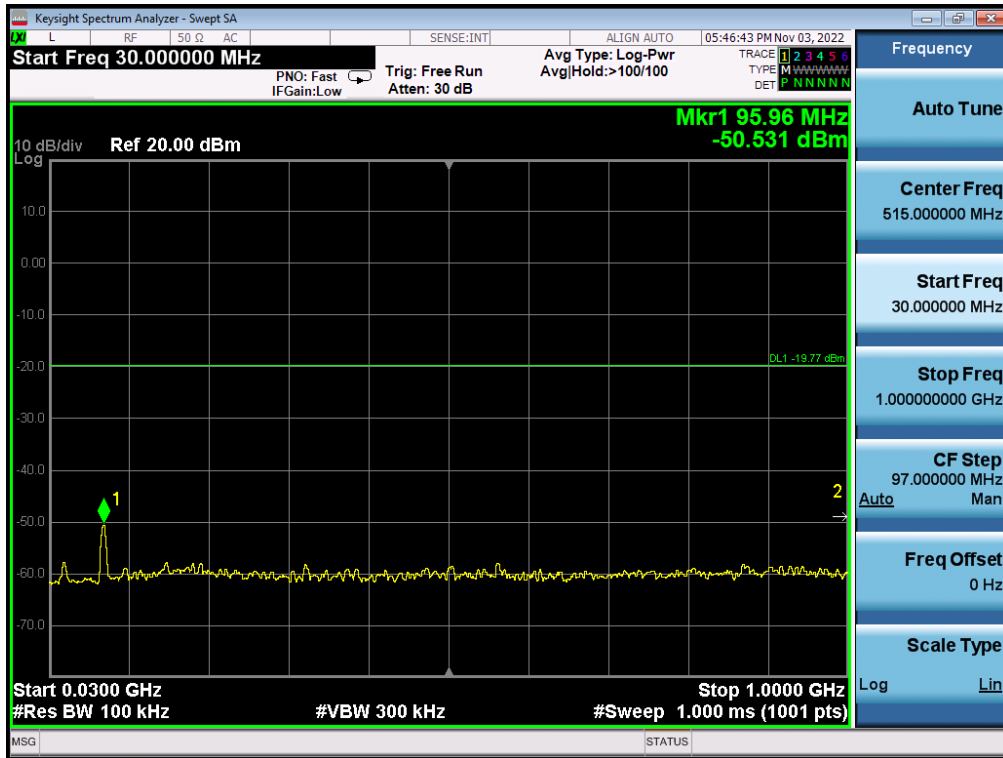


30MHz-1GHz

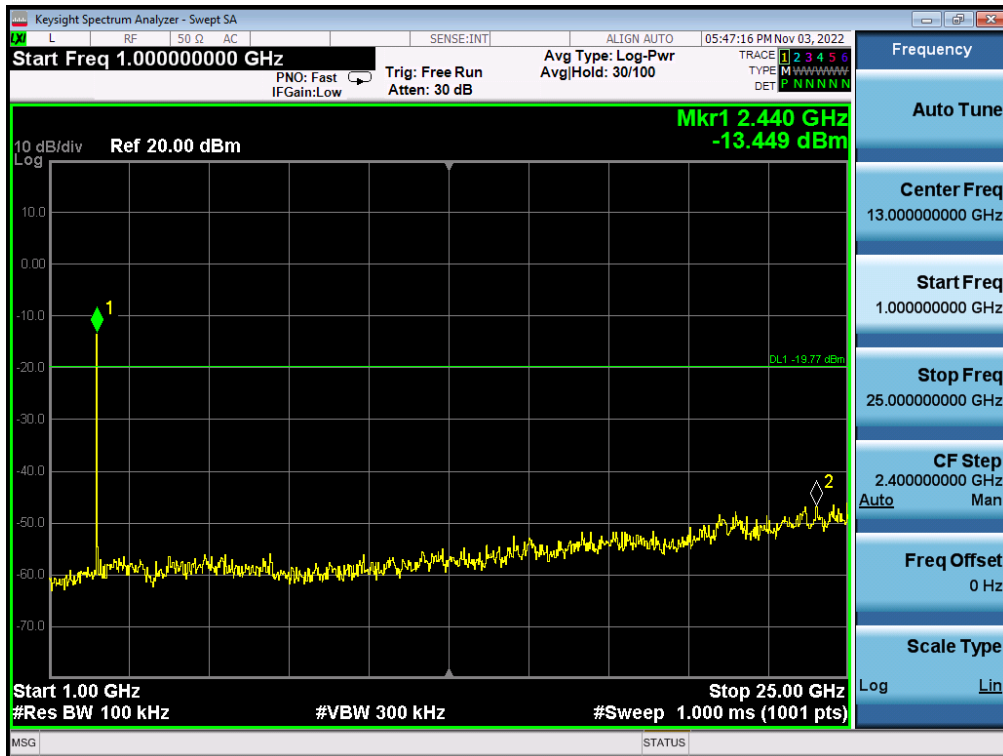

1GHz-25GHz



CH:2480MHz

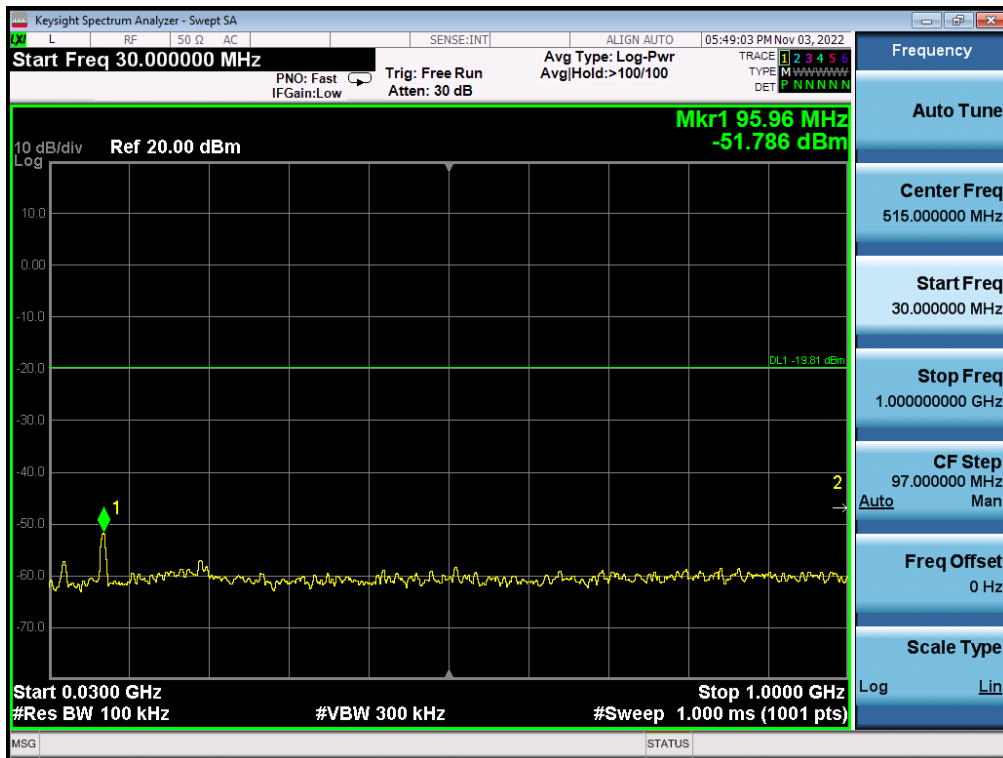

30MHz-1GHz




1GHz-25GHz

Conducted band edge


Test result

Pass

Modulation		Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
GFSK	Non-hopping	Left Band	50.433	20	Pass
		Right Band	57.702	20	Pass
	hopping	Left Band	50.274	20	Pass
		Right Band	57.057	20	Pass
$\pi/4$ DQPSK	Non-hopping	Left Band	50.181	20	Pass
		Right Band	57.699	20	Pass
	hopping	Left Band	51.890	20	Pass
		Right Band	56.488	20	Pass
8DPSK	Non-hopping	Left Band	50.495	20	Pass
		Right Band	56.125	20	Pass
	hopping	Left Band	52.200	20	Pass
		Right Band	53.708	20	Pass

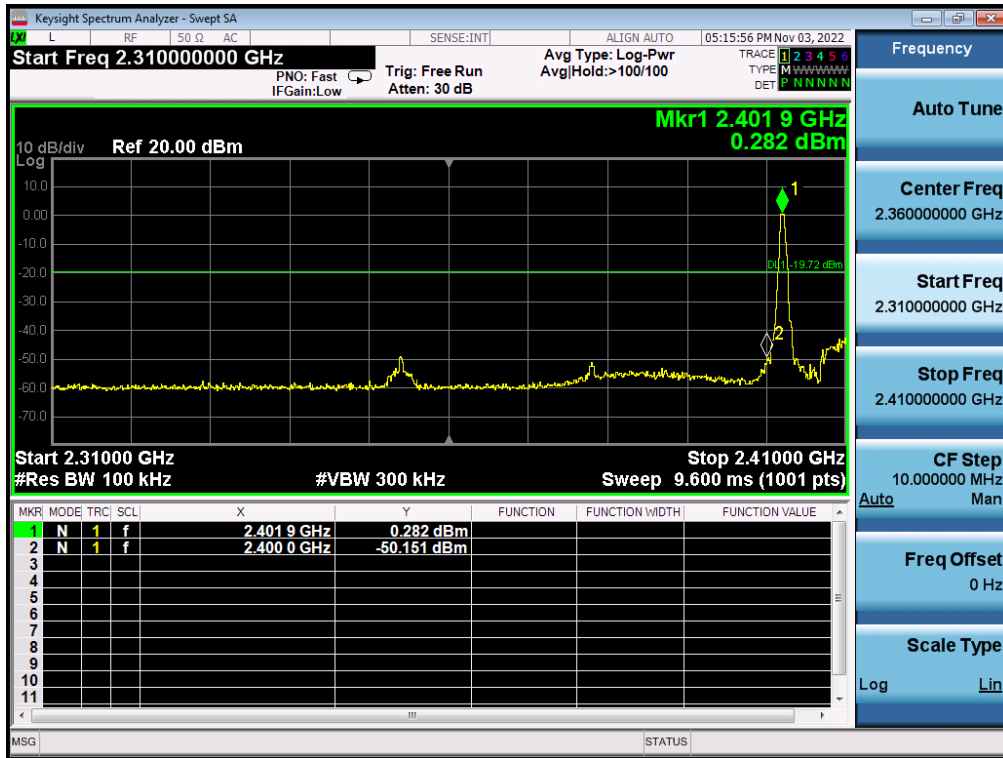


GFSK No-Hopping Band edge-left side

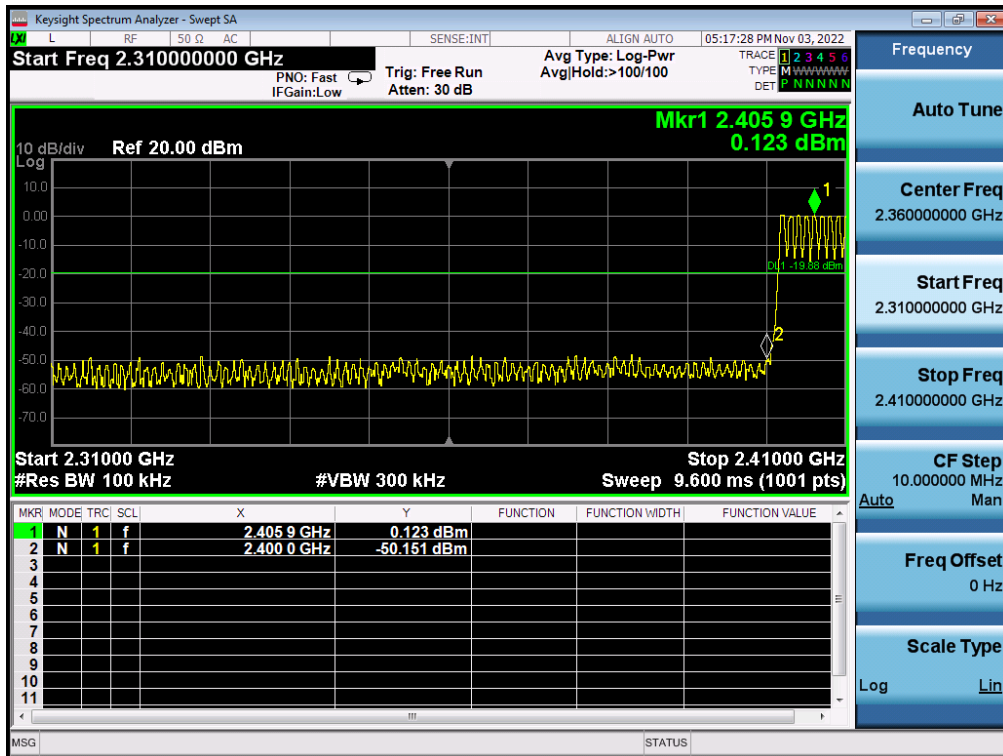


GFSK Hopping Band edge-left side




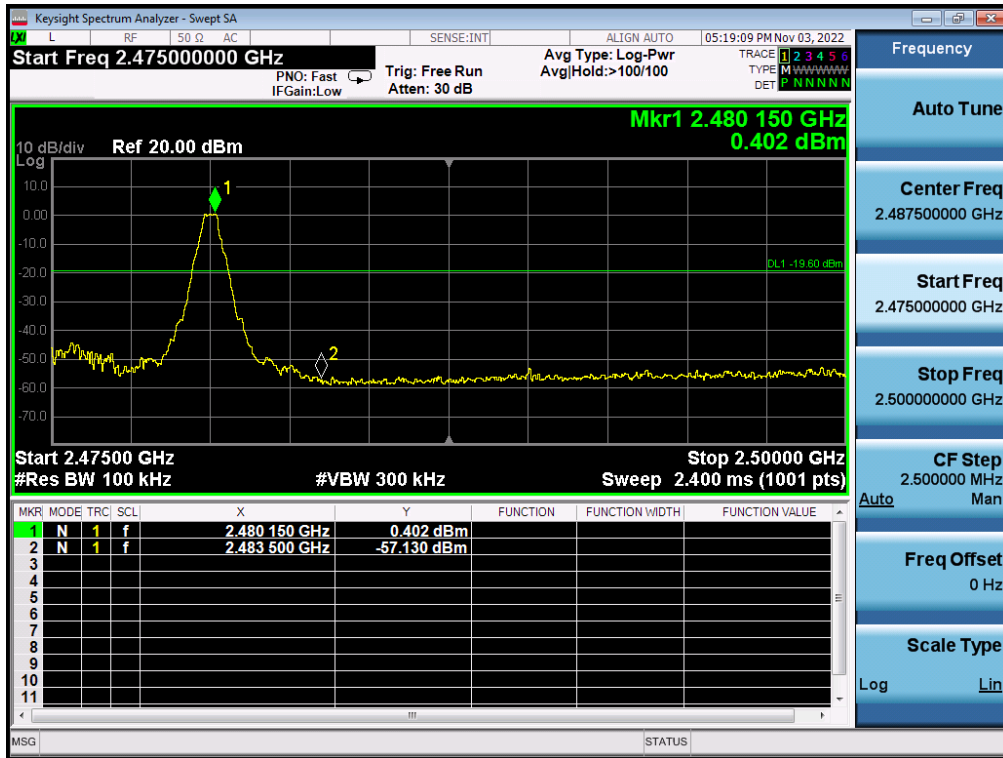


GFSK No-Hopping Band edge-Right side

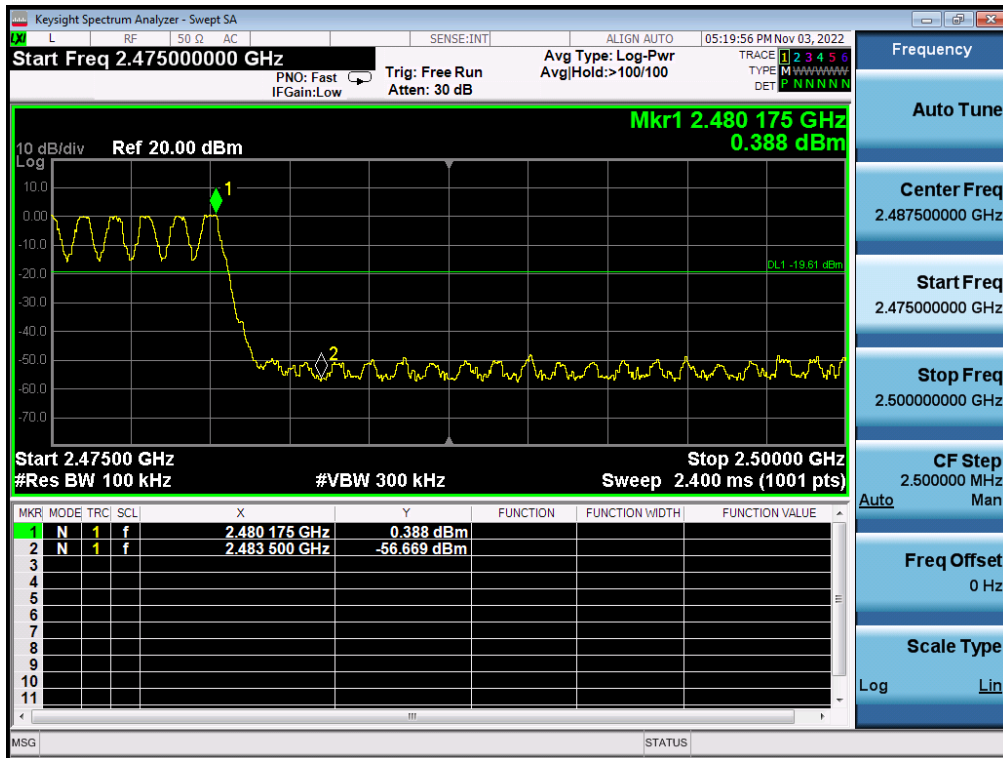


GFSK Hopping Band edge-Right side

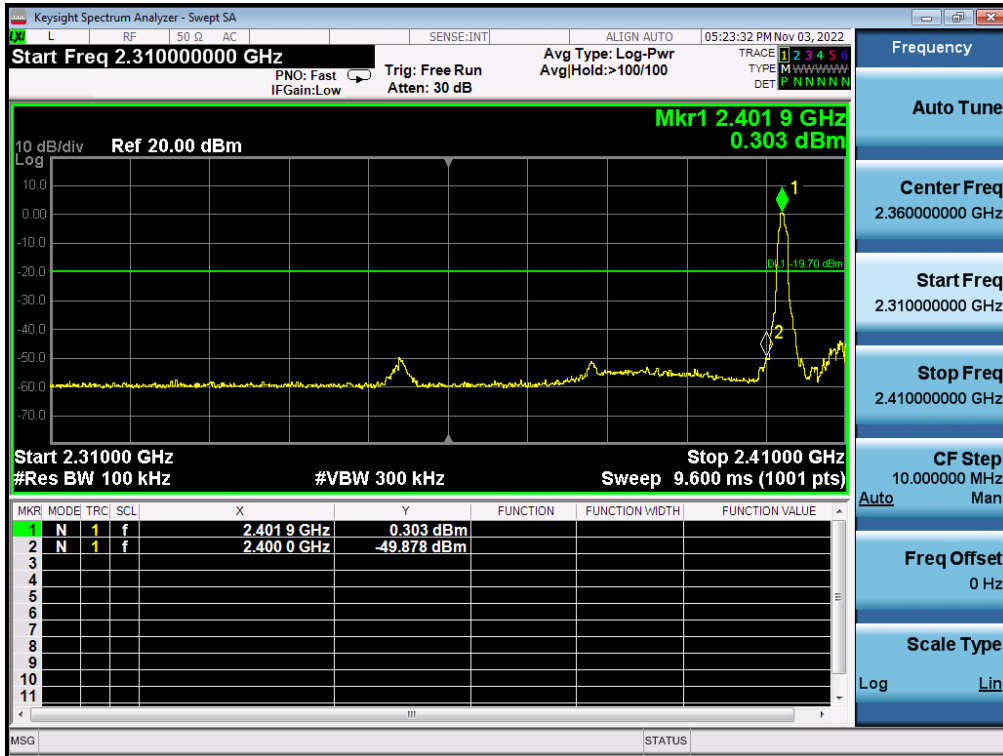


$\pi/4$ DQPSK No-Hopping Band edge-Left side

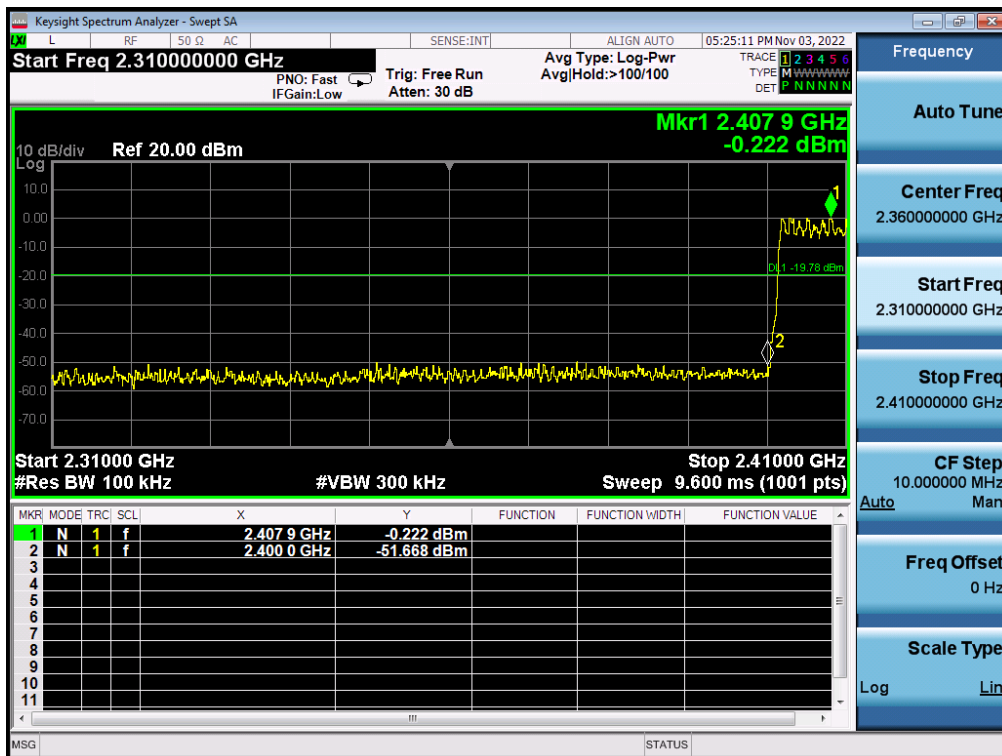


$\pi/4$ DQPSK Hopping Band edge-Left side

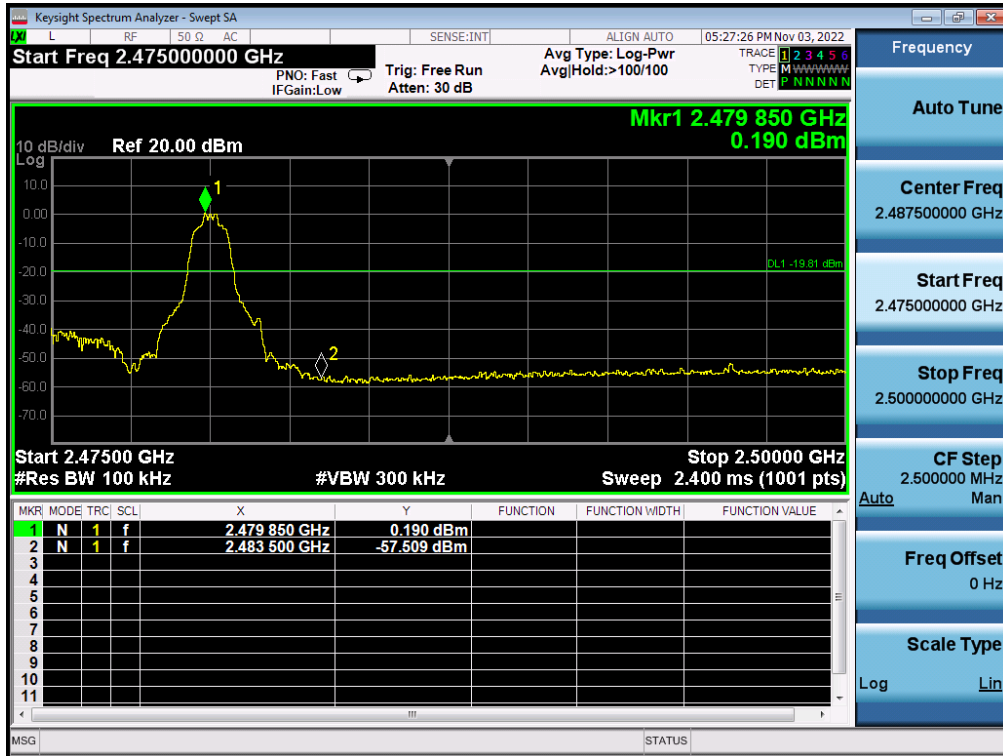


$\pi/4$ DQPSK No-Hopping Band edge-Right side

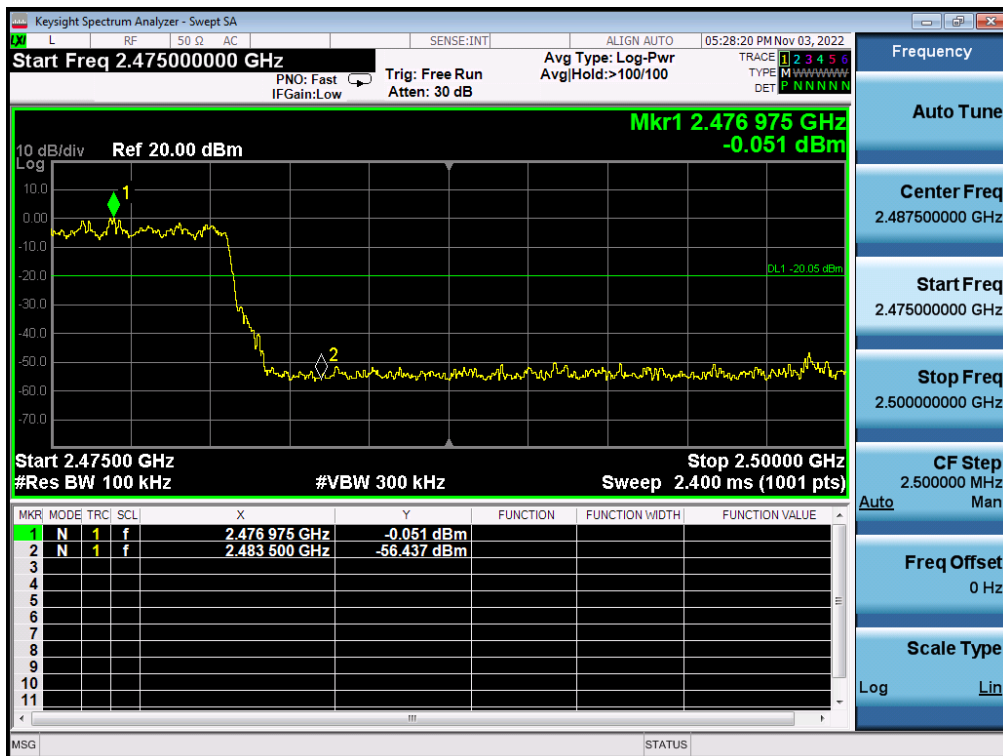


$\pi/4$ DQPSK Hopping Band edge-Right side

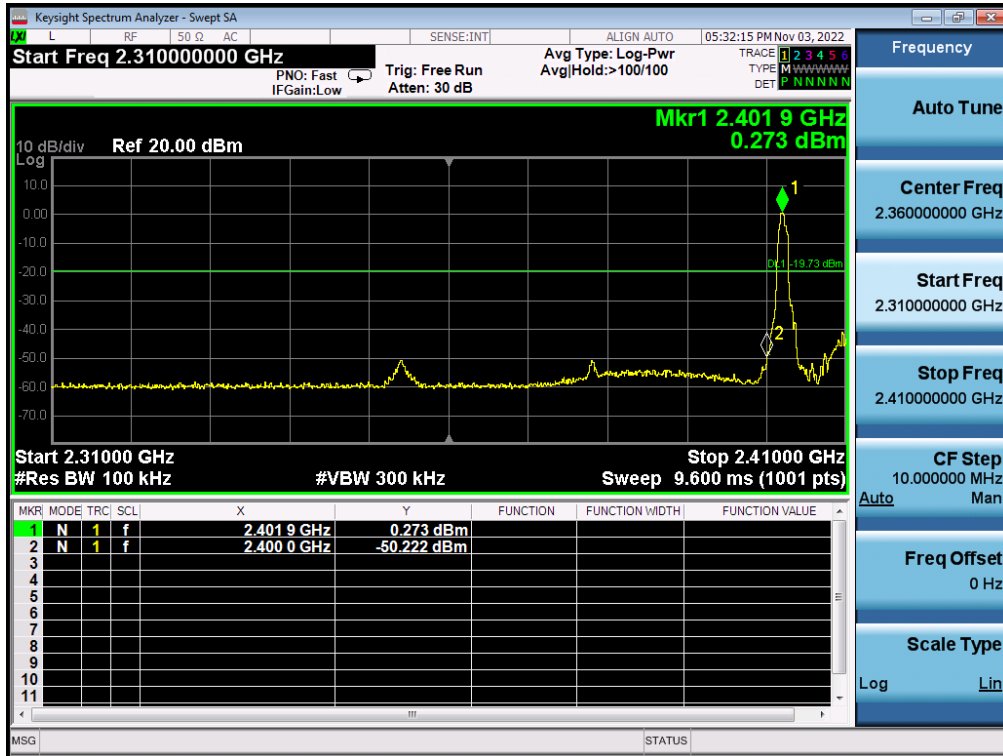


8DPSK No-Hopping Band edge-Left side

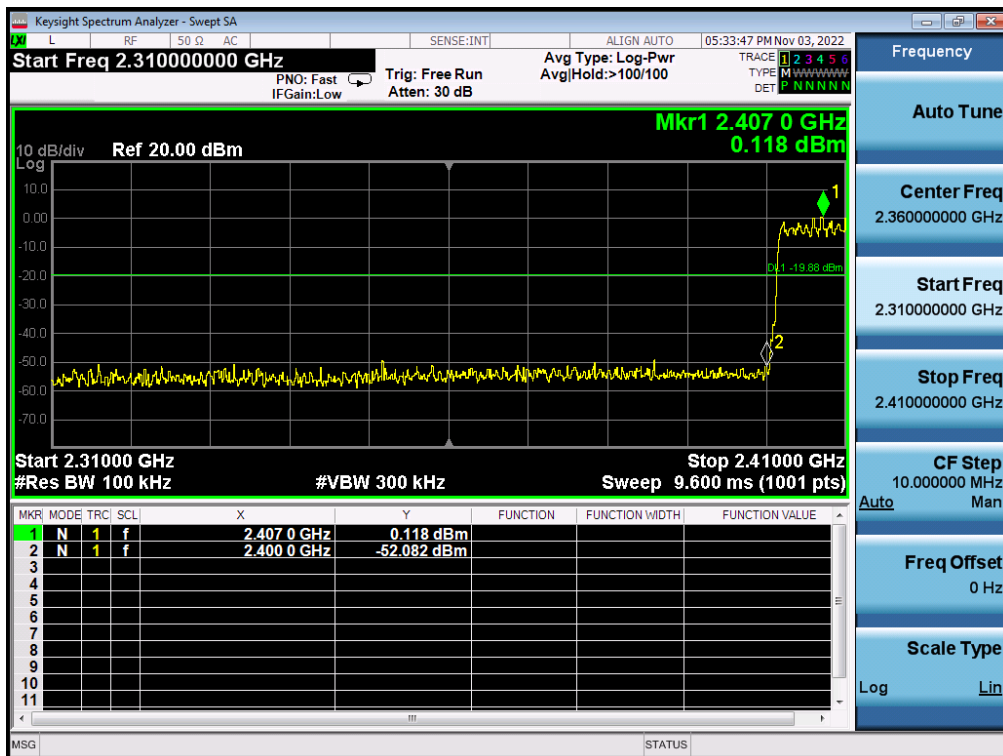

8DPSK Hopping Band edge-Left side

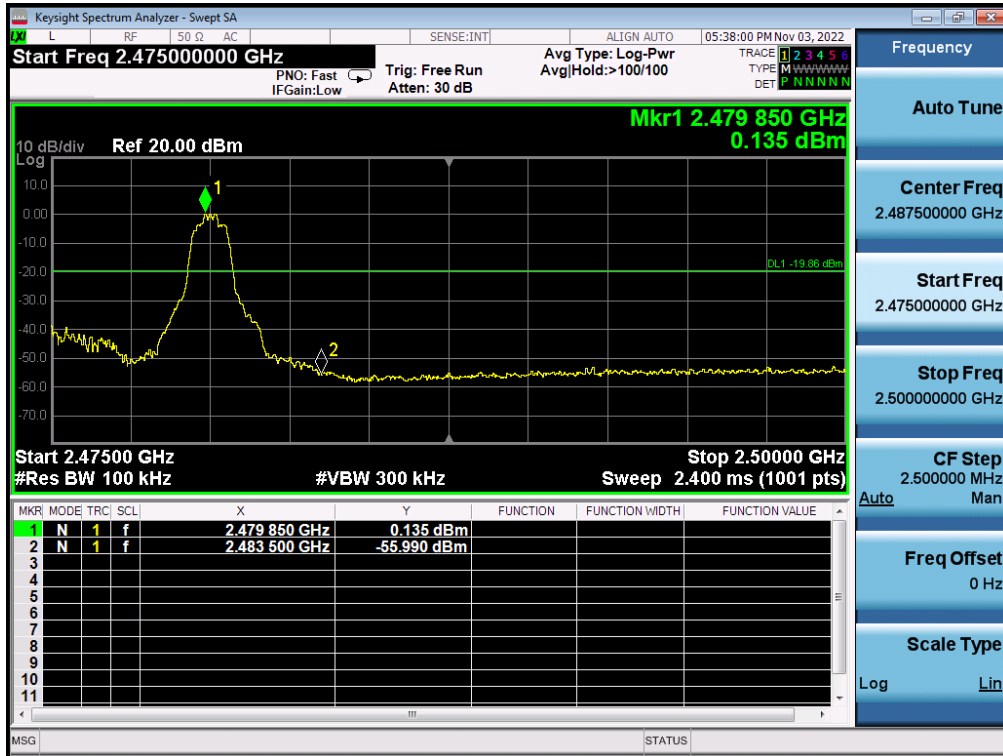

8DPSK No-Hopping Band edge-Right side

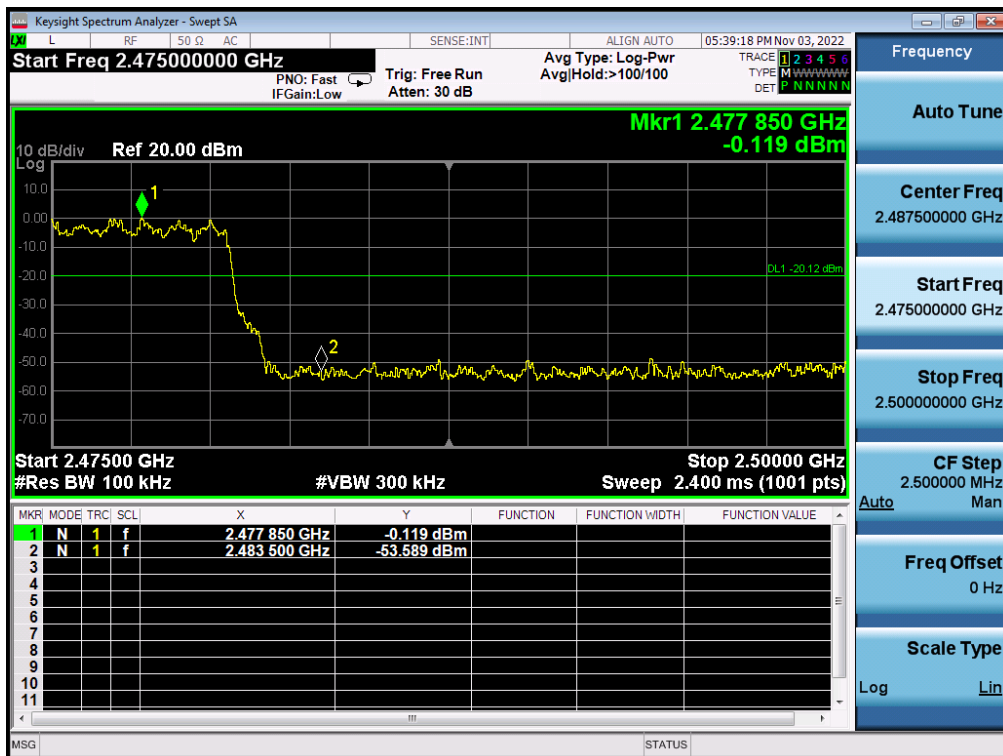

8DPSK Hopping Band edge-Right side



5. PEAK OUTPUT POWER

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	30Bm or 20.96dBm	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - VBW ≥ RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


**5.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)		

Mode	Test Channel	Peak Output Power (dBm)	LIMIT (dBm)
GFSK	CH00	0.445	20.96
	CH39	0.501	20.96
	CH78	0.490	20.96
$\pi/4$ DQPSK	CH00	1.189	20.96
	CH39	1.201	20.96
	CH78	1.203	20.96
8DPSK	CH00	1.163	20.96
	CH39	1.205	20.96
	CH78	1.199	20.96

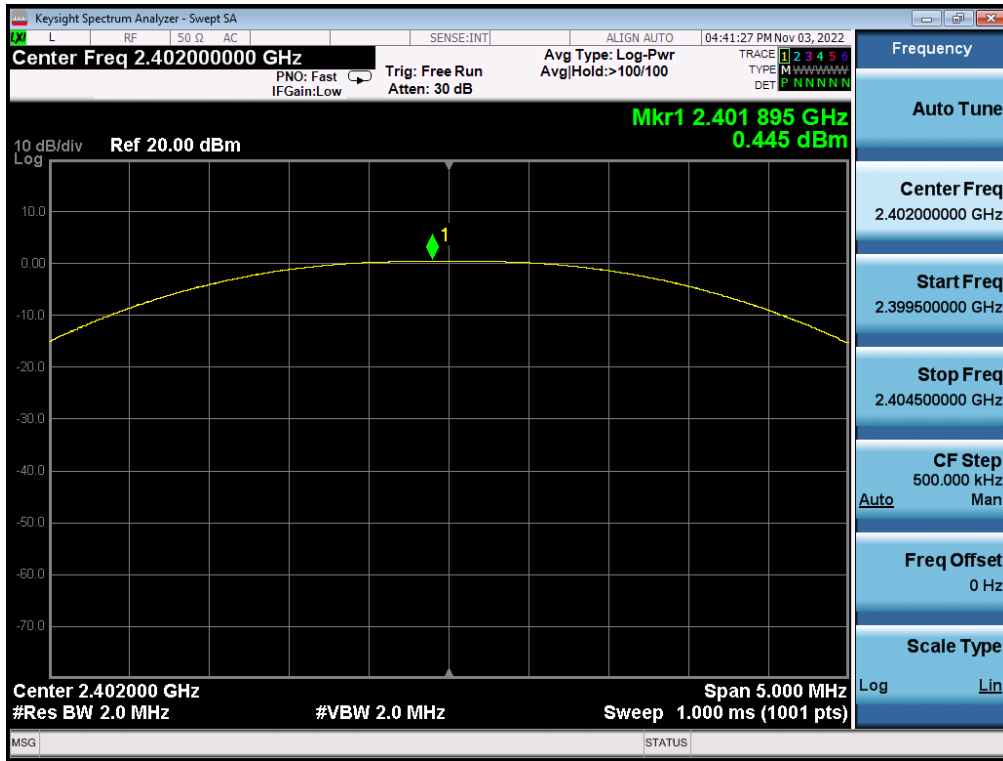


GFSK 2402MHz

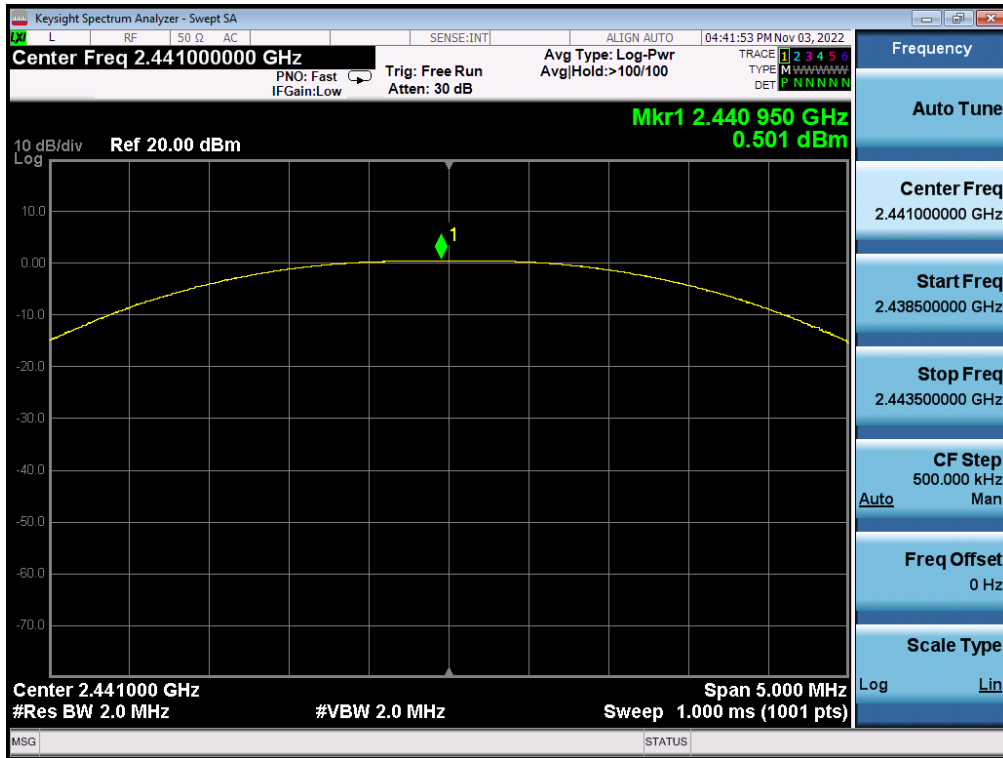


GFSK 2441MHz




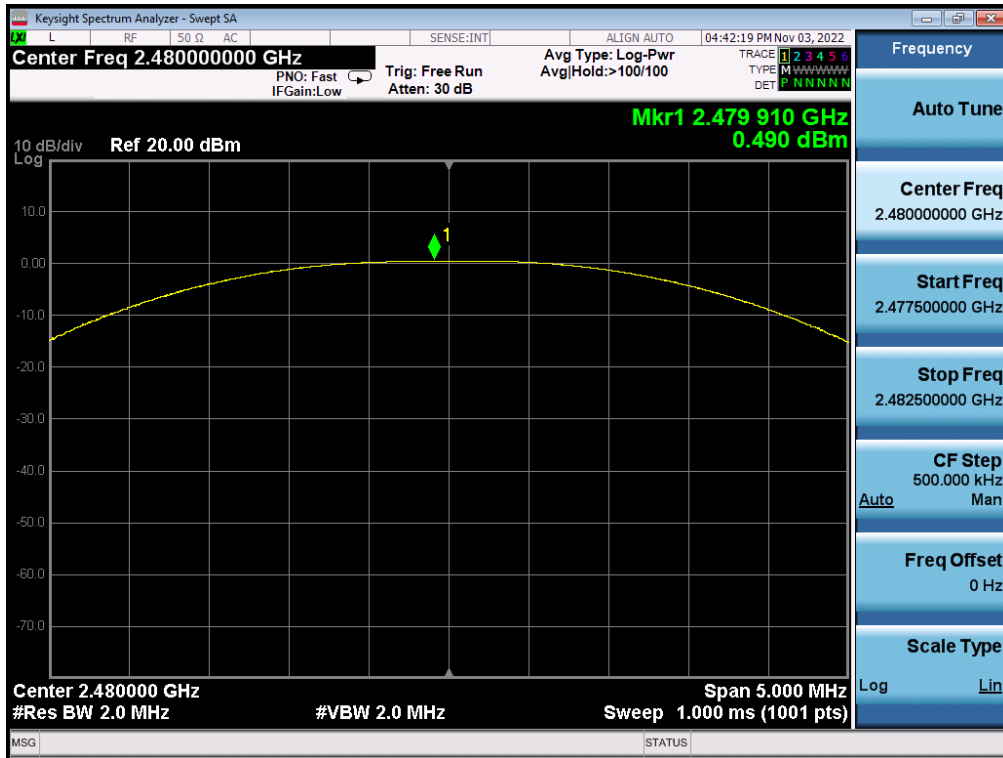


GFSK 2480MHz

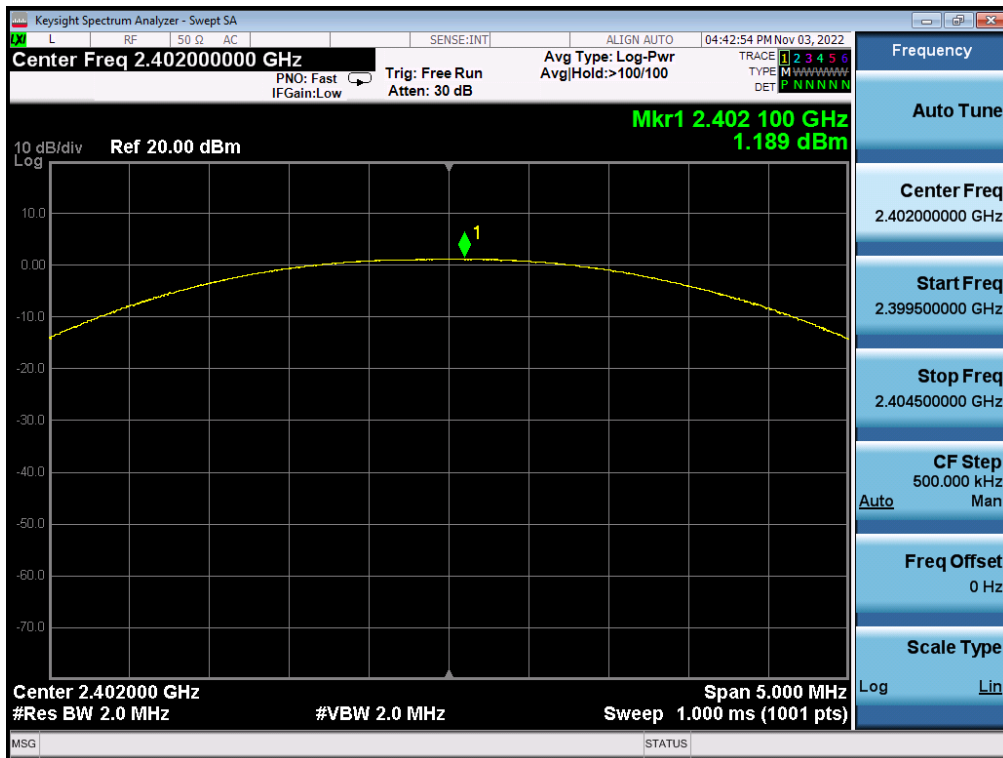


$\pi/4$  DQPSK 2402MHz

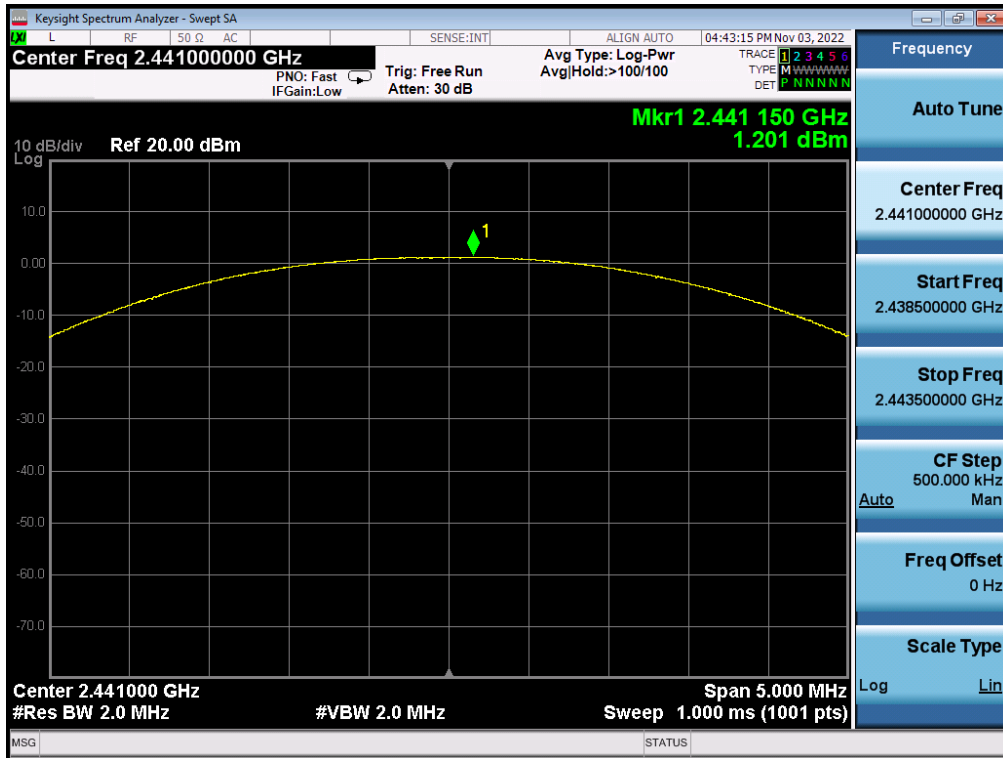


$\pi/4$  DQPSK 2441MHz

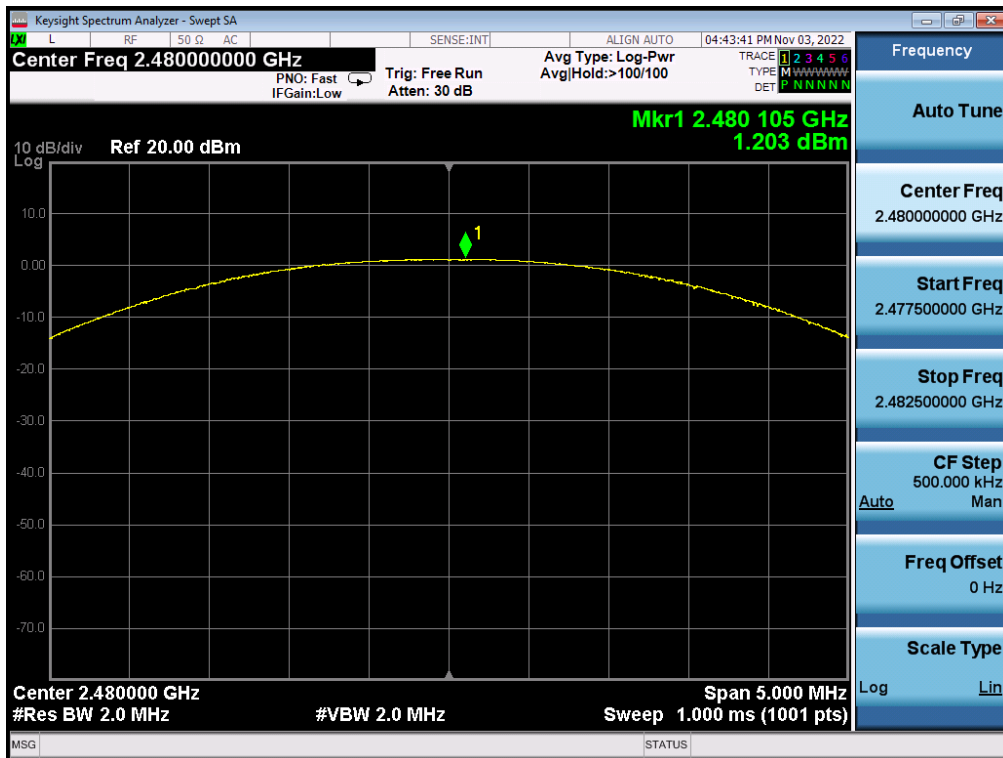


$\pi/4$  DQPSK 2480MHz

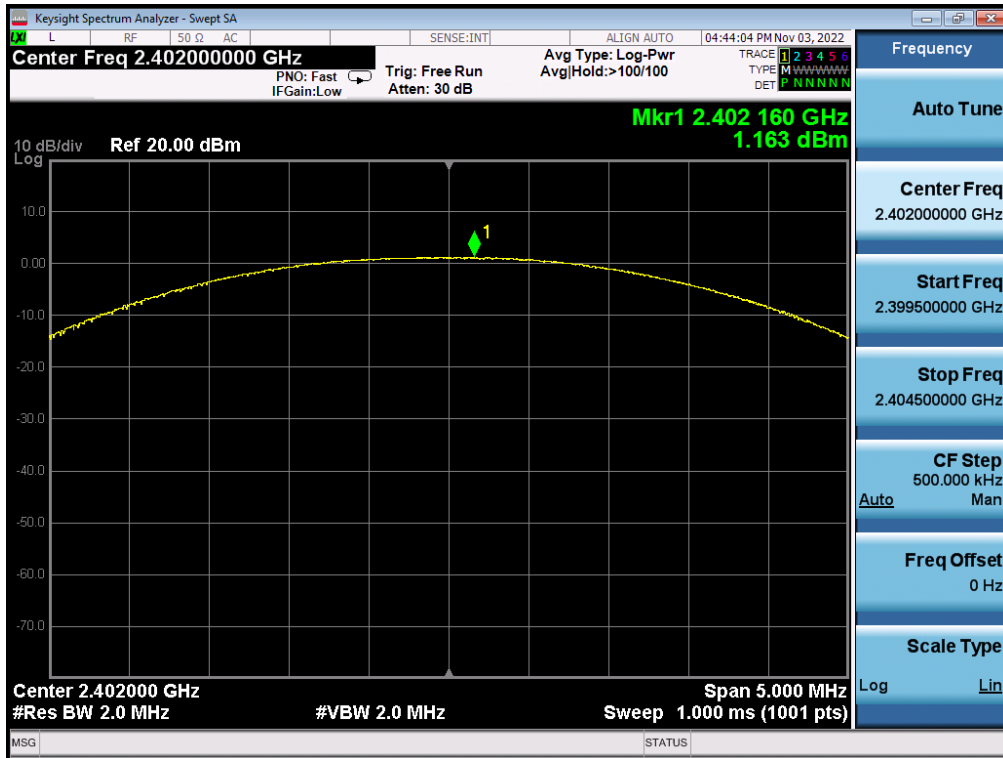

8DPSK 2402MHz

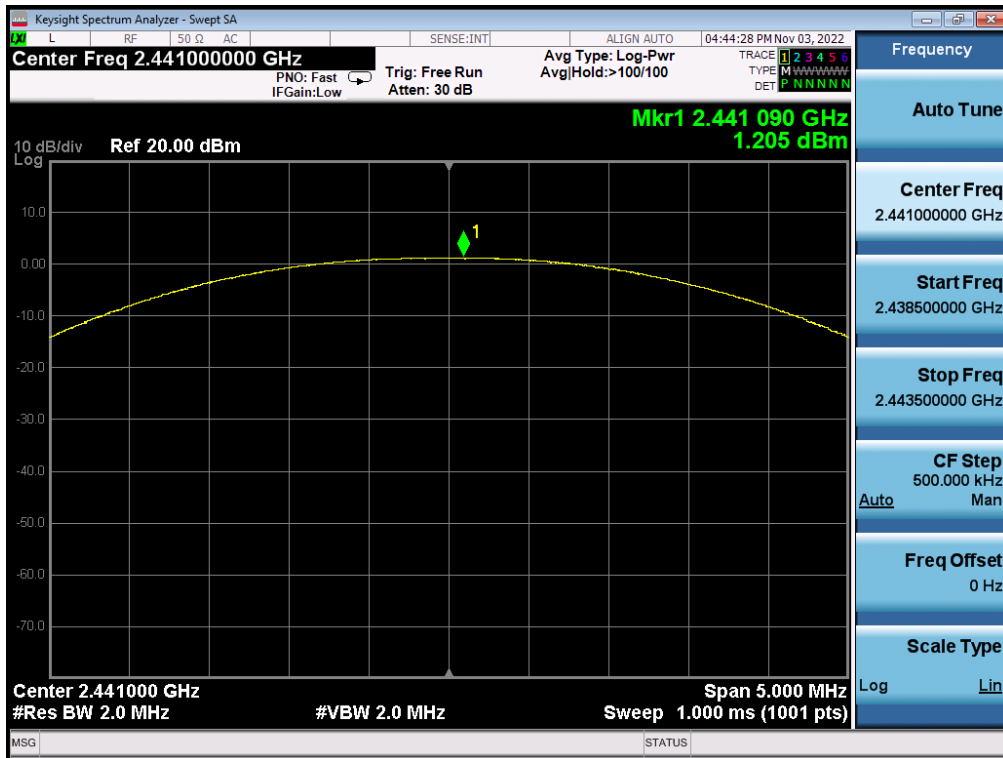

8DPSK 2441MHz

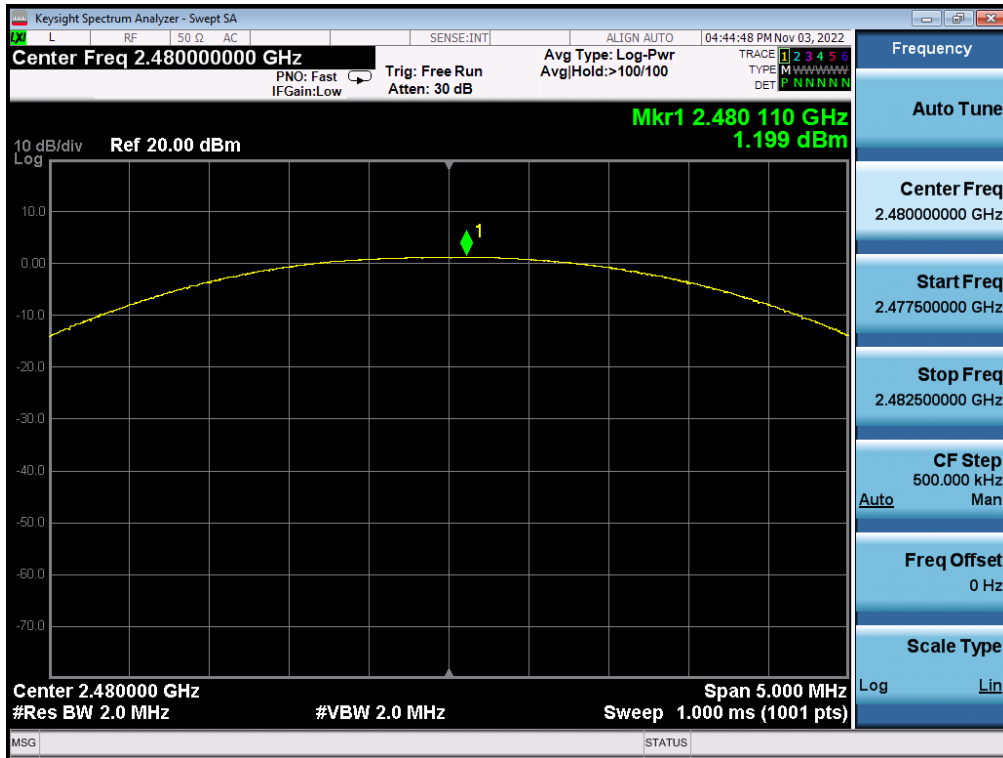

8DPSK 2480MHz



**6. NUMBER OF HOPPING CHANNEL**

**6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 1% of the span
VB	VBW ≥ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**6.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

**6.1.2 DEVIATION FROM STANDARD**

No deviation.

**6.1.3 TEST SETUP**




**6.1.4 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**


Test Mode :	Hopping Mode		
Number of Hopping Channel	GFSK	78	
	$\pi/4$ DQPSK	78	
	8DPSK	78	

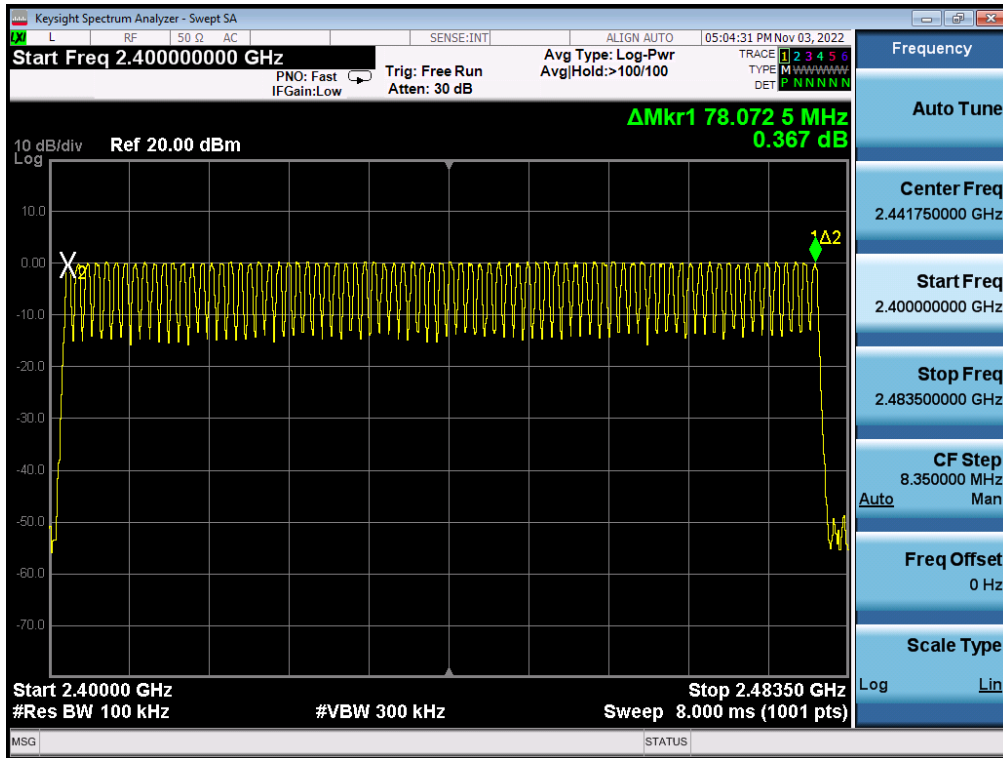

GFSK

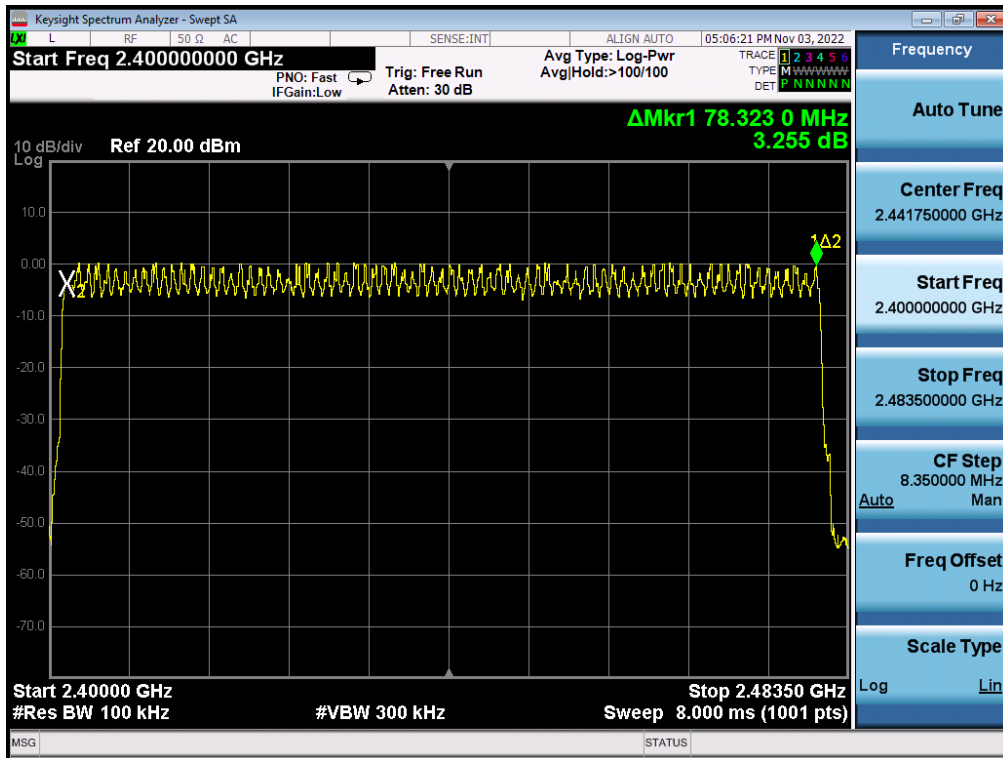

$\pi/4$  DQPSK

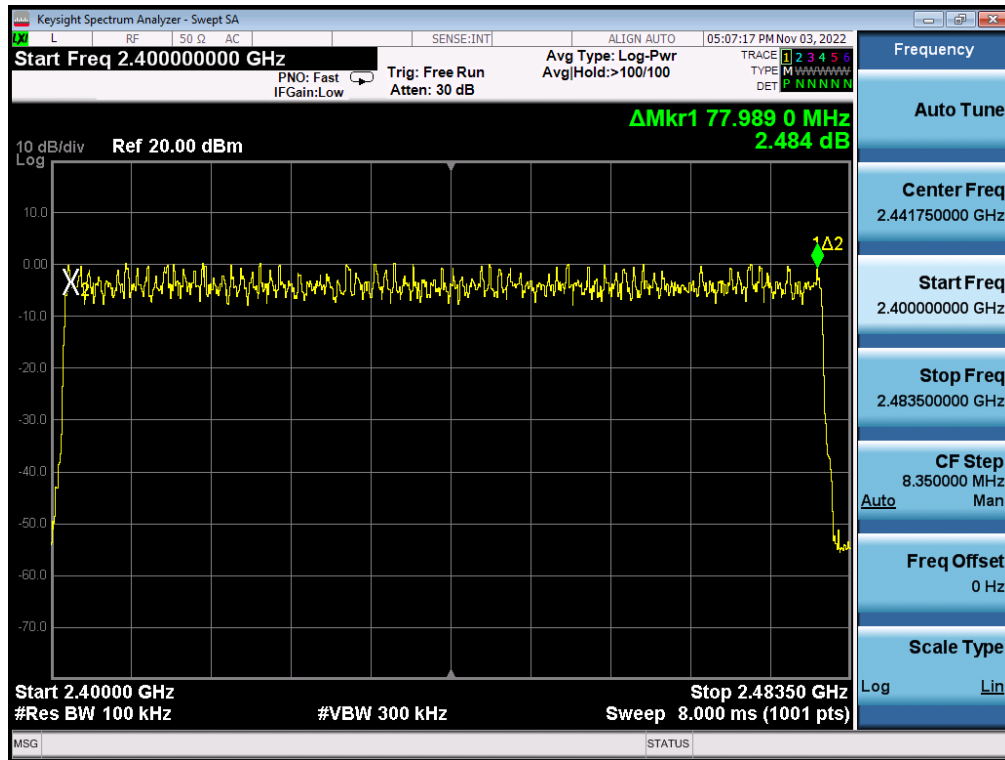

8DPSK



**7. BANDWIDTH TEST**

**7.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C	
Section	Test Item
15.247(a)(1)	Bandwidth


**7.1.1 TEST PROCEDURE**

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

**7.1.2 DEVIATION FROM STANDARD**

No deviation.

**7.1.3 TEST SETUP**

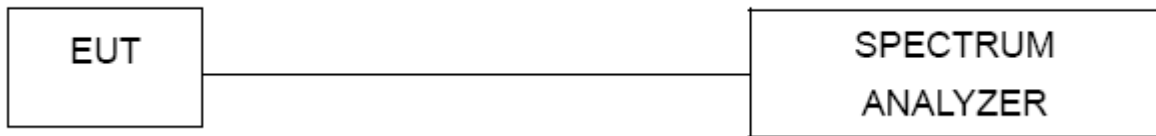

**7.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.





7.1.5 TEST RESULTS


	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	2402	0.934	Pass
	2441	1.014	Pass
	2480	1.019	Pass
$\pi/4$ DQPSK	2402	1.277	Pass
	2441	1.276	Pass
	2480	1.267	Pass
8DPSK	2402	1.246	Pass
	2441	1.253	Pass
	2480	1.248	Pass




GFSK 2402MHz




GFSK 2441MHz

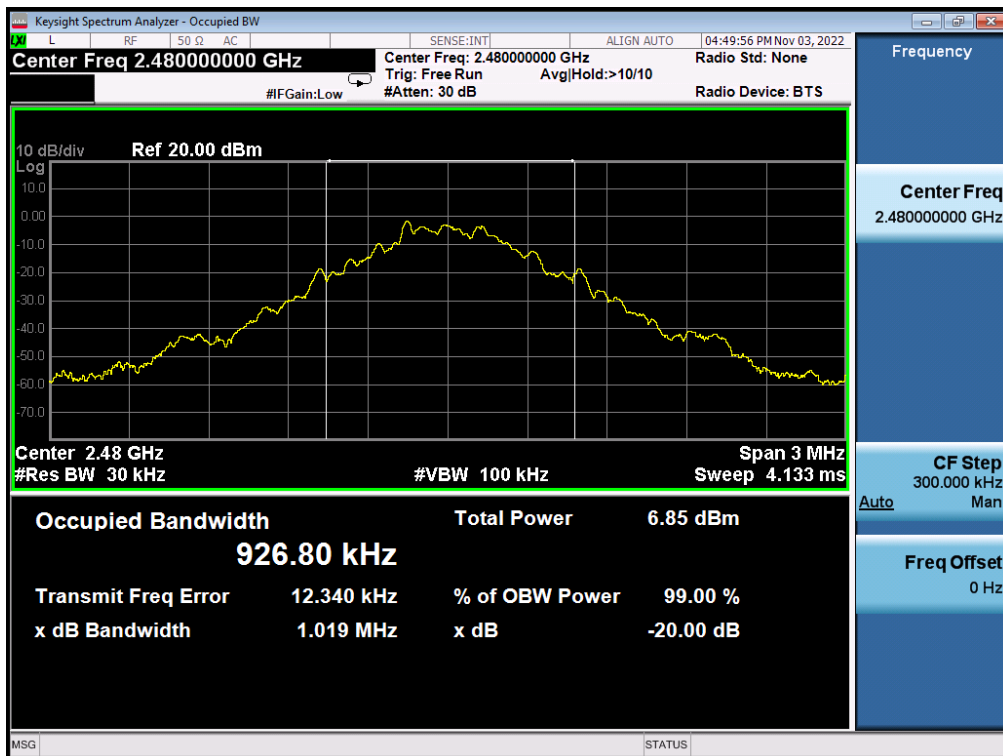


GFSK 2480MHz

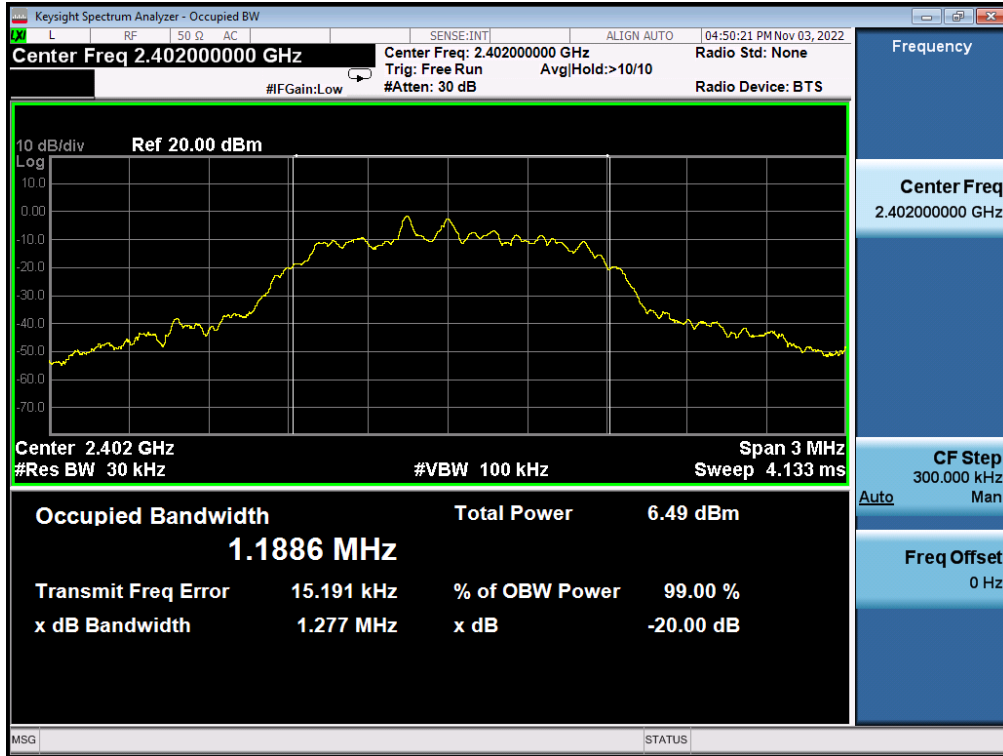


$\pi/4$  DQPSK 2402MHz

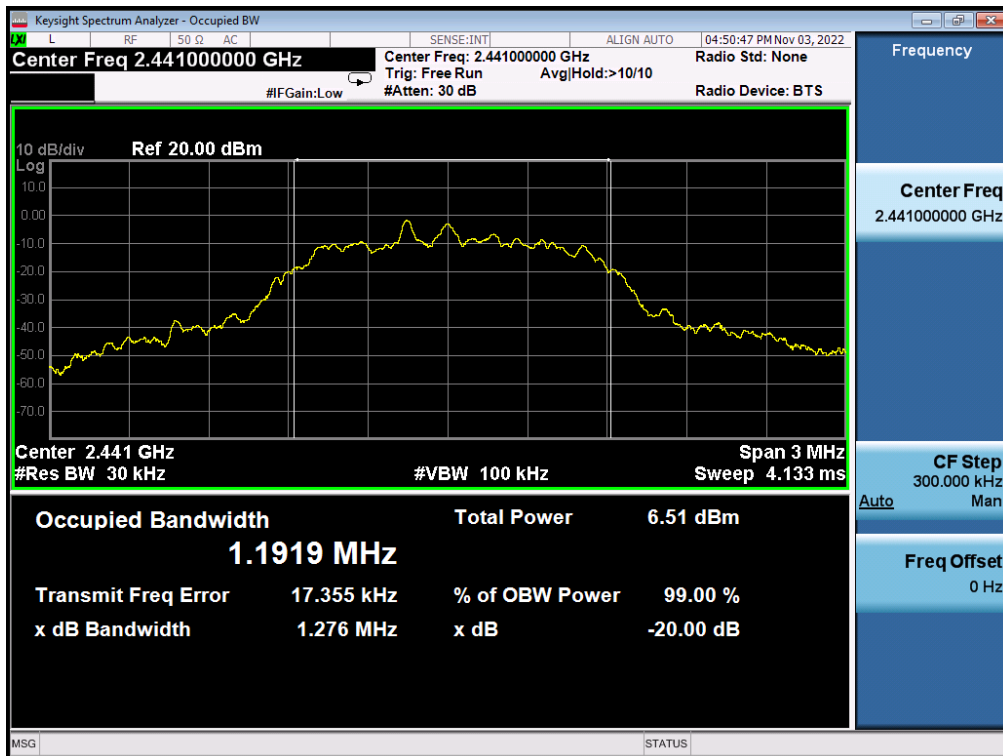

$\pi/4$  DQPSK 2441MHz

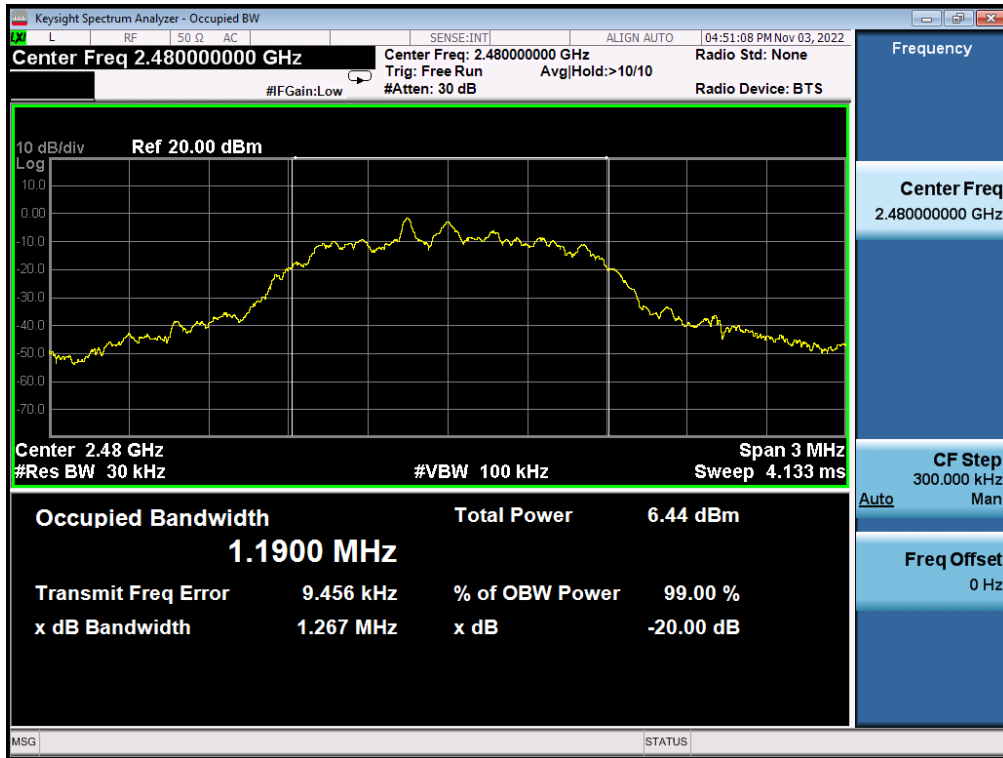

$\pi/4$  DQPSK 2480MHz

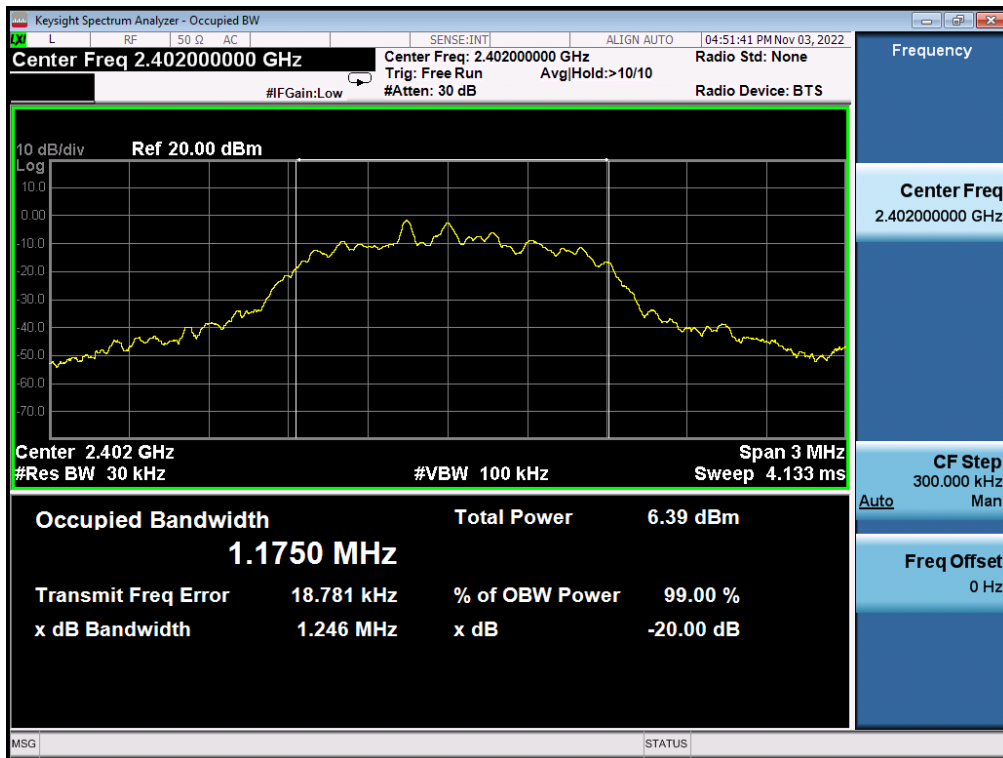

8DPSK 2402MHz



8DPSK 2441MHz



8DPSK 2480MHz

**8. HOPPING CHANNEL SEPARATION MEASUREMENT**

**8.1 APPLIED PROCEDURES / LIMIT**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100 kHz (Channel Separation)
VB	300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


**8.1.1 TEST PROCEDURE**

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- b. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

**8.1.2 DEVIATION FROM STANDARD**

No deviation.

**8.1.3 TEST SETUP**

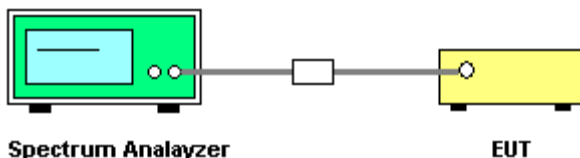

**8.1.4 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.


**8.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Test Mode	Ch. Separation (MHz)	Limit (MHz)	Result
GFSK	1.000	0.676	Complies
$\pi$ / 4 DQPSK	1.012	0.851	Complies
8DPSK	1.012	0.835	Complies



GFSK

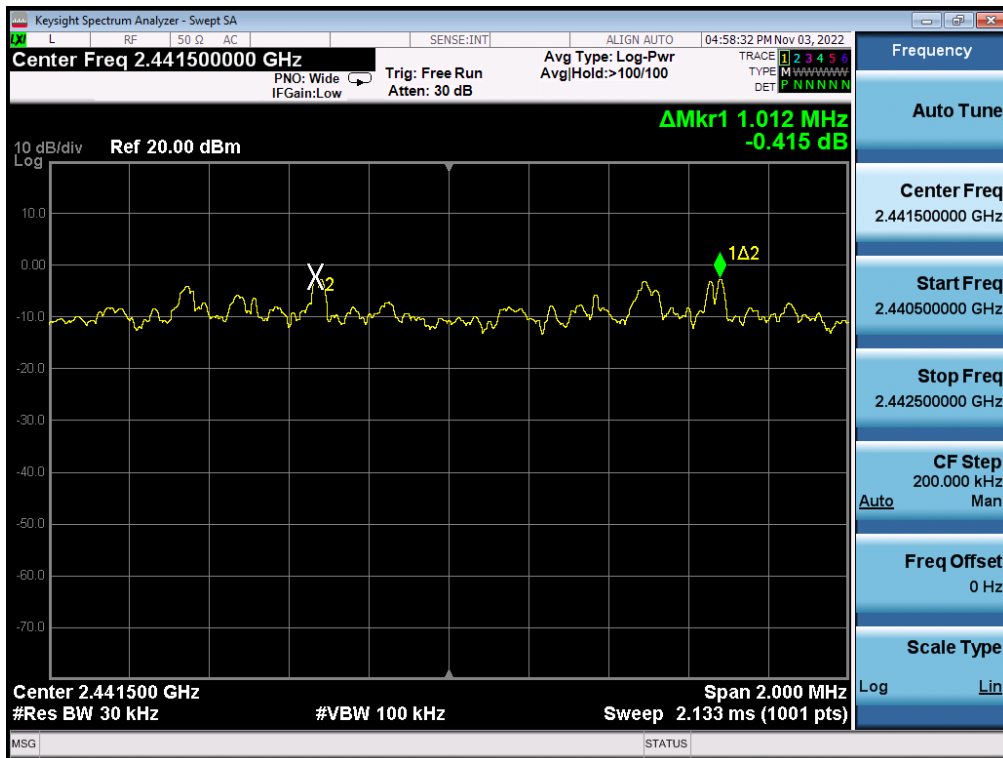

$\pi/4$  DQPSK



8DPSK





9. DWELL TIME OF OCCUPANCY

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS


9.1.1 TEST PROCEDURE

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP

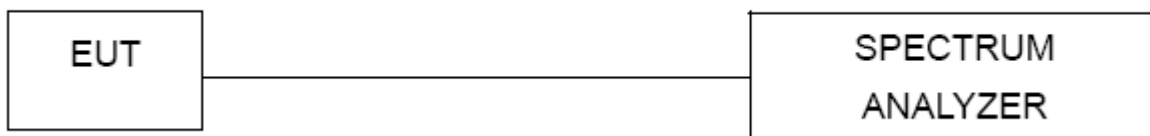

9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



9.1.5 TEST RESULTS

GFSK DH5 mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2402MHz	DH5	311.47	400	Pass
2441MHz	DH5	313.60	400	Pass
2480MHz	DH5	315.73	400	Pass

Remarks:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$   
 Test channel: as blow  
 CH:2402MHz time slot= $2.920(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 311.47\text{ms}$   
 CH:2441MHz time slot= $2.940(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 313.60\text{ms}$   
 CH:2480MHz time slot= $2.960(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 315.73\text{ms}$

$\pi/4$ -DQPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2402MHz	2DH5	313.60	400	Pass
2441MHz	2DH5	315.73	400	Pass
2480MHz	2DH5	315.73	400	Pass

Remarks:


The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$   
 Test channel: as blow  
 CH:2402MHz time slot= $2.940(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 313.60\text{ms}$   
 CH:2441MHz time slot= $2.960(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 315.73\text{ms}$   
 CH:2480MHz time slot= $2.960(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 315.73\text{ms}$

8DPSK mode:


Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2402MHz	2DH5	315.73	400	Pass
2441MHz	2DH5	315.73	400	Pass
2480MHz	2DH5	313.60	400	Pass

Remarks:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$   
 Test channel: as blow  
 CH:2402MHz time slot= $2.960(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 315.73\text{ms}$   
 CH:2441MHz time slot= $2.960(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 315.73\text{ms}$   
 CH:2480MHz time slot= $2.940(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 313.60\text{ms}$

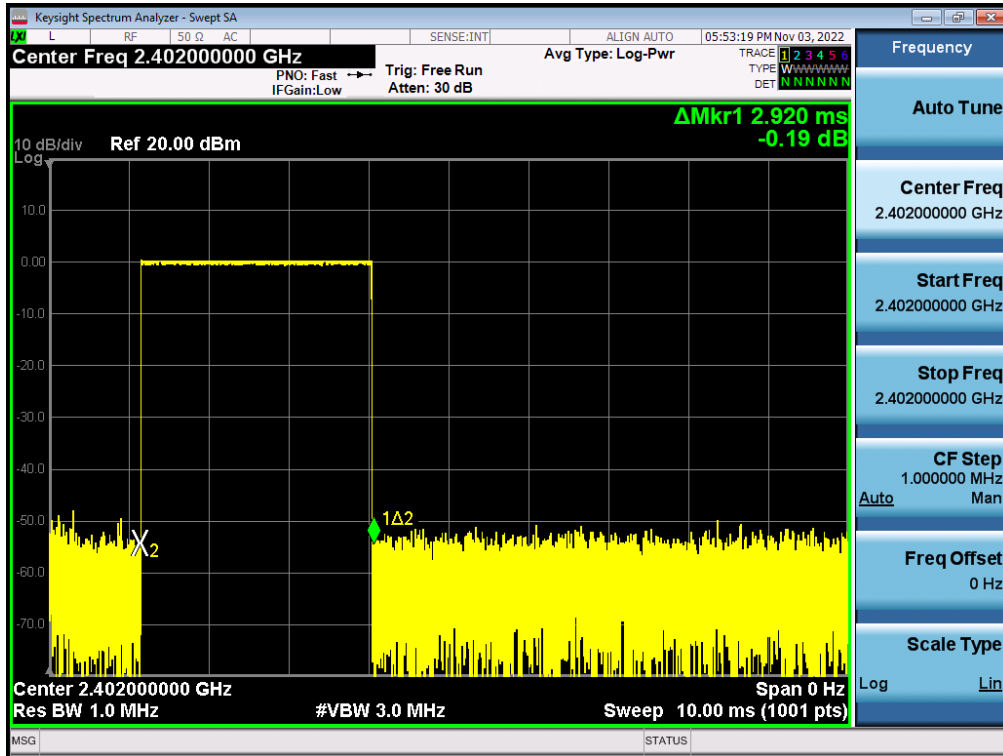


GFSK 2402MHz

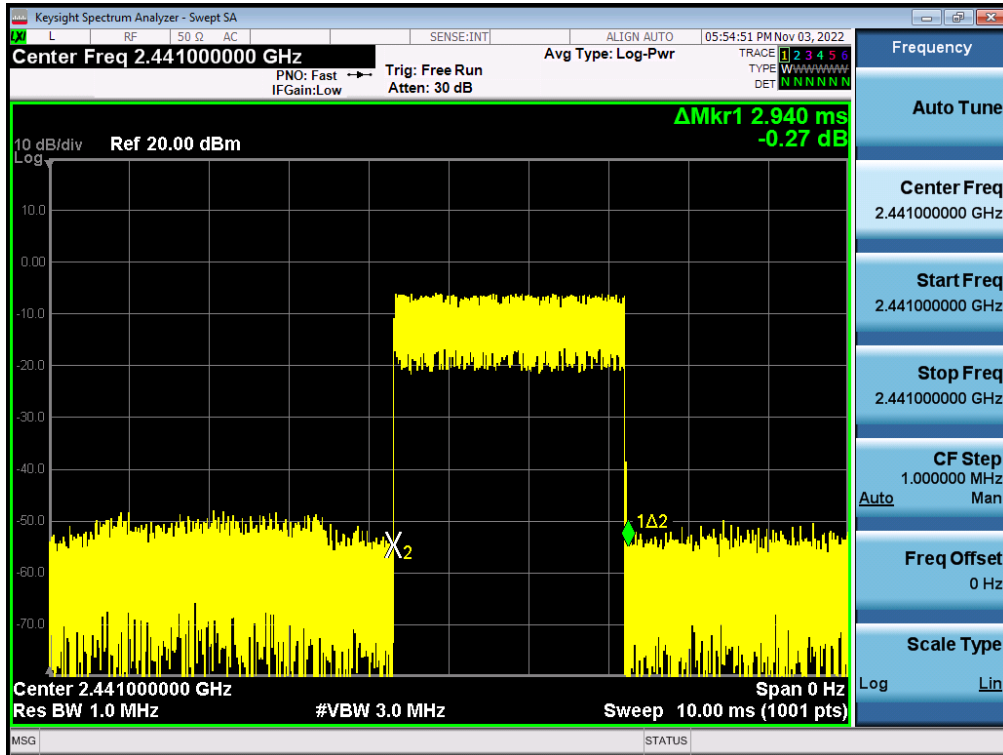


GFSK 2441MHz




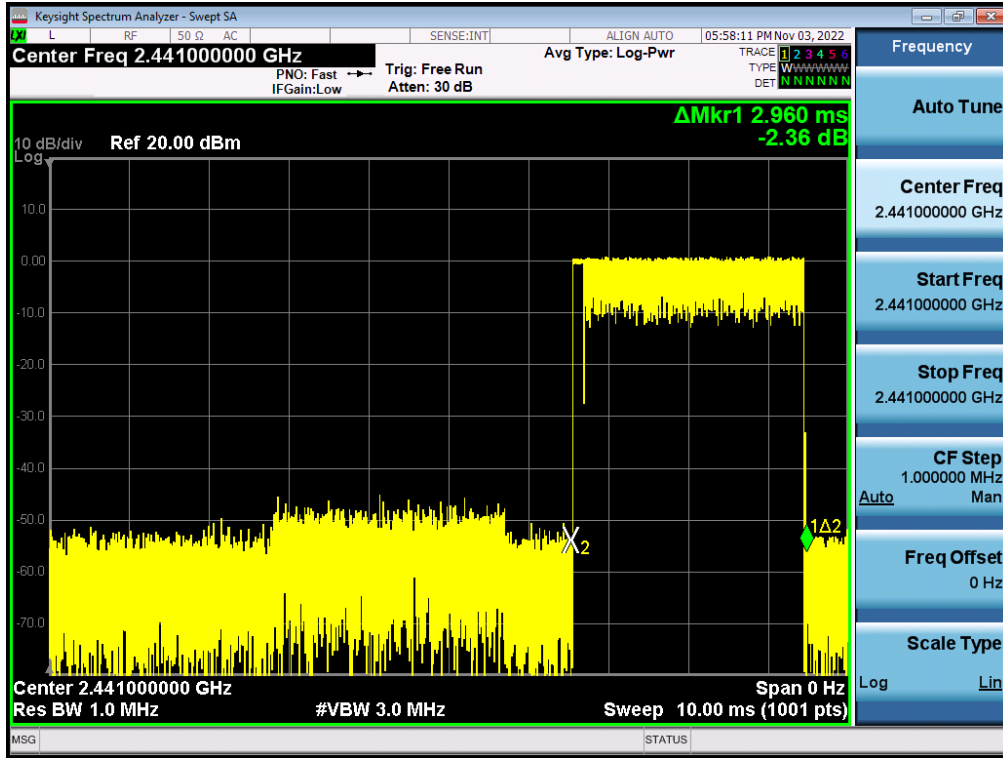


$\pi/4$  DQPSK 2441MHz

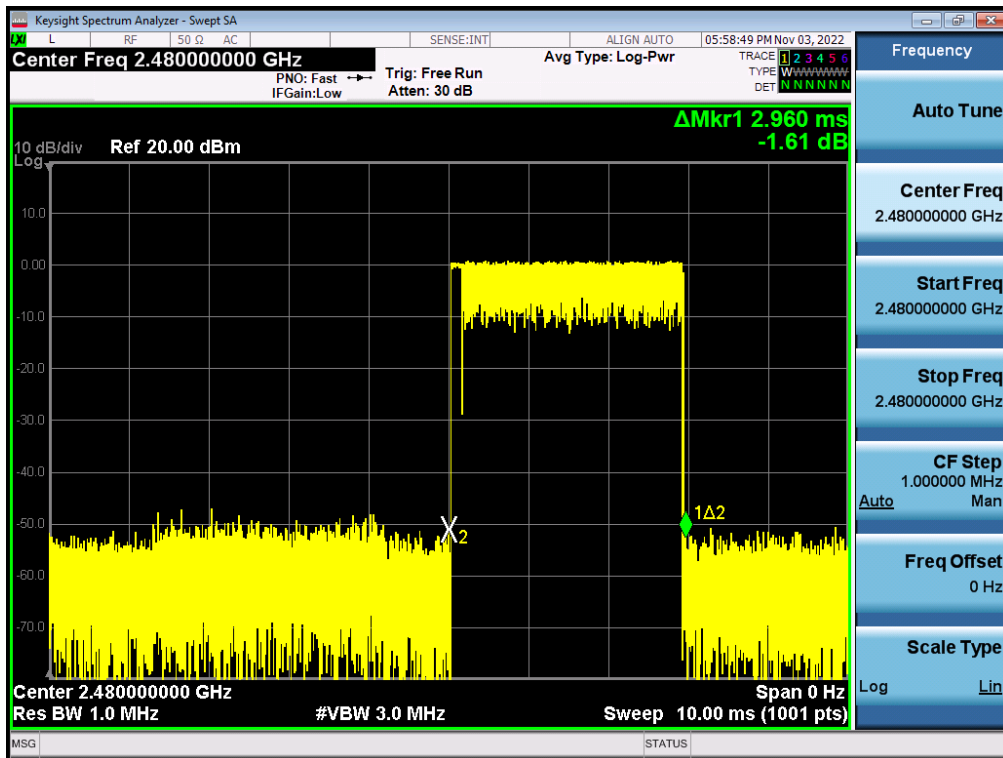


$\pi/4$  DQPSK 2480MHz

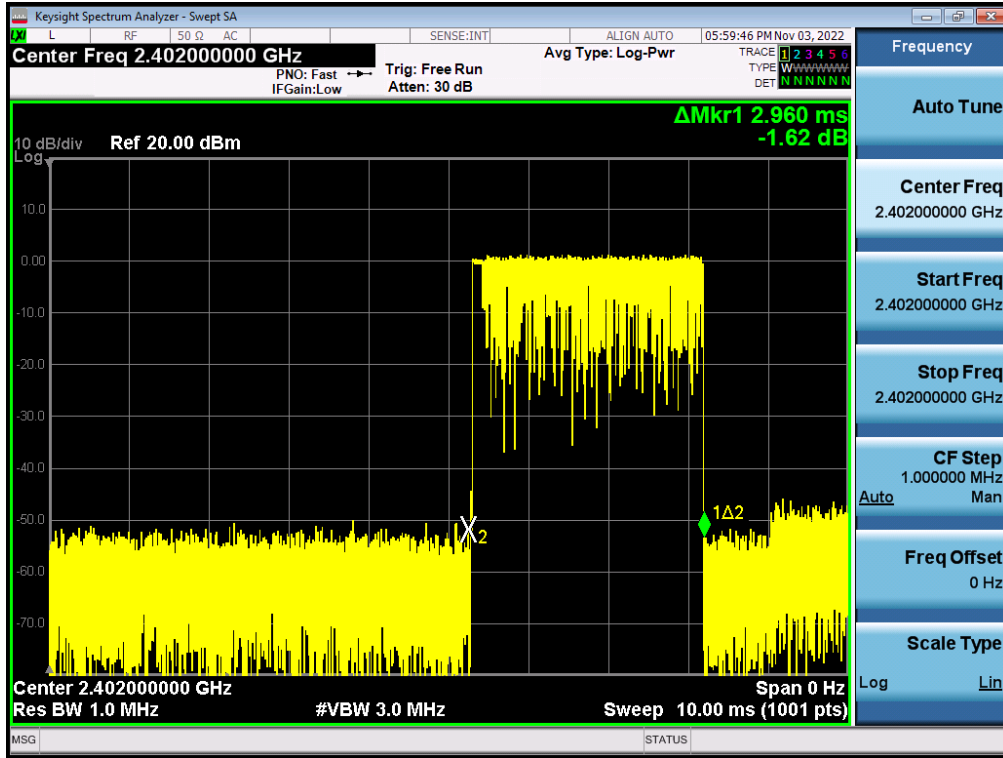

8DPSK 2402MHz

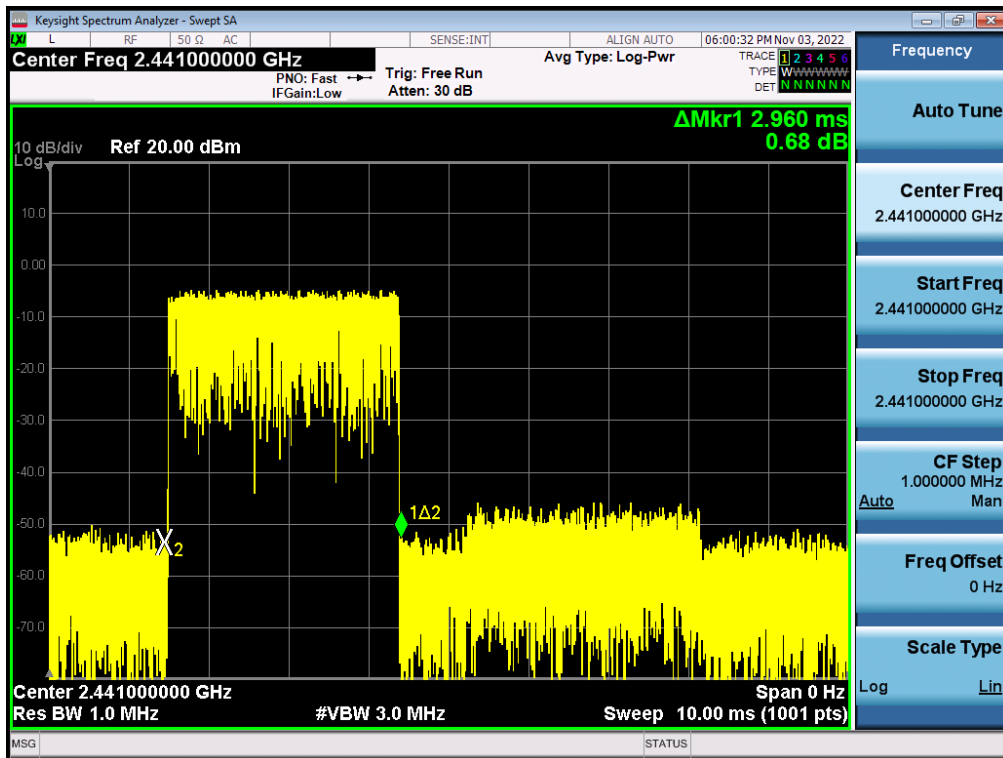

8DPSK 2441MHz

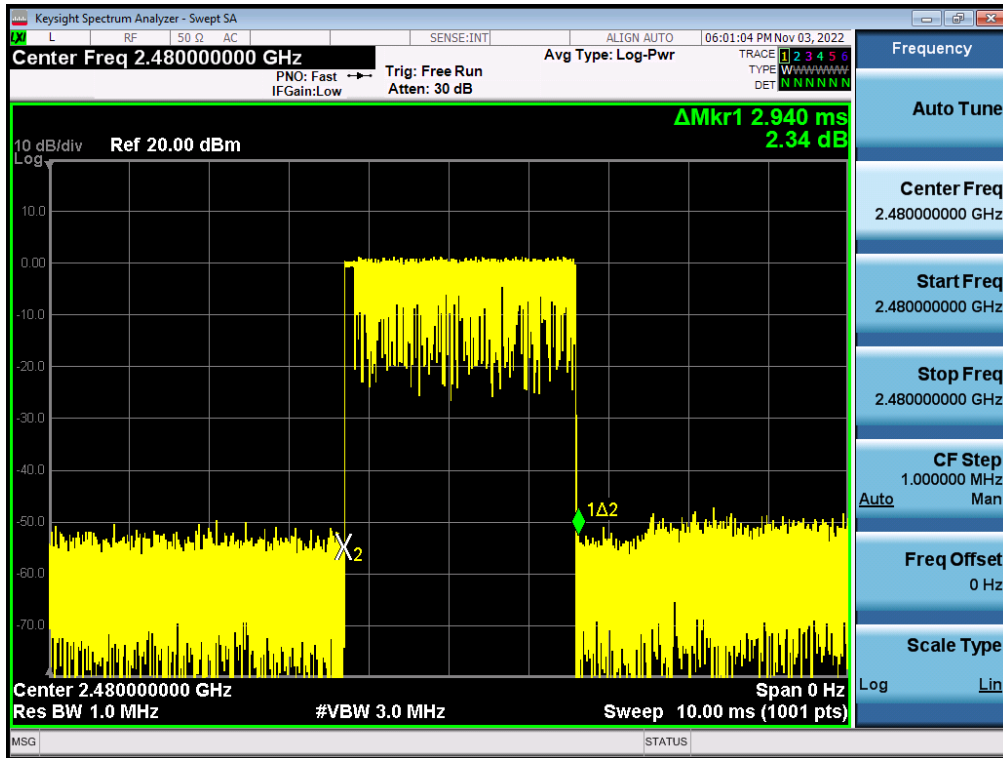

8DPSK 2480MHz


## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is PCB antenna,. It comply with the standard requirement.

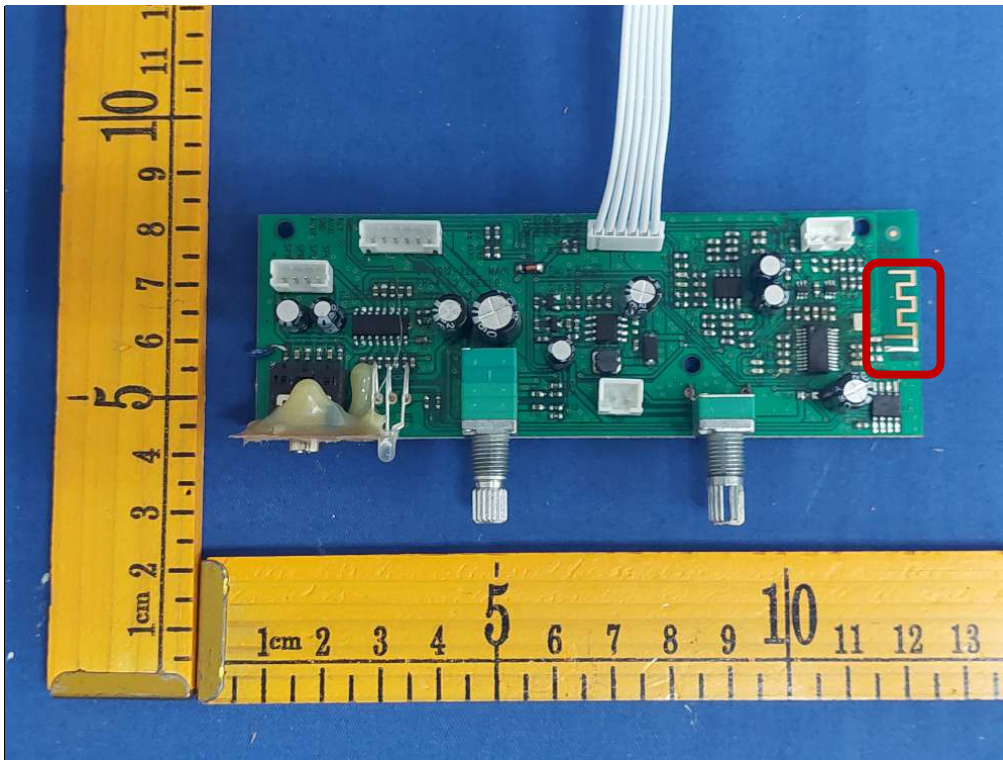





## 11. TEST SEUUP PHOTO

Reference to the appendix I for details.

## 12. EUT PHOTO

Reference to the appendix II for details.

※※※※※ END OF REPORT ※※※※※