



SENTON

Choose certainty.
Add value.

March 29, 2012

Page 1 of 128

Prüfbericht / Test Report

Nr. / No. 123785-04436-2 (Edition 2)

Applicant: LifeTool gemeinnützige GmbH
Type of equipment: Dongle for Wireless Mouse
Type designation: IM+Connect
Order No.: AE-BS11/0011078
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.107, 15.109, 15.205, 15.207, 15.215 and 15.249

Industry Canada Radio Standards Specifications
RSS-GEN Issue 3, Sections 6.2, 7.2.2, 7.2.4 and
RSS-210 Issue 8, Section A2.9 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements.....	8
6.2	Conducted AC Powerline Emission	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	11
6.4	Radiated Emission in Fully or Semi Anechoic Room	13
6.5	Radiated Emission at Alternative Test Site	15
7	Photographs Taken During Testing.....	17
8	Test Results for Transmitter	24
8.1	Occupied Bandwidth	26
8.2	Bandwidth of the Emission.....	34
8.3	Designation of Emissions.....	40
8.4	Restricted Bands of Operation	41
8.5	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	45
8.6	Radiated Emission Measurement 9 kHz to 30 MHz.....	47
8.7	Radiated Emission Measurement 30 MHz to 25 GHz.....	50
9	Test Results for Receiver	53
9.1	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	54
9.2	Radiated Emission Measurement 30 MHz to 12.5 GHz	56
10	Referenced Regulations	57
11	Test Equipment List with Calibration Data.....	59
12	Revision History	60
Annex A	Charts taken during testing.....	61

1 Description of the Equipment Under Test (EUT)

General data of EUT

Type designation ¹ :	IM+Connect
Parts ² :	
Serial number(s):	1104170030
Manufacturer:	LifeTool gemeinnützige GmbH
Type of equipment:	Dongle for Wireless Mouse
Version:	As received
FCC ID:	
Additional parts/accessories:	

Technical data of EUT

Application frequency range:	2400.0 - 2483.5 MHz
Frequency range:	2401.20 MHz, 2402.53 MHz, 2404.53 MHz, 2479.51 MHz, 2480.85 MHz, 2482.18 MHz, 2424.53 MHz, 2449.52 MHz
Operating frequency:	2401.20 MHz, 2449.52 MHz 2482.18 MHz
Type of modulation:	MSK
Pulse train:	---
Pulse width:	---
Number of RF-channels:	8
Channel spacing:	1.3 MHz (See Frequency range for details)
Designation of emissions ³ :	1M18G1D
Type of antenna:	Integrated on printed board
Size/length of antenna:	5 x 14 mm
Connection of antenna:	☐ detachable ☒ not detachable
Type of power supply:	DC supply over USB
Specifications for power supply:	nominal voltage: 5 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details

Applicant (full address):	LifeTool gemeinnützige GmbH Hafenstraße 47-51A-4020 Linz
Contact person:	Mr. Karl Kaser
Order number:	AE-BS11/0011078
Receipt of EUT:	December 19, 2011
Date(s) of test:	December 22, 2011 to January 12, 2012
Note(s):	The applicant provided a test sample with test software.

Report details

Report number:	123785-04436-2
Edition:	2
Issue date:	March 29, 2012

3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD SENTON GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-PL-171/94-03
FCC test site registration number	90926
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.107, 15.109, 15.205, 15.207, 15.215 and 15.249

of the Federal Communication Commission (FCC) and the

**Radio Standards Specifications
RSS-GEN Issue 3, Sections 6.2, 7.2.2 and 7.2.4 and
RSS-210 Issue 8, Section A2.9 (Category I Equipment)**

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

Full tests were performed for transmitting mode at lowest, middle and highest frequency and receiving mode.

Configuration(s) of EUT

The EUT was configured as peripheral device of an USB-hub and test software to allow selection of the operation modes to work in stand-alone-mode.

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	AC supply of AC/DC adapter	ac power	Unshielded	Direct contact
2	DC supply of USB-hub	dc power	Unshielded	1.5 m
3	USB interface of EUT	signal/control port	Shielded	Direct contact

List of devices connected to EUT

Item	Description	Type Designation	Serial no. or ID	Manufacturer

List of support devices

Item	Description	Type Designation	Serial no. or ID	Manufacturer
1	USB-hub	B-USB 2HUB 7EA	AX014331011	Bazoo
2	AC/DC adapter of USB-hub	YFAR25085001-05		Wang Huei

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 8, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2
Measurement setup:	☐ Conducted: See below ☒ Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.4)
If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable. If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. The analyzer settings are specified by the test description of the appropriate test record(s).	

6.2 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.107 and 15.207
IC RSS-GEN Issue 3, section 7.2.4

Guide: ANSI C63.4 (CISPR 22)


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

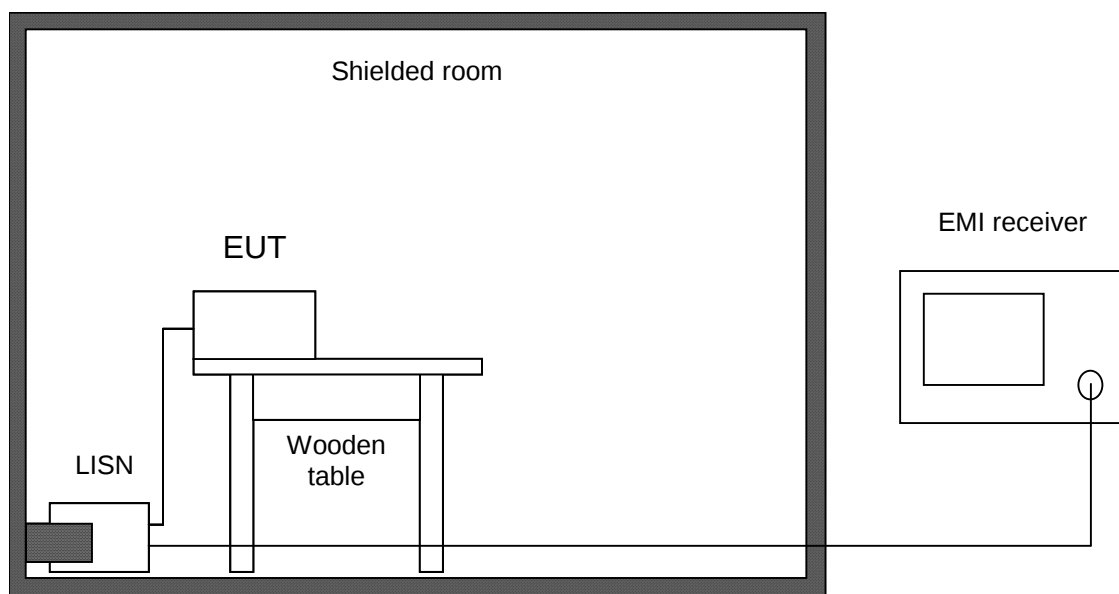

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒ Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
☒ V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
☐ V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
☐ Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
☐ Shielded room	No. 1	1451	---	Albatross
☒ Shielded room	No. 4	1454	3FD 100 544	Euroshield

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3)
IC RSS-210 Issue 8, section A1.1.2(b)

Guide: ANSI C63.4

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

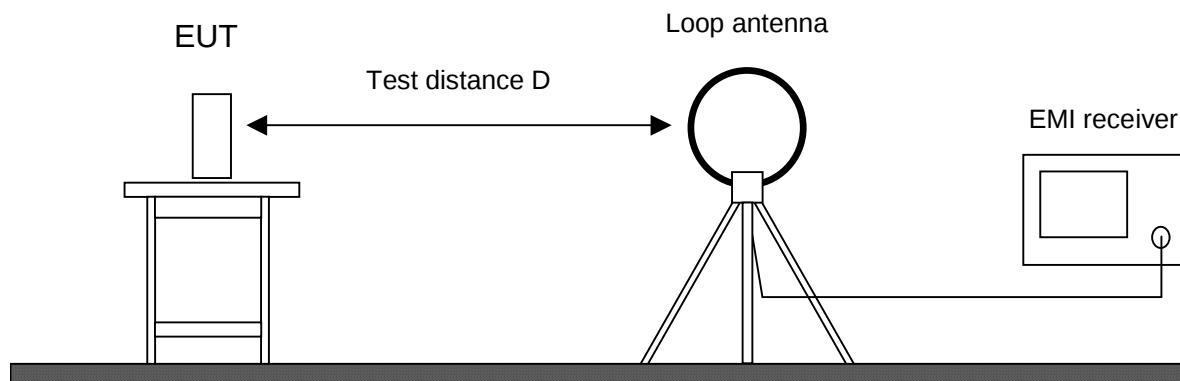


Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒ Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
☐ EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
☐ Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
☐ Preamplifier	Cabin no. 2 CPA9231A	1651	3393	Schaffner
☒ Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
☒ Fully anechoic room	No. 2	1452	---	Albatross
☐ Semi anechoic room	No. 3	1453	---	Siemens
☐ Semi anechoic room	No. 8	2057	---	Albatross

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109, 15.215(b) and 15.249 IC RSS-GEN Issue 3, section 6.1 IC RSS-210 Issue 8, section A2.9
Guide:	ANSI C63.4
Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33. Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz). Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used. All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 6.5). If prescans are recorded in fully anechoic room they are indicated appropriately.	

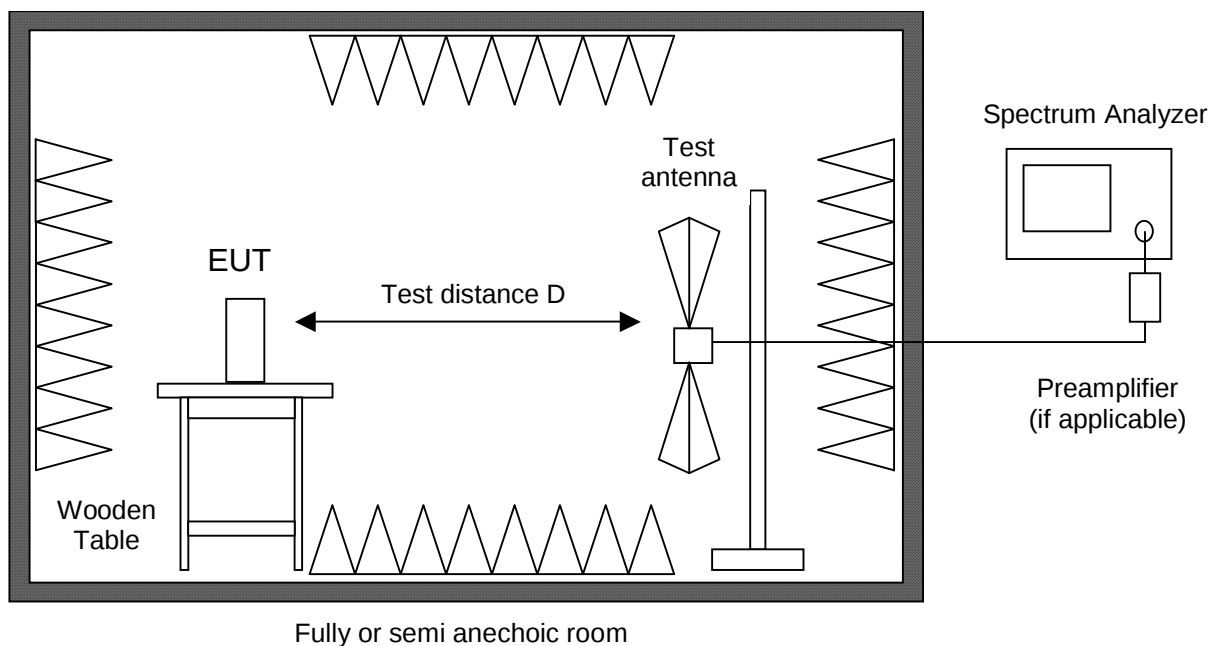


Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒	Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
☐	EMI test receiver	Cabin no. 3 ESPI7	2010	101018	Rohde & Schwarz
☐	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
☐	EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
☒	Preamplifier	Cabin no. 2 CPA9231A	1651	3393	Schaffner
☐	Preamplifier	R14601	1142	13120026	Advantest
☒	Preamplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
☐	Preamplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
☒	Preamplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT
☐	External Mixer	WM782A	1576	845881/005	Tektronix
☐	Harmonic Mixer Accessories	FS-Z30	1577	624413/003	Rohde & Schwarz
☒	Trilog antenna	Cabin no. 2 VULB 9163	1722	9163-188	Schwarzbeck
☐	Trilog antenna	Cabin no. 3 VULB 9163	1802	9163-214	Schwarzbeck
☐	Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
☒	Horn antenna	3115	1516	9508-4553	EMCO
☐	Horn antenna	3160-03	1010	9112-1003	EMCO
☐	Horn antenna	3160-04	1011	9112-1001	EMCO
☒	Horn antenna	3160-05	1012	9112-1001	EMCO
☒	Horn antenna	3160-06	1013	9112-1001	EMCO
☒	Horn antenna	3160-07	1014	9112-1008	EMCO
☒	Horn antenna	3160-08	1015	9112-1002	EMCO
☒	Horn antenna	3160-09	1265	9403-1025	EMCO
☐	Horn antenna	3160-10	1575	399185	EMCO
☒	Fully anechoic room	No. 2	1452	---	Albatross
☐	Semi anechoic room	No. 3	1453	---	Siemens
☐	Semi anechoic room	No. 8	2057	---	Albatross

6.5 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109, 15.215(b) and 15.249 IC RSS-GEN Issue 3, section 6.1 IC RSS-210 Issue 8, section A2.9
Guide:	ANSI C63.4
Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected. If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value. Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room. If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels. Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following. With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions. For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.	

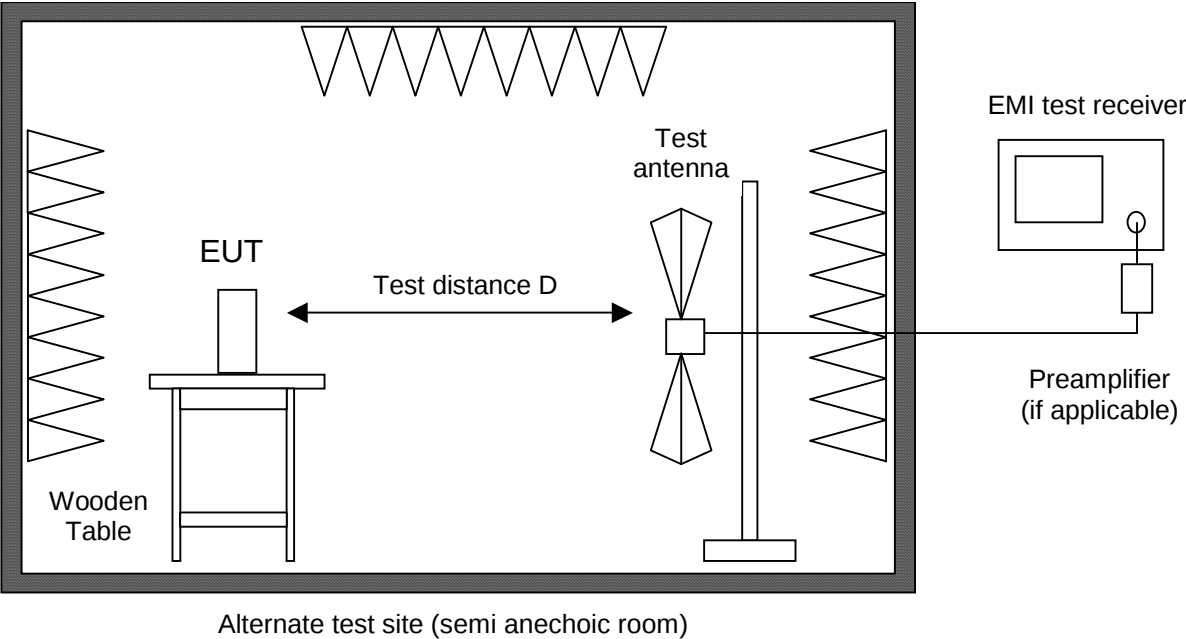


Test instruments used:


Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
☒ EMI test receiver		ESU8	2044	100232	Rohde & Schwarz
☒ Trilog antenna	Cabin no. 8	VULB 9163	2058	9163-408	Schwarzbeck
☒ Semi anechoic room		No. 8	2057	---	Albatross

7 Photographs Taken During Testing

Test setup for conducted AC powerline emission measurement

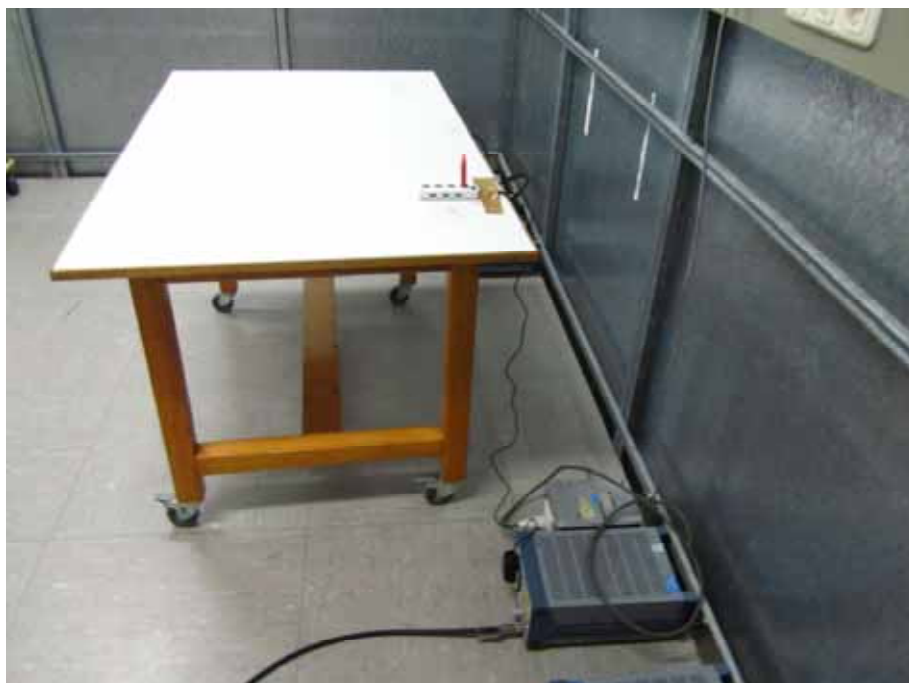


Test setup for radiated emission measurement 9 kHz – 30 MHz

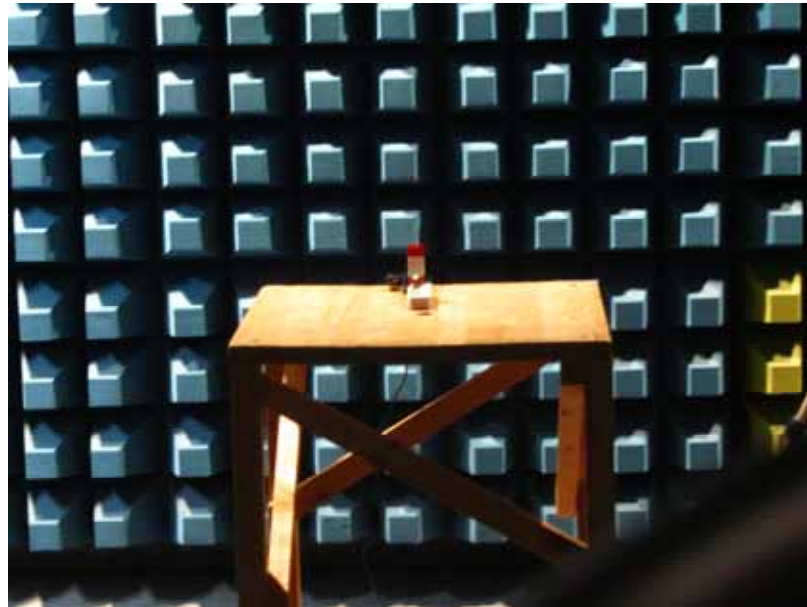

Test setup for radiated emission measurement (fully anechoic room)



Test setup for radiated emission measurement (fully anechoic room) - continued -

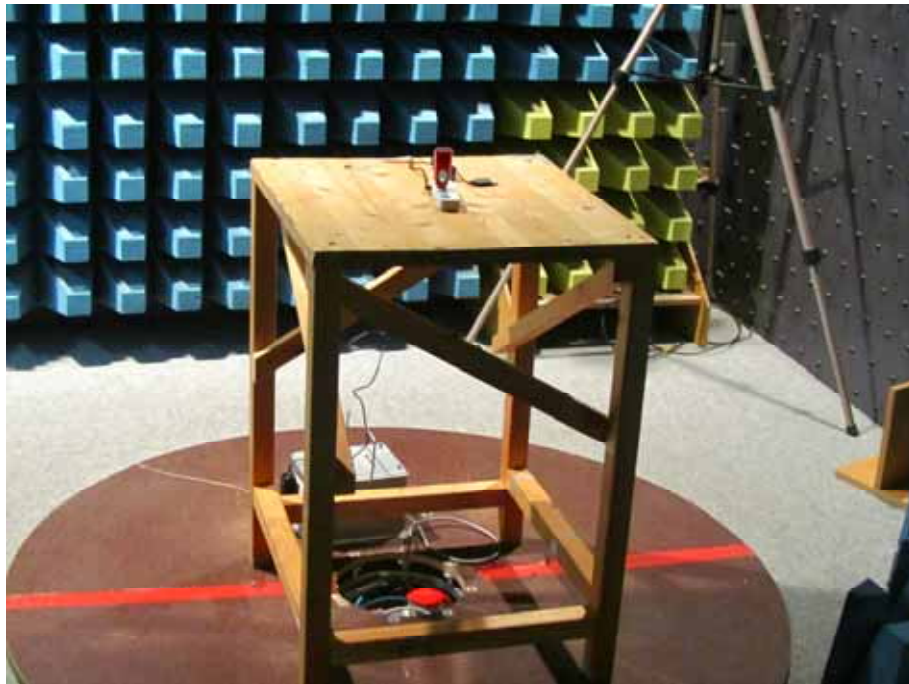

Test setup for radiated emission measurement (alternate test site)



Test setup for radiated emission measurement (alternate test site) - continued -



8 Test Results for Transmitter

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	26	Recorded
15.215(c)	Bandwidth of the emission	34	Test passed
2.201, 2.202	Class of emission	40	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a)	Restricted bands of operation	41	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	45	Test passed
15.205(b) 15.249	Radiated emission 9 kHz to 30 MHz	47	Test passed
15.205(b) 15.215(b) 15.249	Radiated emission 30 MHz to 25 GHz	50	Test passed

IC RSS-Gen Issue 3

Section(s)	Test	Page	Result
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	26	Recorded
8	Designation of emissions	40	Calculated
4.5	Pulsed operation	---	Not applicable
7.2.4	Conducted AC powerline emission 150 kHz to 30 MHz	45	Test passed
2.2(a)	Restricted bands and unwanted emission frequencies	41	Test passed
7.2.2(b)(c), 7.2.5	Unwanted emissions 9 kHz to 30 MHz	47	Test passed
7.2.2(b)(c), 7.2.5	Unwanted emissions 30 MHz to 25 GHz	50	Test passed
5.5	Exposure of Humans to RF Fields	---	Exempted from SAR and RF evaluation


IC RSS-210 Issue 8

Section(s)	Test	Page	Result
A2.9	Unwanted emissions 9 kHz to 30 MHz	47	Test passed
A2.9	Unwanted emissions 30 MHz to 25 GHz	50	Test passed

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission. The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier. The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	
Comment:		
Date of test:	January 10, 2012	
Test site:	Fully anechoic room, cabin no. 2	


Occupied Bandwidth (99 %):

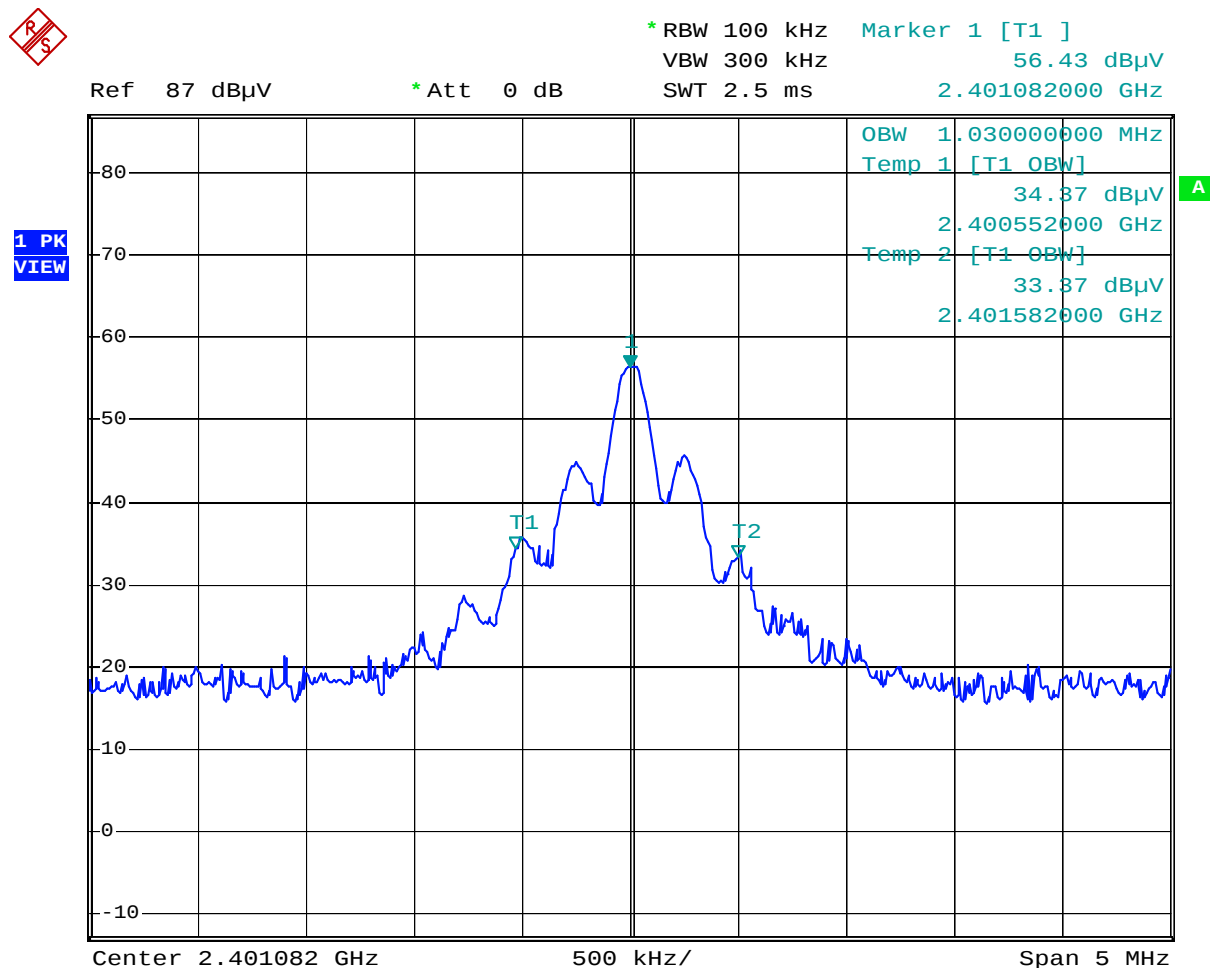

Date: 10.JAN.2012 10:47:16

Occupied Bandwidth (99 %): **1.03 MHz**

Occupied Bandwidth (99 %):

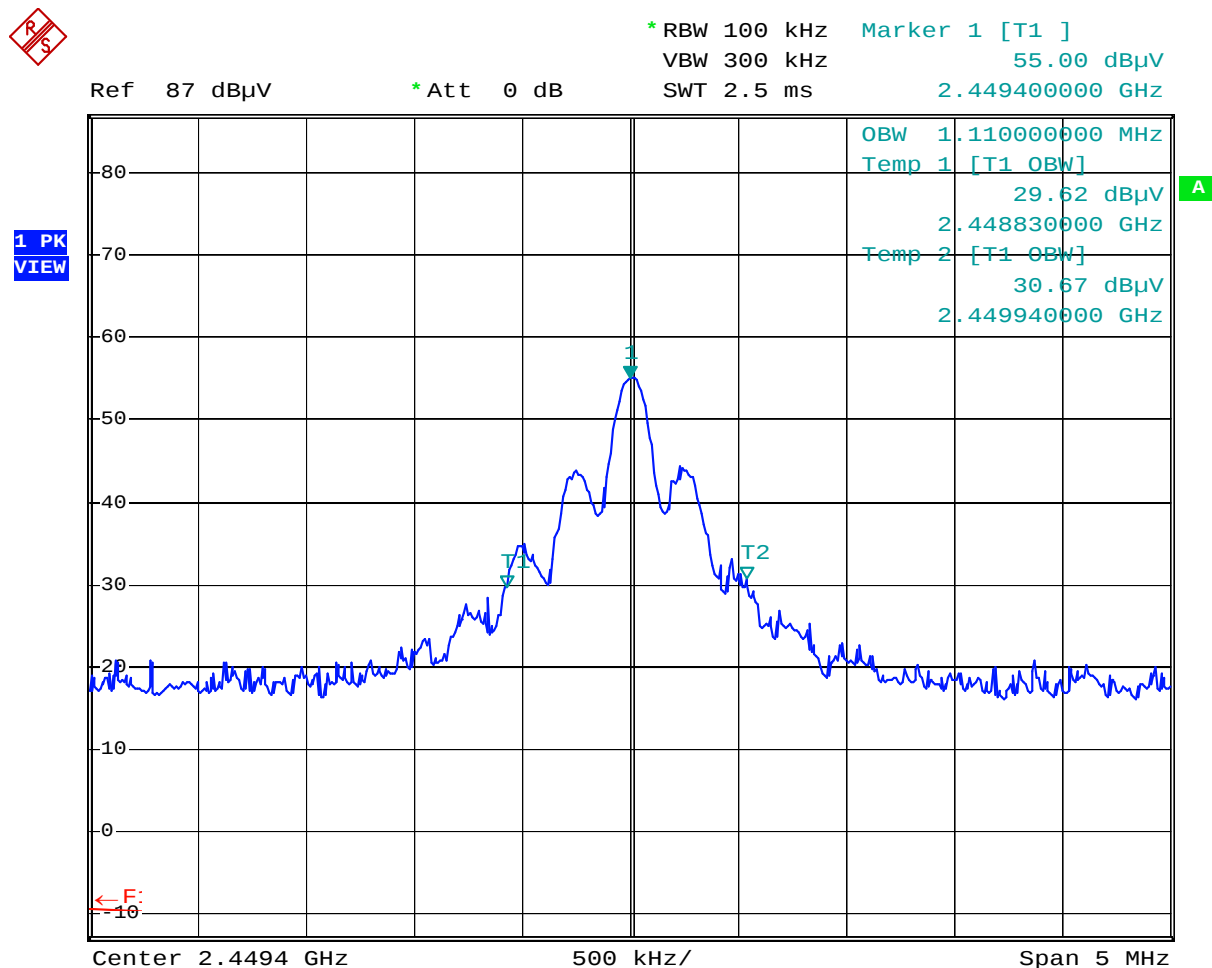

Date: 10.JAN.2012 10:49:49

Occupied Bandwidth (99 %): **1.11 MHz**

Occupied Bandwidth (99 %):




* RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 56.20 dBµV
SWT 2.5 ms 2.482070000 GHz

Ref 87 dBµV

* Att 0 dB

1 PK
VIEW

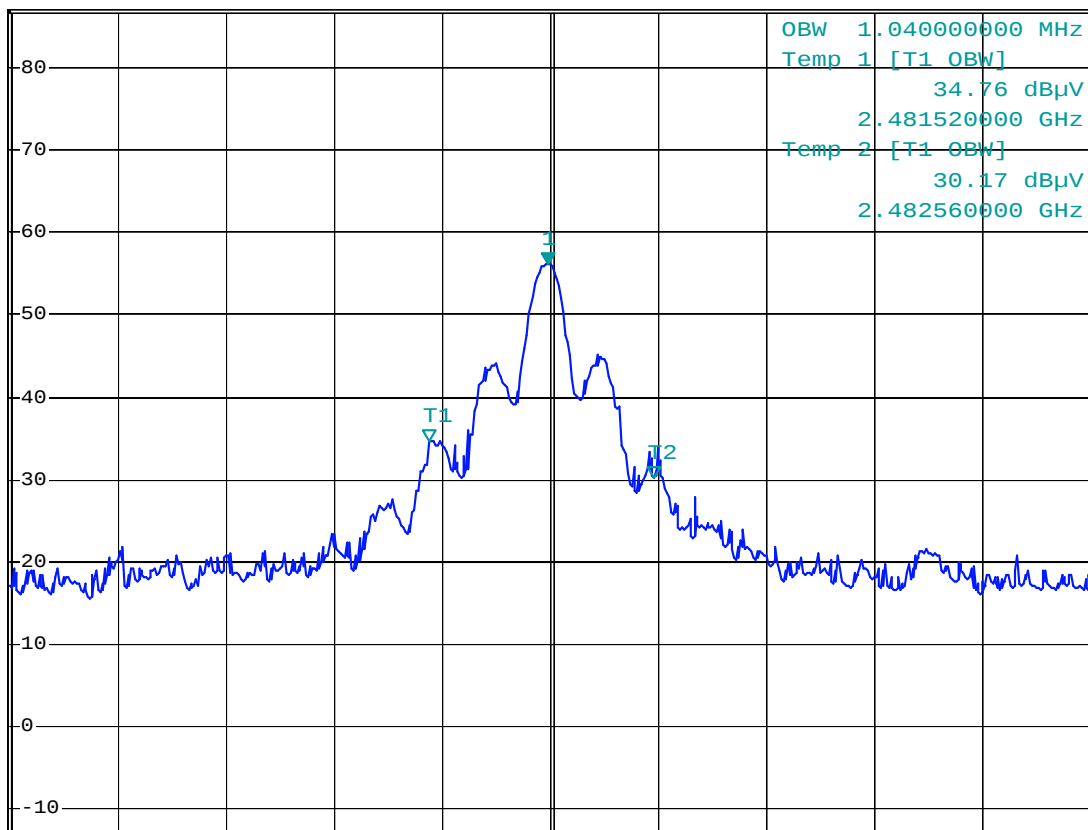

Center 2.48208 GHz

500 kHz/

Span 5 MHz

Date: 10.JAN.2012 10:27:23


Occupied Bandwidth (99 %): **1.04 MHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 3, section 4.6.1
Guide:	IC RSS-Gen Issue 3, section 4.6.1
Description:	If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	January 10, 2012
Test site:	Fully anechoic room, cabin no. 2


Occupied Bandwidth (99 %):

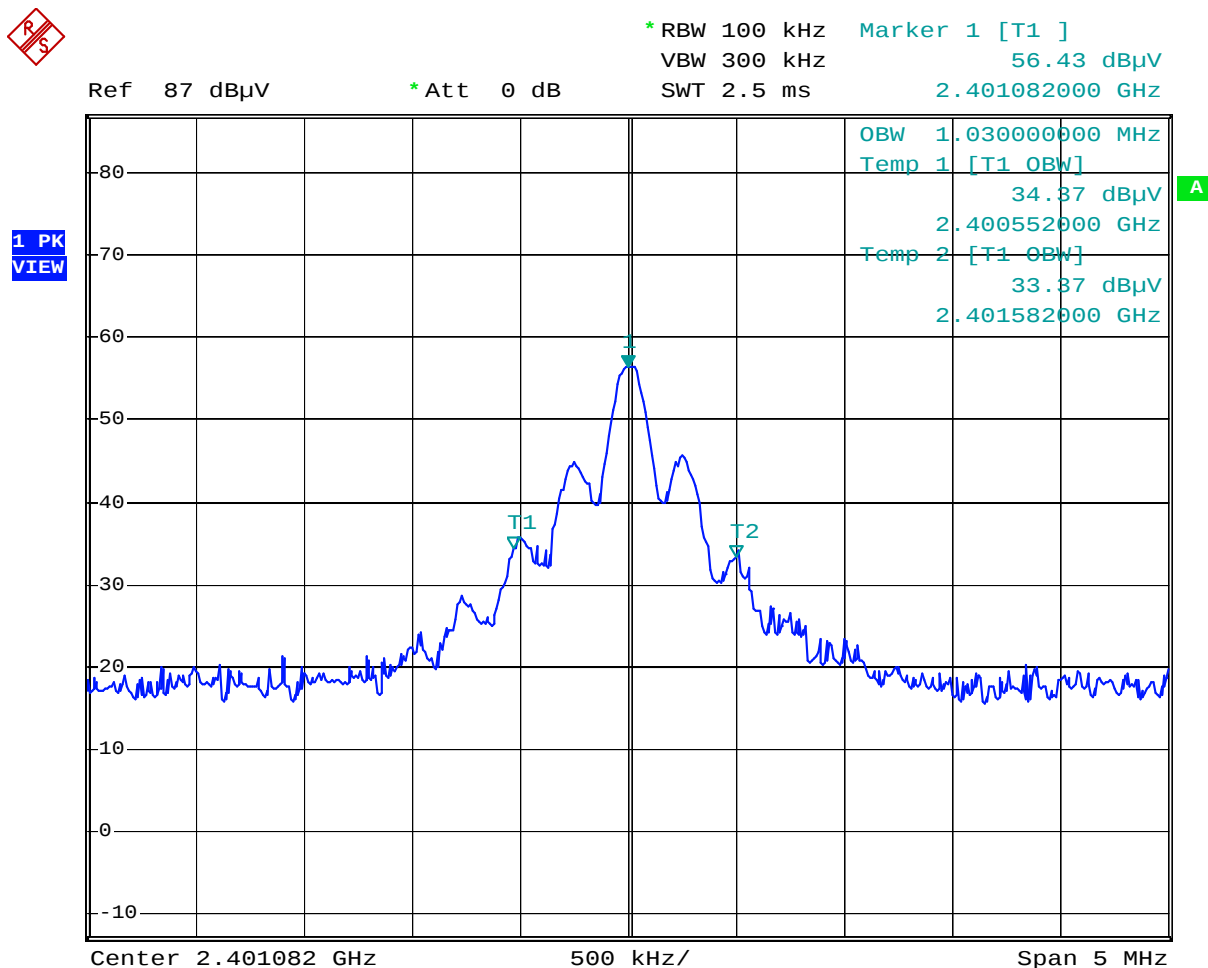

Date: 10.JAN.2012 10:47:16

Occupied Bandwidth (99 %): **1.03 MHz**


Occupied Bandwidth (99 %):

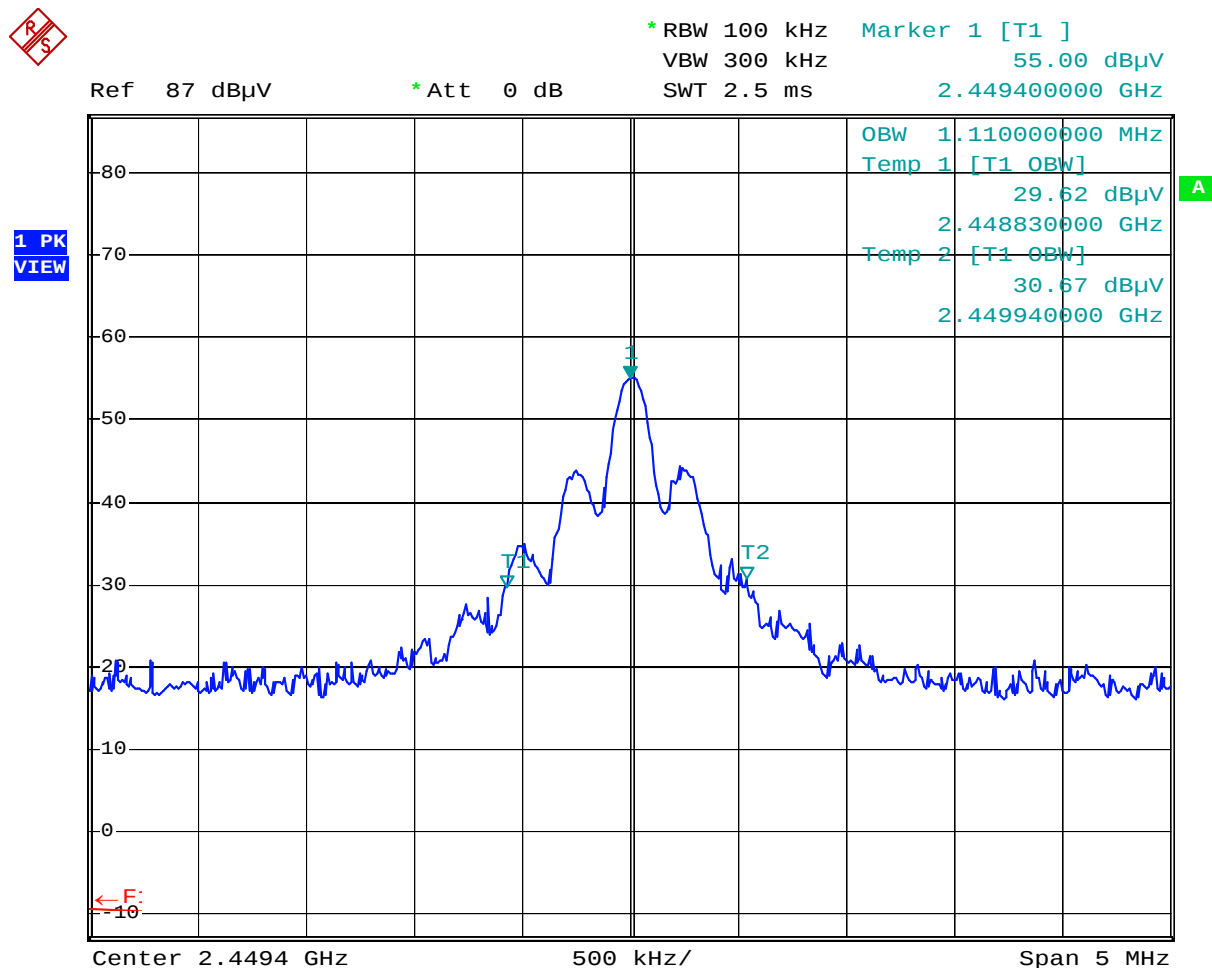

Date: 10.JAN.2012 10:49:49

Occupied Bandwidth (99 %): **1.11 MHz**

Occupied Bandwidth (99 %):

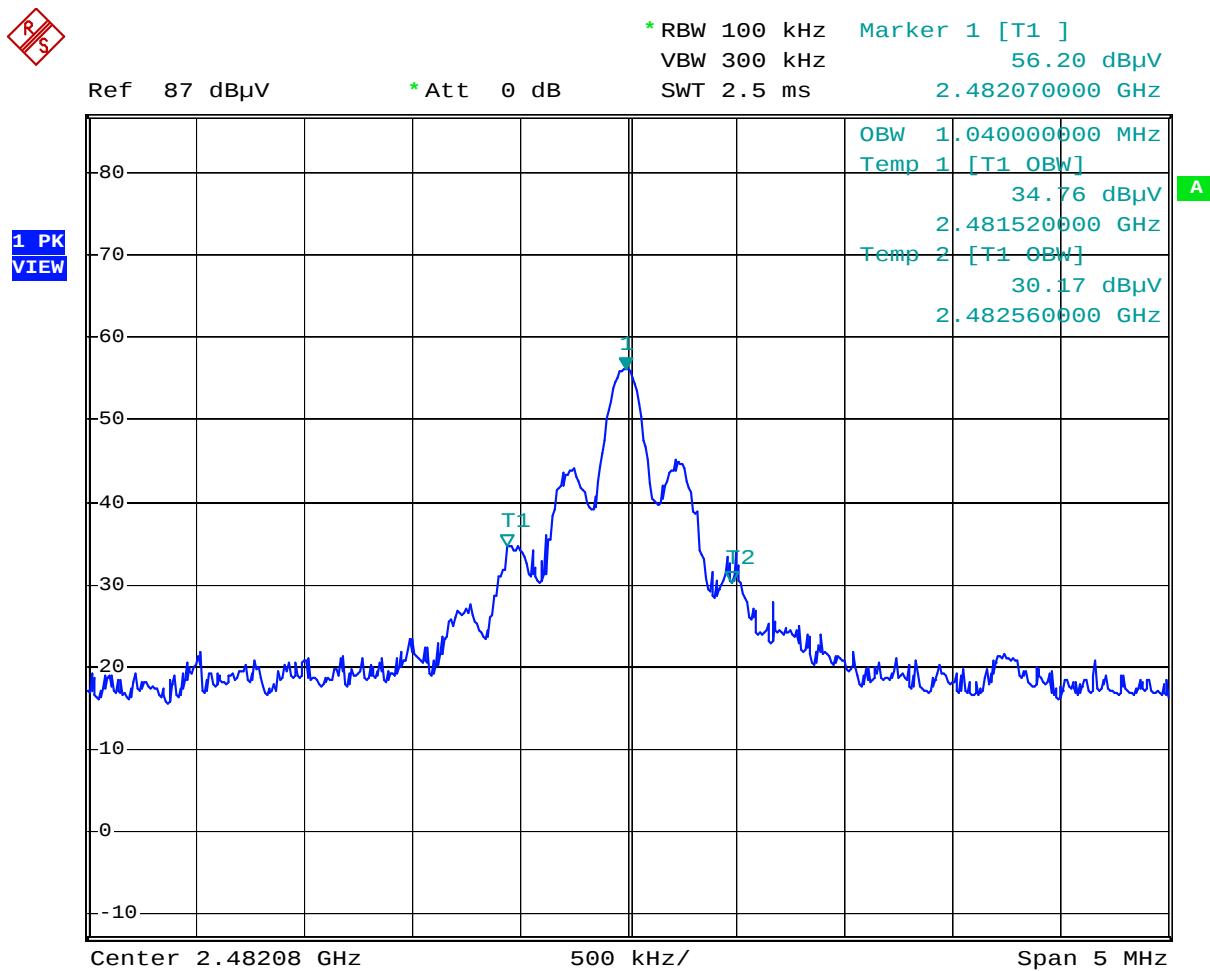

Date: 10.JAN.2012 10:27:23

Occupied Bandwidth (99 %): **1.04 MHz**

8.2 Bandwidth of the Emission


Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier. For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation. The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	
Comment:	Transmitting continuously on lowest channel	
Date of test:	January 10, 2012	
Test site:	Fully anechoic room, cabin no. 2	
Test Result:	Test passed	



MARKER 3
2.401452 GHz
Ref 87 dBµV *Att 0 dB

*RBW 100 kHz Marker 3 [T1]
VBW 300 kHz 34.31 dBµV
SWT 2.5 ms 2.401452000 GHz

1 PK
VIEW

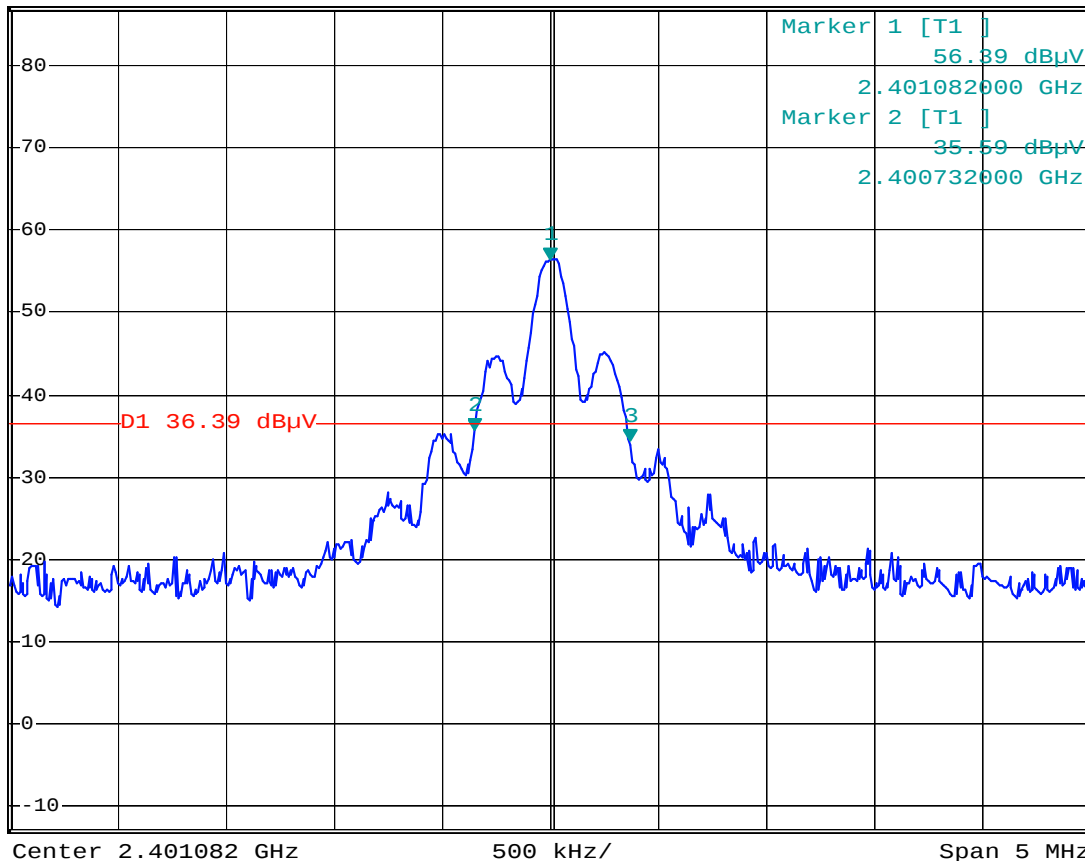


Date: 10.JAN.2012 10:46:46

Permitted frequency band:	2400.0 - 2483.5 MHz	
20 dB bandwidth:	720 MHz	
Carrier frequency stability:	☐ specified	☒ not specified
Maximum frequency tolerances:	---	
Bandwidth of the emission:	720 M Hz	within permitted frequency band ⁵ : ☒ yes ☐ no

Test Result:	Test passed
--------------	-------------

⁵ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Comment:	Transmitting continuously on middle channel
Date of test:	January 10, 2012
Test site:	Fully anechoic room, cabin no. 2

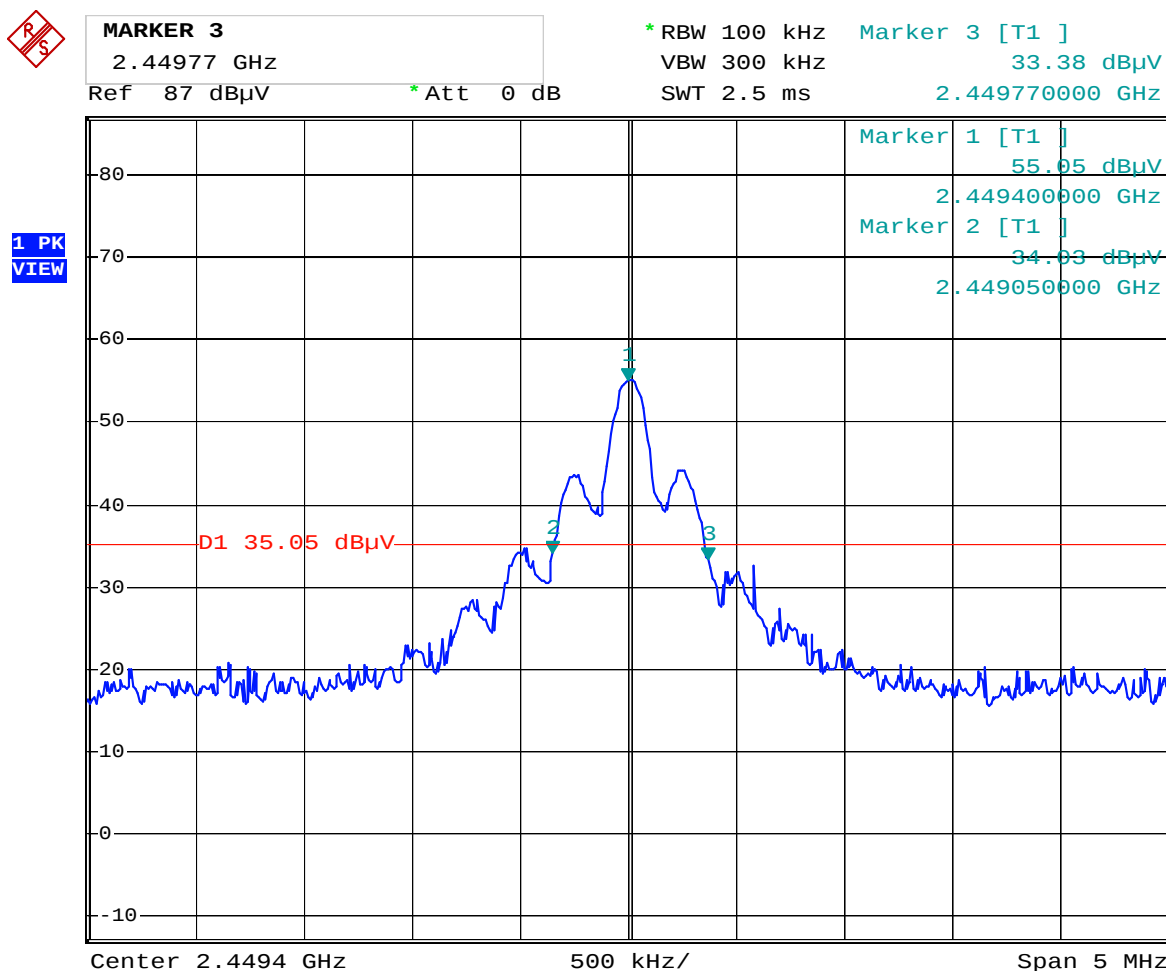


Date: 10.JAN.2012 10:50:38

Permitted frequency band:	2400.0 - 2483.5 MHz	
20 dB bandwidth:	720 M Hz	
Carrier frequency stability:	☐ specified	☒ not specified
Maximum frequency tolerances:	---	
Bandwidth of the emission:	720 M Hz	within permitted frequency band ⁶ : ☒ yes ☐ no

Test Result:	Test passed
--------------	-------------

⁶ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Comment:	Transmitting continuously on highest channel
Date of test:	January 10, 2012
Test site:	Fully anechoic room, cabin no. 2

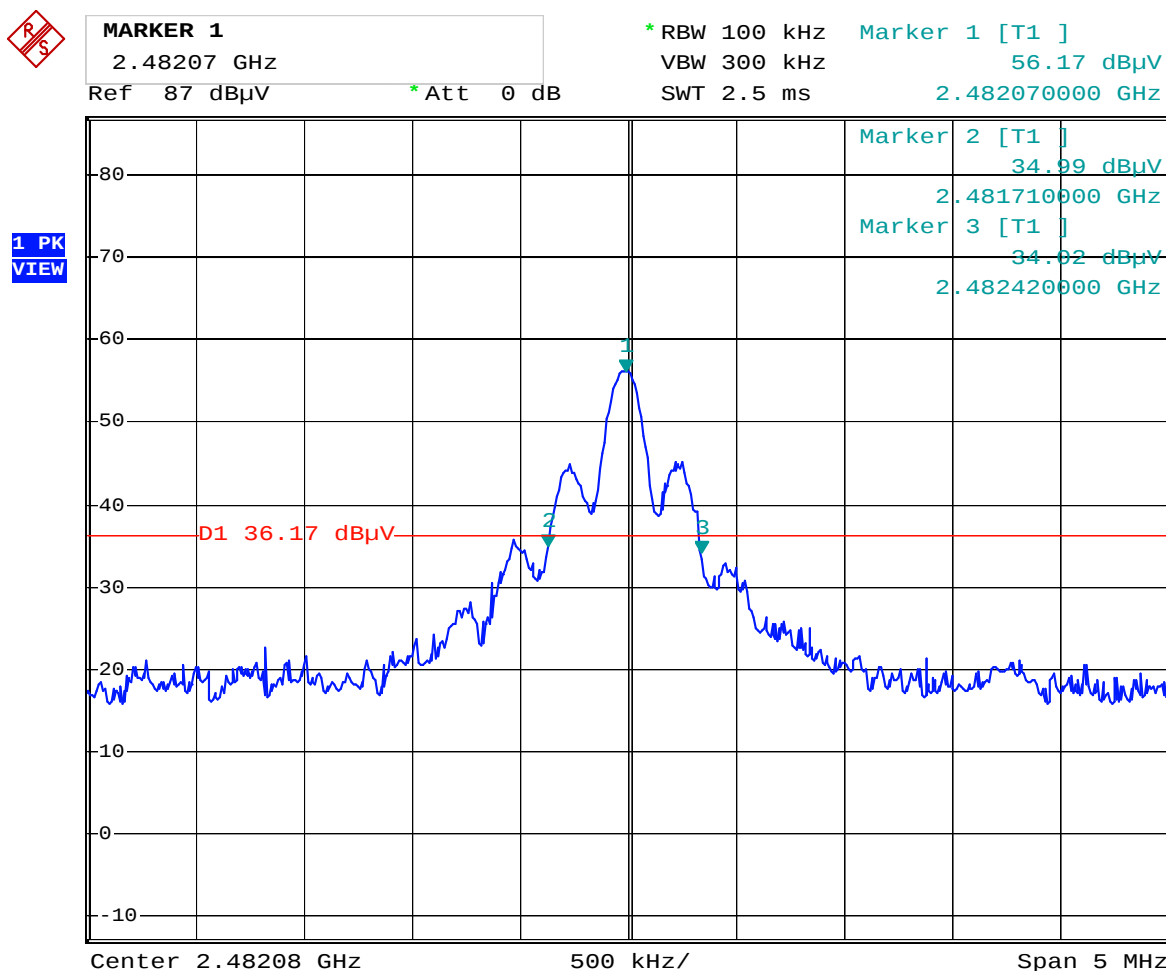

Date: 10.JAN.2012 10:26:30

Permitted frequency band:	2400.0 - 2483.5 MHz	
20 dB bandwidth:	710 M Hz	
Carrier frequency stability:	☐ specified	☒ not specified
Maximum frequency tolerances:	---	
Bandwidth of the emission:	710 M Hz	within permitted frequency band ⁷ : ☒ yes ☐ no

Test Result:	Test passed
--------------	-------------

⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Type of modulation:	Minimum Shift Keying (MSK)
---------------------	----------------------------

B_n = Necessary Bandwidth	$B_n = 2KB$
K = Overall numerical factor	$K = 2.36$
B = Modulation rate	$B = 250 \text{ kHz}$
Calculation:	$B_n = 2 \cdot 2.36 \cdot (250 \text{ kHz}) = 1.18 \text{ MHz}$


Designation of Emissions:	1M18G1D
---------------------------	----------------

8.4 Restricted Bands of Operation


Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 8, section 7.2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 7, section 2.2(a).
Measurement procedure:	Radiated Emission in Fully or Semi Anechoic Room (6.4)

Test Result:	Test passed
--------------	-------------

Comment:	Transmitting continuously on lowest channel
Date of test:	January 10, 2012
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

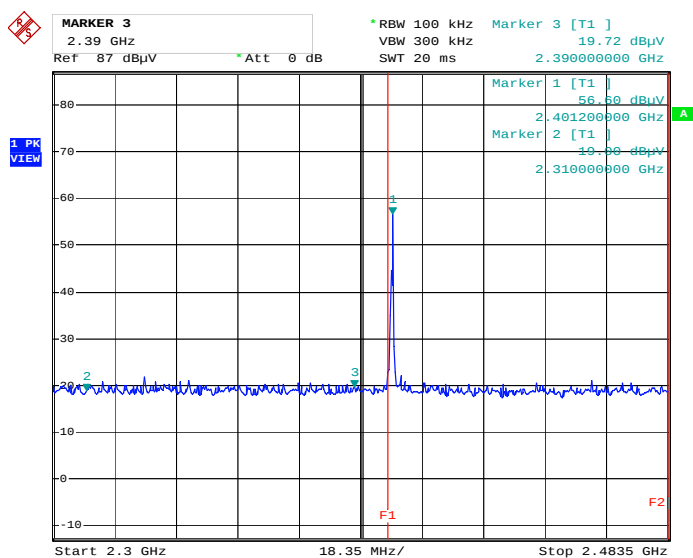


Date: 10.JAN.2012 10:45:47

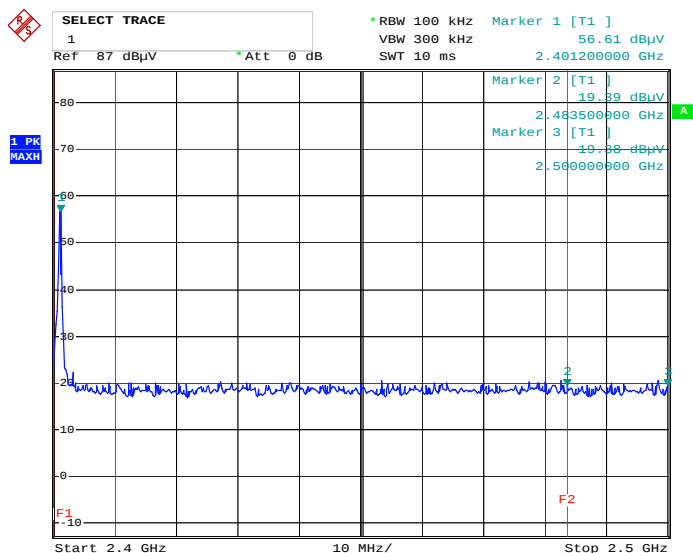


Date: 10.JAN.2012 10:44:48

Test Result:	Test passed
--------------	-------------

Comment:	Transmitting continuously on middle channel
Date of test:	January 10, 2012
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

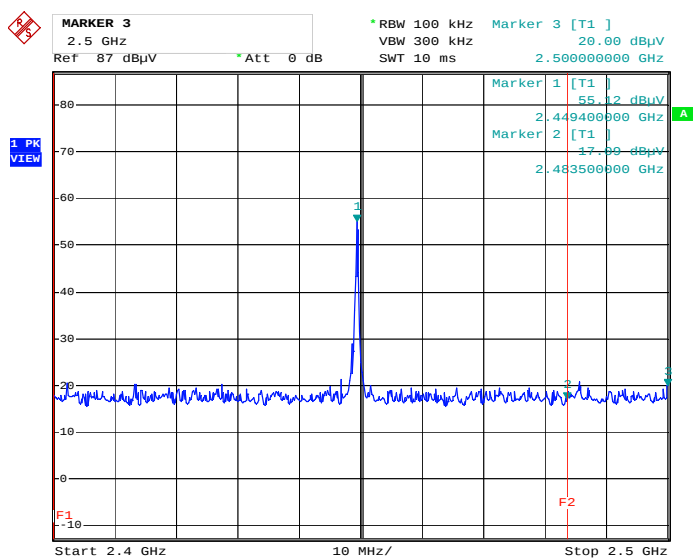


Date: 10. JAN. 2012 10:52:08

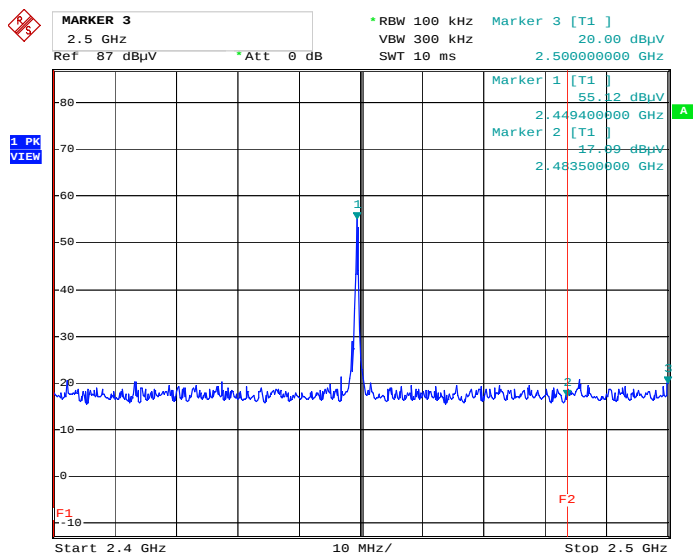


Date: 10. JAN. 2012 10:52:08

Test Result:	Test passed
--------------	-------------

Comment:	Transmitting continuously on highest channel
Date of test:	January 10, 2012
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

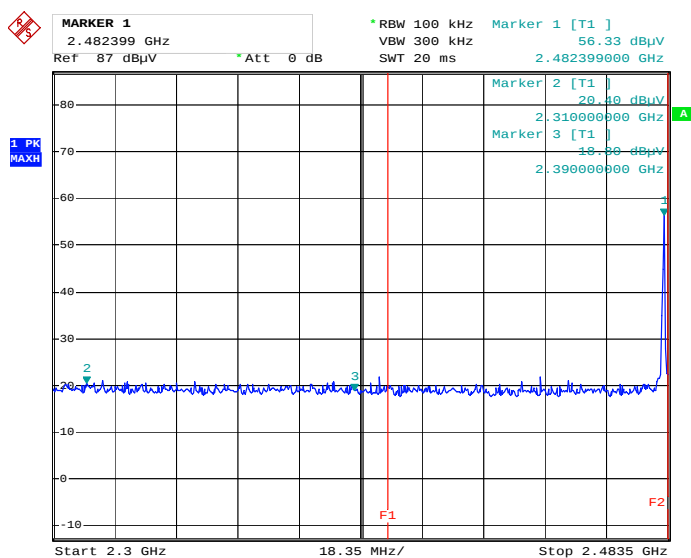

Date: 10.JAN.2012 10:40:34

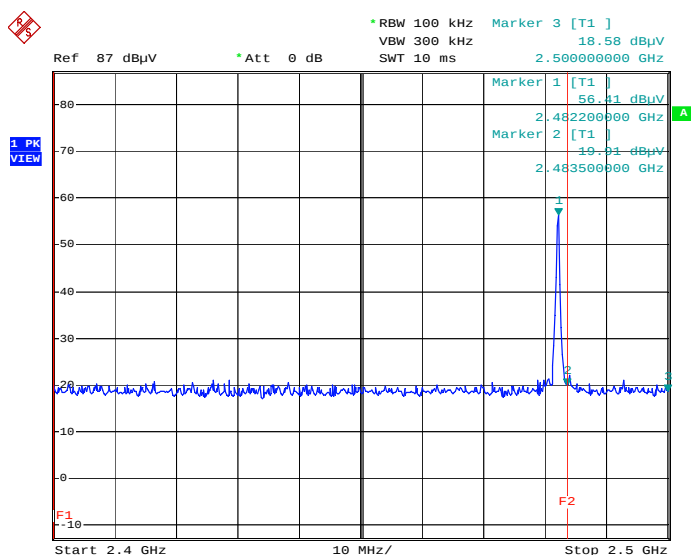

Date: 10.JAN.2012 10:41:08

Test Result:	Test passed
--------------	-------------

8.5 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 3, section 7.2.4		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	Transmitting continuously at middle channel
Date of test:	January 12, 2012
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------

Tested on: L1

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.175	Quasi-Peak	44.7	0.0	44.7	64.7	20.0
0.205	Quasi-Peak	43.1	0.0	43.1	63.4	20.3
0.330	Quasi-Peak	39.0	0.0	39.0	59.5	20.5

Tested on: N

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.180	Quasi-Peak	43.2	0.0	43.2	64.5	21.3
0.200	Quasi-Peak	42.9	0.0	42.9	63.6	20.7
0.330	Quasi-Peak	35.9	0.0	35.9	59.5	23.6

Sample calculation of final values:

$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$

8.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3) IC RSS-210 Issue 8, section A1.1.2(b)			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance d (meters)
	0.009 - 0.490	$2400/F(\text{kHz})$	$67.6 - 20 \cdot \log(F(\text{kHz}))$	300
	0.490 - 1.705	$24000/F(\text{kHz})$	$87.6 - 20 \cdot \log(F(\text{kHz}))$	30
	1.705 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	Transmitting continuously at lowest channel
Date of test:	January 10, 2012
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

No emissions above noise level detected

Sample calculation of final values:

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB $\mu\text{V/m}$) are relating to distance d.

Comment:	Transmitting continuously at middle channel
Date of test:	January 10, 2012
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

No emissions above noise level detected

Sample calculation of final values:

$$\begin{aligned}\text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}\end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

Comment:	Transmitting continuously at highest channel
Date of test:	January 10, 2012
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

No emissions above noise level detected

Sample calculation of final values:

$$\begin{aligned}\text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}\end{aligned}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

8.7 Radiated Emission Measurement 30 MHz to 25 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 8, section A2.9		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:	Transmitting continuously at lowest channel		
Date of test:	December 21, 2011; January 9, 2012; January 10, 2012; January 11, 2012; January 12, 2012		
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2		
Test distance:	Frequencies ≤ 8.2 GHz:	3 m	
	Frequencies > 8.2 GHz and ≤ 18 GHz:	1 m	
	Frequencies > 18 GHz:	0.5 m	

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2401.200	vertical	Peak	57.1	33.4		90.5	94.0	3.5
4801.200	horizontal	Peak	11.4	34.3		45.6	54.0	8.4

Sample calculation of final values:

$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

Comment:	Transmitting continuously at middle channel		
Date of test:	December 21, 2011; January 9, 2012; January 10, 2012; January 11, 2012; January 12, 2012		
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2		
Test distance:	Frequencies ≤ 8.2 GHz:	3 m	
	Frequencies > 8.2 GHz and ≤ 18 GHz:	1 m	
	Frequencies > 18 GHz:	0.5 m	

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBμV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2449.520	vertical	Peak	54.8	33.5		88.3	94.0	5.7
4900.000	horizontal	Peak	10.5	34.4		44.8	54.0	9.2

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

Comment:	Transmitting continuously at highest channel
Date of test:	December 21, 2011; January 9, 2012; January 10, 2012; January 11, 2012; January 12, 2012
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	Frequencies ≤ 8.2 GHz: 3 m Frequencies > 8.2 GHz and ≤ 18 GHz: 1 m Frequencies > 18 GHz: 0.5 m

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBμV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2482.200	vertical	Peak	56.2	33.6		89.8	94.0	4.2
4964.600	horizontal	Peak	10.6	34.4		45.0	54.0	9.0

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

9 Test Results for Receiver

FCC CFR 47 Part 15			
Section(s)	Test	Page	Result
15.107	Conducted AC powerline emission 150 kHz to 30 MHz	54	Test passed
15.109	Radiated emission 30 MHz to 12.5 GHz	56	Test passed
15.111(a)	Antenna power conduction emission of receivers 9 kHz to 12.5 GHz	---	Not applicable

IC RSS-Gen Issue 3			
Section(s)	Test	Page	Result
7.2.4	Conducted AC powerline emission 150 kHz to 30 MHz	54	Test passed
6.1	Receiver spurious emissions (radiated) 30 MHz to 12.5 GHz	56	Test passed
6.2	Receiver spurious emissions (antenna conducted) 9 kHz to 12.5 GHz	---	Not applicable

9.1 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.107 IC RSS-Gen Issue 3, section 7.2.4		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	Receiving mode
Date of test:	January 12, 2012
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------

Tested on:	L1
------------	----

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.175	Quasi-Peak	45.4	0.0	45.4	64.7	19.3
0.200	Quasi-Peak	44.6	0.0	44.6	63.6	19.0
0.330	Quasi-Peak	38.5	0.0	38.5	59.5	21.0
0.355	Quasi-Peak	35.4	0.0	35.4	58.8	23.4

Tested on:	N
------------	---

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.175	Quasi-Peak	43.7	0.0	43.7	64.7	21.0
0.200	Quasi-Peak	42.9	0.0	42.9	63.6	20.7
0.330	Quasi-Peak	35.5	0.0	35.5	59.5	24.0

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

9.2 Radiated Emission Measurement 30 MHz to 12.5 GHz

Rules and specifications:	CFR 47 Part 15, section 15.109 (Class B) IC RSS-Gen Issue 3, sections 6.1		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:	Receiving continuously
Date of test:	December 21, 2011; January 10, 2012; January 11, 2012
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	Frequencies ≤ 8.2 GHz: 3 m Frequencies > 8.2 GHz and ≤ 18 GHz: 1 m Frequencies > 18 GHz: 0.5 m

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4900.000	vertical	Peak	11.2	34.4	45.6	54.0	8.4

Sample calculation of field final values:

$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)}$$

10 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2011
☒	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2011
☒	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
☐	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 7, 2009 (published on September 15, 2009)
☒	RSS-Gen	Radio Standards Specification RSS-Gen Issue 3 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	December 2010
☒	RSS-210	Radio Standards Specification RSS-210 Issue 8 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	December 2011
☐	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
☒	RSS-102	Radio Standards Specification RSS-102 Issue 4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2010
☐	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
☒	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997

☐	CAN/CSA- CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
		CAN/CSA CISPR 22-10 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	
☐	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010
☒	TRC-43	Notes Regarding Designation of Emissions (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October, 2008


11 Test Equipment List with Calibration Data


Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	1028	ESHS10	860043/016	Rohde & Schwarz	Rohde & Schwarz	10/2010	04/2012
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	12/2010	06/2012
Spectrum analyser	1666	FSP30	100063	Rohde & Schwarz	Rohde & Schwarz	05/2011	11/2012
Preamplifier	1484	ACO/180-3530	32641	CTT	TÜV SÜD SENTON	06/2011	12/2012
Preamplifier	1651	CPA9231A	3393	Schaffner Electrotest	TÜV SÜD SENTON	05/2010	05/2012
Preamplifier	1684	AFS3-00100800-32-LN	847743	MITEQ	TÜV SÜD SENTON	10/2011	04/2013
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	08/2011	08/2013
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	05/2011	11/2012
Double ridged waveguide horn antenna	1516	3115	9508-4553	EMCO Elektronik	Seibersdorf Laboratories	10/2010	10/2012
TRILOG broadband antenna	1722	VULB 9163	9163-188	Schwarzbeck	Rohde & Schwarz	08/2010	02/2012
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	05/2011	11/2012
Horn Antenna	1012	3160-05	9112-1001	EMCO	---	No calibration required	
Horn Antenna	1013	3160-06	9112-1001	EMCO	---	No calibration required	
Horn Antenna	1014	3160-07	9112-1008	EMCO	---	No calibration required	
Horn Antenna	1015	3160-08	9112-1002	EMCO	---	No calibration required	
Horn Antenna	1265	3160-09	9403-1025	EMCO	---	No calibration required	


12 Revision History


Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	27.02.2012	Martin Steindl (az)	First Edition
2	29.03.2012	M. Steindl	Correction of date for radiated emission 9 kHz – 30 MHz. Dead hyperlink-references deleted.


Annex A Charts taken during testing

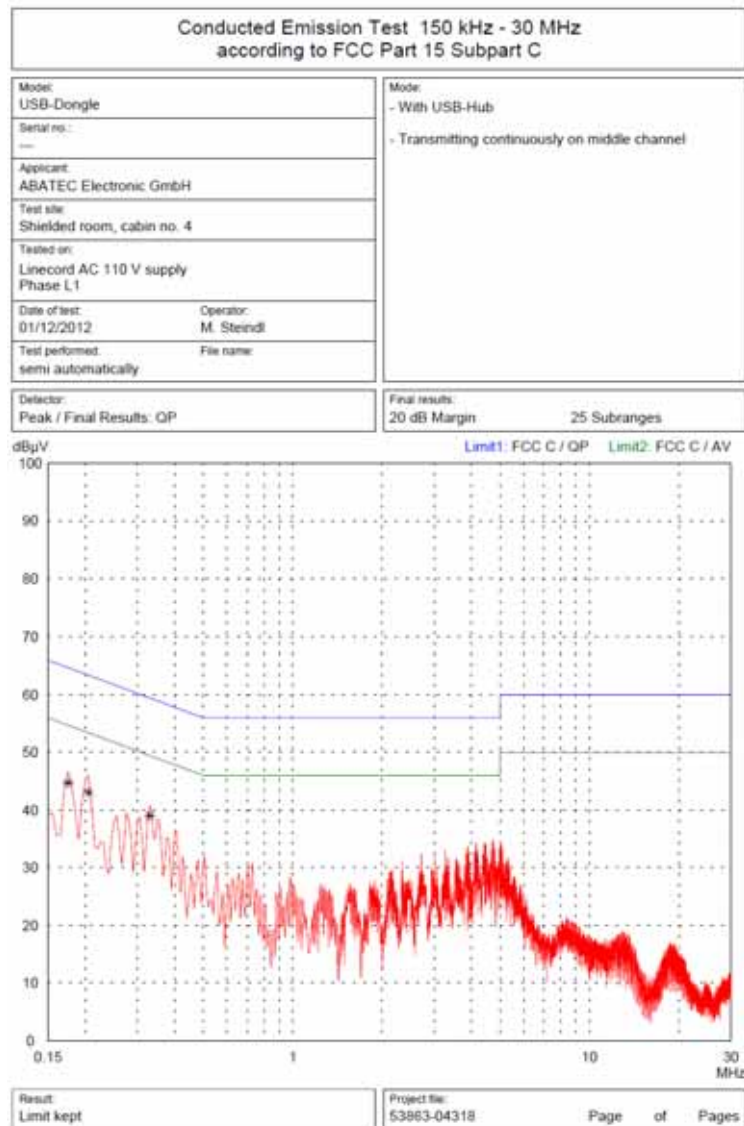


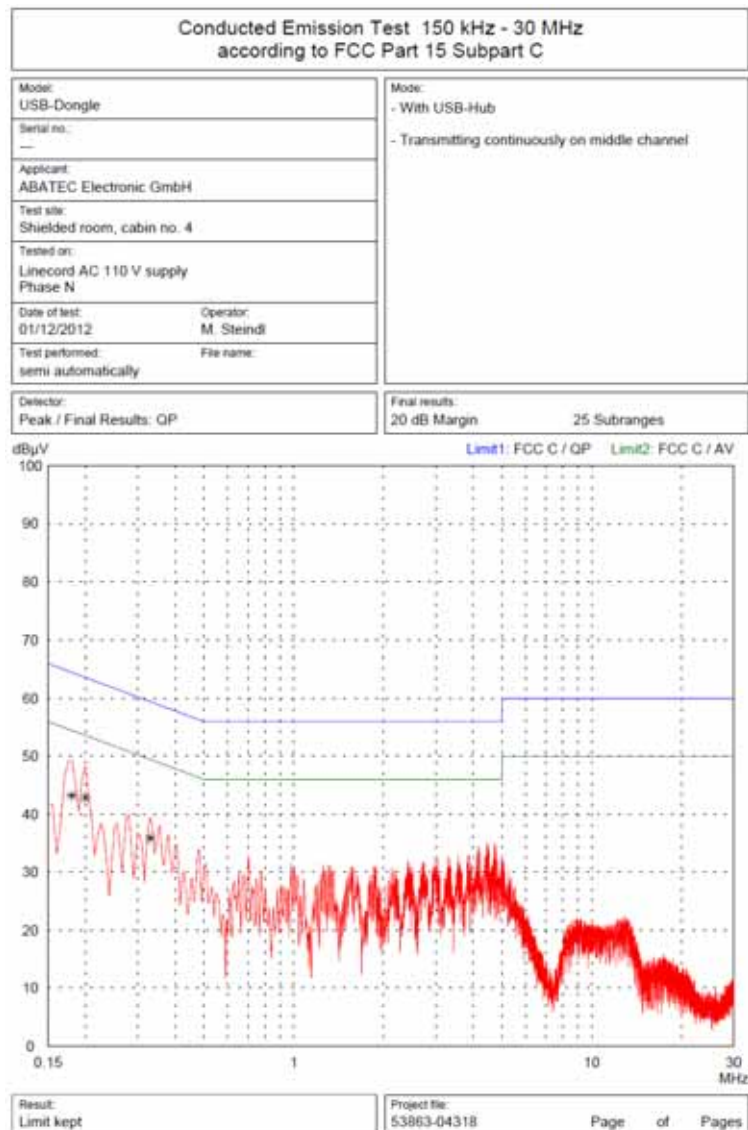


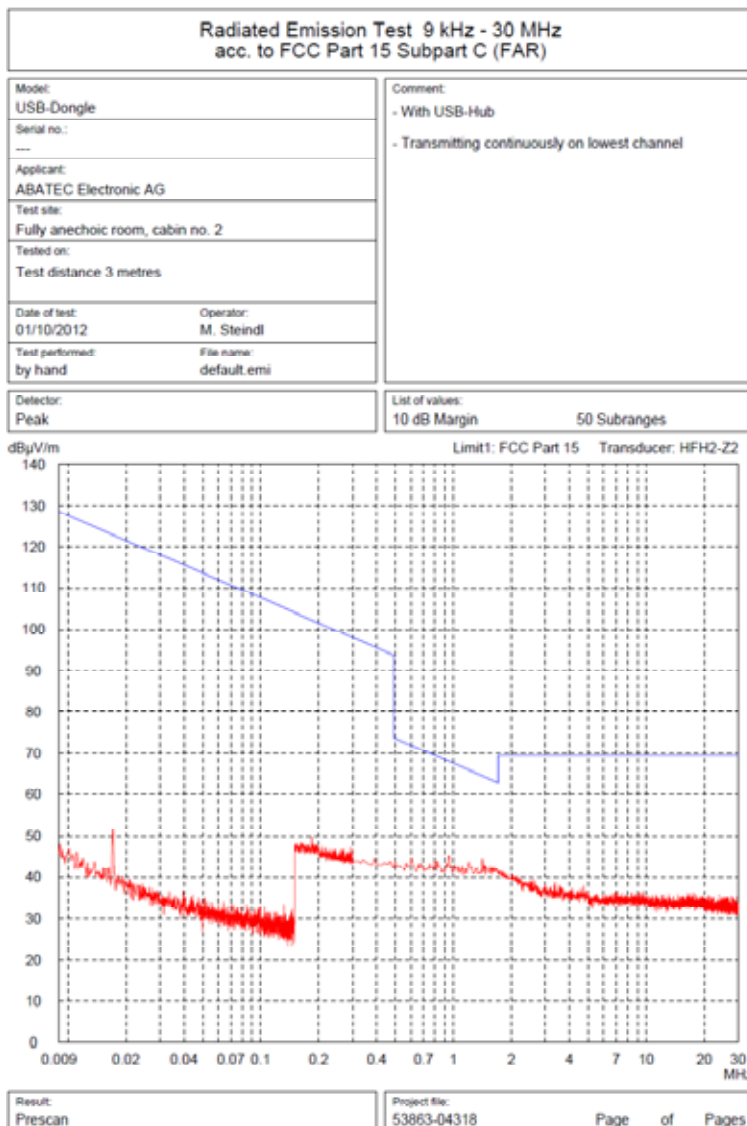


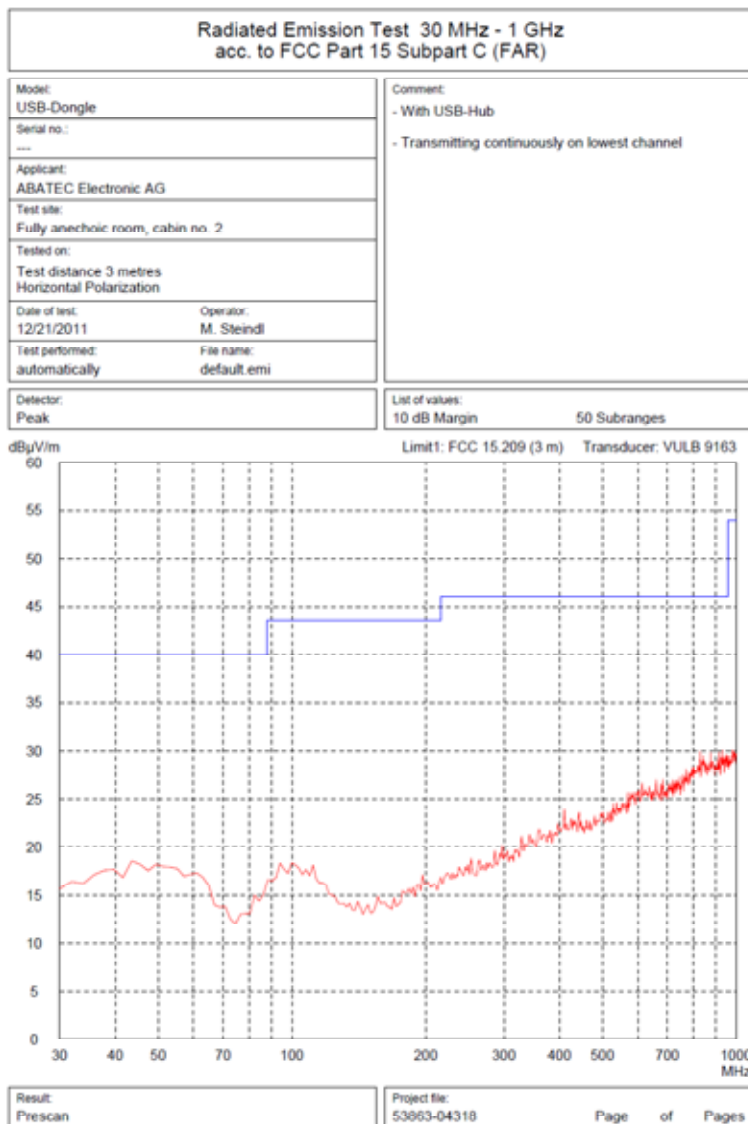


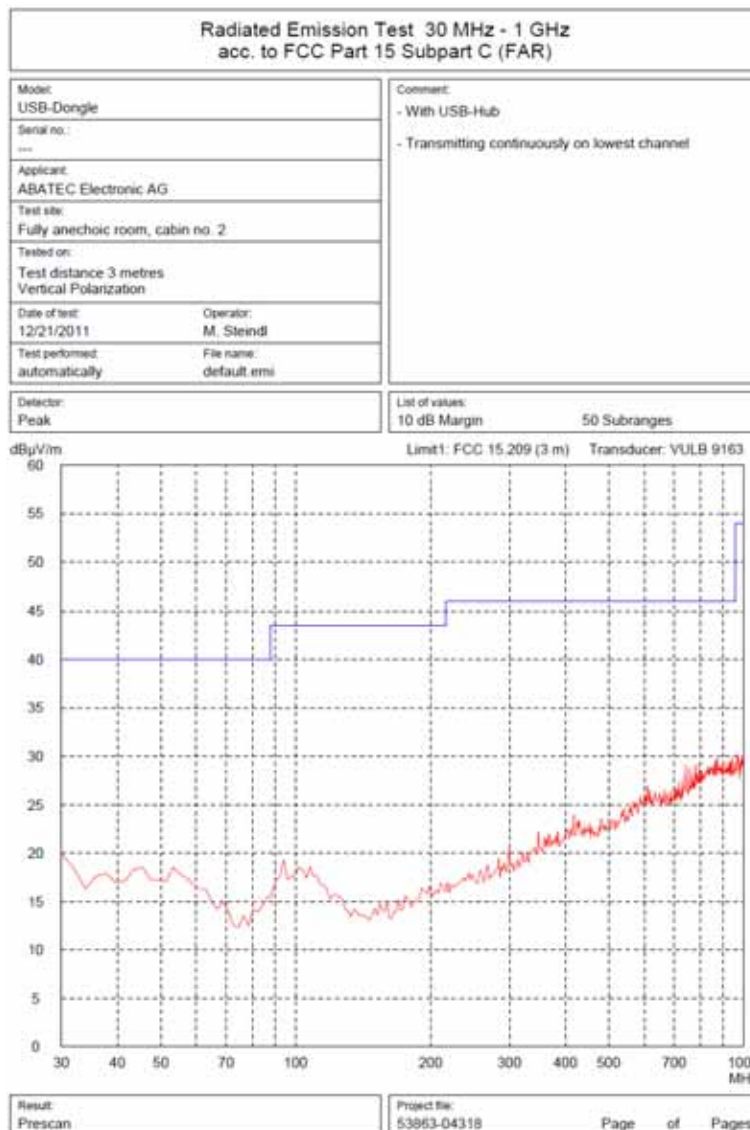


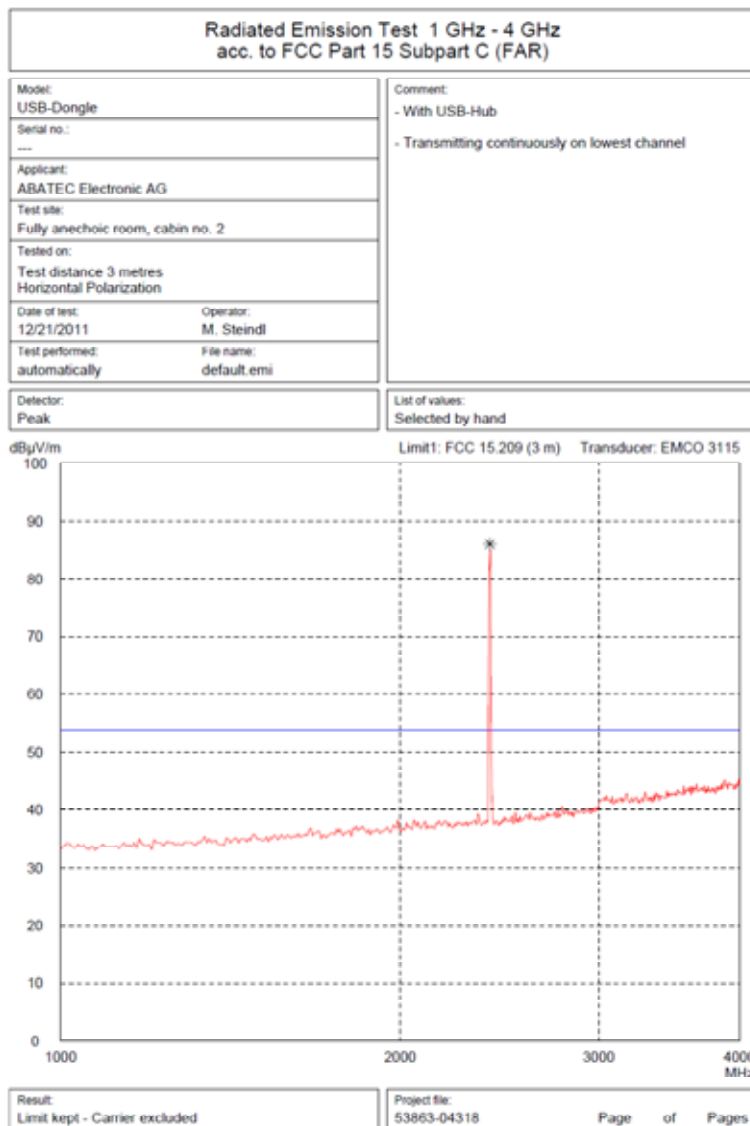


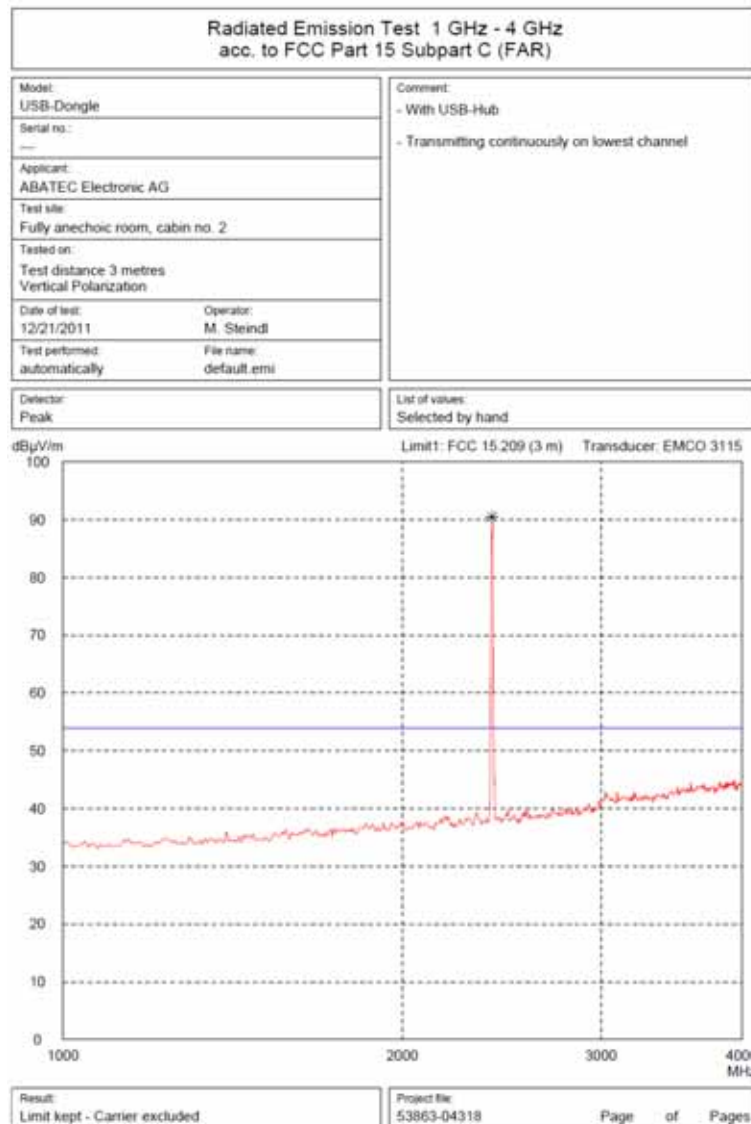


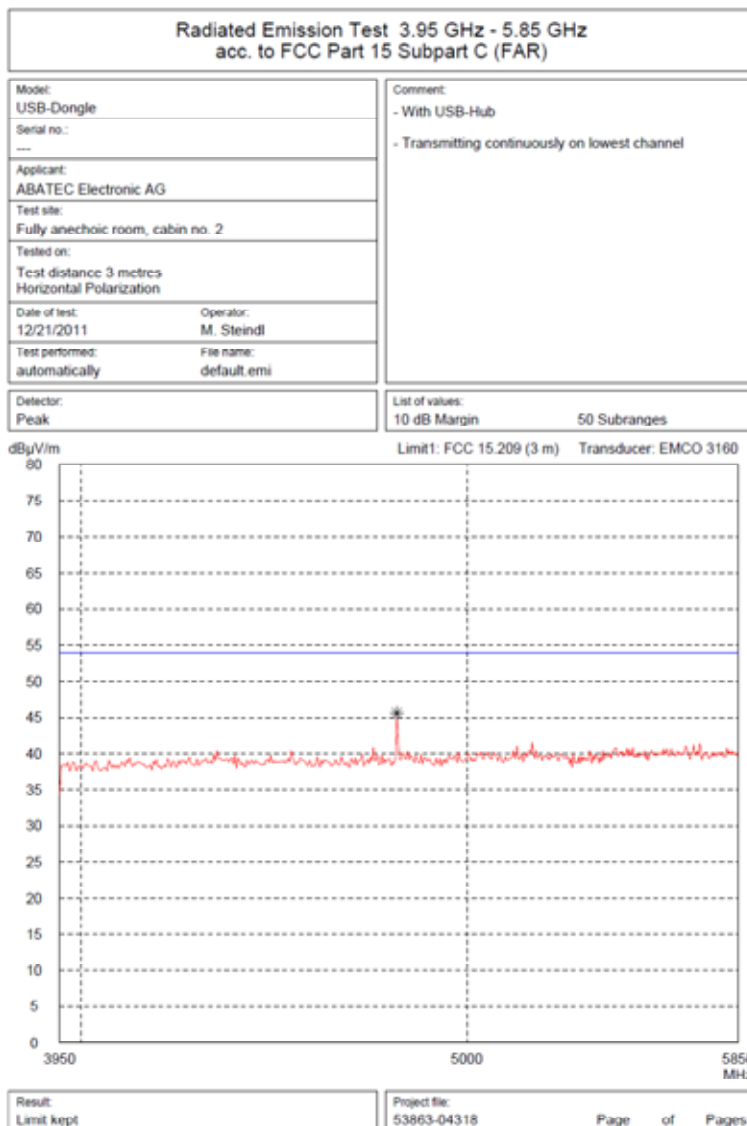


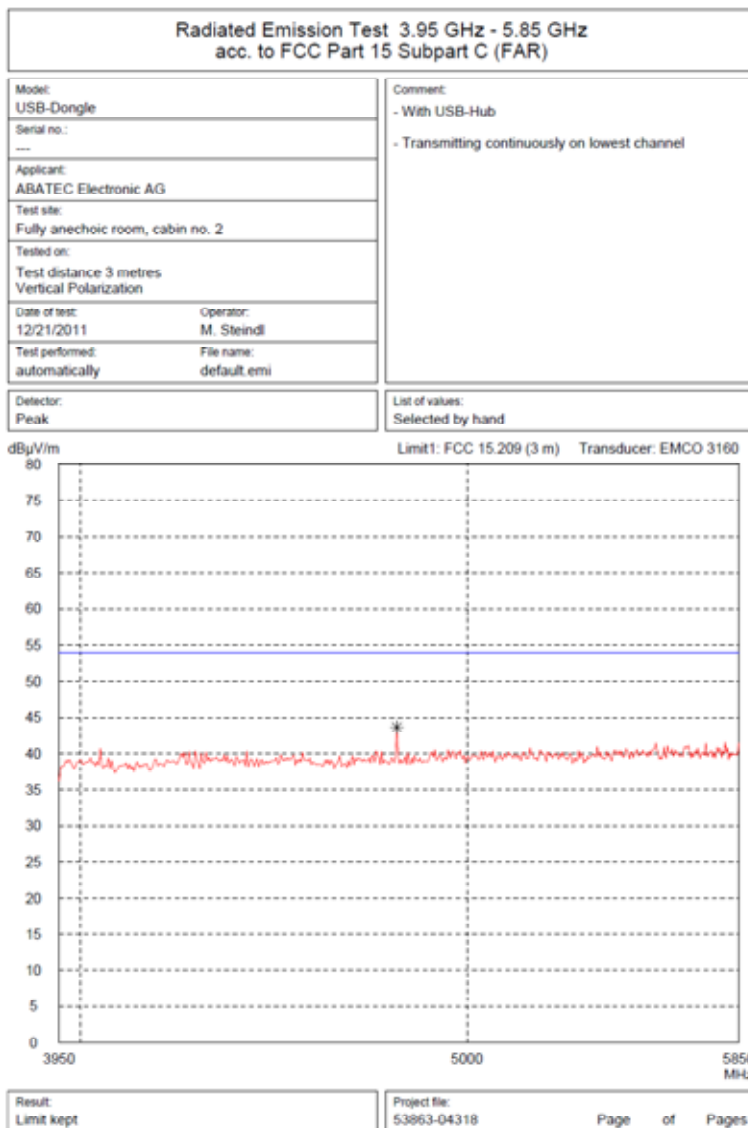


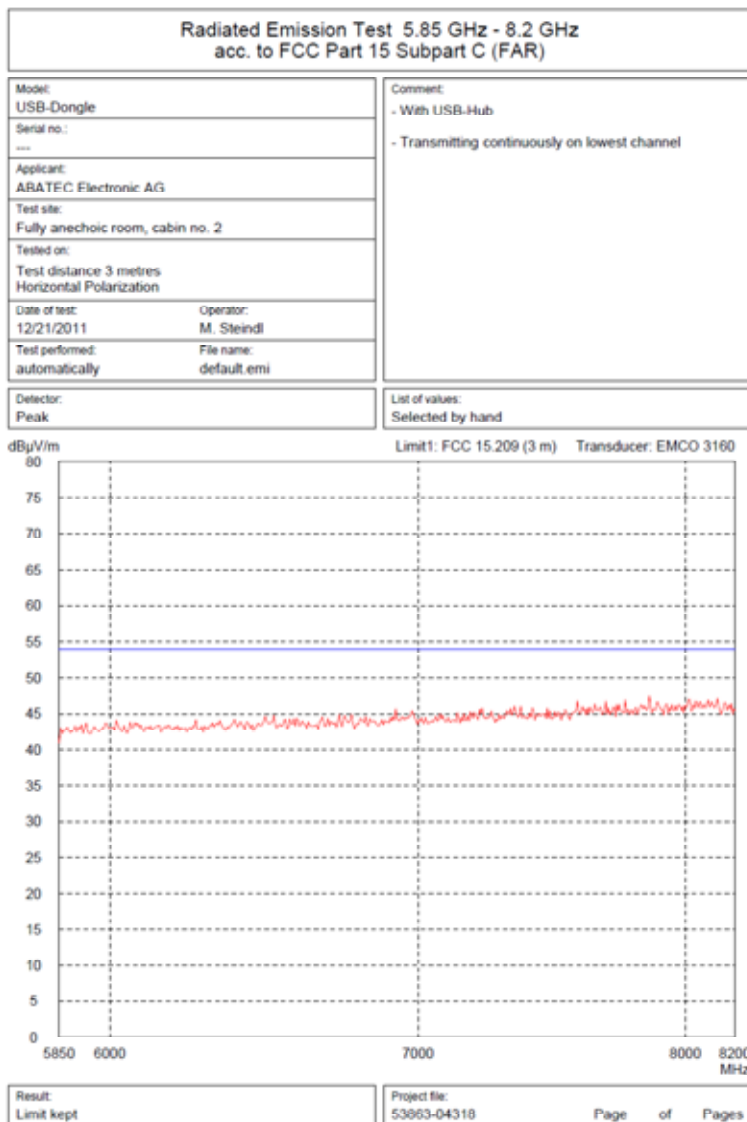


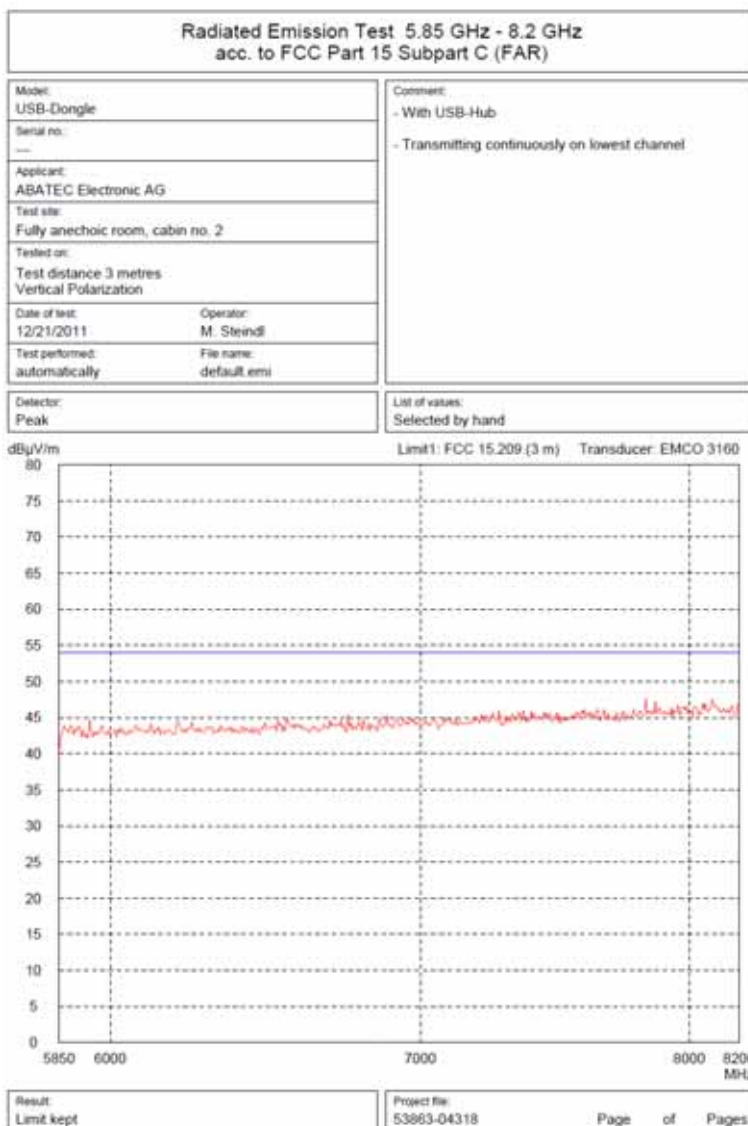


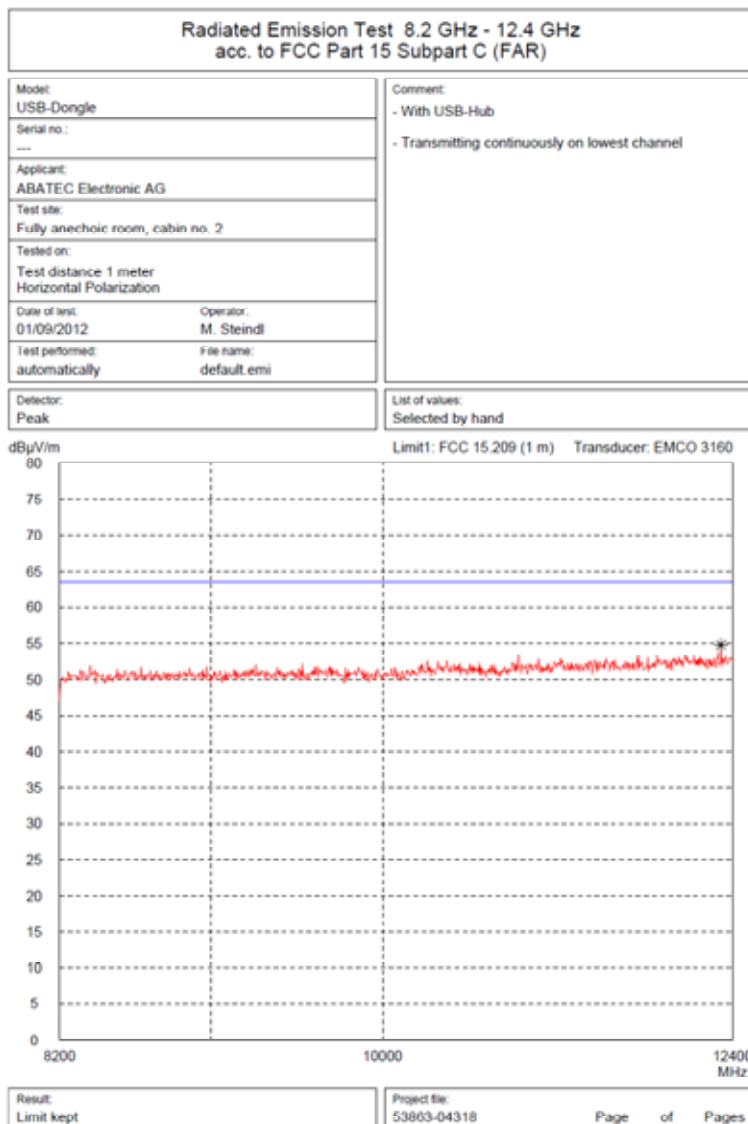


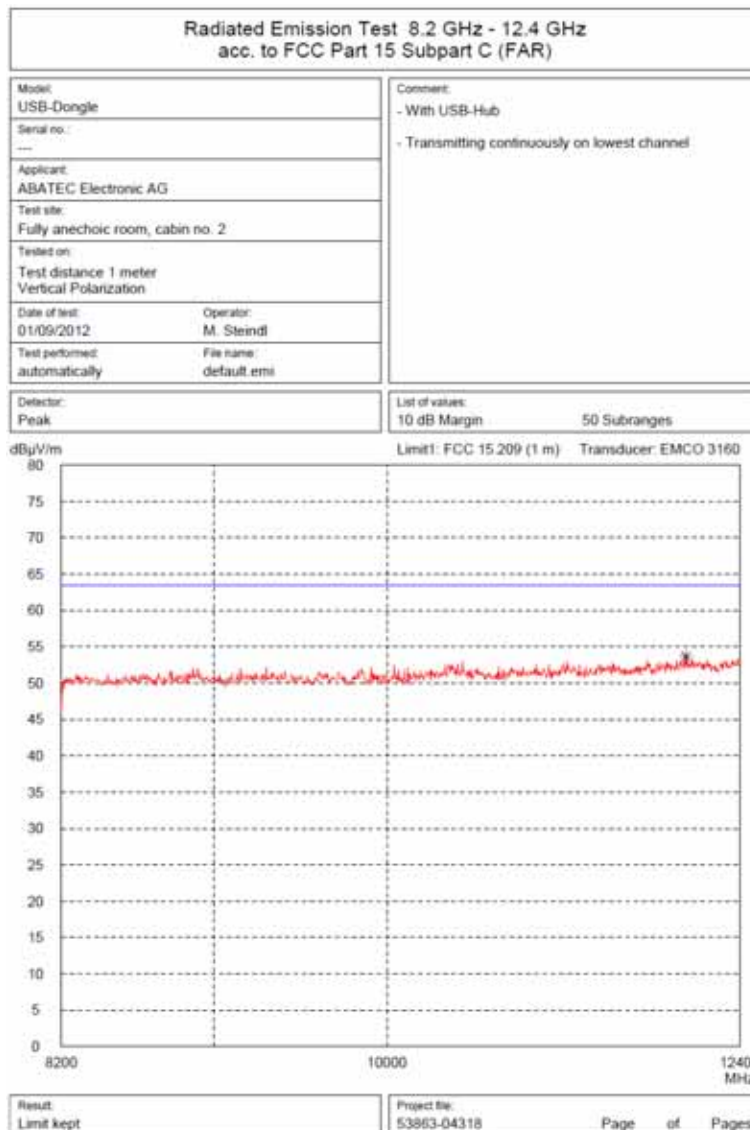


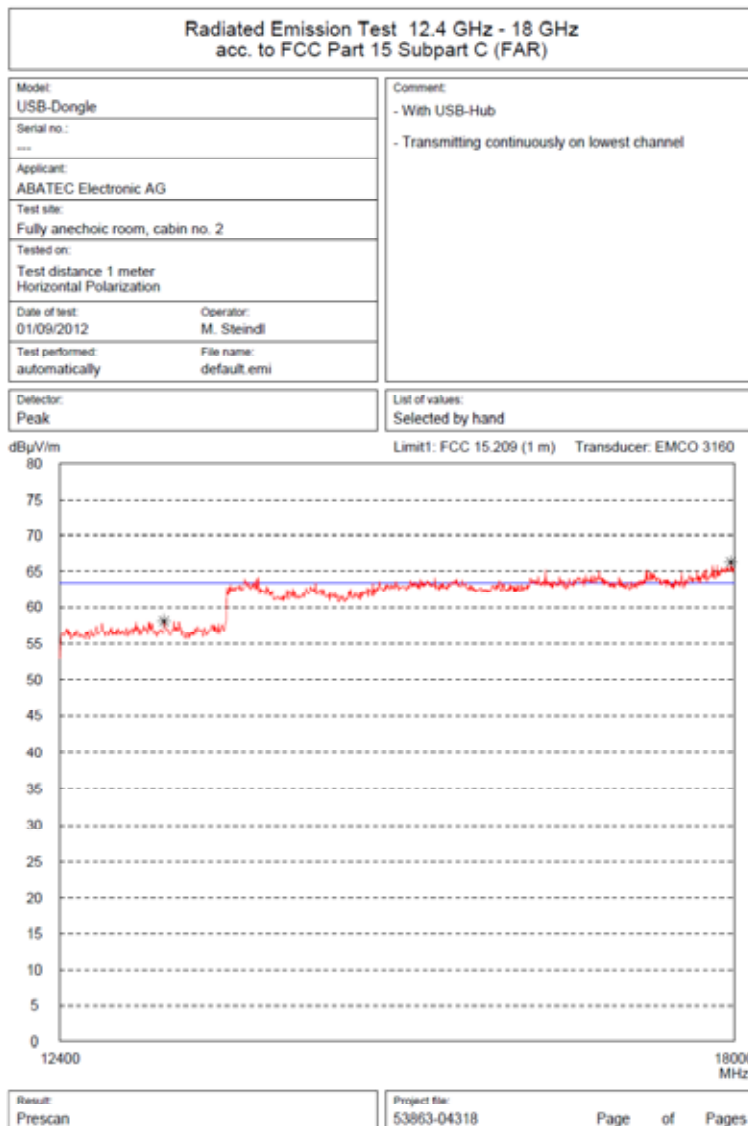


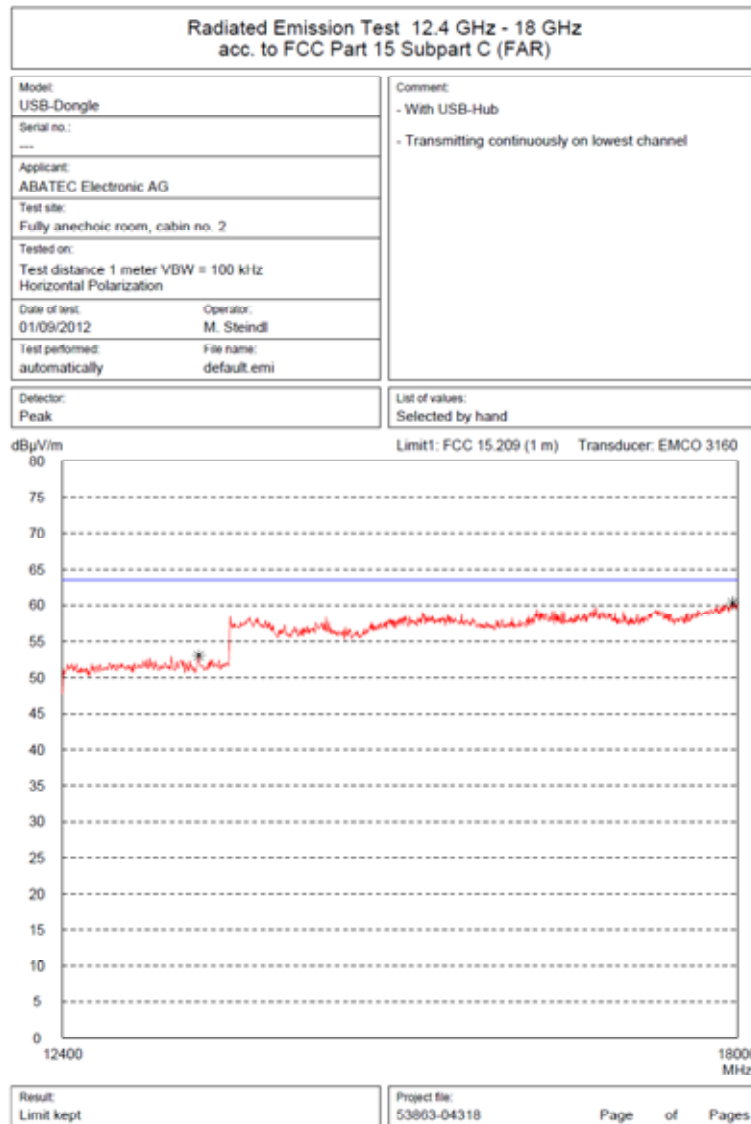


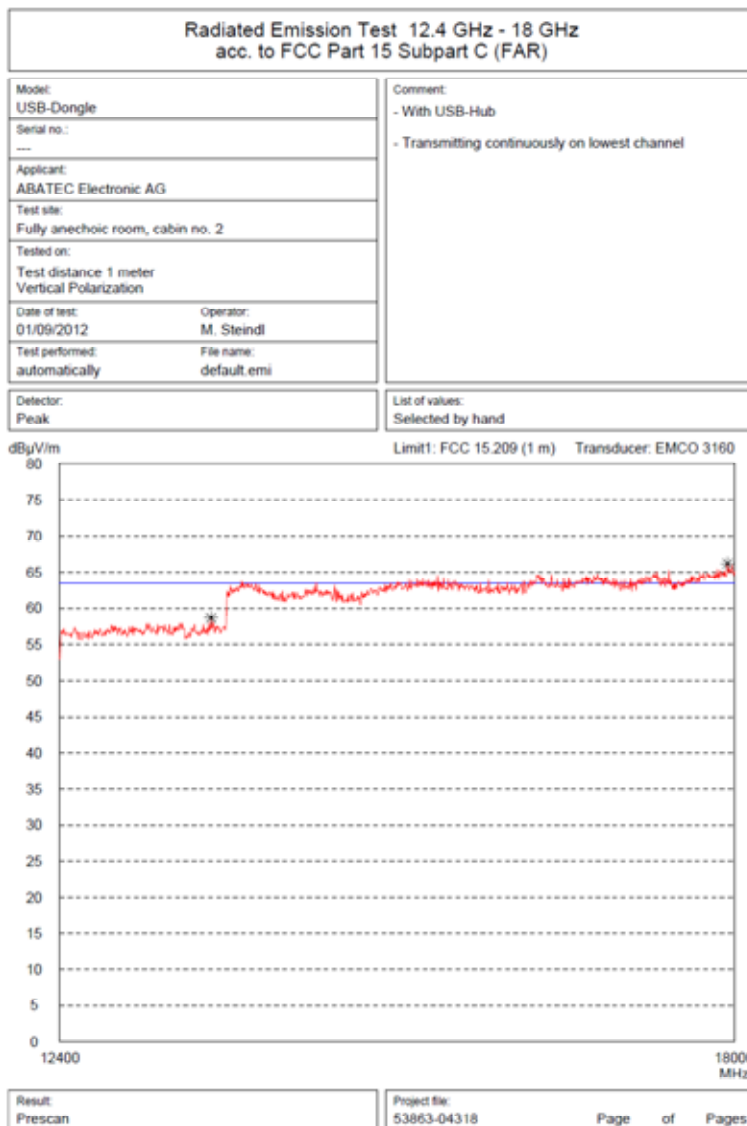


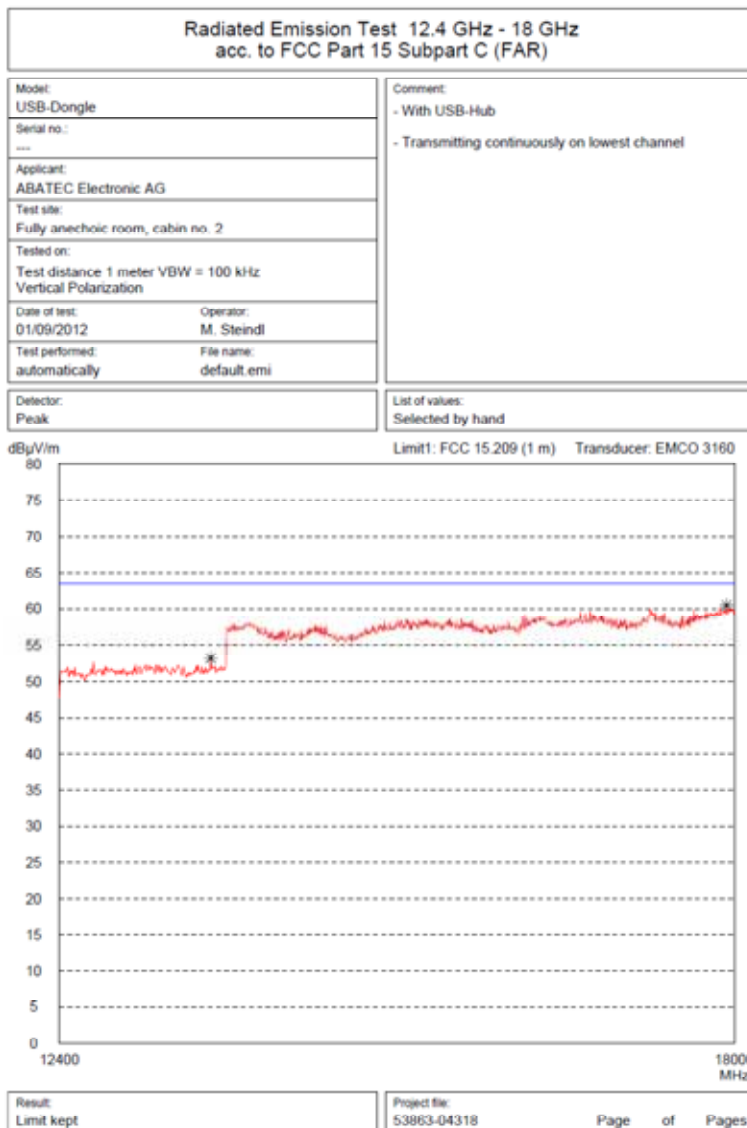


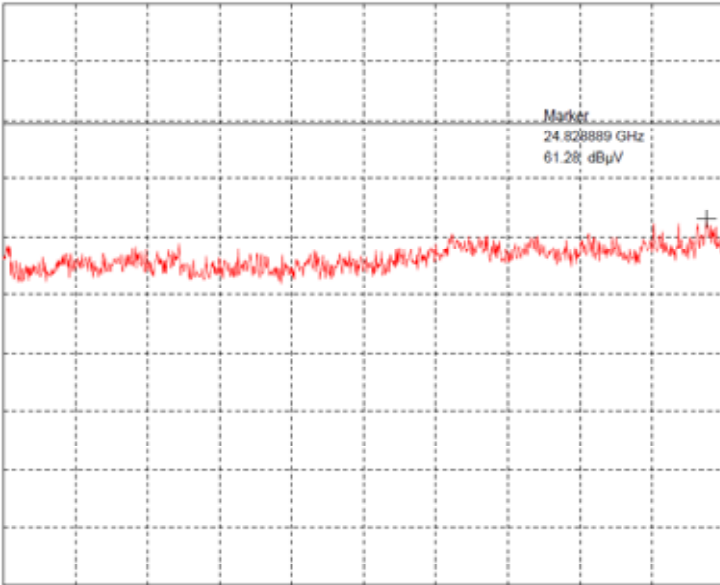
Radiated Emission Test acc. to FCC Part 15 Subpart C		
Model: USB-Dongle Serial No.: --- Applicant: ABATEC Electronic GmbH	Mode: - With USB-Hub - Transmitting continuously on lowest channel - Measurement parameters: * Test distance 50 cm * Horizontal Polarization	
Ref. Level 79.8 dBµV ATT 0 dB Ref. Offset 42.8 dB 5 dB/Div.		
 The plot shows a red signal trace on a grid. A peak is labeled 'Market' with a frequency of 24.828889 GHz and a level of 61.28 dBµV. The signal is noisy and fluctuates across the frequency range.		
Start 18.000 GHz Stop 25.000 GHz RBW 1 MHz VBW 1 MHz SWP 40 ms		
Tested by: M. Steindl Date: 2011-01-12	Project-No.: Page of pages	

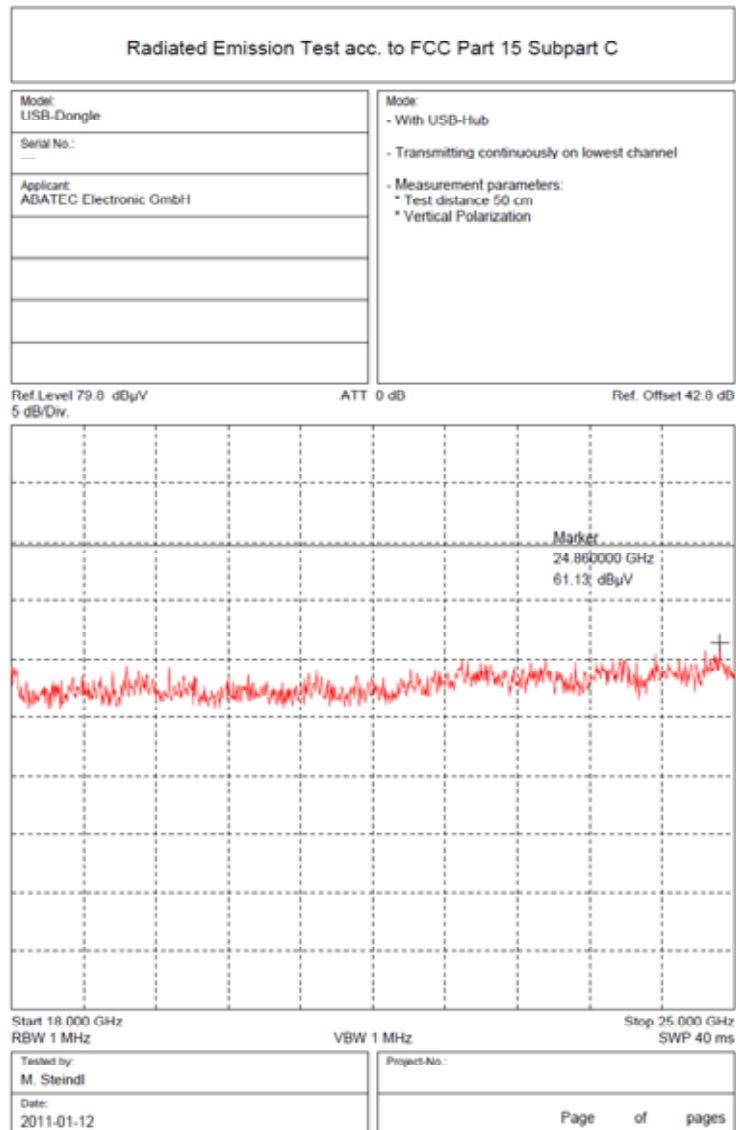


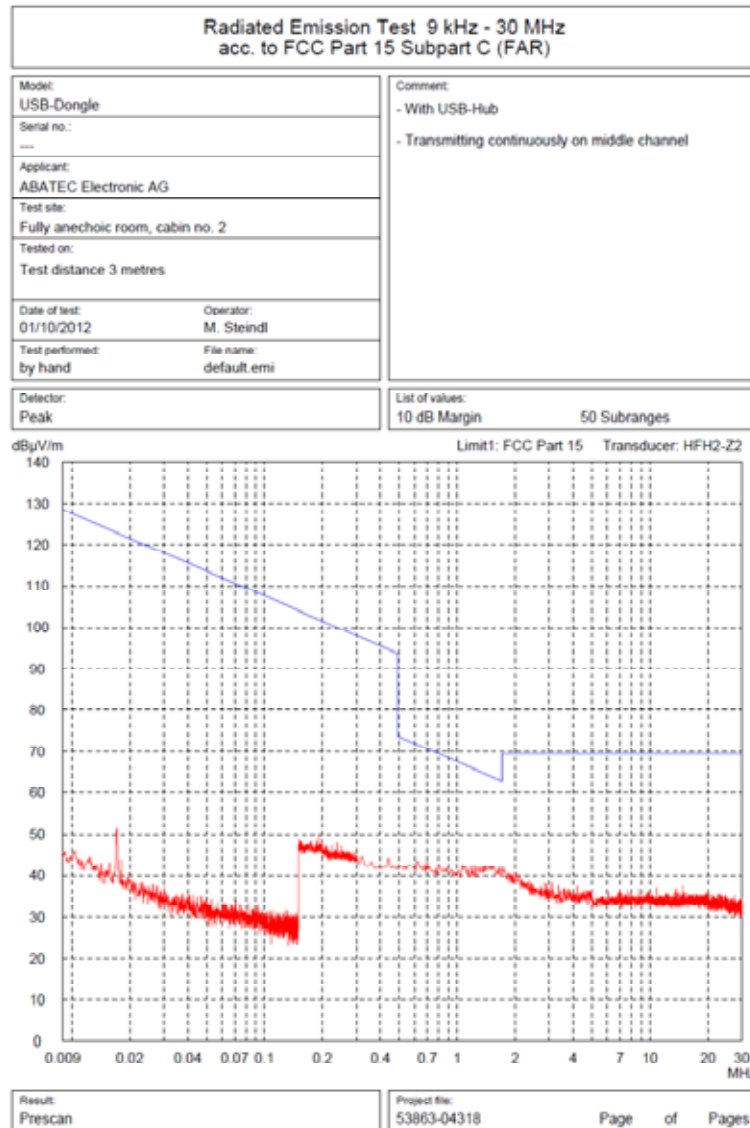


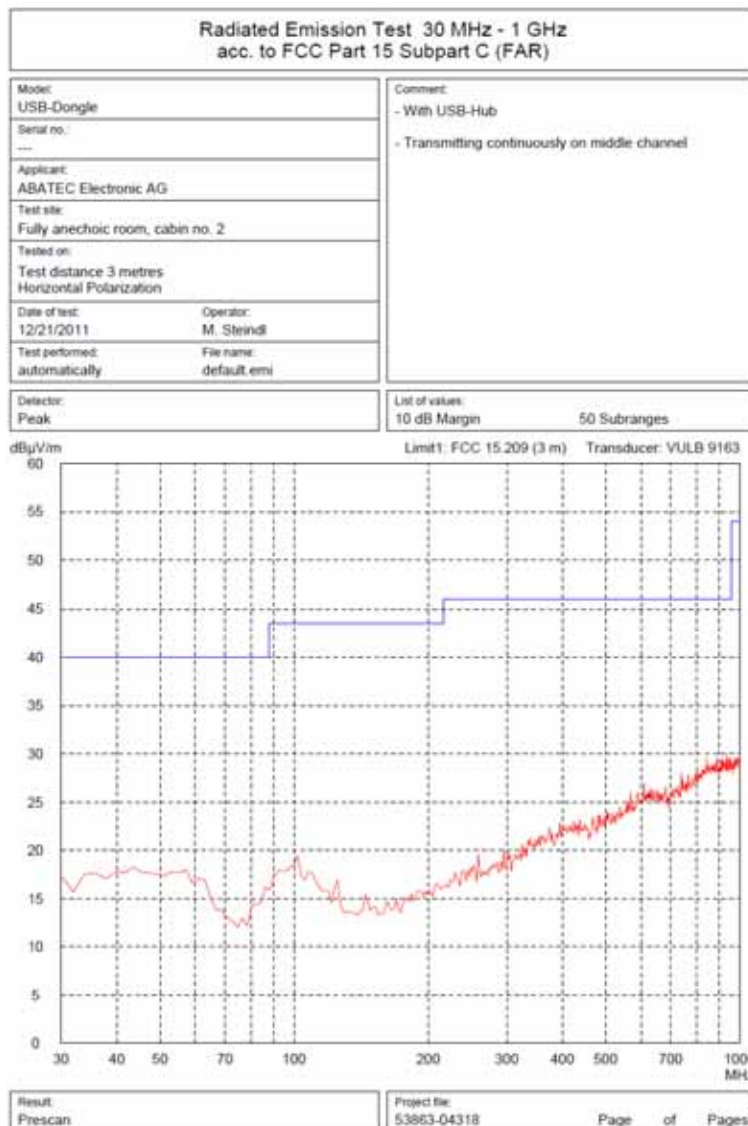


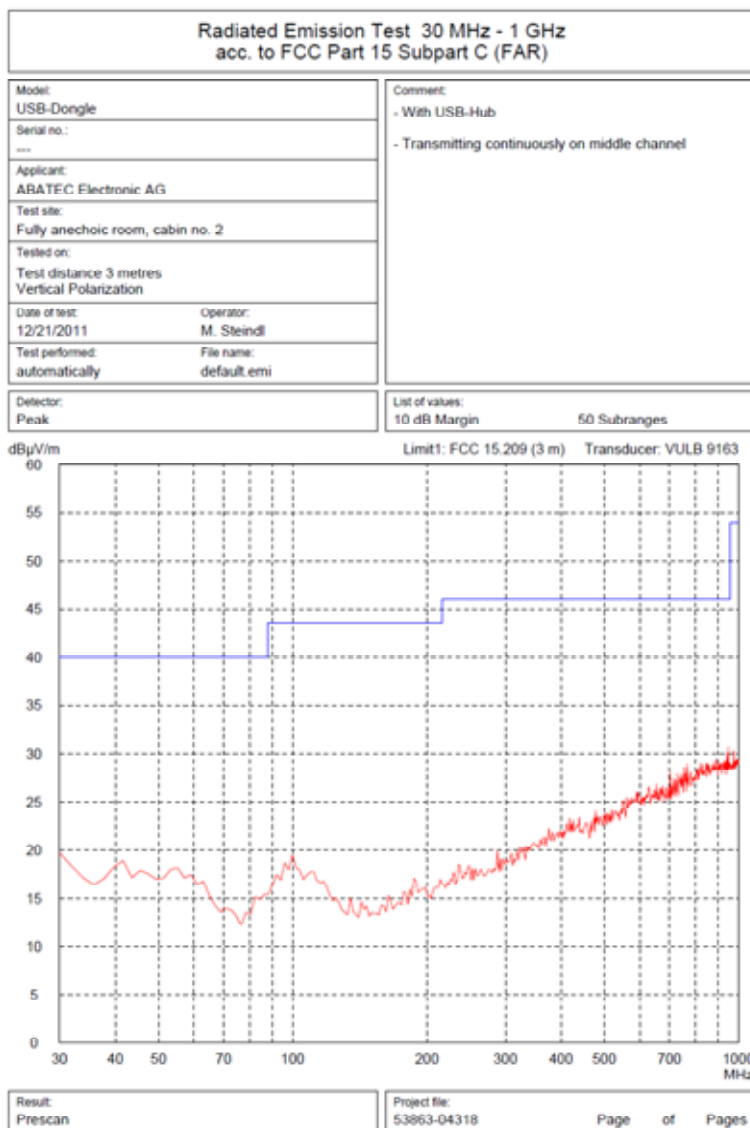


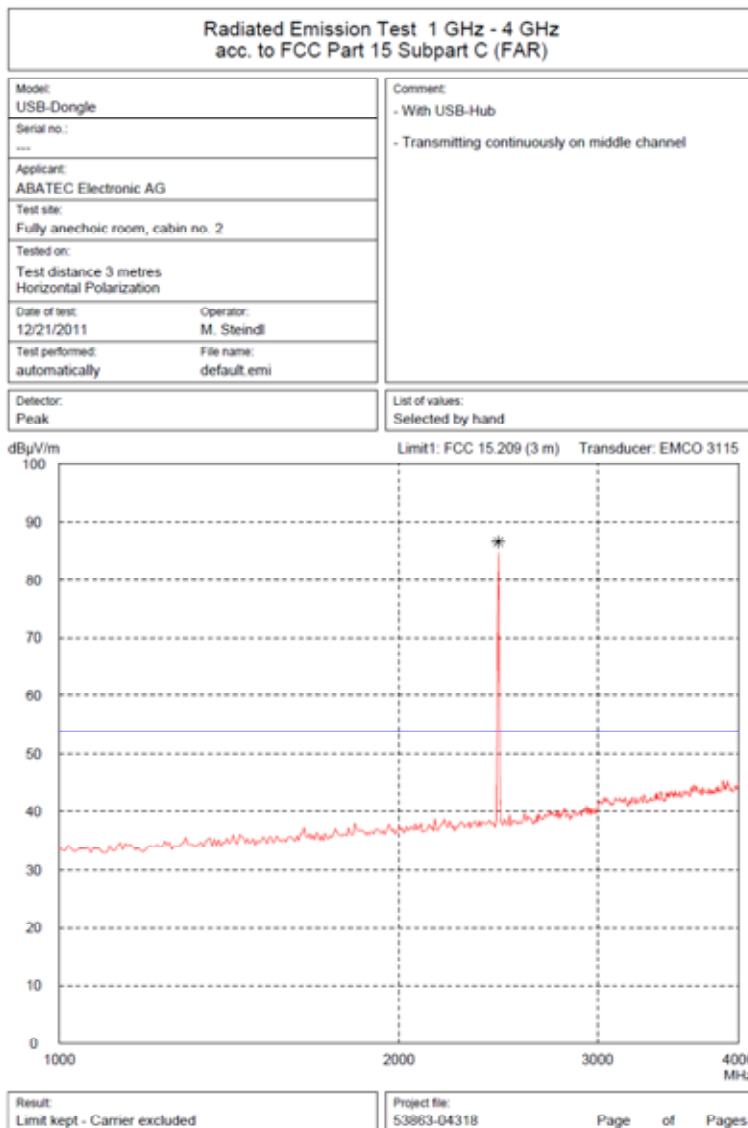


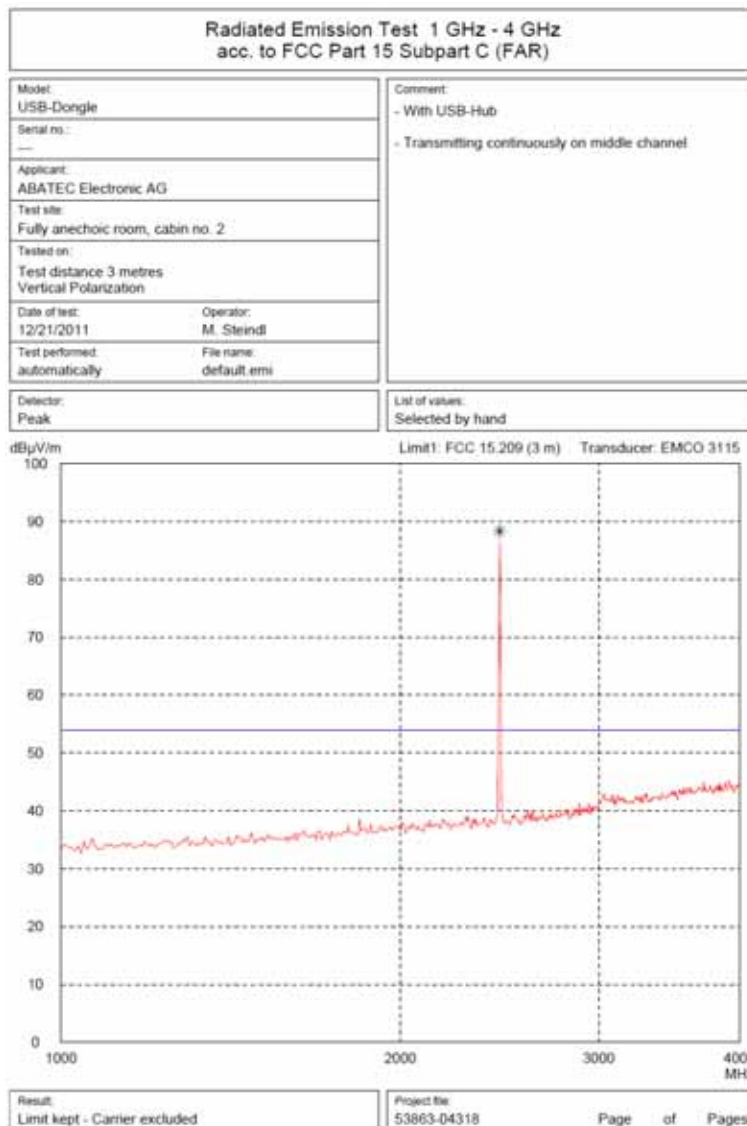


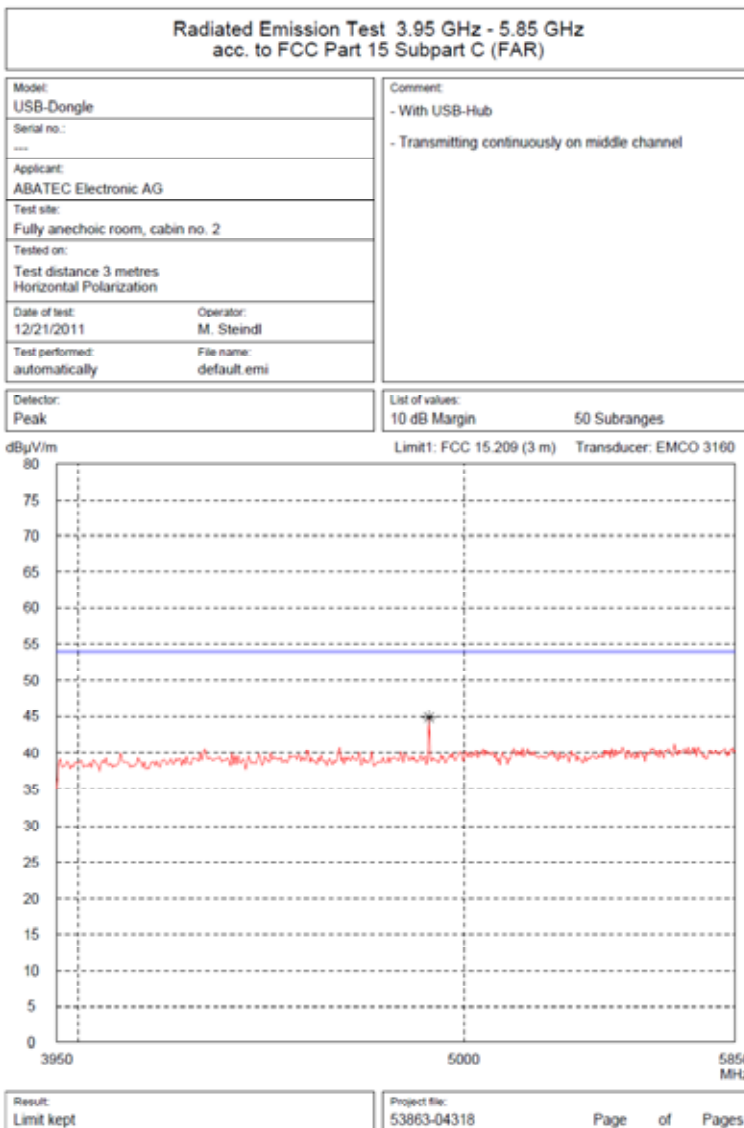


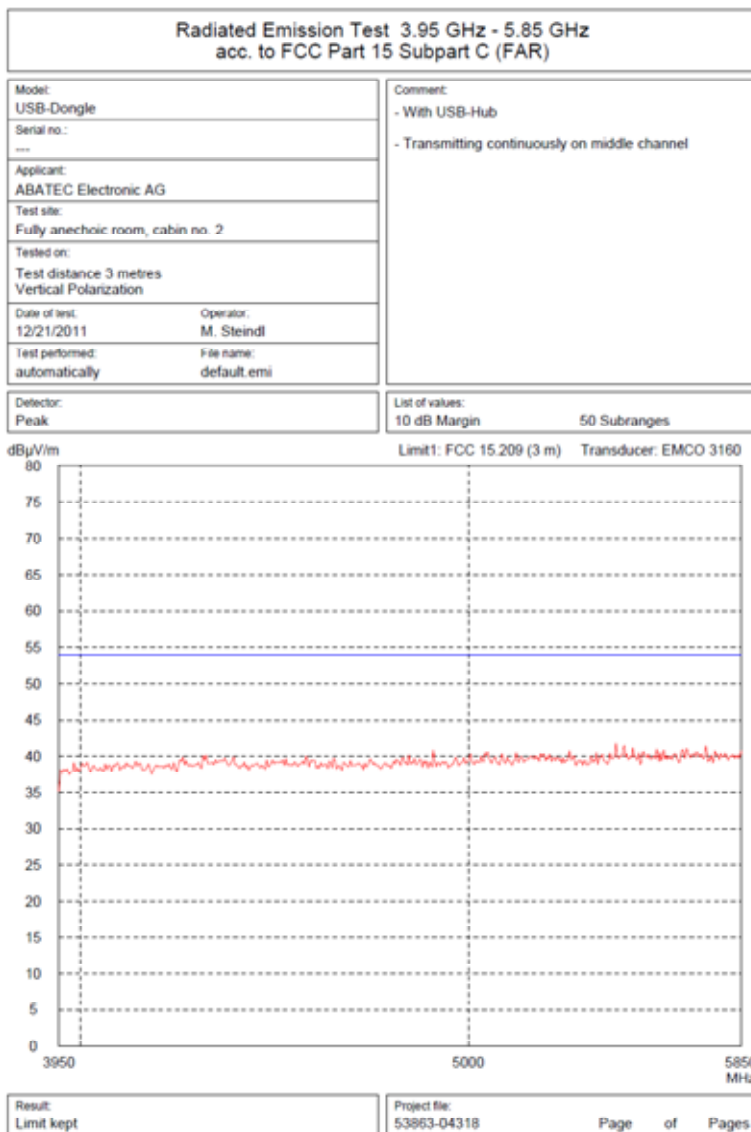


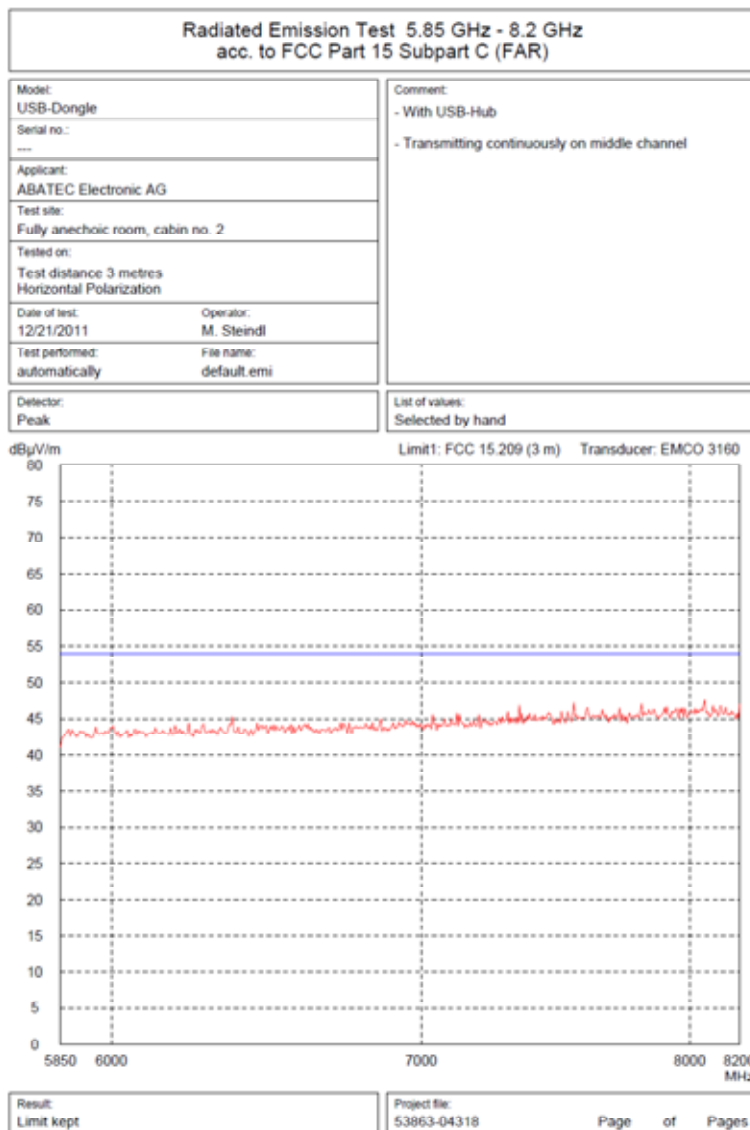


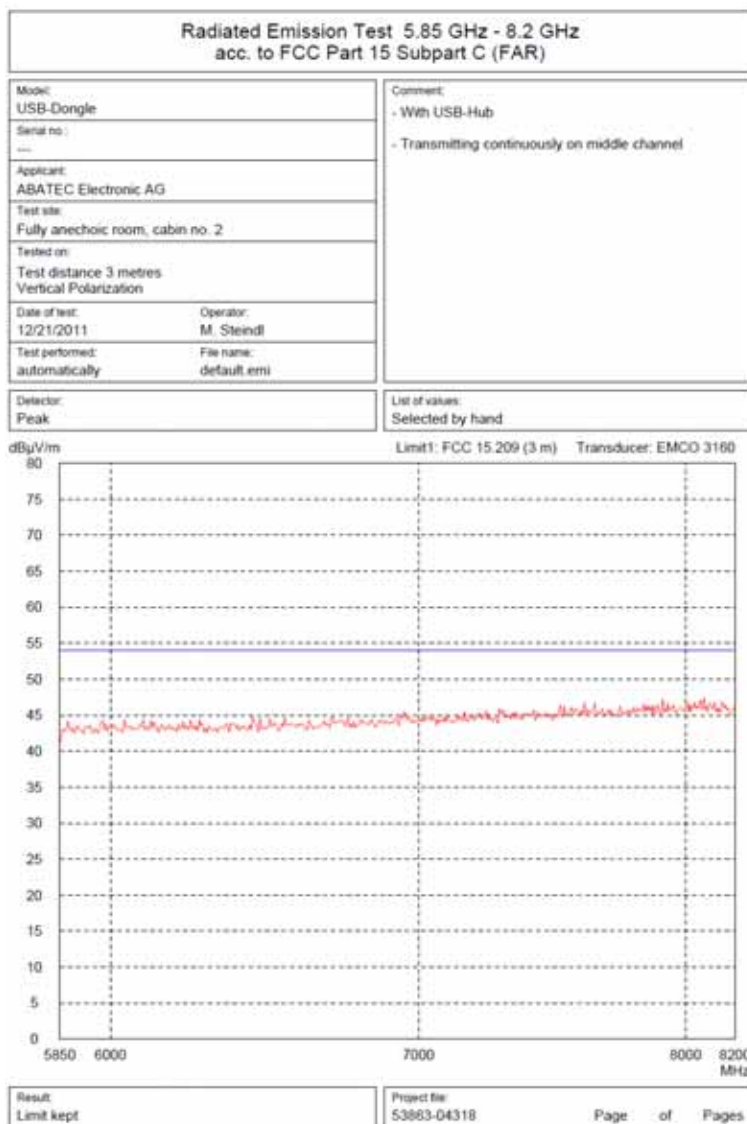


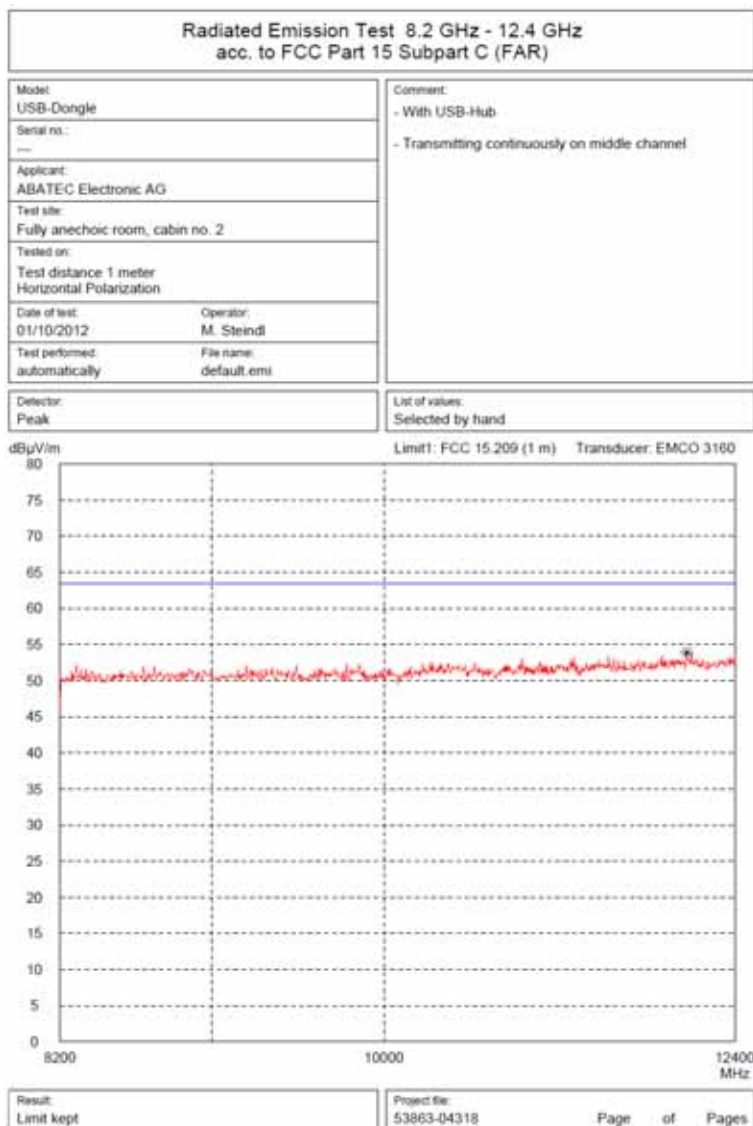


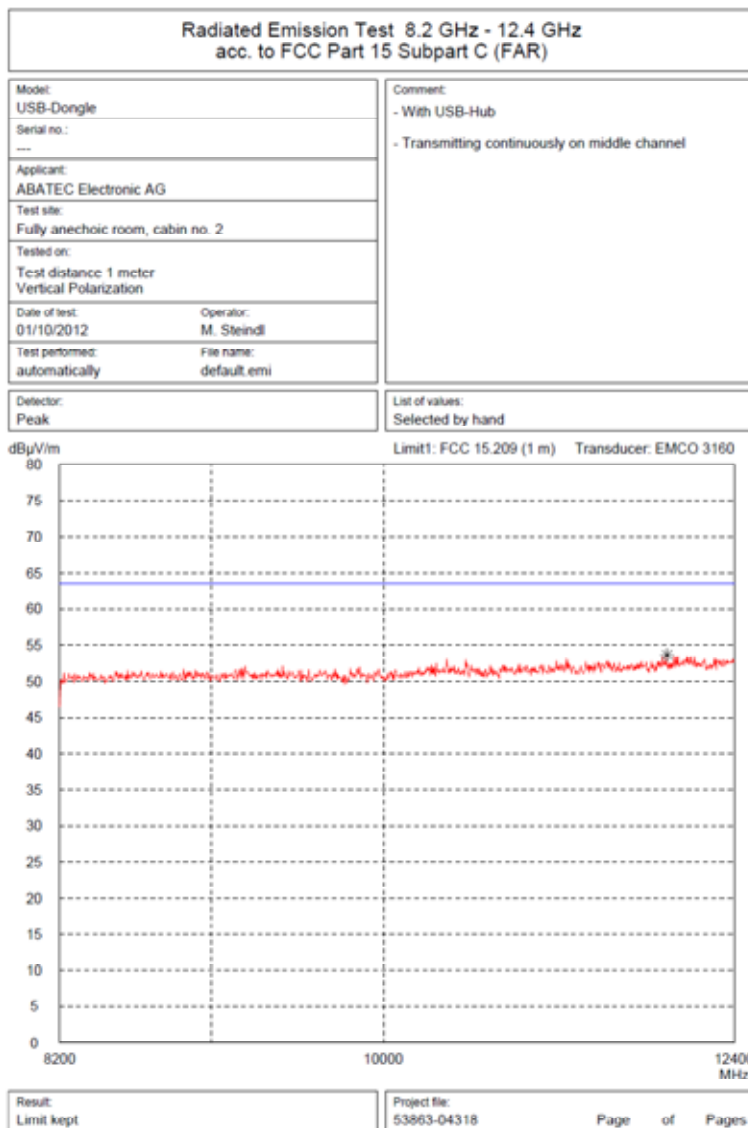


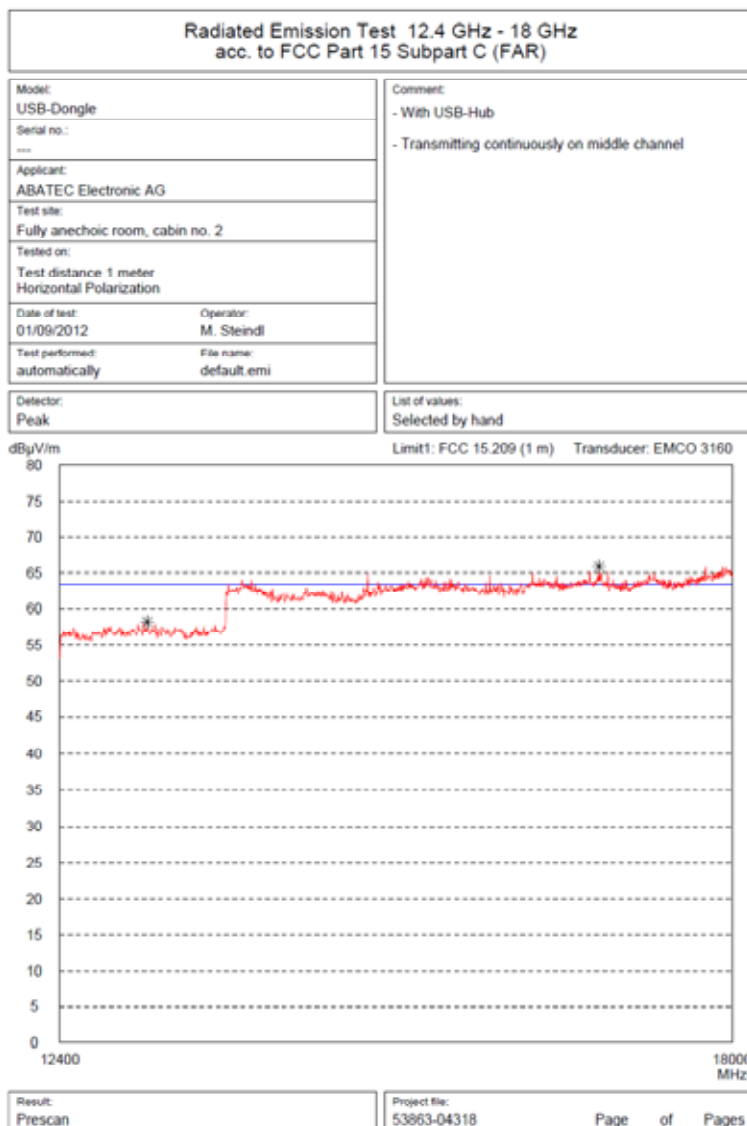


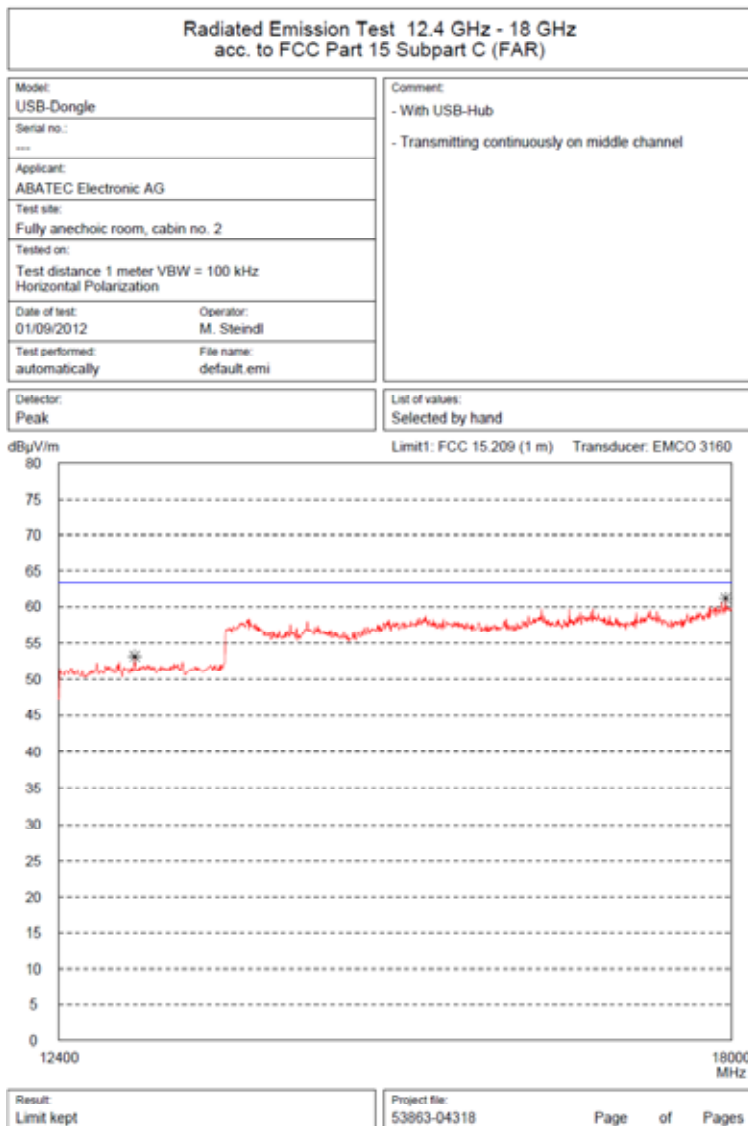


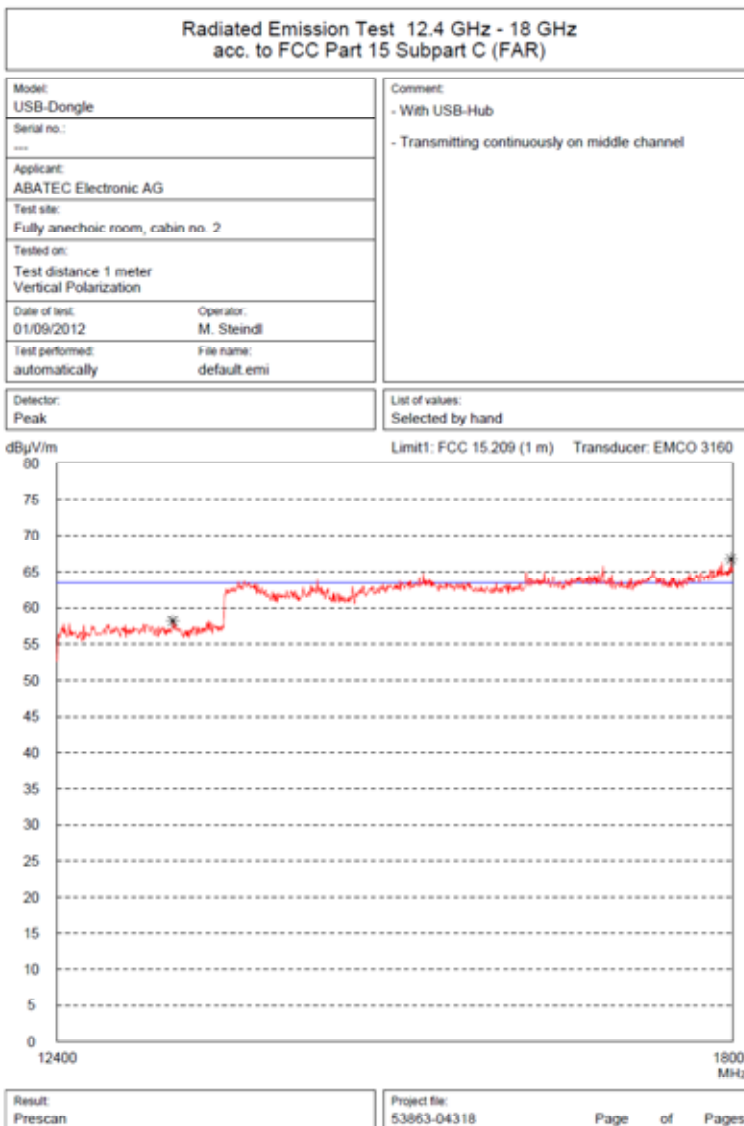


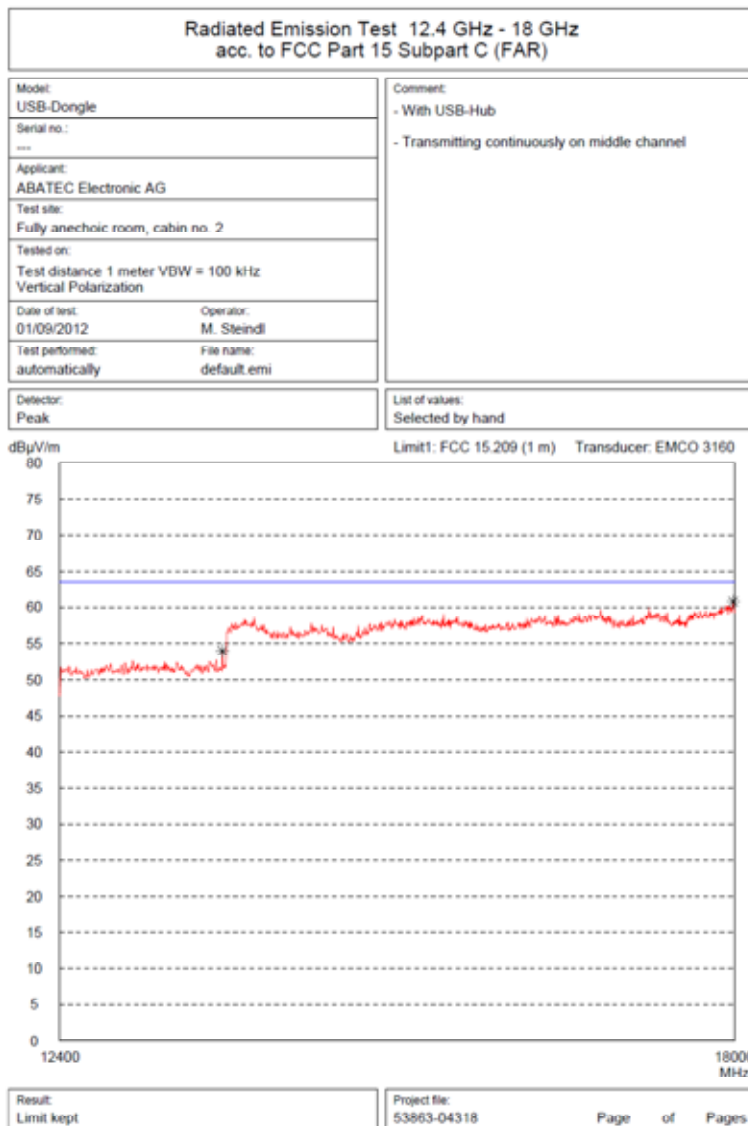


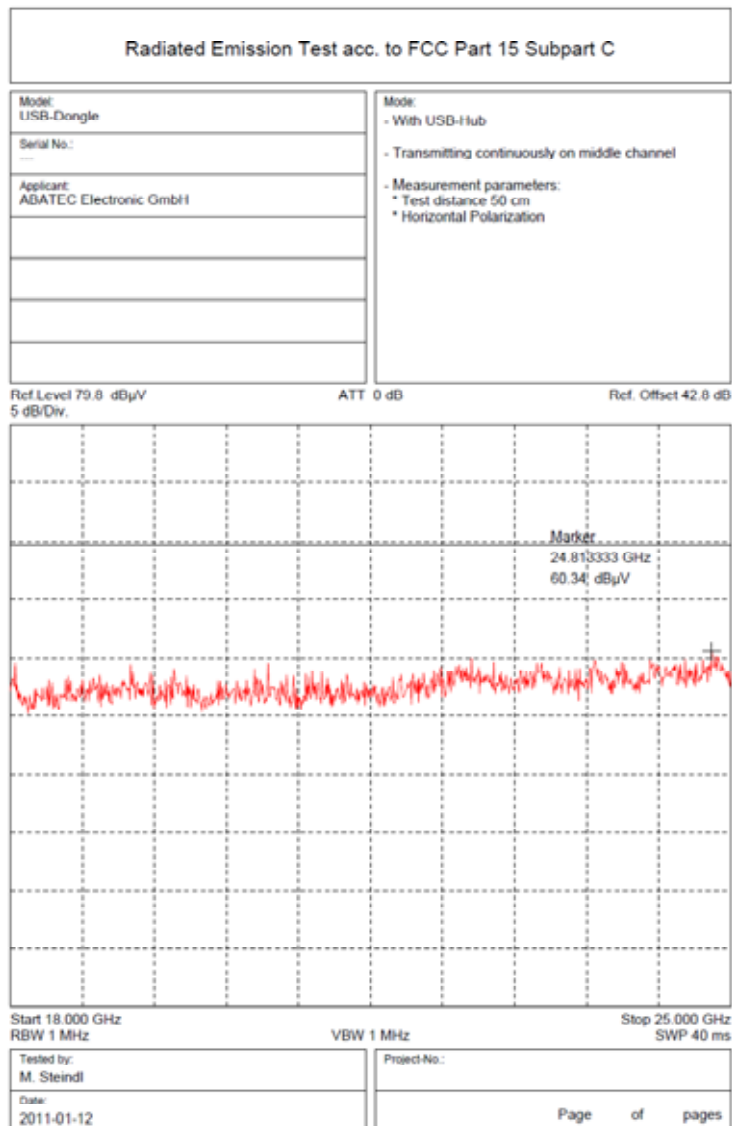


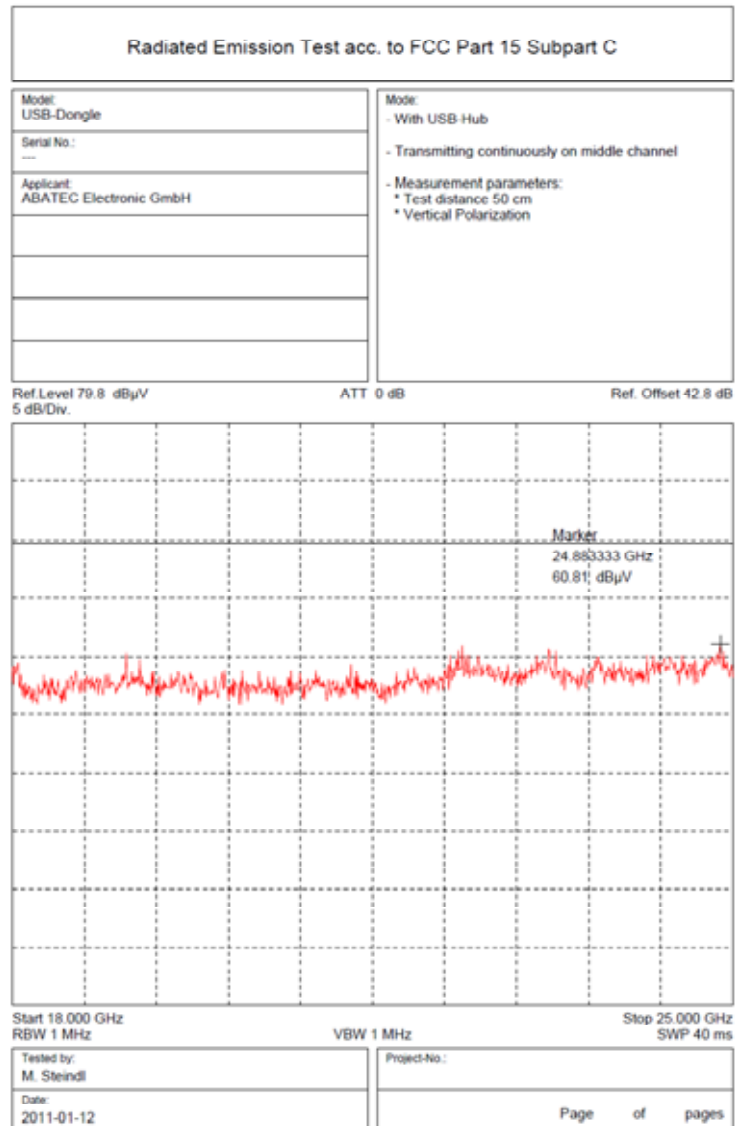

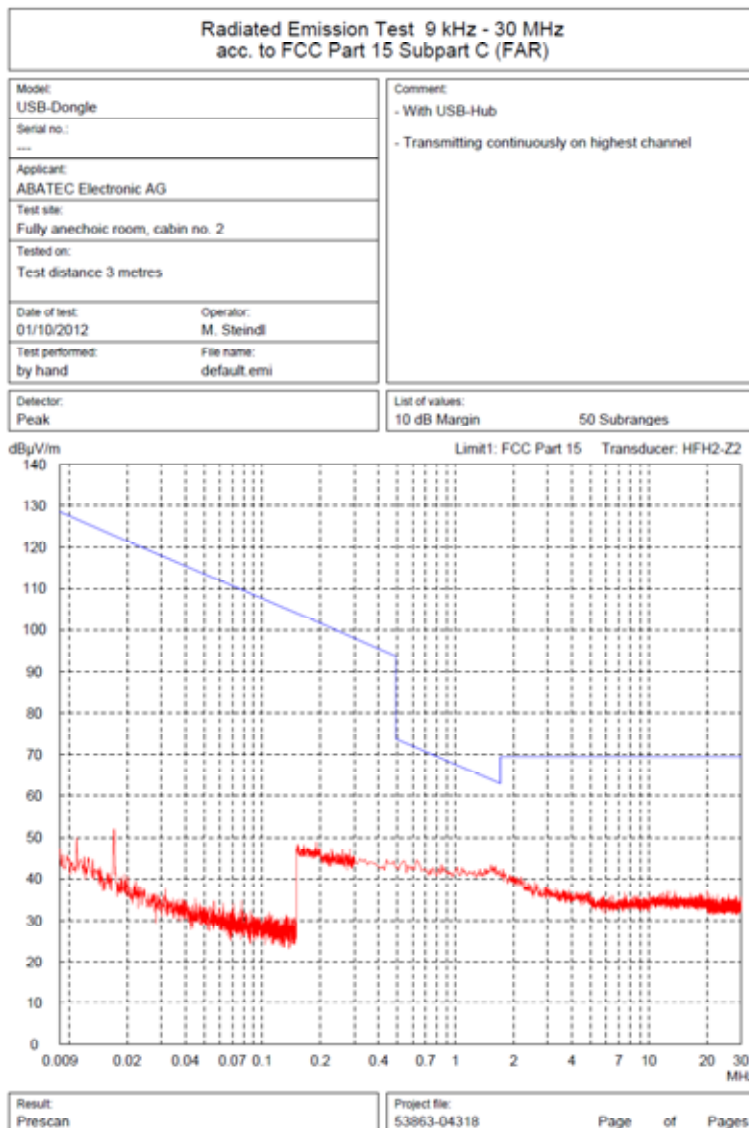

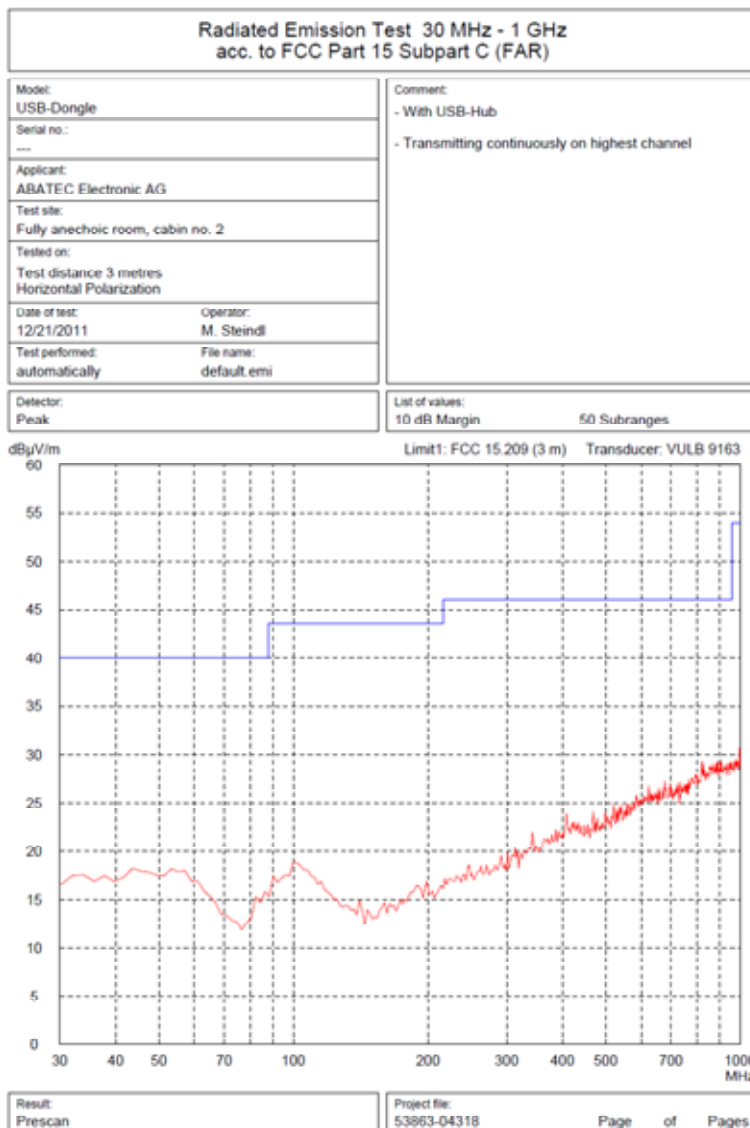


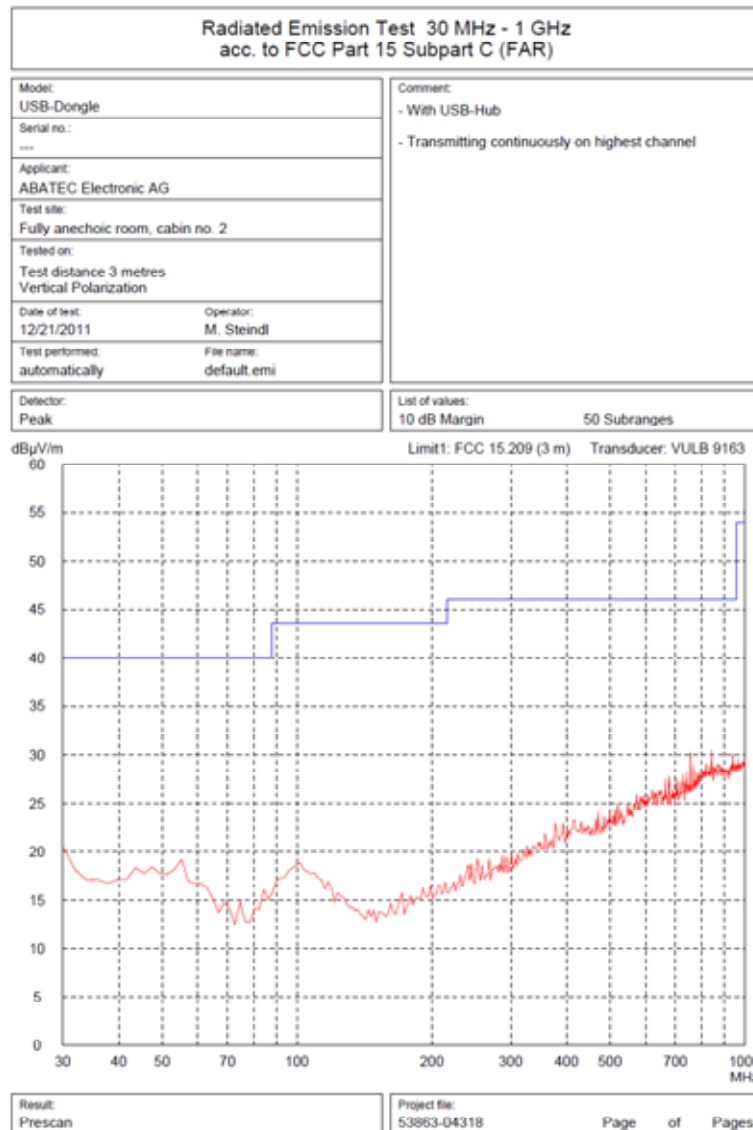


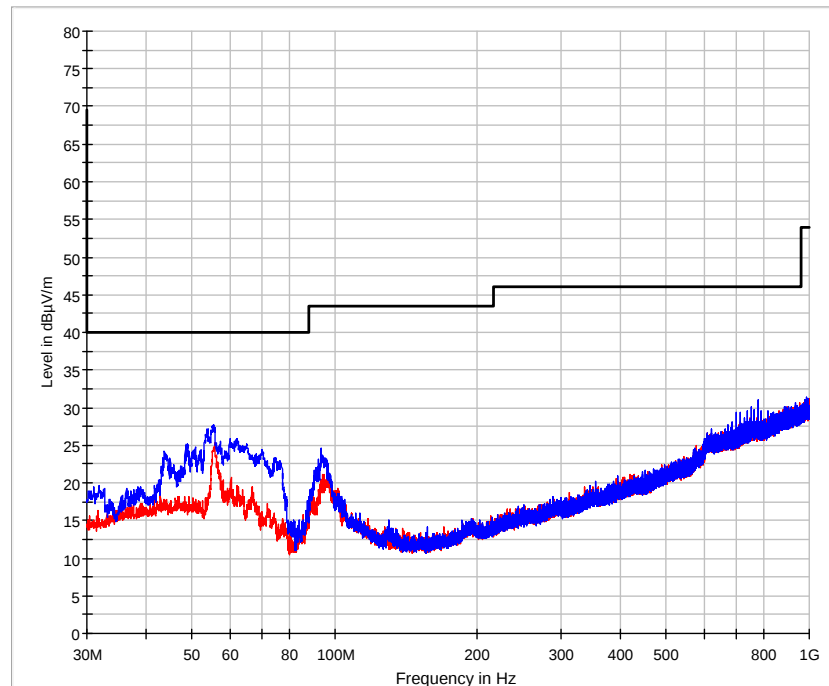



— FCC 15.209.LimitLine — Preview Result 1H-PK+ — Preview Result 1V-PK+


Final measurement for transmitting on highest channel

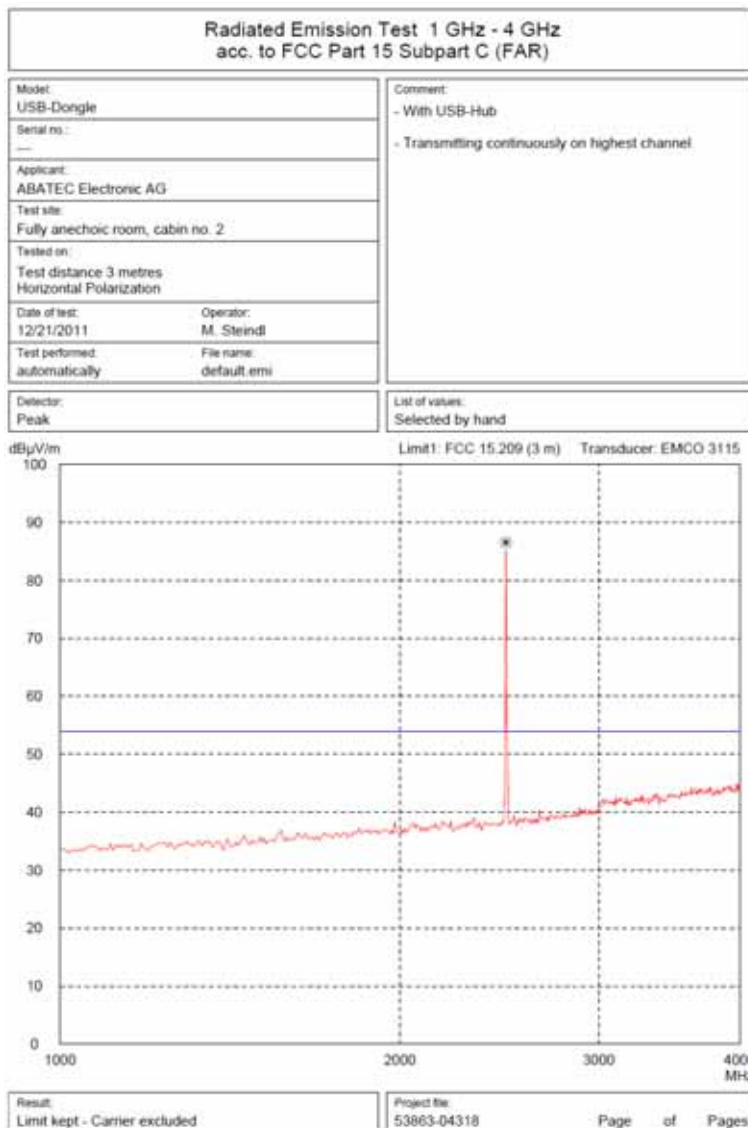


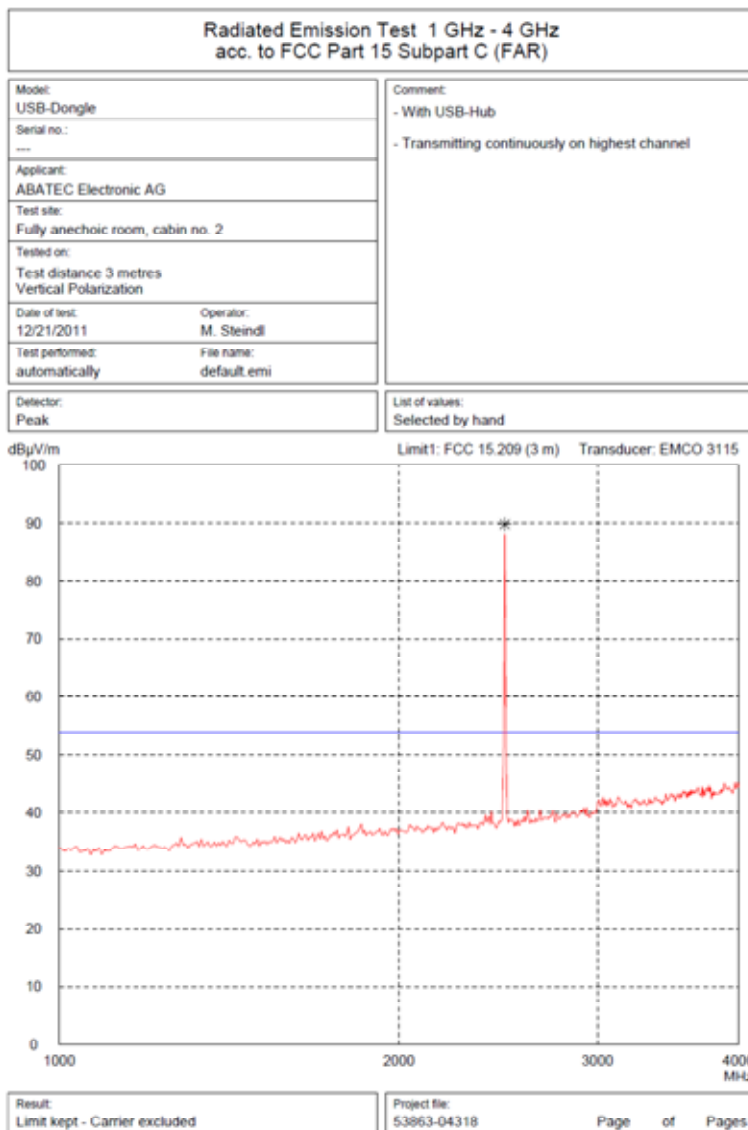


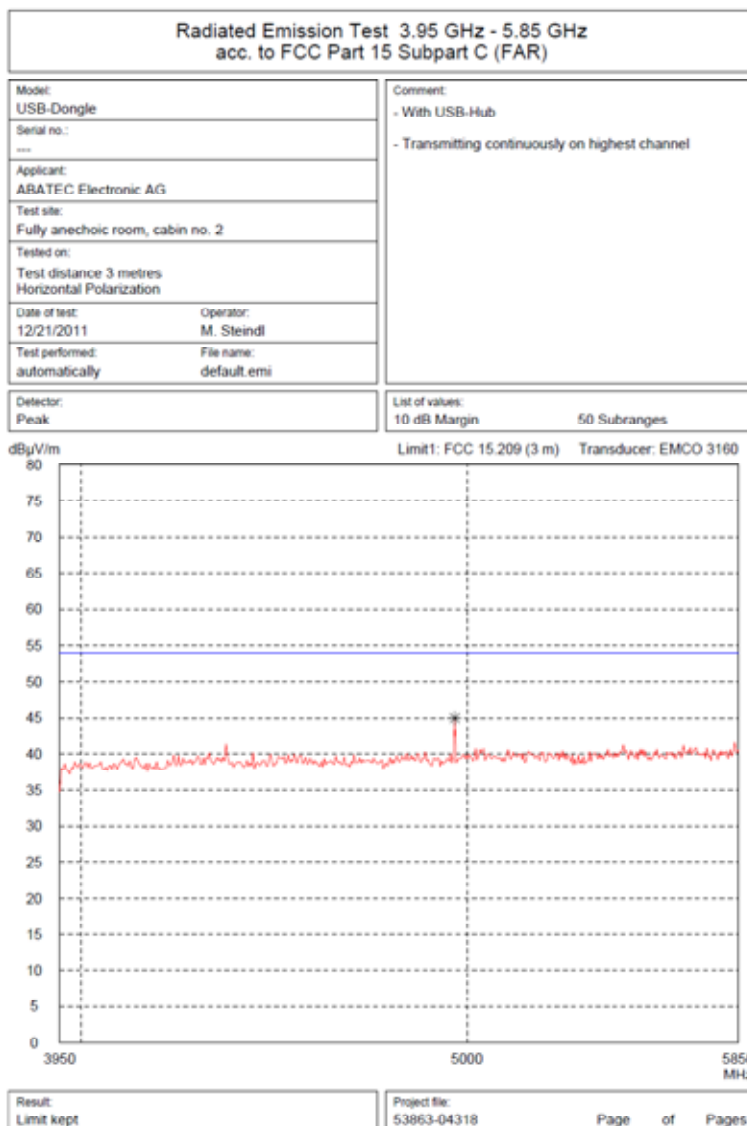


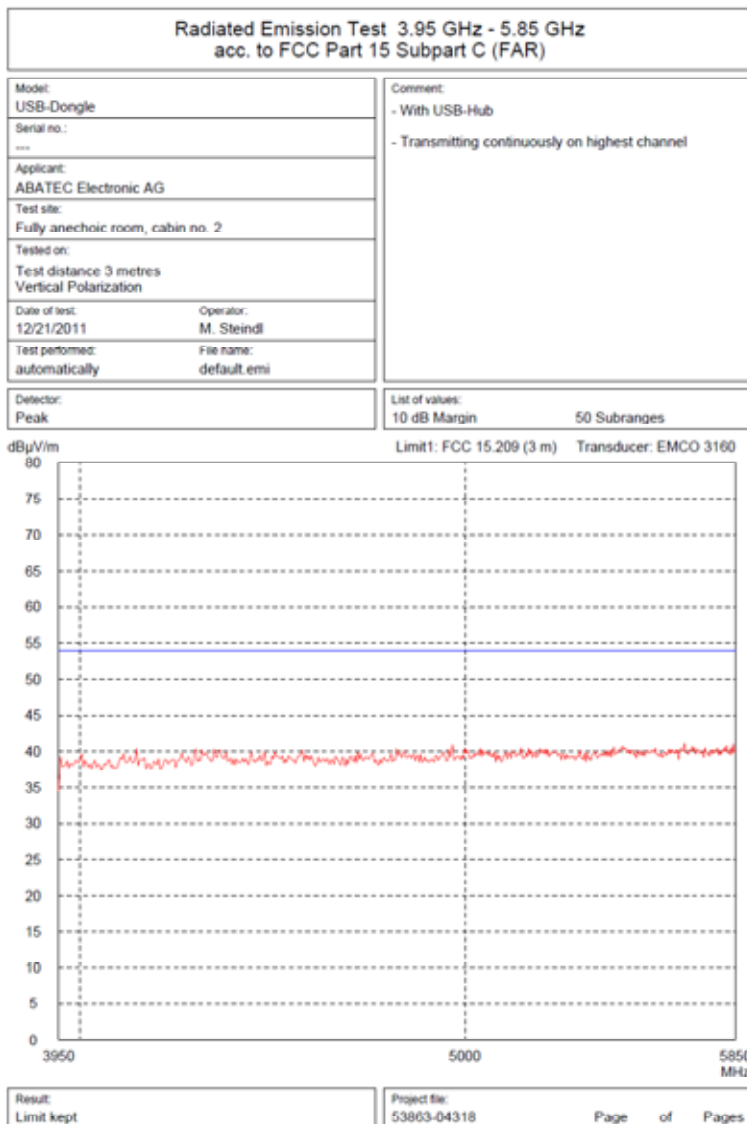


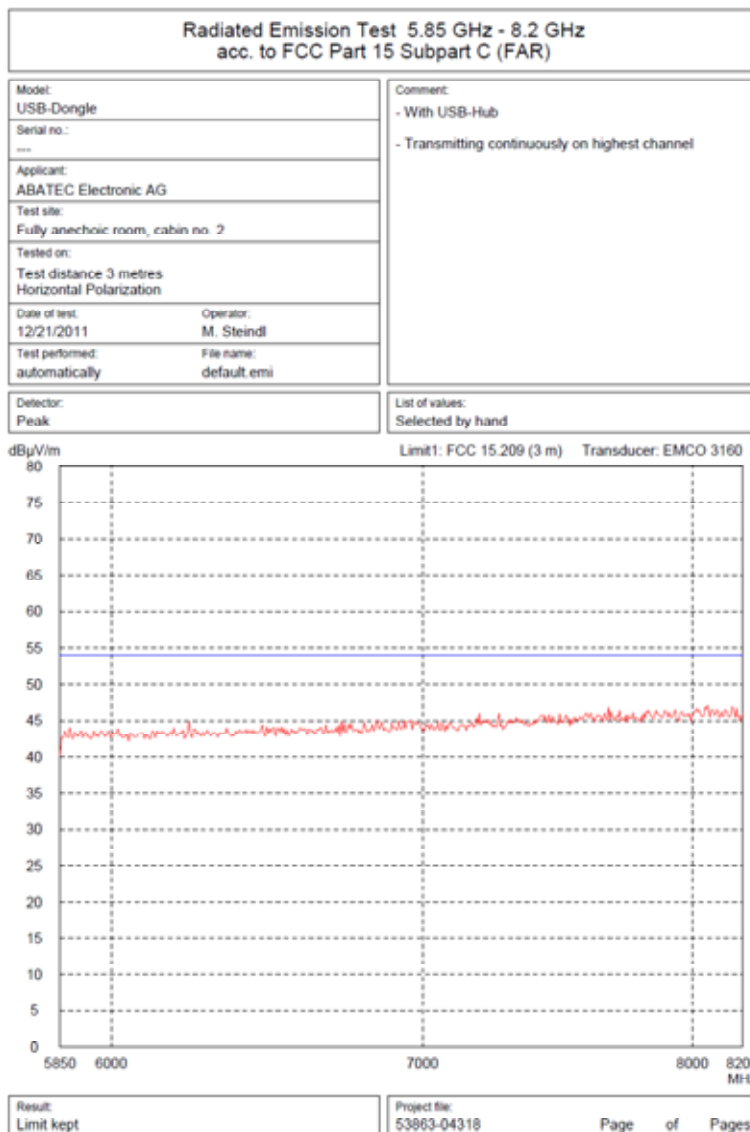


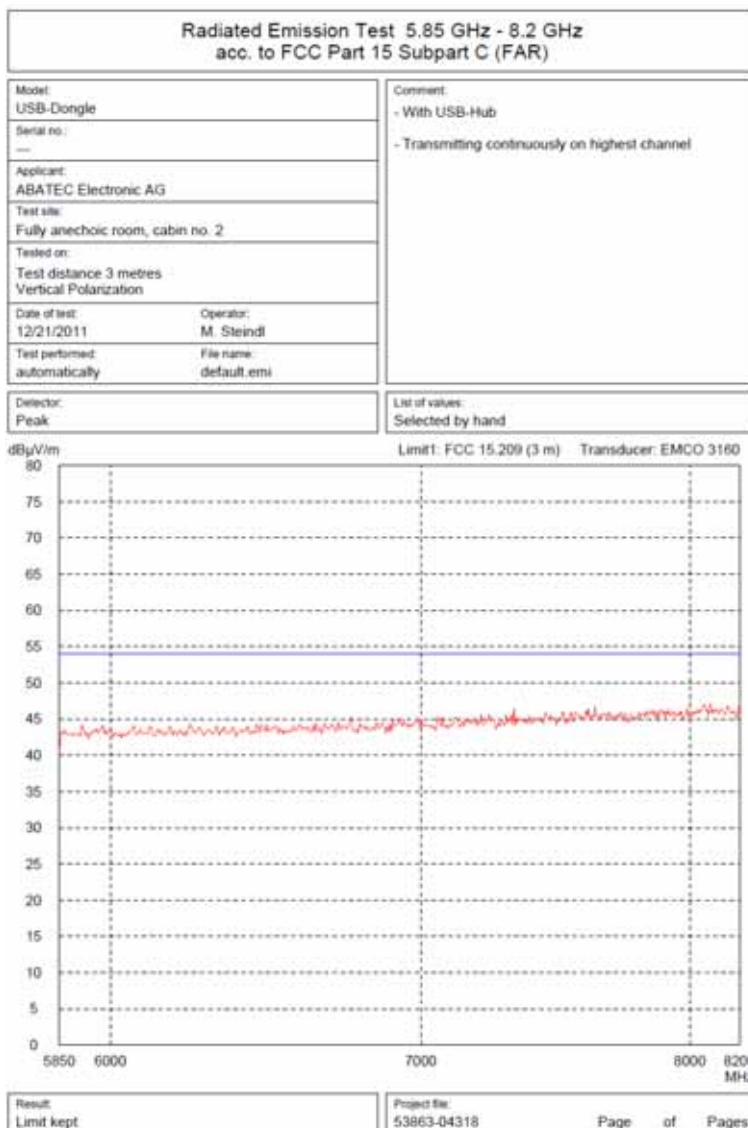


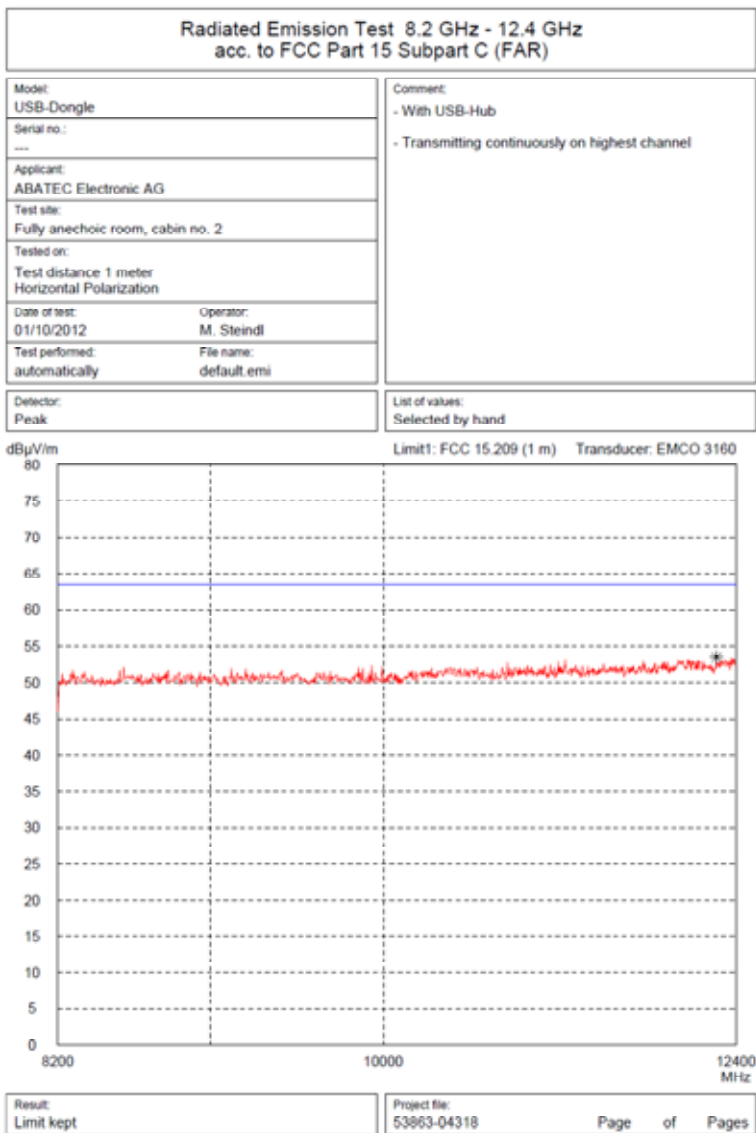


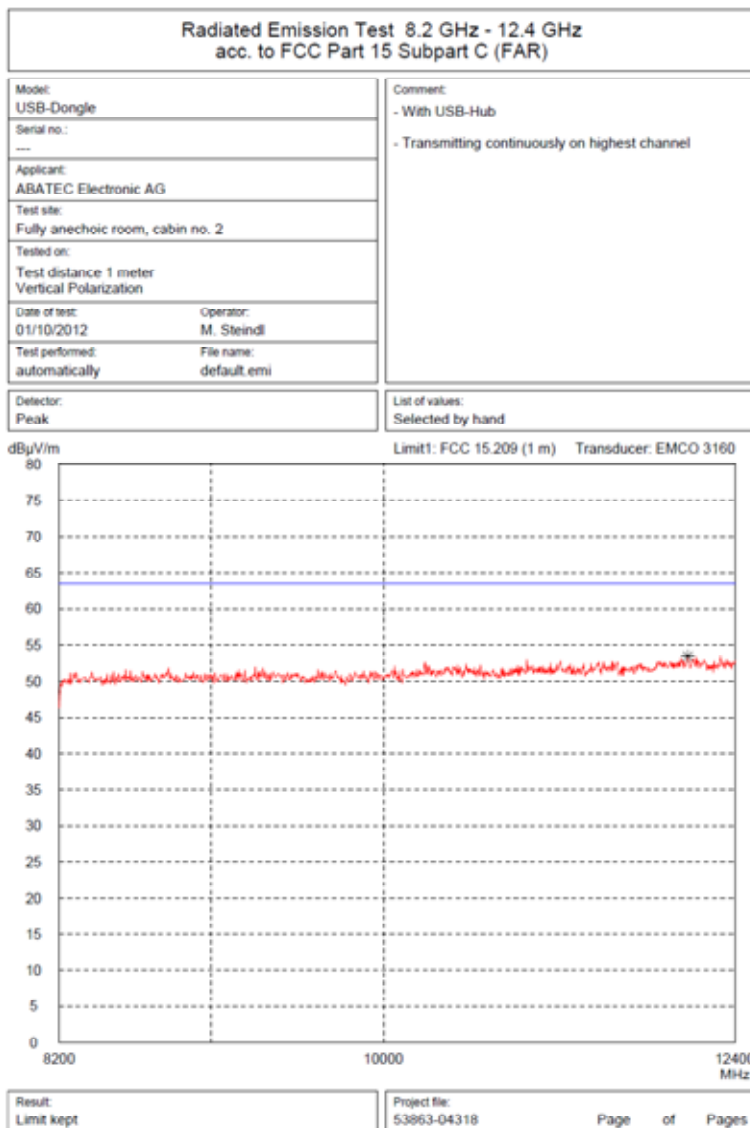


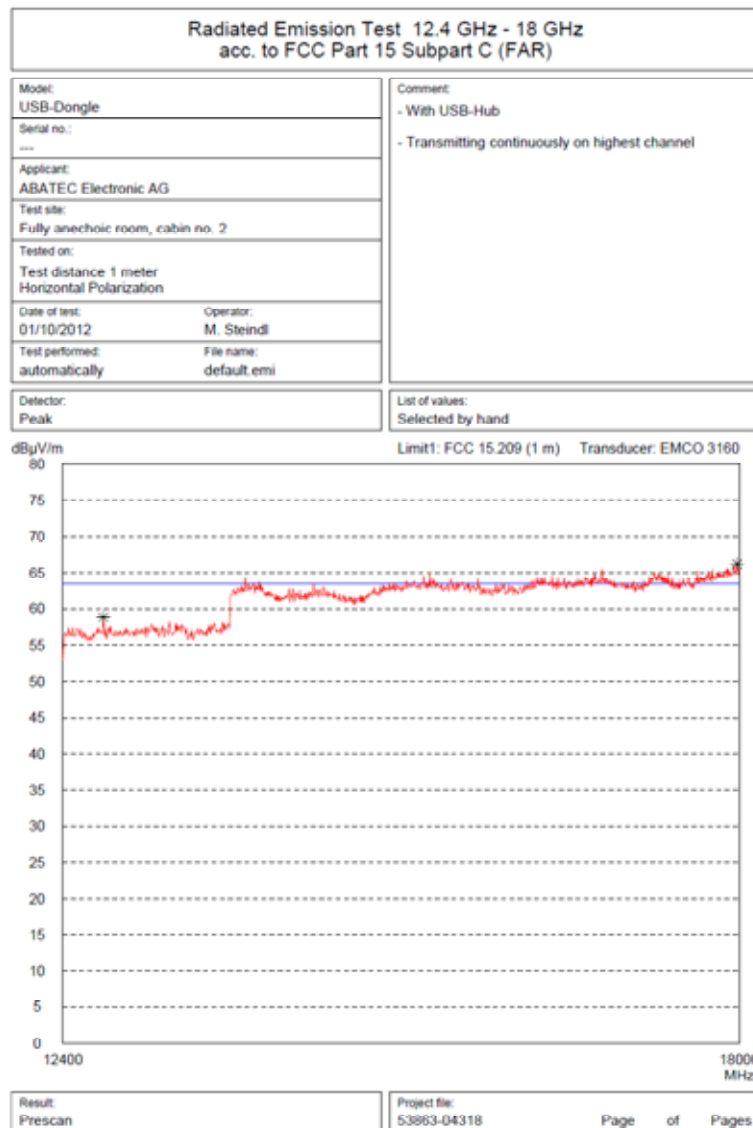


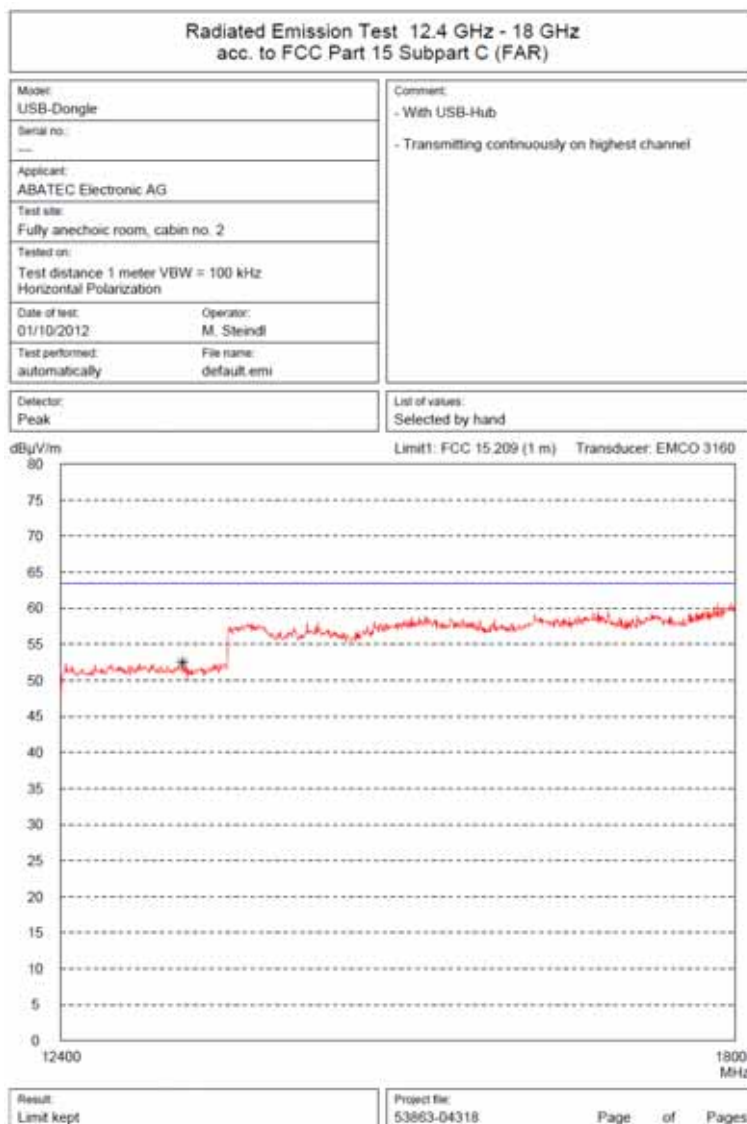


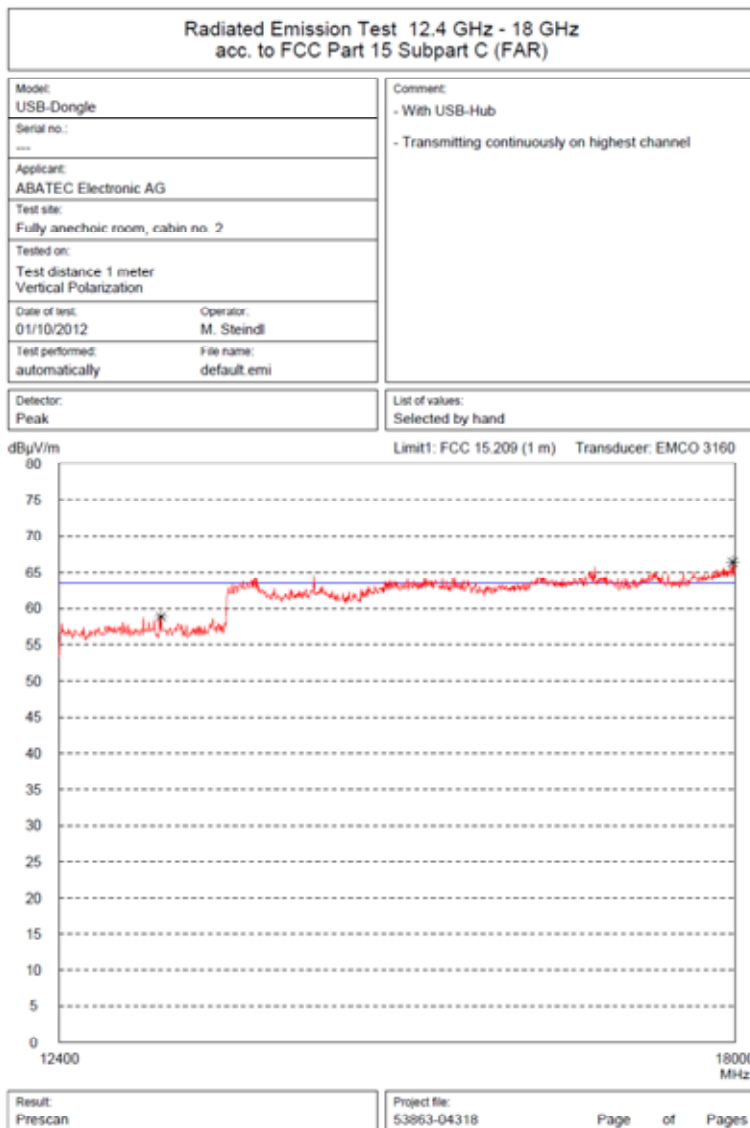


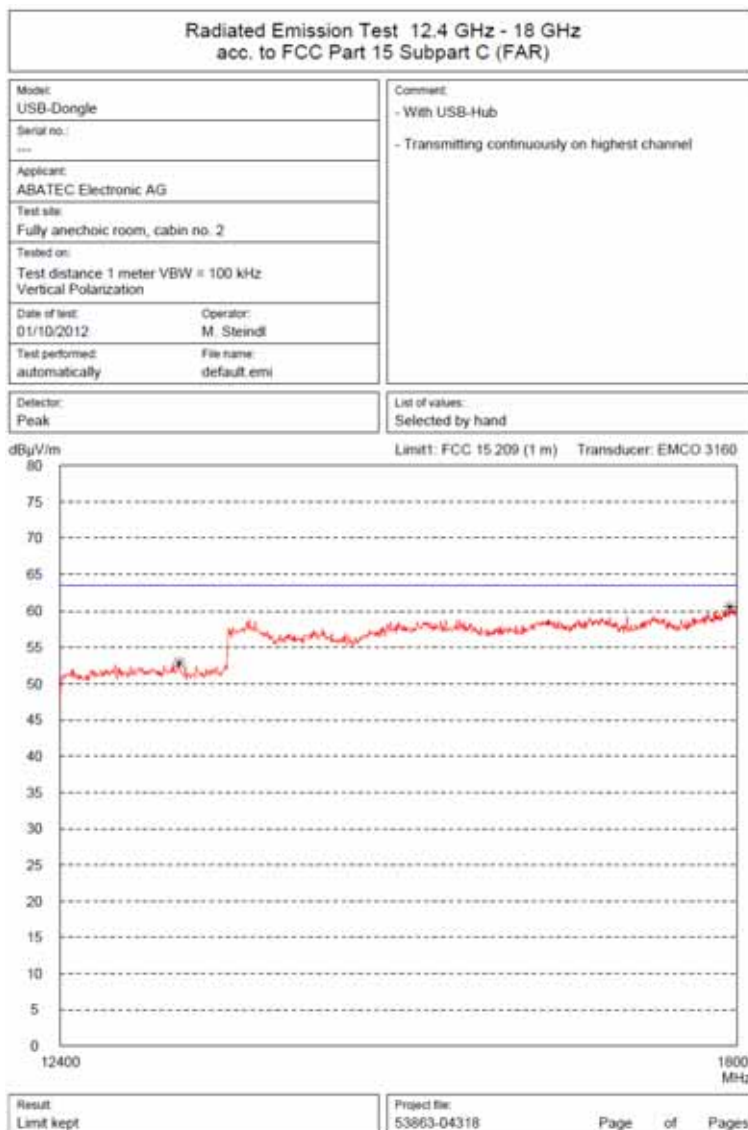


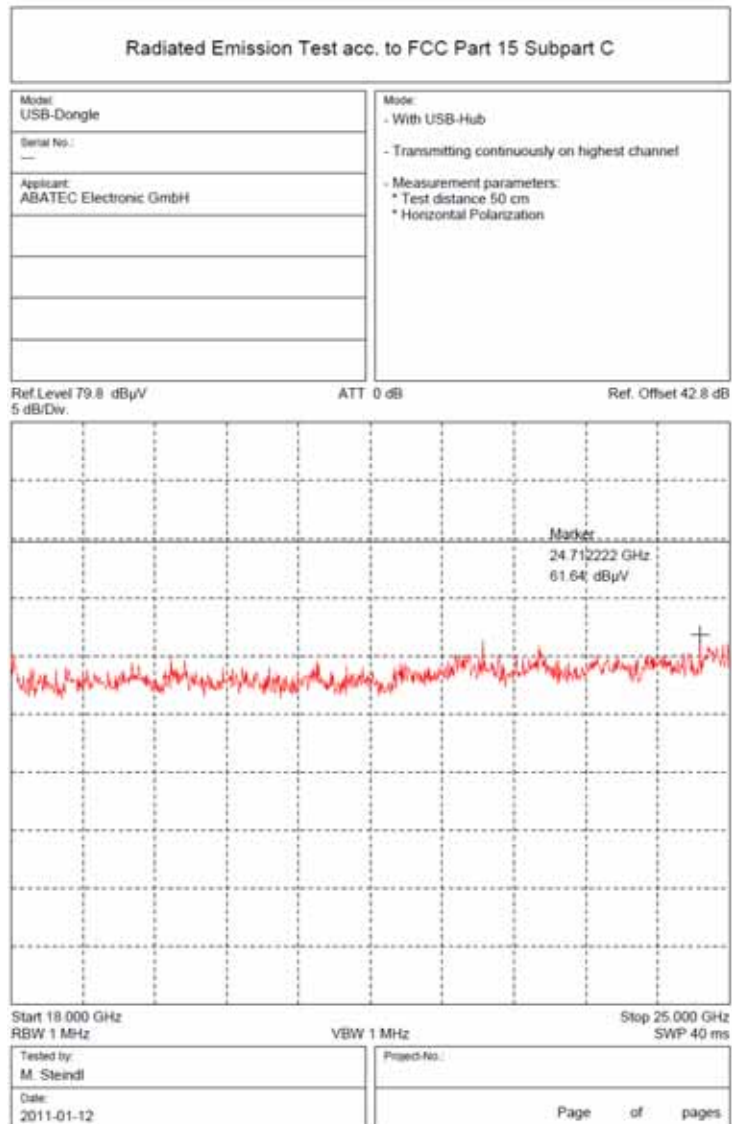

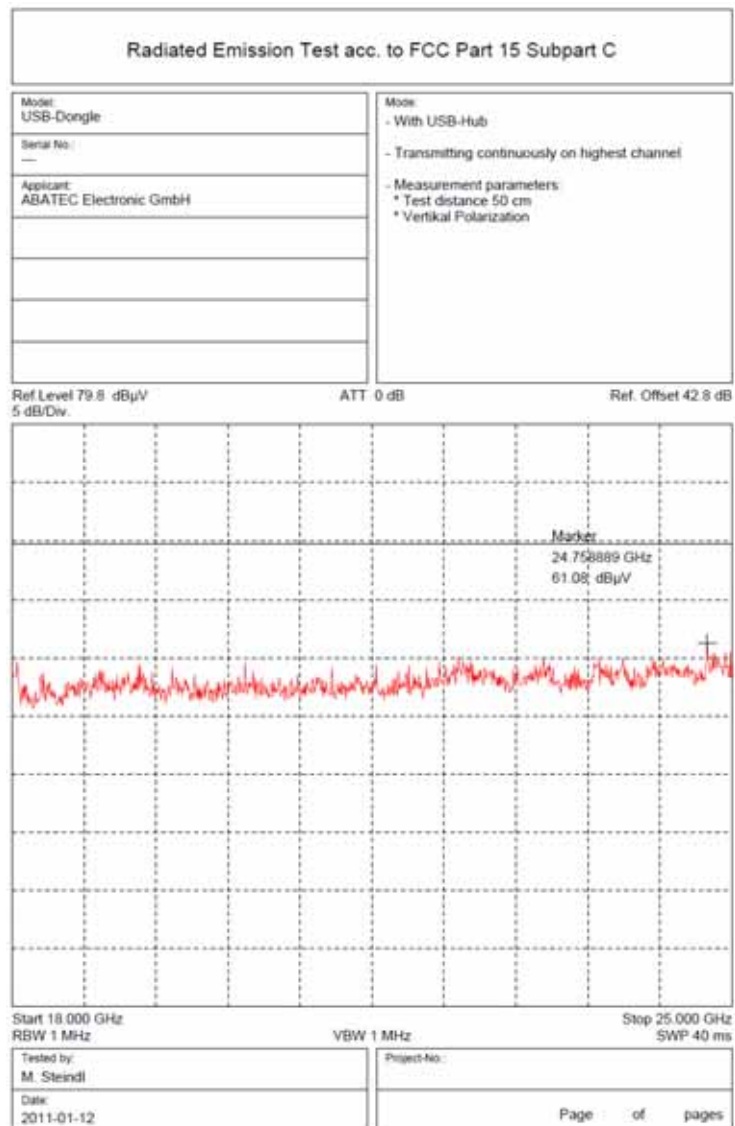

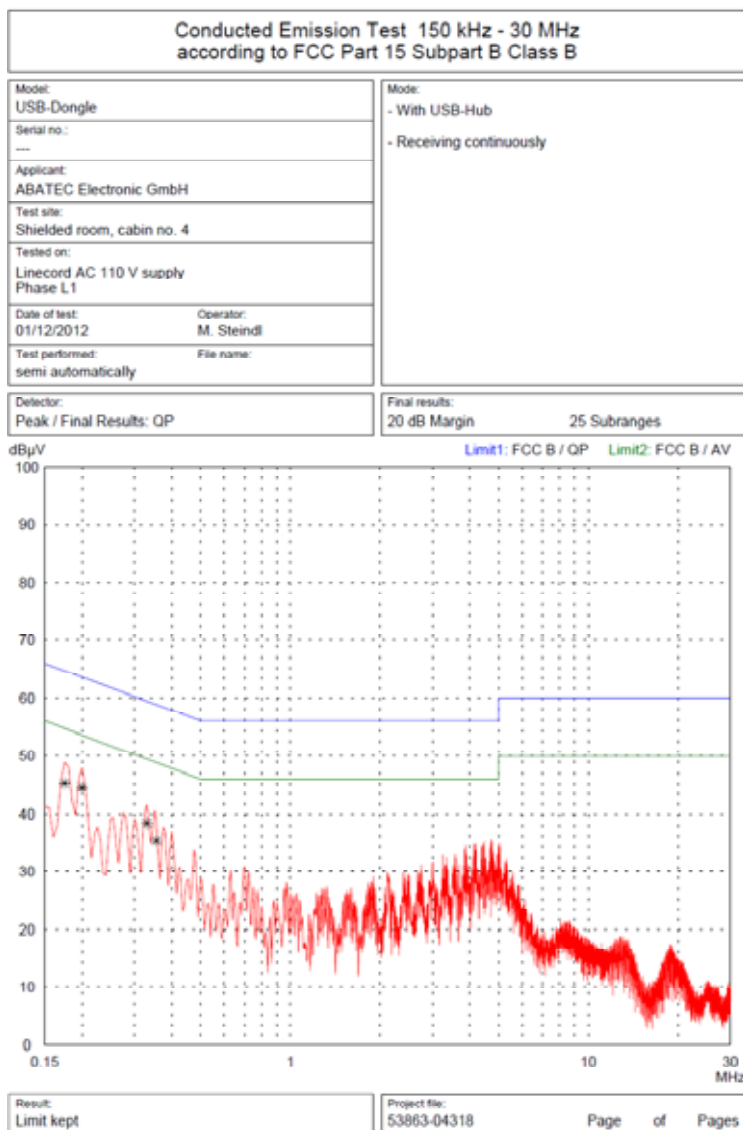

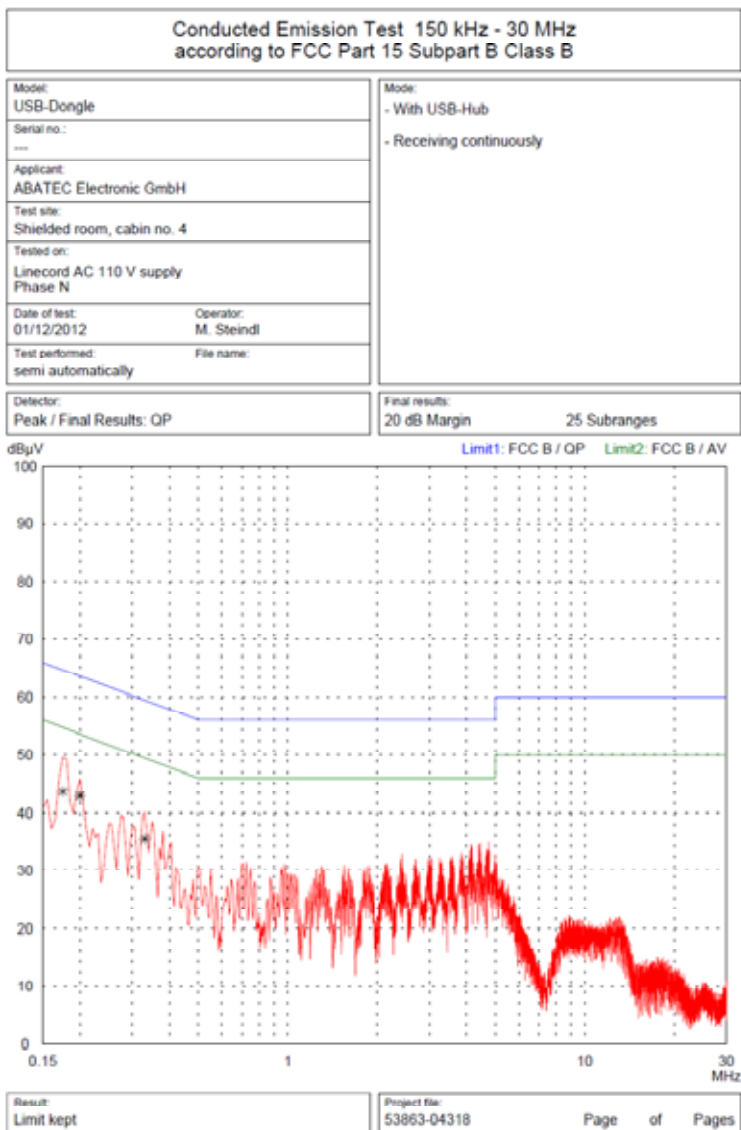

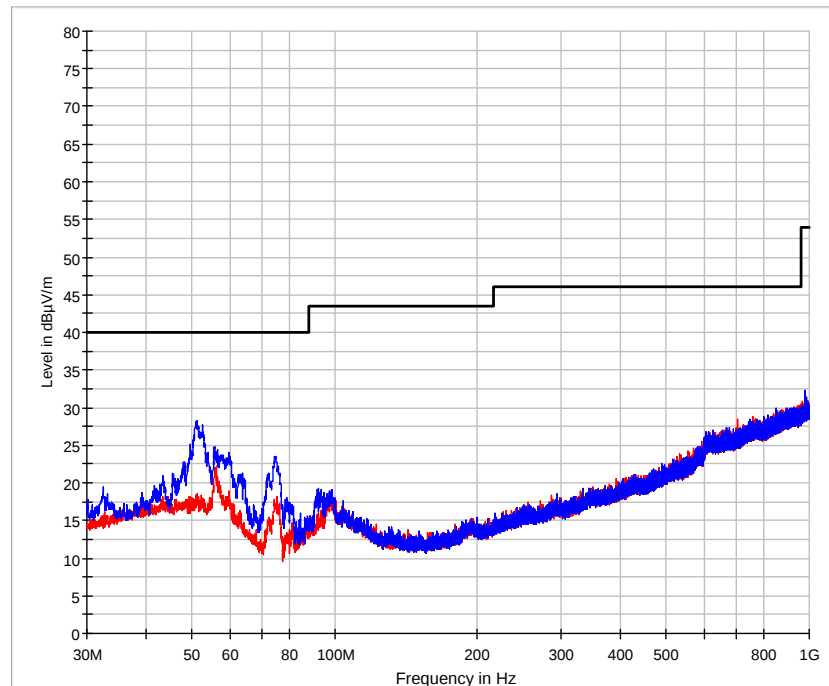

FCC 15.109 Class B.LimitLine

Preview Result 1H-PK+

Preview Result 1V-PK+

Final measurement for receiving continuously

