



CETECOM™

CETECOM ICT Services
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-1640/09-01-05-A



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited test laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Valeo Automatic Security System(Wuxi)co.Ltd.
Building B11,Meiqing Road,Wuxi Hi-Tech Development Zone
214028 Wuxi City,Jiangsu Province / CHINA
Phone: +86-510-82993049
Fax: +86-510-8299 3008
Contact: Haijun Lu
e-mail: haijun.lu@valeo.com
Phone: +86-510-8299 3049

Manufacturer

Valeo Automatic Security System(Wuxi)co.Ltd.
Building B11,Meiqing Road,Wuxi Hi-Tech Development Zone
214028 Wuxi City,Jiangsu Province / CHINA

Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test item

Kind of test item:	315 MHz Flapkey
Model name:	B01T2AC
FCC ID:	AVL-B01T2AC
IC:	3248D-B01T2AC
Frequency:	314.9 MHz
Power supply:	3.00 V DC supplied by battery CR2032
Temperature range:	-20 °C to +55 °C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test performed:



Stefan Bös
Senior Testing Manager

Test report authorised:



Marco Bertolino
Testing Manager

1 Table of contents

1	Table of contents.....	2
2	General information	3
2.1	Notes.....	3
2.2	Application details.....	3
3	Test standard/s	3
4	Test environment.....	3
5	Test item.....	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurements	6
8.1	Description of test setup	6
8.1.1	Radiated measurements.....	6
8.1.2	Conducted measurements.....	7
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results.....	9
9.1	Timing of the transmitter	9
9.2	Switch off time	12
9.3	Emission bandwidth.....	13
9.4	Field strength of the fundamental	14
9.5	Field strength of the harmonics and spurious	15
9.6	Receiver spurious emission (radiated)	20
10	Test equipment and ancillaries used for tests.....	21
Annex A	Photographs of the test setup.....	23
Annex B	External photographs of the EUT.....	27
Annex C	Internal photographs of the EUT.....	33
Annex D	Document history	37
Annex E	Further information.....	37
Annex F	Accreditation Certificate	38

2 General information

2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order: 2010-09-21
 Date of receipt of test item: 2011-09-19
 Start of test: 2011-09-19
 End of test: 2011-09-23
 Person(s) present during the test: -/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+23 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity:		54 %
Air pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.00 V DC supplied by battery CR2032
	V_{max}	-/-
	V_{min}	-/-

5 Test item

Kind of test item	: 315 MHz Flapkey
Type identification	: B01T2AC
S/N serial number	: Unknown
HW hardware status	: 7.00
SW software status	: 3.40A
Frequency band [MHz]	: 314.9 MHz
Type of modulation	: OOK
Number of channels	: 1
Antenna	: Integrated antenna
Power supply	: 3.00 V DC supplied by battery CR2032
Temperature range	: -20°C to +55 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 1	Passed	2012-03-09	-/-

Test Specification Clause	Test Case	Temperature Conditions	Power Source Voltages	Pass	Fail	NA	NP	Results (max.)
§ 15.35 (c)/ RSS-GEN Issue 2 Section 4.5	Timing of the transmitter (Duty cycle correction factor)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.231 (a) (1)/ RSS-210 Issue 8 Section A1.1.1	Switch off time	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.231 (3) (c)/ RSS-210 Issue 8 Section A1.1.3	Emission Bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.231 (b)/ RSS-210 Issue 8 Section A1.1.2 / 2.7 Table 4	Fieldstrength of Fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.209/ RSS-210 Issue 8 Section 2.7 Table 4	Fieldstrength of harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.209/ RSS-GEN Issue 3 Section 6	Receiver spurious emissions (radiated)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

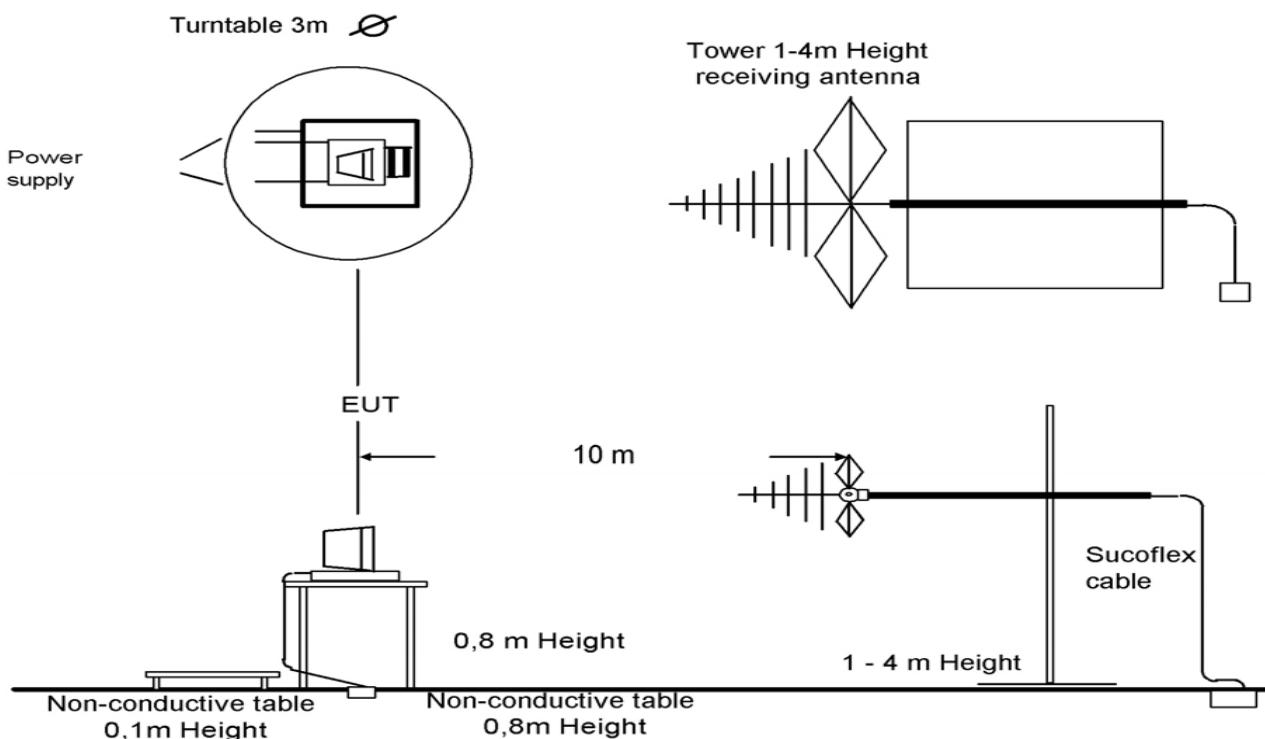


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

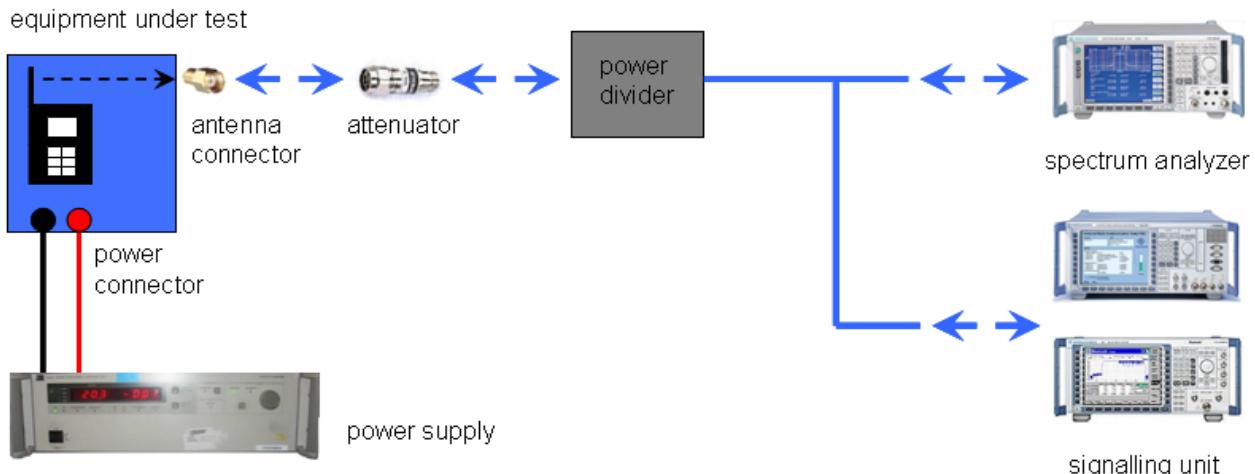

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

8.3 RSP100 test report cover sheet / performance test data

Test Report Number	:	1-1640/09-01-05-A
Equipment Model Number	:	B01T2AC
Certification Number	:	3248D- B01T2AC
Manufacturer (complete Address)	:	Valeo Automotive Security System(Wuxi)co.Ltd. Building B11,Meiqing Road,Wuxi Hi-Tech Development Zone 214028 Wuxi City,Jiangsu Province / CHINA
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 1
Open Area Test Site IC No.	:	IC 3462C-1
Frequency Range or fixed frequency	:	314.9 MHz
Field Strength [dBμV/m] (at which distance)	:	61.65 @ 3 m
Occupied bandwidth (99%-BW) [kHz]	:	29.2
Type of modulation	:	OOK
Emission Designator (TRC-43)	:	29K2A1D
Antenna Information	:	Integrated PCB antenna
Transmitter Spurious (worst case) [μV/m @ 3m]:		219 μ V/m @ 2519.2 MHz
Receiver Spurious (worst case) [μV/m @ 3m]:		Not applicable

ATTESTATION:
DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager:

2012-03-09 Stefan Bös
Date Name



Signature

9 Measurement results

9.1 Timing of the transmitter

Measurement:


Measurement parameter	
Detector:	
Sweep time:	
Resolution bandwidth:	
Video bandwidth:	
Span:	
Trace-Mode:	See plots

Limits:

FCC	IC
CFR Part SUBCLAUSE § 15.35 (c)	RSS-GEN Issue 3 Section 4.5
Timing of the transmitter	
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	


Result:

Plot 1: Transmit burst

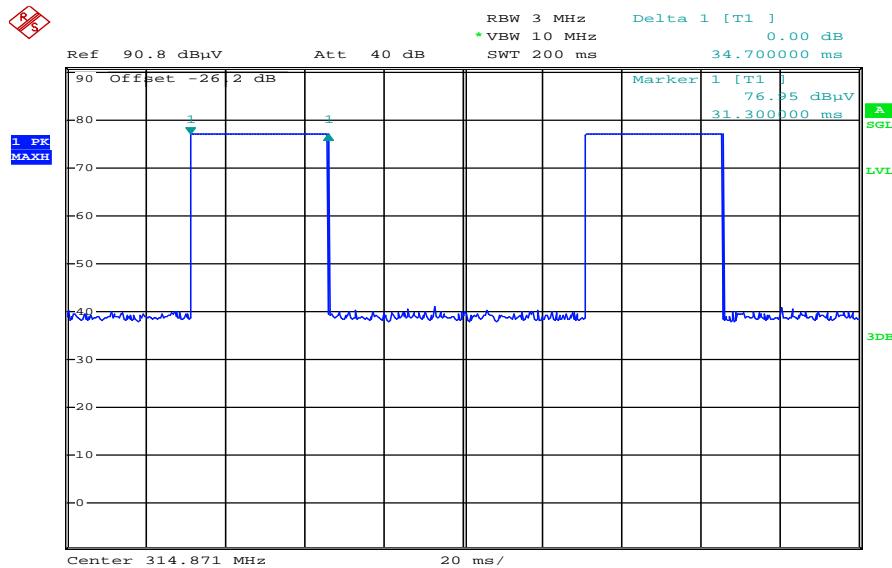


Date: 20.SEP.2011 09:41:47

Plot 2: Timing of the Transmitter

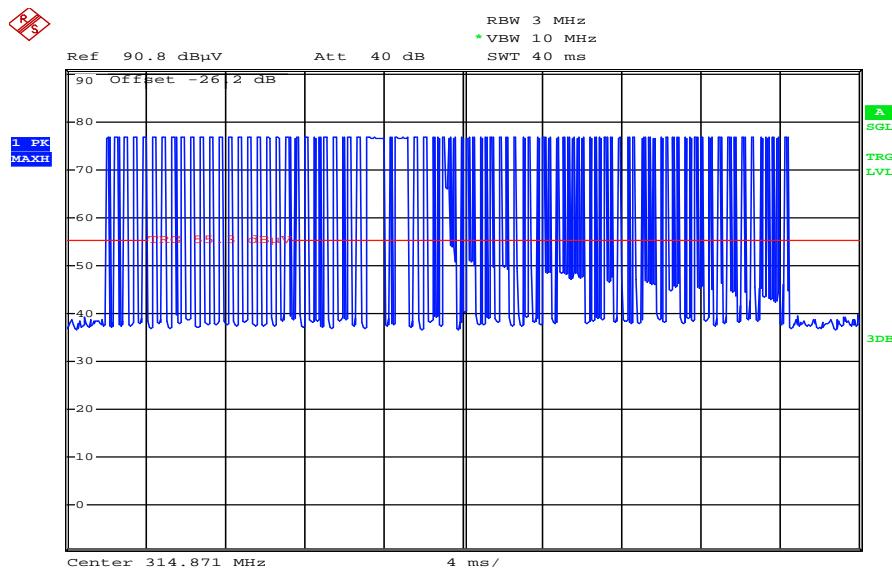


Date: 20.SEP.2011 09:43:52

Plot 3: Timing of the Transmitter

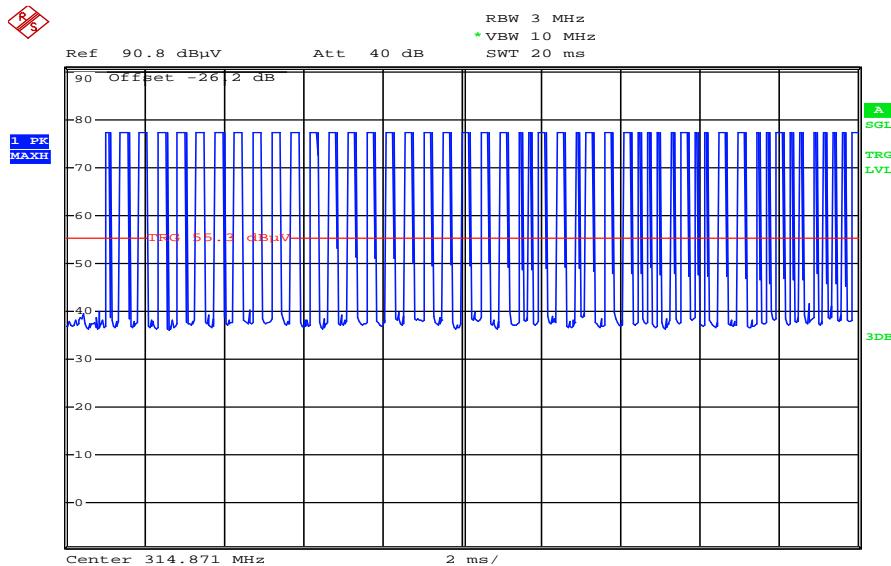

Date: 20. SEP. 2011 09:44:57

Plot 2: Timing of the Transmitter

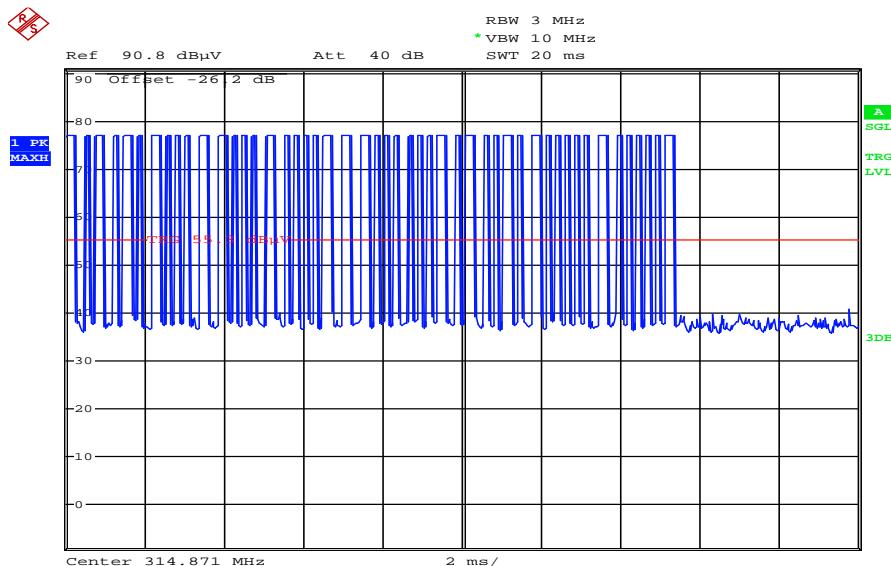

Date: 20. SEP. 2011 09:45:26

Transmit time (Tx on) = 34.7 ms / 100 ms (Plot 1)
 Duty Cycle during transmission: ~50% (Plot 2, 3, 4)

The peak-to-average correction factor is calculated with $20\log [Tx\ on * DC / 100ms]$.
 Hereby the peak-to-average correction factor is **-15.2 dB**.

Result: The measurement is passed.

9.2 Switch off time

Measurement:


Measurement parameter	
Detector:	See plot
Sweep time:	
Resolution bandwidth:	
Video bandwidth:	
Span:	
Trace-Mode:	

Limits:

FCC	IC
CFR Part SUBCLAUSE § 15.231 (a) (1)	RSS-GEN Issue 3 Section 4.5
Switch off time	
A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	

Results:

Plot 1:

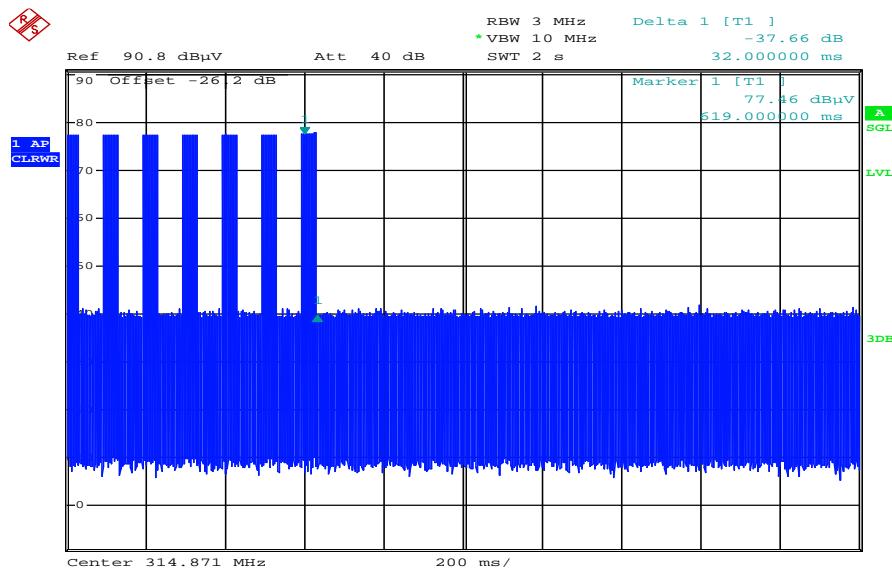

Date: 20. SEP. 2011 09:47:27

The EUT automatically ceases transmission within not more than 34.7ms after releasing the switch (max transmit time of one package).

Result: The measurement is passed.

9.3 Emission bandwidth

Measurement:

Measurement of the 20 dB bandwidth of the modulated signal


Measurement parameter	
Detector:	
Sweep time:	
Resolution bandwidth:	See plot
Video bandwidth:	
Span:	
Trace-Mode:	

Limits:

FCC	IC
CFR Part SUBCLAUSE § 15.231 (c)	RSS-210 Issue 8 Section A1.1.3
Emission bandwidth	
The OBW shall not be wider than 0.25% of the centre frequency, here maximum 787.25 kHz.	

Result:

Plot 1:

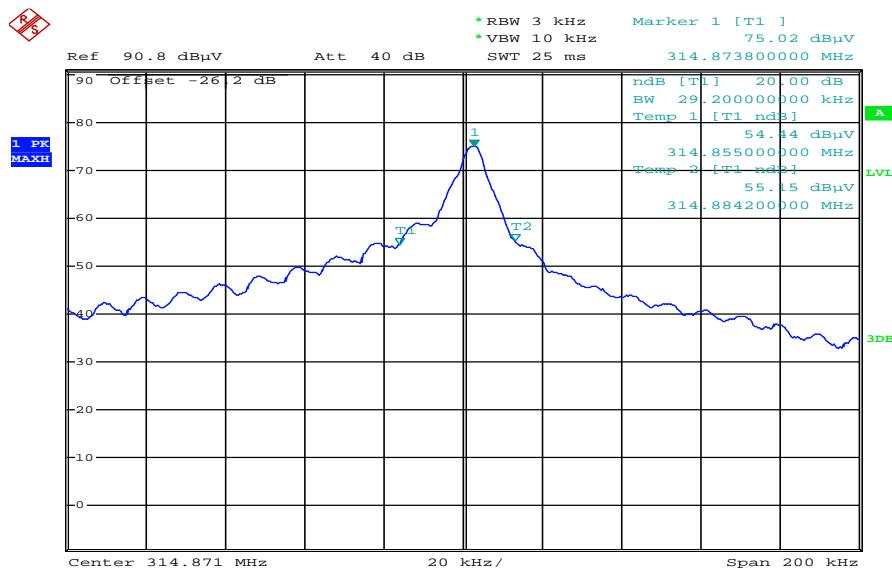

Date: 20.SEP.2011 09:50:16

The emission bandwidth at 20 dB is **29.2 kHz**

Result: The measurement is passed.

9.4 Field strength of the fundamental

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 MHz
Resolution bandwidth:	3 MHz
Span:	3 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC	
CFR Part SUBCLAUSE § 15.231 (b)	RSS-210 Issue 8 Section A1.1.2 / 2.7 Table 4	
Field strength of the fundamental.		
In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:		
Fundamental Frequency (MHz)	Field strength of Fundamental (μ V/m)	Measurement distance (m)
40.66 – 40.70	2,250	3
70-130	1,250	3
130-174	1,250 to 3,750	3
174-260	3,750	3
260-470	3,750 to 12,500	3
Above 470	12,500	3

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- for the band 130-174 MHz, μ V/m at 3 meters = $56.81818(F) - 6136.3636$;
- for the band 260-470 MHz, μ V/m at 3 meters = $41.6667(F) - 7083.3333$.
- for 314.9 MHz the limit is 6037.5 μ V/m or 75.62 dB μ V/m @ 3 m

Result:

TEST CONDITIONS		MAXIMUM POWER (dB μ V/m at 3 m distance)	
Frequency		MHz	MHz
Mode		Peak	Average
T _{nom}	V _{nom}	76.85	61.65*
Measurement uncertainty		± 3 dB	

*Value recalculated from Peak-to-Average correction factor described in 6.1

Result: The measurement is passed.

9.5 Field strength of the harmonics and spurious

Measurement:

Measurement parameter	
Detector:	Average / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 10Hz
Span:	9 kHz – 12.75 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC	
CFR Part SUBCLAUSE § 15.231 (b)	RSS-210 Issue 8 Section A1.1.2 / 2.7 Table 4	
Field strength of the fundamental.		
In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:		
Fundamental Frequency (MHz)	Field strength of spurious (μV/m)	Measurement distance (m)
40.66 – 40.70	225	3
70-130	125	3
130-174	125 to 375	3
174-260	375	3
260-470	375 to 1,250	3
Above 470	1,250	3

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

FCC	IC	
SUBCLAUSE § 15.209		
Field strength of the harmonics and spurious.		
Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
above 960	500	3

Results:


EMISSION LIMITATIONS				
f [MHz]	Detector	Limit max. allowed [dB μ V/m]	Amplitude of emission [dB μ V/m]	Results
629.8	Pk	36 @ 10 m	45.4 @ 10 m 30.2 @ 10 m (AVG)*	Pass
1259.6	Pk	54 @ 3 m	58.3 @ 3 m 43.1 @ 3 m (AVG)*	Pass
1574.5	Pk	54 @ 3 m	51.4 @ 3 m 36.2 @ 3 m (AVG)*	Pass
1889.3	Pk	54 @ 3 m	52.7 @ 3 m 37.5 @ 3 m (AVG)*	Pass
2204.3	Pk	54 @ 3 m	48.0 @ 3 m 32.8 @ 3 m (AVG)*	Pass
2519.2	Pk	54 @ 3 m	62.0 @ 3 m 46.8 @ 3 m (AVG)*	Pass
2834.1	Pk	54 @ 3 m	58.4 @ 3 m 43.2 @ 3 m (AVG)*	Pass
3149.0	Pk	54 @ 3 m	50.3 @ 3 m 35.1 @ 3 m (AVG)*	Pass
3463.9	Pk	54 @ 3 m	49.5 @ 3 m 34.3 @ 3 m (AVG)*	Pass
3778.8	Pk	54 @ 3 m	57.0 @ 3 m 41.8 @ 3 m (AVG)*	Pass

* Peak value recalculated with duty cycle correction factor (see chapter 9.1)

Result: The measurement is passed.

Plots of the measurements

Plot 1: 9 kHz – 30 MHz;
Part 15.209 Magnetics, Measurement distance 3m

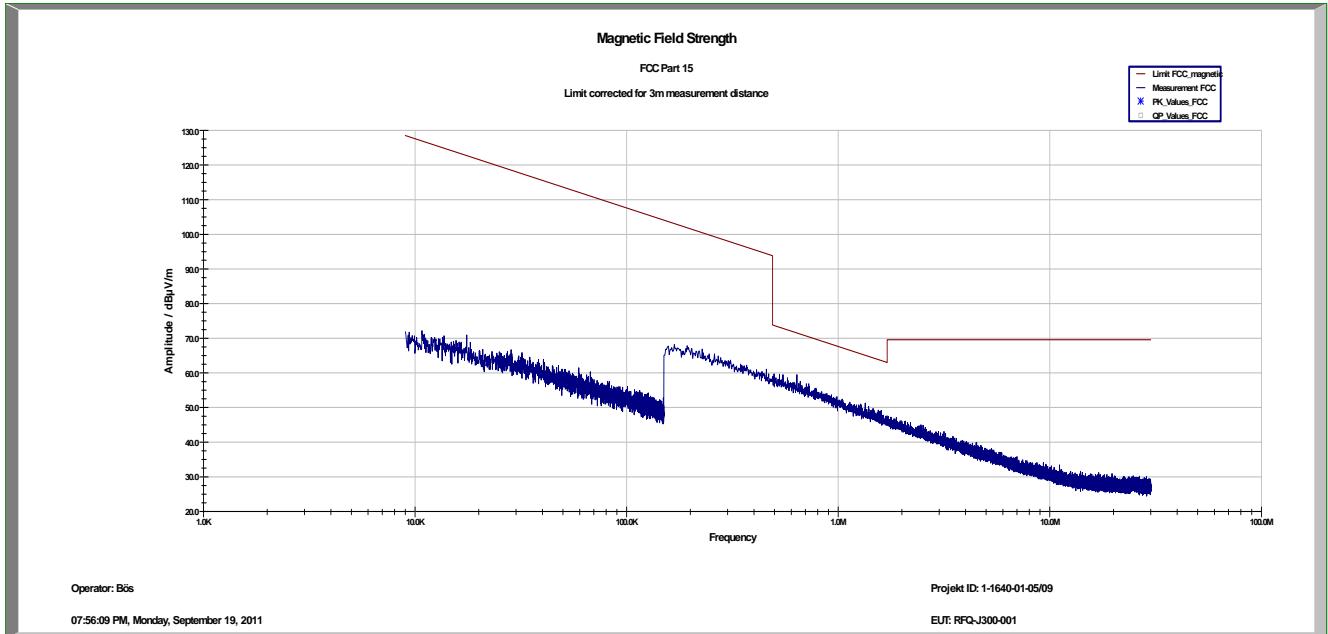

Transmit frequency 314.9 MHz

Plot 2: 30 MHz – 1000 MHz


Common Information

EUT: RFQ-J300-001
 Serial Number: unknown
 Test Description: FCC part 15 @ 10 m
 Operating Conditions: cont. TX 315MHz
 Operator Name: Wolsdorfer
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m
 Subrange 30 MHz - 2 GHz Step Size 60 kHz Detectors QPK IF BW 120 kHz Meas. Time 1 s Preamp 20 dB

FCC_10m(B)

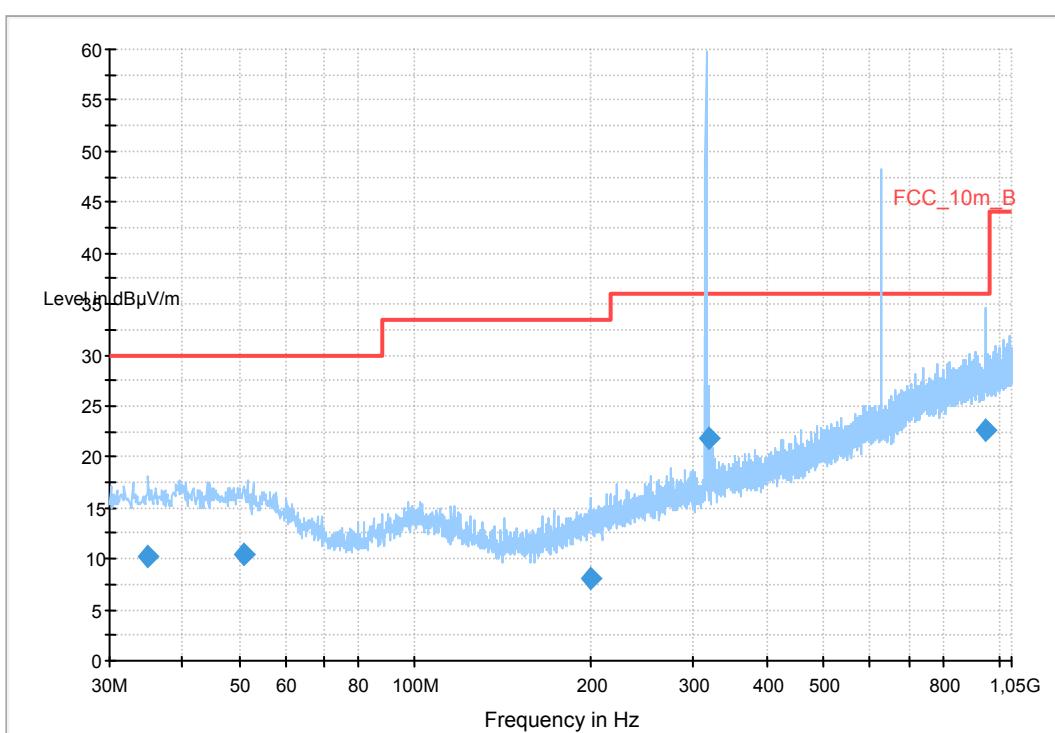

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	MARGIN (dB)	Limit (dB μ V/m)	Comment
34.922550	10.3	1000.0	120.000	214.0	V	143.0	13.0	19.7	30.0	
50.981700	10.5	1000.0	120.000	136.0	V	326.0	13.3	19.5	30.0	
200.343600	8.0	1000.0	120.000	385.0	H	308.0	11.7	25.5	33.5	
315.350700	31.3	1000.0	120.000	206.0	H	284.0	15.0	4.7	36.0	
319.234650	*	1000.0	120.000	100.0	V	154.0	15.1	14.2	36.0	
629.803050	*	1000.0	120.000	299.0	V	159.0	21.0	-7.9	36.0	
944.181750	22.7	1000.0	120.000	200.0	V	7.0	25.3	13.3	36.0	

Max. hold Peak values (incl. cor.)

Frequency (MHz)	Peak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	MARGIN (dB)	Limit (dB μ V/m)	Comment
319.234650	65.71	1000.0	120.000	100.0	V	154.0	15.1	14.2	36.0	carrier
629.803050	45.41	1000.0	120.000	299.0	V	159.0	21.0	-7.9	36.0	1st

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]

@ GPIB0 (ADR 20), SN 100083/003, FW 4.42

Signal Path: without Notch

FW 1.0

Antenna: VULB 9163

SN 9163-295, FW ---

Correction Table (vertical): VULP6113

Correction Table (horizontal): VULP6113

Correction Table (vertical): Cable_EN_1GHz (1005)

Correction Table (horizontal): Cable_EN_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]


@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]


@ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 3: 1000 MHz – 12750 MHz Antenna vertical

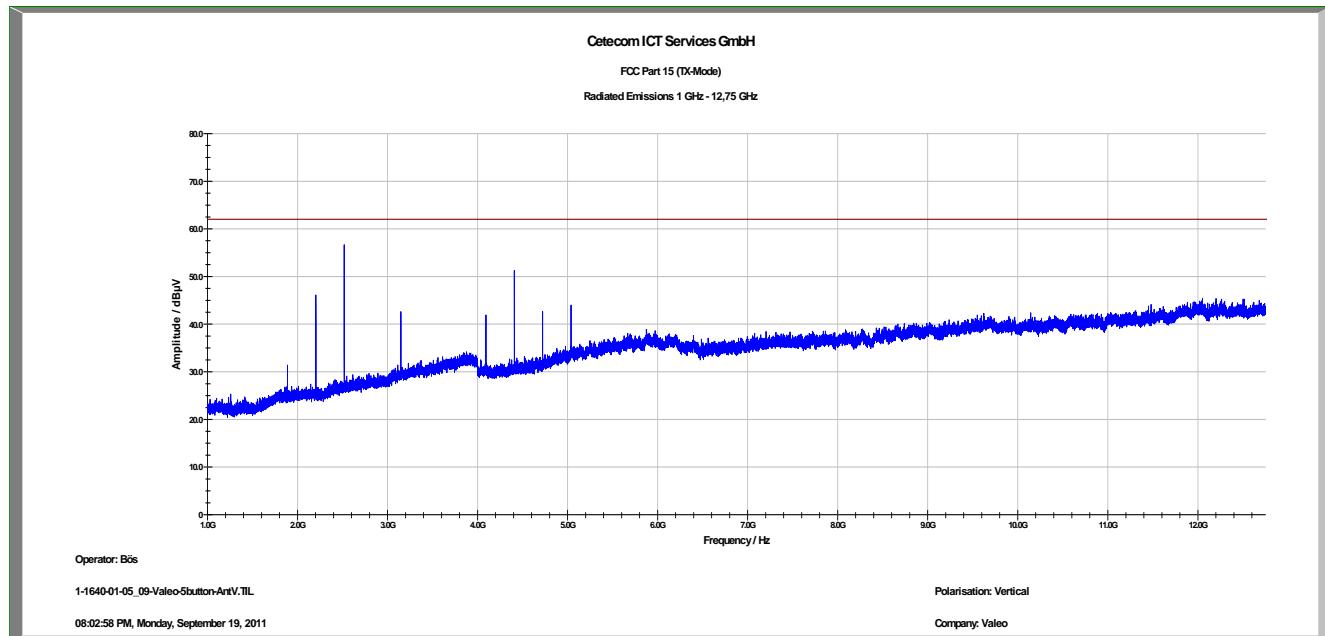

Plot 4: 1000 MHz – 12750 MHz Antenna horizontal

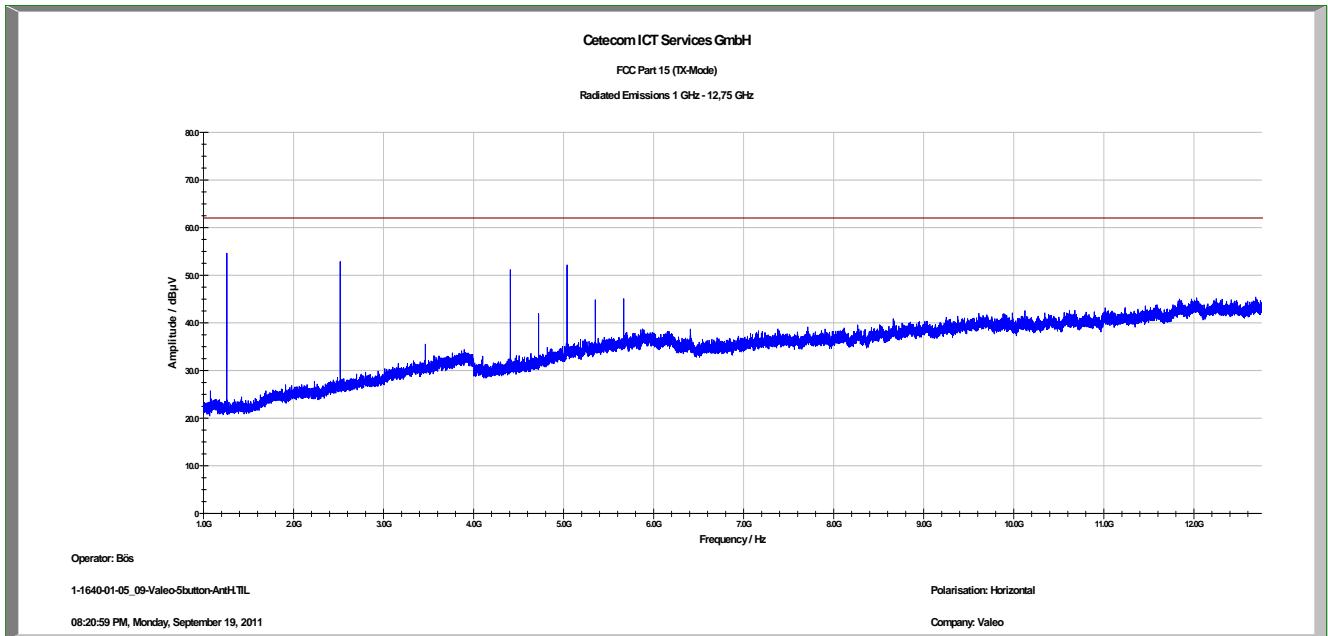

9.6 Receiver spurious emission (radiated)

Not applicable

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	EMI Test Receiver 9 kHz - 3 GHz incl. Preselector	ESPI3	R&S	101713	300004059	k	16.08.2011	16.08.2012
2	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
3	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
4	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
5	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
6	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
7	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
8	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
9	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
10	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
11	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
12	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
13	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
14	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
15	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
16	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
17	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
18	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
19	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
20	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
21	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
22	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
23	n. a.	MXG Microwave	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012

		Analog Signal Generator							
24	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vIKI!	08.09.2010	08.09.2012
25	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	17.12.2008	17.12.2011
26	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
27	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
28	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
29	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
30	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
31	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
32	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
33	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
34	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
35	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
36	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vIKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

Annex A Photographs of the test setup

Photo documentation:

Photo 1: Chamber F

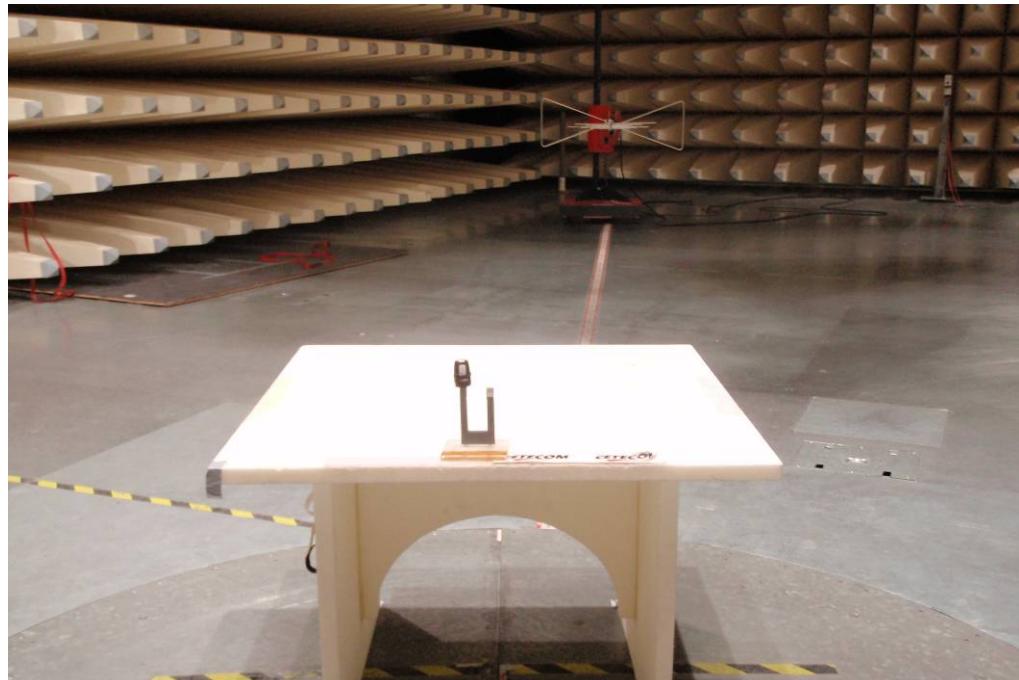


Photo 2: Chamber F



Photo 3: Chamber F



Photo 4: Chamber C

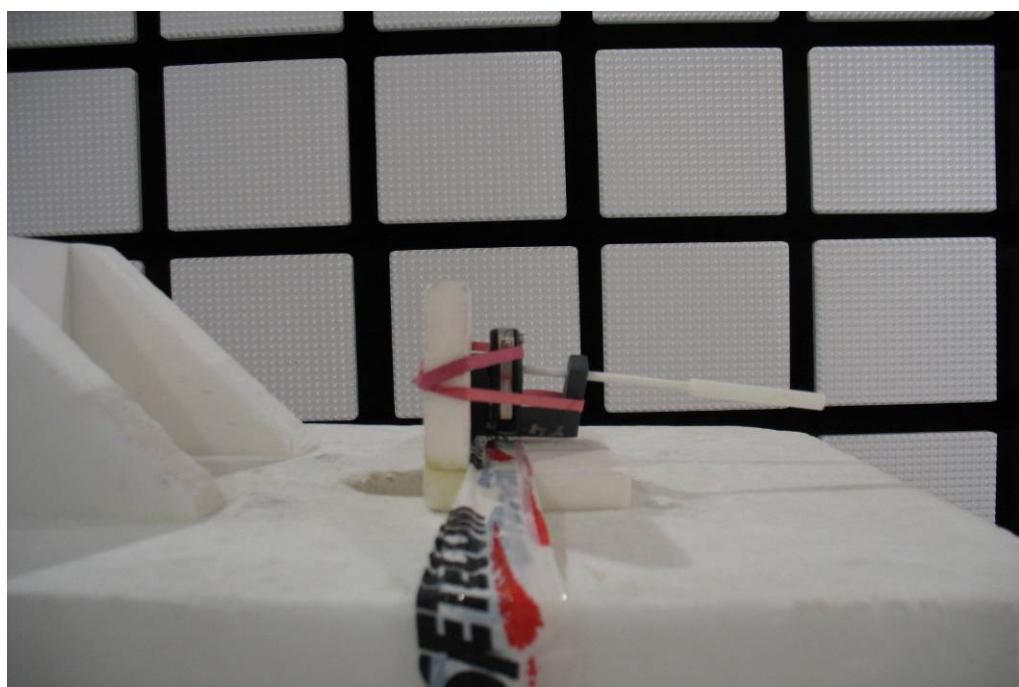


Photo 5: Chamber C

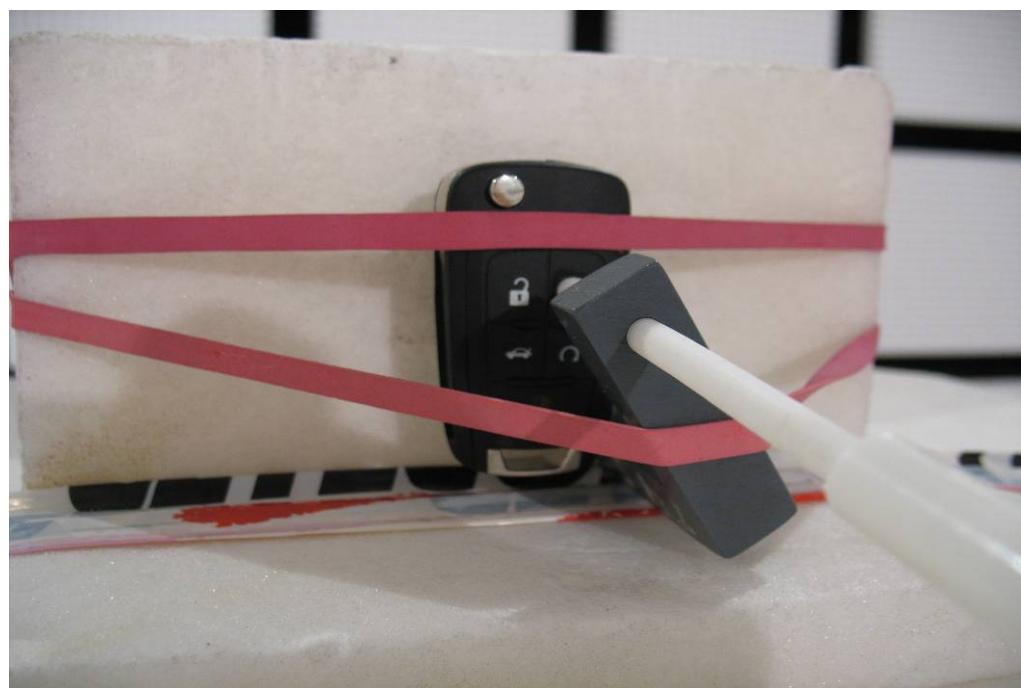


Photo 6: Chamber C



Photo 7: Chamber C


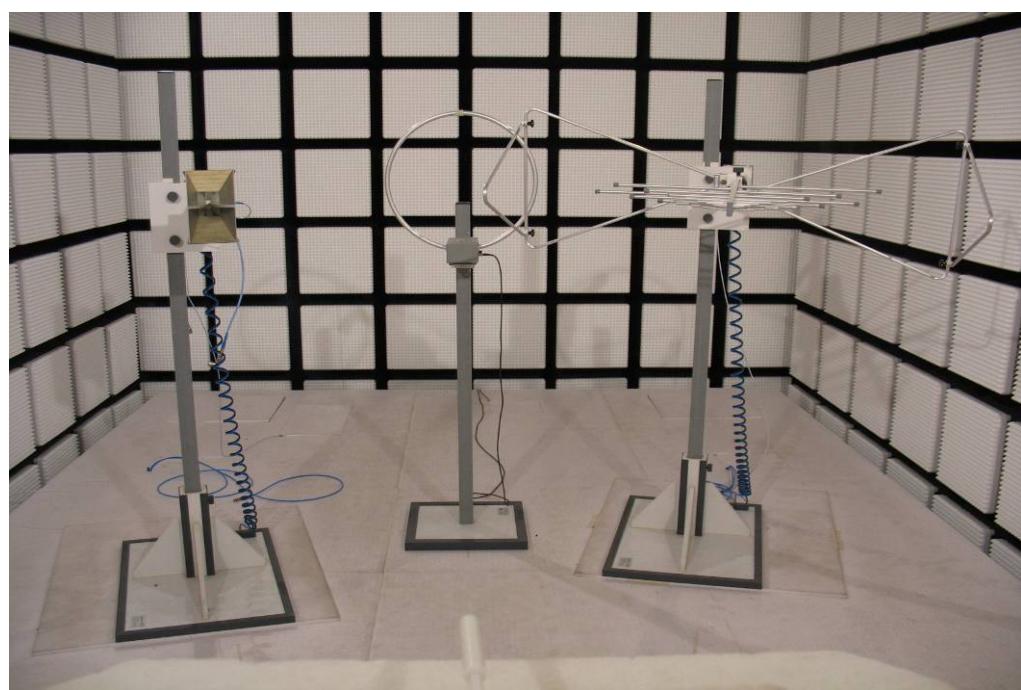


Photo 8: Chamber C

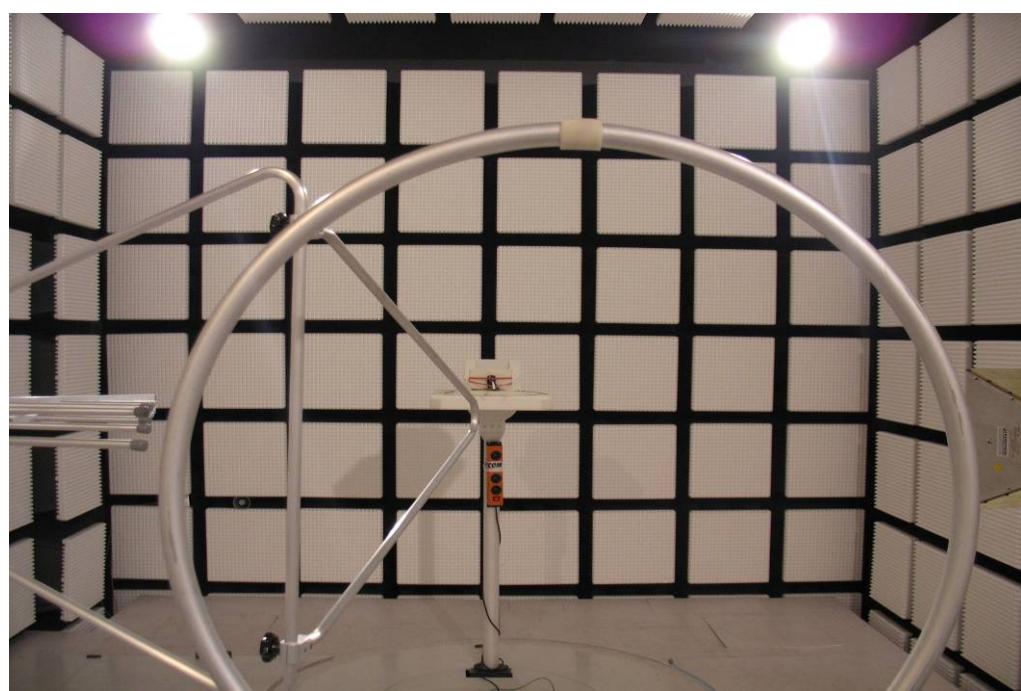

Annex B External photographs of the EUT

Photo documentation:

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:



Photo 6:



Photo 7:



Photo 8:



Photo 9:



Photo 10:

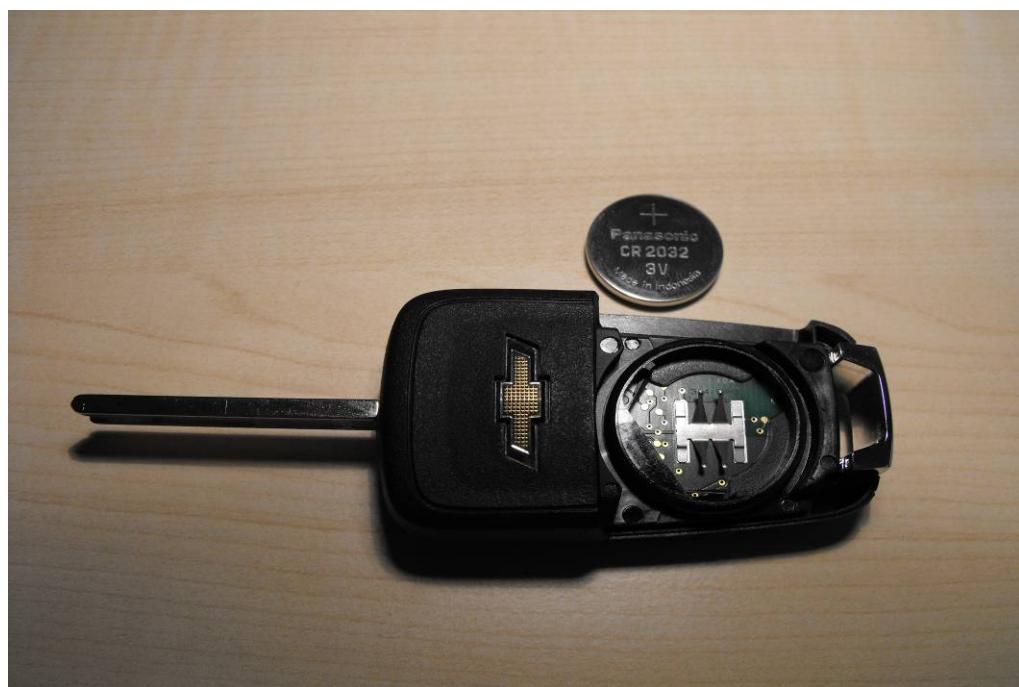


Photo 11:



Annex C Internal photographs of the EUT

Photo documentation:

Photo 1:



Photo 2:



Photo 3:

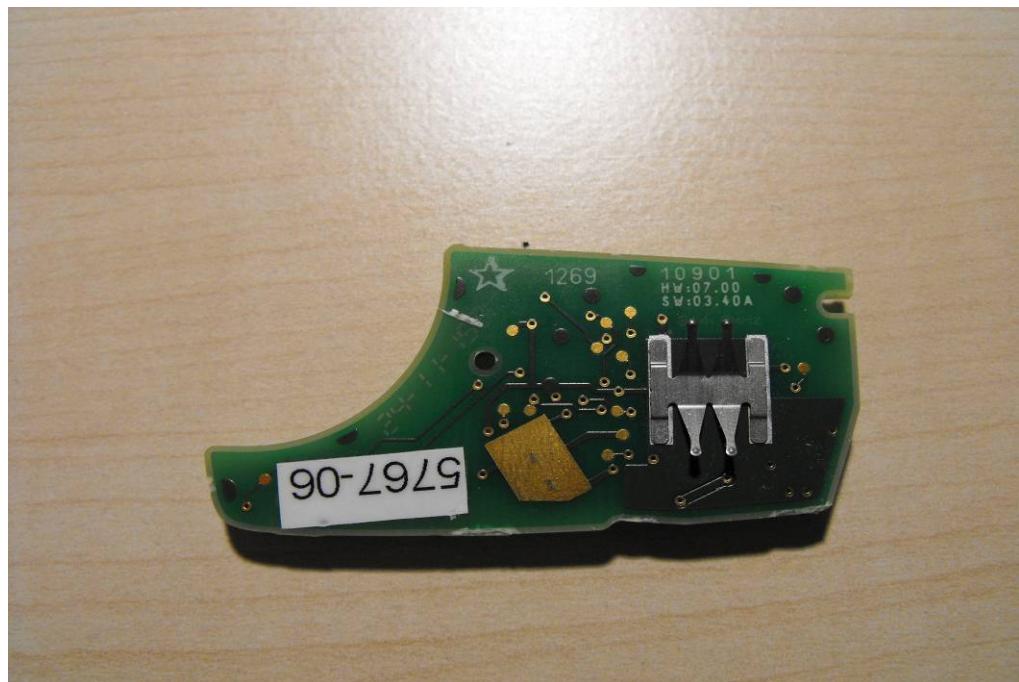


Photo 4:

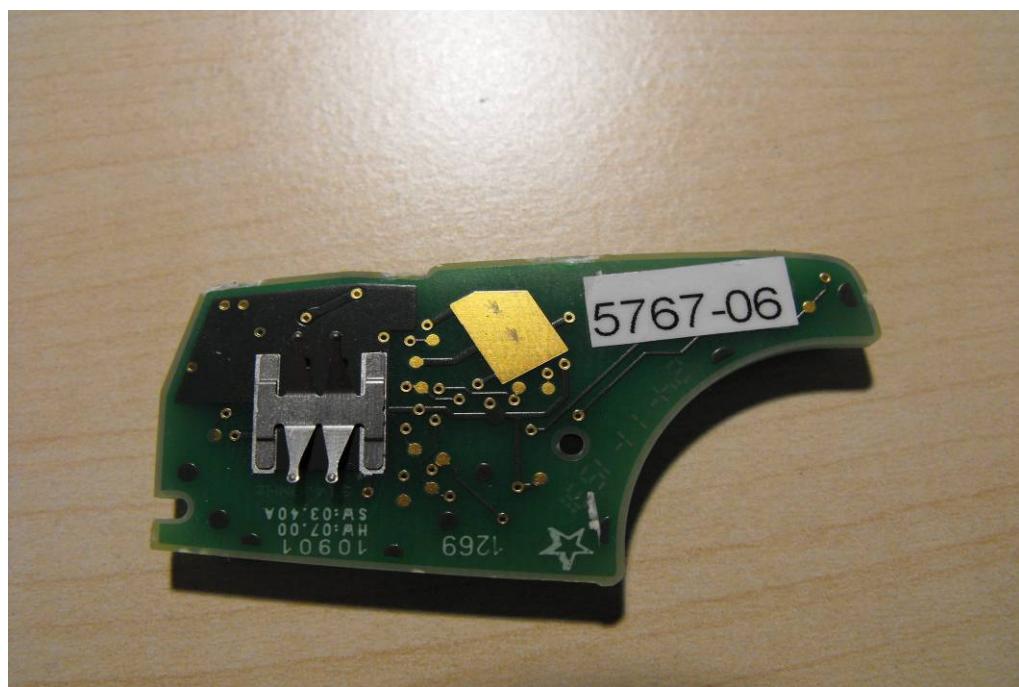


Photo 5:

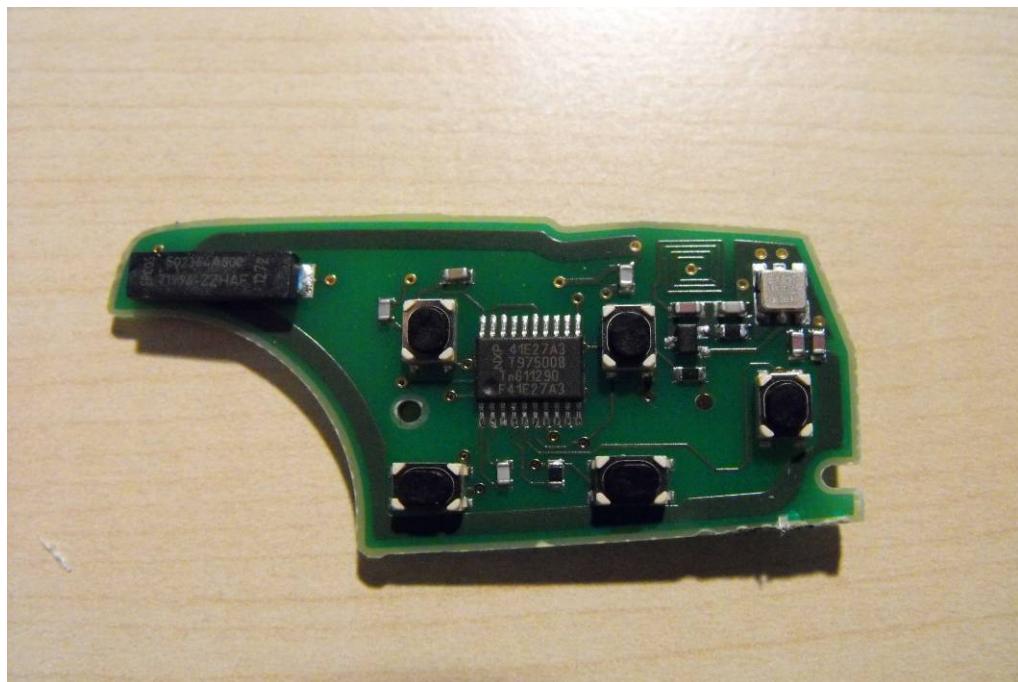


Photo 6:


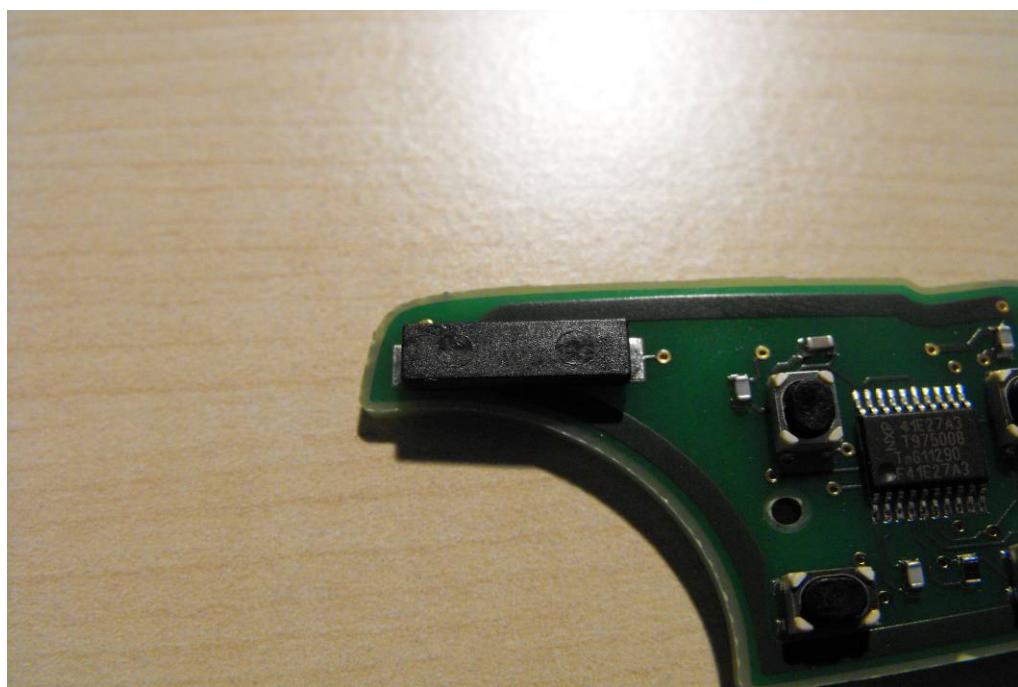


Photo 7:

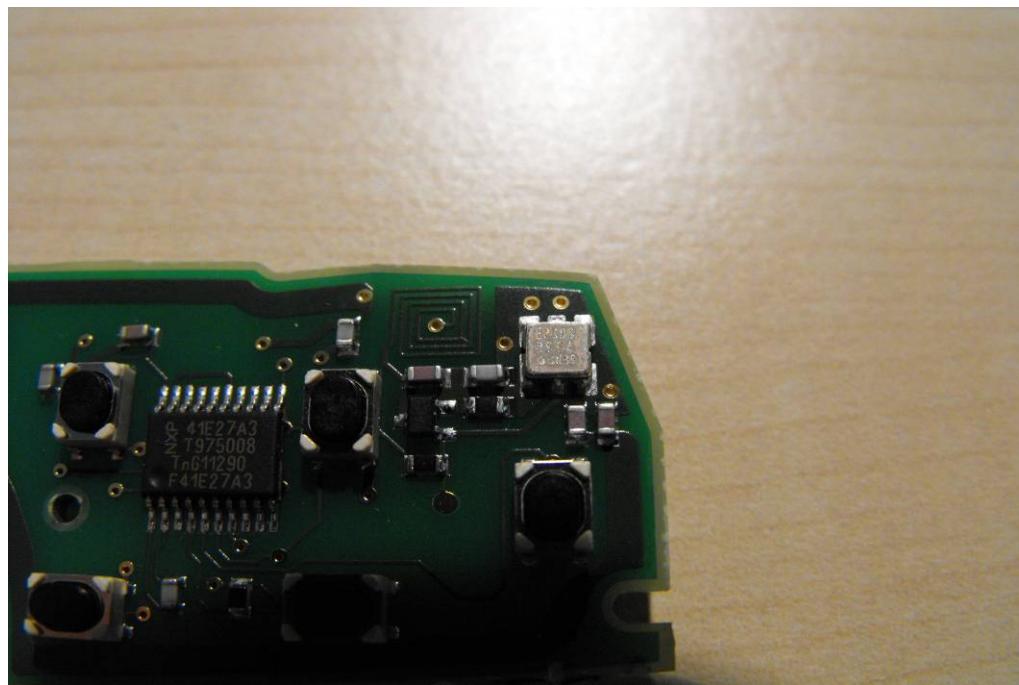

Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2012-03-02
-A	Equipment Model Number corrected on page 8. This test report replaces the report 1-1640/09-01-05 dated from 2012-03-02.	2012-03-09

Annex E Further information

Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex F Accreditation Certificate



Deutsche Akkreditierungsstelle GmbH German Accreditation Body

Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV
Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition

Accreditation



The Deutsche Akkreditierungsstelle GmbH (German Accreditation Body) attests that the testing laboratory

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10
66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields:

Wired communications and DECT
Acoustic
Radio
Short Range Devices (SRD)
RFID
WiMax and Richtfunk
Mobile radio (GSM / DCS), Over the Air (OTA) Performance
Electromagnetic Compatibility (EMC) incl. Automotive
Product safety
SAR and Hearing Aid Compatibility (HAC)
Environmental simulation
Smart Card Terminals
Bluetooth
Wi-Fi-Services

The accreditation certificate shall only apply in connection with the notice of accreditation of 13.04.2011 with the accreditation number D-PL-12076-01 and is valid until 03.09.2014. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 82 pages.

Registration number of the certificate: D-PL-12076-01-01

Frankfurt am Main, 13.04.2011


Dipl.-Ing. Michael Eger
Head of Division 2

This document is a translation. The definitive version is the original German accreditation certificate.

See notes overleaf.

Deutsche Akkreditierungsstelle GmbH

Office Berlin
Spiritedmarkt 10
10117 Berlin

Office Frankfurt am Main
Gartenstraße 6
60594 Frankfurt am Main

Office Braunschweig
Bundesallee 100
38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites:
EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.nu

Front side of certificate

Back side of certificate

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

http://www.cetecon.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkreditierung_URK_EN17025-En_incl_Annex.pdf