

FCC ID : AWANH-5500

BT (Speaker device)

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to KDB 447498 (2)(a)(i)

Frequency Range		Center frequency (MHz)	60/f SAR Limitation (mw)
Low Frequency (MHz)	High Frequency(MHz)		
2402	2480	2441	25

Maximum measured transmitter power:


Conducted Power (dBm)	Max Antenna Gain (dBi)	EIRP (mw)
1.50	2	2.24

Threshold at which no SAR required is 25 mW.

Maximum Tx power is 2.24mw EIRP

Conclusion: No SAR is required.

Sincerely,

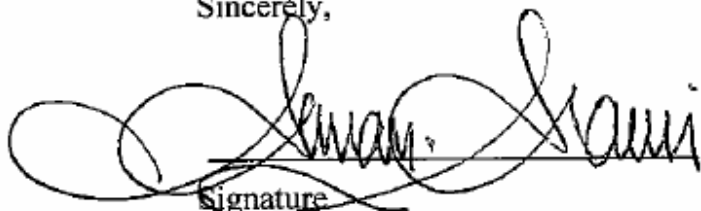

Signature

Arman Arami / Manager

E-mail: : arman@nynemultimedia.com

Phone: 650 483 6373

Fax: 805 988 0791

Address : 3451 Lunar Court Oxnard, California, 93030 USA