

FCC 47 CFR PART 22H and 24E

Test Report

Product Type : Wireless module
Applicant : Telit Communications S.p.A.
Address : Viale Stazione di Prosecco 5/b, Trieste, 34010, Italy
Trade Name : Telit
Model Number : HE920-NA
Test Specification : FCC 47 CFR PART 22H: Oct, 2012
FCC 47 CFR PART 24E: Oct, 2012
CANADA RSS-132 ISSUE 3: Jan., 2013
CANADA RSS-133 ISSUE 6: Jan., 2013
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI/TIA-603-C-2004
Application Purpose : Original
Receive Date : Nov. 12, 2012
Test Period : Nov. 20, 2012 ~ Mar. 13, 2013
Issue Date : Apr. 09, 2013

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|---------------|--------------------|------------|
| 00 | Mar. 18, 2013 | Initial Issue | |
| 01 | Apr. 09, 2013 | Revised IC number. | Joyce Liao |
| | | | |
| | | | |

Verification of Compliance

Issued Date: 04/09/2013

Product Type : Wireless module
Applicant : Telit Communications S.p.A.
Address : Viale Stazione di Prosecco 5/b, Trieste, 34010, Italy
Trade Name : Telit
Model Number : HE920-NA
FCC ID : RI7HE920NA
IC : 5131A-HE920NA
EUT Rated Voltage : DC 3.8V
Test Voltage : DC 3.8V
Applicable Standard : FCC 47 CFR PART 22H: Oct, 2012
FCC 47 CFR PART 24E: Oct, 2012
CANADA RSS-132 ISSUE 3: Jan. 2013
CANADA RSS-133 ISSUE 6: Jan. 2013
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI/TIA-603-C-2004

Application Purpose : Original

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 22H, Part 24E.

The test results of this report relate only to the tested sample identified in this report.


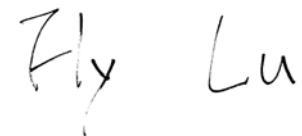
Approved By :  Reviewed By : 
(Manager) (Murphy Wang) (Testing Engineer) (Fly Lu)

TABLE OF CONTENTS

| | | |
|----------|---|-----------|
| 1 | General Information | 6 |
| 1.1. | EUT Description | 6 |
| 1.2. | Mode of Operation..... | 7 |
| 1.3. | EUT Exercise Software | 7 |
| 1.4. | Configuration of Test System Details | 7 |
| 1.5. | Test Site Environment | 8 |
| 1.6. | Summary of Test Result | 8 |
| 2 | RF Output Power Test | 9 |
| 2.1. | Limit | 9 |
| 2.2. | Test Instruments | 9 |
| 2.3. | Test Setup..... | 9 |
| 2.4. | Test Procedure | 9 |
| 2.5. | Uncertainty | 9 |
| 2.6. | Test Result..... | 10 |
| 3 | Effective Radiated Power / Equivalent Isotropic Radiated Power Test..... | 14 |
| 3.1. | Limit | 14 |
| 3.2. | Test Instruments | 14 |
| 3.3. | Setup | 14 |
| 3.4. | Test Procedure | 16 |
| 3.5. | Uncertainty | 16 |
| 3.6. | Test Result..... | 17 |
| 4 | Occupied Bandwidth Test..... | 19 |
| 4.1. | Limit | 19 |
| 4.2. | Test Instruments | 19 |
| 4.3. | Setup | 19 |
| 4.4. | Test Procedure | 20 |
| 4.5. | Uncertainty | 20 |
| 4.6. | Test Result..... | 20 |
| 4.7. | Test Graphs | 21 |
| 5 | Band Edge Test | 27 |
| 5.1. | Limit | 27 |
| 5.2. | Test Instruments | 27 |
| 5.3. | Setup | 27 |
| 5.4. | Test Procedure | 28 |
| 5.5. | Uncertainty | 28 |
| 5.6. | Test Result..... | 28 |
| 5.7. | Test Graphs | 29 |

| | | |
|----------|---|------------|
| 6 | Conducted Spurious Emission Test | 33 |
| 6.1. | Limit | 33 |
| 6.2. | Test Instruments | 33 |
| 6.3. | Setup | 33 |
| 6.4. | Test Procedure | 34 |
| 6.5. | Uncertainty | 34 |
| 6.6. | Test Result..... | 34 |
| 7 | Field Strength of Spurious Radiation Test | 89 |
| 7.1. | Limit | 89 |
| 7.2. | Test Instruments | 89 |
| 7.3. | Setup | 90 |
| 7.4. | Test Procedure | 90 |
| 7.5. | Uncertainty | 91 |
| 7.6. | Test Result..... | 92 |
| 8 | Frequency Stability (Temperature & Voltage Variation) Test | 105 |
| 8.1. | Limit | 105 |
| 8.2. | Test Instruments | 105 |
| 8.3. | Setup | 105 |
| 8.4. | Test Procedure | 106 |
| 8.5. | Uncertainty | 107 |
| 8.6. | Test Result..... | 108 |

1 General Information

1.1. EUT Description

| | | | | | |
|----------------------|----------------------------|---|--------------------|--------------------|------------|
| Applicant | | Telit Communications S.p.A. | | | |
| Applicant Address | | Viale Stazione di Prosecco 5/b, Trieste, 34010, Italy | | | |
| Manufacturer | | Telit Communications S.p.A. | | | |
| Manufacturer Address | | Via Stazione di Prosecco, 5/B 34010 Sgonico Italy | | | |
| Product Type | | Wireless module | | | |
| Trade Name | | Telit | | | |
| Model Number | | HE920-NA | | | |
| FCC ID | | RI7HE920NA | | | |
| IC | | 5131A-HE920NA | | | |
| Mode | GSM/GPRS/ EGPRS/ DTM | Band | UL Frequency (MHz) | DL Frequency (MHz) | Modulation |
| | | 850 | 824.2 ~ 848.8 | 869.2 ~ 893.8 | GMSK/8PSK |
| | | 1900 | 1850.2 ~ 1909.8 | 1930.2 ~ 1989.8 | GMSK/8PSK |
| | WCDMA/ HSDPA/ HSUPA | Band | UL Frequency (MHz) | DL Frequency (MHz) | Modulation |
| | | II | 1852.4 ~ 1907.6 | 1932.4 ~ 1987.6 | QPSK |
| | | V | 826.4 ~ 846.6 | 871.4 ~ 891.6 | QPSK |
| Channel Control | | Auto | | | |
| Type of Antenna | | Dipole Antenan | | | |
| Antenna Gain (dBi) | | GSM/GPRS/EGPRS/DTM 850 : 2.0 dBi GSM/GPRS/EGPRS/DTM 1900 : 2.0 dBi WCDMA/ HSDPA/ HSUPA Band II : 2.0 dBi WCDMA/ HSDPA/ HSUPA Band V : 2.0 dBi | | | |
| Max. RF Output power | | GSM/GPRS/DTM 850 : 33.02 dBm / 2.004 W EGPRS/DTM 850 : 29.91 dBm / 0.979 W GSM/GPRS/DTM 1900 : 29.18 dBm / 0.828 W EGPRS/DTM 1900 : 28.41 dBm / 0.693 W WCDMA/ HSDPA/ HSUPA Band II : 26.75 dBm / 0.473 W WCDMA/ HSDPA/ HSUPA Band V : 27.48 dBm / 0.560 W | | | |
| Max. ERP/EIRP | | GSM/GPRS/DTM 850 : 30.58 dBm / 1.143 W EGPRS/DTM 850 : 29.99 dBm / 0.998 W GSM/GPRS/DTM 1900 : 27.38 dBm / 0.547 W EGPRS/DTM 1900 : 26.14 dBm / 0.411 W WCDMA/ HSDPA/ HSUPA Band II : 25.38 dBm / 0.345 W WCDMA/ HSDPA/ HSUPA Band V : 26.85 dBm / 0.484 W | | | |
| Emission Designator | | GSM/GPRS/DTM 850 : 248KGXW EGPRS/DTM 850 : 244KG7W GSM/GPRS/DTM 1900 : 246KGXW EGPRS/DTM 1900 : 248KG7W WCDMA/ HSDPA/ HSUPA Band II : 4M16F9W WCDMA/ HSDPA/ HSUPA Band V : 4M14F9W | | | |

1.2. Mode of Operation

ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


| Test Mode |
|---------------------------------|
| Mode 1: GSM 850 Link Mode |
| Mode 2: GSM 1900 Link Mode |
| Mode 3: EGPRS 850 Link Mode |
| Mode 4: EGPRS 1900 Link Mode |
| Mode 5: WCDMA Band II Link Mode |
| Mode 6: WCDMA Band V Link Mode |
| Mode 7: Receive Link Mode |

Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

1.3. EUT Exercise Software

| | |
|---|--|
| 1 | Setup the EUT and Base Station (CMU200) as shown on 1.4. |
| 2 | Turn on the power of all equipment. |

1.4. Configuration of Test System Details

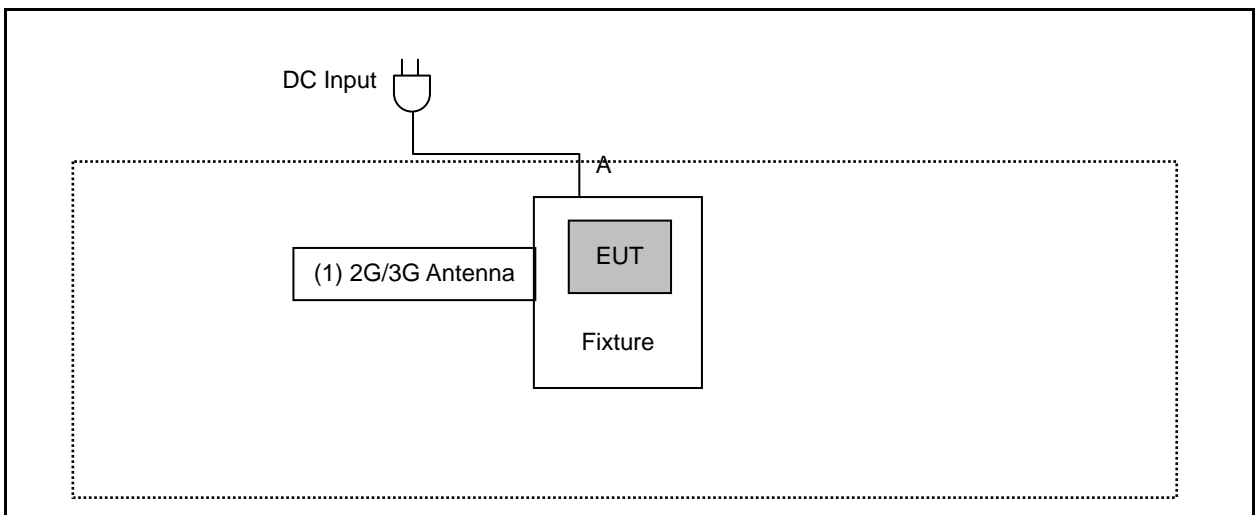

| Signal Cable Type | | Signal Cable Description |
|-------------------|----------------|--------------------------|
| A | DC Power Cable | Non-Shielded, 3.0m |

| Devices Description | | | | |
|---------------------------------------|---------------------------|-----------------|---------------|------------|
| Product | Manufacturer | Model Number | Serial Number | Power Cord |
| (1) 2G/3G Antenna (Max. Gain: 2.0dBi) | HANKOOK ANTENNA CO., LTD. | TB-800/1900-SMA | N/A | N/A |

1.5. Test Site Environment

| Items | Required (IEC 68-1) | Actual |
|----------------------------|---------------------|--------|
| Temperature (°C) | 15-35 | 23 |
| Humidity (%RH) | 25-75 | 55.2 |
| Barometric pressure (mbar) | 860-1060 | 950 |

1.6. Summary of Test Result

| Description | FCC Rule | IC Rule | Limit | Result |
|---|-------------------------------------|--|--|--------|
| Conducted Output Power | §2.1046 | N/A | N/A | Pass |
| Effective Radiated Power | §22.913(a)(2) | RSS-132(4.4) SRSP-503(5.1.3) | < 7 Watts for FCC (<6.3 Watts for IC) | Pass |
| Equivalent Isotropic Radiated Power | §24.232(c) | RSS-133 (6.4) SRSP-510(5.1.2) | < 2 Watts | Pass |
| Occupied Bandwidth | §2.1049 §22.917(a) §24.238(a) | RSS-Gen (4.6.1) | N/A | Pass |
| Band Edge Measurement | §2.1051 §22.917(a) §24.238(a) | RSS-132 (4.5.1)RSS-133 (6.5.1) | < 43+10log ₁₀ (P[Watts]) | Pass |
| Conducted Spurious Emission | §2.1051 §22.917(a) §24.238(a) | RSS-132 (4.5.1) RSS-133 (6.5.1) | < 43+10log ₁₀ (P[Watts]) | Pass |
| Field Strength of Spurious Radiation | §2.1053 §22.917(a) §24.238(a) | RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-Gen (4.10) | < 43+10log ₁₀ (P[Watts]) | Pass |
| Frequency Stability for Temperature & Voltage | §2.1055 §22.355 §24.235 | RSS-132(4.3) RSS-133(6.3) | < 2.5 ppm | Pass |

2 RF Output Power Test

2.1. Limit

N/A


2.2. Test Instruments

| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|--------------------------------------|--------------|--------------|---------------|------------|--------|
| Universal Radio Communication Tester | R & S | CMU200 | 109369 | 08/07/2012 | (2) |
| Single Channel PK Power Sensor | Agilent | N1911A | MY45101619 | 12/15/2011 | (2) |
| Wideband Power Meter | Agilent | N1921A | MY45241957 | 12/15/2011 | (2) |
| Test Site | ATL | TE05 | TE05 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

2.3. Test Setup

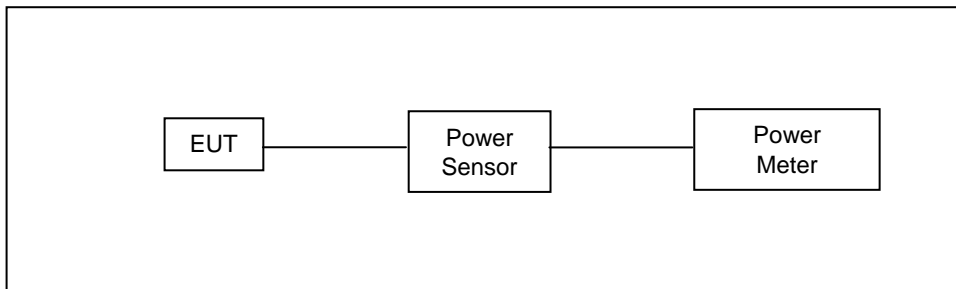

2.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

1. The transmitter output was connected to power meter and base station through Power Divider.
2. Set base station for EUT at GSM 850: PCL=5 and PCS 1900: PCL=0.
3. Set base station for EUT at WCDMA Band V and WCDMA Band II, power level was set to maximum.
4. Select lowest, middle, and highest channels for each band.

2.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

2.6. Test Result

| Model Number | HE920-NA | | | | | | |
|--------------|-----------------|--|-----------------|---------------------|-------|--------------|--------------|
| Test Item | RF Output Power | | | | | | |
| Date of Test | 01/29/2013 | | | Test Site | | TE05 | |
| Bands | Modulation Type | Data Rate | Frequency (MHz) | Burst Average Power | | Peak Power | |
| | | | | (dBm) | (W) | (dBm) | (W) |
| GSM 850 | GMSK | ----- | 824.2 | 32.66 | 1.845 | 32.91 | 1.954 |
| | | | 836.6 | 32.83 | 1.919 | 33.02 | 2.004 |
| | | | 848.8 | 32.75 | 1.884 | 32.96 | 1.977 |
| GRRS 850 | GMSK | 4Down1Up (Duty Factor 1/8) | 824.2 | 32.61 | 1.824 | 32.86 | 1.932 |
| | | | 836.6 | 32.71 | 1.866 | 32.96 | 1.977 |
| | | | 848.8 | 32.66 | 1.845 | 32.89 | 1.945 |
| | | 3Down2Up (Duty Factor 2/8) | 824.2 | 32.37 | 1.726 | 32.61 | 1.824 |
| | | | 836.6 | 32.45 | 1.758 | 32.63 | 1.832 |
| | | | 848.8 | 32.42 | 1.746 | 32.65 | 1.841 |
| | | 2Down3Up (Duty Factor 1/8) | 824.2 | 31.06 | 1.276 | 31.22 | 1.324 |
| | | | 836.6 | 31.16 | 1.306 | 31.32 | 1.355 |
| | | | 848.8 | 31.09 | 1.285 | 31.25 | 1.334 |
| | | 1Down4Up (Duty Factor 2/8) | 824.2 | 29.57 | 0.906 | 29.71 | 0.935 |
| | | | 836.6 | 29.63 | 0.918 | 29.81 | 0.957 |
| | | | 848.8 | 29.61 | 0.914 | 29.79 | 0.953 |
| EGPRS 850 | 8PSK | 4Down1Up (Duty Factor 1/8) | 824.2 | 26.71 | 0.469 | 29.84 | 0.964 |
| | | | 836.6 | 26.78 | 0.476 | 29.91 | 0.979 |
| | | | 848.8 | 26.74 | 0.472 | 29.88 | 0.973 |
| | | 3Down2Up (Duty Factor 2/8) | 824.2 | 26.58 | 0.455 | 29.76 | 0.946 |
| | | | 836.6 | 26.65 | 0.462 | 29.83 | 0.962 |
| | | | 848.8 | 26.64 | 0.461 | 29.81 | 0.957 |
| | | 2Down3Up (Duty Factor 1/8) | 824.2 | 25.52 | 0.356 | 28.63 | 0.729 |
| | | | 836.6 | 25.59 | 0.362 | 28.66 | 0.735 |
| | | | 848.8 | 25.61 | 0.364 | 28.69 | 0.740 |
| | | 1Down4Up (Duty Factor 2/8) | 824.2 | 24.42 | 0.277 | 27.53 | 0.566 |
| | | | 836.6 | 24.45 | 0.279 | 27.56 | 0.570 |
| | | | 848.8 | 24.47 | 0.280 | 27.59 | 0.574 |
| DTM 850 | GMSK | GSM+GPRS 2Down3Up (Duty Factor 3/8) | 824.2 | 31.02 | 1.265 | 31.18 | 1.312 |
| | | | 836.6 | 31.11 | 1.291 | 31.25 | 1.334 |
| | | | 848.8 | 31.06 | 1.276 | 31.21 | 1.321 |
| | GMSK + 8PSK | GSM+EGPRS 2Down3Up (Duty Factor 3/8) | 824.2 | 25.26 | 0.336 | 31.16 | 1.306 |
| | | | 836.6 | 25.33 | 0.341 | 31.21 | 1.321 |
| | | | 848.8 | 25.36 | 0.344 | 31.33 | 1.358 |

Note: The peak power testing result was used peak detector.

| Model Number | HE920-NA | | | | | | |
|--------------|-----------------|--|-----------------|---------------------|-------|--------------|--------------|
| Test Item | RF Output Power | | | | | | |
| Date of Test | 01/29/2013 | | | Test Site | | TE05 | |
| Bands | Modulation Type | Data Rate | Frequency (MHz) | Burst Average Power | | Peak Power | |
| | | | | (dBm) | (W) | (dBm) | (W) |
| GSM 1900 | GMSK | ----- | 1850.20 | 29.03 | 0.800 | 29.18 | 0.828 |
| | | | 1880.00 | 28.94 | 0.783 | 29.03 | 0.800 |
| | | | 1909.80 | 28.59 | 0.723 | 28.75 | 0.750 |
| GPRS 1900 | GMSK | 4Down1Up (Duty Factor 1/8) | 1850.20 | 28.91 | 0.778 | 29.06 | 0.805 |
| | | | 1880.00 | 28.81 | 0.760 | 28.96 | 0.787 |
| | | | 1909.80 | 28.45 | 0.700 | 28.63 | 0.729 |
| | | 3Down2Up (Duty Factor 2/8) | 1850.20 | 28.73 | 0.746 | 28.86 | 0.769 |
| | | | 1880.00 | 28.61 | 0.726 | 28.76 | 0.752 |
| | | | 1909.80 | 28.31 | 0.678 | 28.49 | 0.706 |
| | | 2Down3Up (Duty Factor 1/8) | 1850.20 | 27.42 | 0.552 | 27.56 | 0.570 |
| | | | 1880.00 | 27.27 | 0.533 | 27.43 | 0.553 |
| | | | 1909.80 | 27.28 | 0.535 | 27.46 | 0.557 |
| | | 1Down4Up (Duty Factor 2/8) | 1850.20 | 26.24 | 0.421 | 26.39 | 0.436 |
| | | | 1880.00 | 26.09 | 0.406 | 26.21 | 0.418 |
| | | | 1909.80 | 26.11 | 0.408 | 26.26 | 0.423 |
| EGPRS 1900 | 8PSK | 4Down1Up (Duty Factor 1/8) | 1850.20 | 25.16 | 0.328 | 28.41 | 0.693 |
| | | | 1880.00 | 24.96 | 0.313 | 28.11 | 0.647 |
| | | | 1909.80 | 24.86 | 0.306 | 28.09 | 0.644 |
| | | 3Down2Up (Duty Factor 2/8) | 1850.20 | 25.03 | 0.318 | 28.31 | 0.678 |
| | | | 1880.00 | 24.81 | 0.303 | 28.06 | 0.640 |
| | | | 1909.80 | 24.76 | 0.299 | 28.03 | 0.635 |
| | | 2Down3Up (Duty Factor 1/8) | 1850.20 | 24.07 | 0.255 | 27.21 | 0.526 |
| | | | 1880.00 | 23.81 | 0.240 | 27.06 | 0.508 |
| | | | 1909.80 | 23.78 | 0.239 | 26.99 | 0.500 |
| | | 1Down4Up (Duty Factor 2/8) | 1850.20 | 23.02 | 0.200 | 26.11 | 0.408 |
| | | | 1880.00 | 22.72 | 0.187 | 25.96 | 0.394 |
| | | | 1909.80 | 22.71 | 0.187 | 25.93 | 0.392 |
| DTM 1900 | GMSK | GSM+GPRS 2Down3Up (Duty Factor 3/8) | 1850.20 | 27.26 | 0.532 | 27.48 | 0.560 |
| | | | 1880.00 | 27.13 | 0.516 | 27.31 | 0.538 |
| | | | 1909.80 | 27.19 | 0.524 | 27.42 | 0.552 |
| | GMSK + 8PSK | GSM+EGPRS 2Down3Up (Duty Factor 3/8) | 1850.20 | 23.96 | 0.249 | 27.56 | 0.570 |
| | | | 1880.00 | 23.82 | 0.241 | 27.43 | 0.553 |
| | | | 1909.80 | 23.74 | 0.237 | 27.36 | 0.545 |

Note: The peak power testing result was used peak detector.

| Model Number | HE920-NA | | | | | | |
|---------------|-----------------|----------|-----------------|---------------------|-------|--------------|--------------|
| Test Item | RF Output Power | | | | | | |
| Date of Test | 01/29/2013 | | | Test Site | | TE05 | |
| Bands | Modulation Type | Sub-Test | Frequency (MHz) | Burst Average Power | | Peak Power | |
| | | | | (dBm) | (W) | (dBm) | (W) |
| WCDMA Band II | QPSK | ----- | 1852.4 | 23.32 | 0.215 | 26.66 | 0.463 |
| | | | 1880.0 | 23.21 | 0.209 | 26.61 | 0.458 |
| | | | 1907.6 | 23.47 | 0.222 | 26.75 | 0.473 |
| HSDPA Band II | QPSK | 1 | 1852.4 | 22.27 | 0.169 | 25.42 | 0.348 |
| | | | 1880.0 | 22.14 | 0.164 | 25.29 | 0.338 |
| | | | 1907.6 | 22.38 | 0.173 | 25.53 | 0.357 |
| | | 2 | 1852.4 | 22.23 | 0.167 | 25.38 | 0.345 |
| | | | 1880.0 | 22.10 | 0.162 | 25.25 | 0.335 |
| | | | 1907.6 | 22.33 | 0.171 | 25.48 | 0.353 |
| | | 3 | 1852.4 | 21.74 | 0.149 | 24.89 | 0.308 |
| | | | 1880.0 | 21.61 | 0.145 | 24.76 | 0.299 |
| | | | 1907.6 | 21.86 | 0.153 | 25.01 | 0.317 |
| | | 4 | 1852.4 | 21.71 | 0.148 | 24.86 | 0.306 |
| | | | 1880.0 | 21.57 | 0.144 | 24.72 | 0.296 |
| | | | 1907.6 | 21.82 | 0.152 | 24.97 | 0.314 |
| HSUPA Band II | QPSK | 1 | 1852.4 | 21.99 | 0.158 | 25.12 | 0.325 |
| | | | 1880.0 | 21.59 | 0.144 | 24.72 | 0.296 |
| | | | 1907.6 | 22.16 | 0.164 | 25.29 | 0.338 |
| | | 2 | 1852.4 | 19.98 | 0.100 | 23.11 | 0.205 |
| | | | 1880.0 | 19.62 | 0.092 | 22.75 | 0.188 |
| | | | 1907.6 | 20.13 | 0.103 | 23.26 | 0.212 |
| | | 3 | 1852.4 | 21.07 | 0.128 | 24.20 | 0.263 |
| | | | 1880.0 | 20.59 | 0.115 | 23.72 | 0.236 |
| | | | 1907.6 | 21.11 | 0.129 | 24.24 | 0.265 |
| | | 4 | 1852.4 | 19.93 | 0.098 | 23.06 | 0.202 |
| | | | 1880.0 | 19.61 | 0.091 | 22.74 | 0.188 |
| | | | 1907.6 | 20.25 | 0.106 | 23.38 | 0.218 |
| | | 5 | 1852.4 | 21.98 | 0.158 | 25.11 | 0.324 |
| | | | 1880.0 | 21.59 | 0.144 | 24.72 | 0.296 |
| | | | 1907.6 | 22.15 | 0.164 | 25.28 | 0.337 |

Note: The peak power testing result was used peak detector.

| Model Number | HE920-NA | | | | | | |
|--------------|-----------------|----------|-----------------|---------------------|-------|--------------|--------------|
| Test Item | RF Output Power | | | | | | |
| Date of Test | 01/29/2013 | | | Test Site | | TE05 | |
| Bands | Modulation Type | Sub-Test | Frequency (MHz) | Burst Average Power | | Peak Power | |
| | | | | (dBm) | (W) | (dBm) | (W) |
| WCDMA Band V | QPSK | ----- | 826.4 | 23.68 | 0.233 | 27.41 | 0.551 |
| | | | 836.6 | 23.70 | 0.234 | 27.48 | 0.560 |
| | | | 846.6 | 23.62 | 0.230 | 27.19 | 0.524 |
| HSDPA Band V | QPSK | 1 | 826.4 | 22.36 | 0.172 | 25.47 | 0.352 |
| | | | 836.6 | 22.84 | 0.192 | 25.95 | 0.394 |
| | | | 846.6 | 22.20 | 0.166 | 25.31 | 0.340 |
| | | 2 | 826.4 | 22.35 | 0.172 | 25.46 | 0.352 |
| | | | 836.6 | 22.82 | 0.191 | 25.93 | 0.392 |
| | | | 846.6 | 22.20 | 0.166 | 25.31 | 0.340 |
| | | 3 | 826.4 | 21.87 | 0.154 | 24.98 | 0.315 |
| | | | 836.6 | 22.36 | 0.172 | 25.47 | 0.352 |
| | | | 846.6 | 21.72 | 0.149 | 24.83 | 0.304 |
| | | 4 | 826.4 | 21.86 | 0.153 | 24.97 | 0.314 |
| | | | 836.6 | 22.32 | 0.171 | 25.43 | 0.349 |
| | | | 846.6 | 21.71 | 0.148 | 24.82 | 0.303 |
| HSUPA Band V | QPSK | 1 | 826.4 | 22.29 | 0.169 | 25.40 | 0.347 |
| | | | 836.6 | 22.31 | 0.170 | 25.42 | 0.348 |
| | | | 846.6 | 21.68 | 0.147 | 24.79 | 0.301 |
| | | 2 | 826.4 | 20.28 | 0.107 | 23.39 | 0.218 |
| | | | 836.6 | 20.29 | 0.107 | 23.40 | 0.219 |
| | | | 846.6 | 19.64 | 0.092 | 22.75 | 0.188 |
| | | 3 | 826.4 | 21.27 | 0.134 | 24.38 | 0.274 |
| | | | 836.6 | 21.27 | 0.134 | 24.38 | 0.274 |
| | | | 846.6 | 20.65 | 0.116 | 23.76 | 0.238 |
| | | 4 | 826.4 | 20.28 | 0.107 | 23.39 | 0.218 |
| | | | 836.6 | 20.30 | 0.107 | 23.41 | 0.219 |
| | | | 846.6 | 19.64 | 0.092 | 22.75 | 0.188 |
| | | 5 | 826.4 | 22.24 | 0.167 | 25.35 | 0.343 |
| | | | 836.6 | 22.28 | 0.169 | 25.39 | 0.346 |
| | | | 846.6 | 21.63 | 0.146 | 24.74 | 0.298 |

Note: The peak power testing result was used peak detector.

3 Effective Radiated Power / Equivalent Isotropic Radiated Power Test

3.1. Limit

For FCC Part 22.913(a)(2): The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b): The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.2. Test Instruments


| 3 Meter Chamber | | | | | |
|-----------------------------------|--------------------------------|--------------|---------------|------------|--------|
| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
| RF Pre-selector | Agilent | N9039A | MY46520256 | 01/16/2012 | (2) |
| Spectrum Analyzer | Agilent | E4446A | MY46180578 | 01/16/2012 | (1) |
| Pre Amplifier | Agilent | 8449B | 3008A02237 | 02/22/2012 | (1) |
| Pre Amplifier | Agilent | 8447D | 2944A10961 | 02/22/2012 | (1) |
| Broadband Antenna (30MHz~1GHz) | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | 9163-270 | 06/29/2012 | (1) |
| Horn Antenna (1~18GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA9120D | 9120D-550 | 06/15/2012 | (1) |
| Horn Antenna (18~40GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA9170 | 9170-320 | 06/21/2012 | (1) |
| Test Site | ATL | TE01 | 888001 | 12/20/2011 | (1) |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.


Note: N.C.R. = No Calibration Request.

3.3. Setup


Below 1 GHz

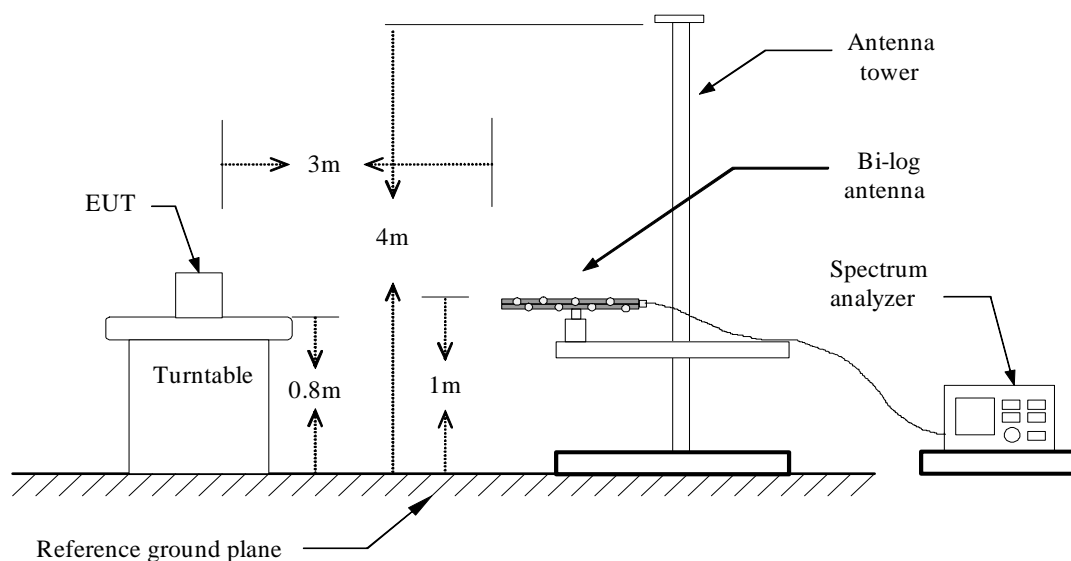

Above 1 GHz

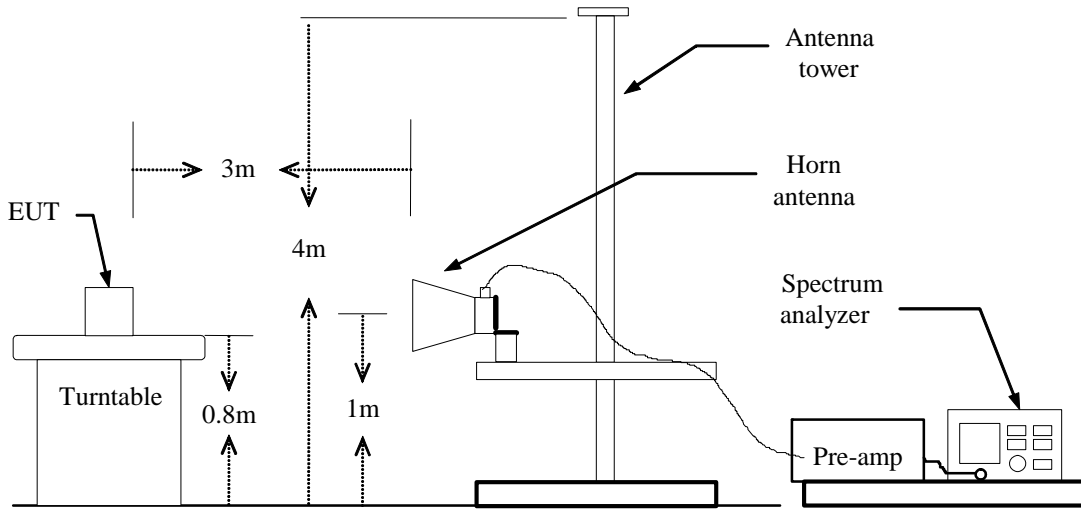

For Substituted Method Test Set-UP

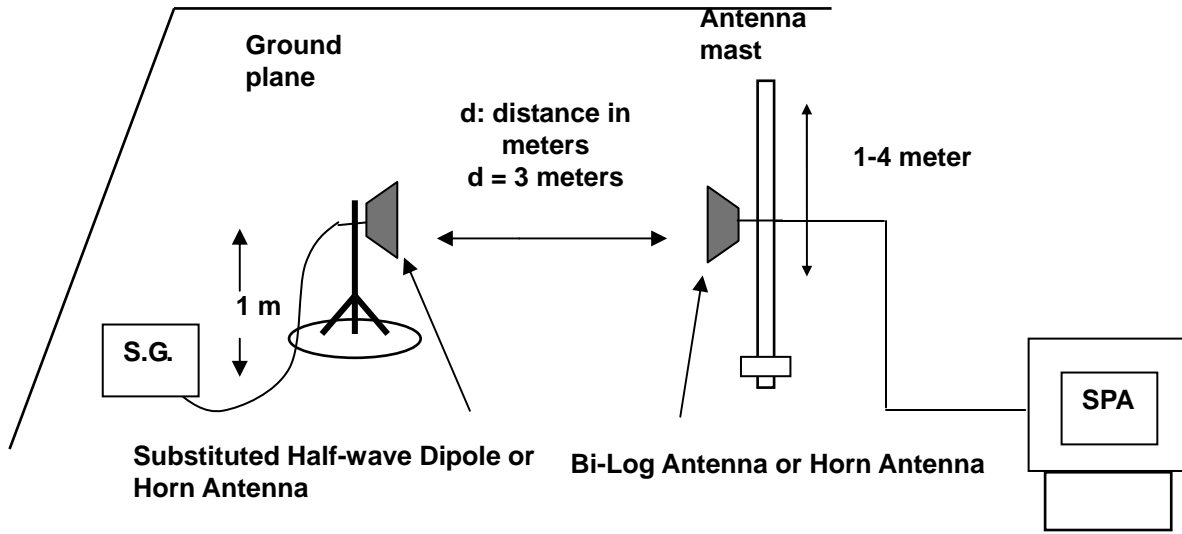

3.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement of the EUT, the resolution bandwidth was set to 3MHz and the average bandwidth was set to 3MHz. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna.

The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824-849MHz, and EIRP in frequency band 1851.25 –1910MHz were measured using a substitution method. The EUT was replaced by half-wave dipole (824-849MHz) or horn antenna (1851.25-1910MHz) connected to a signal generator. The spectrum analyzer reading was recorded and ERP/EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

3.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is ± 3.072 dB.

3.6. Test Result

| Model Number | HE920-NA | | | | | | | | |
|--------------|-----------------|-----------------|-------------|------------------|-------------------------|--------------|--------------|-------|--|
| Test Item | ERP/EIRP | | | | | | | | |
| Date of Test | 01/30/2013 | | | | | Test Site | TE01 | | |
| Bands | Modulation Type | Frequency (MHz) | Ant. Polar. | Read Level (dBm) | Correction Factor (dBm) | ERP | | Limit | |
| | | | | | | (dBm) | (W) | | |
| GSM 850 | GMSK | 824.2 | H | 18.12 | 11.29 | 29.41 | 0.873 | < 7W | |
| | | | V | 19.28 | 11.30 | 30.58 | 1.143 | < 7W | |
| | | 836.6 | H | 18.03 | 11.34 | 29.37 | 0.865 | < 7W | |
| | | | V | 18.54 | 11.34 | 29.88 | 0.973 | < 7W | |
| | | 848.8 | H | 18.06 | 11.47 | 29.53 | 0.897 | < 7W | |
| | | | V | 18.74 | 11.47 | 30.21 | 1.050 | < 7W | |
| EGPRS 850 | 8PSK | 824.2 | H | 18.30 | 11.29 | 29.59 | 0.910 | < 7W | |
| | | | V | 18.70 | 11.29 | 29.99 | 0.998 | < 7W | |
| | | 836.6 | H | 17.80 | 11.34 | 29.14 | 0.820 | < 7W | |
| | | | V | 18.39 | 11.34 | 29.73 | 0.940 | < 7W | |
| | | 848.8 | H | 17.56 | 11.46 | 29.02 | 0.798 | < 7W | |
| | | | V | 18.14 | 11.47 | 29.61 | 0.914 | < 7W | |

| Model Number | HE920-NA | | | | | | | | |
|--------------|-----------------|-----------------|-------------|------------------|-------------------------|--------------|--------------|-------|--|
| Test Item | ERP/EIRP | | | | | | | | |
| Date of Test | 01/30/2013 | | | | | Test Site | TE01 | | |
| Bands | Modulation Type | Frequency (MHz) | Ant. Polar. | Read Level (dBm) | Correction Factor (dBm) | EIRP | | Limit | |
| | | | | | | (dBm) | (W) | | |
| GSM 1900 | GMSK | 1850.20 | H | 15.13 | 11.39 | 26.52 | 0.449 | < 2W | |
| | | | V | 15.99 | 11.39 | 27.38 | 0.547 | < 2W | |
| | | 1880.00 | H | 14.49 | 11.64 | 26.13 | 0.410 | < 2W | |
| | | | V | 15.17 | 11.65 | 26.82 | 0.481 | < 2W | |
| | | 1909.80 | H | 14.07 | 11.91 | 25.98 | 0.396 | < 2W | |
| | | | V | 14.97 | 11.91 | 26.88 | 0.488 | < 2W | |
| EGPRS 1900 | 8PSK | 1850.20 | H | 13.77 | 11.39 | 25.16 | 0.328 | < 2W | |
| | | | V | 14.31 | 11.39 | 25.70 | 0.372 | < 2W | |
| | | 1880.00 | H | 12.47 | 11.64 | 24.11 | 0.258 | < 2W | |
| | | | V | 13.73 | 11.65 | 25.38 | 0.345 | < 2W | |
| | | 1909.80 | H | 13.80 | 11.91 | 25.71 | 0.372 | < 2W | |
| | | | V | 14.23 | 11.91 | 26.14 | 0.411 | < 2W | |

Note: 1. ERP/EIRP = Read Level + Correction factor.

2. For WCDMA signals, a peak detector is used with RBW = VBW = 5MHz.

3. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW= 1 MHz.

| Model Number | HE920-NA | | | | | | | | |
|---------------|-----------------|-----------------|-------------|------------------|-------------------------|--------------|--------------|-------|--|
| Test Item | ERP/EIRP | | | | | | | | |
| Date of Test | 01/30/2013 | | | | | Test Site | TE01 | | |
| Bands | Modulation Type | Frequency (MHz) | Ant. Polar. | Read Level (dBm) | Correction Factor (dBm) | EIRP | | Limit | |
| | | | | | | (dBm) | (W) | | |
| WCDMA Band II | QPSK | 1852.4 | H | 13.16 | 11.42 | 24.58 | 0.287 | < 2W | |
| | | | V | 13.96 | 11.42 | 25.38 | 0.345 | < 2W | |
| | | 1880.0 | H | 12.66 | 11.65 | 24.31 | 0.270 | < 2W | |
| | | | V | 13.25 | 11.63 | 24.88 | 0.308 | < 2W | |
| | | 1907.6 | H | 11.87 | 11.87 | 23.74 | 0.237 | < 2W | |
| | | | V | 12.77 | 11.87 | 24.64 | 0.291 | < 2W | |

| Model Number | HE920-NA | | | | | | | | |
|--------------|-----------------|-----------------|-------------|------------------|-------------------------|--------------|--------------|-------|--|
| Test Item | ERP/EIRP | | | | | | | | |
| Date of Test | 01/30/2013 | | | | | Test Site | TE01 | | |
| Bands | Modulation Type | Frequency (MHz) | Ant. Polar. | Read Level (dBm) | Correction Factor (dBm) | ERP | | Limit | |
| | | | | | | (dBm) | (W) | | |
| WCDMA Band V | QPSK | 826.4 | H | 14.85 | 11.30 | 26.15 | 0.412 | < 7W | |
| | | | V | 15.55 | 11.30 | 26.85 | 0.484 | < 7W | |
| | | 836.6 | H | 14.38 | 11.33 | 25.71 | 0.372 | < 7W | |
| | | | V | 14.66 | 11.34 | 26.00 | 0.398 | < 7W | |
| | | 846.6 | H | 14.41 | 11.42 | 25.83 | 0.383 | < 7W | |
| | | | V | 14.67 | 11.43 | 26.10 | 0.407 | < 7W | |

Note: 1. ERP/EIRP = Read Level + Correction factor.

2. For WCDMA signals, a peak detector is used with RBW = VBW = 5MHz.

3. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW= 1 MHz.

4 Occupied Bandwidth Test

4.1. Limit

The Occupied Bandwidth Limit:

N/A.


4.2. Test Instruments

| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|--------------------------------------|--------------|--------------|---------------|------------|--------|
| Universal Radio Communication Tester | R & S | CMU200 | 109369 | 08/07/2012 | (2) |
| Spectrum Analyzer | Agilent | E4445A | MY46181986 | 05/10/2012 | (1) |
| Attenuator | RADIALL | R41572000 | 0603033073 | N.C.R. | ----- |
| Power Divider | Agilent | 87302C | 3239A00760 | N.C.R. | ----- |
| Test Site | ATL | TE05 | TE05 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

4.3. Setup

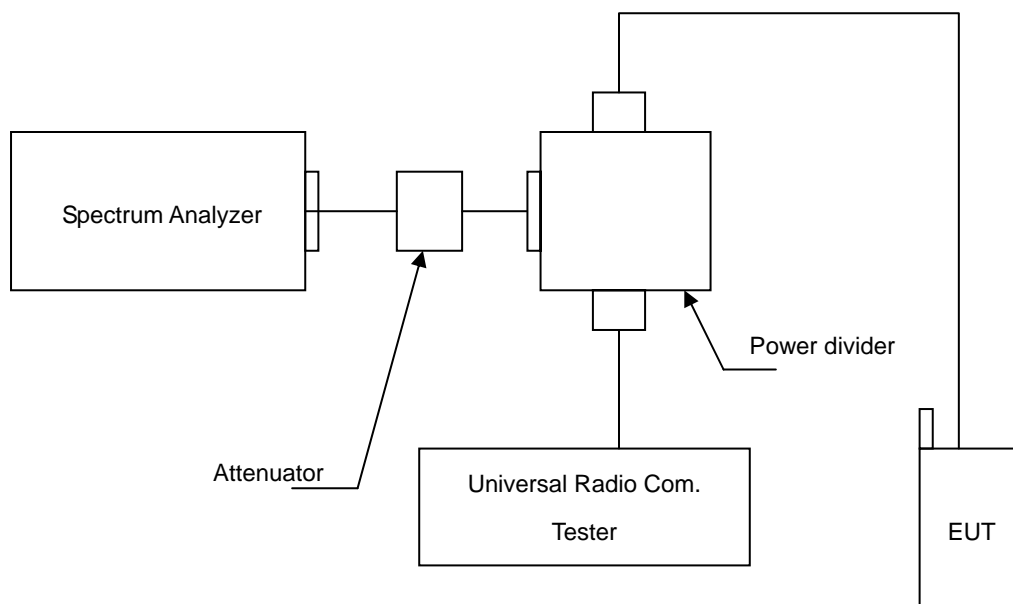

4.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers was measured.

4.5. Uncertainty




The measurement uncertainty is defined as $\pm 10\text{Hz}$

4.6. Test Result


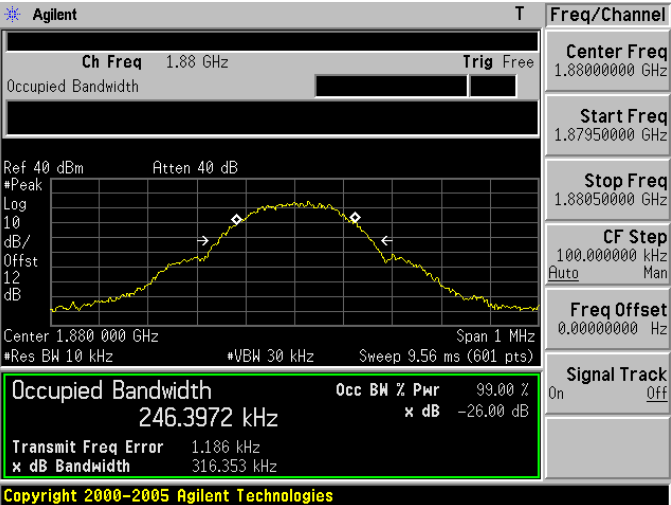
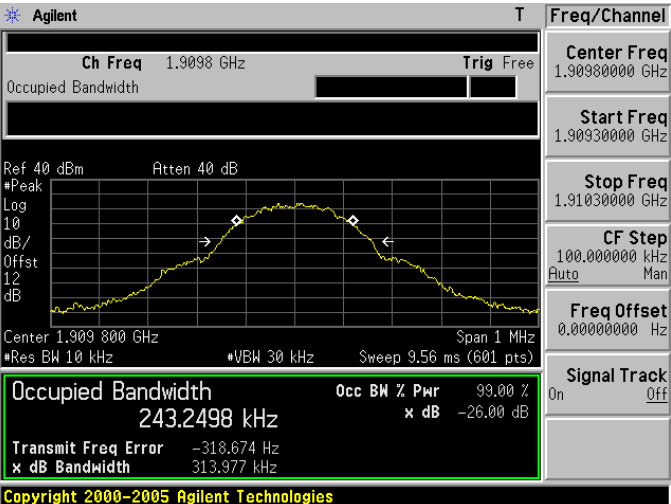
| Model Number | HE920-NA | | | | |
|--------------|--------------------|-----------------|---------------------|-----------------------|------|
| Test Item | Occupied Bandwidth | | | | |
| Date of Test | 01/29/2013 | | | Test Site | TE05 |
| Bands | Channel | Frequency (MHz) | 99% Bandwidth (kHz) | Note | |
| GSM 850 | 128 | 824.2 | 244.5915 | RBW:10KHz , VBW:30KHz | |
| | 190 | 836.6 | 243.8955 | RBW:10KHz , VBW:30KHz | |
| | 251 | 848.8 | 247.7375 | RBW:10KHz , VBW:30KHz | |
| GSM 1900 | 512 | 1850.20 | 243.7932 | RBW:10KHz , VBW:30KHz | |
| | 661 | 1880.00 | 246.3972 | RBW:10KHz , VBW:30KHz | |
| | 810 | 1909.80 | 243.2498 | RBW:10KHz , VBW:30KHz | |
| GPRS 850 | 128 | 824.2 | 243.9201 | RBW:10KHz , VBW:30KHz | |
| | 190 | 836.6 | 244.0954 | RBW:10KHz , VBW:30KHz | |
| | 251 | 848.8 | 243.8524 | RBW:10KHz , VBW:30KHz | |
| GPRS 1900 | 512 | 1850.20 | 244.1356 | RBW:10KHz , VBW:30KHz | |
| | 661 | 1880.00 | 245.7313 | RBW:10KHz , VBW:30KHz | |
| | 810 | 1909.80 | 248.4527 | RBW:10KHz , VBW:30KHz | |

| Model Number | HE920-NA | | | | |
|---------------|--------------------|-----------------|---------------------|-------------------------|------|
| Test Item | Occupied Bandwidth | | | | |
| Date of Test | 01/29/2013 | | | Test Site | TE05 |
| Bands | Channel | Frequency (MHz) | 99% Bandwidth (MHz) | Note | |
| WCDMA Band II | 9262 | 1852.4 | 4.1246 | RBW:100KHz , VBW:300KHz | |
| | 9400 | 1880.0 | 4.1569 | RBW:100KHz , VBW:300KHz | |
| | 9538 | 1907.6 | 4.1175 | RBW:100KHz , VBW:300KHz | |
| WCDMA Band V | 4132 | 826.4 | 4.1206 | RBW:100KHz , VBW:300KHz | |
| | 4183 | 836.6 | 4.1387 | RBW:100KHz , VBW:300KHz | |
| | 4233 | 846.6 | 4.1321 | RBW:100KHz , VBW:300KHz | |




4.7. Test Graphs
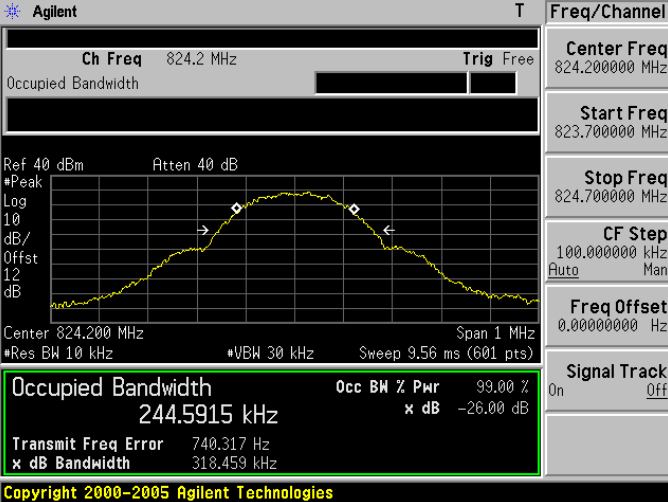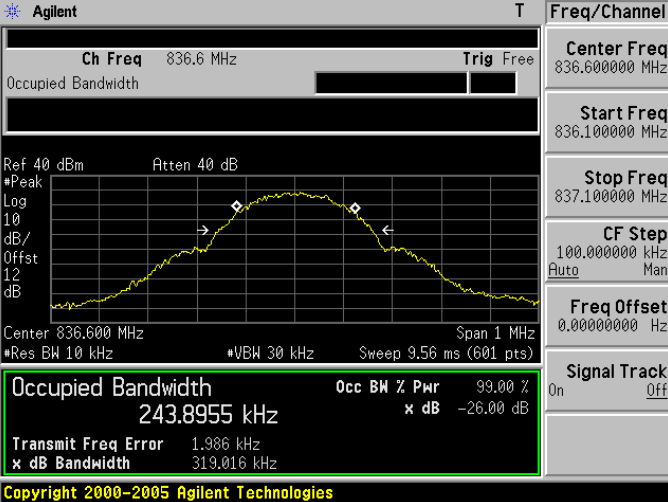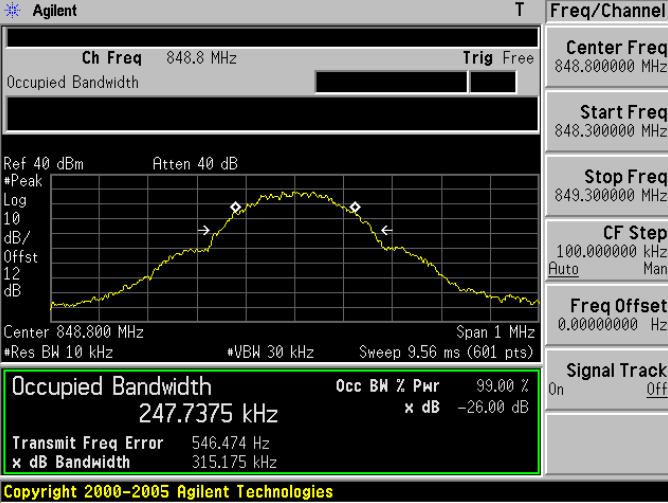
| Mode 1: GSM 850 Link Mode | |
|---------------------------|--|
| 824.2 MHz |  <p>Agilent T Freq/Channel</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Center Freq 824.200000 MHz</p> <p>Start Freq 823.700000 MHz</p> <p>Stop Freq 824.700000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>#Peak Log 10 dB/Offst 12 dB</p> <p>Center 824.200 MHz Span 1 MHz</p> <p>*Res BW 10 kHz *VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 244.5915 kHz Occ BH % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 740.317 Hz</p> <p>x dB Bandwidth 318.459 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| 836.6 MHz |  <p>Agilent T Freq/Channel</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>#Peak Log 10 dB/Offst 12 dB</p> <p>Center 836.600 MHz Span 1 MHz</p> <p>*Res BW 10 kHz *VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 243.8955 kHz Occ BH % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.986 kHz</p> <p>x dB Bandwidth 319.016 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| 848.8 MHz |  <p>Agilent T Freq/Channel</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 40 dBm Atten 40 dB</p> <p>#Peak Log 10 dB/Offst 12 dB</p> <p>Center 848.800 MHz Span 1 MHz</p> <p>*Res BW 10 kHz *VBW 30 kHz Sweep 9.56 ms (601 pts)</p> <p>Occupied Bandwidth 247.7375 kHz Occ BH % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 546.474 Hz</p> <p>x dB Bandwidth 315.175 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |




Mode 2: GSM 1900 Link Mode

| | |
|--------------------|--|
| <p>1850.20 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 243.7932 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.121 kHz</p> <p>x dB Bandwidth 317.030 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| <p>1880.00 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 1.880 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 246.3972 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.186 kHz</p> <p>x dB Bandwidth 316.353 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| <p>1909.80 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 243.2498 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -318.674 Hz</p> <p>x dB Bandwidth 313.977 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |

Mode 3: EGPRS 850 Link Mode
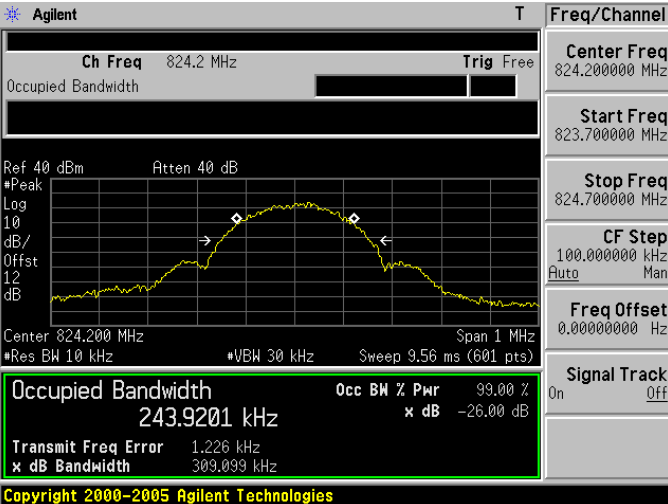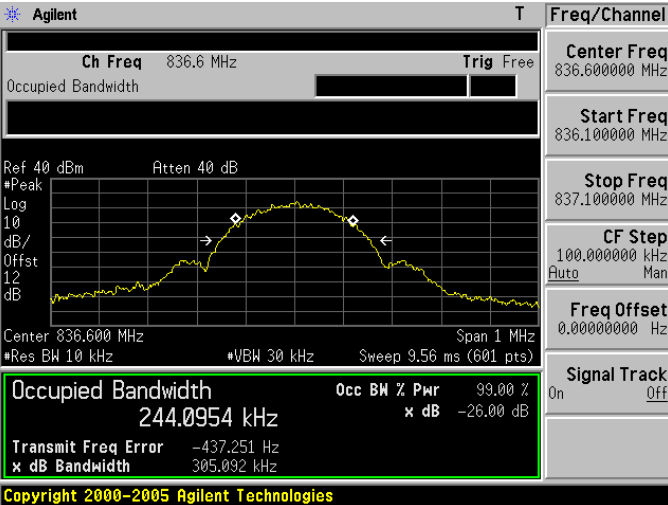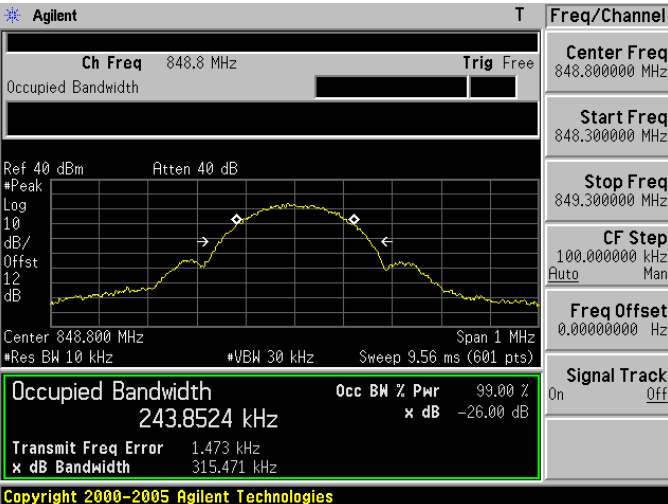
| | |
|------------------|---|
| <p>824.2 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Center Freq 824.200000 MHz</p> <p>Start Freq 823.700000 MHz</p> <p>Stop Freq 824.700000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 243.9201 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.226 kHz</p> <p>x dB Bandwidth 309.099 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| <p>836.6 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 244.0954 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -437.251 Hz</p> <p>x dB Bandwidth 305.092 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| <p>848.8 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 243.8524 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.473 kHz</p> <p>x dB Bandwidth 315.471 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |

Mode 4: EGPRS 1900 Link Mode
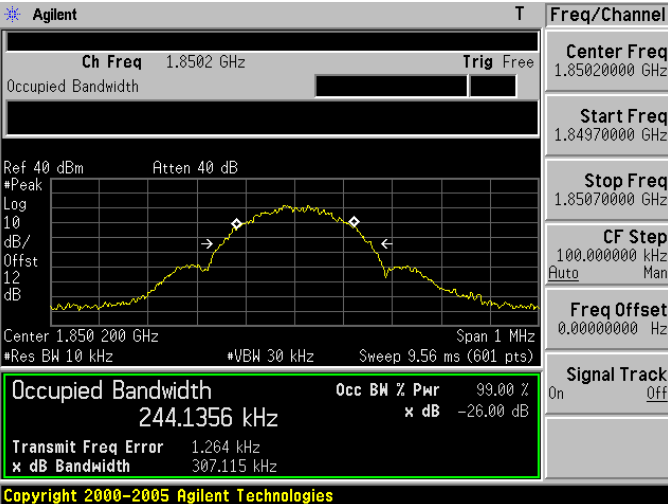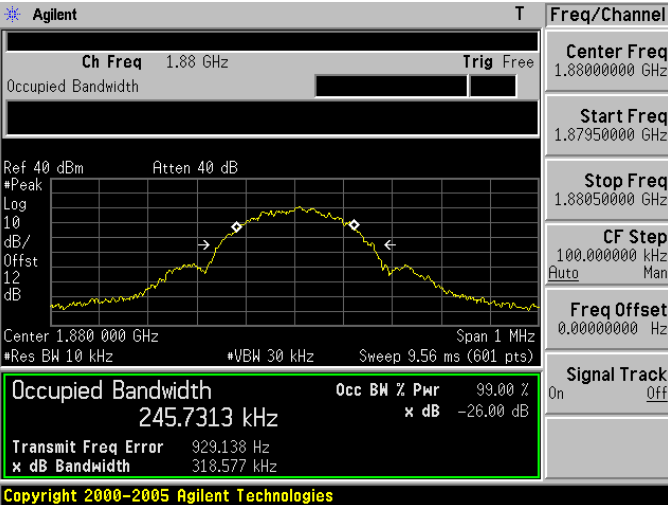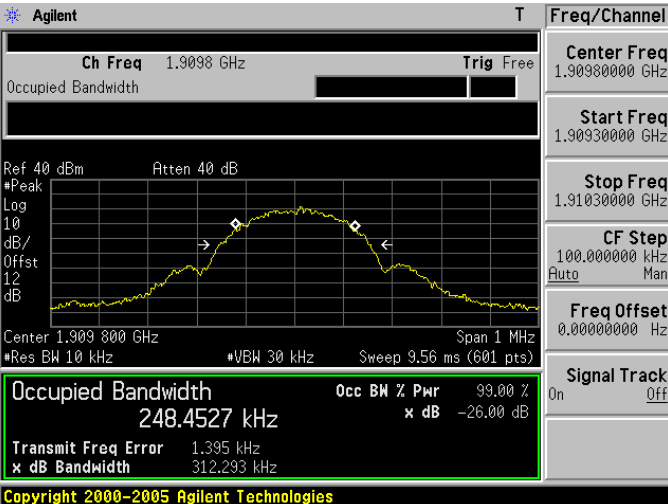
| | |
|--------------------|---|
| <p>1850.20 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Center Freq 1.85020000 GHz</p> <p>Start Freq 1.84970000 GHz</p> <p>Stop Freq 1.85070000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 244.1356 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.264 kHz</p> <p>x dB Bandwidth 307.115 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| <p>1880.00 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 1.880 GHz Trig Free</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 245.7313 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 929.138 Hz</p> <p>x dB Bandwidth 318.577 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| <p>1909.80 MHz</p> |  <p>Agilent T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 248.4527 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.395 kHz</p> <p>x dB Bandwidth 312.293 kHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |

| Mode 5: WCDMA Band II Link Mode | |
|---------------------------------|---|
| 1850.20 MHz | <p>Agilent T</p> <p>Ch Freq 1.8524 GHz Trig Free</p> <p>Center 1.852 40 GHz Span 10 MHz</p> <p>Res BW 100 kHz VBW 300 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 4.1246 MHz</p> <p>Transmit Freq Error 3.963 kHz</p> <p>x dB Bandwidth 4.663 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 1.85240000 GHz</p> <p>Start Freq 1.84740000 GHz</p> <p>Stop Freq 1.85740000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| 1880.00 MHz | <p>Agilent T</p> <p>Ch Freq 1.880 GHz Trig Free</p> <p>Center 1.880 00 GHz Span 10 MHz</p> <p>Res BW 100 kHz VBW 300 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 4.1569 MHz</p> <p>Transmit Freq Error 10.904 kHz</p> <p>x dB Bandwidth 4.662 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |
| 1909.80 MHz | <p>Agilent R L</p> <p>Ch Freq 1.9076 GHz Trig Free</p> <p>Center 1.907 60 GHz Span 10 MHz</p> <p>Res BW 100 kHz VBW 300 kHz Sweep 1 ms (601 pts)</p> <p>Occupied Bandwidth 4.1175 MHz</p> <p>Transmit Freq Error -8.356 kHz</p> <p>x dB Bandwidth 4.674 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 1.90760000 GHz</p> <p>Start Freq 1.90260000 GHz</p> <p>Stop Freq 1.91260000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> |

Mode 6: WCDMA Band V Link Mode

| | |
|-----------|---|
| 826.4 MHz | <p>Agilent R T</p> <p>Ch Freq 826.4 MHz Trig Free</p> <p>Center Freq 826.400000 MHz</p> <p>Start Freq 821.400000 MHz</p> <p>Stop Freq 831.400000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1206 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 4.555 kHz</p> <p>x dB Bandwidth 4.680 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| 836.6 MHz | <p>Agilent T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1387 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 799.526 Hz</p> <p>x dB Bandwidth 4.678 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |
| 846.6 MHz | <p>Agilent T</p> <p>Ch Freq 846.6 MHz Trig Free</p> <p>Center Freq 846.600000 MHz</p> <p>Start Freq 841.600000 MHz</p> <p>Stop Freq 851.600000 MHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 4.1321 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 3.170 kHz</p> <p>x dB Bandwidth 4.650 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p> |

5 Band Edge Test

5.1. Limit

The Band Edge Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.


5.2. Test Instruments

| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|--------------------------------------|--------------|--------------|---------------|------------|--------|
| Universal Radio Communication Tester | R & S | CMU200 | 109369 | 08/07/2012 | (2) |
| Spectrum Analyzer | Agilent | E4445A | MY46181986 | 05/10/2012 | (1) |
| Attenuator | RADIALL | R41572000 | 0603033073 | N.C.R. | ----- |
| Power Divider | Agilent | 87302C | 3239A00760 | N.C.R. | ----- |
| Test Site | ATL | TE05 | TE05 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

5.3. Setup

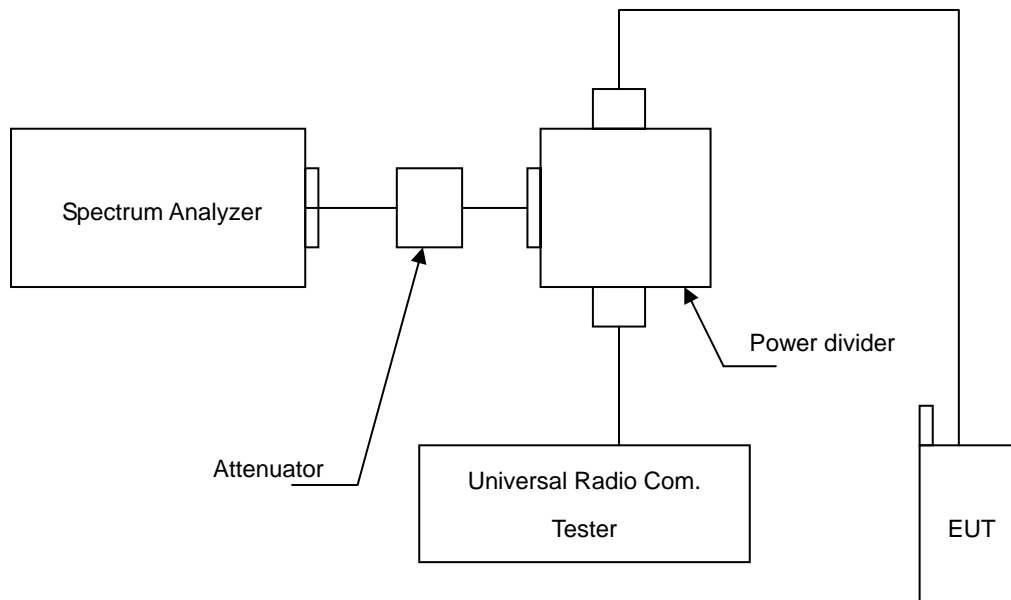

5.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

3. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
4. The band edge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.
5. The band edge setting:
 - a. RB=10 kHz; VB=30 kHz for GSM 850 and PCS 1900.
 - b. RB=100 kHz; VB=300 kHz for WCDMA Band V and WCDMA Band II.


5.5. Uncertainty

The measurement uncertainty is defined as $\pm 10\text{Hz}$

5.6. Test Result


| Model Number | | HE920-NA | | | | |
|---------------|--------|------------|-----------------|-----------------|-------------|--------|
| Test Item | | Band Edge | | | | |
| Date of Test | | 01/29/2013 | | | Test Site | TE05 |
| Bands | | Channel | Frequency (MHz) | Bandwidth (dBm) | Limit (dBm) | Result |
| GSM 850 | Lower | 128 | 824.0000 | -17.00 | -13 | Pass |
| | Higher | 251 | 849.0000 | -15.67 | -13 | Pass |
| GSM 1900 | Lower | 512 | 1850.000 | -27.50 | -13 | Pass |
| | Higher | 810 | 1910.000 | -26.60 | -13 | Pass |
| WCDMA Band II | Lower | 9262 | 1850.000 | -30.12 | -13 | Pass |
| | Higher | 9538 | 1910.000 | -31.21 | -13 | Pass |
| WCDMA Band V | Lower | 4132 | 824.0000 | -16.56 | -13 | Pass |
| | Higher | 4233 | 849.0000 | -19.05 | -13 | Pass |

5.7. Test Graphs

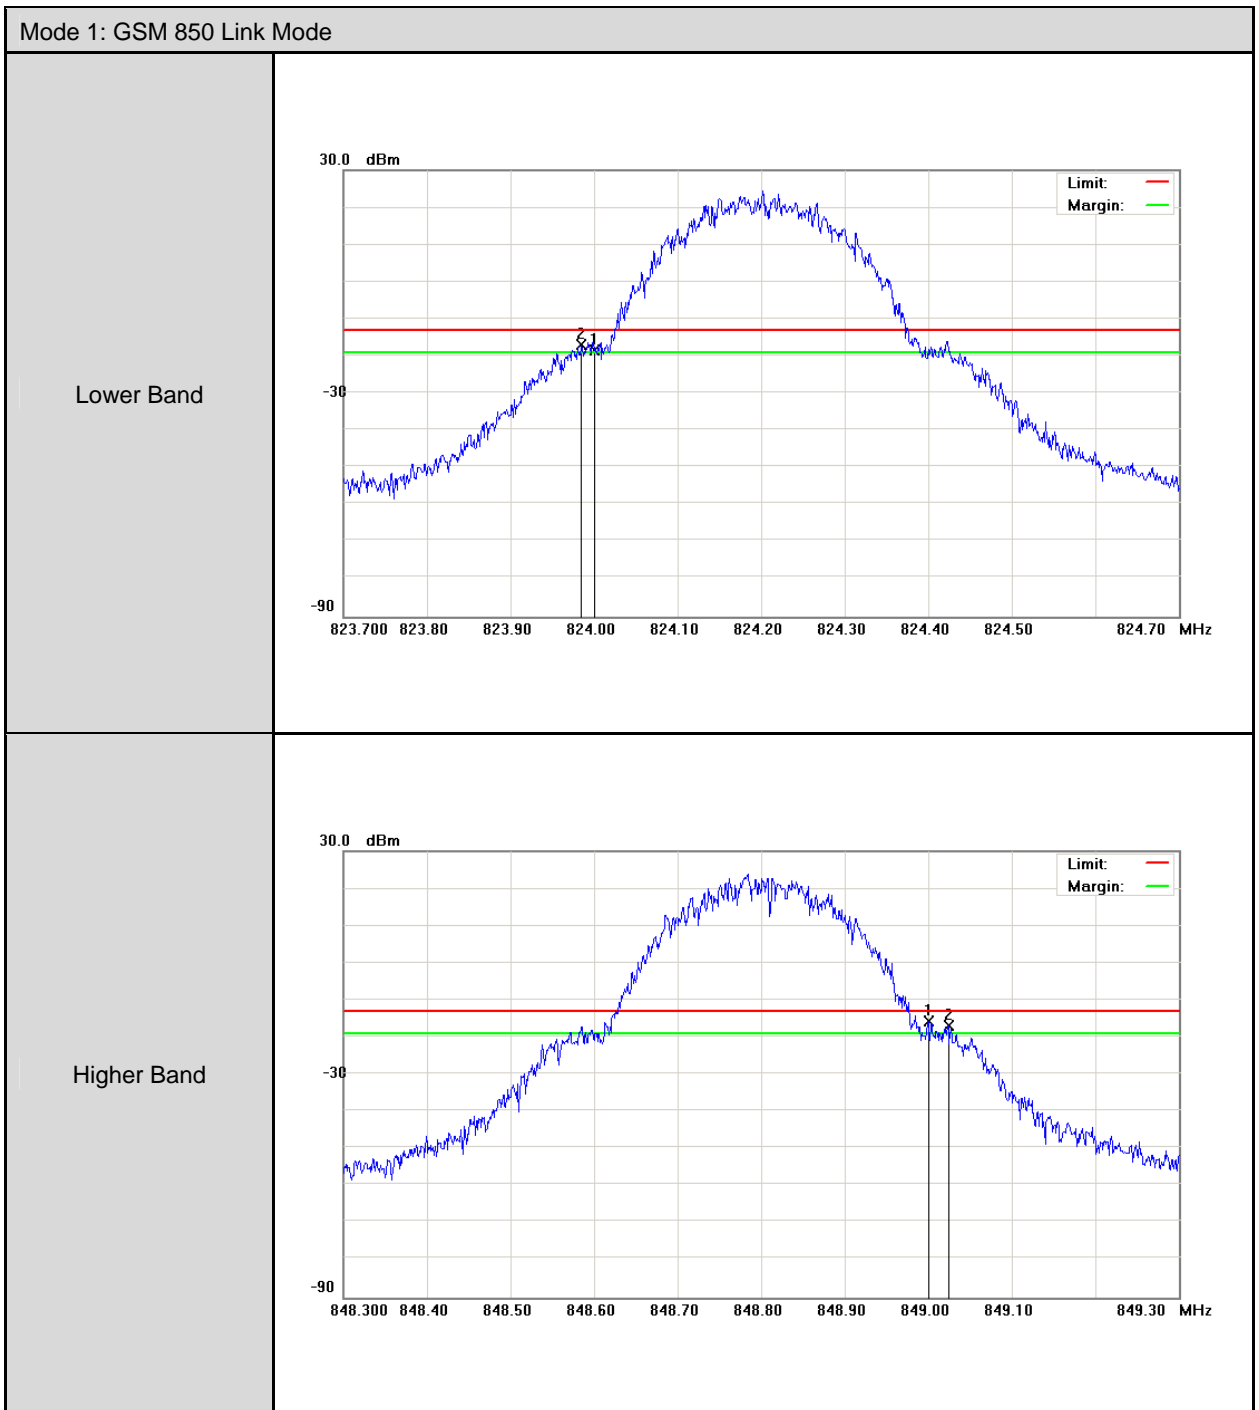


Mode 2: GSM 1900 Link Mode

Lower Band

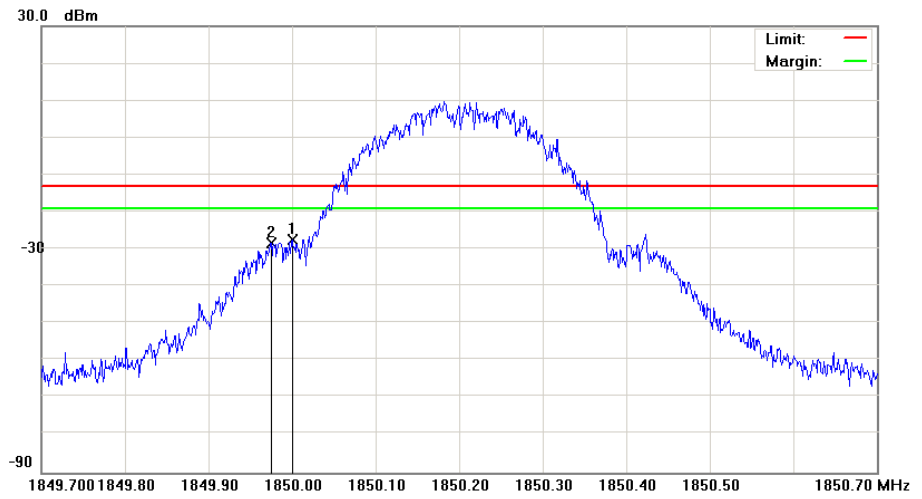


Higher Band

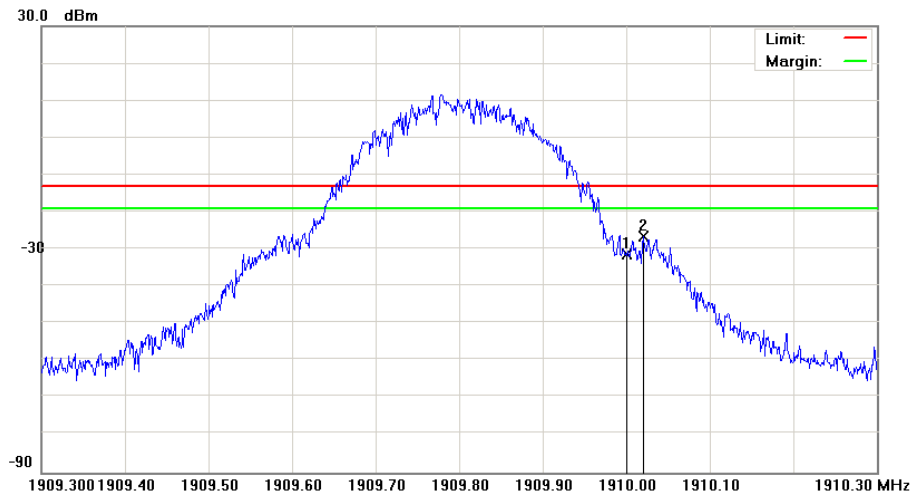


Mode 5: WCDMA Band II Link Mode

Lower Band

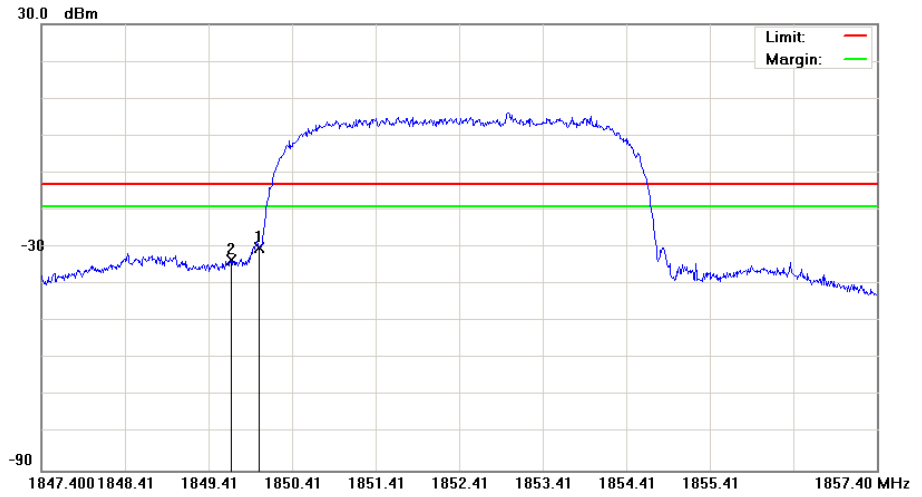


Higher Band

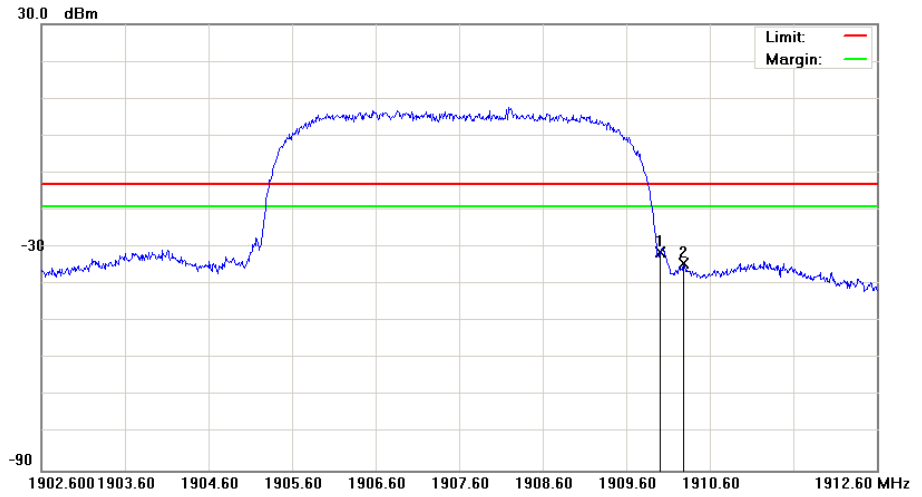


Mode 6: WCDMA Band V Link Mode

Lower Band

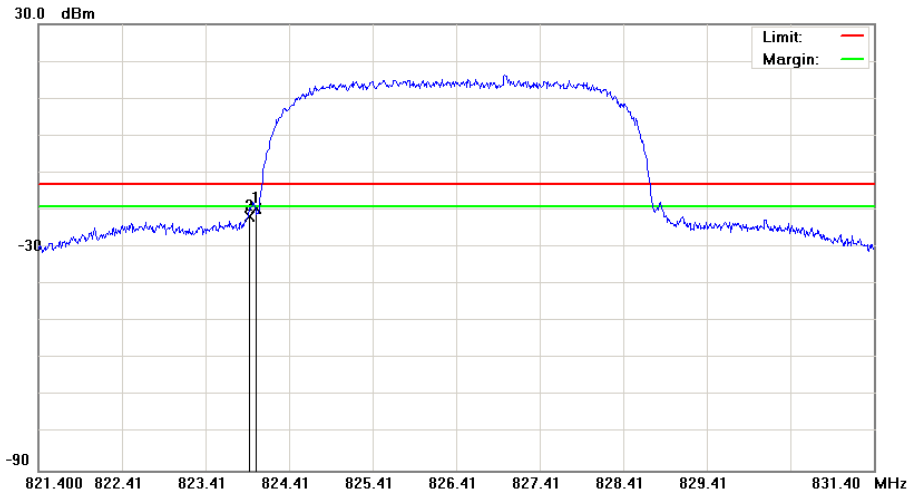

Higher Band

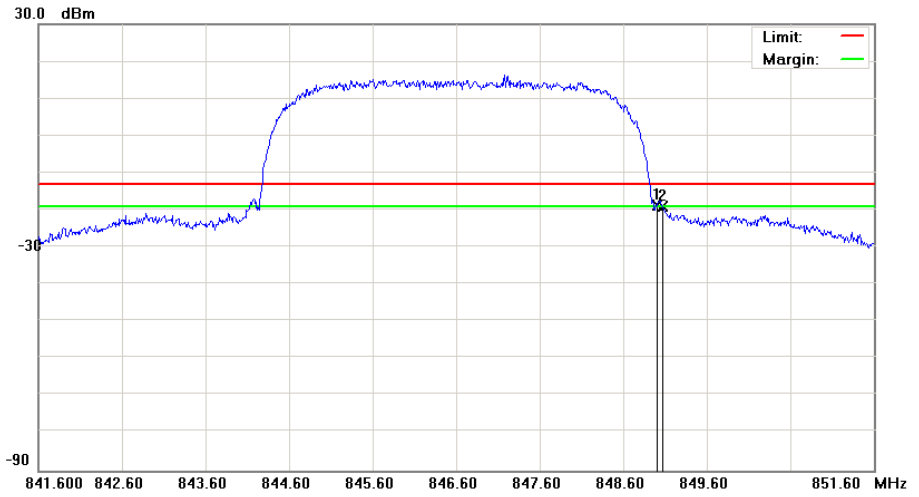

6 Conducted Spurious Emission Test

6.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.2. Test Instruments


| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|--------------------------------------|--------------|--------------|---------------|------------|--------|
| Universal Radio Communication Tester | R & S | CMU200 | 109369 | 08/07/2012 | (2) |
| Spectrum Analyzer | Agilent | E4445A | MY46181986 | 05/10/2012 | (1) |
| Attenuator | RADIALL | R41572000 | 0603033073 | N.C.R. | ----- |
| Power Divider | Agilent | 87302C | 3239A00760 | N.C.R. | ----- |
| Test Site | ATL | TE05 | TE05 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.


Note: N.C.R. = No Calibration Request.

6.3. Setup

Below 2.8GHz

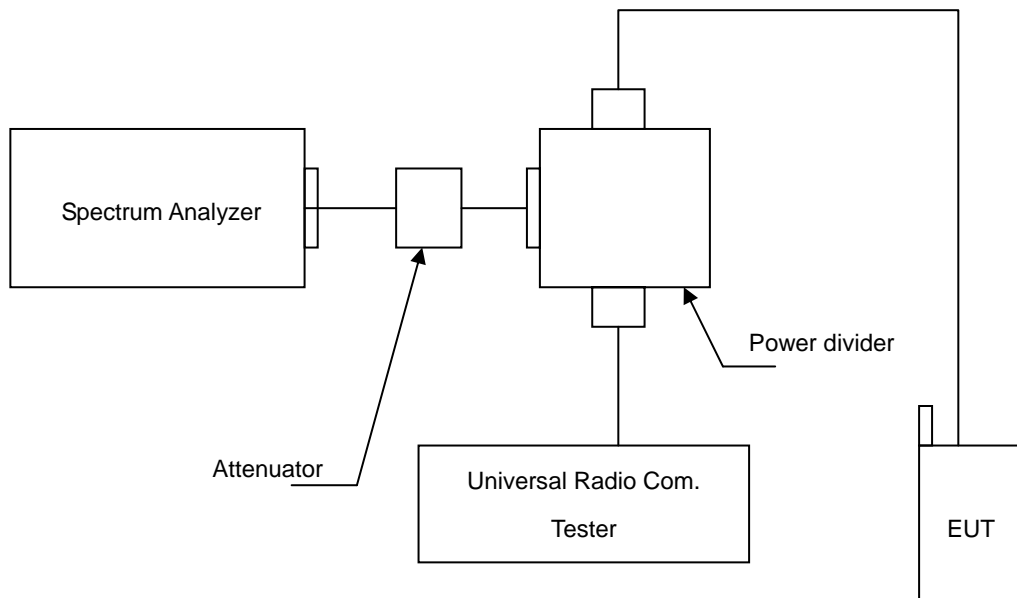

Above 2.8GHz

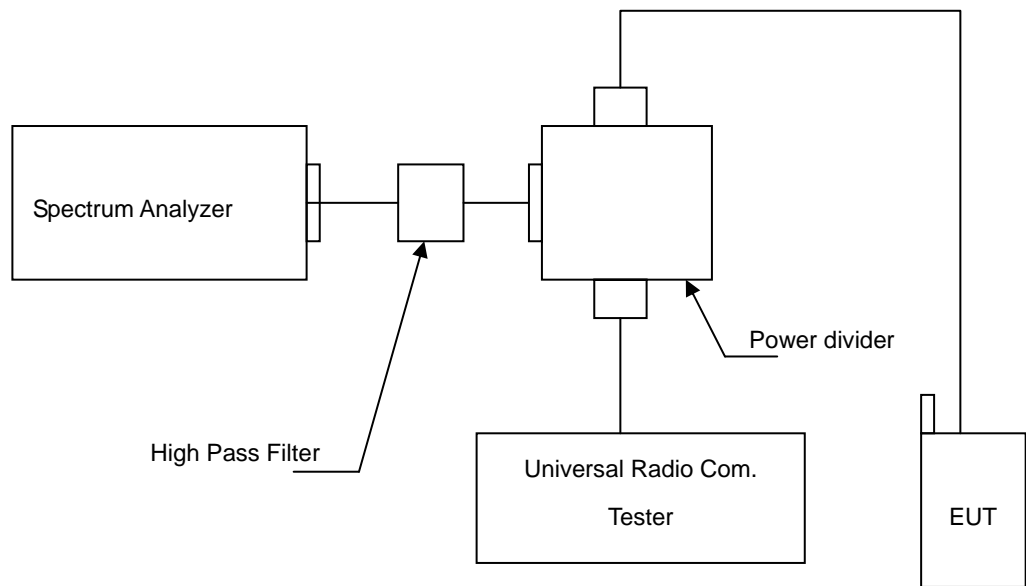

6.4. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via Power Divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. Test setting at GSM 850 RB>100 kHz, VB>100 kHz; PCS 1900 RB>1MHz, VB>1MHz.

6.5. Uncertainty

The measurement uncertainty is evaluated as ± 2.24 dB.

6.6. Test Result


| | | | |
|--------------|-----------------------------------|-----------|------|
| Model Number | HE920-NA | | |
| Test Item | Conducted Spurious Emission | | |
| Test Mode | Mode 1 / Mode 2 / Mode 4 / Mode 5 | | |
| Date of Test | 11/20/2012 | Test Site | TE05 |

File :HE920 NA(CH128)

Data :#1

Date:2012/11/20

Time: 下午 04:08:37

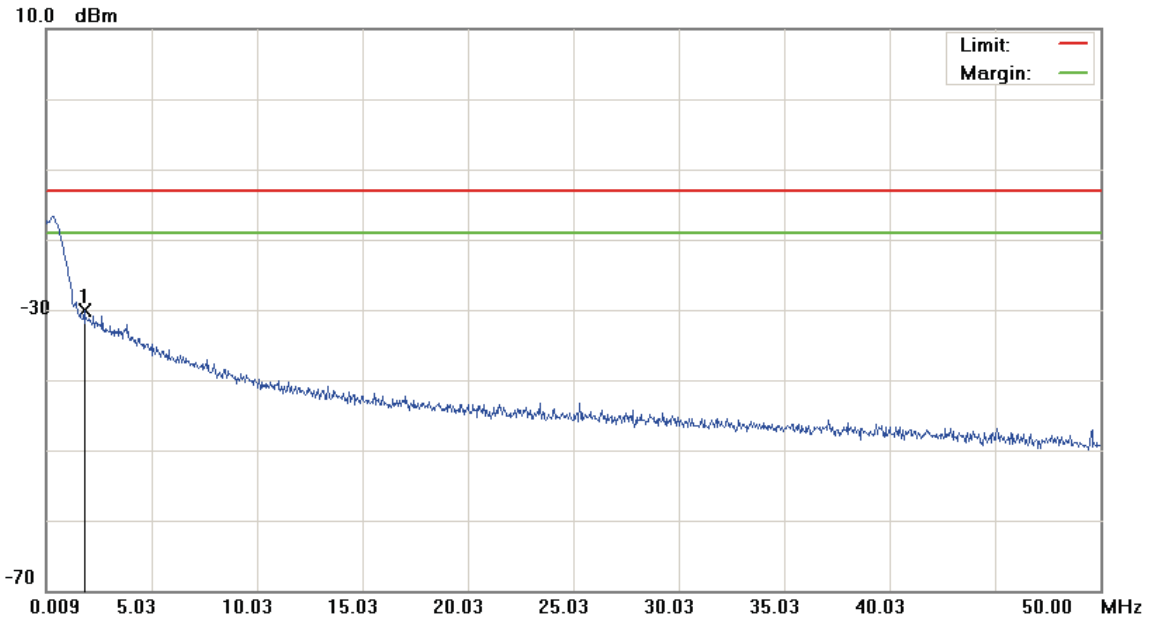

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 850 | | |
| Note: CH 128 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1.8337 | -61.22 | 31.12 | -30.10 | -13.00 | -17.10 | Detector | peak | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH128)

Data :#2

Date:2012/11/20

Time: 下午 04:09:01

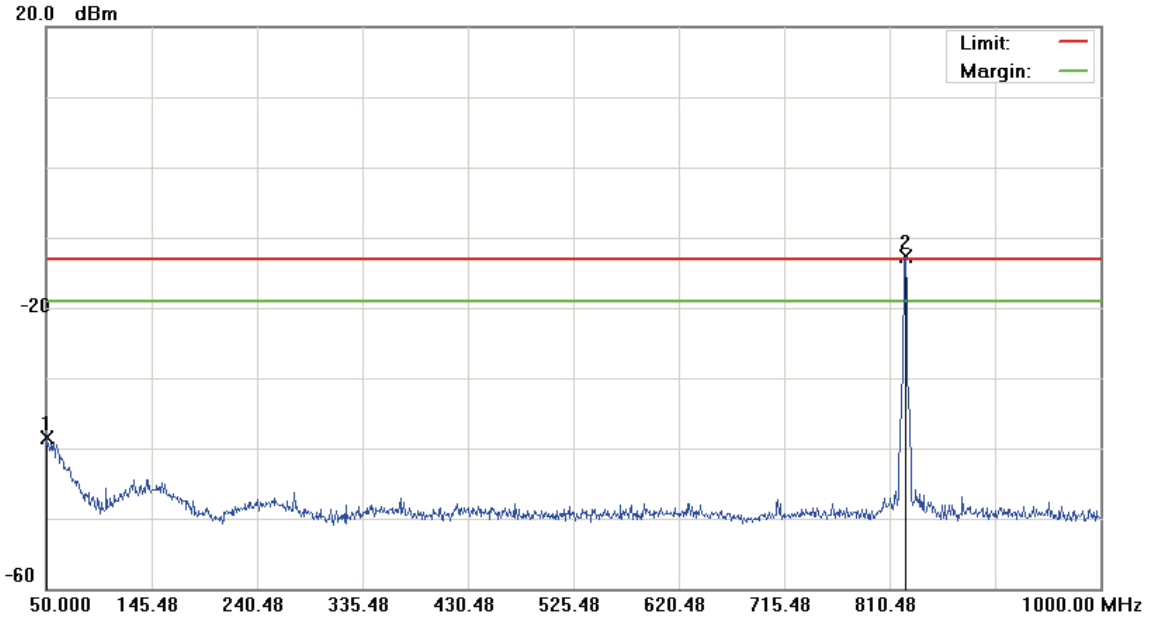

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 128

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | | 50.4750 | -53.03 | 14.61 | -38.42 | -13.00 | -25.42 | peak | | |
| 2 | * | 824.2500 | -16.47 | 3.84 | -12.63 | -13.00 | 0.37 | peak | | Tx |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH128)

Data :#3

Date:2012/11/20

Time: 下午 04:56:21

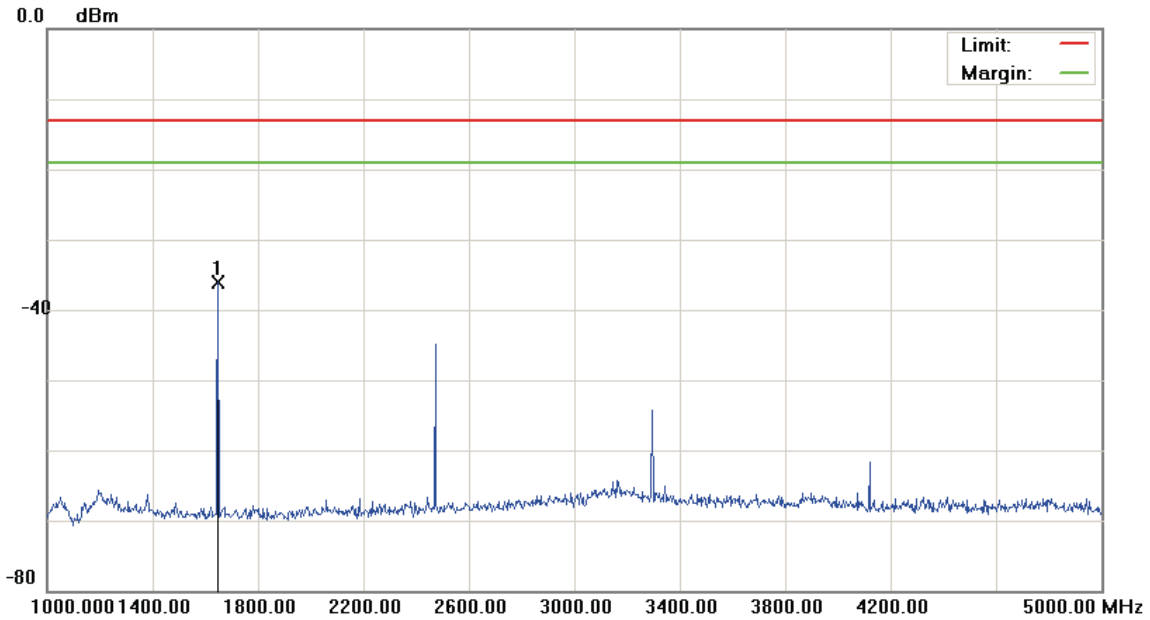

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 850 | | |
| Note: CH 128 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1648.000 | -40.64 | 4.45 | -36.19 | -13.00 | -23.19 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH128)

Data :#4

Date:2012/11/20

Time: 下午 04:56:44

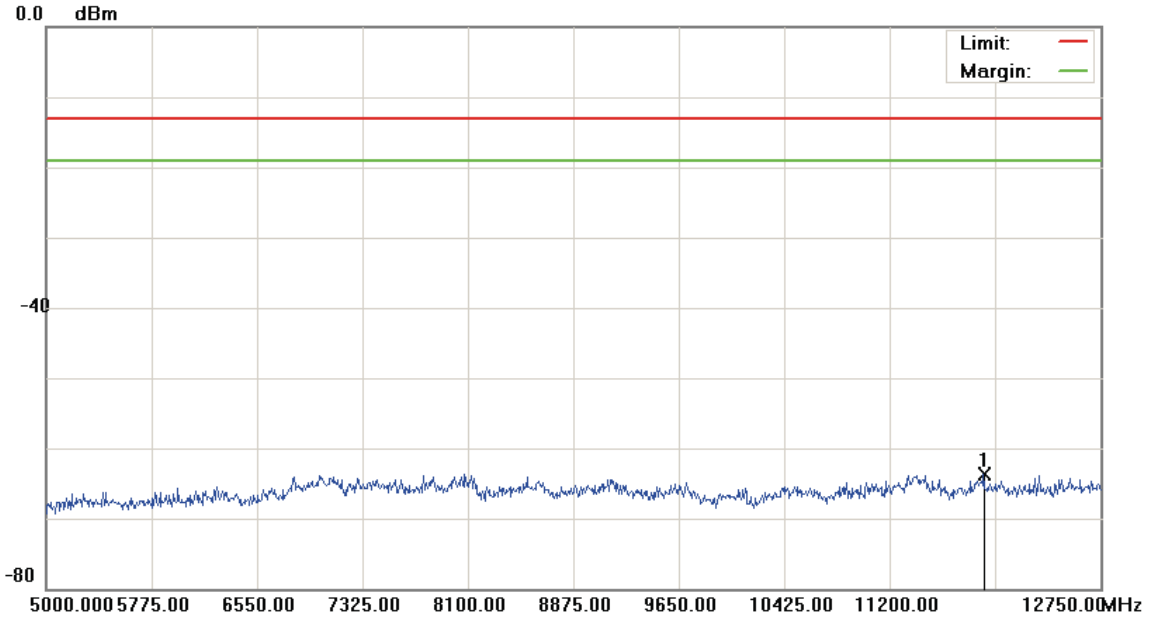

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 850 | | |
| Note: CH 128 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 11893.625 | -69.08 | 5.32 | -63.76 | -13.00 | -50.76 | Detector | peak | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH190)

Data :#1

Date:2012/11/20

Time: 下午 04:11:34

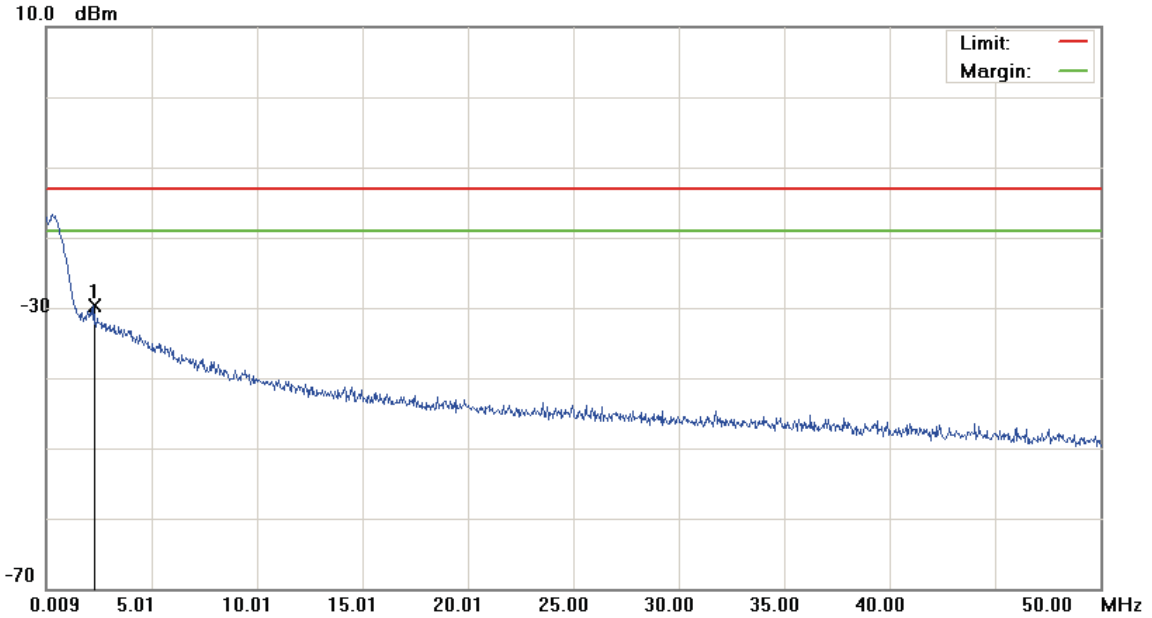

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 190

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.2835 | -60.74 | 31.07 | -29.67 | -13.00 | -16.67 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH190)

Data :#2

Date:2012/11/20

Time: 下午 04:11:58

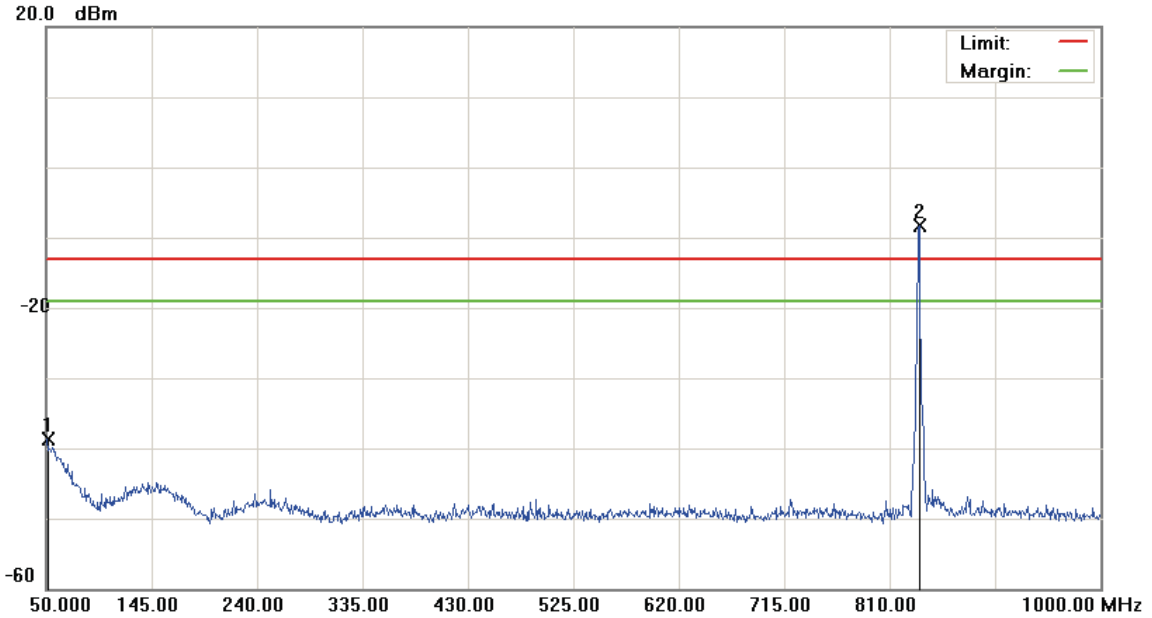

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 190

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | | 51.4250 | -53.23 | 14.44 | -38.79 | -13.00 | -25.79 | peak | | |
| 2 | * | 836.6000 | -12.22 | 3.96 | -8.26 | -13.00 | 4.74 | peak | | Tx |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH190)

Data :#3

Date:2012/11/20

Time: 下午 04:57:19

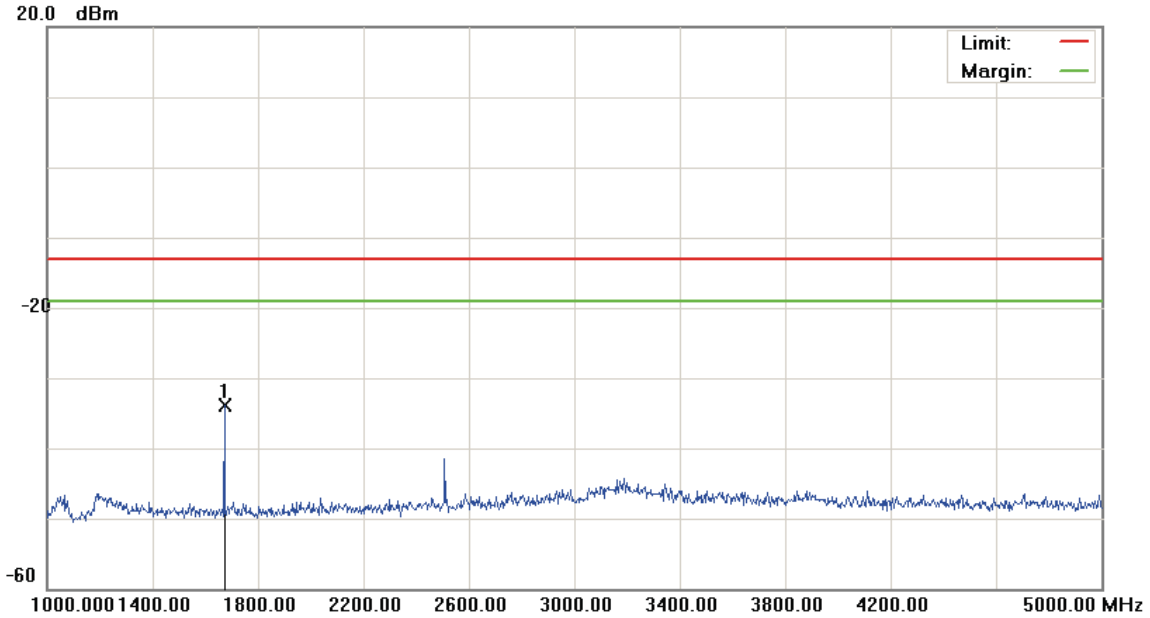

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 190

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1674.000 | -38.41 | 4.46 | -33.95 | -13.00 | -20.95 | Detector | peak | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH190)

Data :#4

Date:2012/11/20

Time: 下午 04:57:42

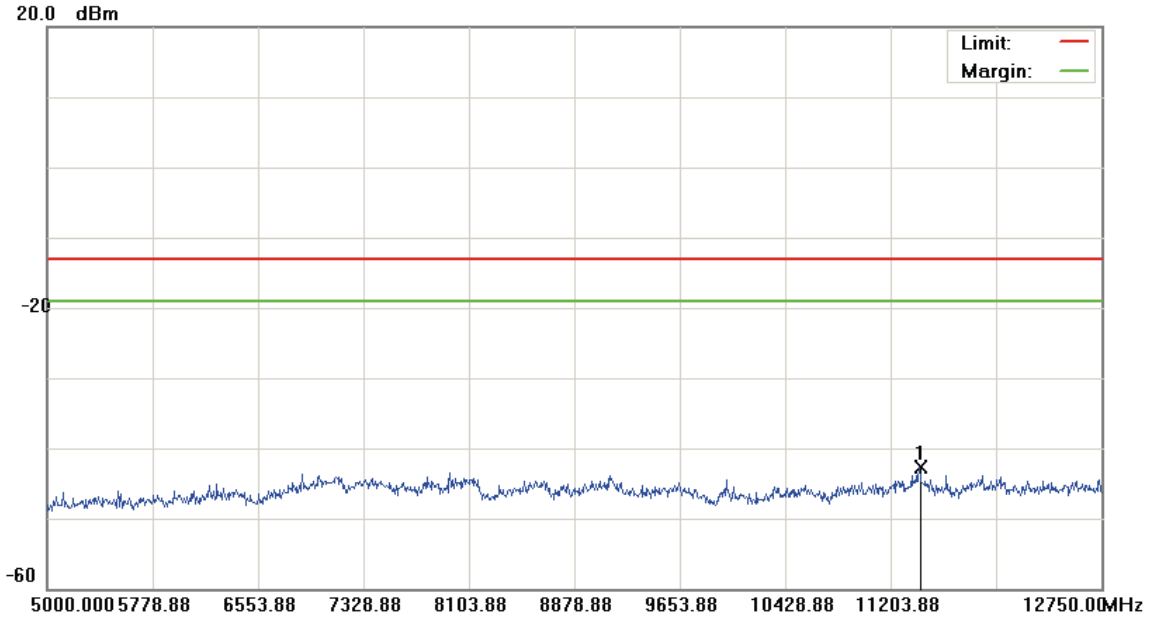

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 190

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 11413.125 | -48.31 | 5.57 | -42.74 | -13.00 | -29.74 | Detector peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH251)

Data :#1

Date:2012/11/20

Time: 下午 04:13:47

10.0 dBm

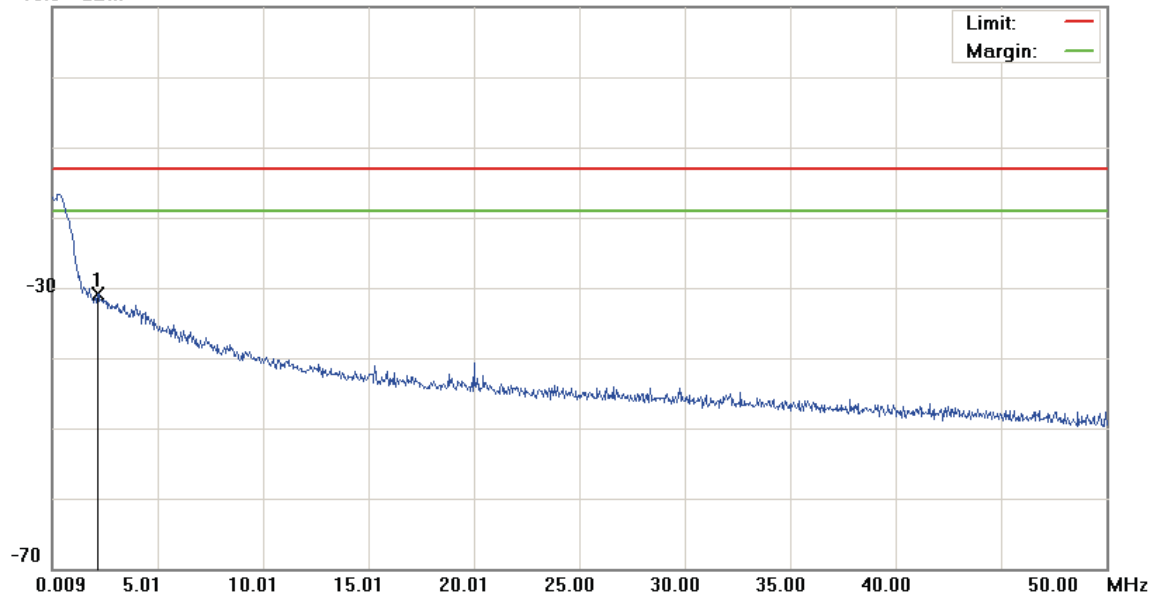

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 251

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.1585 | -62.26 | 31.41 | -30.85 | -13.00 | -17.85 | Detector | peak | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH251)

Data :#2

Date:2012/11/20

Time: 下午 04:14:11

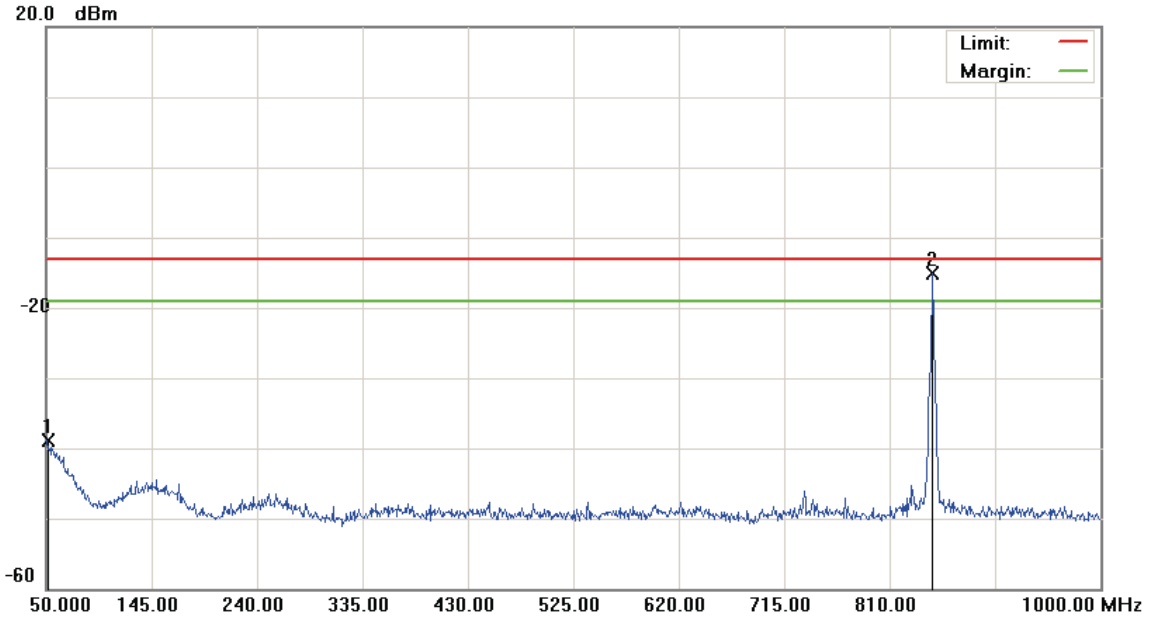

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 251

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | | 51.4250 | -53.40 | 14.44 | -38.96 | -13.00 | -25.96 | peak | | |
| 2 | * | 848.9500 | -19.00 | 3.98 | -15.02 | -13.00 | -2.02 | peak | | Tx |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH251)

Data :#3

Date:2012/11/20

Time: 下午 04:58:55

20.0 dBm

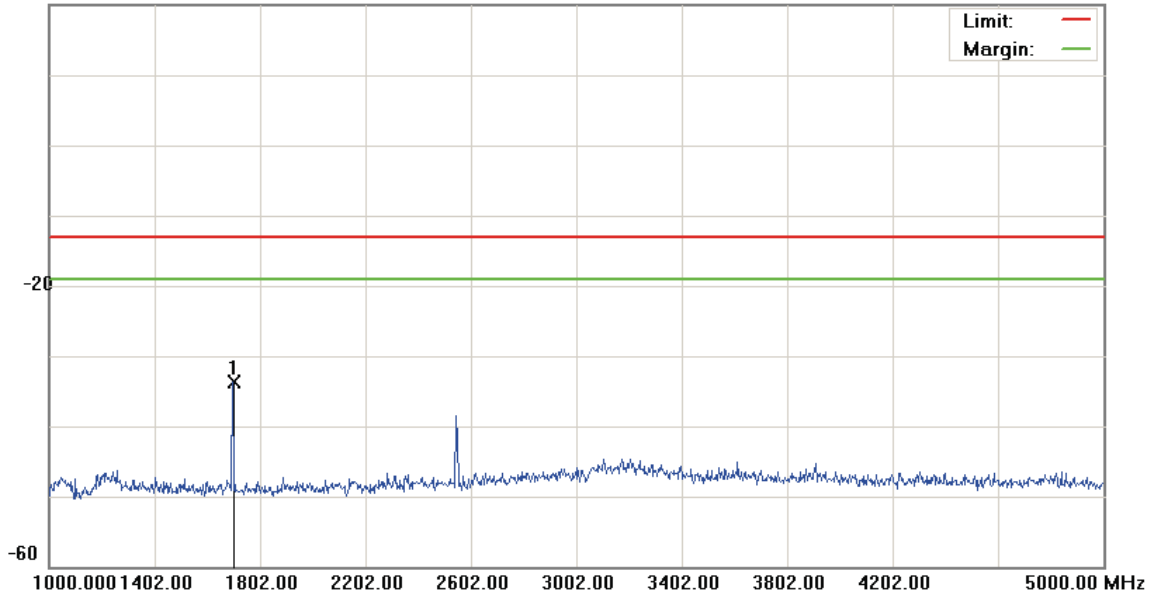

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 850

Note: CH 251

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1698.000 | -38.20 | 4.48 | -33.72 | -13.00 | -20.72 | Detector | peak | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH251)

Data :#4

Date:2012/11/20

Time: 下午 04:59:18

20.0 dBm

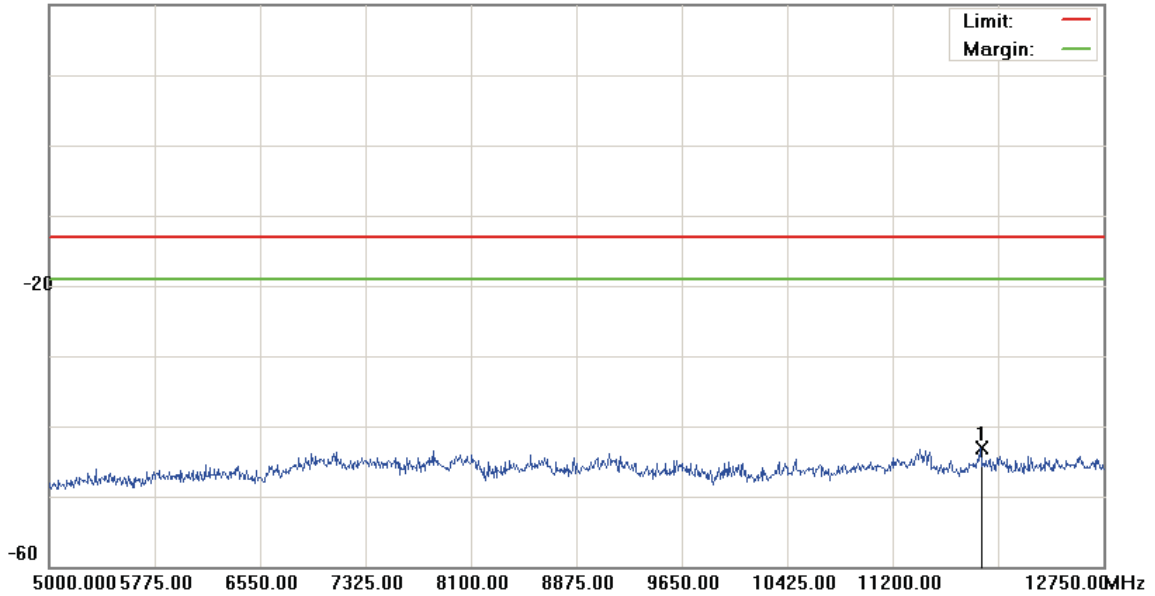

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 850 | | |
| Note: CH 251 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 11847.125 | -48.89 | 5.71 | -43.18 | -13.00 | -30.18 | Detector | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH512)

Data :#1

Date:2012/11/20

Time: 下午 03:28:12

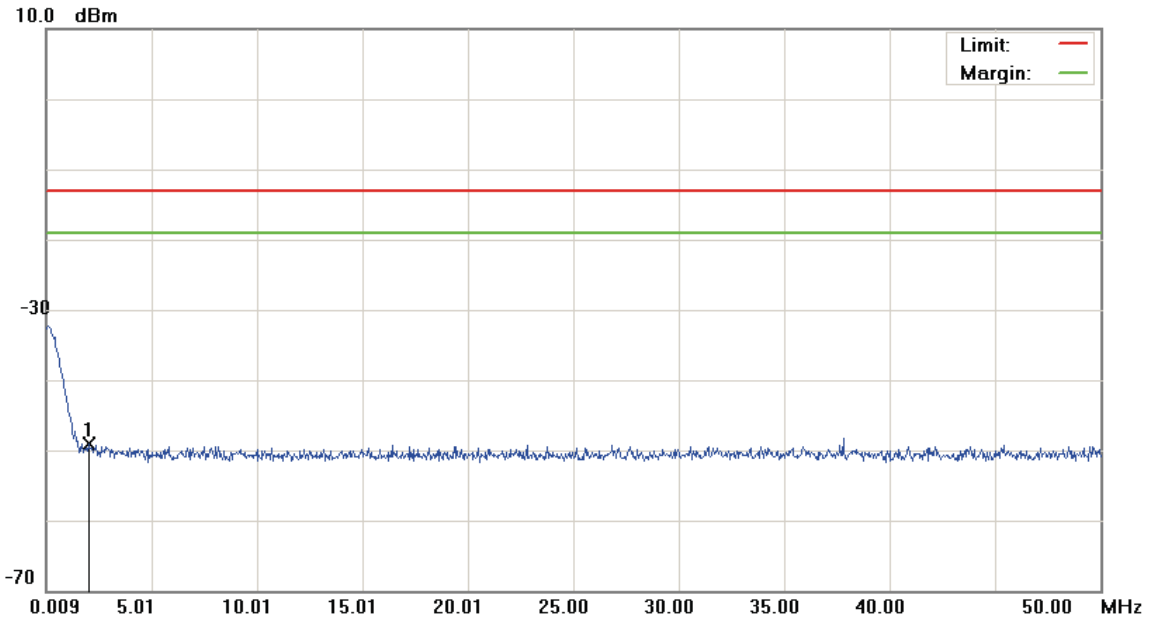

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 1900 | | |
| Note: CH 512 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.0335 | -62.20 | 13.20 | -49.00 | -13.00 | -36.00 | Detector peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH512)

Data :#2

Date:2012/11/20

Time: 下午 03:28:36

20.0 dBm

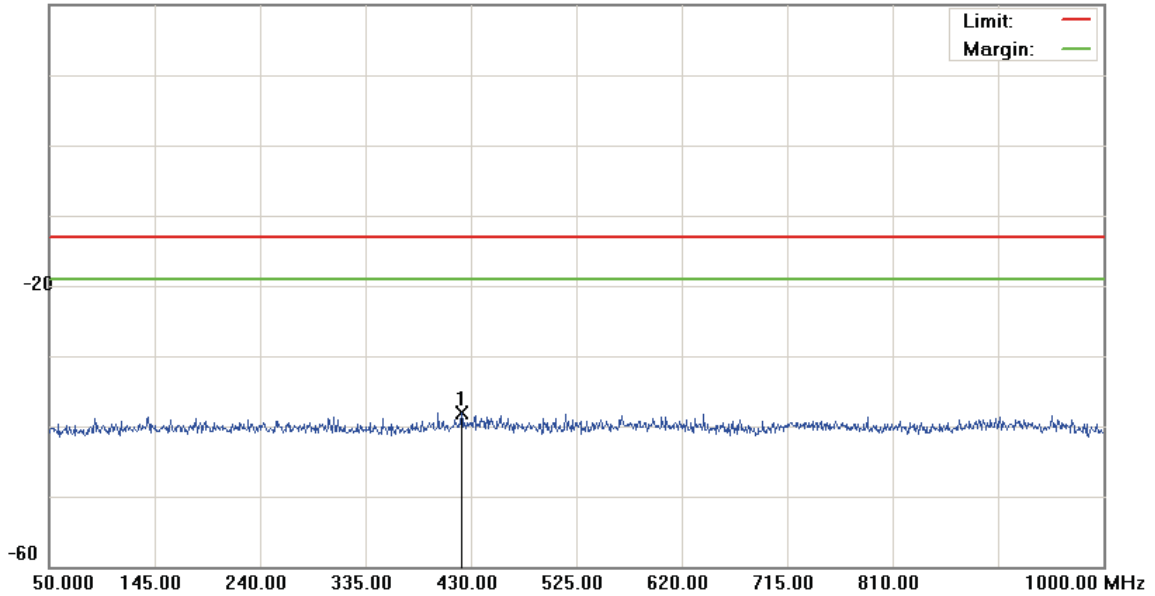

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 1900 | | |
| Note: CH 512 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 421.4500 | -51.39 | 13.24 | -38.15 | -13.00 | -25.15 | | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH512)

Data :#3

Date:2012/11/20

Time: 下午 03:59:44

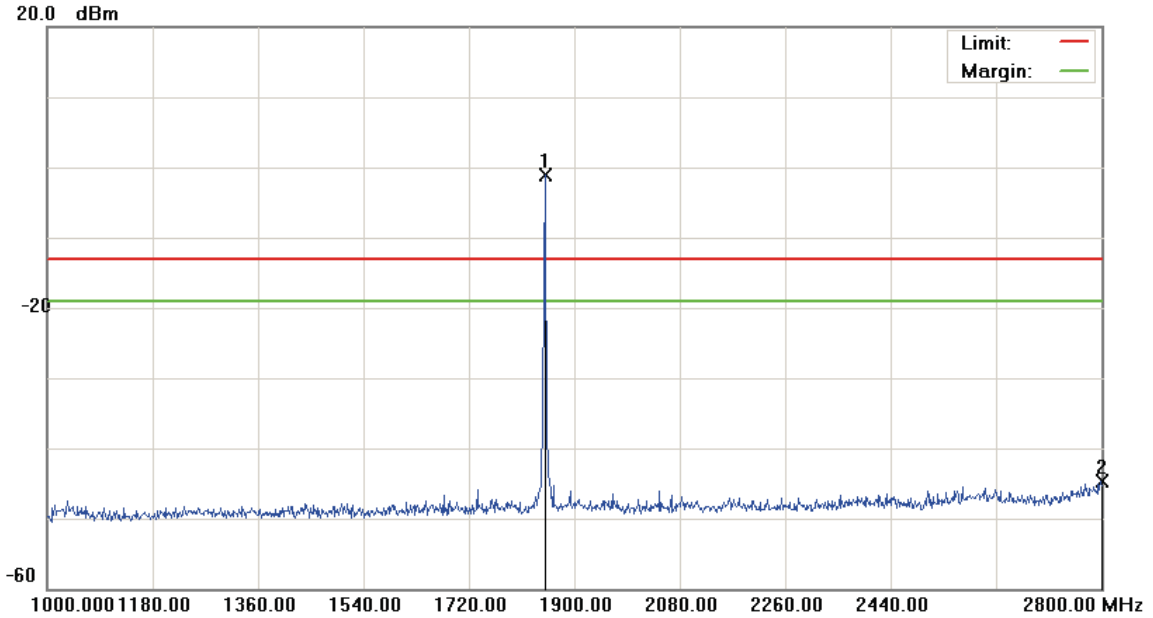

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 512

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1850.500 | -5.44 | 4.26 | -1.18 | -13.00 | 11.82 | peak | | Tx |
| 2 | | 2799.100 | -50.63 | 5.91 | -44.72 | -13.00 | -31.72 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH512)

Data :#4

Date:2012/11/20

Time: 下午 05:04:30

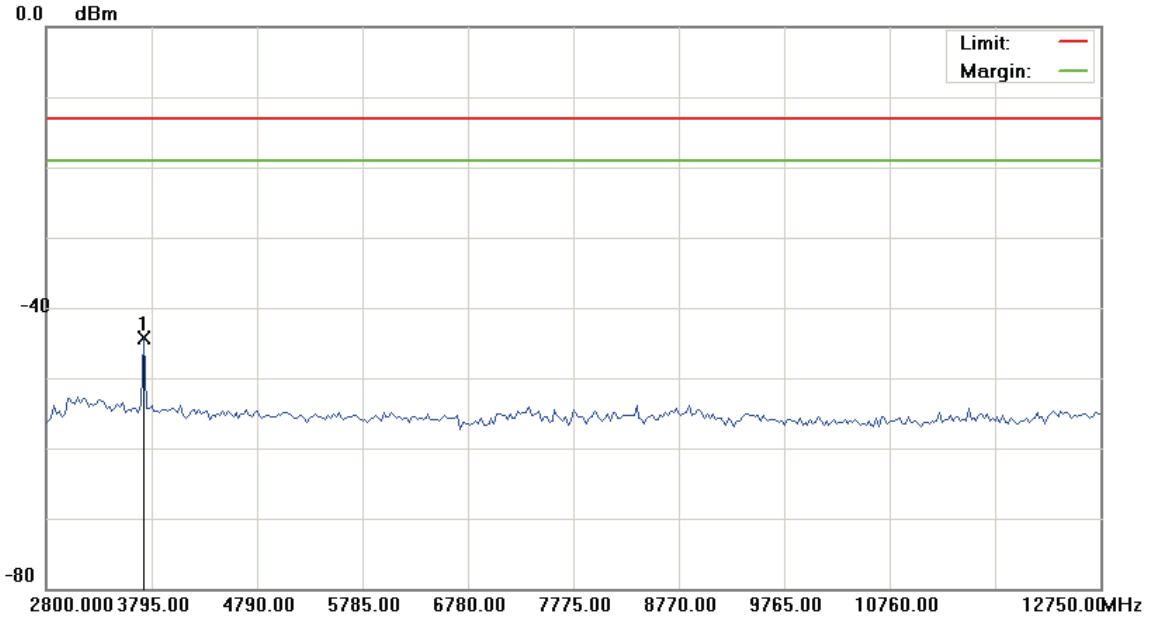

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 1900 | | |
| Note: CH 512 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 3720.375 | -49.15 | 4.88 | -44.27 | -13.00 | -31.27 | Detector | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH512)

Data :#5

Date:2012/11/20

Time: 下午 05:04:50

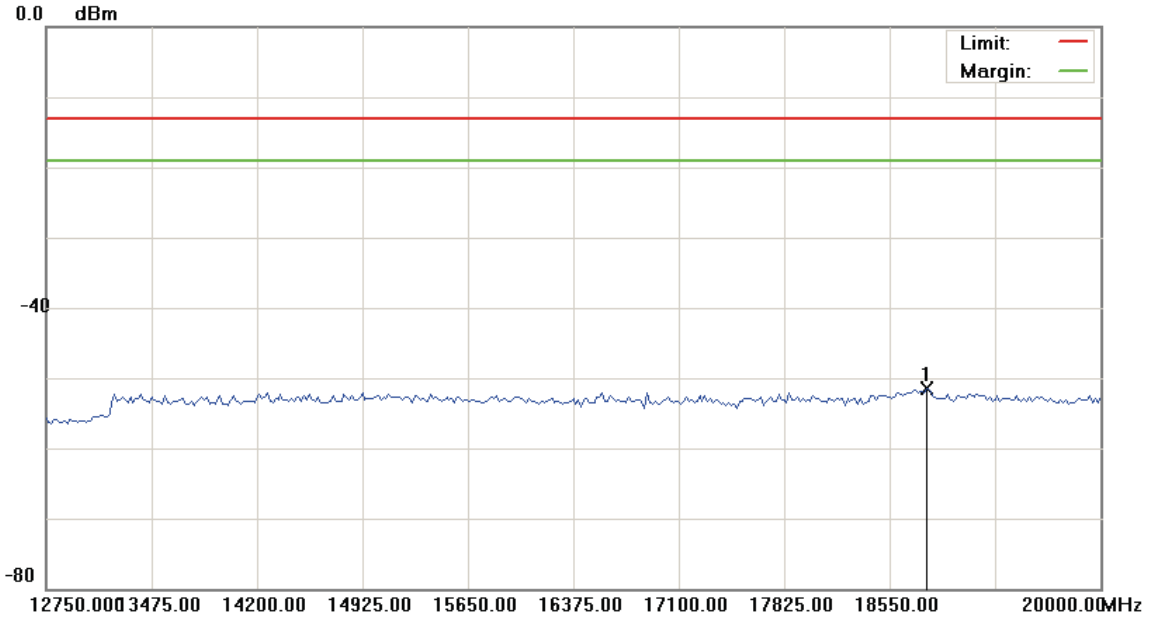

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 1900 | | |
| Note: CH 512 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 18803.750 | -58.66 | 7.10 | -51.56 | -13.00 | -38.56 | Detector | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH661)

Data :#1

Date:2012/11/20

Time: 下午 03:29:22

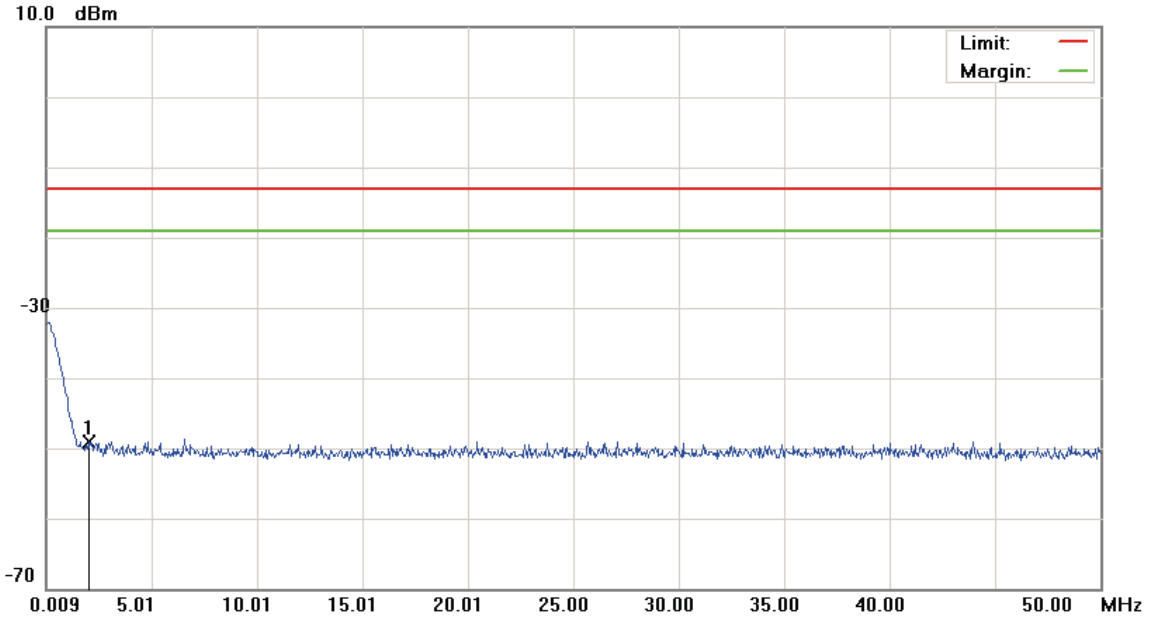

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 661

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.0085 | -62.21 | 13.21 | -49.00 | -13.00 | -36.00 | Detector peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH661)

Data :#2

Date:2012/11/20

Time: 下午 03:29:46

20.0 dBm

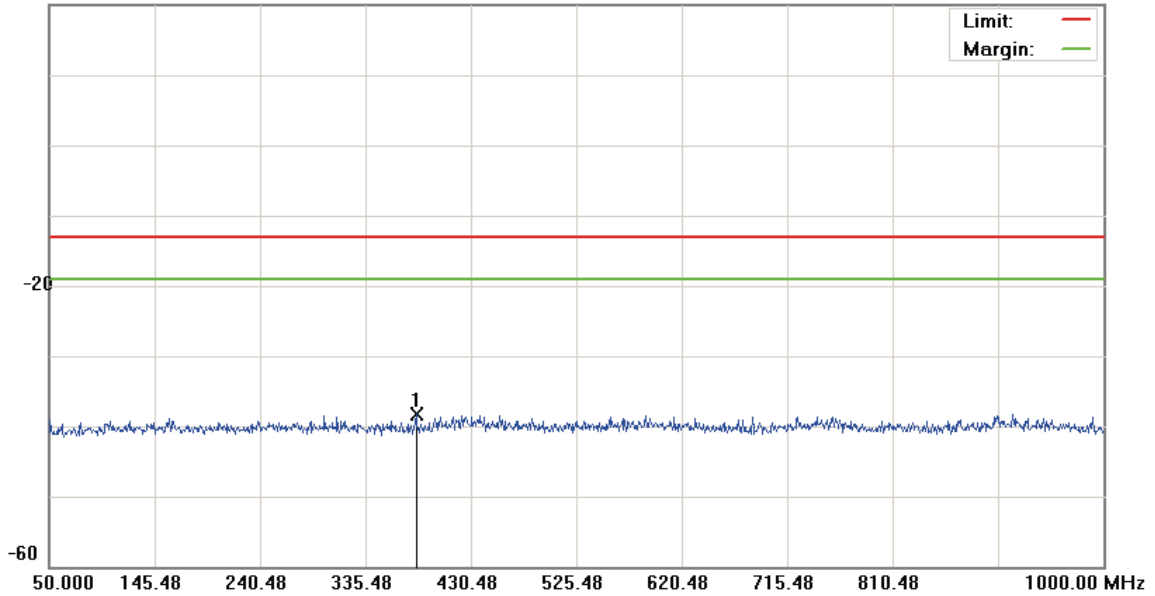

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 661

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 381.0750 | -51.43 | 13.22 | -38.21 | -13.00 | -25.21 | Detector peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH661)

Data :#3

Date:2012/11/20

Time: 下午 04:02:07

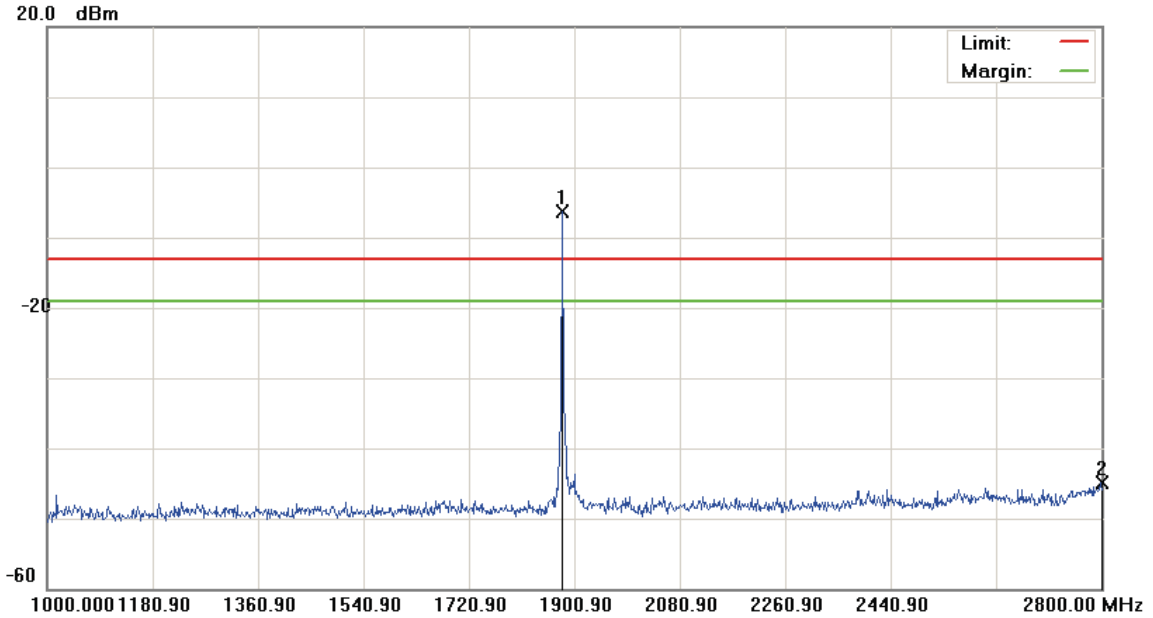

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 661

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1880.200 | -10.86 | 4.65 | -6.21 | -13.00 | 6.79 | peak | | Tx |
| 2 | | 2799.100 | -50.75 | 5.91 | -44.84 | -13.00 | -31.84 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH661)

Data :#4

Date:2012/11/20

Time: 下午 05:06:00

20.0 dBm

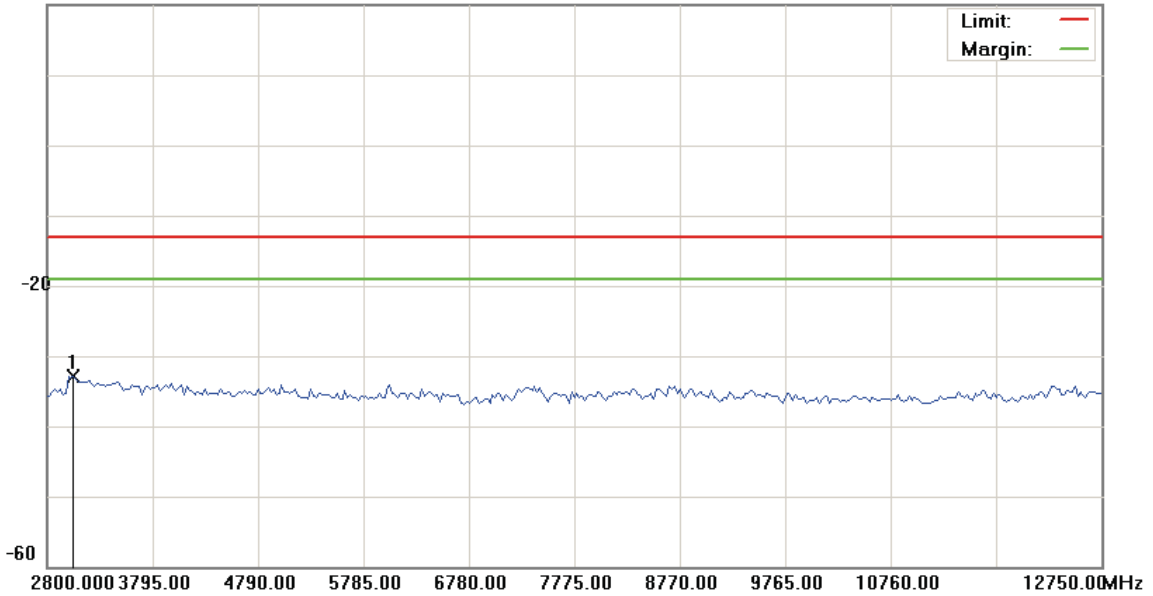

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 1900 | | |
| Note: CH 661 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 3048.750 | -38.36 | 5.47 | -32.89 | -13.00 | -19.89 | Detector peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH661)

Data :#5

Date:2012/11/20

Time: 下午 05:06:19

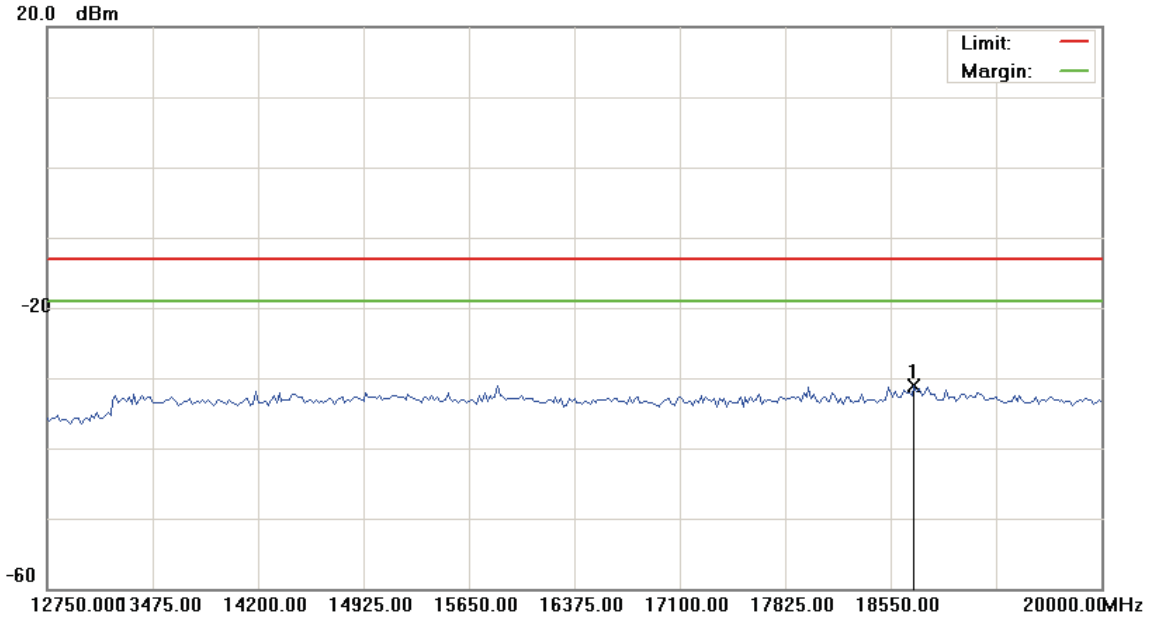

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 661

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 18713.125 | -38.13 | 7.07 | -31.06 | -13.00 | -18.06 | Detector peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH810)

Data :#1

Date:2012/11/20

Time: 下午 03:30:58

10.0 dBm

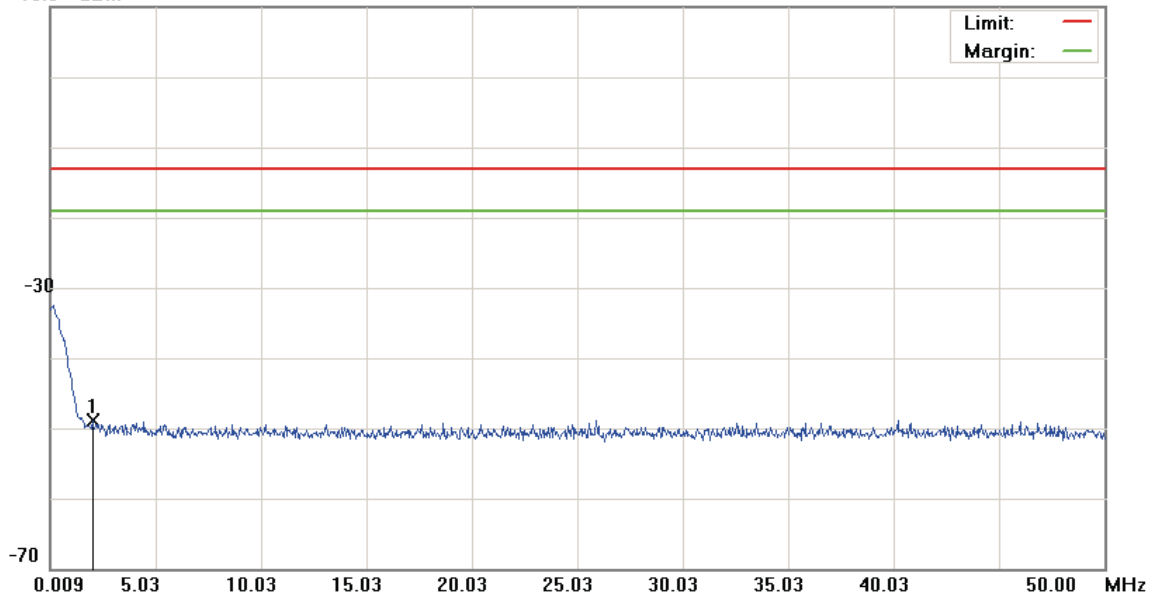

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 810

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.0085 | -62.09 | 13.21 | -48.88 | -13.00 | -35.88 | Detector peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH810)

Data :#2

Date:2012/11/20

Time: 下午 03:31:22

20.0 dBm

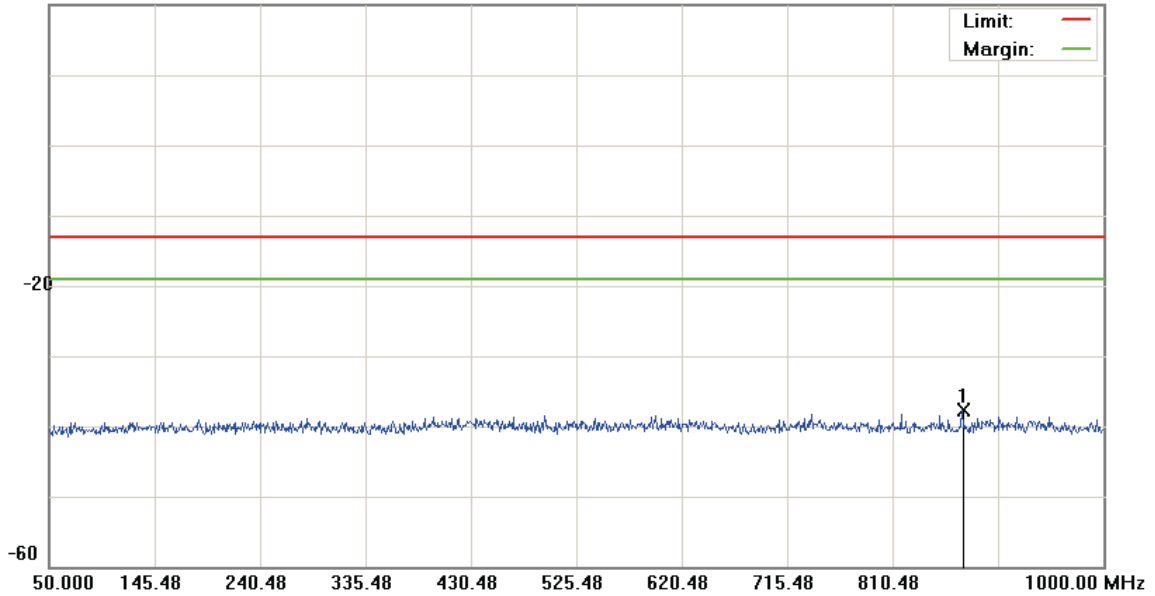

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 810

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 873.1750 | -50.93 | 13.27 | -37.66 | -13.00 | -24.66 | Detector peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH810)

Data :#3

Date:2012/11/20

Time: 下午 04:04:43

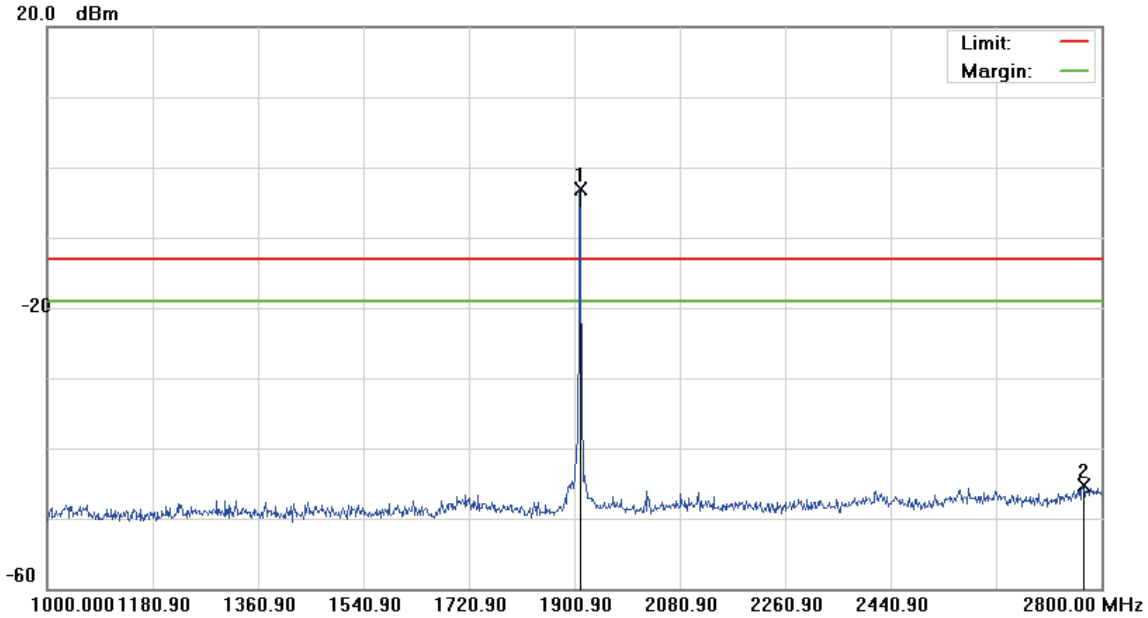

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 810

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1909.900 | -8.71 | 5.71 | -3.00 | -13.00 | 10.00 | peak | | Tx |
| 2 | | 2768.500 | -51.09 | 5.72 | -45.37 | -13.00 | -32.37 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH810)

Data :#4

Date:2012/11/20

Time: 下午 05:09:40

20.0 dBm

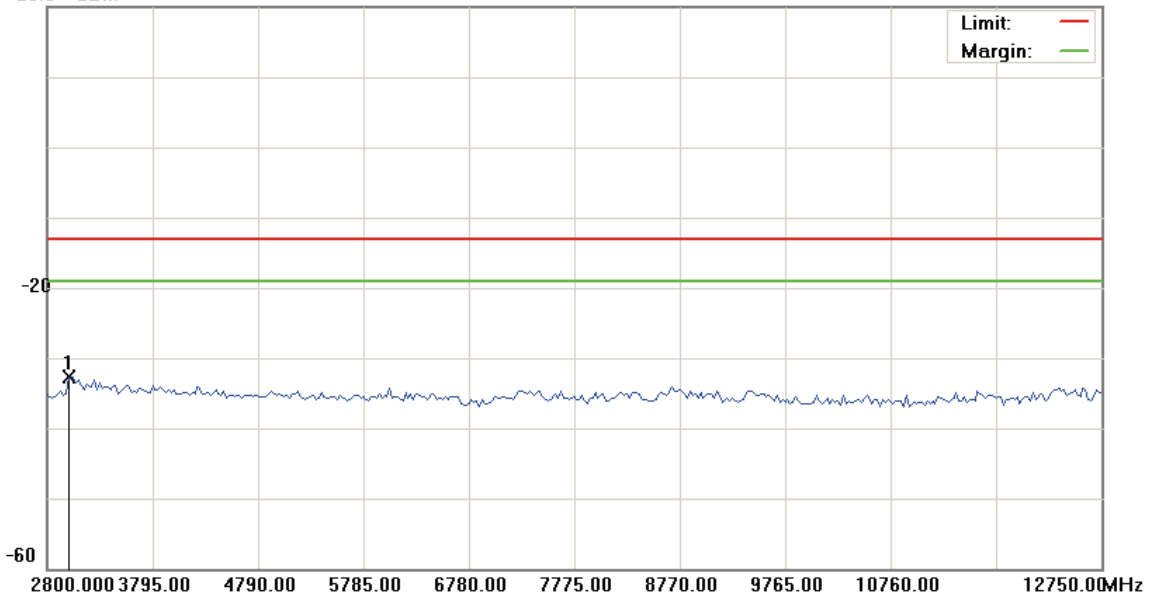

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: GSM 1900 | | |
| Note: CH 810 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2999.000 | -38.20 | 5.48 | -32.72 | -13.00 | -19.72 | Detector peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH810)

Data :#5

Date:2012/11/20

Time: 下午 05:09:59

20.0 dBm

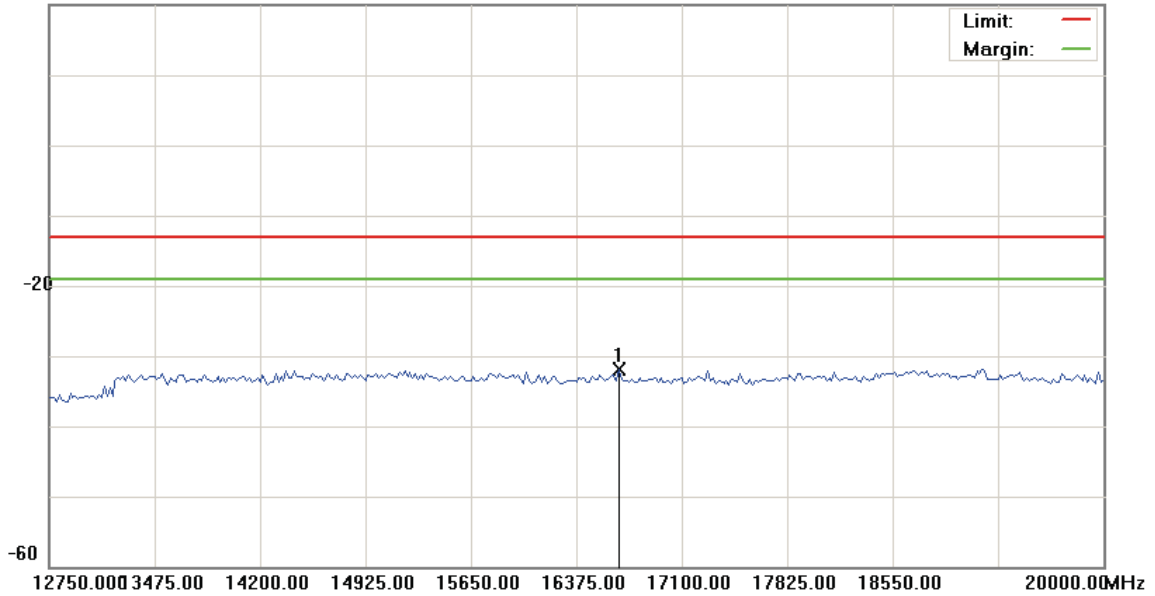

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: GSM 1900

Note: CH 810

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 16665.000 | -38.34 | 6.49 | -31.85 | -13.00 | -18.85 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9262)

Data :#1

Date:2012/11/20

Time: 下午 03:33:12

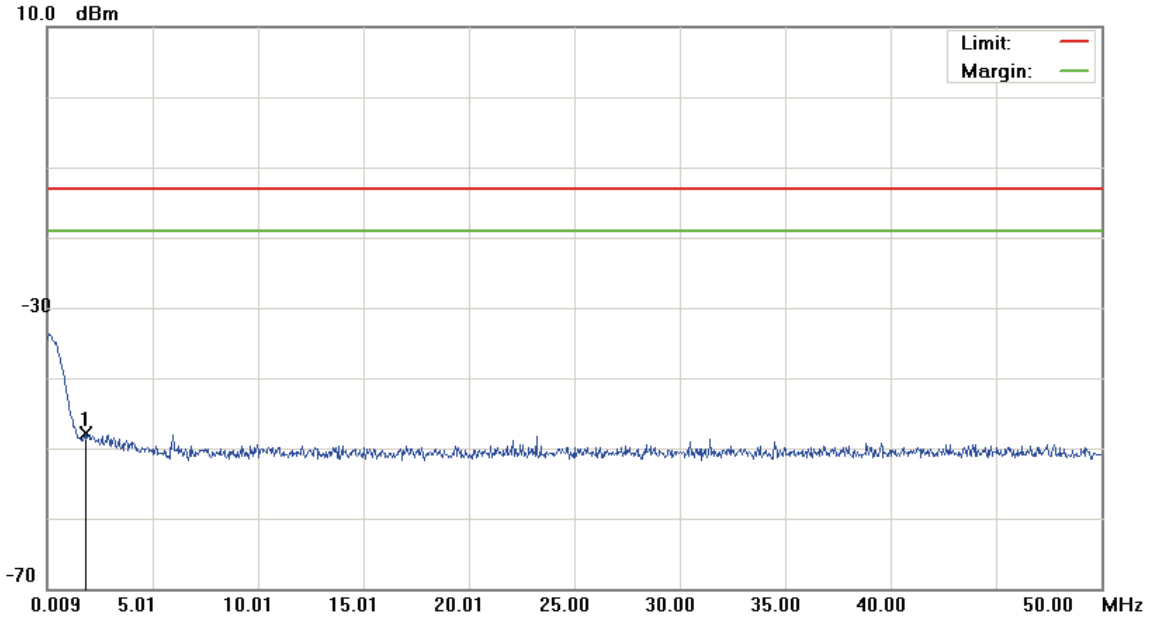

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9262 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1.8587 | -60.76 | 12.82 | -47.94 | -13.00 | -34.94 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH9262)

Data :#2

Date:2012/11/20

Time: 下午 03:33:36

20.0 dBm

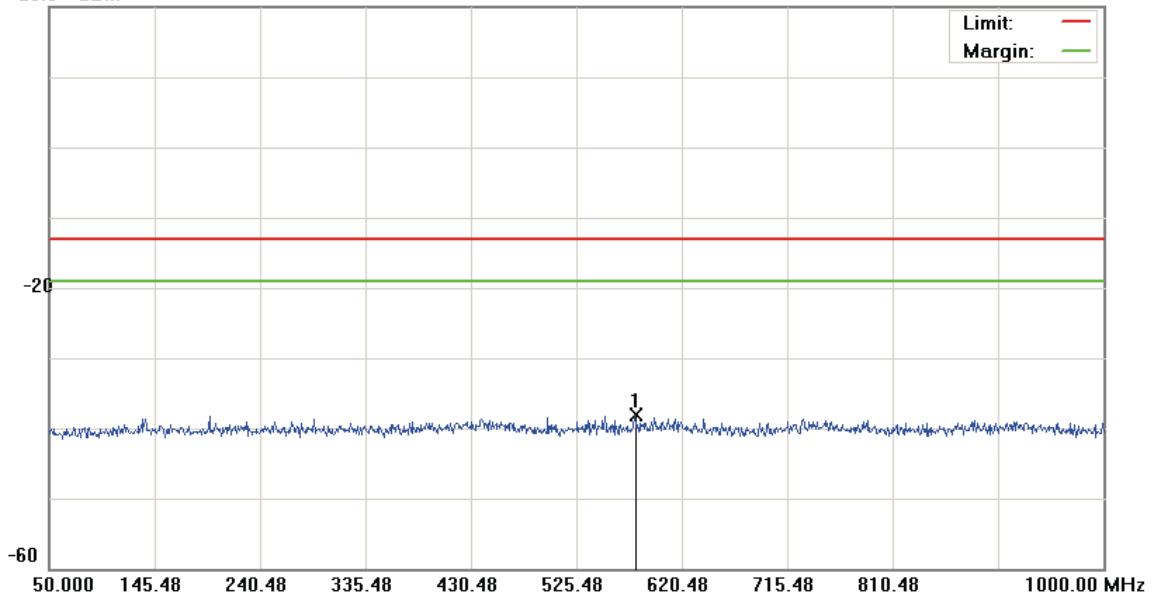

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band II

Note: CH 9262

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 577.7250 | -51.30 | 13.17 | -38.13 | -13.00 | -25.13 | Detector peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9262)

Data :#3

Date:2012/11/20

Time: 下午 03:50:27

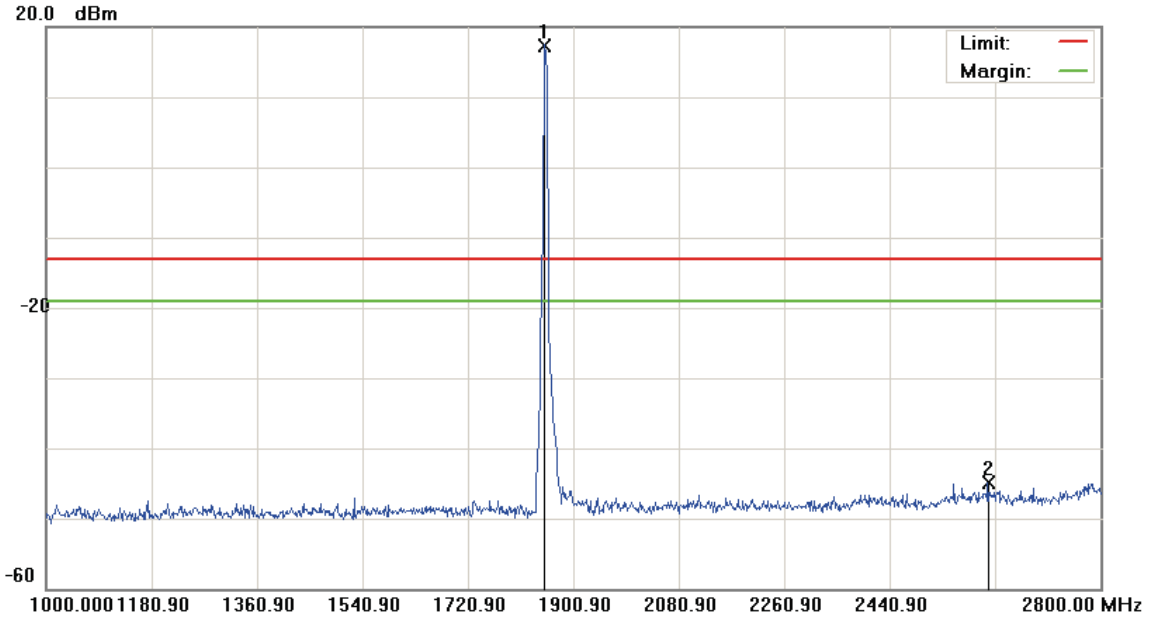

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9262 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1851.400 | 13.14 | 4.26 | 17.40 | -13.00 | 30.40 | peak | | Tx |
| 2 | | 2608.300 | -50.27 | 5.45 | -44.82 | -13.00 | -31.82 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9262)

Data :#4

Date:2012/11/20

Time: 下午 05:11:05

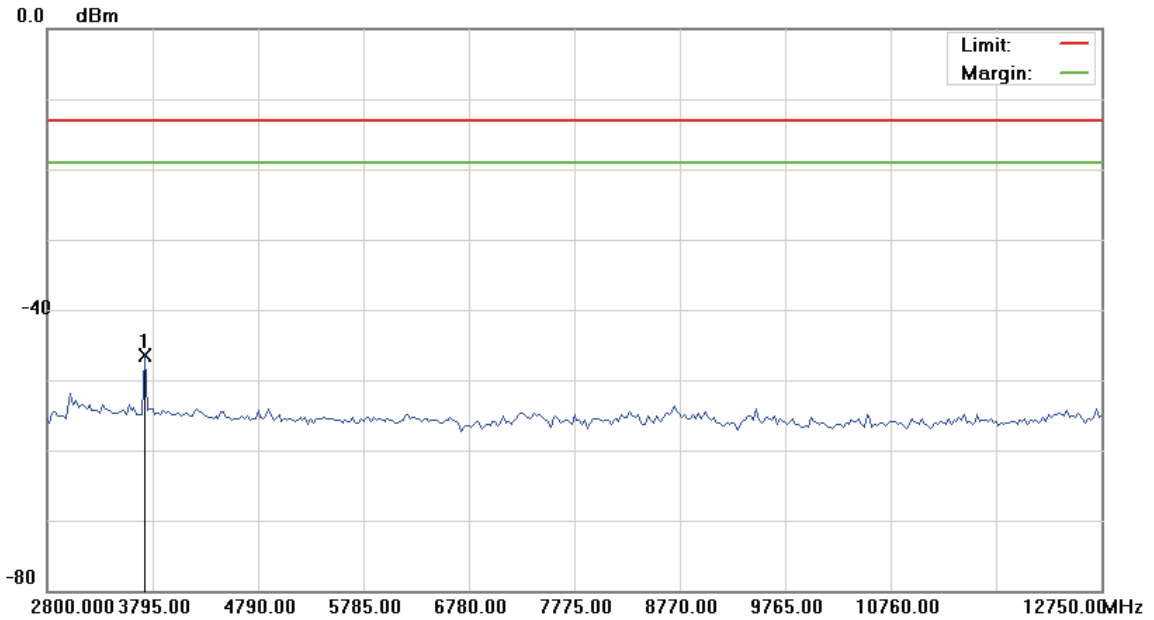

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9262 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 3720.375 | -51.35 | 4.88 | -46.47 | -13.00 | -33.47 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9262)

Data :#5

Date:2012/11/20

Time: 下午 05:11:24

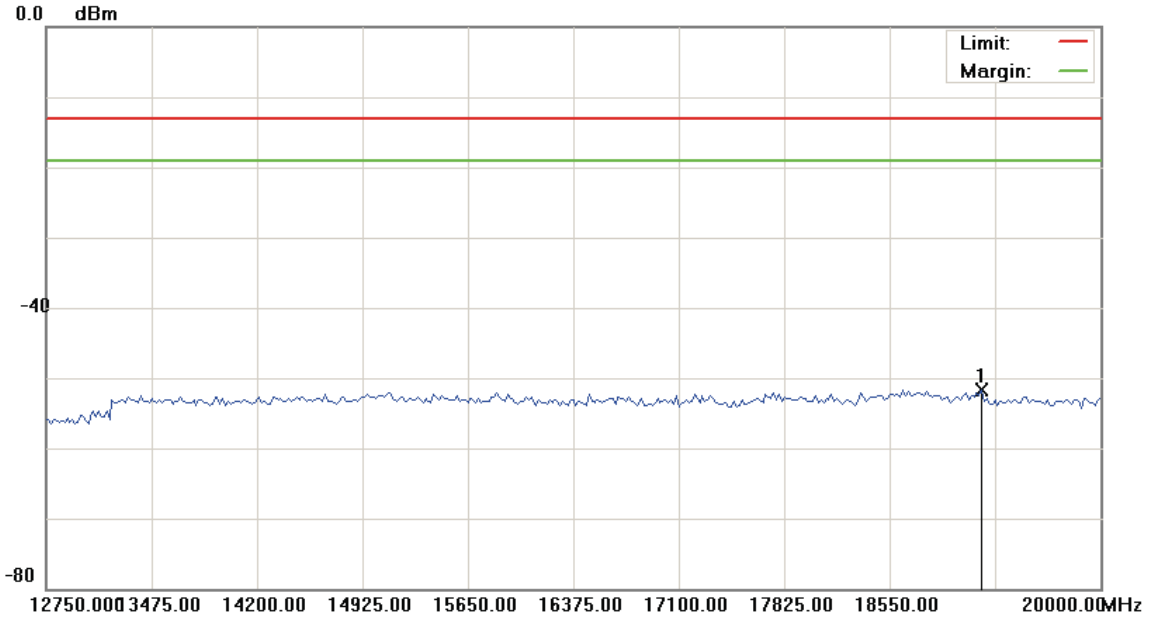

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9262 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 19184.375 | -58.87 | 7.21 | -51.66 | -13.00 | -38.66 | Detector | | peak |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH9400)

Data :#1

Date:2012/11/20

Time: 下午 03:35:00

10.0 dBm

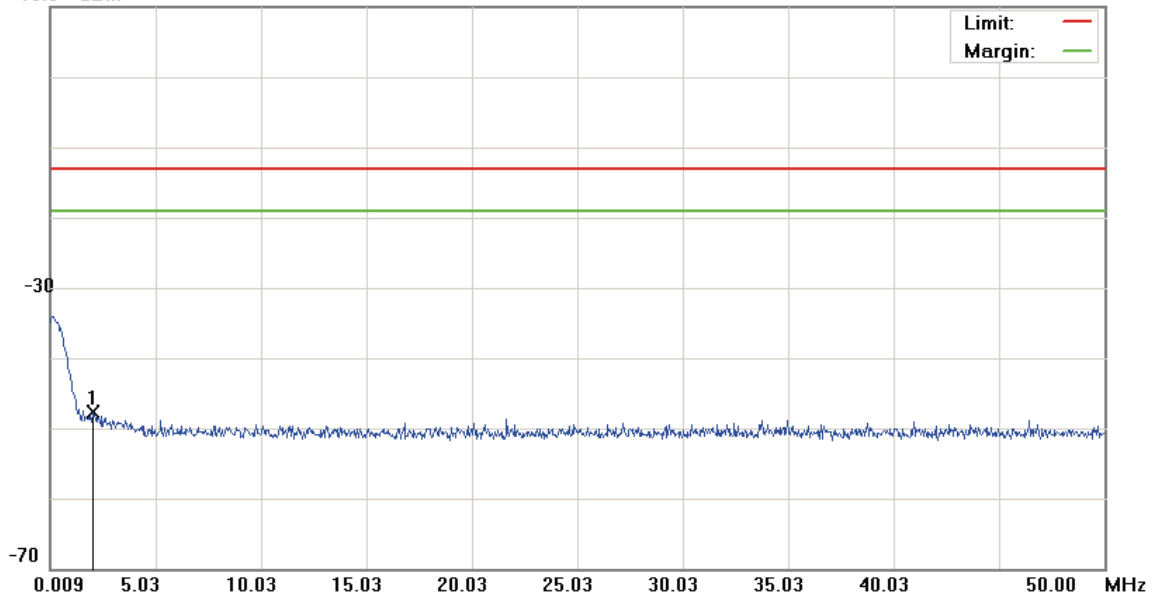

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band II

Note: CH 9400

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.0085 | -60.96 | 13.21 | -47.75 | -13.00 | -34.75 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9400)

Data :#2

Date:2012/11/20

Time: 下午 03:35:24

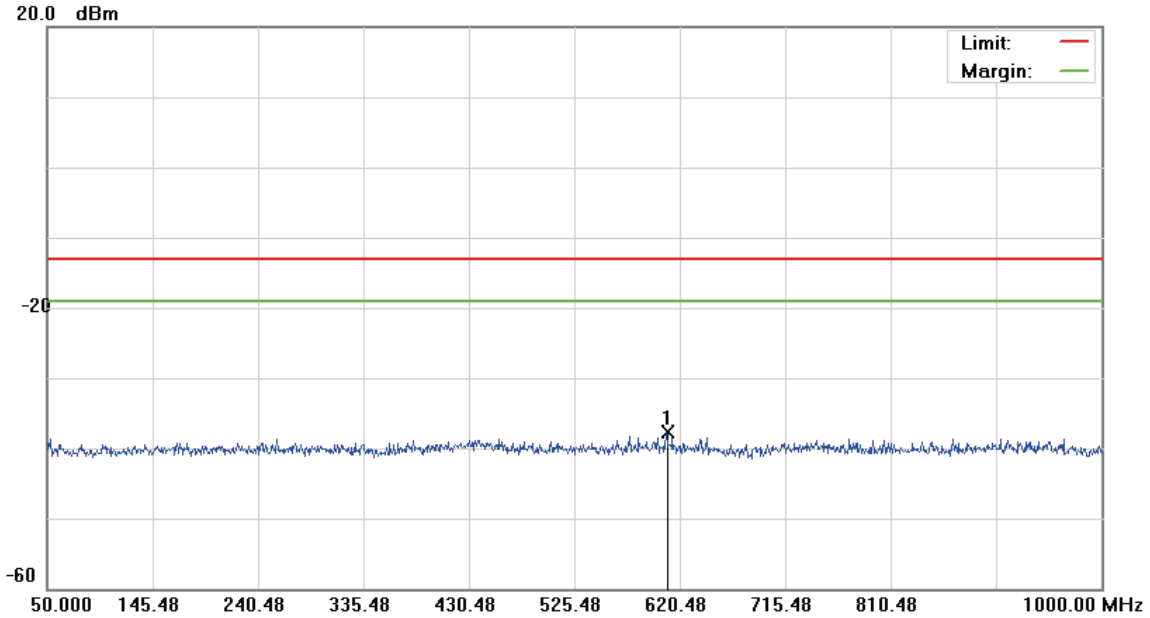

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 24 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band II

Note: CH 9400

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 608.1250 | -50.86 | 13.17 | -37.69 | -13.00 | -24.69 | Detector peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9400)

Data :#3

Date:2012/11/20

Time: 下午 03:51:33

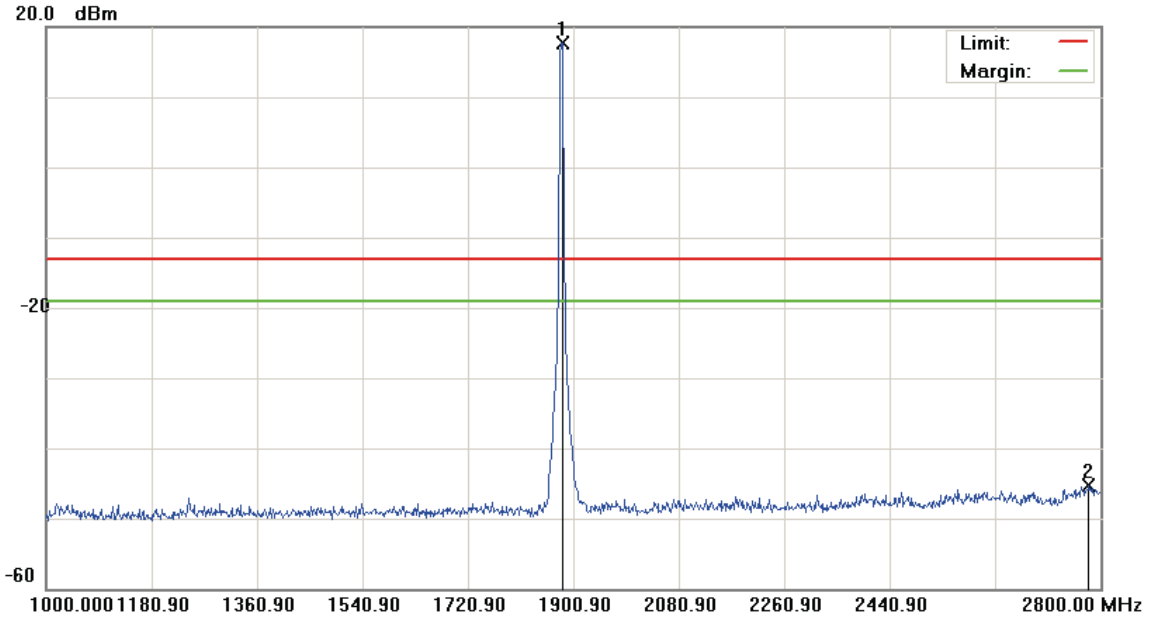

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9400 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1882.000 | 12.95 | 4.83 | 17.78 | -13.00 | 30.78 | peak | | Tx |
| 2 | | 2780.200 | -51.22 | 5.88 | -45.34 | -13.00 | -32.34 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH9400)

Data :#4

Date:2012/11/20

Time: 下午 05:11:55

20.0 dBm

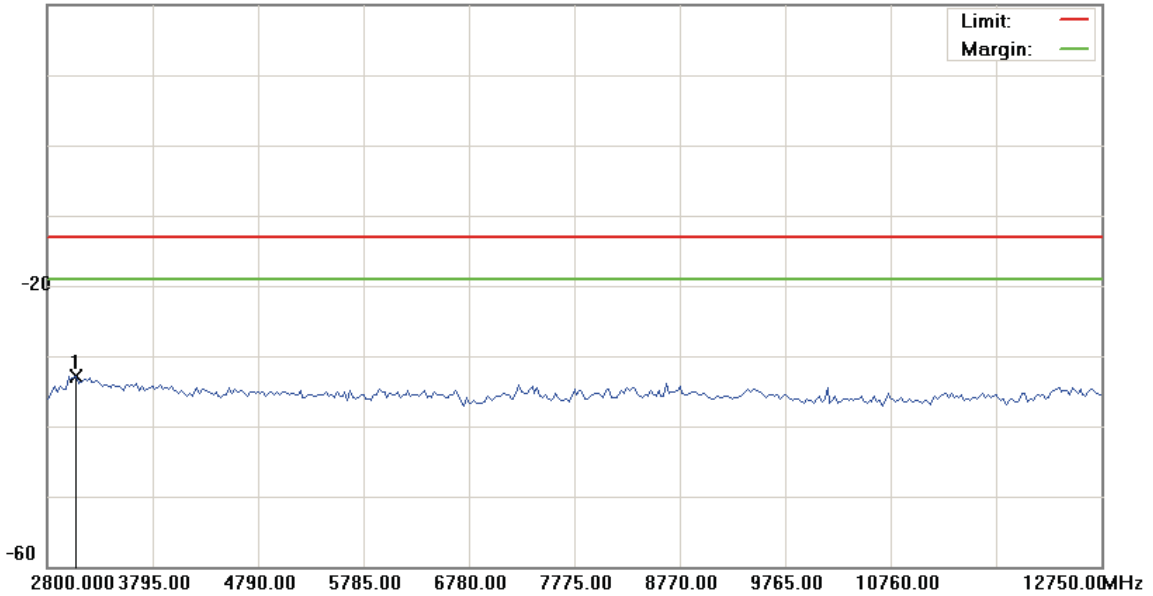

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9400 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 3073.625 | -38.23 | 5.40 | -32.83 | -13.00 | -19.83 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH9400)

Data :#5

Date:2012/11/20

Time: 下午 05:12:14

20.0 dBm

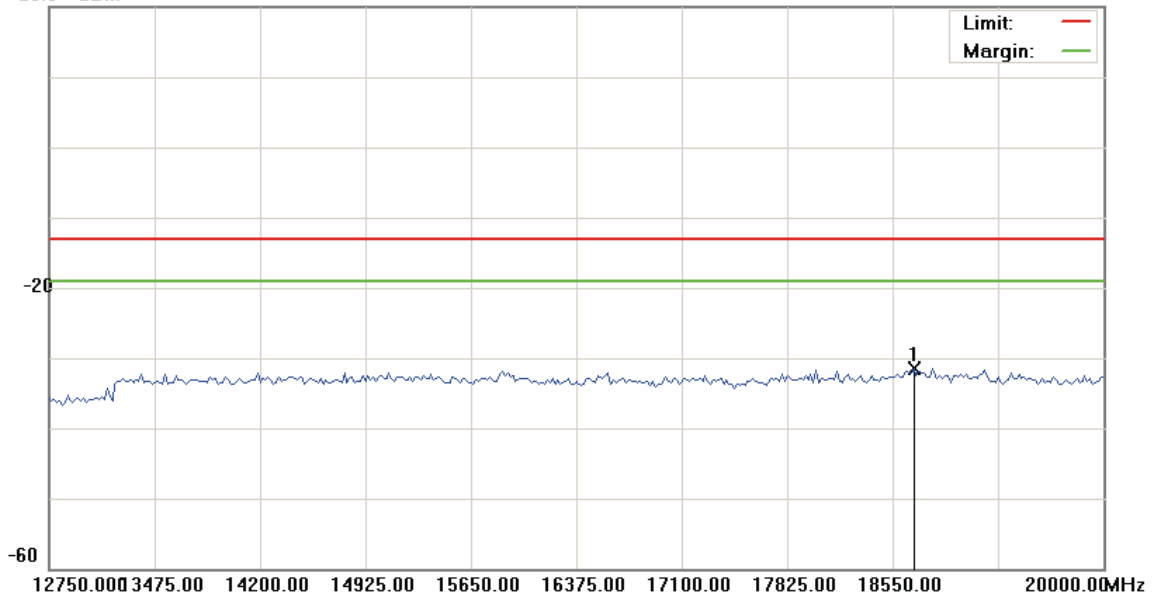

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9400 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 18695.000 | -38.52 | 7.07 | -31.45 | -13.00 | -18.45 | Detector | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9538)

Data :#1

Date:2012/11/20

Time: 下午 03:37:04

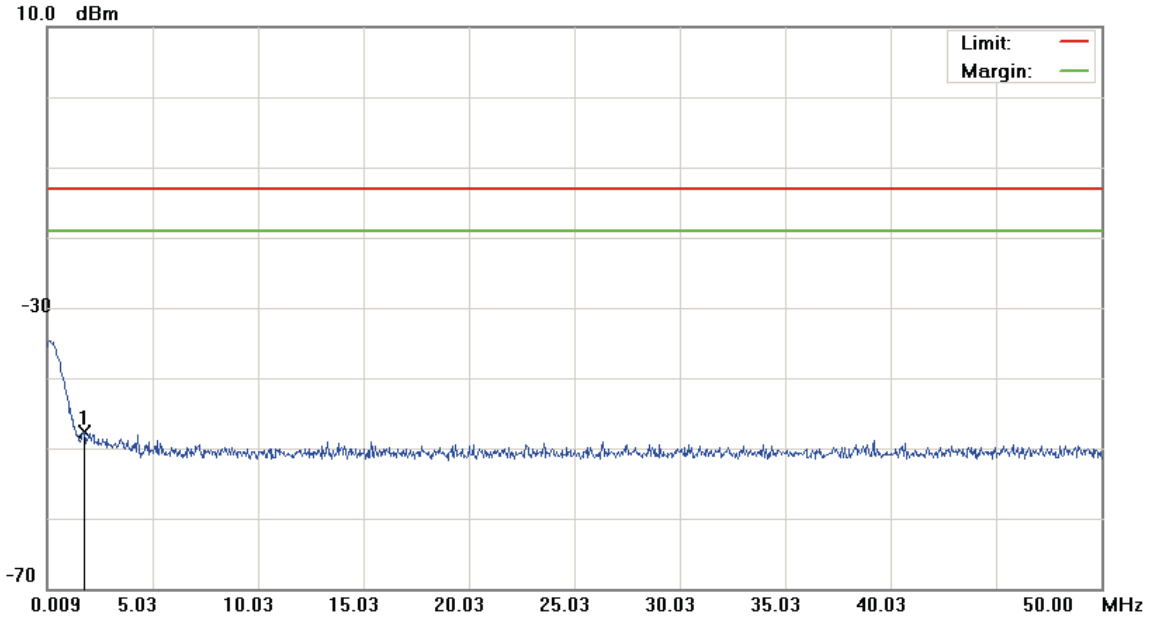

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9538 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1.7337 | -60.36 | 12.60 | -47.76 | -13.00 | -34.76 | Detector | | peak |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH9538)

Data :#2

Date:2012/11/20

Time: 下午 03:37:28

20.0 dBm

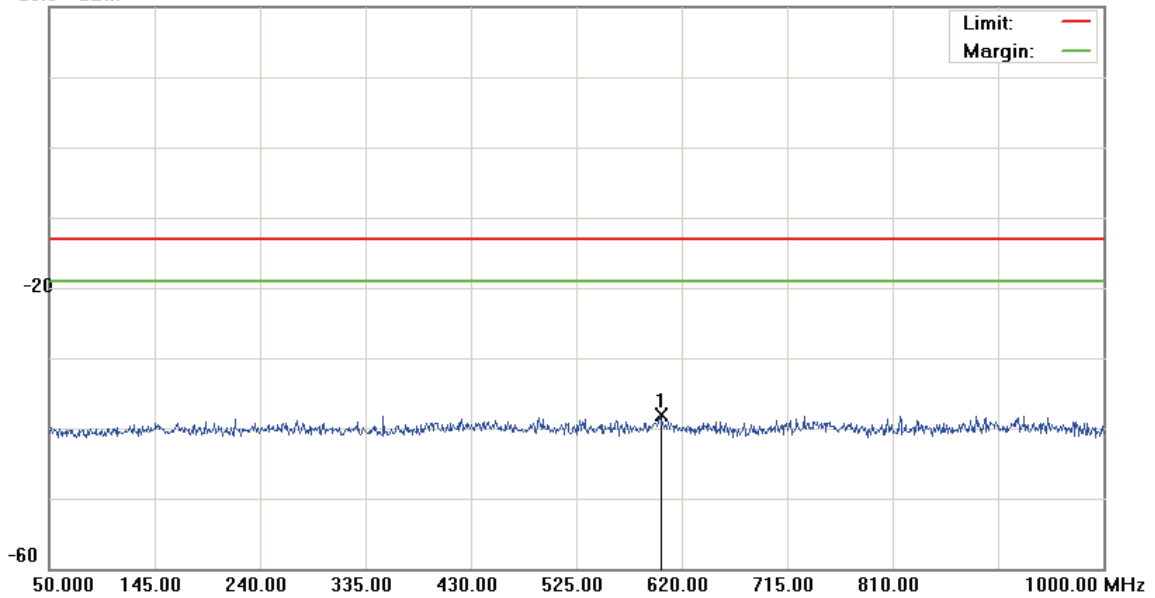

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9538 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 600.5250 | -51.35 | 13.20 | -38.15 | -13.00 | -25.15 | Detector | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH9538)

Data :#3

Date:2012/11/20

Time: 下午 03:57:27

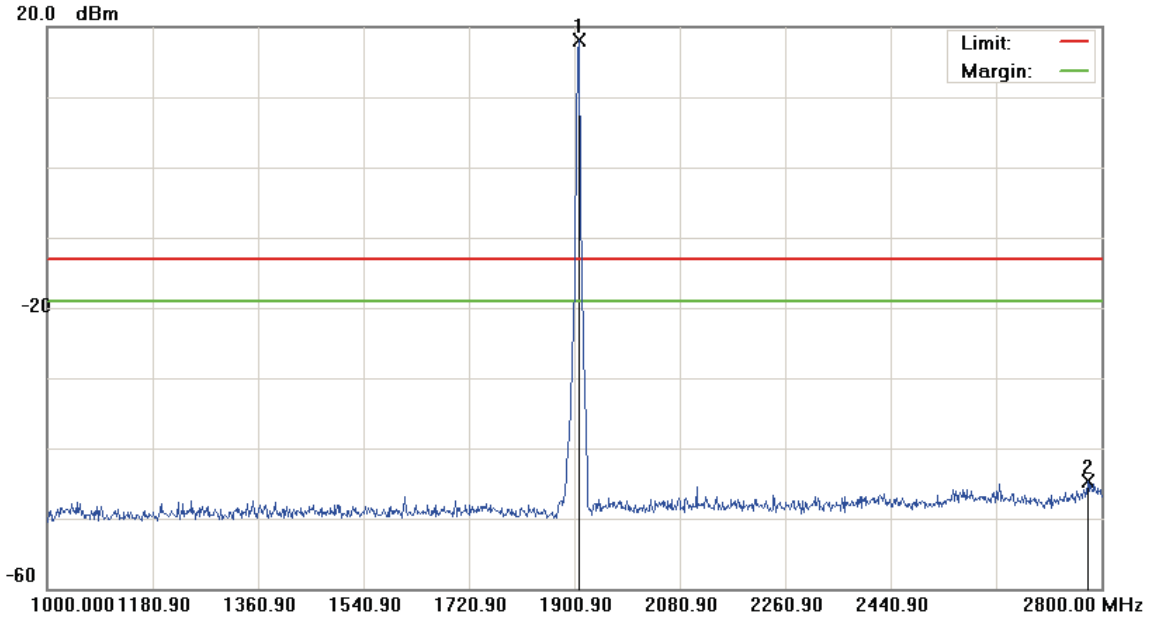

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9538 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1909.000 | 12.32 | 5.80 | 18.12 | -13.00 | 31.12 | peak | | Tx |
| 2 | | 2776.600 | -50.51 | 5.83 | -44.68 | -13.00 | -31.68 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH9538)

Data :#4

Date:2012/11/20

Time: 下午 05:12:52

20.0 dBm

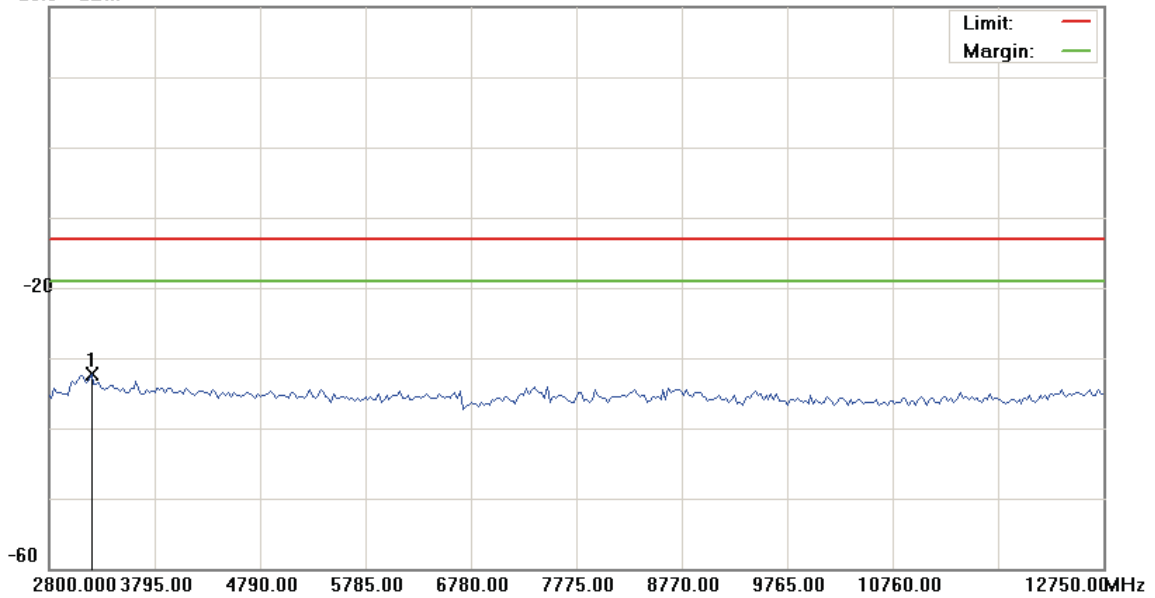

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9538 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 3198.000 | -37.60 | 5.22 | -32.38 | -13.00 | -19.38 | Detector | | peak |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH9538)

Data :#5

Date:2012/11/20

Time: 下午 05:13:12

20.0 dBm

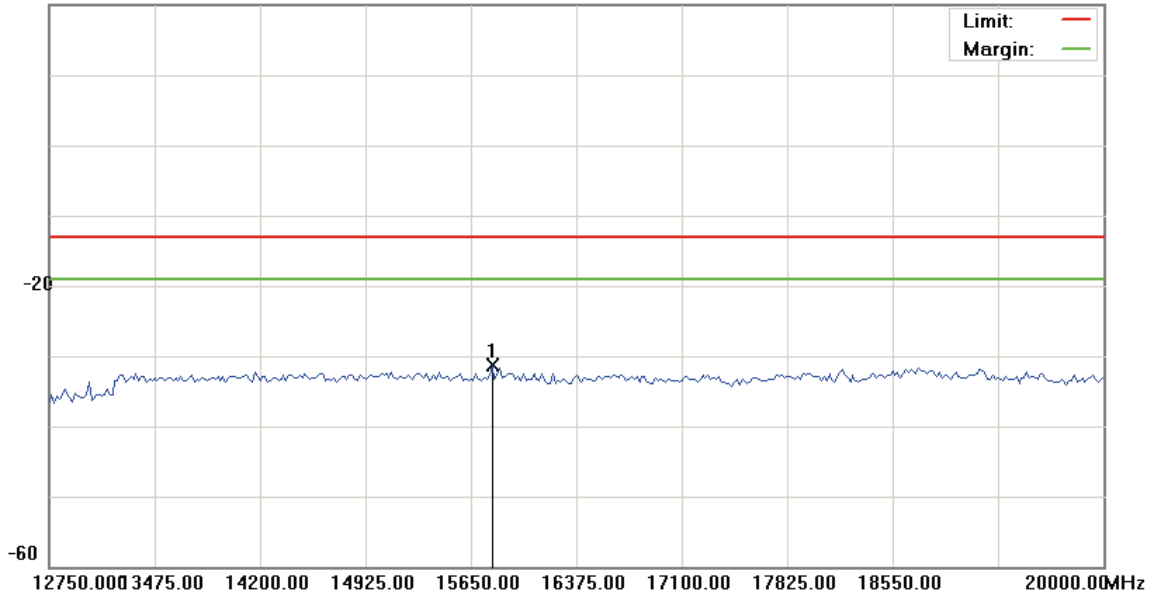

| | | |
|--|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 24 conducted(9k-26.5G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band II | | |
| Note: CH 9538 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 15795.000 | -37.55 | 6.24 | -31.31 | -13.00 | -18.31 | Detector | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4132)

Data :#1

Date:2012/11/20

Time: 下午 04:18:36

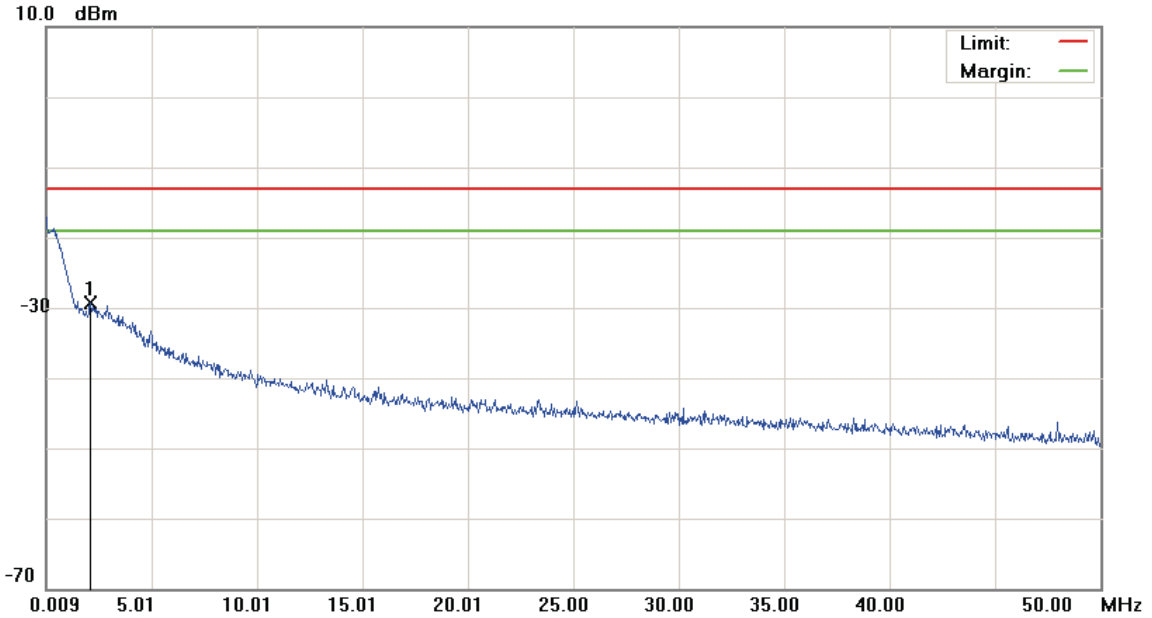

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band V | | |
| Note: CH 4132 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.1086 | -60.85 | 31.54 | -29.31 | -13.00 | -16.31 | peak | | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4132)

Data :#2

Date:2012/11/20

Time: 下午 04:19:00

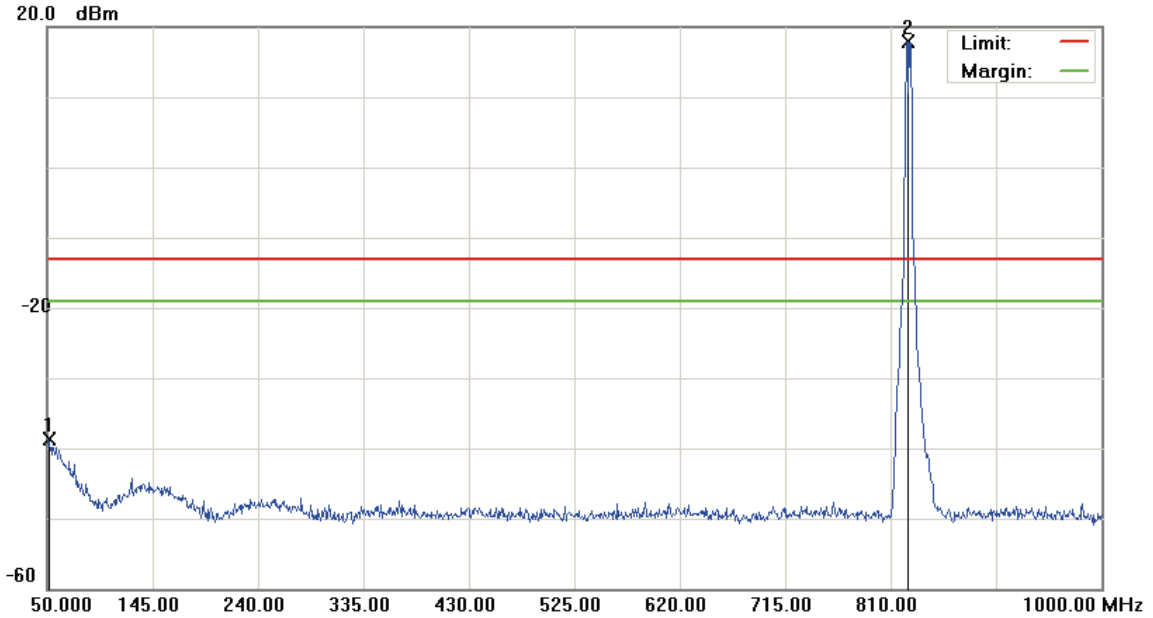

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4132

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | | 51.4250 | -53.12 | 14.44 | -38.68 | -13.00 | -25.68 | peak | | |
| 2 | * | 825.2000 | 14.15 | 3.84 | 17.99 | -13.00 | 30.99 | peak | | Tx |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4132)

Data :#3

Date:2012/11/20

Time: 下午 04:35:11

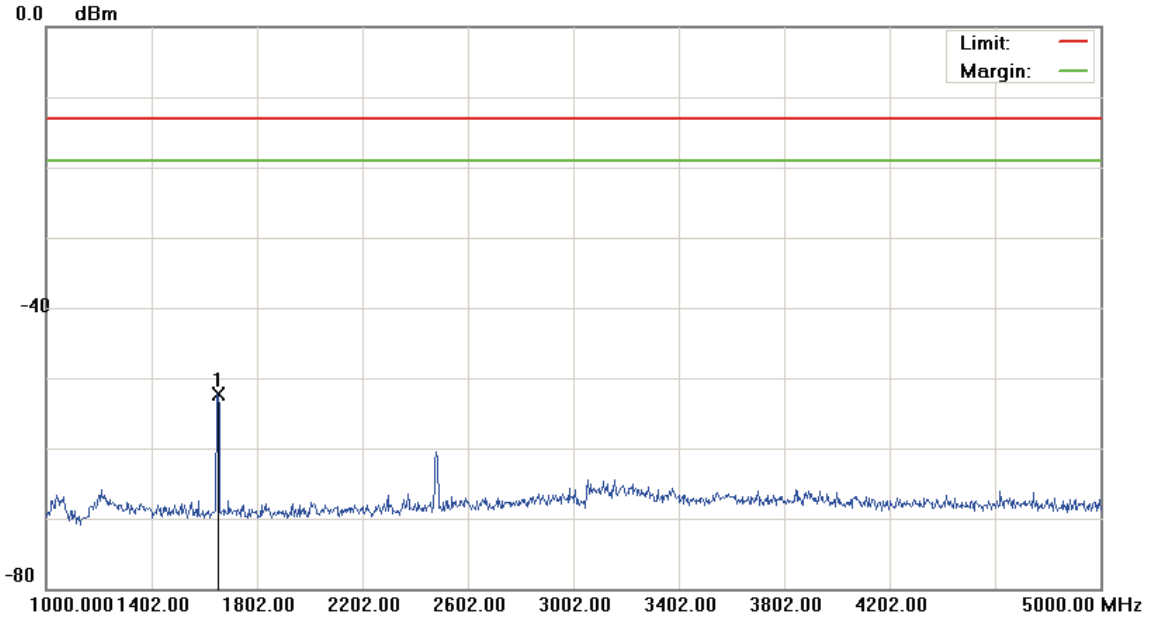

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: Conducted po | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band V | | |
| Note: CH 4132 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1650.000 | -56.78 | 4.45 | -52.33 | -13.00 | -39.33 | Detector | | peak |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4132)

Data :#4

Date:2012/11/20

Time: 下午 04:35:34

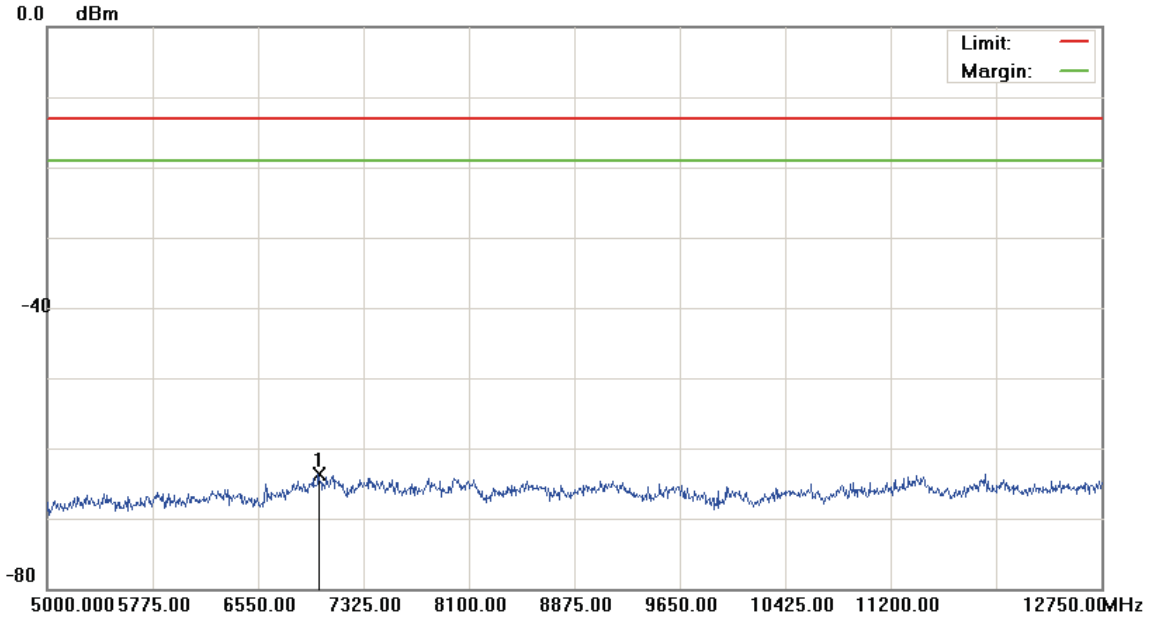

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band V | | |
| Note: CH 4132 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 6995.625 | -68.57 | 4.93 | -63.64 | -13.00 | -50.64 | | | peak |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH4183)

Data :#1

Date:2012/11/20

Time: 下午 04:27:09

10.0 dBm

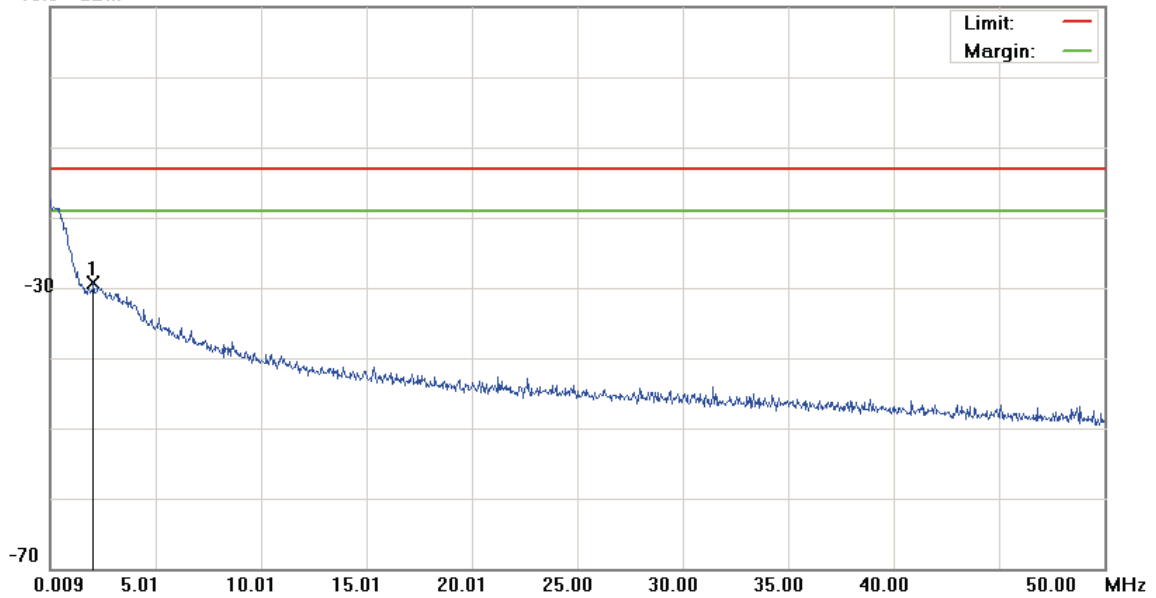

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4183

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 2.0586 | -60.83 | 31.45 | -29.38 | -13.00 | -16.38 | Detector | peak | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4183)

Data :#2

Date:2012/11/20

Time: 下午 04:27:33

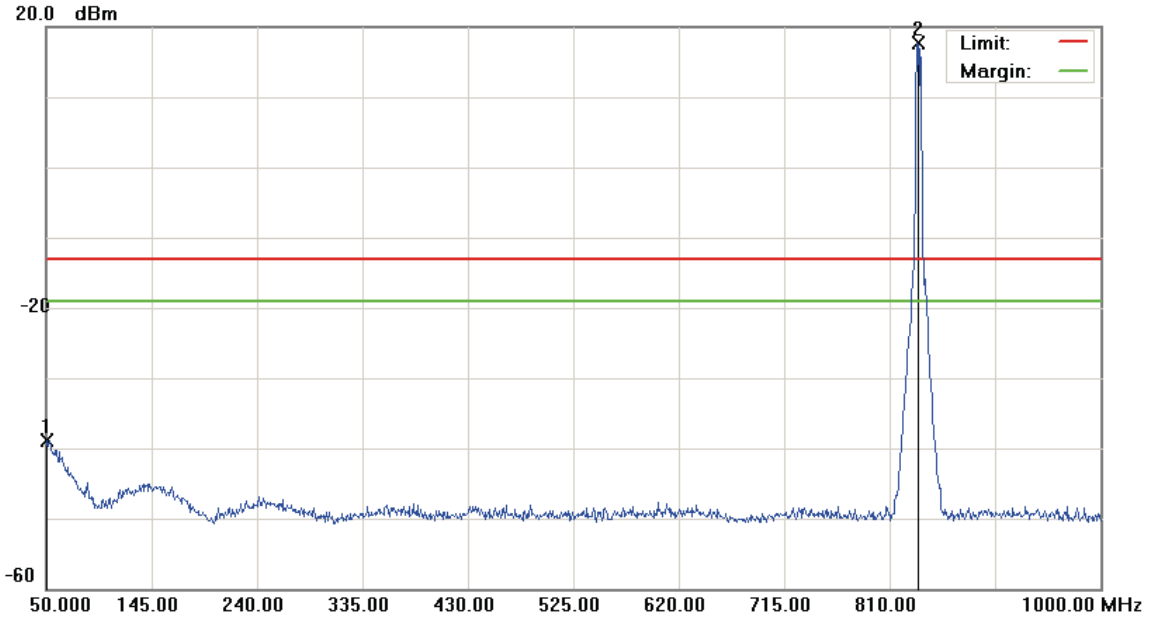

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4183

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | | 50.0000 | -53.57 | 14.69 | -38.88 | -13.00 | -25.88 | peak | | |
| 2 | * | 835.1750 | 13.79 | 3.95 | 17.74 | -13.00 | 30.74 | peak | | Tx |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH4183)

Data :#3

Date:2012/11/20

Time: 下午 04:43:21

20.0 dBm

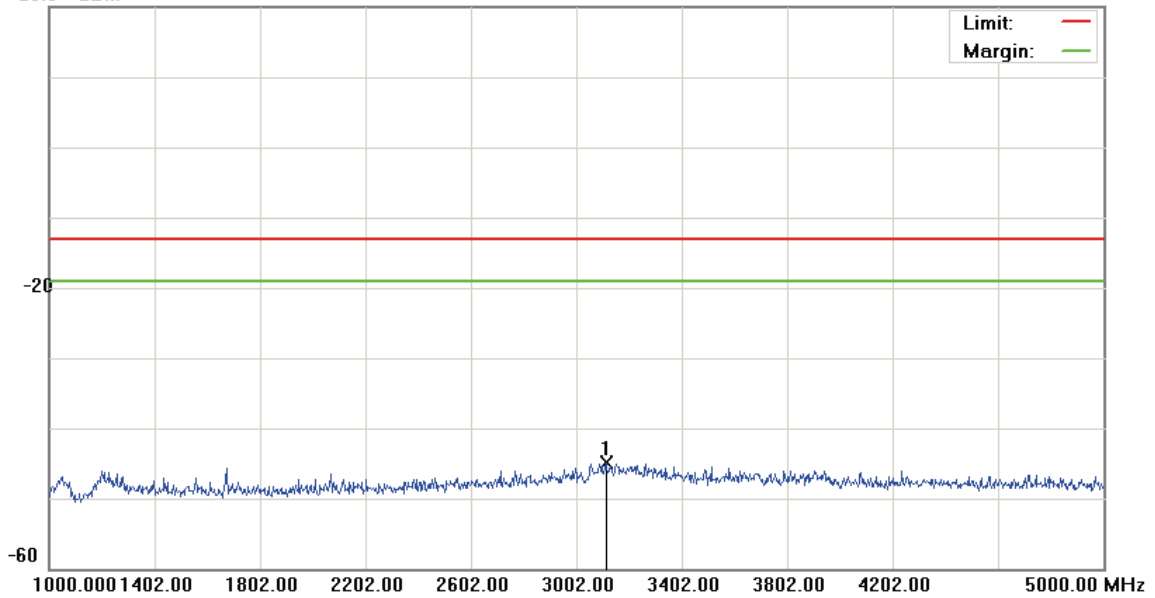

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4183

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 3114.000 | -49.50 | 4.56 | -44.94 | -13.00 | -31.94 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH4183)

Data :#4

Date:2012/11/20

Time: 下午 04:43:44

20.0 dBm

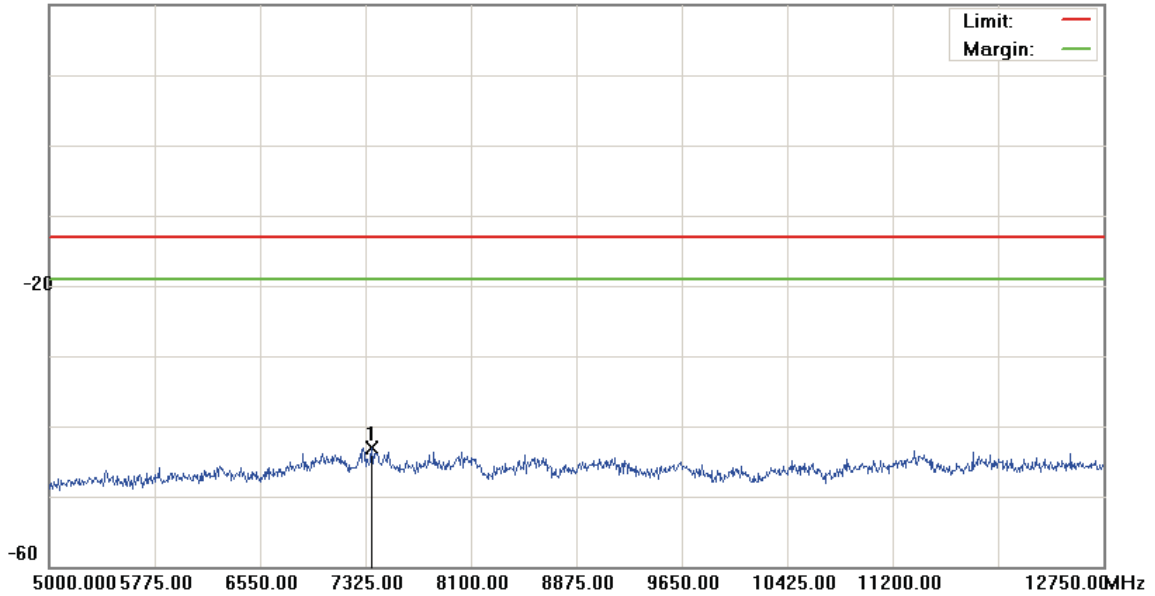

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4183

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 7371.500 | -48.12 | 5.10 | -43.02 | -13.00 | -30.02 | Detector | peak | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4233)

Data :#1

Date:2012/11/20

Time: 下午 04:29:10

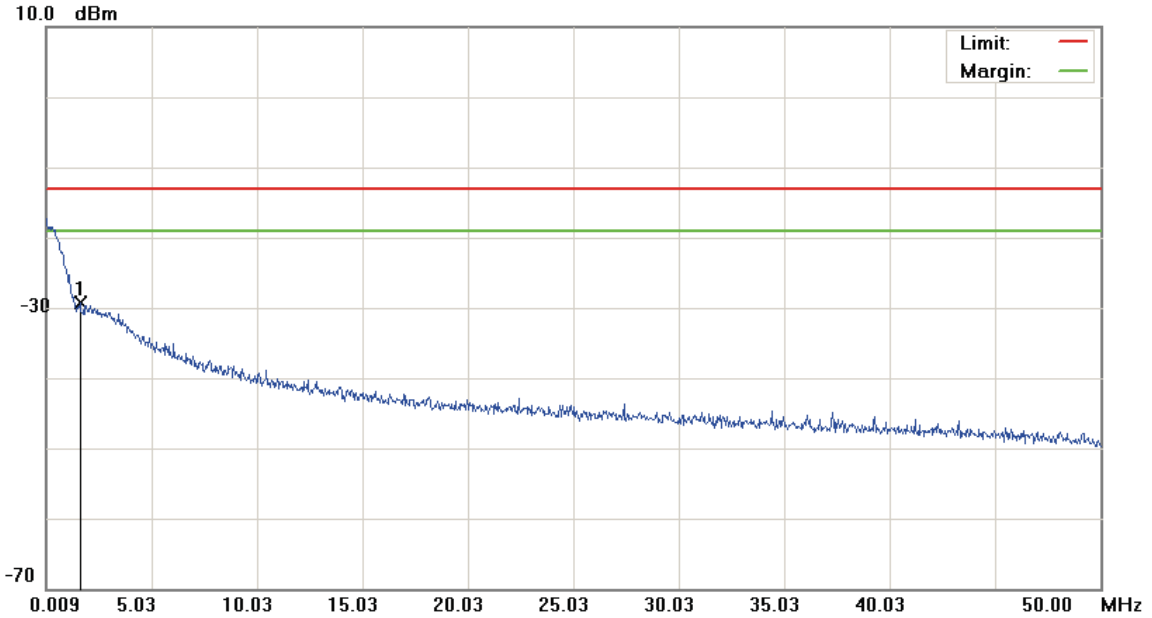

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4233

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 1.6087 | -60.45 | 31.21 | -29.24 | -13.00 | -16.24 | Detector | peak | |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4233)

Data :#2

Date:2012/11/20

Time: 下午 04:29:34

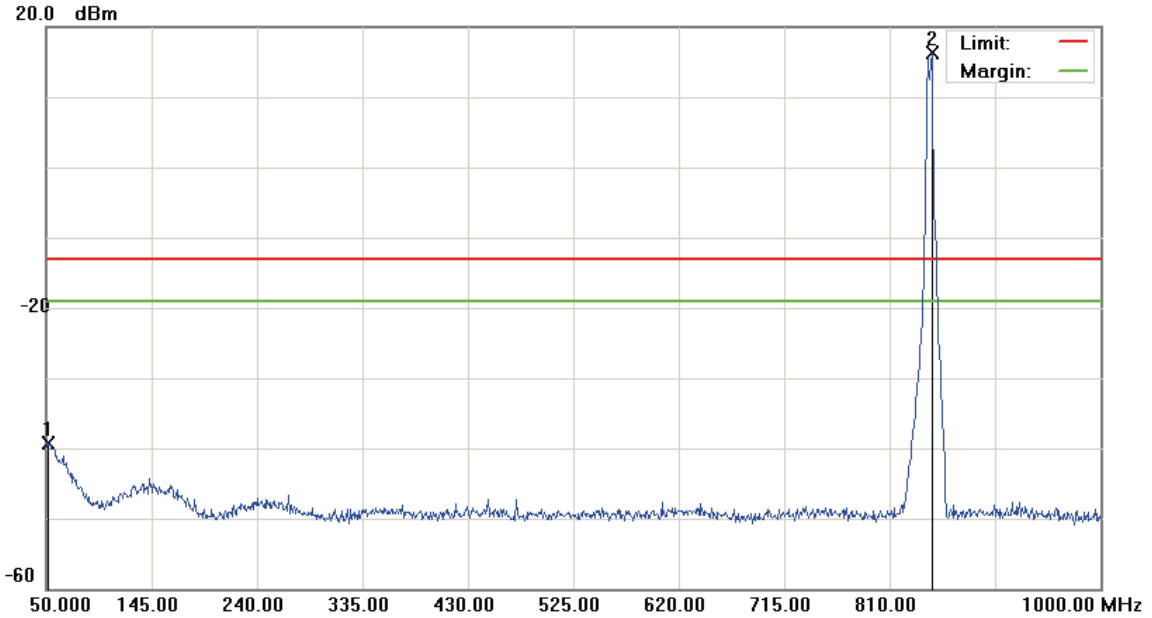

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4233

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | | 51.9000 | -53.57 | 14.36 | -39.21 | -13.00 | -26.21 | peak | | |
| 2 | * | 848.0000 | 12.39 | 3.98 | 16.37 | -13.00 | 29.37 | peak | | Tx |


*:Maximum data x:Over limit !:over margin

File :HE920 NA(CH4233)

Data :#3

Date:2012/11/20

Time: 下午 04:46:47

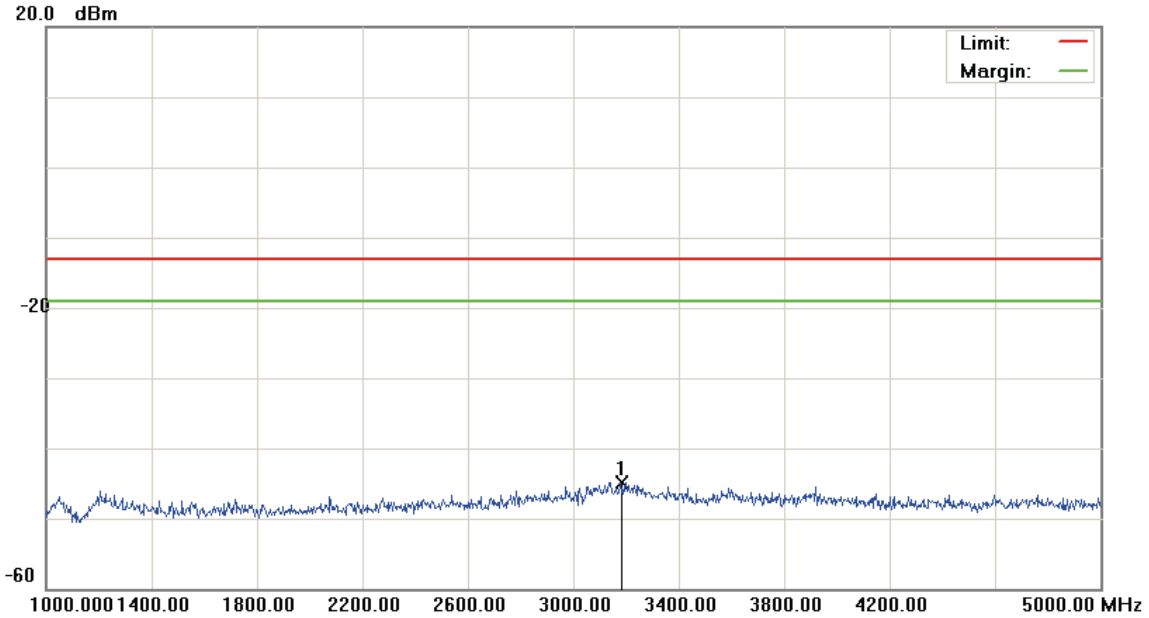

Site: : RF Conducted

 Polarization: *Conducted po*

Temperature: 23 °C

Limit: FCC Part 22 conducted(9k-12.75G)

Power: DC 3.8V

Humidity: 55.2 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 1000 KHz

M/N: HE920-NA

Mode: WCDMA Band V

Note: CH 4233

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 3182.000 | -49.48 | 4.62 | -44.86 | -13.00 | -31.86 | peak | | |

*:Maximum data x:Over limit !:over margin


File :HE920 NA(CH4233)

Data :#4

Date:2012/11/20

Time: 下午 04:47:10

20.0 dBm

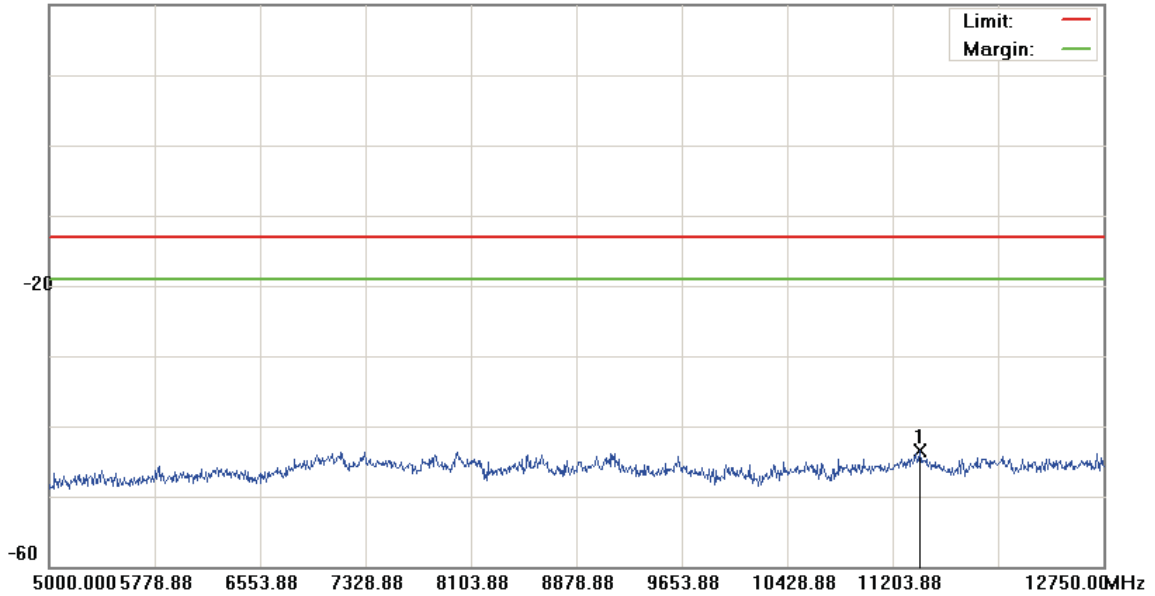

| | | |
|---|-----------------------------------|-----------------------------|
| Site: : RF Conducted | Polarization: <i>Conducted po</i> | Temperature: 23 °C |
| Limit: FCC Part 22 conducted(9k-12.75G) | Power: DC 3.8V | Humidity: 55.2 % |
| EUT: Wireless module | Distance: | RBW: 1000 KHz VBW: 1000 KHz |
| M/N: HE920-NA | | |
| Mode: WCDMA Band V | | |
| Note: CH 4233 | | |

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Over dB | Antenna Height cm | Table Degree degree | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|------------|-------------------------|---------------------------|---------|
| 1 | * | 11401.500 | -49.05 | 5.56 | -43.49 | -13.00 | -30.49 | Detector | | peak |

*:Maximum data x:Over limit !:over margin

7 Field Strength of Spurious Radiation Test

7.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


7.2. Test Instruments

| 3 Meter Chamber | | | | | |
|-----------------------------------|--------------------------------|--------------|---------------|------------|--------|
| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
| RF Pre-selector | Agilent | N9039A | MY46520256 | 01/21/2013 | (1) |
| Spectrum Analyzer | Agilent | E4446A | MY46180578 | 01/21/2013 | (1) |
| Pre Amplifier | Agilent | 8449B | 3008A02237 | 02/22/2012 | (1) |
| Pre Amplifier | Agilent | 8447D | 2944A10961 | 02/22/2012 | (1) |
| Broadband Antenna (30MHz~1GHz) | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | 9163-270 | 06/29/2012 | (1) |
| Horn Antenna (1~18GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA9120D | 9120D-550 | 06/15/2012 | (1) |
| Horn Antenna (18~40GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA9170 | 9170-320 | 06/21/2012 | (1) |
| Test Site | ATL | TE01 | 888001 | 12/20/2011 | (1) |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

7.3. Setup

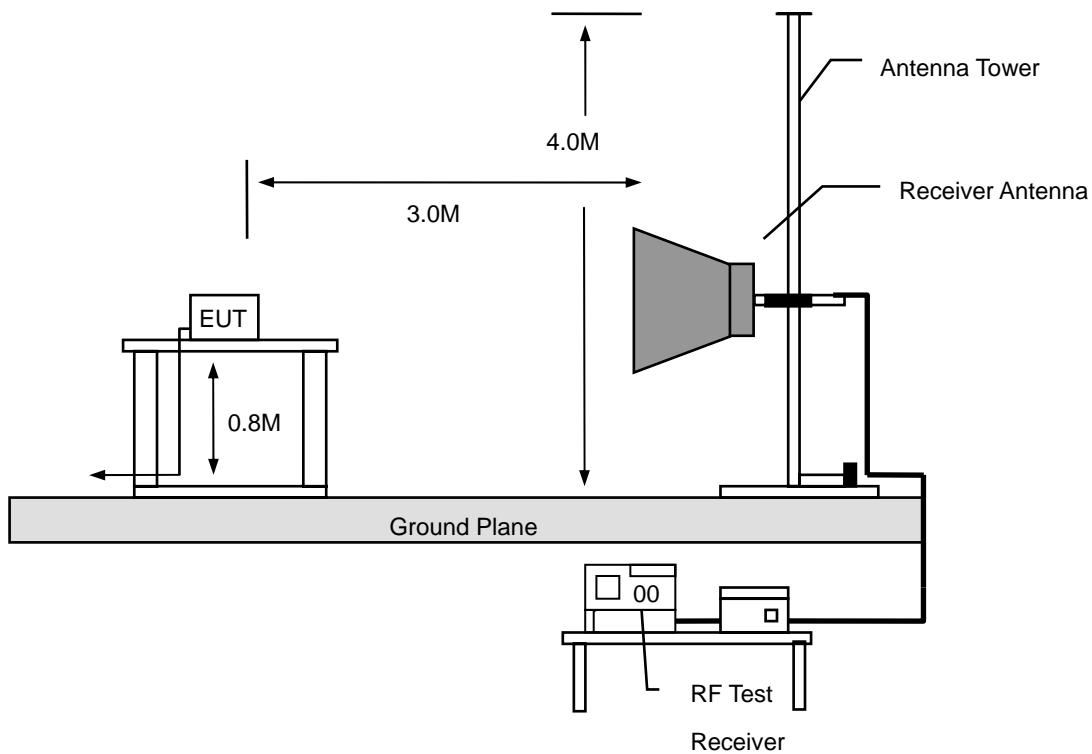

7.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in decibels referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

7.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is ± 3.072 dB.

7.6. Test Result

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 1 | Date: | 01/30/2013 |
| Frequency: | 824.2 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 115.5000 | -68.48 | -5.18 | -73.66 | -13.00 | -60.66 | peak | H |
| 234.0000 | -66.35 | -1.38 | -67.73 | -13.00 | -54.73 | peak | H |
| 430.0000 | -72.11 | 3.67 | -68.44 | -13.00 | -55.44 | peak | H |
| 590.5000 | -77.30 | 7.77 | -69.53 | -13.00 | -56.53 | peak | H |
| 709.0000 | -61.96 | 7.20 | -54.76 | -13.00 | -41.76 | peak | H |
| 950.0000 | -80.03 | 14.86 | -65.17 | -13.00 | -52.17 | peak | H |
| 2404.000 | -68.87 | 15.96 | -52.91 | -13.00 | -39.91 | peak | H |
| 5164.000 | -72.74 | 24.52 | -48.22 | -13.00 | -35.22 | peak | H |
| 7504.000 | -71.37 | 33.78 | -37.59 | -13.00 | -24.59 | peak | H |
| 103.0000 | -73.31 | -1.84 | -75.15 | -13.00 | -62.15 | peak | V |
| 260.0000 | -65.24 | -1.56 | -66.80 | -13.00 | -53.80 | peak | V |
| 390.0000 | -69.18 | 1.49 | -67.69 | -13.00 | -54.69 | peak | V |
| 520.0000 | -78.11 | 3.11 | -75.00 | -13.00 | -62.00 | peak | V |
| 651.5000 | -74.89 | 9.07 | -65.82 | -13.00 | -52.82 | peak | V |
| 807.5000 | -78.43 | 11.64 | -66.79 | -13.00 | -53.79 | peak | V |
| 2788.000 | -67.57 | 18.70 | -48.87 | -13.00 | -35.87 | peak | V |
| 5236.000 | -71.74 | 27.46 | -44.28 | -13.00 | -31.28 | peak | V |
| 7312.000 | -71.47 | 30.89 | -40.58 | -13.00 | -27.58 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 1 | Date: | 01/30/2013 |
| Frequency: | 836.6 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 115.5000 | -72.59 | -5.18 | -77.77 | -13.00 | -64.77 | peak | H |
| 269.0000 | -68.56 | -4.34 | -72.90 | -13.00 | -59.90 | peak | H |
| 430.0000 | -70.96 | 3.67 | -67.29 | -13.00 | -54.29 | peak | H |
| 568.0000 | -76.93 | 7.73 | -69.20 | -13.00 | -56.20 | peak | H |
| 675.5000 | -76.68 | 7.04 | -69.64 | -13.00 | -56.64 | peak | H |
| 952.0000 | -71.76 | 14.85 | -56.91 | -13.00 | -43.91 | peak | H |
| 2428.000 | -68.89 | 16.08 | -52.81 | -13.00 | -39.81 | peak | H |
| 5260.000 | -72.59 | 24.95 | -47.64 | -13.00 | -34.64 | peak | H |
| 7648.000 | -71.08 | 33.75 | -37.33 | -13.00 | -24.33 | peak | H |
| 129.0000 | -73.78 | 13.37 | -60.41 | -13.00 | -47.41 | peak | V |
| 234.0000 | -68.04 | 1.48 | -66.56 | -13.00 | -53.56 | peak | V |
| 390.0000 | -67.97 | 1.49 | -66.48 | -13.00 | -53.48 | peak | V |
| 520.0000 | -76.52 | 3.11 | -73.41 | -13.00 | -60.41 | peak | V |
| 683.0000 | -73.73 | 9.65 | -64.08 | -13.00 | -51.08 | peak | V |
| 952.0000 | -75.81 | 12.53 | -63.28 | -13.00 | -50.28 | peak | V |
| 2836.000 | -69.23 | 19.05 | -50.18 | -13.00 | -37.18 | peak | V |
| 5248.000 | -72.74 | 27.47 | -45.27 | -13.00 | -32.27 | peak | V |
| 7300.000 | -73.16 | 30.88 | -42.28 | -13.00 | -29.28 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 1 | Date: | 01/30/2013 |
| Frequency: | 848.8 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 126.0000 | -66.56 | -5.04 | -71.60 | -13.00 | -58.60 | peak | H |
| 260.0000 | -60.71 | -4.34 | -65.05 | -13.00 | -52.05 | peak | H |
| 410.0000 | -74.48 | 3.00 | -71.48 | -13.00 | -58.48 | peak | H |
| 533.5000 | -78.52 | 8.05 | -70.47 | -13.00 | -57.47 | peak | H |
| 676.0000 | -76.56 | 7.05 | -69.51 | -13.00 | -56.51 | peak | H |
| 824.0000 | -77.09 | 11.95 | -65.14 | -13.00 | -52.14 | peak | H |
| 2332.000 | -68.64 | 15.55 | -53.09 | -13.00 | -40.09 | peak | H |
| 5116.000 | -72.24 | 24.28 | -47.96 | -13.00 | -34.96 | peak | H |
| 7564.000 | -73.29 | 33.77 | -39.52 | -13.00 | -26.52 | peak | H |
| 130.0000 | -73.33 | 14.37 | -58.96 | -13.00 | -45.96 | peak | V |
| 260.0000 | -64.82 | -1.56 | -66.38 | -13.00 | -53.38 | peak | V |
| 400.0000 | -76.63 | 1.33 | -75.30 | -13.00 | -62.30 | peak | V |
| 552.5000 | -79.85 | 4.32 | -75.53 | -13.00 | -62.53 | peak | V |
| 676.0000 | -70.48 | 9.53 | -60.95 | -13.00 | -47.95 | peak | V |
| 947.0000 | -80.06 | 12.61 | -67.45 | -13.00 | -54.45 | peak | V |
| 2548.000 | -69.41 | 16.97 | -52.44 | -13.00 | -39.44 | peak | V |
| 5200.000 | -71.93 | 27.40 | -44.53 | -13.00 | -31.53 | peak | V |
| 7648.000 | -71.90 | 30.89 | -41.01 | -13.00 | -28.01 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 2 | Date: | 01/30/2013 |
| Frequency: | 1850.2 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 84.0000 | -68.24 | -2.07 | -70.31 | -13.00 | -57.31 | peak | H |
| 234.0000 | -67.29 | -1.38 | -68.67 | -13.00 | -55.67 | peak | H |
| 430.0000 | -72.17 | 3.67 | -68.50 | -13.00 | -55.50 | peak | H |
| 598.0000 | -78.27 | 7.90 | -70.37 | -13.00 | -57.37 | peak | H |
| 728.0000 | -75.32 | 7.78 | -67.54 | -13.00 | -54.54 | peak | H |
| 920.0000 | -80.12 | 14.74 | -65.38 | -13.00 | -52.38 | peak | H |
| 2800.000 | -68.74 | 17.24 | -51.50 | -13.00 | -38.50 | peak | H |
| 5380.000 | -73.16 | 25.50 | -47.66 | -13.00 | -34.66 | peak | H |
| 7504.000 | -73.29 | 33.78 | -39.51 | -13.00 | -26.51 | peak | H |
| 126.0000 | -71.18 | 10.40 | -60.78 | -13.00 | -47.78 | peak | V |
| 234.0000 | -68.37 | 1.48 | -66.89 | -13.00 | -53.89 | peak | V |
| 370.0000 | -74.49 | 2.03 | -72.46 | -13.00 | -59.46 | peak | V |
| 520.0000 | -76.72 | 3.11 | -73.61 | -13.00 | -60.61 | peak | V |
| 680.0000 | -76.84 | 9.56 | -67.28 | -13.00 | -54.28 | peak | V |
| 840.0000 | -79.10 | 11.35 | -67.75 | -13.00 | -54.75 | peak | V |
| 3040.000 | -69.51 | 20.46 | -49.05 | -13.00 | -36.05 | peak | V |
| 5200.000 | -73.05 | 27.40 | -45.65 | -13.00 | -32.65 | peak | V |
| 7648.000 | -70.69 | 30.89 | -39.80 | -13.00 | -26.80 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 2 | Date: | 01/30/2013 |
| Frequency: | 1880.0 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 126.0000 | -66.75 | -5.04 | -71.79 | -13.00 | -58.79 | peak | H |
| 234.0000 | -67.52 | -1.38 | -68.90 | -13.00 | -55.90 | peak | H |
| 458.0000 | -74.20 | 4.55 | -69.65 | -13.00 | -56.65 | peak | H |
| 598.0000 | -78.44 | 7.90 | -70.54 | -13.00 | -57.54 | peak | H |
| 720.0000 | -77.41 | 7.49 | -69.92 | -13.00 | -56.92 | peak | H |
| 875.0000 | -80.26 | 13.16 | -67.10 | -13.00 | -54.10 | peak | H |
| 2836.000 | -69.53 | 17.33 | -52.20 | -13.00 | -39.20 | peak | H |
| 5284.000 | -72.45 | 25.07 | -47.38 | -13.00 | -34.38 | peak | H |
| 7600.000 | -72.22 | 33.76 | -38.46 | -13.00 | -25.46 | peak | H |
| 126.0000 | -73.53 | 10.40 | -63.13 | -13.00 | -50.13 | peak | V |
| 234.0000 | -68.37 | 1.48 | -66.89 | -13.00 | -53.89 | peak | V |
| 400.0000 | -76.85 | 1.33 | -75.52 | -13.00 | -62.52 | peak | V |
| 546.0000 | -79.28 | 4.29 | -74.99 | -13.00 | -61.99 | peak | V |
| 744.5000 | -78.62 | 10.60 | -68.02 | -13.00 | -55.02 | peak | V |
| 895.0000 | -80.47 | 10.67 | -69.80 | -13.00 | -56.80 | peak | V |
| 3220.000 | -69.36 | 21.50 | -47.86 | -13.00 | -34.86 | peak | V |
| 5344.000 | -71.77 | 27.62 | -44.15 | -13.00 | -31.15 | peak | V |
| 7264.000 | -72.98 | 30.83 | -42.15 | -13.00 | -29.15 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 2 | Date: | 01/30/2013 |
| Frequency: | 1909.8 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 84.0000 | -69.95 | -2.07 | -72.02 | -13.00 | -59.02 | peak | H |
| 234.0000 | -66.48 | -1.38 | -67.86 | -13.00 | -54.86 | peak | H |
| 410.0000 | -72.74 | 3.00 | -69.74 | -13.00 | -56.74 | peak | H |
| 598.0000 | -78.97 | 7.90 | -71.07 | -13.00 | -58.07 | peak | H |
| 741.0000 | -77.55 | 8.24 | -69.31 | -13.00 | -56.31 | peak | H |
| 920.0000 | -80.76 | 14.74 | -66.02 | -13.00 | -53.02 | peak | H |
| 3124.000 | -68.66 | 18.08 | -50.58 | -13.00 | -37.58 | peak | H |
| 5308.000 | -72.83 | 25.17 | -47.66 | -13.00 | -34.66 | peak | H |
| 7780.000 | -72.76 | 33.72 | -39.04 | -13.00 | -26.04 | peak | H |
| 126.0000 | -71.43 | 10.40 | -61.03 | -13.00 | -48.03 | peak | V |
| 234.0000 | -68.11 | 1.48 | -66.63 | -13.00 | -53.63 | peak | V |
| 370.0000 | -75.91 | 2.03 | -73.88 | -13.00 | -60.88 | peak | V |
| 538.0000 | -78.07 | 4.14 | -73.93 | -13.00 | -60.93 | peak | V |
| 744.5000 | -79.38 | 10.60 | -68.78 | -13.00 | -55.78 | peak | V |
| 882.0000 | -80.81 | 10.86 | -69.95 | -13.00 | -56.95 | peak | V |
| 3100.000 | -68.86 | 20.81 | -48.05 | -13.00 | -35.05 | peak | V |
| 5140.000 | -72.82 | 27.32 | -45.50 | -13.00 | -32.50 | peak | V |
| 7348.000 | -72.61 | 30.93 | -41.68 | -13.00 | -28.68 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 5 | Date: | 01/30/2013 |
| Frequency: | 1852.4 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 99.5000 | -74.78 | -1.70 | -76.48 | -13.00 | -63.48 | peak | H |
| 234.0000 | -66.81 | -1.38 | -68.19 | -13.00 | -55.19 | peak | H |
| 390.0000 | -71.45 | 1.66 | -69.79 | -13.00 | -56.79 | peak | H |
| 520.0000 | -74.32 | 7.65 | -66.67 | -13.00 | -53.67 | peak | H |
| 680.0000 | -76.96 | 7.02 | -69.94 | -13.00 | -56.94 | peak | H |
| 850.0000 | -77.20 | 12.56 | -64.64 | -13.00 | -51.64 | peak | H |
| 3148.000 | -67.80 | 18.14 | -49.66 | -13.00 | -36.66 | peak | H |
| 5344.000 | -72.53 | 25.34 | -47.19 | -13.00 | -34.19 | peak | H |
| 7276.000 | -71.56 | 33.28 | -38.28 | -13.00 | -25.28 | peak | H |
| 126.0000 | -70.60 | 10.40 | -60.20 | -13.00 | -47.20 | peak | V |
| 234.0000 | -65.96 | 1.48 | -64.48 | -13.00 | -51.48 | peak | V |
| 370.0000 | -74.58 | 2.03 | -72.55 | -13.00 | -59.55 | peak | V |
| 530.0000 | -78.81 | 3.68 | -75.13 | -13.00 | -62.13 | peak | V |
| 728.0000 | -76.72 | 10.72 | -66.00 | -13.00 | -53.00 | peak | V |
| 850.0000 | -79.42 | 11.49 | -67.93 | -13.00 | -54.93 | peak | V |
| 3148.000 | -68.48 | 21.08 | -47.40 | -13.00 | -34.40 | peak | V |
| 5380.000 | -72.00 | 27.67 | -44.33 | -13.00 | -31.33 | peak | V |
| 7588.000 | -72.93 | 30.96 | -41.97 | -13.00 | -28.97 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 5 | Date: | 01/30/2013 |
| Frequency: | 1880.0 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 99.5000 | -74.18 | -1.70 | -75.88 | -13.00 | -62.88 | peak | H |
| 234.0000 | -67.06 | -1.38 | -68.44 | -13.00 | -55.44 | peak | H |
| 410.0000 | -72.59 | 3.00 | -69.59 | -13.00 | -56.59 | peak | H |
| 556.5000 | -79.13 | 7.90 | -71.23 | -13.00 | -58.23 | peak | H |
| 728.0000 | -76.04 | 7.78 | -68.26 | -13.00 | -55.26 | peak | H |
| 920.0000 | -79.61 | 14.74 | -64.87 | -13.00 | -51.87 | peak | H |
| 3172.000 | -68.55 | 18.20 | -50.35 | -13.00 | -37.35 | peak | H |
| 6496.000 | -72.20 | 30.45 | -41.75 | -13.00 | -28.75 | peak | H |
| 7792.000 | -72.83 | 33.72 | -39.11 | -13.00 | -26.11 | peak | H |
| 132.5000 | -73.86 | 13.02 | -60.84 | -13.00 | -47.84 | peak | V |
| 234.0000 | -66.87 | 1.48 | -65.39 | -13.00 | -52.39 | peak | V |
| 400.0000 | -76.13 | 1.33 | -74.80 | -13.00 | -61.80 | peak | V |
| 567.0000 | -79.27 | 4.91 | -74.36 | -13.00 | -61.36 | peak | V |
| 773.0000 | -78.79 | 11.17 | -67.62 | -13.00 | -54.62 | peak | V |
| 920.0000 | -80.68 | 11.87 | -68.81 | -13.00 | -55.81 | peak | V |
| 3100.000 | -68.64 | 20.81 | -47.83 | -13.00 | -34.83 | peak | V |
| 5356.000 | -71.87 | 27.63 | -44.24 | -13.00 | -31.24 | peak | V |
| 7588.000 | -72.69 | 30.96 | -41.73 | -13.00 | -28.73 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 5 | Date: | 01/30/2013 |
| Frequency: | 1907.6 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 88.5000 | -72.77 | -0.50 | -73.27 | -13.00 | -60.27 | peak | H |
| 234.0000 | -67.30 | -1.38 | -68.68 | -13.00 | -55.68 | peak | H |
| 430.0000 | -70.53 | 3.67 | -66.86 | -13.00 | -53.86 | peak | H |
| 580.0000 | -78.21 | 7.60 | -70.61 | -13.00 | -57.61 | peak | H |
| 728.0000 | -74.85 | 7.78 | -67.07 | -13.00 | -54.07 | peak | H |
| 936.0000 | -79.71 | 14.84 | -64.87 | -13.00 | -51.87 | peak | H |
| 3136.000 | -68.60 | 18.10 | -50.50 | -13.00 | -37.50 | peak | H |
| 5212.000 | -72.44 | 24.73 | -47.71 | -13.00 | -34.71 | peak | H |
| 7312.000 | -72.67 | 33.36 | -39.31 | -13.00 | -26.31 | peak | H |
| 126.0000 | -72.92 | 10.40 | -62.52 | -13.00 | -49.52 | peak | V |
| 234.0000 | -67.64 | 1.48 | -66.16 | -13.00 | -53.16 | peak | V |
| 360.0000 | -75.34 | 2.43 | -72.91 | -13.00 | -59.91 | peak | V |
| 556.0000 | -79.33 | 4.35 | -74.98 | -13.00 | -61.98 | peak | V |
| 728.0000 | -77.52 | 10.72 | -66.80 | -13.00 | -53.80 | peak | V |
| 867.0000 | -80.83 | 11.36 | -69.47 | -13.00 | -56.47 | peak | V |
| 3052.000 | -67.49 | 20.53 | -46.96 | -13.00 | -33.96 | peak | V |
| 5404.000 | -71.80 | 27.72 | -44.08 | -13.00 | -31.08 | peak | V |
| 7900.000 | -73.19 | 30.54 | -42.65 | -13.00 | -29.65 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 6 | Date: | 01/30/2013 |
| Frequency: | 826.4 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 126.0000 | -65.11 | -5.04 | -70.15 | -13.00 | -57.15 | peak | H |
| 266.0000 | -64.86 | -4.34 | -69.20 | -13.00 | -56.20 | peak | H |
| 410.0000 | -73.91 | 3.00 | -70.91 | -13.00 | -57.91 | peak | H |
| 607.5000 | -77.84 | 7.84 | -70.00 | -13.00 | -57.00 | peak | H |
| 783.5000 | -73.49 | 10.37 | -63.12 | -13.00 | -50.12 | peak | H |
| 943.0000 | -80.88 | 14.85 | -66.03 | -13.00 | -53.03 | peak | H |
| 2836.000 | -69.48 | 17.33 | -52.15 | -13.00 | -39.15 | peak | H |
| 5392.000 | -72.23 | 25.55 | -46.68 | -13.00 | -33.68 | peak | H |
| 7540.000 | -73.18 | 33.77 | -39.41 | -13.00 | -26.41 | peak | H |
| 71.5000 | -66.89 | -8.64 | -75.53 | -13.00 | -62.53 | peak | V |
| 246.0000 | -66.20 | -0.40 | -66.60 | -13.00 | -53.60 | peak | V |
| 430.0000 | -74.44 | 1.39 | -73.05 | -13.00 | -60.05 | peak | V |
| 559.0000 | -79.80 | 4.37 | -75.43 | -13.00 | -62.43 | peak | V |
| 668.5000 | -74.77 | 9.46 | -65.31 | -13.00 | -52.31 | peak | V |
| 963.5000 | -86.09 | 12.40 | -73.69 | -13.00 | -60.69 | peak | V |
| 3040.000 | -70.13 | 20.46 | -49.67 | -13.00 | -36.67 | peak | V |
| 5212.000 | -72.81 | 27.43 | -45.38 | -13.00 | -32.38 | peak | V |
| 7636.000 | -71.68 | 30.90 | -40.78 | -13.00 | -27.78 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 6 | Date: | 01/30/2013 |
| Frequency: | 836.6 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 99.5000 | -74.10 | -1.70 | -75.80 | -13.00 | -62.80 | peak | H |
| 266.0000 | -65.25 | -4.34 | -69.59 | -13.00 | -56.59 | peak | H |
| 390.0000 | -72.39 | 1.66 | -70.73 | -13.00 | -57.73 | peak | H |
| 491.5000 | -73.61 | 6.45 | -67.16 | -13.00 | -54.16 | peak | H |
| 630.0000 | -78.90 | 7.26 | -71.64 | -13.00 | -58.64 | peak | H |
| 737.5000 | -77.89 | 8.10 | -69.79 | -13.00 | -56.79 | peak | H |
| 2956.000 | -69.81 | 17.62 | -52.19 | -13.00 | -39.19 | peak | H |
| 5476.000 | -72.05 | 25.94 | -46.11 | -13.00 | -33.11 | peak | H |
| 7516.000 | -72.36 | 33.79 | -38.57 | -13.00 | -25.57 | peak | H |
| 71.5000 | -66.91 | -8.64 | -75.55 | -13.00 | -62.55 | peak | V |
| 245.5000 | -66.47 | -0.33 | -66.80 | -13.00 | -53.80 | peak | V |
| 368.5000 | -75.68 | 2.08 | -73.60 | -13.00 | -60.60 | peak | V |
| 491.5000 | -74.36 | 2.59 | -71.77 | -13.00 | -58.77 | peak | V |
| 698.5000 | -78.58 | 10.14 | -68.44 | -13.00 | -55.44 | peak | V |
| 926.0000 | -87.62 | 12.13 | -75.49 | -13.00 | -62.49 | peak | V |
| 3088.000 | -69.59 | 20.74 | -48.85 | -13.00 | -35.85 | peak | V |
| 5380.000 | -72.55 | 27.67 | -44.88 | -13.00 | -31.88 | peak | V |
| 7504.000 | -72.40 | 31.08 | -41.32 | -13.00 | -28.32 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | FCC Part 22 | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 6 | Date: | 01/30/2013 |
| Frequency: | 846.6 MHz | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBm) | Correct Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|---------------|---------------------|--------------|-------------|-------------|--------|------------------|
| 126.0000 | -65.74 | -5.04 | -70.78 | -13.00 | -57.78 | peak | H |
| 266.5000 | -65.29 | -4.35 | -69.64 | -13.00 | -56.64 | peak | H |
| 390.0000 | -72.85 | 1.66 | -71.19 | -13.00 | -58.19 | peak | H |
| 491.5000 | -71.67 | 6.45 | -65.22 | -13.00 | -52.22 | peak | H |
| 631.5000 | -78.27 | 7.20 | -71.07 | -13.00 | -58.07 | peak | H |
| 781.5000 | -79.87 | 10.26 | -69.61 | -13.00 | -56.61 | peak | H |
| 2716.000 | -68.39 | 17.03 | -51.36 | -13.00 | -38.36 | peak | H |
| 5332.000 | -73.09 | 25.28 | -47.81 | -13.00 | -34.81 | peak | H |
| 7252.000 | -72.44 | 33.22 | -39.22 | -13.00 | -26.22 | peak | H |
| 92.5000 | -72.70 | -4.73 | -77.43 | -13.00 | -64.43 | peak | V |
| 266.0000 | -67.55 | -0.82 | -68.37 | -13.00 | -55.37 | peak | V |
| 390.0000 | -70.67 | 1.49 | -69.18 | -13.00 | -56.18 | peak | V |
| 532.5000 | -78.97 | 3.83 | -75.14 | -13.00 | -62.14 | peak | V |
| 660.5000 | -79.19 | 9.40 | -69.79 | -13.00 | -56.79 | peak | V |
| 937.0000 | -80.11 | 12.61 | -67.50 | -13.00 | -54.50 | peak | V |
| 3052.000 | -69.13 | 20.53 | -48.60 | -13.00 | -35.60 | peak | V |
| 5260.000 | -71.89 | 27.49 | -44.40 | -13.00 | -31.40 | peak | V |
| 7648.000 | -71.85 | 30.89 | -40.96 | -13.00 | -27.96 | peak | V |

| | | | |
|---------------|-------------------|----------------------|----------------|
| Standard: | RSS-Gen | Test Distance: | 3m |
| Test item: | Radiated Emission | Power: | DC 3.8V |
| Model Number: | HE920-NA | Temp.(°C)/Hum.(%RH): | 23(°C)/55.2%RH |
| Mode: | 7 | Date: | 11/30/2012 |
| | | Test By: | Fly Lu |

| Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Polar. H / V |
|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|------------------|
| 2810.500 | 35.39 | 5.43 | 40.82 | 74.00 | -33.18 | peak | H |
| 5003.500 | 35.43 | 12.17 | 47.60 | 74.00 | -26.40 | peak | H |
| 6533.500 | 33.90 | 17.58 | 51.48 | 74.00 | -22.52 | peak | H |
| 2683.000 | 34.97 | 5.10 | 40.07 | 74.00 | -33.93 | peak | V |
| 4901.500 | 33.32 | 11.90 | 45.22 | 74.00 | -28.78 | peak | V |
| 6457.000 | 33.47 | 17.27 | 50.74 | 74.00 | -23.26 | peak | V |

8 Frequency Stability (Temperature & Voltage Variation) Test

8.1. Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.


8.2. Test Instruments

| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|--------------------------------------|--------------|--------------|---------------|------------|--------|
| Universal Radio Communication Tester | R & S | CMU200 | 109369 | 08/07/2012 | (2) |
| Temperature & Humidity Chamber | TAICHY | MHU-225LA | 980729 | 08/07/2012 | (1) |
| Test Site | ATL | TE05 | TE05 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

8.3. Setup

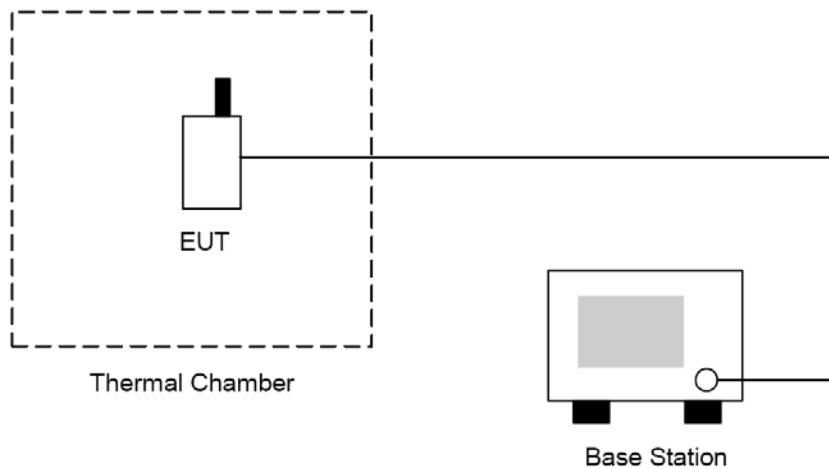

8.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was note within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
5. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
6. The temperature tests were performed for the worst case.
7. Test data was recorded.

8.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Temperature Variation) measurement is $\pm 10\text{Hz}$.

8.6. Test Result

| Model Number | HE920-NA | | | | | |
|-----------------------|---|------------------|----------------|-----------------|-------------|--------|
| Test Item | Frequency Stability (Temperature & Voltage Variation) | | | | | |
| Test Mode | Mode 1 | | | | | |
| Date of Test | 01/31/2013 | | | | Test Site | TE05 |
| Level | Voltage [Vdc] | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Result |
| Normal | 3.80 | -20 | -16 | -0.019 | ±2.5 | Pass |
| Normal | 3.80 | -10 | -14 | -0.017 | ±2.5 | Pass |
| Normal | 3.80 | 0 | -13 | -0.016 | ±2.5 | Pass |
| Normal | 3.80 | 10 | -17 | -0.020 | ±2.5 | Pass |
| Battery full point | 4.20 | 20 | -4 | -0.005 | ±2.5 | Pass |
| Normal | 3.80 | 20 | 10 | 0.012 | ±2.5 | Pass |
| Battery cut-off point | 3.40 | 20 | 17 | 0.020 | ±2.5 | Pass |
| Normal | 3.80 | 30 | -21 | -0.025 | ±2.5 | Pass |
| Normal | 3.80 | 40 | -18 | -0.022 | ±2.5 | Pass |
| Normal | 3.80 | 50 | -11 | -0.013 | ±2.5 | Pass |
| Normal | 3.80 | 55 | -13 | -0.016 | ±2.5 | Pass |

| Model Number | HE920-NA | | | | | |
|-----------------------|---|------------------|----------------|-----------------|-------------|--------|
| Test Item | Frequency Stability (Temperature & Voltage Variation) | | | | | |
| Test Mode | Mode 2 | | | | | |
| Date of Test | 01/31/2013 | | | | Test Site | TE05 |
| Level | Voltage [Vdc] | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Result |
| Normal | 3.80 | -20 | 37 | 0.020 | ±2.5 | Pass |
| Normal | 3.80 | -10 | 15 | 0.008 | ±2.5 | Pass |
| Normal | 3.80 | 0 | 22 | 0.012 | ±2.5 | Pass |
| Normal | 3.80 | 10 | 19 | 0.010 | ±2.5 | Pass |
| Battery full point | 4.20 | 20 | 40 | 0.021 | ±2.5 | Pass |
| Normal | 3.80 | 20 | 23 | 0.012 | ±2.5 | Pass |
| Battery cut-off point | 3.40 | 20 | 13 | 0.007 | ±2.5 | Pass |
| Normal | 3.80 | 30 | 24 | 0.013 | ±2.5 | Pass |
| Normal | 3.80 | 40 | 17 | 0.009 | ±2.5 | Pass |
| Normal | 3.80 | 50 | 27 | 0.014 | ±2.5 | Pass |
| Normal | 3.80 | 55 | 22 | 0.012 | ±2.5 | Pass |

Note: This device operating temperature range is -20°C ~ +55°C.

| Model Number | HE920-NA | | | | | |
|-----------------------|---|------------------|----------------|-----------------|-------------|--------|
| Test Item | Frequency Stability (Temperature & Voltage Variation) | | | | | |
| Test Mode | Mode 5 | | | | | |
| Date of Test | 01/31/2013 | | | | Test Site | TE05 |
| Level | Voltage [Vdc] | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Result |
| Normal | 3.80 | -20 | -23 | -0.027 | ±2.5 | Pass |
| Normal | 3.80 | -10 | -18 | -0.022 | ±2.5 | Pass |
| Normal | 3.80 | 0 | -12 | -0.014 | ±2.5 | Pass |
| Normal | 3.80 | 10 | -16 | -0.019 | ±2.5 | Pass |
| Battery full point | 4.20 | 20 | -13 | -0.007 | ±2.5 | Pass |
| Normal | 3.80 | 20 | -26 | -0.014 | ±2.5 | Pass |
| Battery cut-off point | 3.40 | 20 | 29 | 0.015 | ±2.5 | Pass |
| Normal | 3.80 | 30 | -8 | -0.010 | ±2.5 | Pass |
| Normal | 3.80 | 40 | -13 | -0.016 | ±2.5 | Pass |
| Normal | 3.80 | 50 | 5 | 0.006 | ±2.5 | Pass |
| Normal | 3.80 | 55 | -16 | -0.019 | ±2.5 | Pass |

| Model Number | HE920-NA | | | | | |
|-----------------------|---|------------------|----------------|-----------------|-------------|--------|
| Test Item | Frequency Stability (Temperature & Voltage Variation) | | | | | |
| Test Mode | Mode 6 | | | | | |
| Date of Test | 01/31/2013 | | | | Test Site | TE05 |
| Level | Voltage [Vdc] | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Result |
| Normal | 3.80 | -20 | 36 | 0.019 | ±2.5 | Pass |
| Normal | 3.80 | -10 | 20 | 0.011 | ±2.5 | Pass |
| Normal | 3.80 | 0 | -23 | -0.012 | ±2.5 | Pass |
| Normal | 3.80 | 10 | -11 | -0.006 | ±2.5 | Pass |
| Battery full point | 4.20 | 20 | 13 | 0.016 | ±2.5 | Pass |
| Normal | 3.80 | 20 | -21 | -0.025 | ±2.5 | Pass |
| Battery cut-off point | 3.40 | 20 | -11 | -0.013 | ±2.5 | Pass |
| Normal | 3.80 | 30 | 11 | 0.006 | ±2.5 | Pass |
| Normal | 3.80 | 40 | 27 | 0.014 | ±2.5 | Pass |
| Normal | 3.80 | 50 | 9 | 0.005 | ±2.5 | Pass |
| Normal | 3.80 | 55 | -12 | -0.006 | ±2.5 | Pass |

Note: This device operating temperature range is -20°C ~ +55°C.