


**HyperGain™ Lightning Protector  
Model CLLN**

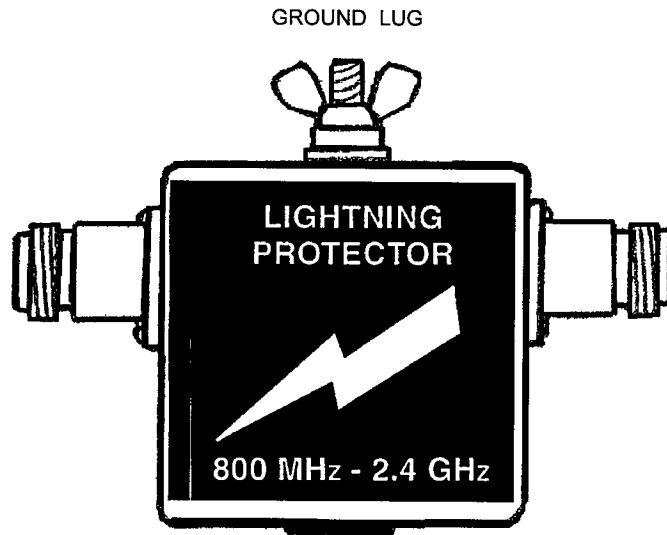

**Electrical Specifications:**

Operating Frequency:	800 MHz - 2500 MHz
Insertion Loss:	0.5 dB typical
Clamping Time:	50 nsec.
Max. Surge Current:	600 A
Max. Clamp Voltage:	260 V (8 x 20 usec)

**Mechanical Specifications:**

Connectors:	Proprietary
Dimensions:	3.5" x 2" x 1"
Construction:	Cast Magnesium

**HyperLink Technologies, Inc.**  
1200 Clint Moore Road, Suite 14  
Boca Raton, FL 33487 USA  
Tel: 561-995-2256 Fax: 561-995-2432  
Email: [hyperlink@worldnet.att.net](mailto:hyperlink@worldnet.att.net)