

SECTION 3

OCCUPIED BANDWIDTH

Per 2.989 (c, 1) the measurements were made per TIA/EIA 603.

455.625 Mhz 12.5KHz

SECTION 3 D3, D4 (50 & 150 kHz spans) Page 3 & 4

SECTION 3**OCCUPIED BANDWIDTH**

Method of Measurement Per 2.989 (c,1) Data on Occupied Bandwidth is presented in the form of a spectrum analyzer plot which illustrates the transmitter sidebands. A plot is taken of the carrier sideband modulated with a 2500 Hz tone at a level 16 dB greater than that required to produce 50 percent modulation. (The spectrum analyzer grid indicates the reference level of the carrier unmodulated in all exhibits.)

SECTION 3 D3 &D4
Data, Digital Voice

$B_n = 2(B/2) + 2DK$ where

$B = 9600 \text{ Hz}$
 $D = 1800 \text{ Hz}$
 $K=1(\text{assumed})$

$$B_n = 13200$$

The above calculation using carson's rule exceeds the 11.25 kHz limit for Authorized bandwidth , Per 90.209 . We have measured the Authorized Bandwidth at he 99% power level and found a bandwidth of 6 kHz, , this measurment may be found on the Section 3 D4 plot:

Ericsson Inc. is asking for an Emission designator of

$$B_n = 6000$$

6K0F1D,
6K0F1E


EXHIBIT Sec 303

APPLICANT: Ericsson Inc.

ID NO. AXATR-307-B2

OCCUPIED BANDWIDTH

Modulation Sideband Spectrum

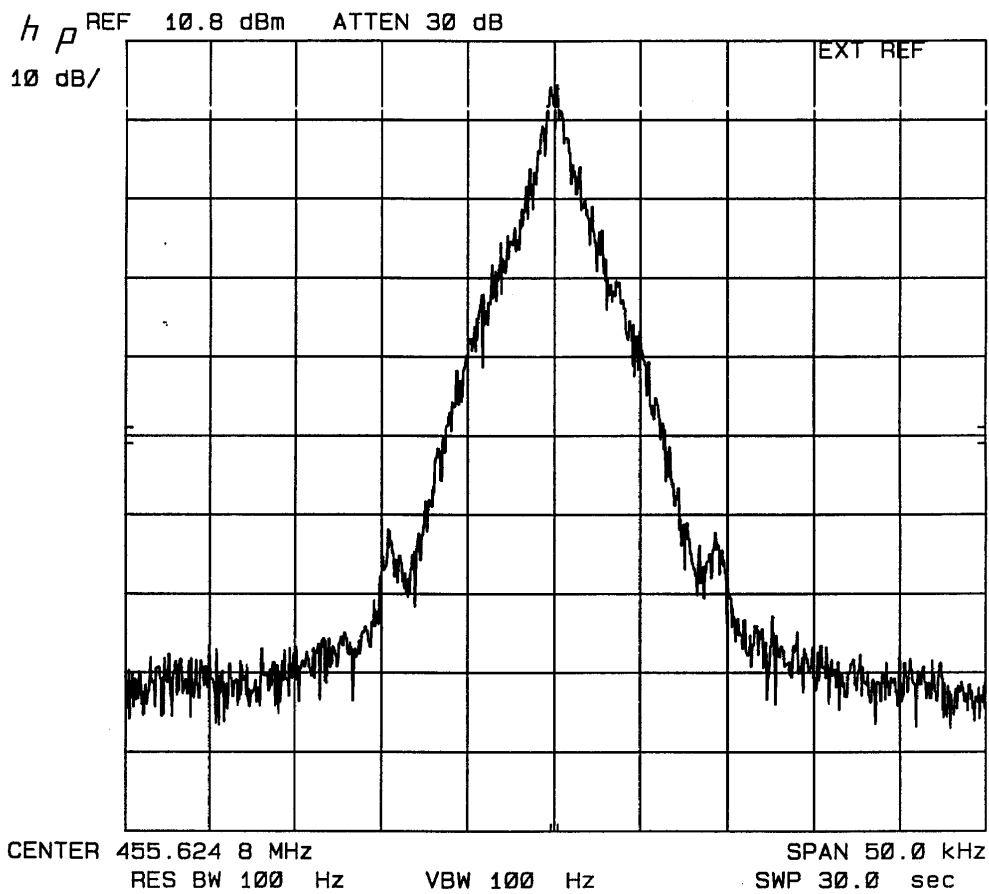

Referenced to the Unmodulated Carrier
Modulated with Pseudorandom Data 9600 BPS
Analyzer: Vertical = 10 dB/Div.

ERICSSON INC.
OCCUPIED BANDWIDTH
Modulation Sideband Spectrum
ID NO. AXATR-307-B2

