

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas		No. EUS/VR-00:1727/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A
EN			

## Addendum to “SAR Test Report: A1228ds”

**Date of test:** July 11, 2000

**Laboratory:** Electromagnetic Near Field and Radio Frequency Dosimetry Laboratory  
Ericsson, Inc.  
7001 Development Drive, P.O. Box 13969,  
Research Triangle Park, NC, 27709, USA

**Test Responsible:** Mark Douglas, Ph.D.  
Senior Staff Engineer, Antenna Development Group  
[mark.douglas@ericsson.com](mailto:mark.douglas@ericsson.com)  
(919) 472-6334



This laboratory is accredited to ISO/IEC Guide 25-1990 to perform the following electromagnetic tests:

Specific Absorption Rate (SAR), dielectric parameters, and RF power measurement  
on the following types of products:  
Wireless communications devices

A2LA certificate Number: 1650-01

**Statement of Compliance:** Ericsson, Inc. declares under its sole responsibility that the that the product

**Ericsson A1228ds**

to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

© Ericsson, Inc. 2000

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Ericsson encourages all feedback, both positive and negative, on this test report.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A	File U:\FCC_TRNS\Fcc_388 Dolly Linda Lite\Exhibit11\sar addend_A1228ds body.doc
EN				

## Table of Contents

1. Introduction	3
2. Device Under Test	3
2.1 Antenna description	3
2.2 Device description	3
3. Test equipment	3
3.1 Dosimetric system	3
3.2 Additional equipment	4
4. Electrical parameters of the tissue simulating liquid	4
5. System accuracy verification	4
6. Test results	4
References	5
Appendix 1: SAR distribution comparison for system accuracy verification	6
Appendix 2: SAR distribution plots	8
Appendix 3: Position of Device on Phantom	9
Appendix 4: Probe calibration parameters	10

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A	File U:\FCC_TRNS\Fcc_388 Dolly Linda Lite\Exhibit11\sar addend_A1228ds body.doc
EN				

## 1. Introduction

This test report is an addendum to report EUS/VR-00:1417/REP "SAR Test Report: A1228ds". In this report compliance of the Ericsson A1228ds portable telephone with RF safety guidelines is demonstrated while the device is used against the body (applicable RF safety guidelines are given in [1]). The device was tested in accordance with the latest available test guidelines [1]. Detailed procedures of the test are described in the *Ericsson SAR Measurement Specification* [2].

## 2. Device Under Test

### 2.1 Antenna description

<b>Type</b>	Fixed stub	
<b>Location</b>	Left side	
<b>Dimensions</b>	length	30 mm
	width at base	10 mm
<b>Configuration</b>	Helix	

### 2.2 Device description

<b>Device model</b>	A1228ds	
<b>Serial number</b>	UA2019JJDQ	
<b>Mode</b>	800 AMPS	800 D-AMPS
<b>Multiple Access Scheme</b>	FDMA	TDMA
<b>Maximum Output Power Setting<sup>1</sup></b>	26.0 dBm	26.0 dBm
<b>Factory Tolerance in Power Setting</b>	± 0.25	± 0.25
<b>Maximum Peak Output Power<sup>2</sup></b>	26.25 dBm	26.25 dBm
<b>Duty Cycle</b>	1	1 / 3
<b>Transmitting Frequency Range</b>	824 – 849 MHz	824 – 849 MHz
<b>Prototype or Production Unit</b>	Prototype	

## 3. Test equipment

### 3.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c), manufactured by Schmid & Partner Engineering AG and installed February, 1998. The total SAR assessment uncertainty (K = 1) of the system is ±16% and includes a +15% offset (overestimation). The extended uncertainty (K = 2) is ±32% with a +15% offset. This results in a total uncertainty range of -1% to +31% for K = 1, or -17% to +47% for K = 2. The equipment list is given below.

<b>Description</b>	<b>Serial Number</b>	<b>Due Date</b>
DASY3 DAE V1	345	4/01
E-field probe ETDV5	1324	2/01
Dipole Validation Kit, D900V2	049	12/00

<sup>1</sup> This is the conducted power measured at the antenna port when the device is set to its highest power setting. It is measured at the middle of the transmit frequency band. Note that the output power may be different at other frequencies.

<sup>2</sup> This equals the maximum output power setting plus the factory tolerance.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A	File U:\FCC_TRNS\Fcc_388 Dolly Linda Lite\Exhibit11\sar addend_A1228ds body.doc
EN				

### 3.2 Additional equipment

Description	Serial Number	Due Date
Signal Generator HP8648C	3537A01598	9/00
Dielectric probe kit HP 85070B	US33020256	8/00
Network analyzer HP 8752C	3410A03105	7/00
Power meter HP 437B	3125U13729	2/01
Power sensor HP 8482H	3318A07097	2/01

### 4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity,  $\epsilon_r$ , and the conductivity,  $\sigma$ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density,  $\rho$ , entered into the DASY3 program is also given. Recommended values for permittivity, conductivity and mass density are also shown [3]. It is seen that the measured parameters result in an overestimation of SAR compared to the recommended values.

$f$ (MHz)	Limits / Measured	Dielectric Parameters		
		$\epsilon_r$	$\sigma$ (S/m)	$\rho$ (g/cm <sup>3</sup> )
835	Measured	56.5	0.99	1.04
	Recommended Values [3]	56.1	0.95	1.04

### 5. System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kits listed in Section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. The obtained results are displayed in the table below. It is seen that the system is operating within its specification, as the results are within  $\pm 5\%$  of the reference values. Reference values are based on an analysis performed at the laboratory using the dielectric parameters specified below. The distributions of SAR compare well with those of the reference measurements (see Appendix 1).

$f$ (MHz)	Measured / Reference	SAR (W/kg), 1 gram	Dielectric Parameters			Temp. (°C)
			$\epsilon_r$	$\sigma$ (S/m)	$\rho$ (g/cm <sup>3</sup> )	
900	Measured	10.6	55.9	1.05	1.04	23
	Reference	10.7	56.0	1.05	1.04	23

### 6. Test results

The measured SAR values and conducted output powers are shown in Table 1. The device was tested against a flat phantom representing the user's body, using the carry cases (product # KRY 104 1004 and KRY 104 1293) designed for the device. Results are shown for carry case KRY 104 1004, as the use of KRY104 1293 results in lower SAR values. There are also other cases made for this device, but they all position the device farther from the body and therefore would give lower SAR values. Measurements were made at the lowest, middle and highest frequencies of the transmit band. The SAR results shown are maximum SAR values averaged over 1 g of tissue while the device is in AMPS mode. For D-AMPS mode, the maximum power is significantly lower than that of AMPS mode, therefore SAR values are also lower.

Test commands were used to control the device during the SAR measurements. The phone was supplied with a fully-charged battery for the tests. The temperature of the test facility during the tests was  $22.7 \pm 1$  °C, and the depth of the tissue simulating liquid was 15.0 cm.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A	File U:\FCC_TRNS\Fcc_388 Dolly Linda Lite\Exhibit11\sar addend_A1228ds body.doc
EN				

mode	$f$ (MHz)	Output Power (dBm) <sup>3</sup>	SAR, 1g (W/kg)	
			measured	calculated to max. power
800 AMPS	824	26.16	1.24	1.27
	837	26.13	1.13	1.16
	849	26.20	1.05	1.08

**Table 1: SAR measurement results for the Ericsson A1228ds telephone at highest possible output power.**  
**Measured against the user's torso with carry case KRY 104 1004.**

## References


- [1] C. Törnevik, "Ericsson SAR measurement specification, part 1: Introduction and Purpose," Internal Document ERA/T/U-98:446, February, 1999.
- [2] C. Törnevik, M. Siegbahn, T. Persson, M. Douglas, and R. Plicanic, "Ericsson SAR measurement specification", Internal Document ERA/T/U-98:442, February 1999.
- [3] Federal Communications Commission, "Tissue Dielectric Properties," <http://www.fcc.gov/fcc-bin/dielec.sh>.

<sup>3</sup> The output power of the device under test was intentionally set higher than normal so that SAR measurement could be performed using a device near the upper power limit, including the factory tolerance.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A

EN


## Appendix 1: SAR distribution comparison for system accuracy verification

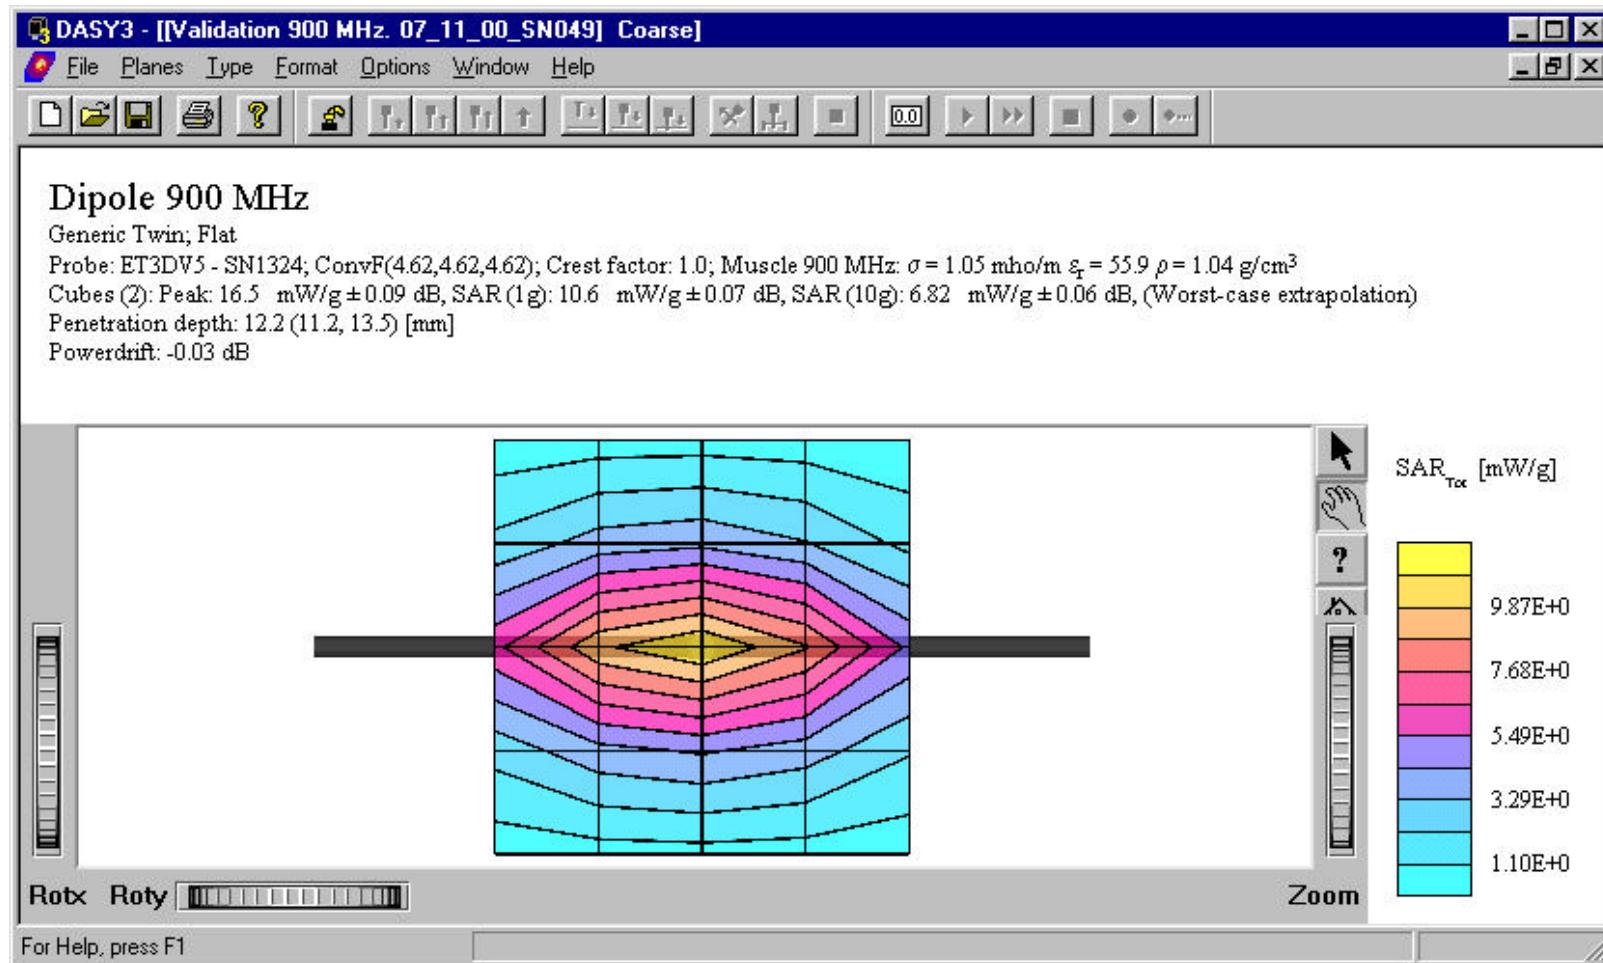

900 MHz SAR distribution of validation dipole antenna from system accuracy verification test.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A


EN

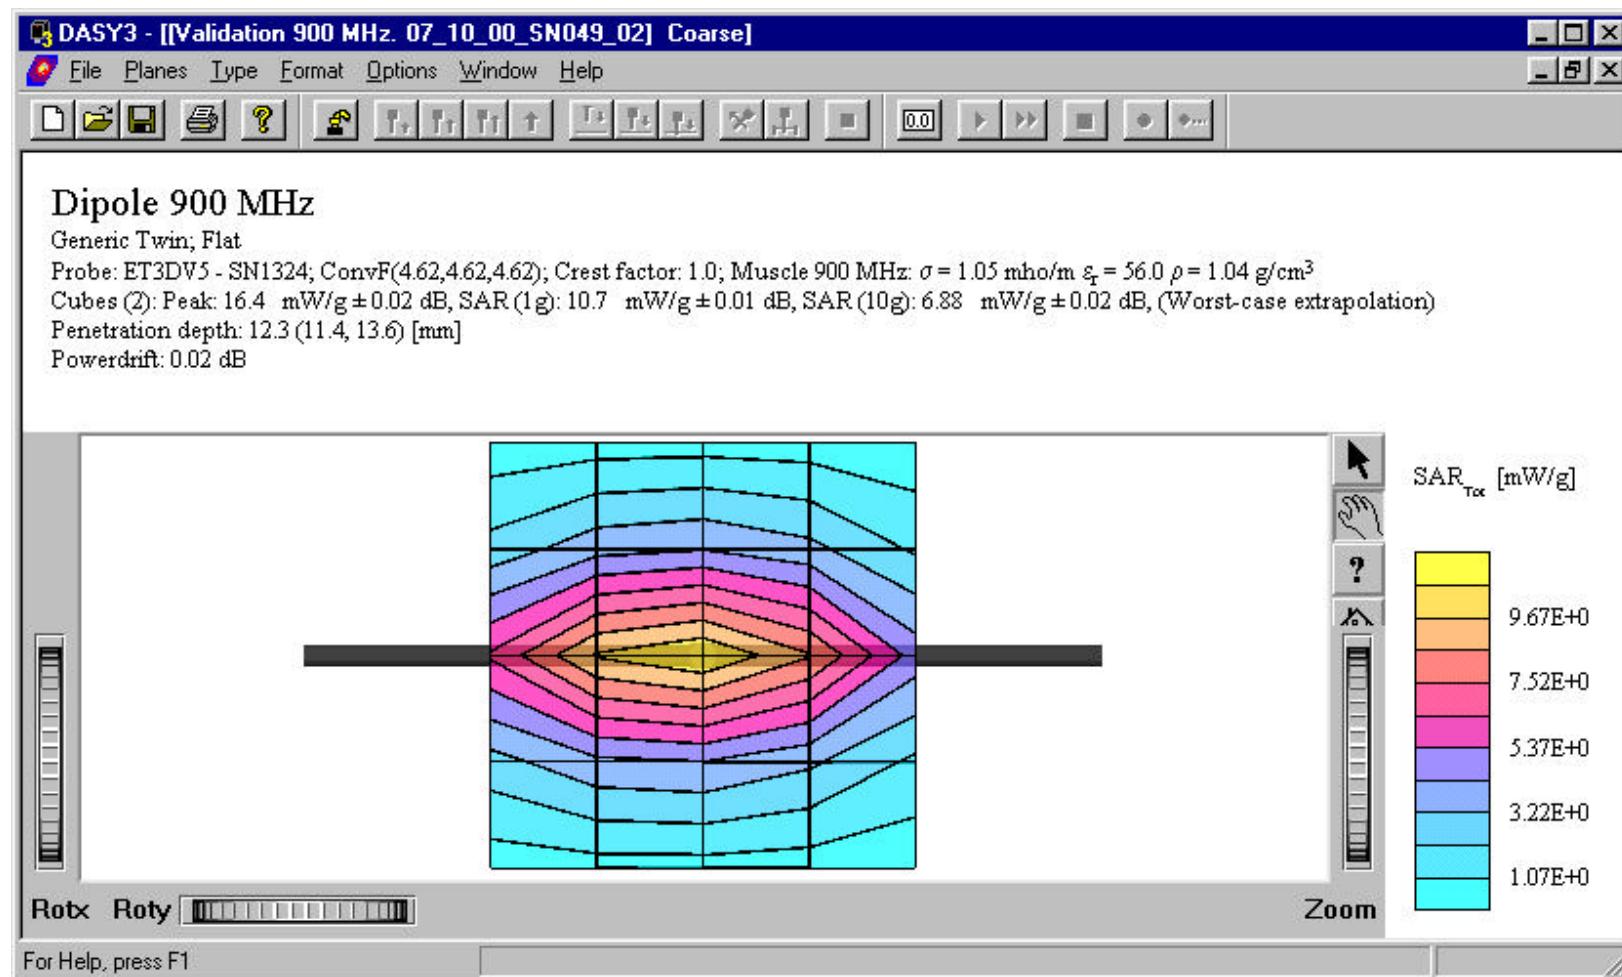

900 MHz SAR distribution of validation dipole antenna from reference measurement.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A	File U:\FCC_TRNS\Fcc_388 Dolly Linda Lite\Exhibit11\sar addend_A1228ds body.doc
EN				

## Appendix 2: SAR distribution plots

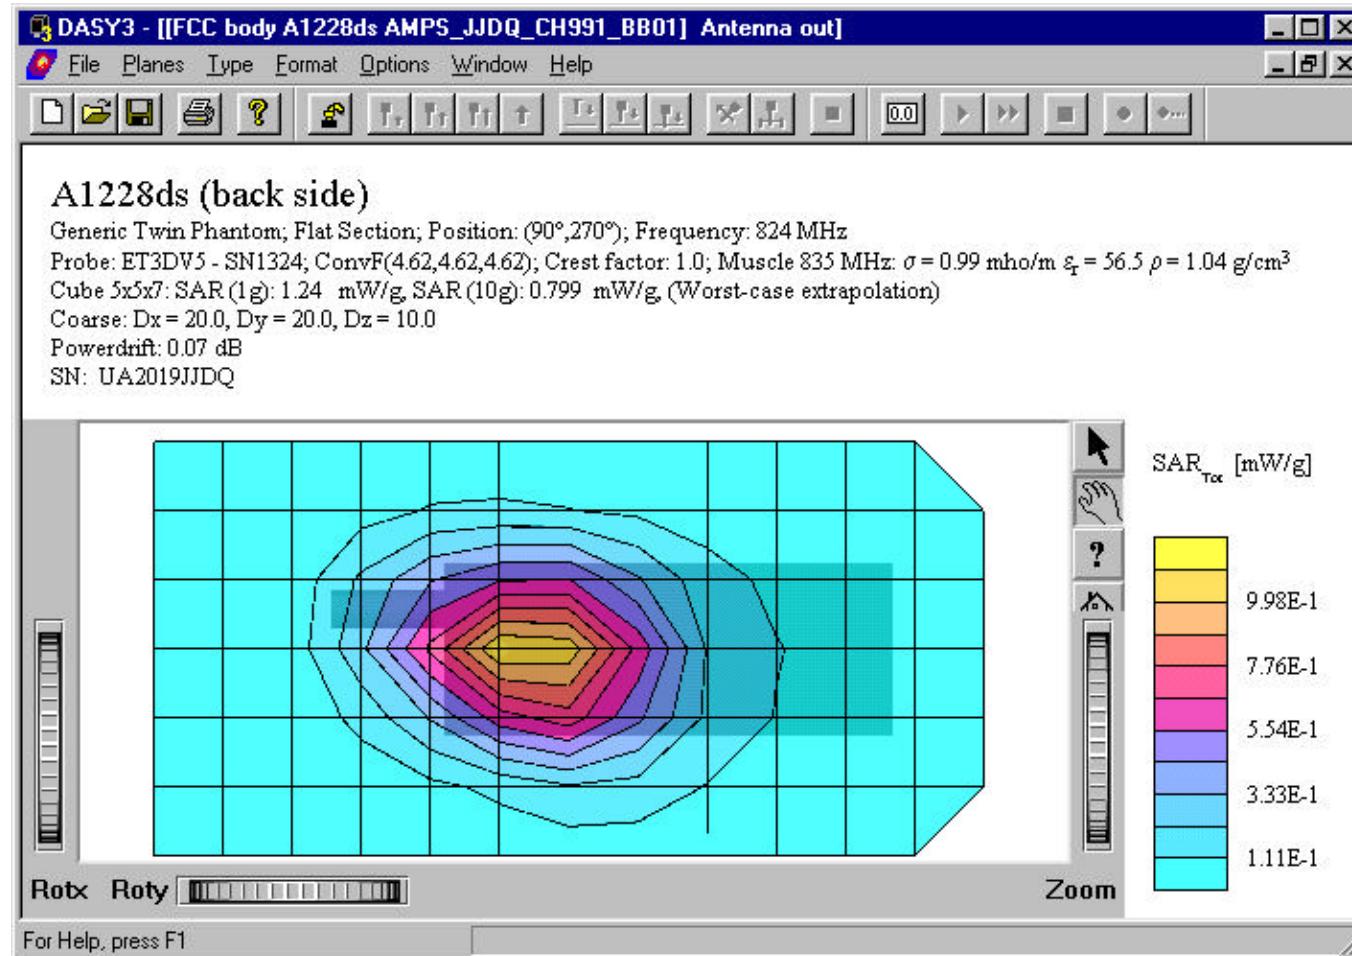

Distribution of maximum SAR in 800 AMPS band.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A
EN			

### Appendix 3: Position of Device on Phantom



Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1727/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-10	Rev A	File U:\FCC_TRNS\Fcc_388 Dolly Linda Lite\Exhibit11\sar addend_A1228ds body.doc
EN				

## Appendix 4: Probe calibration parameters

### DASY3 - Parameters of Probe: ET3DV5 SN:1324

#### Sensitivity in Free Space

NormX	<b>1.51</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	<b>1.73</b> $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	<b>1.52</b> $\mu\text{V}/(\text{V}/\text{m})^2$

#### Diode Compression

DCP X	<b>104</b> mV
DCP Y	<b>104</b> mV
DCP Z	<b>104</b> mV

#### Sensitivity in Tissue Simulating Liquid

Brain                    450 MHz                     $\epsilon_r = 48 \pm 5\%$                      $\sigma = 0.50 \pm 10\% \text{ mho/m}$

ConvF X	<b>5.07</b> extrapolated	Boundary effect:
ConvF Y	<b>5.07</b> extrapolated	Alpha <b>0.07</b>
ConvF Z	<b>5.07</b> extrapolated	Depth <b>4.22</b>

Brain                    900 MHz                     $\epsilon_r = 42.5 \pm 5\%$                      $\sigma = 0.86 \pm 10\% \text{ mho/m}$

ConvF X	<b>4.76</b> $\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	<b>4.76</b> $\pm 7\%$ (k=2)	Alpha <b>0.27</b>
ConvF Z	<b>4.76</b> $\pm 7\%$ (k=2)	Depth <b>3.47</b>

Brain                    1500 MHz                     $\epsilon_r = 41 \pm 5\%$                      $\sigma = 1.32 \pm 10\% \text{ mho/m}$

ConvF X	<b>4.35</b> interpolated	Boundary effect:
ConvF Y	<b>4.35</b> interpolated	Alpha <b>0.54</b>
ConvF Z	<b>4.35</b> interpolated	Depth <b>2.48</b>

Brain                    1800 MHz                     $\epsilon_r = 41 \pm 5\%$                      $\sigma = 1.69 \pm 10\% \text{ mho/m}$

ConvF X	<b>4.15</b> $\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	<b>4.15</b> $\pm 7\%$ (k=2)	Alpha <b>0.68</b>
ConvF Z	<b>4.15</b> $\pm 7\%$ (k=2)	Depth <b>1.98</b>

#### Sensor Offset

Probe Tip to Sensor Center	<b>2.7</b>	mm
Optical Surface Detection	<b>2.0 <math>\pm</math> 0.2</b>	mm