

MFA *Report Tracker*

For MFA internal use only

Please keep this page with the report in out files.

Applicant: Ericsson Inc.
 Model: EDACS 500M
 FCC ID: AXATR-390-A2

Formulaire: L:\\Project\\Formulaire\\FCC.Supplemental.MPE.
 rtf
 Last Modified: 1999-Apr-27
 Purpose: Environmental Assessment (MPE)

MFA Project ID: p9990013
 Client ID: ERICSSONINC

MFA Document ID: d9990049
 Date: September 20, 1999
 This Printing 1999-Sep-20 Mon
 Writer: MF/cvr

☐ < Check here if this report has been manually modified.
☐ < Check here if this report was made from another report.
 Original document:
☐ < Check here if this report varies significantly from the formulaire

**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: September 20, 1999

Mailing: Ericsson Inc.
1 Mountain View Road
Lynchburg, VA 24502

Attention of: Bryan McWatters, Staff Engineer, Regulatory
Programs
EUSBLMW@am1.ericsson.se
(804) 592-6110; FAX: -6510

Equipment: EDACS 500M
FCC ID: AXATR-390-A2
P.O. Number: EN00012 and Amendment 9/8/99
FCC Rules: 24

Gentlemen:

Enclosed please find your copy of the Supplemental Test Data Report, the whole for Environmental Assessment (MPE) of the referenced equipment as shown.

Please allow from 6-8 weeks to hear from the Commission, who may request additional data or information, and even a sample for pre-grant audit testing.

Should you need any clarification, just fax or phone. Thank you again for this order - it has been a pleasure to be of service.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath.

Morton Flom, P. Eng.

enclosure(s)
MF/cvr



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: September 20, 1999

Federal Communications Commission
EQUIPMENT APPROVAL SERVICES
P.O. Box 358315
Pittsburgh, PA 15251-5315

Attention: Processing Staff

Applicant: Ericsson Inc.
Equipment: EDACS 500M
FCC ID: AXATR-390-A2
Confirmation No.: EA94473
Correspondence No.: 9397
FCC Rules: 24
and 47 CFR 1.1307, Environmental Assessment

New Exhibit i.e. MPE Report has been added to the original
Electronic Filing by the Applicant Directly.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.

cc: Applicant - Bryan McWatters
Electronically Filed
MF/cvr

**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: September 20, 1999

Federal Communications Commission
EQUIPMENT APPROVAL SERVICES
P.O. Box 358315
Pittsburgh, PA 15251-5315

Attention: Frank Coperich

Applicant: Ericsson Inc.
Equipment: EDACS 500M
FCC ID: AXATR-390-A2
Confirmation No.: EA94473
Correspondence No.: 9397
FCC Rules: 24
and 47 CFR 1.1307, Environmental Assessment

Frank:

At the request of the Applicant, enclosed please find the Supplemental Test Data Report, the whole for Environmental Assessment (MPE) of the referenced equipment as shown.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant - Bryan McWatters
Original: Electronically Filed
MF/cvr



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Sub-part
1.1307:

SUPPLEMENTAL REPORT

ENVIRONMENTAL ASSESSMENT

General Population / Uncontrolled Exposure,
Maximum Permissible Exposure
and Specific Absorption Rate

EQUIPMENT IDENTIFICATION

Ericsson Inc.
FCC ID: AXATR-390-A2

DATE OF REPORT

September 20, 1999

SUPERVISED BY:

A handwritten signature in black ink that reads 'M. Flom P. Eng.' The signature is written in a cursive, flowing style.

Morton Flom, P. Eng.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
	Identification of the Equipment Under Test	2
	Standard Test Conditions and Engineering Practices	4
1.1310	Environmental Assessment	5

PAGE NO. 1 of 9.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) TEST REPORT (SUPPLEMENTAL)
- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d9990049
- d) Client: Ericsson Inc.
1 Mountain View Road
Lynchburg, VA 24502
- e) Identification: EDACS 500M
Description: FCC ID: AXATR-390-A2
UHF FM Mobile Transceiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: September 20, 1999
EUT Received: 1999-Sep-13
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by: 
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 9.

IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)NAME AND ADDRESS OF APPLICANT:

Ericsson Inc.
1 Mountain View Road
Lynchburg, VA 24502

MANUFACTURER:

Applicant

FCC ID:

AXATR-390-A2

MODEL NO:

EDACS 500M

DESCRIPTION:

UHF FM Mobile Transceiver

TYPE OF EMISSION:FREQUENCY RANGE, MHz:

806 to 870

POWER RATING, Watts:

6 to 25

x Switchable Variable N/AMODULATION:

 AMPS
 TDMA
 CDMA
 x FCC
 OTHER

ANTENNA:

 HELICAL
 x MONOPOLE
 OTHER

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



**THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION**

ACCREDITED LABORATORY

A2LA has accredited

M. FLOM ASSOCIATES, INC.
Chandler, AZ

for technical competence in the field of

Electrical (EMC) Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 24th day of November, 1998.





President
For the Accreditation Council
Certificate Number 1008.01
Valid to December 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 AND EN 45001

M. FLOM ASSOCIATES, INC.
Electronic Testing Laboratory
3356 North San Marcos Place, Suite 107
Chandler, AZ 85224-1571
Morris Flom Phone: 602 926 3100

ELECTRICAL (EMC)

Valid to: December 31, 2000 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 55081-1; EN 55081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1
RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
ESD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97



5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8307 • Phone: 301 644 3200 • Fax: 301 662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

MFA p9990013, d9990049

PAGE NO.

4 of 9.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 5 of 9.

Name of test: Environmental Assessment

Specification: FCC: 47 CFR 1.1310

Measurement Guide: ANSI/IEEE C95.1 1992

Test Equipment: Maximum Permissible Exposure (MPE) measurement system, consisting of:
Narda 8717-1174R, Radiation meter
Narda 8761D, E-field probe (300 kHz - 3 GHz)
(Calibrated Nov-98)

Measurement Procedure:


1. The following measurements were performed with a Narda probe using ANSI/IEEE C95.1 as a guide.
2. Prior to making any measurements, the measurements system was calibrated in accordance with the manufacturer's procedures.
3. The EUT's radiating element (antenna) was placed on a 1 m tall table for ease of testing. For equipment normally operated on a metal surface, a ground plane was used.
4. The remaining equipment necessary to operate the EUT was maintained at a distance from the measurement arrangement suitable to minimize interference with the measurements.
5. The minimum safe distance was calculated from the formula $\text{Power Density} = \text{EIRP} / 4\pi R^2$ (Peak Watts/m²). The calculation is shown with the measurement data.
6. With the EUT operating at maximum power, a search was initiated for worst case emissions with the probe raised and lowered over a range of 0.2 to 2 meters in height and over a horizontal plane of 0° to 360°.
7. Average values were calculated for the whole body (0.2-2.0m), lower body (0.2-0.8m) and upper body (1.0-2.0m).

Results: Attached.

PAGE NO.

6 of 9.

TEST SETUP: Maximum Permissible Exposure (MPE)
g9990101: 1999-Sep-16 Thu 16:57:37
STATE: 0:General

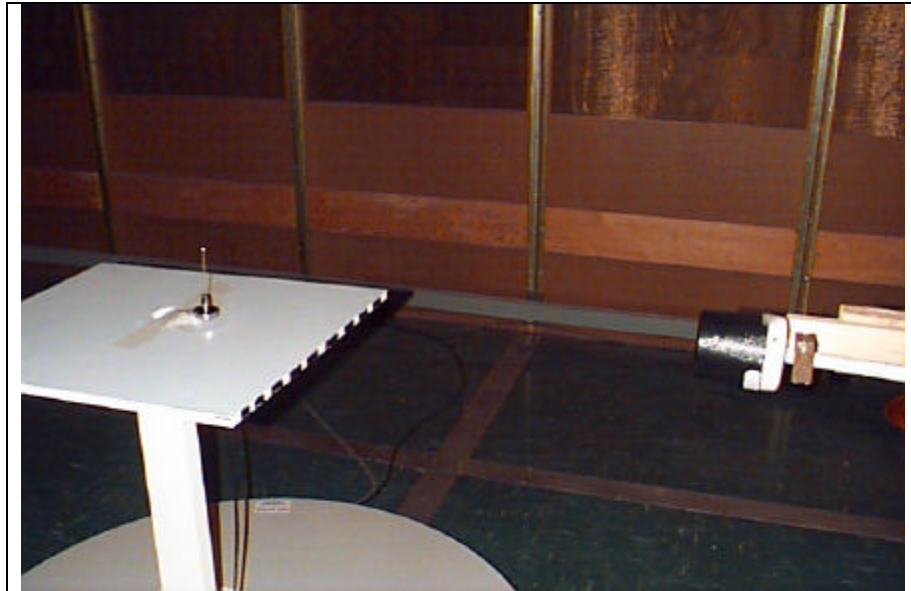


TEST SETUP: Maximum Permissible Exposure (MPE)
g9990102: 1999-Sep-16 Thu 16:57:37
STATE: 0:General




PAGE NO.

7 of 9.

TEST SETUP: Maximum Permissible Exposure (MPE)
g9990103: 1999-Sep-16 Thu 16:57:37
STATE: 0:General

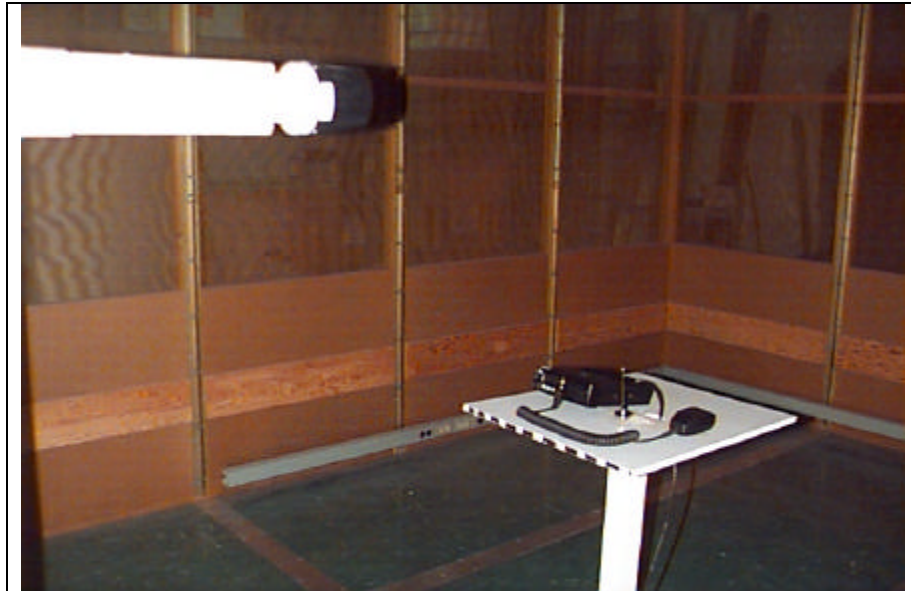

TEST SETUP: Maximum Permissible Exposure (MPE)
g9990104: 1999-Sep-16 Thu 16:57:37
STATE: 0:General

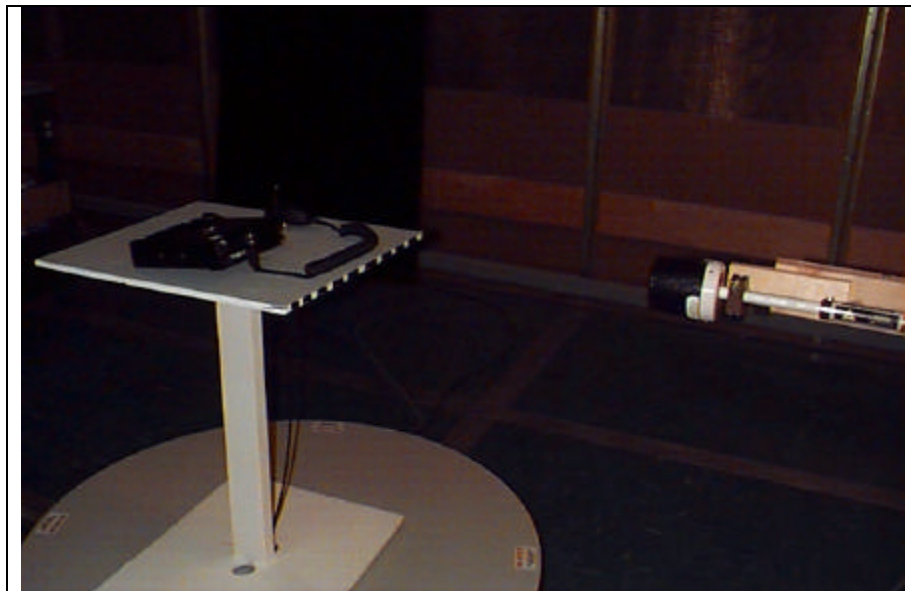

PAGE NO. 8 of 9.

Name of test: Environmental Assessment of Radio Only

Tested Distance: = 20 cm (8 in.)

Rated Probe Power Density: Narda 8761D Probe = 10 $\mu\text{W}/\text{cm}^2$ to 20 mW/cm^2

Error Margin: Narda 8717 Meter = 1%

EUT Description: See Page 2.

Power_[W ERP] = 25 Watts

Test Frequency, MHz = 824.9875

Ant. Gain_[dBi] = 2.15 dBi

Power_[W EIRP] $P_{[W ERP]} \times 10^{(2.15/10)}$, Watts EIRP = 0.41

MPE Limit _[W/m²] 0.55
(at test frequency)

Theoretical safe distance: $R_{[m]} = [(P_{[W EIRP]}) / (4\pi \times \text{Limit}_{[W/m^2]})]^{1/2}$
 $R_{[m]} = [4.9 / (4\pi \times 5.72)]^{1/2} = 0.77$
 $R_{[\text{inches}]} = 8$

Results:
at theoretical safe
distance

Probe Height, m	Power Density, mW/cm^2
2.0	0.13
1.8	0.13
1.6	0.13
1.4	0.15
1.2	0.13
1.0	0.13
0.8	0.14
0.6	0.13
0.4	0.12
0.2	0.12

Calculations: The measured power density readings were summed and the results divided by the number of readings to calculate the average.

For whole body: Average of 0.2 to 2.0 m, $\text{mW}/\text{cm}^2 = 0.130$

For lower body: Average of 0.2 to 0.8 m, $\text{mW}/\text{cm}^2 = 0.125$

For upper body: Average of 1.0 to 2.0 m, $\text{mW}/\text{cm}^2 = 0.1333$

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 9 of 9.

Name of test: Environmental Assessment of Antenna Only

Tested Distance: = 30.3 cm (12 in.)

Rated Probe Power Density: Narda 8761D Probe = 10 $\mu\text{W}/\text{cm}^2$ to 20 mW/cm^2

Error Margin: Narda 8717 Meter = 1%

EUT Description: See Page 2.

Power_[W ERP] = 25 Watts

Test Frequency, MHz = 824.9875

Ant. Gain_[dBi] = 2.15 dBi

Power_[W EIRP] $P_{[W ERP]} \times 10^{(2.15/10)}$, Watts EIRP = 0.41

MPE Limit _[W/m²] 0.55
(at test frequency)

Theoretical safe distance: $R_{[m]} = [(P_{[W EIRP]}) / (4\pi \times \text{Limit}_{[W/m^2]})]^{1/2}$
 $R_{[m]} = [4.9 / (4\pi \times 5.72)]^{1/2} = 0.77$
 $R_{[inches]} = 30.3$

Results:
at theoretical safe
distance

Probe Height, m	Power Density, mW/cm^2
2.0	0.47
1.8	0.50
1.6	0.33
1.4	0.83
1.2	0.56
1.0	0.41
0.8	0.31
0.6	0.51
0.4	0.28
0.2	0.28

Calculations: The measured power density readings were summed and the results divided by the number of readings to calculate the average.

For whole body: Average of 0.2 to 2.0 m, $\text{mW}/\text{cm}^2 = 0.488$

For lower body: Average of 0.2 to 0.8 m, $\text{mW}/\text{cm}^2 = 0.345$

For upper body: Average of 1.0 to 2.0 m, $\text{mW}/\text{cm}^2 = 0.5166$

SUPERVISED BY:

Morton Flom, P. Eng.

Addendum:

(THE FOLLOWING WILL BE PLACED IN INSTRUCTION MANUAL)

INSTRUCTIONS TO INSTALLERS & USERS

Minimum Safe Distance: 20 cm (8 in.) for Radio
30.3 cm (12 in.) for Antenna

Antenna Mounting

Antenna as supplied by manufacturer must not be mounted at a location such that any person or persons can come closer than the above-indicated minimum safe distance to the antenna...i.e. 30.3 cm (12 in.).

To comply with FCC RF Exposure Limits, antenna must be installed @ or exceeding minimum safe distance shown above. Antenna can be mounted on fenders, roof, trunk or other location, PROVIDED that the minimum safe distance is observed.

Antenna

Substitution

Do not substitute any antenna for the one supplied by manufacturer. You may be exposing person(s) to harmful radiation. Contact supplier or manufacturer for further instructions.

WARNING:

**MAINTAIN SEPARATION DISTANCE
FROM ANTENNA OF 30.3 cm.**

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:


Morton Flom, P. Eng.