

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas		No. EUS/VR-00:1667/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A
EN			

Addendum to

“SAR Test Report: A1228c”

Date of test: July 11, 2000

Laboratory: Electromagnetic Near Field and Radio Frequency Dosimetry Laboratory
Ericsson, Inc.
7001 Development Drive, P.O. Box 13969,
Research Triangle Park, NC, 27709, USA

Test Responsible: Mark Douglas, Ph.D.
Senior Staff Engineer, Antenna Development Group
mark.douglas@ericsson.com
(919) 472-6334



This laboratory is accredited to ISO/IEC Guide 25-1990 to perform the following electromagnetic tests:

Specific Absorption Rate (SAR), dielectric parameters, and RF power measurement
on the following types of products:
Wireless communications devices

A2LA certificate Number: 1650-01

Statement of Compliance: Ericsson, Inc. declares under its sole responsibility that the product

Ericsson A1228c

to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas		No. EUS/VR-00:1667/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A
EN			

© Ericsson, Inc. 2000

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Ericsson encourages all feedback, both positive and negative, on this test report.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1667/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A	File U:\FCC_TRNS\Fcc_410 Carmencita Linda\Exhibit11\Source\A1228c body.doc
EN				

Table of Contents

1. Introduction	4
2. Device Under Test	4
2.1 Antenna description	4
2.2 Device description	4
3. Test equipment	4
3.1 Dosimetric system	4
3.2 Additional equipment	5
4. Electrical parameters of the tissue simulating liquid	5
5. System accuracy verification	5
6. Test results	5
References	6
Appendix 1: SAR distribution comparison for system accuracy verification	7
Appendix 2: SAR distribution plots	9
Appendix 3: Position of Device on Phantom	11
Appendix 4: Probe calibration parameters	12

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas		No. EUS/VR-00:1667/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A	File U:\FCC_TRNS\Fcc_410 Carmencita Linda\Exhibit11\Source\A1228c body.doc
EN				

1. Introduction

In this test report, compliance of the Ericsson A1228c portable telephone with RF safety guidelines is demonstrated (applicable RF safety guidelines are given in [1]). The device was tested in accordance with the latest available test guidelines [1]. Detailed procedures of the test are described in the *Ericsson SAR Measurement Specification* [2].

2. Device Under Test

2.1 Antenna description

Type	Fixed stub	
Location	Left side	
Dimensions	length	30 mm
	width at base	10 mm
Configuration	Helix	

2.2 Device description

Device model	A1228c	
Serial number	UA201988XW	
Mode	800 AMPS	800 CDMA
Multiple Access Scheme	FDMA	CDMA
Maximum Output Power Setting ¹	26.0 dBm	23.5 dBm
Factory Tolerance in Power Setting	± 0.25	± 0.25
Maximum Peak Output Power ²	26.25 dBm	23.75 dBm
Duty Cycle	1	1
Transmitting Frequency Range	824 – 837 MHz	824 – 837 MHz
Prototype or Production Unit	Prototype	

3. Test equipment

3.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c), manufactured by Schmid & Partner Engineering AG and installed February, 1998. The total SAR assessment uncertainty (K = 1) of the system is ±16% and includes a +15% offset (overestimation). The extended uncertainty (K = 2) is ±32% with a +15% offset. This results in a total uncertainty range of -1% to +31% for K = 1, or -17% to +47% for K = 2. The equipment list is given below.

Description	Serial Number	Due Date
DASY3 DAE V1	345	4/01
E-field probe ETDV5	1324	2/01
Dipole Validation Kit, D900V2	049	12/00

¹ This is the conducted power measured at the antenna port when the device is set to its highest power setting. It is measured at the middle of the transmit frequency band. Note that the output power may be different at other frequencies.

² This equals the maximum output power setting plus the factory tolerance.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas		No. EUS/VR-00:1667/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A	File U:\FCC_TRNS\Fcc_410 Carmencita Linda\Exhibit11\Source\A1228c body.doc
EN				

3.2 Additional equipment

Description	Serial Number	Due Date
Signal Generator HP8648C	3537A01598	9/00
Dielectric probe kit HP 85070B	US33020256	8/00
Network analyzer HP 8752C	3410A03105	7/00
Power meter HP 437B	3125U13729	2/01
Power sensor HP 8482H	3318A07097	2/01
Tektronix CMD80	847946/071	2/01

4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY3 program is also given. Recommended values for permittivity, conductivity and mass density are also shown [3]. It is seen that the measured parameters result in an overestimation of SAR compared to the recommended values.

f (MHz)	Limits / Measured	Dielectric Parameters		
		ϵ_r	σ (S/m)	ρ (g/cm ³)
835	Measured	56.5	0.99	1.04
	Recommended Values [3]	56.1	0.95	1.04

5. System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kits listed in Section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. The obtained results are displayed in the table below. It is seen that the system is operating within its specification, as the results are within $\pm 5\%$ of the reference values. Reference values are based on an analysis performed at the laboratory using the dielectric parameters specified below. The distributions of SAR compare well with those of the reference measurements (see Appendix 1).

f (MHz)	Measured / Reference	SAR (W/kg), 1 gram	Dielectric Parameters			Temp. (°C)
			ϵ_r	σ (S/m)	ρ (g/cm ³)	
900	Measured	10.6	55.9	1.05	1.04	23
	Reference	10.7	56.0	1.05	1.04	23

6. Test results

The measured SAR values and conducted output powers are shown in Table 1. The device was tested against a flat phantom representing the user's body, using the carry cases (product # KRY 104 1004 R1B and KRY 104 1293 R1) designed for the device (using KRY104 1004 R1B results in lower SAR values than using KRY 104 1293 R1, as shown in Table 1). Measurements were made at the lowest, middle and highest frequencies of the transmit band. The SAR results shown are maximum SAR values averaged over 1 g of tissue while the device is in AMPS mode. For CDMA mode, the maximum power is significantly lower than that of AMPS mode, therefore SAR values are also lower.

A base station simulator was used to control the device during the SAR measurements. The phone was supplied with a fully-charged battery for the tests. The temperature of the test facility during the tests was 22.7 ± 1 °C, and the depth of the tissue simulating liquid was 15.0 cm.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1667/REP			
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A	File U:\FCC_TRNS\Fcc_410 Carmencita Linda\Exhibit11\Source\A1228c body.doc	
EN					

mode	f (MHz)	Output Power (dBm) ³	SAR, 1g (W/kg)			
			KRY 104 1004 R1B		KRY 104 1293 R1	
			measured	calculated to max. power	measured	calculated to max. power
800 AMPS	824	26.30	1.05	1.02	1.14	1.11
	837	26.37			1.28	1.25
	849	26.38			1.14	1.11

Table 1: SAR measurement results for the Ericsson A1228c telephone at highest possible output power.
Measured against the user's torso with hands-free accessory.

References


- [1] C. Törnevik, "Ericsson SAR measurement specification, part 1: Introduction and Purpose," Internal Document ERA/T/U-98:446, February, 1999.
- [2] C. Törnevik, M. Siegbahn, T. Persson, M. Douglas, and R. Plicanic, "Ericsson SAR measurement specification", Internal Document ERA/T/U-98:442, February 1999.
- [3] Federal Communications Commission, "Tissue Dielectric Properties," <http://www.fcc.gov/fcc-bin/dielec.sh>.

³ The output power of the device under test was intentionally set higher than normal so that SAR measurement could be performed using a device near the upper power limit, including the factory tolerance.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1667/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A

EN


Appendix 1: SAR distribution comparison for system accuracy verification

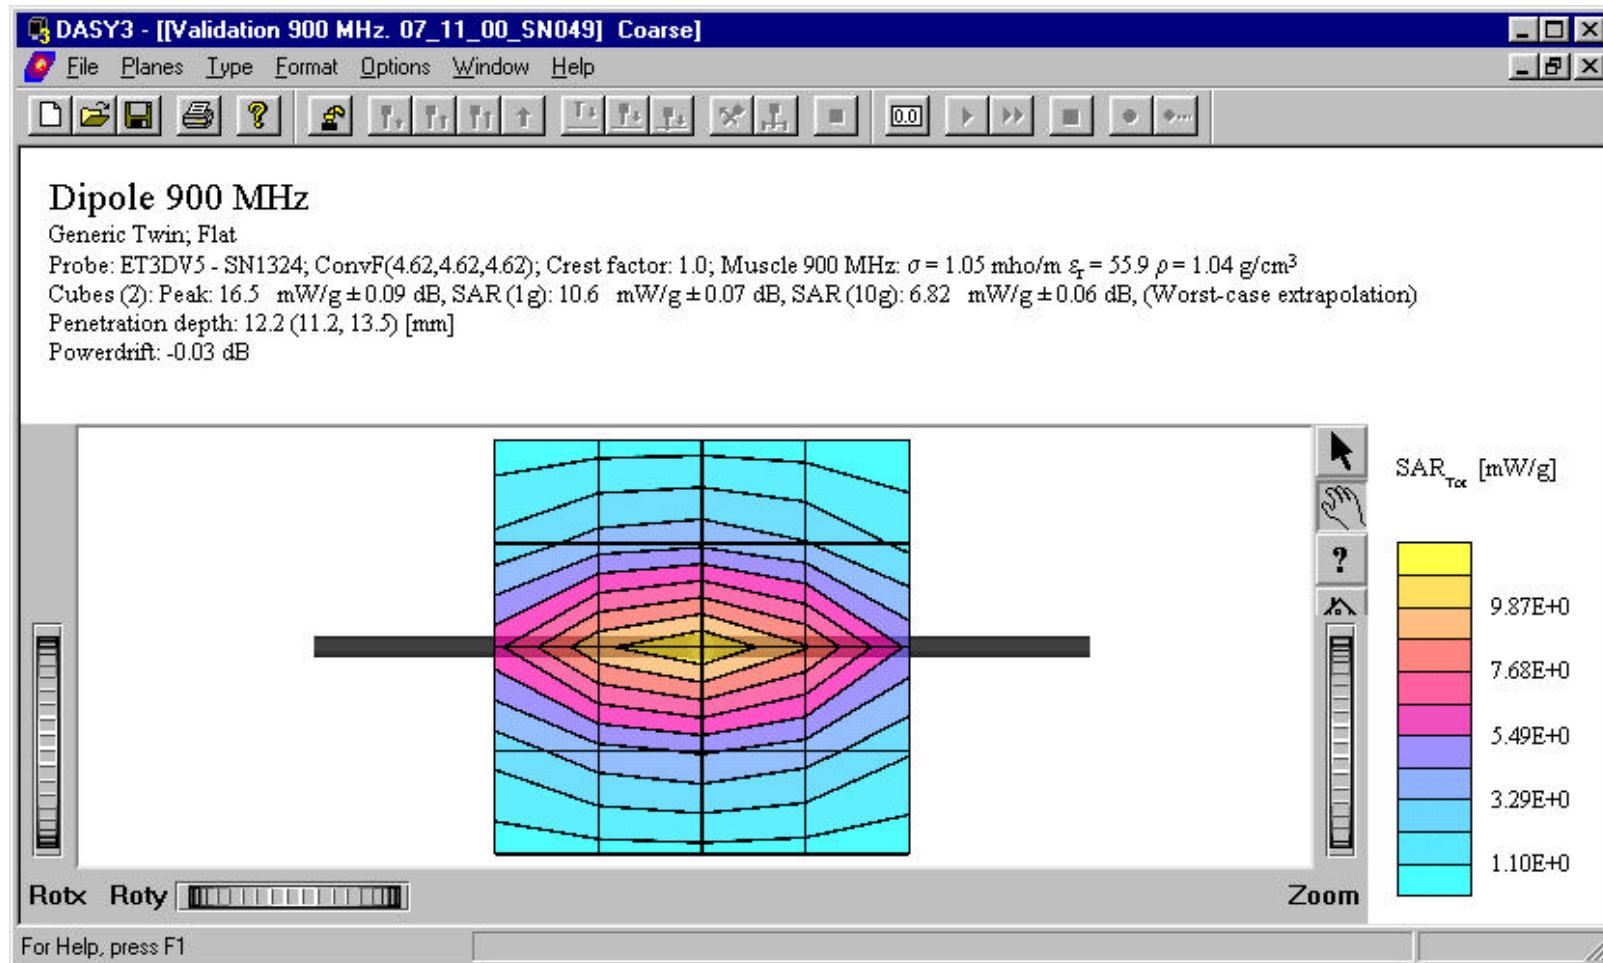

900 MHz SAR distribution of validation dipole antenna from system accuracy verification test.

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1667/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A

EN

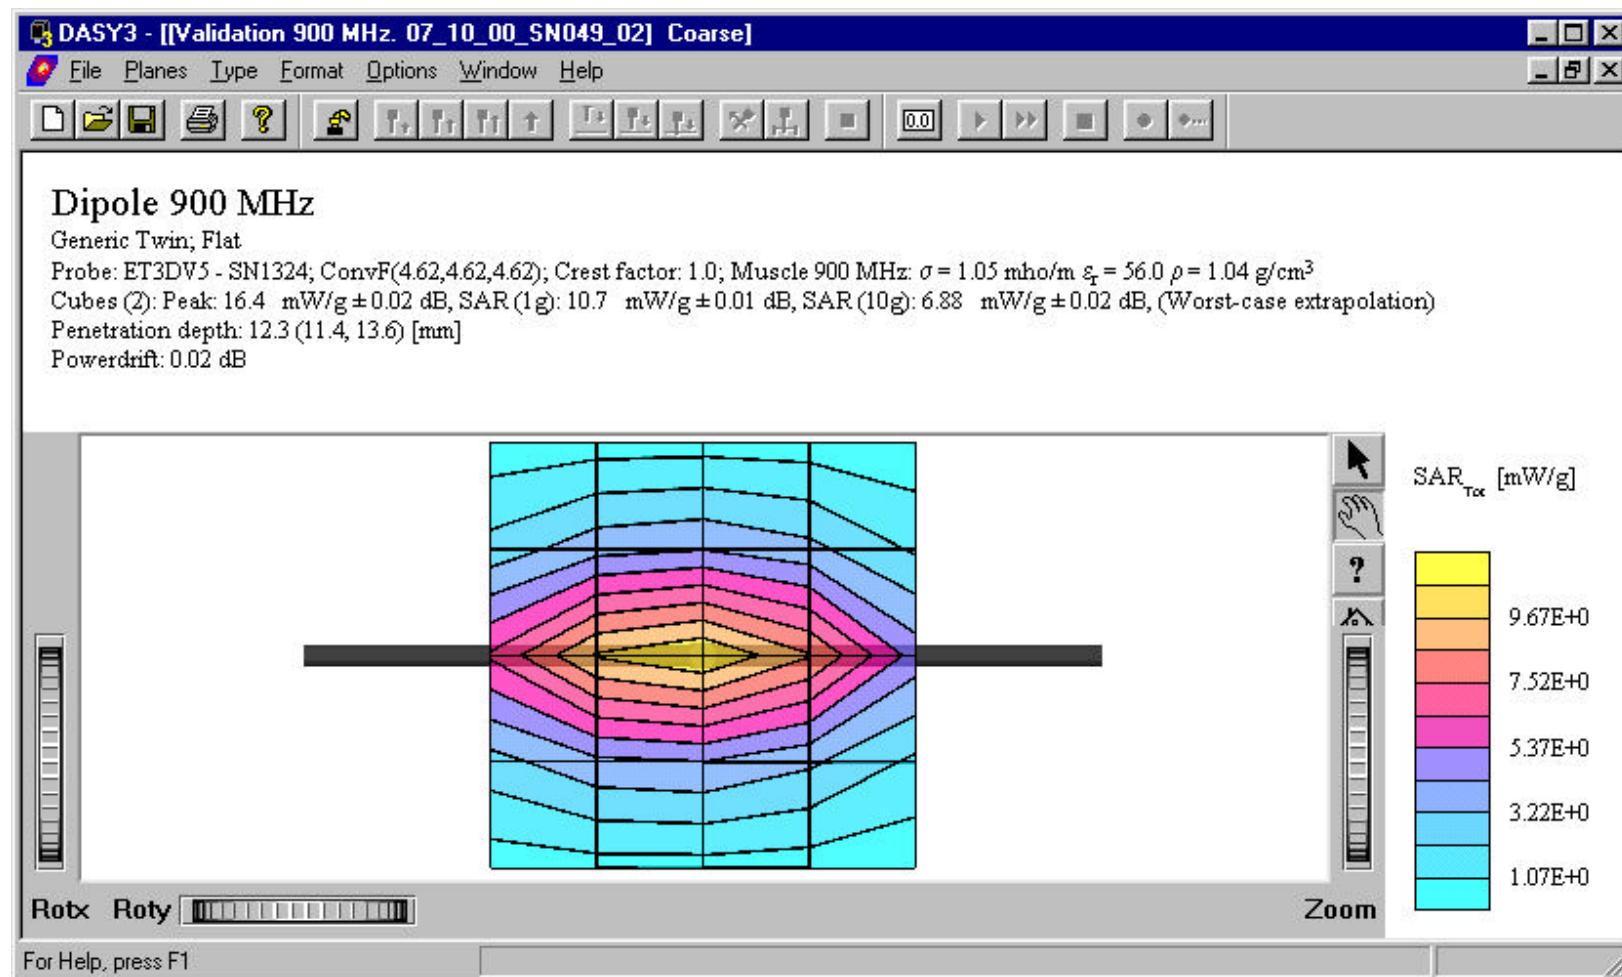


900 MHz SAR distribution of validation dipole antenna from reference measurement.


Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1667/REP
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02 Rev A File U:\FCC_TRNS\Fcc_410 Carmencita Linda\Exhibit11\Source\A1228c body.doc

EN

Appendix 2: SAR distribution plots

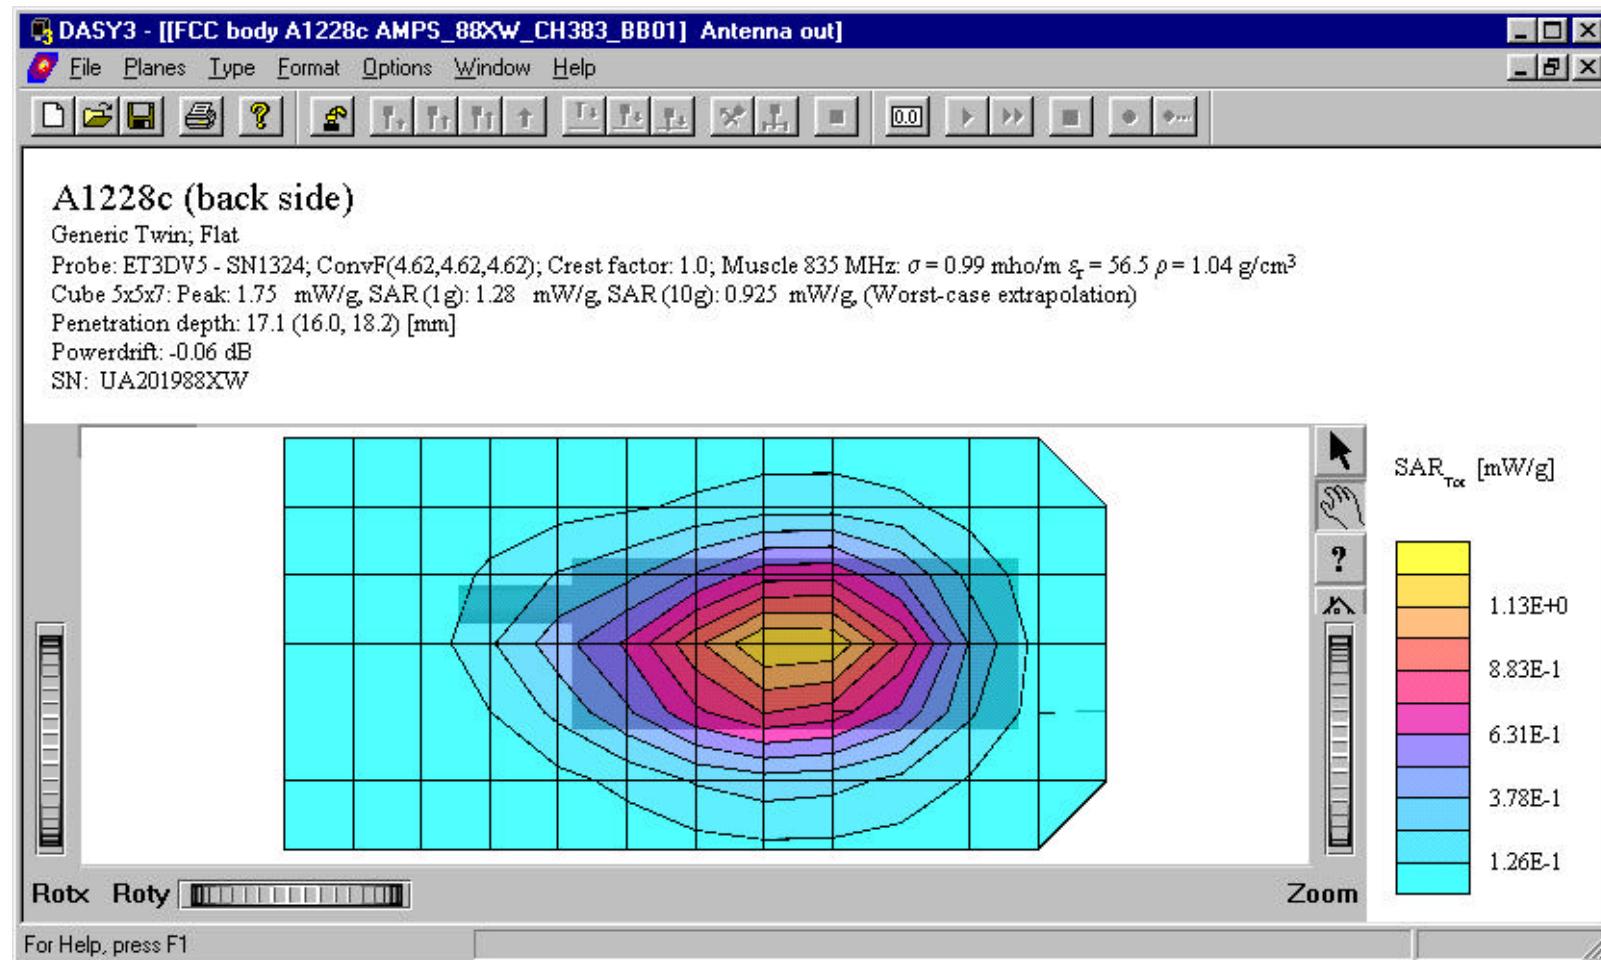

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas	919-472-6334	No. EUS/VR-00:1667/REP	
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A
EN			

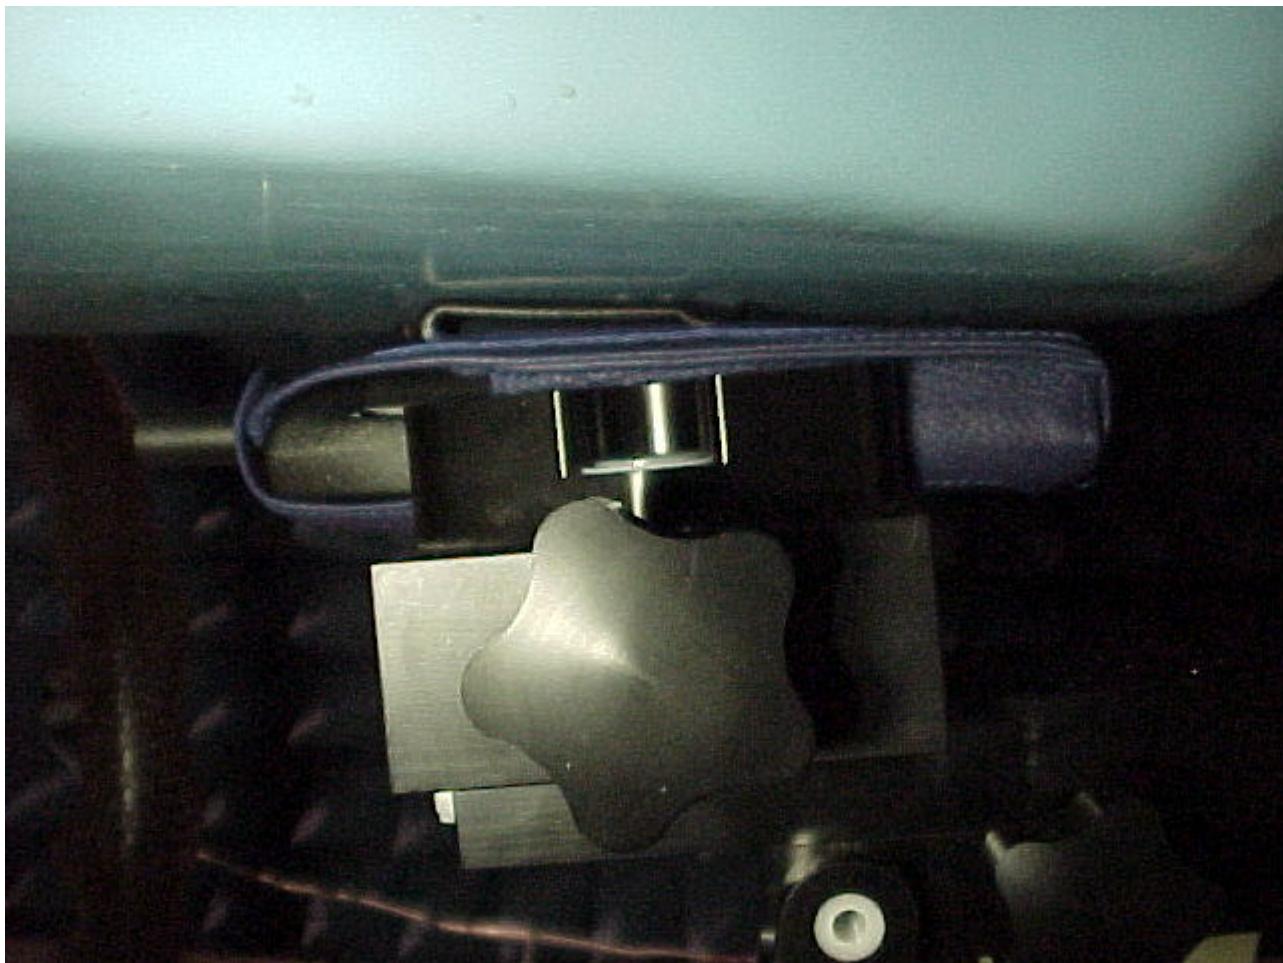Appendix 3: Position of Device on Phantom

Prepared (also subject responsible if other) RT/EUS/VR/X Mark Douglas		No. EUS/VR-00:1667/REP		
Approved EUS/VR/X Mark Douglas	Checked MGD	Date 2000-08-02	Rev A	File U:\FCC_TRNS\Fcc_410 Carmencita Linda\Exhibit11\Source\A1228c body.doc
EN				

Appendix 4: Probe calibration parameters

DASY3 - Parameters of Probe: ET3DV5 SN:1324

Sensitivity in Free Space

NormX	1.51 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.73 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.52 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	104 mV
DCP Y	104 mV
DCP Z	104 mV

Sensitivity in Tissue Simulating Liquid

Brain 450 MHz $\epsilon_r = 48 \pm 5\%$ $\sigma = 0.50 \pm 10\% \text{ mho/m}$

ConvF X	5.07 extrapolated	Boundary effect:
ConvF Y	5.07 extrapolated	Alpha 0.07
ConvF Z	5.07 extrapolated	Depth 4.22

Brain 900 MHz $\epsilon_r = 42.5 \pm 5\%$ $\sigma = 0.86 \pm 10\% \text{ mho/m}$

ConvF X	4.76 $\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	4.76 $\pm 7\%$ (k=2)	Alpha 0.27
ConvF Z	4.76 $\pm 7\%$ (k=2)	Depth 3.47

Brain 1500 MHz $\epsilon_r = 41 \pm 5\%$ $\sigma = 1.32 \pm 10\% \text{ mho/m}$

ConvF X	4.35 interpolated	Boundary effect:
ConvF Y	4.35 interpolated	Alpha 0.54
ConvF Z	4.35 interpolated	Depth 2.48

Brain 1800 MHz $\epsilon_r = 41 \pm 5\%$ $\sigma = 1.69 \pm 10\% \text{ mho/m}$

ConvF X	4.15 $\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	4.15 $\pm 7\%$ (k=2)	Alpha 0.68
ConvF Z	4.15 $\pm 7\%$ (k=2)	Depth 1.98

Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	2.0 \pm 0.2	mm