



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 90

TEST REPORT

| | |
|----------------------|--|
| APPLICANT | VERTEX STANDARD USA, INC. |
| | 8000 WEST SUNRISE BLVD. FT. LAUDERDALE FL 33322 USA |
| FCC ID | AXI11153020 |
| MODEL NUMBER | EVX-539-D0-5, EVX-534-D0-5 |
| PRODUCT DESCRIPTION | HANDHELD VHF TRANSCEIVER |
| DATE SAMPLE RECEIVED | 5/20/2013 |
| DATE TESTED | 5/21/2013 |
| TESTED BY | NAM NGUYEN |
| APPROVED BY | NAM NGUYEN |
| TIMCO REPORT NO. | 879AUT13TestReport.doc |
| TOTAL PAGES | 28 PAGES |
| TEST RESULTS | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL |

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.





TABLE OF CONTENTS

| | |
|--|----|
| GENERAL REMARKS..... | 3 |
| GENERAL INFORMATION | 4 |
| EQUIPMENT LIST..... | 5 |
| TEST PROCEDURE | 6 |
| RF POWER OUTPUT..... | 7 |
| MODULATION CHARACTERISTICS | 8 |
| AUDIO FREQUENCY RESPONSE | 9 |
| VOICE MODULATED COMMUNICATION EQUIPMENT..... | 10 |
| OCCUPIED BANDWIDTH..... | 12 |
| OCCUPIED BANDWIDTH PLOTS..... | 14 |
| SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)..... | 22 |
| FIELD STRENGTH OF SPURIOUS EMISSIONS | 24 |
| FREQUENCY STABILITY..... | 27 |
| TRANSIENT FREQUENCY BEHAVIOR | 28 |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Nam Nguyen
Project Manager/Testing Technician

Date: May 28, 2013

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11153020
Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

GENERAL INFORMATION

DUT Specification

| | |
|--------------------------------|---|
| DUT Description | HANDHELD VHF TRANSCEIVER |
| FCC ID | AXI11153020 |
| Model Number | EVX-539-D0-5, EVX-534-D0-5 |
| Operating Frequency | 136 – 174 MHz |
| Test Frequencies | 138.5, 148.5, 155.0, and 173.5 MHz |
| No. of Channels | 512 |
| Type of Emission | 11K2F3E, 11K2F3D, 7K60FXD, 7K60FXE, 7K60F1D, 7K60F1E, 7K60F1W |
| Modulation | FM |
| DUT Power Source | <input type="checkbox"/> 110–120Vac/50– 60Hz |
| | <input type="checkbox"/> DC Power 12V |
| | <input checked="" type="checkbox"/> Battery Operated Exclusively |
| Test Item | <input type="checkbox"/> Prototype |
| | <input checked="" type="checkbox"/> Pre-Production |
| | <input type="checkbox"/> Production |
| Type of Equipment | <input type="checkbox"/> Fixed |
| | <input type="checkbox"/> Mobile |
| | <input checked="" type="checkbox"/> Portable |
| Test Conditions | The temperature was 26°C with a relative humidity of 50%. |
| Modification to the DUT | None |
| Test Exercise | The DUT was placed in continuous transmit mode. |
| Applicable Standards | ANSI/TIA 603-C:2004, FCC CFR 47 Part 90 |
| Test Facility | Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

EQUIPMENT LIST

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|---------------------------------------|---------------------|---------------|--------------------------|----------------------|-----------------|
| Analyzer Tan Tower Spectrum Analyzer | HP | 8566B Opt 462 | 3138A07786 3144A20661 | 10/28/11 | 10/28/13 |
| Analyzer Tan Tower Preamplifier | HP | 8449B-H02 | 3008A00372 | 10/28/11 | 10/28/13 |
| Analyzer Tan Tower RF Preselector | HP | 85685A | 3221A01400 | 10/28/11 | 10/28/13 |
| Analyzer Tan Tower Quasi-Peak Adapter | HP | 85650A | 3303A01690 | 10/28/11 | 10/28/13 |
| Power Meter | Boonton Electronics | 4531 | 11793 | 1/9/13 | 1/9/15 |
| Sensor | Boonton | 51072A | 34647 | 01/19/13 | 01/19/15 |
| Antenna: Biconnical | Eaton | 94455-1 | 1096 | 05/10/13 | 05/10/15 |
| Antenna: Log-Periodic | Electro-Metrics | LPA-25 | 1122 | 05/09/13 | 05/09/15 |
| Horn Antenna | ETS | 3117 | 35923 | 12/7/11 | 12/7/13 |
| Antenna: Dipole Kit | Electro-Metrics | TDA-30/1-4 | 152 | 11/01/09 | 11/01/99 |
| DC Power Supply | HP | 6264B | | 03/21/12 | 03/21/14 |
| Frequency Counter | HP | 5385A | 2730A03025 | 08/17/11 | 08/17/13 |
| Signal Generator | HP | 8640B | 2308A21464 | 02/23/12 | 02/23/14 |
| Hygro-Thermometer | Extech | 445703 | 0602 | 06/15/11 | 06/15/13 |
| Digital Multimeter | Fluke | 77 | 35053830 | 09/09/11 | 09/09/13 |
| EMI Receiver | Rohde & Schwarz | ESIB40 | 100274 | 3/16/12 | 3/16/14 |
| Directional Coupler | HP | 778D | 1144A08107 | 5/14/12 | 5/14/14 |
| Oscilloscope | Lecroy | LT364L | 00543 | 6/15/11 | 6/15/13 |
| Temperature Chamber | Tenney Engineering | TTRC | 11717-7 | 07/03/12 | 07/03/14 |
| Notch Filter | Microlab | HA-10N | | 6/14/12 | 6/14/14 |
| 3-Meter Semi-Anechoic Chamber | Panashield | N/A | N/A | 12/31/11 | 12/31/13 |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc



TEST PROCEDURE

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C:2004, using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C:2004, using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum ANSI/TIA 603-C:2004, receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 76°F with a humidity of 55%.

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11153020
Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

RF POWER OUTPUT

Rule Part No.: Part 2.1046(a), Part 90

Test Requirements:

Method of Measurement: RF power is measured by using a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage (if battery operated), or a properly adjusted power supply (if not battery operated), and the transmitter properly adjusted the RF output measures:

For the device with a fixed or integral antenna, the RF power is measured as ERP. The substitution method was used. The RF output measures:

Test Setup Diagram:



Test Data:

OUTPUT POWER:

| Tuned Frequency MHz | RF POWER (W) | |
|------------------------|--------------|------|
| | HI | LOW |
| 138.10 | 5.07 | 0.27 |
| 148.50 | 4.80 | 0.27 |
| 155.00 | 4.85 | 0.26 |
| 173.50 | 5.04 | 0.29 |

Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER: $(7.4V)(0.95A) = 7.03$ Watts
 FOR HIGH POWER SETTING INPUT POWER: $(7.4V)(1.85A) = 13.69$ Watts

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc



MODULATION CHARACTERISTICS

Part 2.1033(c)

Part 2.1033(c) (4) Type of Emission: 11K2F1D , 11K2F2D, and 11K2F3E

FCC Part 90.209

FCC Part 90.207

DMR TDMA

Type of Emission: 11K2F3E, 11K2F3D

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 2100$$

$$K=1$$

$$B_n = 2(3000) + 2(2100) = 10.2k$$

Type of Emission: 16K0F3D

The EVX-534-D0-5 and EVX-539-D0-5 Digital functions comply with DMR (Digital Mobile Radio).

Format: 2-slot TDMA

Modulation: 4FSK

Bandwidth: 12.5kHz

Data rate: 9,600bps (bit per second)

Voice: AMBE+2 Vocoder (digitized) 3,600bps

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

AUDIO FREQUENCY RESPONSE

Rule Part No.: Part 2.1047(a)(b)


Test Requirements:

Method of Measurement:

Audio frequency response

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

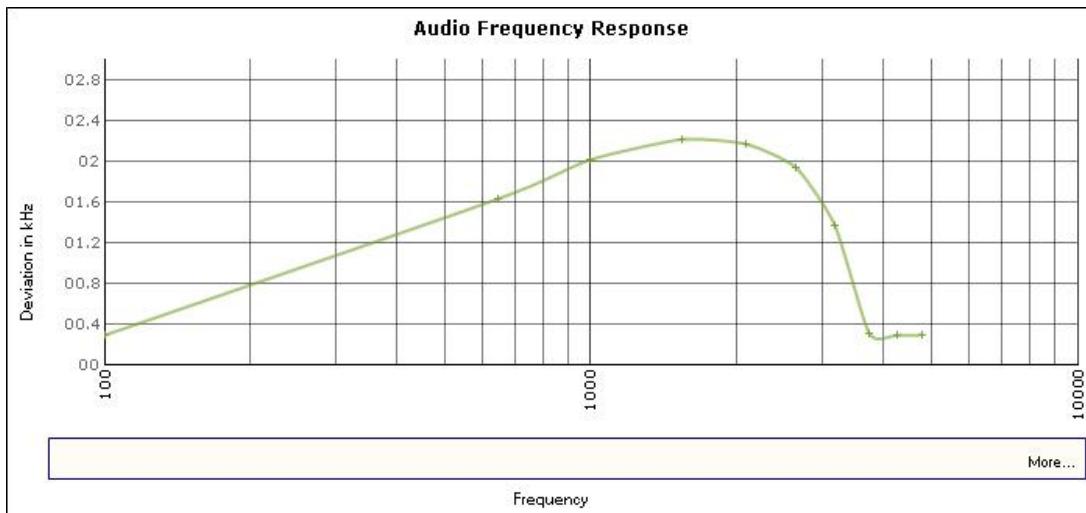

Applicant: VERTEX STANDARD USA, INC.


FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

VOICE MODULATED COMMUNICATION EQUIPMENT

Part 2.1047(a): For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

AUDIO LOW PASS FILTER.

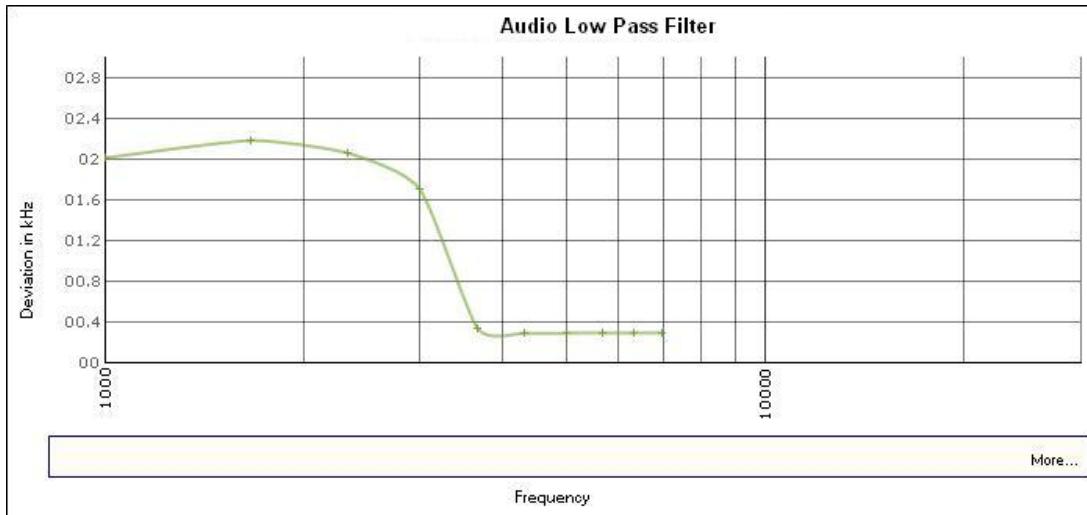

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11153020
Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

AUDIO INPUT VERSUS MODULATION


Rule Part No.: Part 2.1047(b) & 90

Test Requirements:

Method of Measurement: **Modulation cannot exceed 100%**, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Test data:

MODULATION LIMITING PLOT

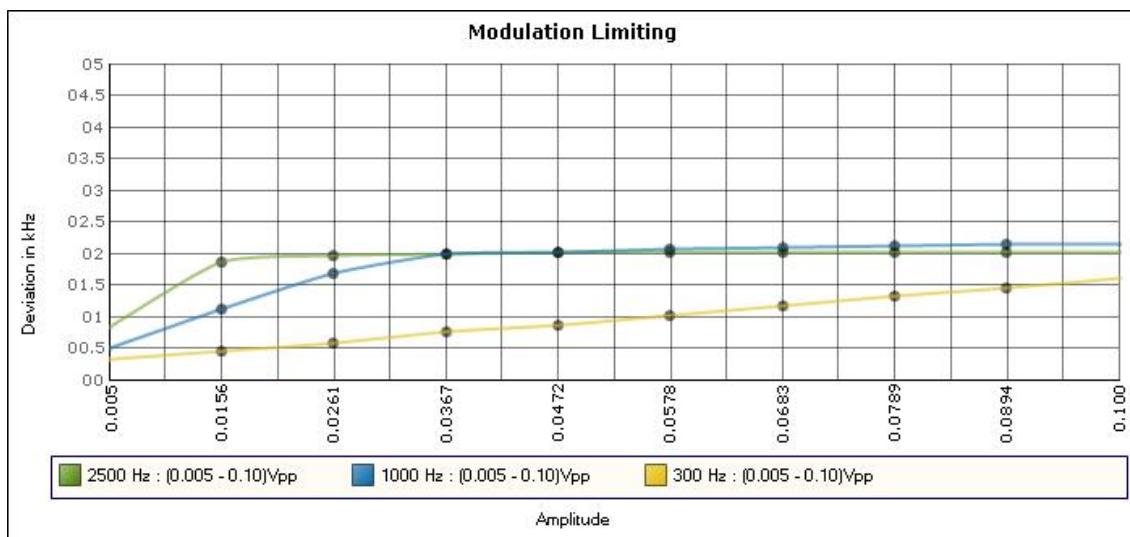

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

OCCUPIED BANDWIDTH

Part 2.1049(c) EMISSION BANDWIDTH:
Part 90.210(b) 25kHz Channel Spacing

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(fd/5)$ dB; (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(fd/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43+10 \log(Po)$ dB.

Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(fd - 5.625)$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Part 90.210(e) Emission Mask E - 6.25 kHz channel BW equipment.

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(fd - 3.0)$ or $55 + 10 \log(P)$ or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz: At least $55 + 10\log(P)$ dB or 65 dB, whichever is the lesser attenuation.


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

Method of Measurement: ANSI/TIA 603-C: 2004

Test Setup Diagram:

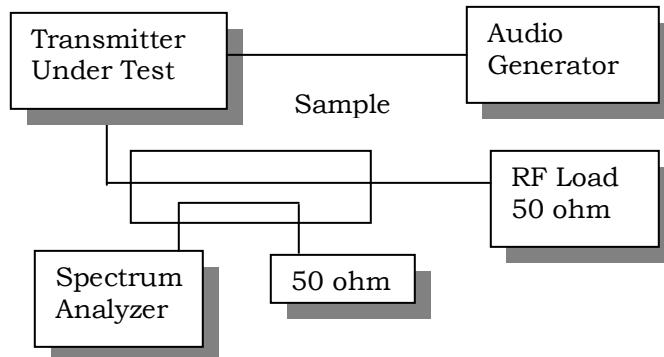


Test Data: See the plots below


Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11153020
Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

OCCUPIED BANDWIDTH PLOTS
Part 90.210(d) Emission Mask D - 12.5 kHz channel

12.5kHz: ANALOG

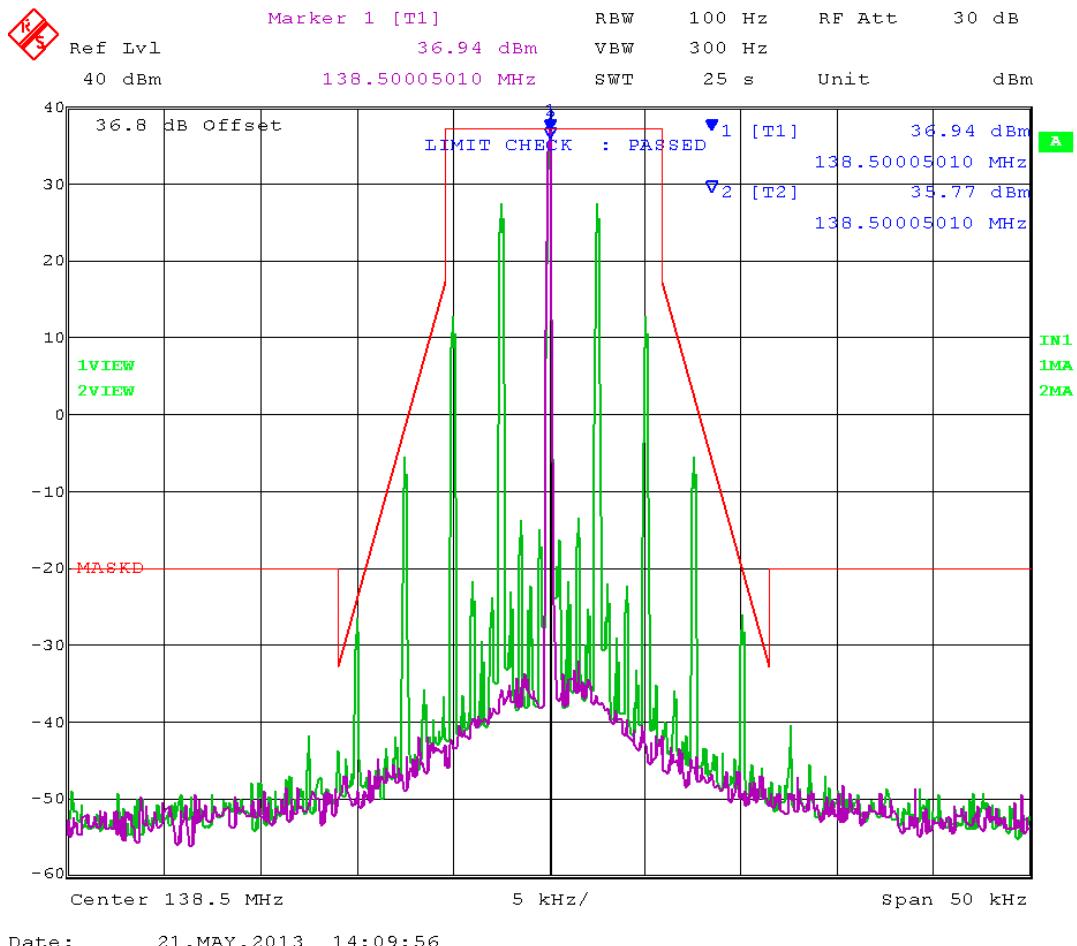


Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V:\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

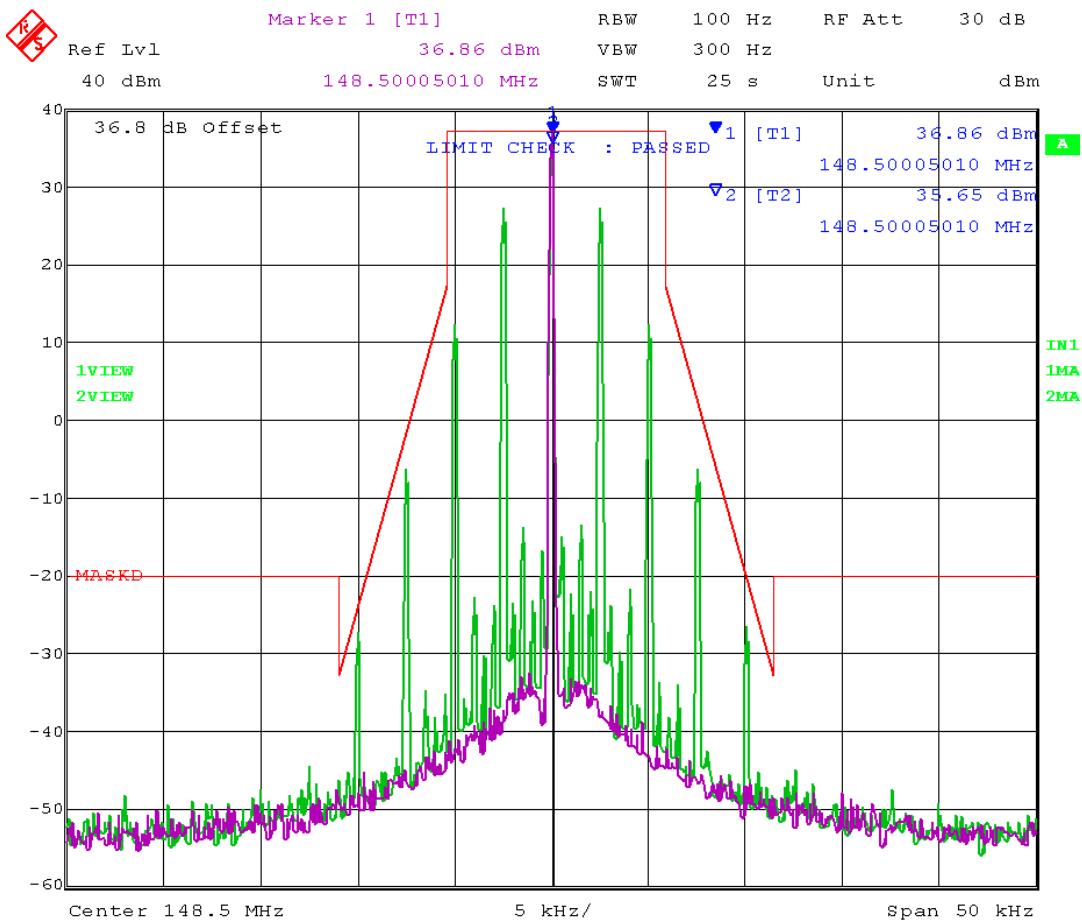


Date: 21.MAY.2013 14:26:16

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

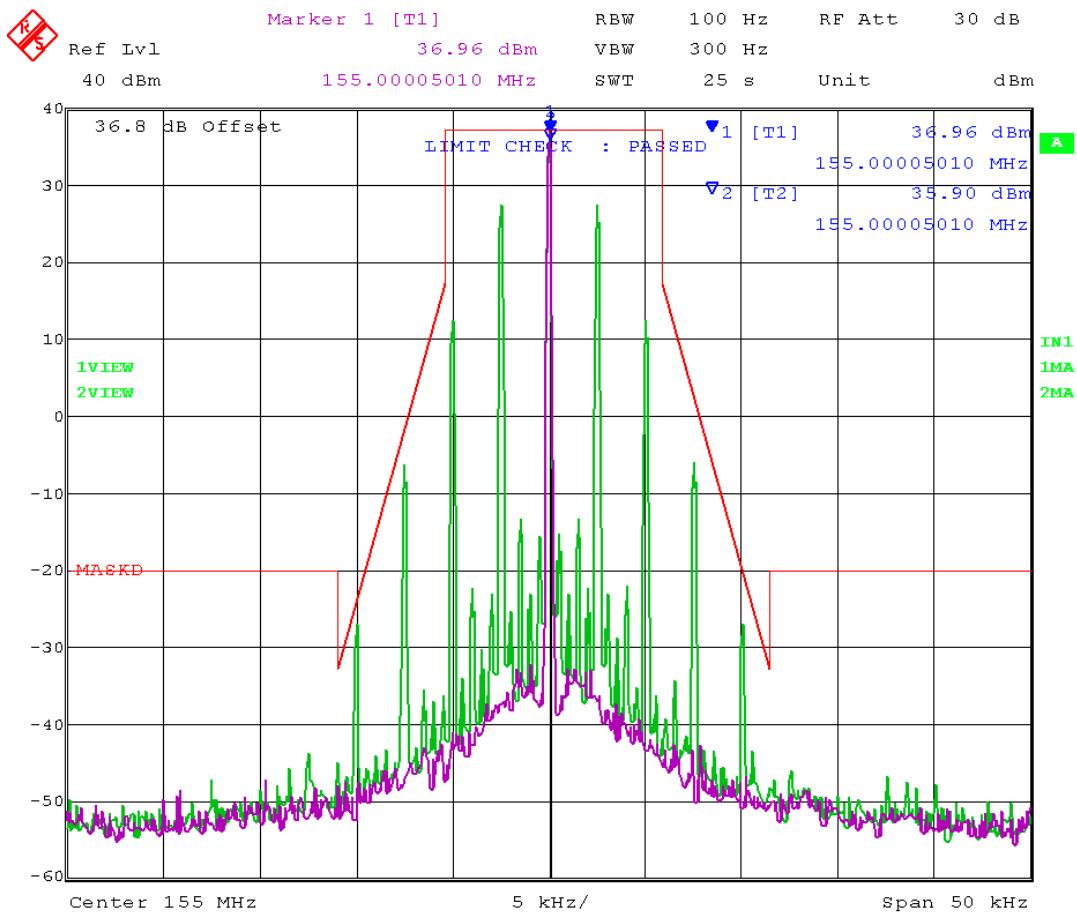

Date: 21.MAY.2013 14:50:32

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

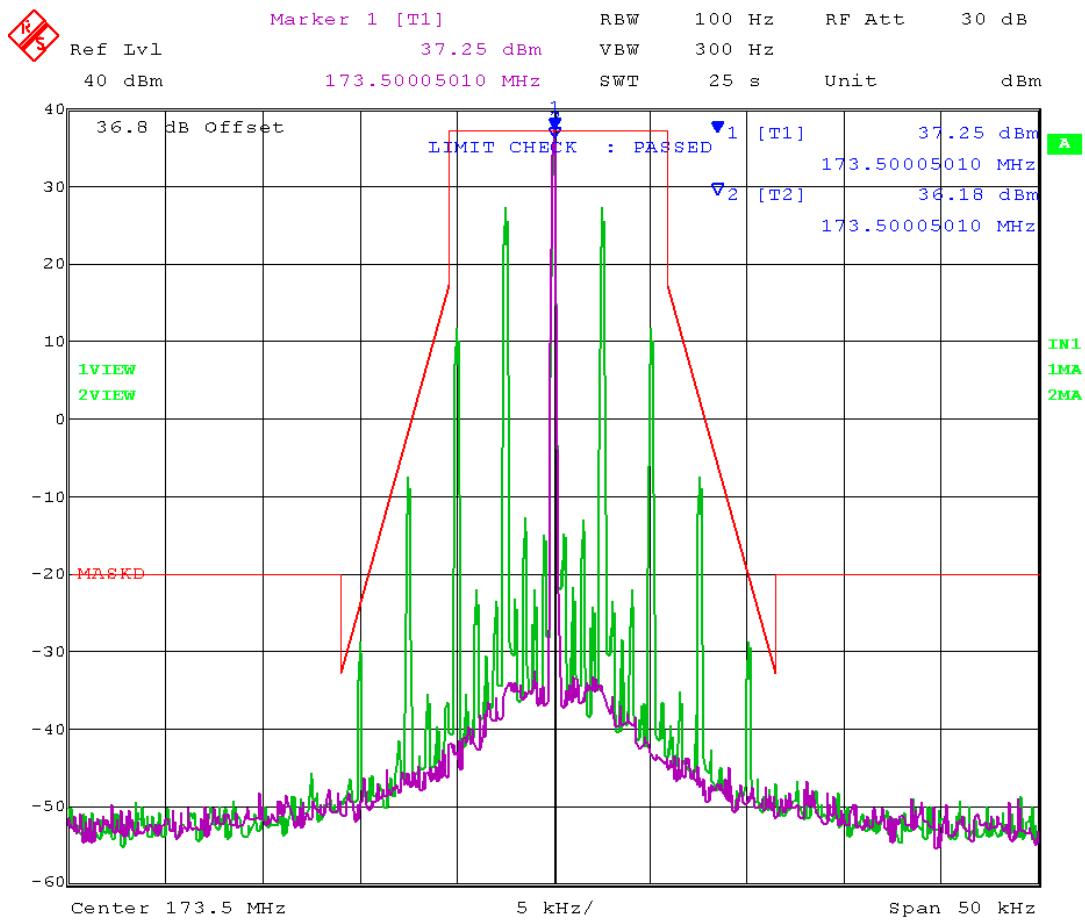


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020


Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

12.5kHz - DIGITAL

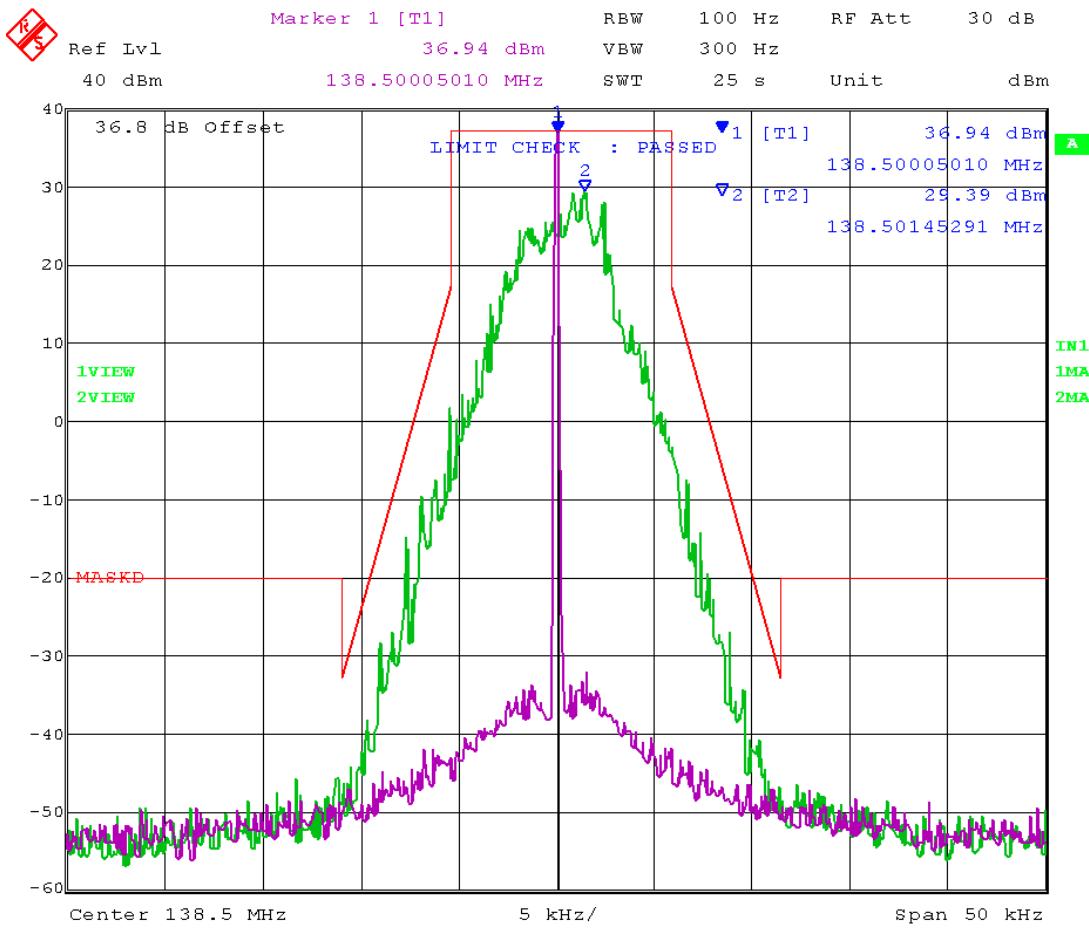


Date: 21.MAY.2013 14:15:50

Applicant: VERTEX STANDARD USA, INC.
FCC ID: AXI11153020
Report: V:\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

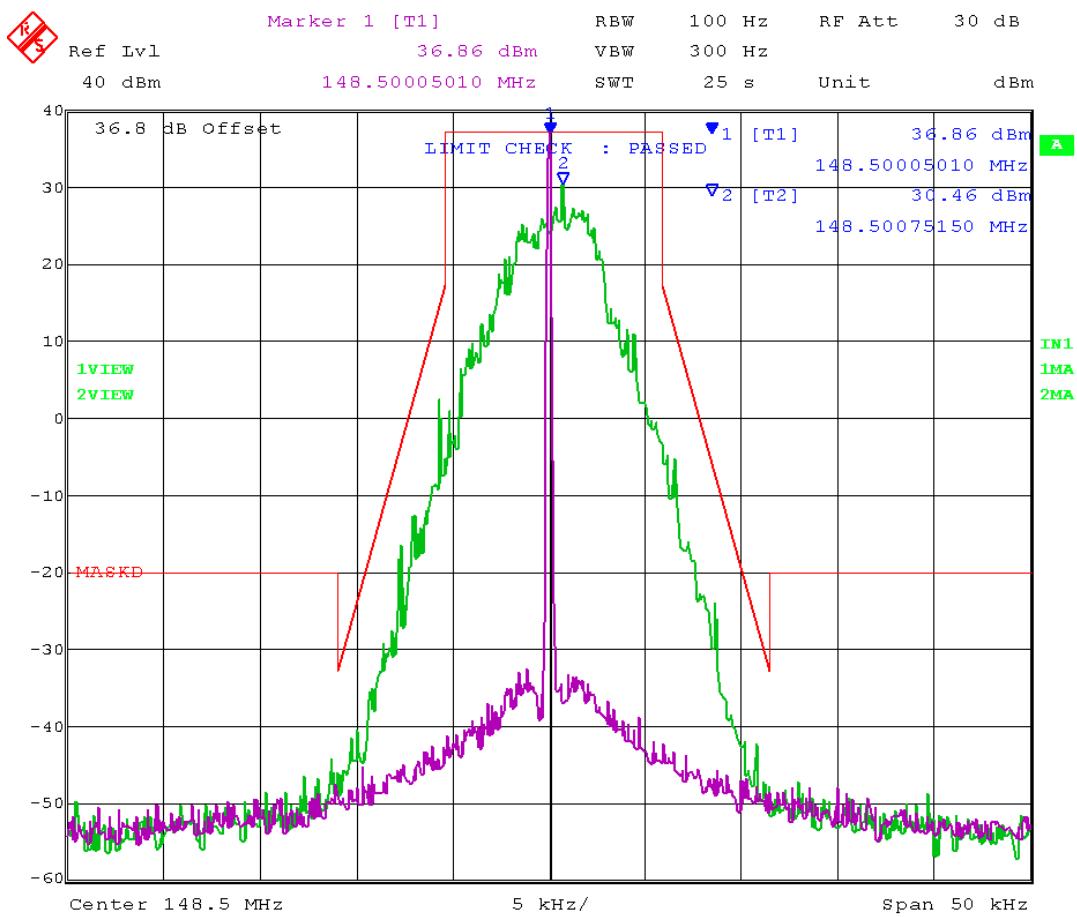


Date: 21.MAY.2013 14:33:29

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

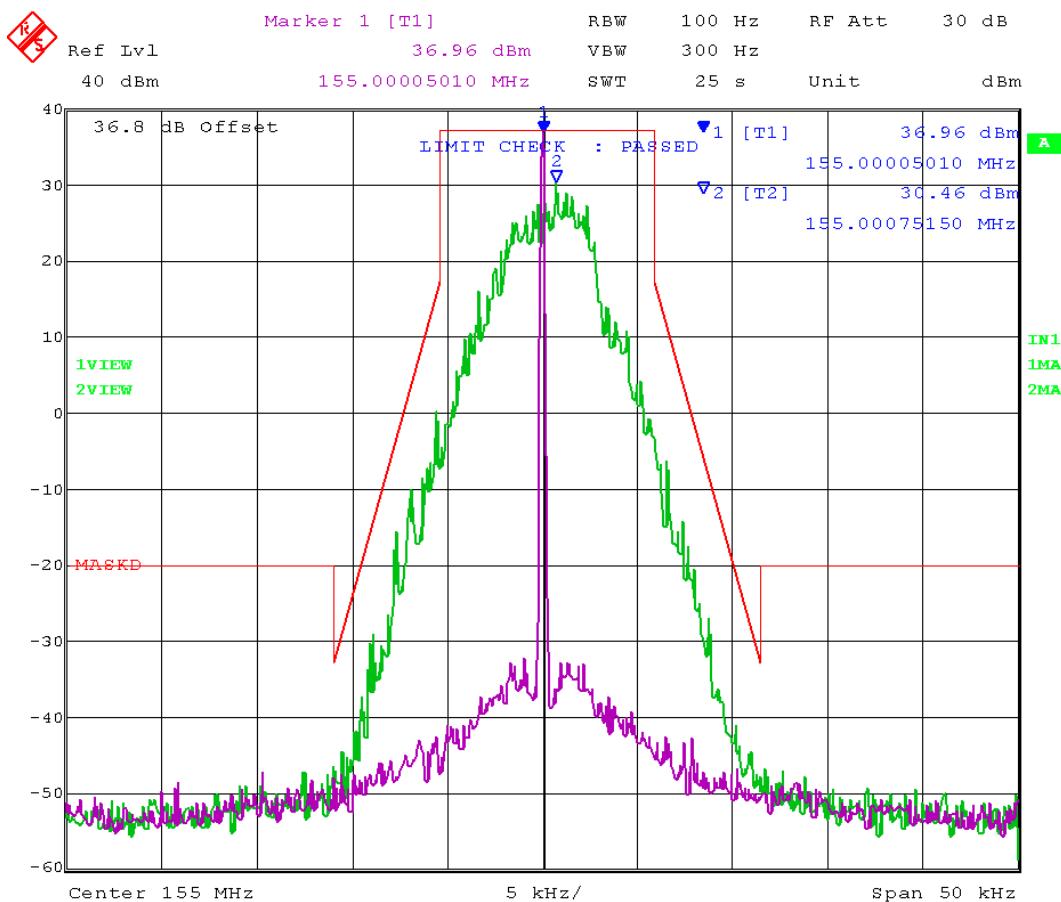

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

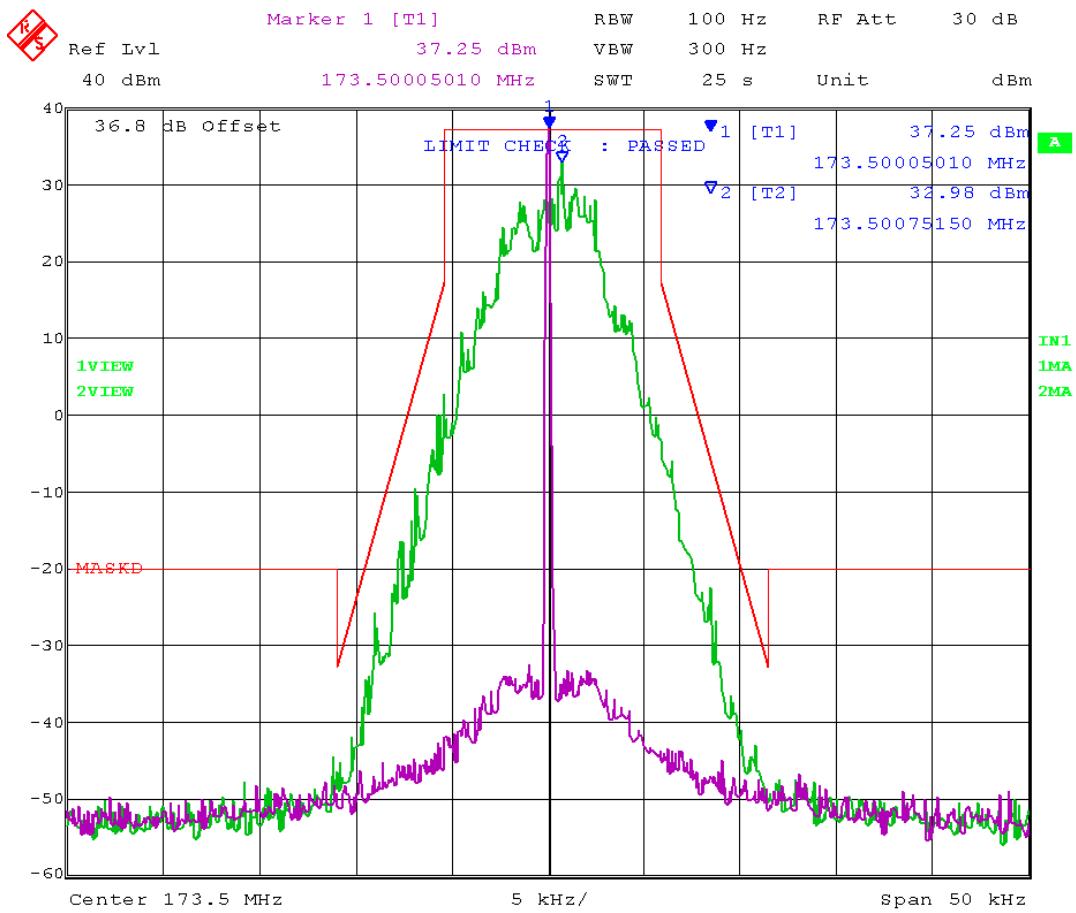

Date: 21.MAY.2013 15:17:39

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: Part 2.1051(a)

Requirements:

12.5kHz Channel Spacing = $50+10\log(5.00) = 57\text{dBc}$ (for 5 Watts)
 12.5kHz Channel Spacing = $50+10\log(0.25) = 37\text{dBc}$ (for 0.25 Watts)

Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C: 2004.

Test Data:

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|------------------|---------|---------------------|--|-----------------|---------|---------------------|
| 138.5 | 277.00 | 71.8 | | 138.5 | 277.00 | 67.0 |
| | 415.50 | 64.6 | | | 415.50 | 73.6 |
| | 554.00 | 76.5 | | | 554.00 | 74.0 |
| | 692.50 | 76.5 | | | 692.50 | 73.5 |
| | 831.00 | 74.6 | | | 831.00 | 73.7 |
| | 969.50 | 75.0 | | | 969.50 | 73.2 |
| | 1108.00 | 77.6 | | | 1108.00 | 74.7 |
| | 1246.50 | 77.4 | | | 1246.50 | 75.9 |
| | 1385.00 | 77.8 | | | 1385.00 | 76.2 |
| | | | | | | |

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|------------------|---------|---------------------|--|-----------------|---------|---------------------|
| 148.5 | 297.00 | 72.4 | | 148.5 | 297.00 | 68.1 |
| | 445.50 | 65.2 | | | 445.50 | 73.2 |
| | 594.00 | 76.0 | | | 594.00 | 73.9 |
| | 742.50 | 75.4 | | | 742.50 | 73.9 |
| | 891.00 | 74.6 | | | 891.00 | 72.7 |
| | 1039.50 | 78.3 | | | 1039.50 | 75.5 |
| | 1188.00 | 77.4 | | | 1188.00 | 75.1 |
| | 1336.50 | 77.1 | | | 1336.50 | 75.4 |
| | 1485.00 | 76.5 | | | 1485.00 | 75.5 |
| | | | | | | |

Applicant: VERTEX STANDARD USA, INC.


FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|--------------------------|-----------|-----------------------------|--|-------------------------|-----------|-----------------------------|
| 155.0 | 310.00 | 71.5 | | 155.0 | 310.00 | 68.8 |
| | 465.00 | 65.4 | | | 465.00 | 73.8 |
| | 620.00 | 75.8 | | | 620.00 | 74.1 |
| | 775.00 | 75.4 | | | 775.00 | 73.1 |
| | 930.00 | 74.3 | | | 930.00 | 71.9 |
| | 1085.00 | 78.2 | | | 1085.00 | 75.1 |
| | 1240.00 | 78.6 | | | 1240.00 | 75.5 |
| | 1395.00 | 77.7 | | | 1395.00 | 75.3 |
| | 1550.00 | 77.8 | | | 1550.00 | 75.1 |
| | | | | | | |

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|--------------------------|-----------|-----------------------------|--|-------------------------|-----------|-----------------------------|
| 173.5 | 347.00 | 68.4 | | 173.5 | 347.00 | 70.6 |
| | 520.50 | 66.0 | | | 520.50 | 72.7 |
| | 694.00 | 76.4 | | | 694.00 | 74.6 |
| | 867.50 | 76.2 | | | 867.50 | 73.8 |
| | 1041.00 | 78.5 | | | 1041.00 | 74.7 |
| | 1214.50 | 77.4 | | | 1214.50 | 76.1 |
| | 1388.00 | 78.1 | | | 1388.00 | 77.2 |
| | 1561.50 | 77.4 | | | 1561.50 | 76.0 |
| | 1735.00 | 77.7 | | | 1735.00 | 75.9 |
| | | | | | | |

Method of Measuring Conducted Spurious Emissions

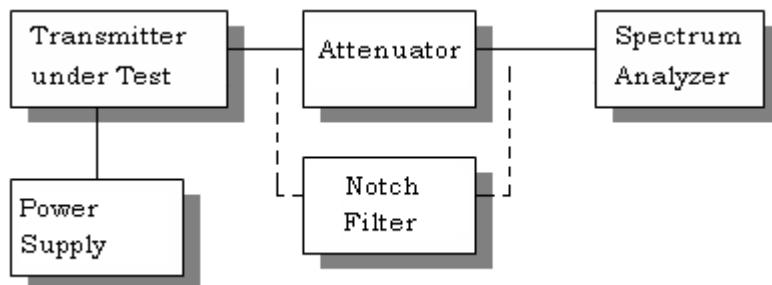

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

FIELD STRENGTH OF SPURIOUS EMISSIONS


Rule Parts. No.: Part 2.1053

Requirements:

$$12.5\text{kHz Channel Spacing} = 50 + 10\log(\text{OP}) = \text{dBc}$$

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

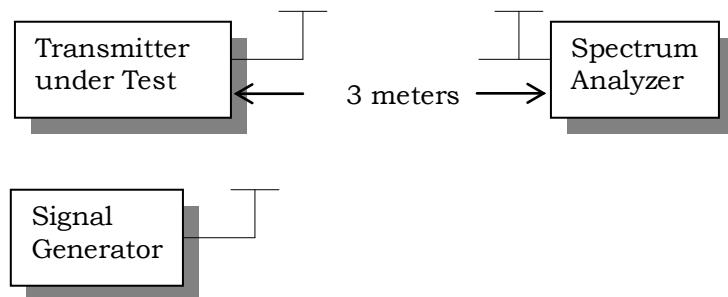

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

Test Data:
High Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 138.50 | 0 | 0 |
| 277.00 | H | 95.5 |
| 415.50 | V | 88.2 |
| 554.00 | V | 81.2 |
| 692.50 | H | 81.1 |
| 831.00 | H | 81.7 |
| 969.50 | V | 89.6 |
| 1108.00 | V | 94.5 |
| 1246.50 | V | 92.9 |
| 1385.00 | V | 93.2 |

Low Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 138.50 | 0 | 0 |
| 277.00 | H | 69.4 |
| 415.50 | V | 84.6 |
| 554.00 | V | 74.4 |
| 692.50 | H | 80.2 |
| 831.00 | H | 80.6 |
| 969.50 | H | 84.2 |
| 1108.00 | V | 82.0 |
| 1246.50 | V | 82.7 |
| 1385.00 | H | 83.2 |

High Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 148.50 | 0 | 0 |
| 297.00 | H | 83.3 |
| 445.50 | V | 90.0 |
| 594.00 | V | 83.4 |
| 742.50 | H | 79.6 |
| 891.00 | V | 81.8 |
| 1039.50 | V | 84.0 |
| 1188.00 | V | 81.3 |
| 1336.50 | V | 85.0 |
| 1485.00 | V | 82.9 |

Low Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 148.50 | 0 | 0 |
| 297.00 | H | 74.6 |
| 445.50 | V | 76.4 |
| 594.00 | V | 70.8 |
| 742.50 | H | 81.3 |
| 891.00 | H | 75.7 |
| 1039.50 | H | 77.7 |
| 1188.00 | V | 82.7 |
| 1336.50 | V | 85.1 |
| 1485.00 | V | 81.8 |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

HIGH POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 155.00 | 0 | 0 |
| 310.00 | H | 87.5 |
| 465.00 | V | 89.1 |
| 620.00 | V | 81.4 |
| 775.00 | H | 71.7 |
| 930.00 | V | 86.3 |
| 1085.00 | V | 94.7 |
| 1240.00 | V | 84.1 |
| 1395.00 | V | 84.4 |
| 1550.00 | V | 82.6 |

LOW POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 155.00 | 0 | 0 |
| 310.00 | H | 81.3 |
| 465.00 | V | 79.2 |
| 620.00 | V | 76.9 |
| 775.00 | H | 85.1 |
| 930.00 | H | 78.6 |
| 1085.00 | V | 80.9 |
| 1240.00 | V | 83.7 |
| 1395.00 | V | 83.3 |
| 1550.00 | V | 82.3 |

HIGH POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 173.50 | 0 | 0 |
| 347.00 | H | 86.9 |
| 520.50 | V | 76.9 |
| 694.00 | H | 91.3 |
| 867.50 | H | 79.2 |
| 1041.00 | V | 89.3 |
| 1214.50 | V | 93.7 |
| 1388.00 | V | 89.2 |
| 1561.50 | V | 92.1 |
| 1735.00 | V | 94.6 |

LOW POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 173.50 | 0 | 0 |
| 347.00 | H | 82.6 |
| 520.50 | V | 78.5 |
| 694.00 | H | 79.3 |
| 867.50 | V | 78.3 |
| 1041.00 | V | 84.8 |
| 1214.50 | V | 83.7 |
| 1388.00 | V | 82.6 |
| 1561.50 | V | 82.8 |
| 1735.00 | V | 82.4 |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 90.213

Requirements: Temperature range requirements: -30 to +50° C.
 Voltage Variation +, -15%
 ±2.5 PPM

Method of Measurements: ANSI/TIA 603-C: 2004.

Test Data:

| Assigned Frequency (Ref. Frequency) (MHz) | | 155.000082 |
|--|------------------------|----------------------------------|
| Temperature (°C) | Frequency (MHz) | Frequency Stability (PPM) |
| -30 | 155.000036 | -0.30 |
| -20 | 155.000075 | -0.05 |
| -10 | 155.000115 | 0.21 |
| 0 | 155.000112 | 0.19 |
| +10 | 155.000095 | 0.08 |
| +20 | 155.000100 | 0.12 |
| +30 | 155.000112 | 0.19 |
| +40 | 155.000117 | 0.23 |
| +50 | 155.000102 | 0.13 |

| Assigned Frequency (Ref. Frequency) (MHz) | | |
|--|------------------------|----------------------------------|
| % Battery | Frequency (MHz) | Frequency Stability (PPM) |
| -15% | 155.000085 | 0.02 |
| 0 | 155.000082 | 0.0 |
| +15% | 155.000089 | 0.05 |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

TRANSIENT FREQUENCY BEHAVIOR

FCC Part 2.1055(a)(1)

Part 90.214 Transient Frequency Behavior

REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time Intervals | Maximum frequency difference | All Equipment | |
|----------------|------------------------------|---------------|-------------|
| | | 150-174 MHz | 421-512 MHz |
| | | | |

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

| | | | |
|---------|----------------|---------|---------|
| t_1^4 | ± 25.0 kHz | 5.0 ms | 10.0 ms |
| t_2 | ± 12.5 kHz | 20.0 ms | 25.0 ms |
| t_3^4 | ± 25.0 kHz | 5.0 ms | 10.0 ms |

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

| | | | |
|---------|----------------|---------|---------|
| t_1^4 | ± 12.5 kHz | 5.0 ms | 10.0 ms |
| t_2 | ± 6.25 kHz | 20.0 ms | 25.0 ms |
| t_3^4 | ± 12.5 kHz | 5.0 ms | 10.0 ms |



Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

| | | | |
|---------|-----------------|---------|---------|
| t_1^4 | ± 6.25 kHz | 5.0 ms | 10.0 ms |
| t_2 | ± 3.125 kHz | 20.0 ms | 25.0 ms |
| t_3^4 | ± 6.25 kHz | 5.0 ms | 10.0 ms |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020


Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

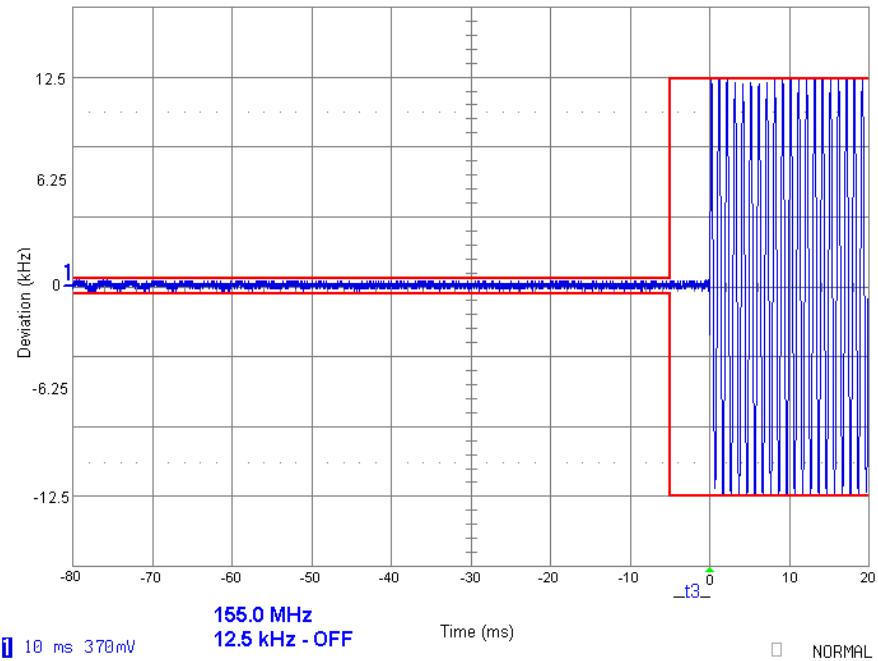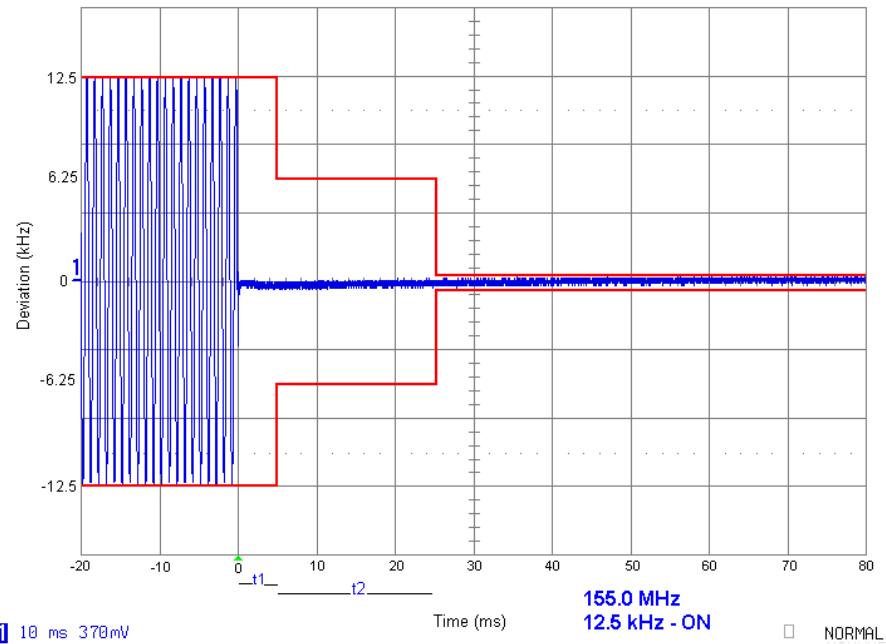

Applicant: VERTEX STANDARD USA, INC.
 FCC ID: AXI11153020
 Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc

TEST PROCEDURE: ANSI/TIA 603-C:2004, the levels were set as follows:

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above, the transient frequency behavior was observed and recorded.

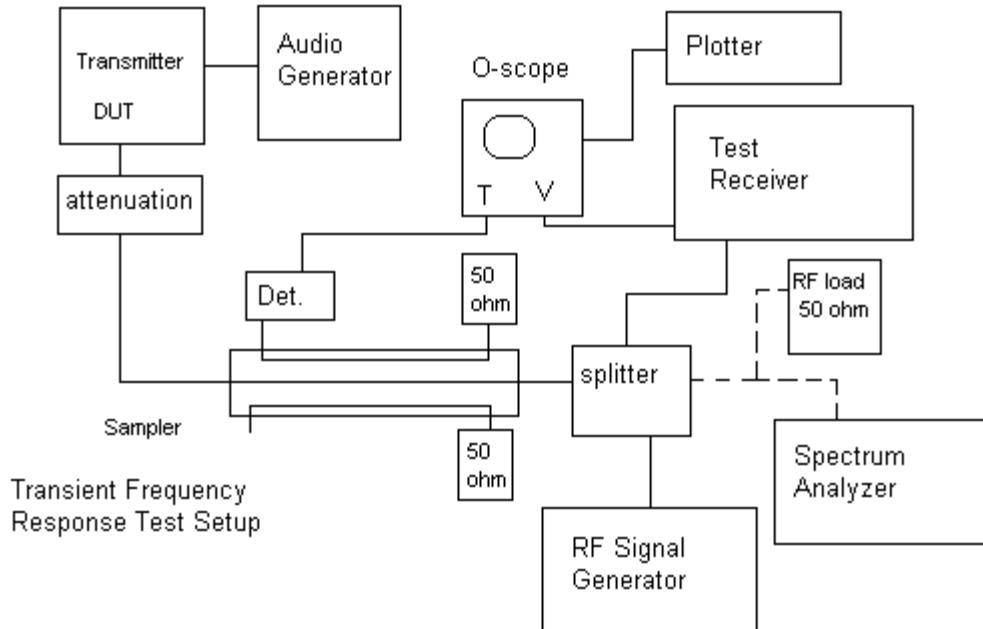

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11153020

Report: V\VERTEX STANDARD USA\879AUT13\879AUT13TestReport.doc