

Date(s) of Evaluation

June 10-13, 2013

Test Report Serial No.

060513AXI-1237S

Test Report Revision No.

Rev. 1.0 (1st Release)

Test Report Issue Date

Jun. 18, 2013

Description of Test(s)

Specific Absorption Rate

RF Exposure Category

Occupational (Controlled)



Test Lab Certificate No. 2470.01

DECLARATION OF COMPLIANCE - SAR RF EXPOSURE EVALUATION (FCC/IC)

Test Lab Information		Name	CELLTECH LABS INC.			
		Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
Test Lab Accreditation(s)		A2LA	ISO/IEC 17025:2005 (A2LA Test Lab Certificate No. 2470.01)			
Applicant Information		Name	VERTEX STANDARD USA INC.			
		Address	8000 West Sunrise Blvd. Ft. Lauderdale, FL 33322, USA			
Application Type(s)		FCC	TCB Certification	IC	CB Certification	
Standard(s) Applied		FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6	
Procedure(s) Applied		FCC	OET Bulletin 65, Supplement C	FCC	KDB 447498 D01v05	
		FCC	KDB 643646 D01v01	IC	RSS-102 Issue 4	
Device Classification(s)		FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF) - FCC Part 90			
		IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz) - RSS-119 Issue 10			
Device Identifier(s)		FCC ID:	AXI11154720	IC	10239A-11154720	
Device Model(s)		EVX-539-G7-5 (P/N: AC115U003)				
		EVX-534-G7-5 (P/N: AC115U001) - differs only in front keypad, otherwise radios are identical				
Test Sample Revision No.s		Hardware	n/a	Firmware	n/a	
Date of Sample Receipt		Jun. 5, 2013		Date(s) of SAR Evaluations	June 10-13, 2013	
Device Description		Portable FM UHF Push-To-Talk (PTT) Radio Transceiver				
Transmit Frequency Range		FCC	450.0 - 512.0 MHz			
		IC	450.0 - 470.0 MHz			
Manuf. Rated Output Power		5 Watts (Conducted)		Manuf. Tolerance Specification	+/- 10%	
Antenna Type(s) Tested		See manufacturer's accessory listing (Section 7.0)				
Battery Type(s) Tested		Li-ion	7.4 V	1350mAh	P/N: FNB-V133LI	
		Li-ion	7.4 V	2250 mAh	P/N: FNB-V134LI	
Body-worn Accessories Tested		Belt-Clip (contains metal)			P/N: CLIP-20	
Audio Accessories Tested		See manufacturer's accessory listing (Section 7.0)				
Max. SAR Level(s) Evaluated		Face-held (FCC)	2.90 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exposure
		Face-held (IC)	2.85 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exposure
		Body-worn (FCC)	5.65 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exposure
		Body-worn (IC)	3.69 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exposure
FCC Spatial Peak SAR Limit		Head/Body	8.0 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exposure
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.						
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.						
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.						
The results and statements contained in this report pertain only to the device(s) evaluated.						
Test Report Approved By				Mike Meaker	Engineering Technologist	Celltech Labs Inc.

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720		
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz			
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 1 of 68						

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	4
4.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	ERROR! BOOKMARK NOT DEFINED.
5.0 NO. OF TEST CHANNELS (N_c)	5
6.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING	5
7.0 FLUID DIELECTRIC PARAMETERS	6
8.0 SAR MEASUREMENT SUMMARY	8
9.0 SAR SCALING (TUNE-UP TOLERANCE)	11
10.0 DETAILS OF SAR EVALUATION	12
11.0 SAR EVALUATION PROCEDURES	12
12.0 SYSTEM PERFORMANCE CHECK	13
13.0 SIMULATED EQUIVALENT TISSUES	14
14.0 SAR LIMITS	14
15.0 ROBOT SYSTEM SPECIFICATIONS	15
16.0 PROBE SPECIFICATION (ET3DV6)	16
17.0 BARSKI PLANAR PHANTOM	16
18.0 DEVICE HOLDER	16
19.0 TEST EQUIPMENT LIST	17
20.0 MEASUREMENT UNCERTAINTIES	18
21.0 REFERENCES	19
APPENDIX A - SAR MEASUREMENT PLOTS	20
APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS	41
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	46
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	49
APPENDIX E - DIPOLE CALIBRATION	66
APPENDIX F - PROBE CALIBRATION	67
APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	68

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

REVISION HISTORY			
REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	Initial Release	Mike Meaker	Jun. 17, 2013

TEST REPORT SIGN-OFF			
DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mike Meaker	Cheri Frangaidakis	Mike Meaker	Mike Meaker

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.						Page 3 of 68

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the Vertex Standard USA Inc. Model(s): EVX-534-G7-5 and EVX-539-G7-5 Portable UHF PTT Radio Transceiver FCC ID: AXI11154720 complies with the SAR (Specific Absorption Rate) RF exposure requirements of FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and IEC Standard 62209-1:2005 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (joystick), and remote control is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.

3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

MEASURED RF CONDUCTED OUTPUT POWER LEVELS

Test Frequency	Mode	Model: EVX-539-G7-5		Model: EVX-534-G7-5		Method
		Watts	dBm	Watts	dBm	
450 MHz	CW	5.47	37.4	5.30	37.2	Average Conducted
460 MHz	CW	5.37	37.3	5.27	37.2	Average Conducted
463 MHz	CW	5.32	37.3	5.23	37.2	Average Conducted
470 MHz	CW	5.27	37.2	5.22	37.2	Average Conducted
476 MHz	CW	5.34	37.3	5.26	37.2	Average Conducted
484 MHz	CW	5.46	37.4	5.36	37.3	Average Conducted
490 MHz	CW	5.42	37.3	5.31	37.3	Average Conducted
498 MHz	CW	5.25	37.2	5.14	37.1	Average Conducted
512 MHz	CW	5.09	37.1	5.01	37.0	Average Conducted

Notes

- The test channels were selected in accordance with the procedures specified in FCC KDB 447498 (see reference [8]).
- The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector of the radio in accordance with FCC 47 CFR §2.1046 (see reference [13]) and IC RSS-Gen (see reference [14]).

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.						Page 4 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ilac-MRA  ACREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

4.0 NO. OF TEST CHANNELS (N_c)

Antenna Part No.		Antenna Freq. Range	Test Freq. Range	N_c	Test Frequencies (MHz)
1	ATU-16D	450 - 470 MHz	450 - 470 MHz	3	450, 460, 470
2	ATU-16DS	450 - 490 MHz	450 - 490 MHz	4	450, 463, 476, 490
3	ATU-16F	470 - 520 MHz	470 - 512 MHz	4	470, 484, 498, 512

Note: The number of test channels (N_c) were calculated in accordance with the procedures specified in FCC KDB 447498 (see reference [8]).

5.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING

Accessory ID # for Test Report	Accessory Category: Antenna			SAR Evaluation
	Part Number	Description		
1	ATU-16D	Detachable (450-470 MHz)		Yes
2	ATU-16DS	Detachable (450-490 MHz)		Yes
3	ATU-16F	Detachable (470-520 MHz)		Yes

Accessory ID # for Test Report	Accessory Category: Battery			SAR Evaluation
	Part Number	Description		
a	FNB-V133LI / FNB-V133LI-UNI	Li-ion (7.4V, 1350mAh)		Yes
b	FNB-V134LI / FNB-V134LI-UNI	Li-ion (7.4V, 2250mAh)		Yes

Accessory ID # for Test Report	Accessory Category: Body-Worn			SAR Evaluation
	Part Number	Description		
1	CLIP-20	Belt-clip (contains metal)		Yes

Accessory ID # for Test Report	Accessory Category: Audio			SAR Evaluation
	Part Number	Description	Audio Accessory Grouping	
G1a	MH-360S	Compact Speaker-Mic	Group 1	Yes
G1b	MH-450S	Standard Speaker-Mic		No ¹
G2a	MH-81A4B	Light duty VOX headset	Group 2	Yes
G3a	MH-37A4B	Earpiece mic	Group 3	Yes

Manufacturer's disclosed accessory listing information provided by Vertex Standard USA Inc.

Notes:

1. Audio accessories not evaluated for SAR in accordance with the procedures and provisions of FCC KDB 643646 D01v01r01 Page 10 Section 1).

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 5 of 68

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA <small>ACREDITED</small>
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

6.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 06/10&11/2013		Frequency: 450 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.350	59.04	0.85	56.7	0.94	4.13%	-9.57%
0.360	58.07	0.85	56.7	0.94	2.42%	-9.57%
0.370	57.92	0.87	56.7	0.94	2.15%	-7.45%
0.380	57.86	0.88	56.7	0.94	2.05%	-6.38%
0.390	58.11	0.89	56.7	0.94	2.49%	-5.32%
0.400	57.55	0.89	56.7	0.94	1.50%	-5.32%
0.410	57.64	0.9	56.7	0.94	1.66%	-4.26%
0.420	57.58	0.91	56.7	0.94	1.55%	-3.19%
0.430	57.54	0.92	56.7	0.94	1.48%	-2.13%
0.440	57.88	0.92	56.7	0.94	2.08%	-2.13%
0.450	56.68	0.93	56.7	0.94	-0.04%	-1.06%
0.460	56.68	0.93	56.7	0.94	-0.04%	-1.06%
0.470	57.43	0.95	56.7	0.94	1.29%	1.06%
0.480	56.94	0.98	56.7	0.94	0.42%	4.26%
0.484*	56.6	0.972	56.7	0.94	-0.18%	3.40%
0.490	56.18	0.96	56.7	0.94	-0.92%	2.13%
0.498*	56.5	0.96	56.7	0.94	-0.35%	2.13%
0.500	56.52	0.96	56.7	0.94	-0.32%	2.13%
0.510	56.33	0.98	56.7	0.94	-0.65%	4.26%
0.512*	56.2	0.982	56.7	0.94	-0.88%	4.47%
0.520	55.8	0.99	56.7	0.94	-1.59%	5.32%
0.530	55.53	1	56.7	0.94	-2.06%	6.38%
0.540	55.88	1	56.7	0.94	-1.45%	6.38%
0.550	55.88	1.01	56.7	0.94	-1.45%	7.45%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
June 10	450 Body	23°C	22.0°C	≥ 15 cm	101.3 kPa	33%	1000
June 11	450 Body	23°C	22.0°C	≥ 15 cm	100.9 kPa	35%	1000

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 6 of 68

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS						
Date: 06/12&13/2013		Frequency: 450 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.350	46.78	0.8	43.5	0.87	7.54%	-8.05%
0.360	45.96	0.81	43.5	0.87	5.66%	-6.90%
0.370	46.01	0.82	43.5	0.87	5.77%	-5.75%
0.380	45.87	0.81	43.5	0.87	5.45%	-6.90%
0.390	45.37	0.83	43.5	0.87	4.30%	-4.60%
0.400	45.07	0.86	43.5	0.87	3.61%	-1.15%
0.410	45.79	0.86	43.5	0.87	5.26%	-1.15%
0.420	44.96	0.86	43.5	0.87	3.36%	-1.15%
0.430	45.04	0.88	43.5	0.87	3.54%	1.15%
0.440	45.03	0.89	43.5	0.87	3.52%	2.30%
0.450	44.25	0.88	43.5	0.87	1.72%	1.15%
0.460	44.55	0.9	43.5	0.87	2.41%	3.45%
0.470	44.24	0.91	43.5	0.87	1.70%	4.60%
0.480	43.82	0.91	43.5	0.87	0.74%	4.60%
0.484*	43.6	0.91	43.5	0.87	0.23%	4.60%
0.490	43.22	0.91	43.5	0.87	-0.64%	8.05%
0.500	43.19	0.92	43.5	0.87	-0.71%	5.75%
0.510	43	0.93	43.5	0.87	-1.15%	6.90%
0.520	42.47	0.95	43.5	0.87	-2.37%	9.20%
0.530	43.16	0.96	43.5	0.87	-0.78%	10.34%
0.540	42.95	0.97	43.5	0.87	-1.26%	11.49%
0.550	43.15	0.97	43.5	0.87	-0.80%	11.49%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
June 12	450 Head	23°C	22.3°C	≥ 15 cm	101.8 kPa	33%	1000
June 13	450 Head	22°C	22.3°C	≥ 15 cm	101.8 kPa	34%	1000

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 7 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

7.0 SAR MEASUREMENT SUMMARY

Test Procedures applied in accordance with FCC KDB 643646 D01v01 (see reference [9])

1. For face-held configuration, the highest capacity battery was selected as the default battery (battery "b").
2. The SAR evaluations commenced at the highest output power channel per antenna and frequency range.
3. When the head SAR of an antenna tested on the highest output power channel using the default battery is ≤ 3.5 W/kg (50% PTT duty factor), testing of all other required channels is not necessary.
4. When the SAR for all antennas tested using the default battery is ≤ 4.0 W/kg, test additional batteries using the antenna and channel configuration that resulted in the highest SAR.
5. When test reduction applies, the slots for such configurations are denoted with N/A (Not Applicable).

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 68

Date(s) of Evaluation

June

10-13,

2013

Test Report Serial No.

060513AXI-1237S

Test Report Revision No.

Rev. 1.0 (1st Release)

Test Report Issue Date

Jun. 18, 2013

Description of Test(s)

Specific Absorption Rate

RF Exposure Category

Occupational (Controlled)



Test Lab Certificate No. 2470.01

Table 2**BODY-WORN SAR EVALUATION RESULTS**

C	Test Date(s): Jun 10&11,2013				1	2	3	4	5	6	7	8														
R	Antenna Tested	Test Freq. (MHz)	Cond. Pwr (W)	SAR W/kg 1g					SAR W/kg 1g																	
				Default Battery (a)					Battery (b)																	
				Default Body-worn Acc. (1)					Default Body-worn Acc. (1)																	
				Default Audio Acc. (G2a)					Default Audio Acc. (G2a)																	
				100% ptt d/f	50% ptt d/f	Drift (dB)	50%+droop	100% ptt d/f	50% ptt d/f	Drift dB	50%+droop															
Radio Model Tested: EVX-539-G7-5																										
1	ANT. 1	450	5.47	B1	6.73	3.37	-0.402	3.69	N/A																	
2		460	5.37			N/A			N/A																	
3		470	5.27			N/A			N/A																	
4	ANT. 2	450	5.47	B2	6.37	3.19	-0.403	3.50	N/A																	
5		463	5.32			N/A			N/A																	
6		476	5.34			N/A			N/A																	
7		490	5.42			N/A			N/A																	
8	ANT. 3 FCC ONLY	470	5.27	B4	6.45	3.23	-0.516	3.63	N/A																	
9		484	5.46	B3	8.65	4.33	-0.496	4.85	N/A																	
10		498	5.25	B5	10.4	5.20	-0.492	5.82	B7	9.67	4.84	-0.451	5.36													
11		512	5.09	B6	9.08	4.54	-0.559	5.16	N/A																	
SAR LIMITS					BODY			SPATIAL PEAK			RF EXPOSURE CATEGORY															
FCC 47 CFR 2.1093			Health Canada Safety Code 6			8.0 W/kg		1g averaging		Occupational / Controlled																
Notes																										
Test Mode = CW (Unmodulated Continuous Wave)						Phantom = Barski Planar Phantom																				
Battery	Back of DUT Distance to Planar Phantom (see Appendix D)			Antenna Distance to Planar Phantom (see Appendix D)																						
				Antenna 1			Antenna 2			Antenna 3																
a	1.6 cm			2.7 cm			2.7 cm			2.7 cm																
b	1.2 cm			n/a			n/a			3.0 cm																
C = Column; R = Row				B1-Bx (B = Body) denotes the corresponding Face SAR Plot # as shown in Appendix A																						

Test Procedures applied in accordance with FCC KDB 643646 D01v01 (see reference [9])

1. For body-worn configuration, the thinnest standard battery was selected as the default battery (battery "a").
2. The SAR evaluations commenced at the highest output power channel per antenna and frequency range.
3. When the SAR of an antenna tested on the highest output power channel using the default battery is ≤ 3.5 W/kg (50% PTT duty factor), testing of all other required channels is not necessary.
4. When the SAR of an antenna tested on the highest output power channel using the default battery is > 3.5 W/kg and ≤ 4.0 W/kg, testing on the required immediately adjacent channels is not necessary, but other channels must still be considered.
5. When the highest SAR of an antenna tested with the thinnest (default) battery is > 4.0 W/kg and ≤ 6.0 W/kg, test additional batteries with the default body-worn and audio accessory on the channel that resulted in the highest SAR for that antenna.
6. When test reduction applies, the slots for such configurations are denoted with N/A (Not Applicable).

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 9 of 68

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

TABLE 3		ADDITIONAL AUDIO ACC'S SAR EVALUATION RESULTS																		
C	Test Date(s): Jun 11, 2013						1	2												
R	Antenna Tested	Audio Accessory Grouping	Audio Accessory ID	Test Frequency (MHz)	Conducted Power (W)	1g SAR (W/kg)														
						Battery (a)														
						Body-worn Acc. (1)														
						Plot #	100% ptt d/f	50% ptt d/f												
Radio Model Tested: EVX-539-G7-5																				
1	ANT. 3 FCC ONLY	G1	G1a	498	5.25	A1	10.8	5.40												
2							-0.448	5.99												
3		G3	G3a	498	5.25	A2	10.2	5.10												
4							-0.517	5.75												
Radio Model Tested: EVX-534-G7-5																				
5	ANT. 3 FCC ONLY	G1	G1a	498	5.14	A3	10.3	5.15												
6							-0.506	5.79												
Repeatability Test (Per FCC KDB:447498)																				
Radio Model Tested: EVX-539-G7-5																				
7	ANT. 3 FCC ONLY	G1	G1a	498	5.25	A4	10.7	5.35												
8							-0.522	6.03												
SAR LIMITS				BODY	SPATIAL PEAK		RF EXPOSURE CATEGORY													
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg	1g average		Occupational / Controlled													
Notes																				
Test Mode = CW (Unmodulated Continuous Wave)				DUT Distance to Phantom			Antenna Distance to Phantom													
Phantom = Barski Planar Phantom				1.6 cm			2.7 cm													
C = Column; R = Row																				
Audio accessories do not contain any built-in radiating element																				

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.						Page 10 of 68

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

8.0 SAR SCALING (TUNE-UP TOLERANCE)

SAR LEVELS SCALED TO MANUFACTURER'S TUNE-UP TOLERANCE									
Test Config.	Freq. (MHz)	Plot	Antenna	Battery	Conducted Power (W)	SAR Level 1g (W/kg)	Drift (dB)	Scale to 5.5 W (5 W + 10%)	Scaled SAR 1g (W/kg)
FCC (scaled without drift)									
Face-Held	484	F3	3	b	5.46	2.90	-0.578	0.0 dB	n/a
Body-worn	498	A1	3	a	5.25	5.40	-0.448	+0.2 dB	5.65
IC (scaled with drift)									
Face-Held	450	F1	1	b	5.47	2.54	-0.505	+0.0 dB	n/a
Body-worn	450	B1	1	a	5.46	3.37	-0.402	+0.0 dB	n/a

Notes:

1. Only the highest SAR values for body and face are scaled.
2. The resulting value is the reported SAR.
3. The scaled SAR levels are below the FCC/IC Occupational SAR Limit of 8.0 W/kg

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 68	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

9.0 DETAILS OF SAR EVALUATION

1. The number of test frequencies and the test channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 (see reference [8]).
2. SAR was tested on Radio Model: EVX-539-G7-5. Radio Model: EVX-534-G7-5 was tested in the worst-case configuration for face and body.
3. The DUT was evaluated for SAR in accordance with the procedures described in FCC KDB 643646 (see reference [9]).
4. Each SAR evaluation was performed with a fully charged battery. The radio was switched off for a five minute cooldown period and the battery replaced between the area and zoom scan evaluations.
5. The SAR droop of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. The measured SAR droop was added to the measured SAR levels to report scaled SAR levels as shown in the SAR test data tables. A SAR-versus-Time power droop evaluation was performed (see Appendix A).
6. The fluid temperature was measured prior to and after the SAR evaluations. The fluid temperature remained within +/-2°C during the SAR evaluations.
7. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
8. The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

10.0 SAR EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
 An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
 A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 30 mm x 30 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.


Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

11.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, system checks were performed with a planar phantom and SPEAG 450 MHz dipole (see Appendix B) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]) and IEC Standard 62209-1:2005 (see reference [6]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATIONS

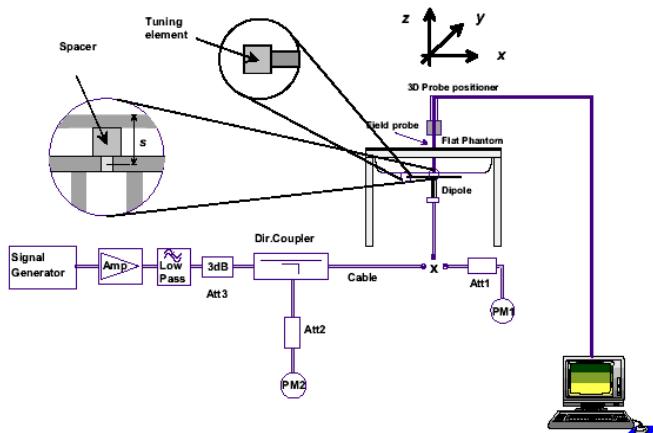

System Performance Check Measurement Setup (IEEE Standard 1528-2003)

SPEAG 450 MHz Validation Dipole Setup

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.					Page 13 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ilac-MRA  ACCREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

12.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [10] and [11]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]) and IEC Standard 62209-1:2005 (see reference [6]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz HEAD	450 MHz BODY
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

13.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

14.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 80
	Postprocessing Software: SEMCAD, V1.8 Build 186
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 68	

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

15.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy \pm 8%)	
Frequency:	10 MHz to > 6 GHz; Linearity: \pm 0.2 dB (30 MHz to 3 GHz)	
Directivity:	\pm 0.2 dB in head tissue (rotation around probe axis) \pm 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: \pm 0.2 dB	
Surface Detect:	\pm 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	ET3DV6 E-Field Probe

16.0 BARSKI PLANAR PHANTOM

The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski Planar Phantom.	
--	--

17.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluations of larger devices a Plexiglas platform is attached to the device holder.	
--	---

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

18.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	19-Apr-12	Biennial
x	-ET3DV6 E-Field Probe	00017	1590	24-Apr-13	Annual
x	-D450V3 Validation Dipole	00221	1068	27-Apr-12	Triennial
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	03-May-12	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833542	03-May-12	Biennial
x	Gigatronics 80334A Power Sensor	-	1837001	03-May-12	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	26-Apr-12	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	02-May-12	Biennial
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

19.0 MEASUREMENT UNCERTAINTIES

Uncertainty Budget for Device Evaluation (IEC 62209-2:2010)									
Source of Uncertainty	IEC 62209-2 Section	Tolerance / Uncertainty ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Standard Uncertainty ±% (1g)	Standard Uncertainty ±% (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (450 MHz)	7.2.2.1	6.7	Normal	1	1	1	6.7	6.7	∞
Isotropy	7.2.2.2	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
Boundary Effect	7.2.2.6	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	7.2.2.3	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
Detection Limits	7.2.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	7.2.2.7	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	7.2.2.8	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	7.2.2.9	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	7.2.4.5	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Restrictions	7.2.3.1	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	7.2.3.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Post-processing	7.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	7.2.3.4.3	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	7.2.3.4.2	3.6	Normal	1	1	1	3.6	3.6	8
Drift of Output Power (meas. SAR drift)	7.2.2.10	0	Rectangular	1.732050808	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	7.2.3.2	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
SAR Correction Algorithm for deviations in permittivity and conductivity	7.2.4.3	1.9	Normal	1	1	0.81	1.9	1.54	∞
Liquid Conductivity (measured)	7.2.4.3	4.6	Normal	1	0.78	0.71	3.6	3.3	∞
Liquid Permittivity (measured)	7.2.4.3	1.72	Normal	1	0.23	0.26	0.4	0.4	∞
Liquid Permittivity - temp. uncertainty	7.2.4.4	0.27	Rectangular	1.732050808	0.78	0.71	0.1	0.1	∞
Liquid Conductivity - temp. uncertainty	7.2.4.4	0.84	Rectangular	1.732050808	0.23	0.26	0.1	0.1	∞
Combined Standard Uncertainty	7.3.1		RSS				10.60	10.44	
Expanded Uncertainty (95% Confidence Interval)	7.3.2		k=2				21.20	20.88	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 18 of 68

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

20.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices"; Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [8] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v05r01: May 2013.
- [9] Federal Communications Commission, Office of Engineering and Technology - "SAR Test Reduction Considerations for Occupational PTT Radios", KDB 643646 D01v01: December 2010.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [12] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [13] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.
- [14] Industry Canada - "General Requirements and Information for the Certification of Radiocommunication Equipment", Radio Standards Specification RSS-Gen Issue 3: December 2010.

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX A - SAR MEASUREMENT PLOTS

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	EVX-534/539-G7-5	450 - 512 MHz	
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 68	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot F1

Date Tested: 06/12/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.3C; Barometric Pressure: 101.8 kPa; Humidity: 33%

Communication System: UHF 400-512

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 44.3$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.53, 7.53, 7.53); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

450MHz - 16D - V134/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.25 mW/g


450MHz - 16D - V134/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 79.7 V/m; Power Drift = -0.505 dB

Peak SAR (extrapolated) = 6.95 W/kg

SAR(1 g) = 5.08 mW/g; SAR(10 g) = 3.74 mW/g

Maximum value of SAR (measured) = 5.32 mW/g

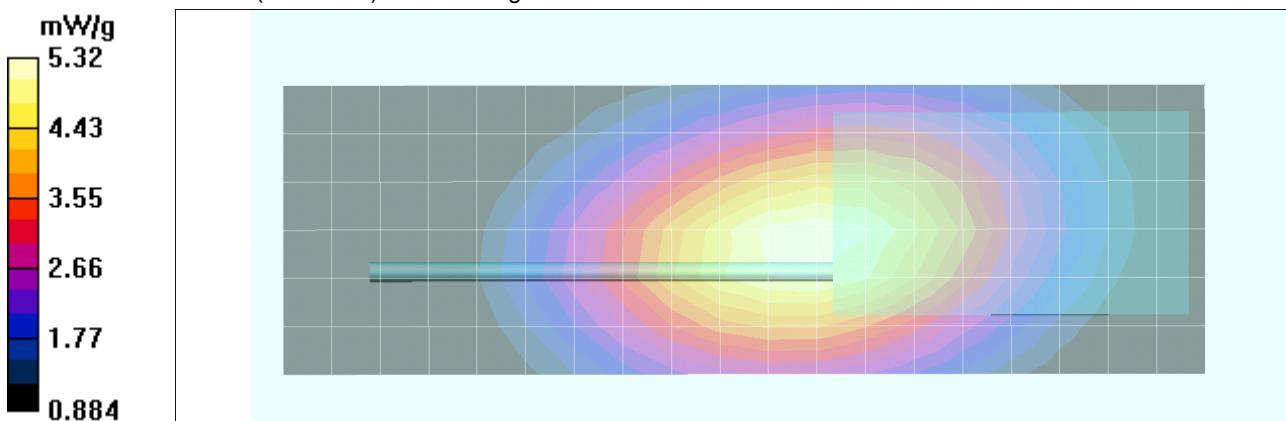

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot F2

Date Tested: 06/12/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.3C; Barometric Pressure: 101.8 kPa; Humidity: 33%

Communication System: UHF 400-512

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 44.3$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.53, 7.53, 7.53); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

450MHz - 16DS - V134/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.37 mW/g


450MHz - 16DS - V134/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 74.0 V/m; Power Drift = -0.512 dB

Peak SAR (extrapolated) = 5.95 W/kg

SAR(1 g) = 4.32 mW/g; SAR(10 g) = 3.17 mW/g

Maximum value of SAR (measured) = 4.53 mW/g

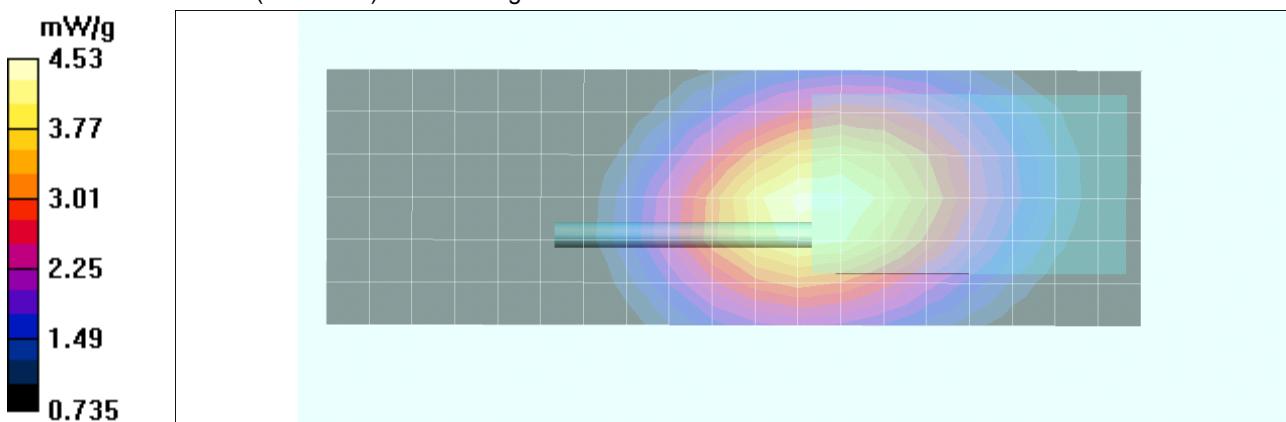

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot F3

Date Tested: 06/12/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.3C; Barometric Pressure: 101.8 kPa; Humidity: 33%

Communication System: UHF 400-512

Frequency: 484 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated): $f = 484$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 43.6$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.53, 7.53, 7.53); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

484MHz - 16F - V134/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 5.91 mW/g

484MHz - 16F - V134/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 83.7 V/m; Power Drift = -0.578 dB

Peak SAR (extrapolated) = 7.99 W/kg

SAR(1 g) = 5.8 mW/g; SAR(10 g) = 4.24 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 6.09 mW/g

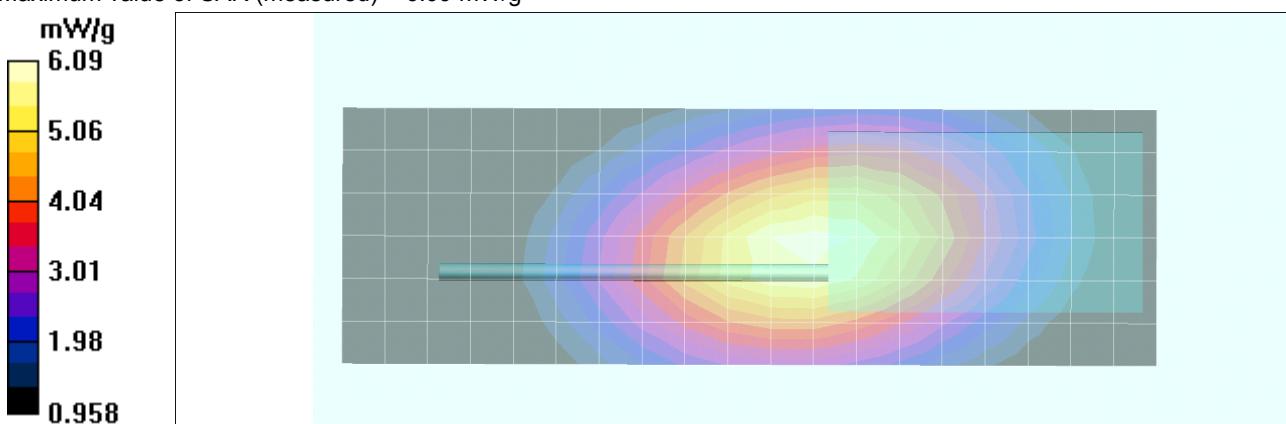

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan

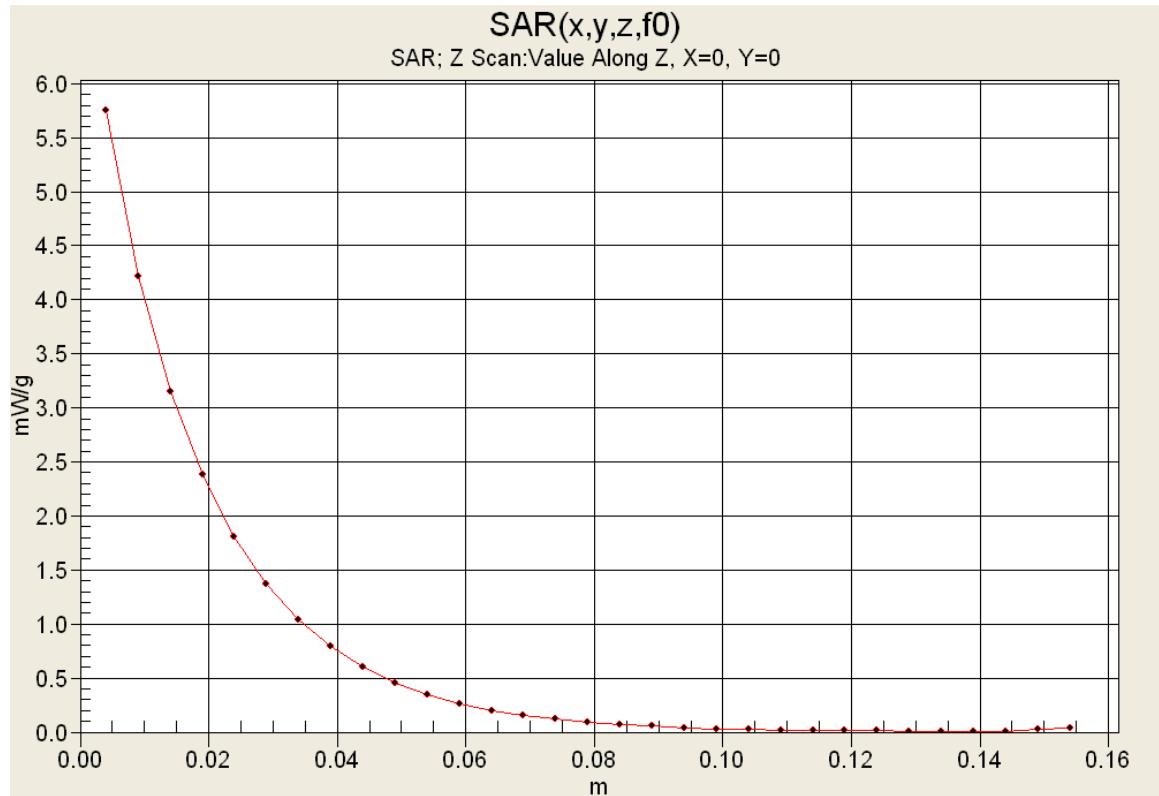

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot F4

Date Tested: 06/13/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 22C; Fluid Temp: 22.3C; Barometric Pressure: 101.8 kPa; Humidity: 34%

Communication System: UHF 400-512

Frequency: 484 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated): $f = 484$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 43.6$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.53, 7.53, 7.53); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

484MHz - 16F - V133/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 5.45 mW/g

484MHz - 16F - V133/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 81.9 V/m; Power Drift = -0.695 dB

Peak SAR (extrapolated) = 7.35 W/kg

SAR(1 g) = 5.31 mW/g; SAR(10 g) = 3.88 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 5.58 mW/g

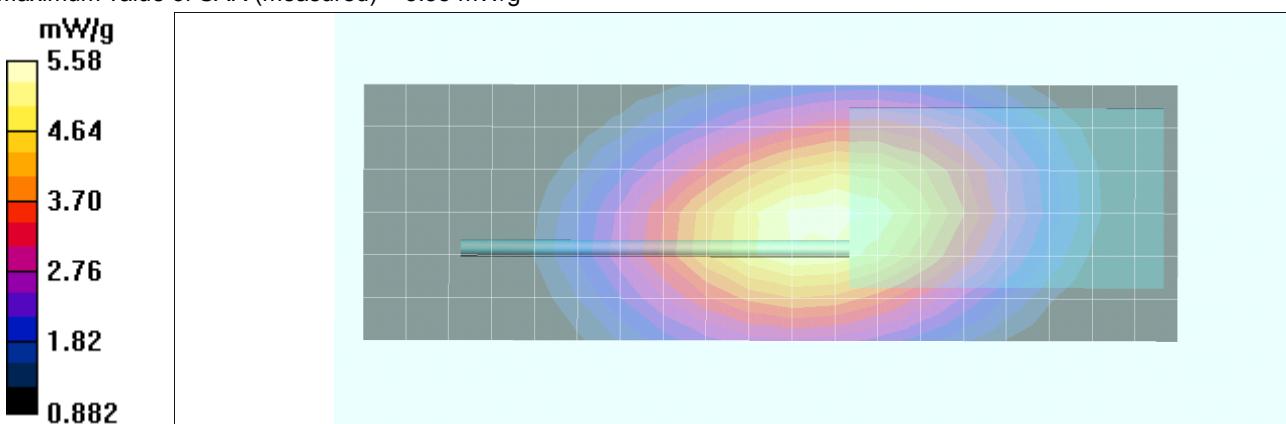

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot F5

Date Tested: 06/12/2013

DUT: EVX-534-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 22C; Fluid Temp: 22.3C; Barometric Pressure: 101.8 kPa; Humidity: 34%

Communication System: UHF 400-512

Frequency: 484 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated): $f = 484$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 43.6$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.53, 7.53, 7.53); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

534 - 484MHz - 16F - V134/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 5.85 mW/g

534 - 484MHz - 16F - V134/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 85.3 V/m; Power Drift = -0.754 dB

Peak SAR (extrapolated) = 7.92 W/kg

SAR(1 g) = 5.74 mW/g; SAR(10 g) = 4.21 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 6.01 mW/g

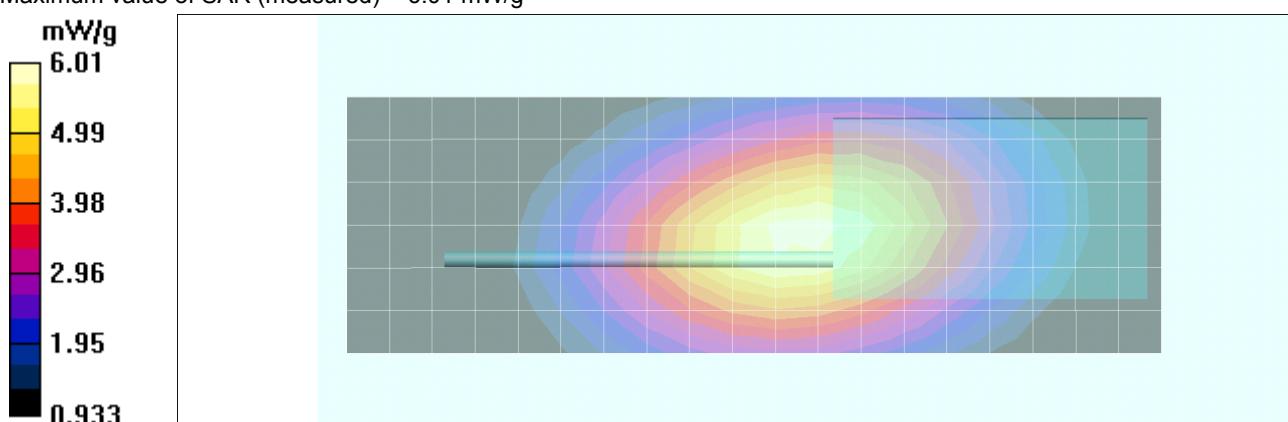

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan

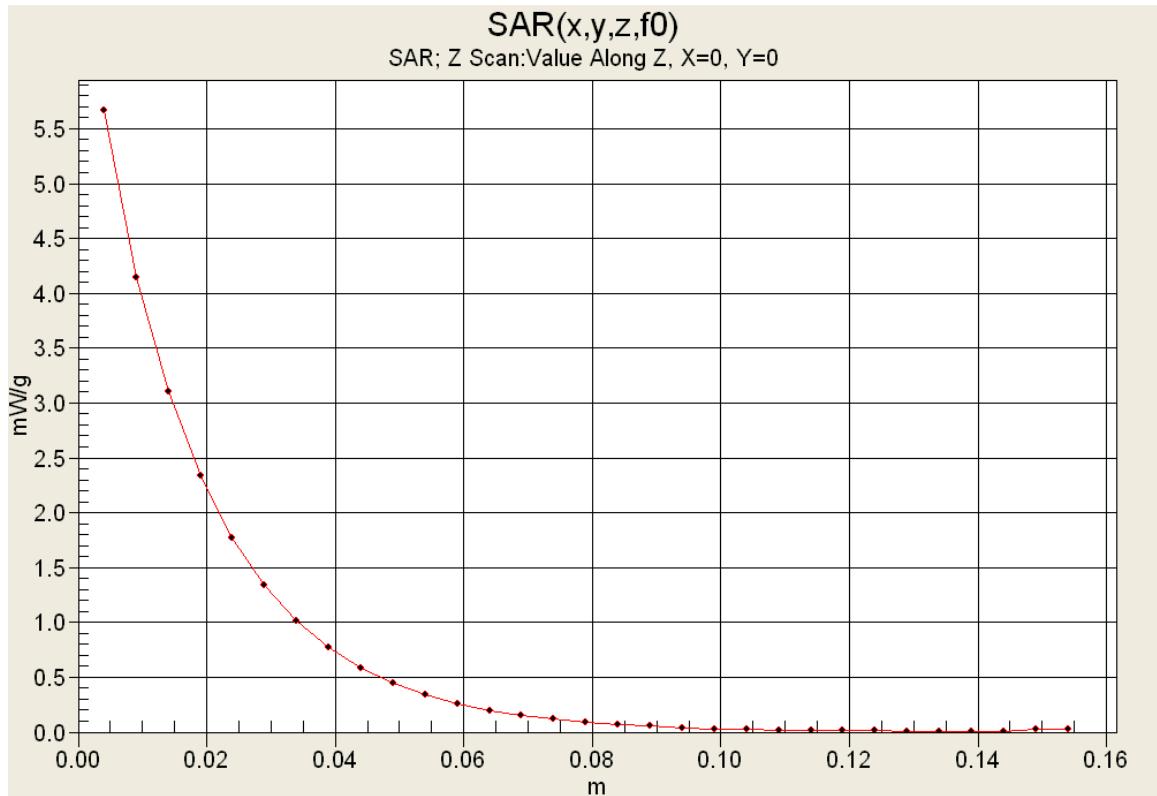

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 27 of 68		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot B1

Date Tested: 06/10/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 101.3 kPa; Humidity: 33%

Communication System: UHF 400-512

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

450MHz - 16D - V133 - MH-81A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.83 mW/g


450MHz - 16D - V133 - MH-81A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 87.1 V/m; Power Drift = -0.402 dB

Peak SAR (extrapolated) = 9.59 W/kg

SAR(1 g) = 6.73 mW/g; SAR(10 g) = 4.88 mW/g

Maximum value of SAR (measured) = 7.07 mW/g

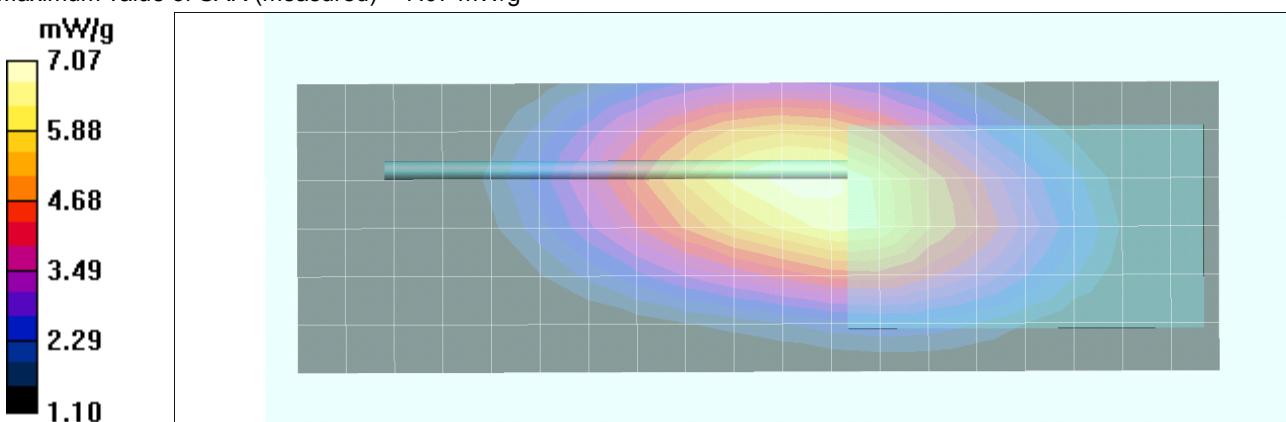

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot B2

Date Tested: 06/10/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 101.3 kPa; Humidity: 33%

Communication System: UHF 400-512

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

450MHz - 16DS - V133 - MH-81A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.23 mW/g

450MHz - 16DS - V133 - MH-81A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 84.9 V/m; Power Drift = -0.403 dB

Peak SAR (extrapolated) = 9.12 W/kg

SAR(1 g) = 6.37 mW/g; SAR(10 g) = 4.6 mW/g

Maximum value of SAR (measured) = 6.69 mW/g



Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot B3

Date Tested: 06/10/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 101.3 kPa; Humidity: 33%

Communication System: UHF 400-512

Frequency: 484 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 484$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 56.6$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

484MHz - 16F - V133 - MH-81A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.93 mW/g

484MHz - 16F - V133 - MH-81A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 96.9 V/m; Power Drift = -0.496 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 8.65 mW/g; SAR(10 g) = 6.24 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.09 mW/g

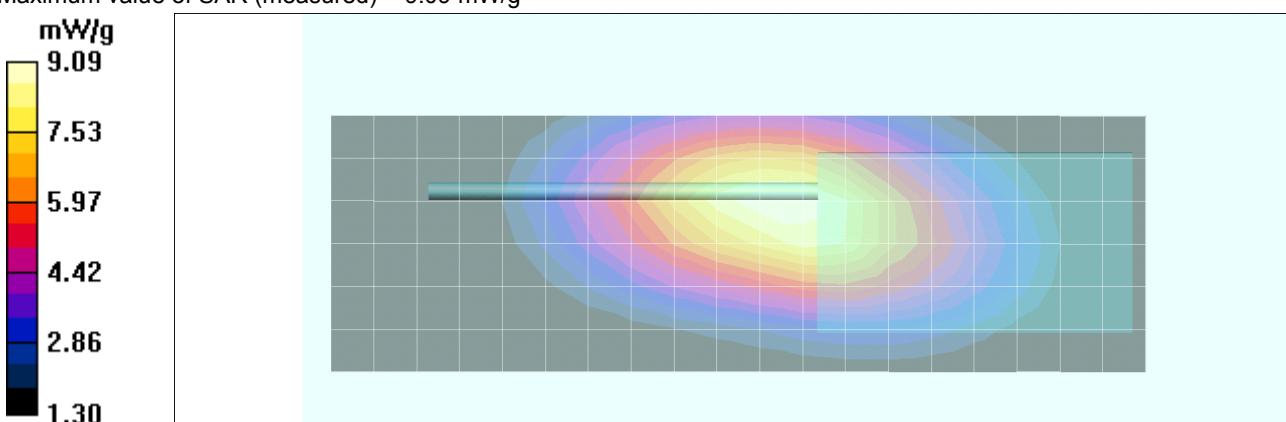

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 30 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot B4

Date Tested: 06/11/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: UHF 400-512

Frequency: 470 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 470$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 57.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


470MHz - 16F - V133 - MH-81A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 6.52 mW/g

470MHz - 16F - V133 - MH-81A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 85.0 V/m; Power Drift = -0.516 dB

Peak SAR (extrapolated) = 9.25 W/kg

SAR(1 g) = 6.45 mW/g; SAR(10 g) = 4.65 mW/g

Maximum value of SAR (measured) = 6.75 mW/g

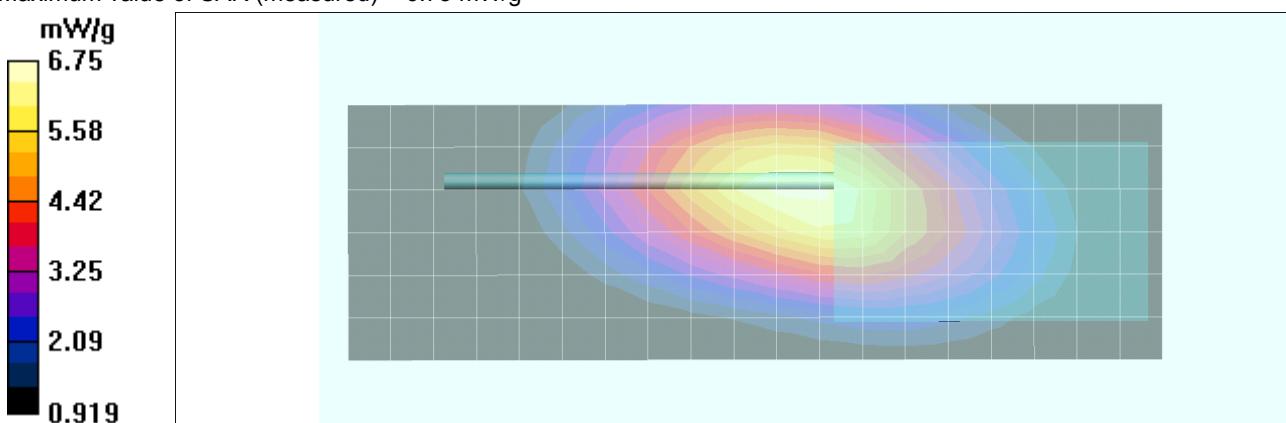

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot B5

Date Tested: 06/10/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 101.3 kPa; Humidity: 33%

Communication System: UHF 400-512

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 498$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

498MHz - 16F - V133 - MH-81A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.4 mW/g

498MHz - 16F - V133 - MH-81A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 106.9 V/m; Power Drift = -0.492 dB

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 7.5 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.8 mW/g

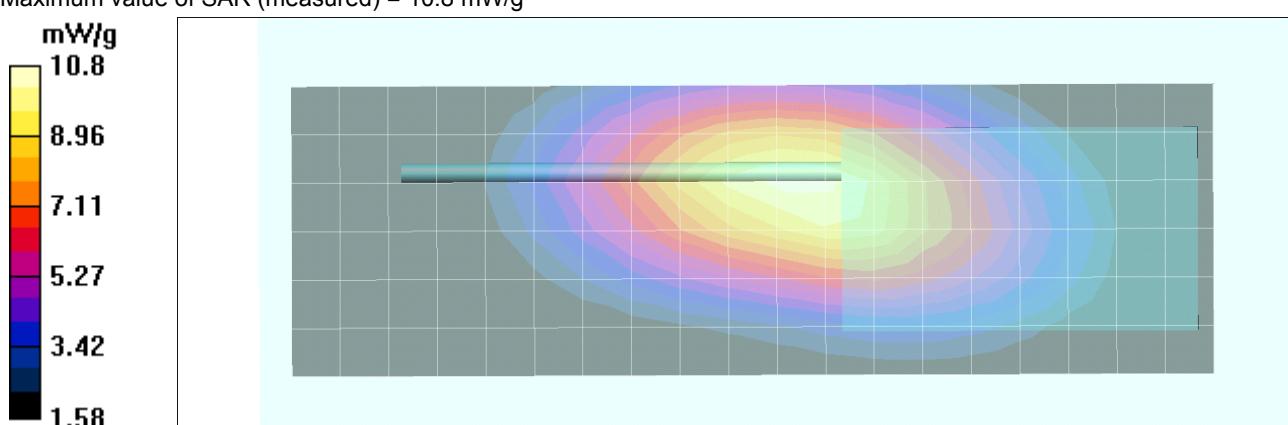


Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

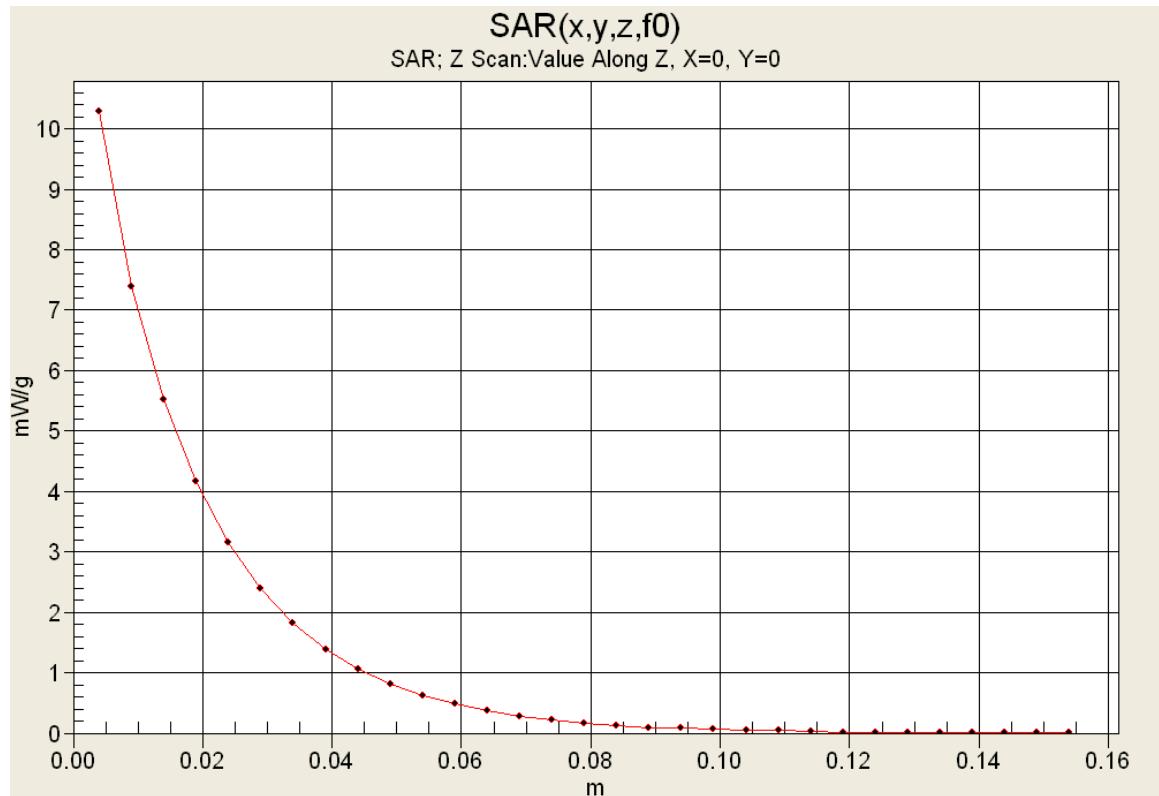

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot B6

Date Tested: 06/11/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: UHF 400-512

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 512$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

512MHz - 16F - V133 - MH-81A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.13 mW/g

512MHz - 16F - V133 - MH-81A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 99.7 V/m; Power Drift = -0.559 dB

Peak SAR (extrapolated) = 13.0 W/kg

SAR(1 g) = 9.08 mW/g; SAR(10 g) = 6.54 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.53 mW/g

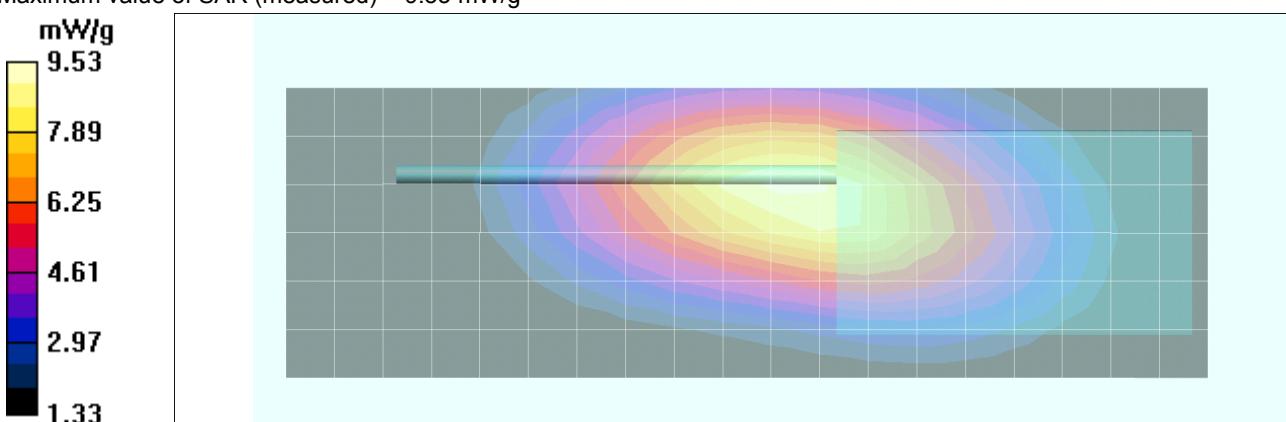

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 34 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot B7

Date Tested: 06/11/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: UHF 400-512

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 498$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

498MHz - 16F - V134 - MH-81A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.84 mW/g

498MHz - 16F - V134 - MH-81A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 103.5 V/m; Power Drift = -0.451 dB

Peak SAR (extrapolated) = 13.7 W/kg

SAR(1 g) = 9.67 mW/g; SAR(10 g) = 6.99 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.1 mW/g

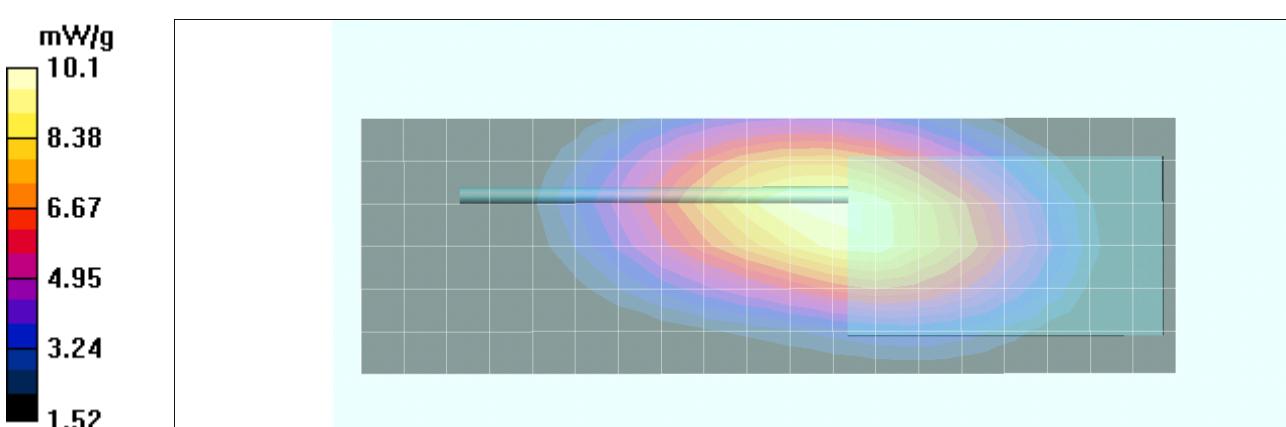

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot A1

Date Tested: 06/11/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: UHF 400-512

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 498$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

498MHz - 16F - V133 - MH-360S/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.9 mW/g

498MHz - 16F - V133 - MH-360S/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 109.0 V/m; Power Drift = -0.448 dB

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 10.8 mW/g; SAR(10 g) = 7.77 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 11.4 mW/g

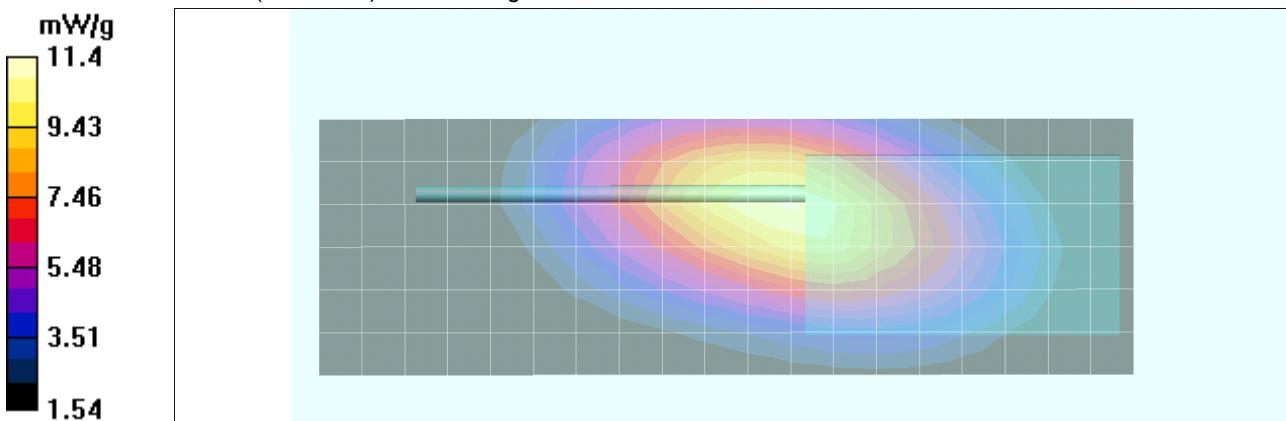


Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		


 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

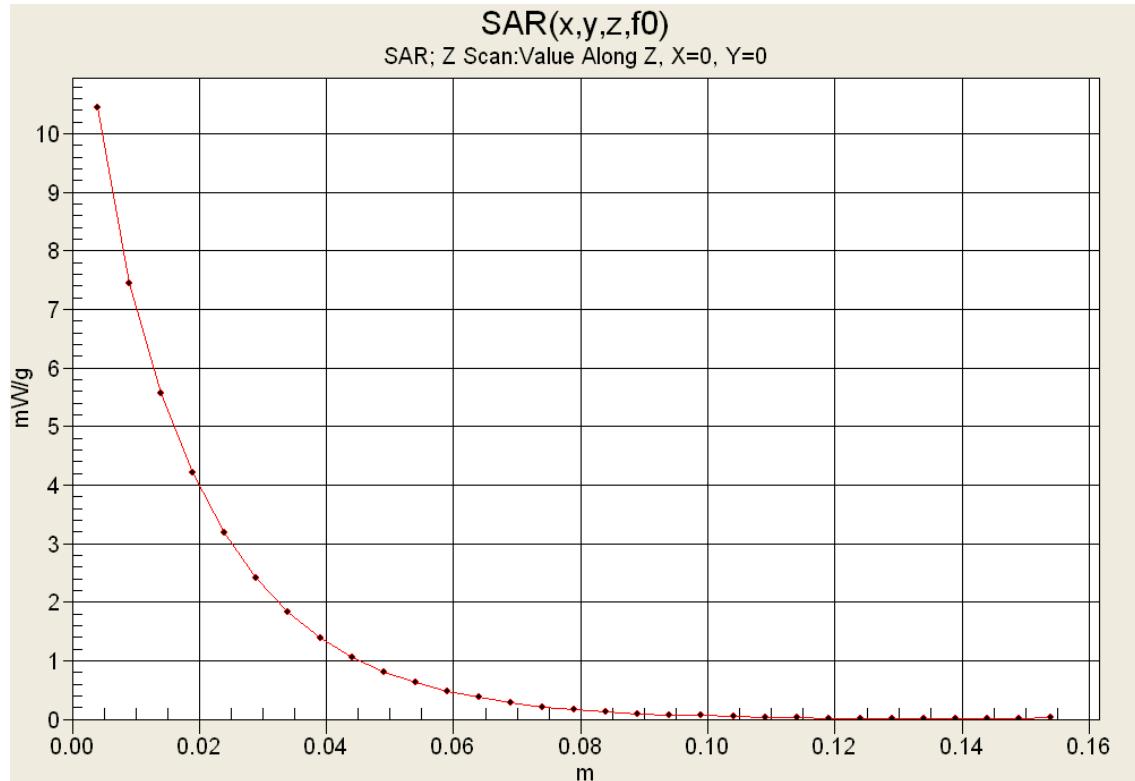

SAR-VS-Time

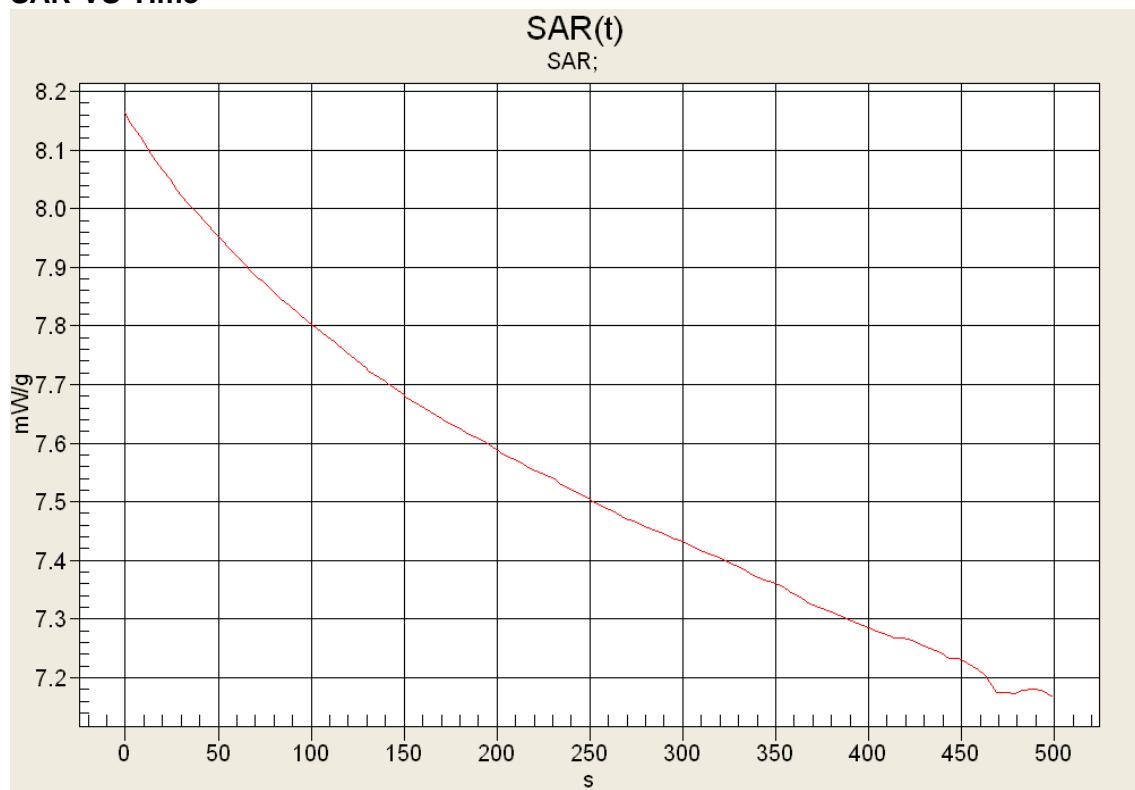

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 37 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot A2

Date Tested: 06/11/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: UHF 400-512

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 498$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

498MHz - 16F - V133 - MH-37A4B/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.5 mW/g

498MHz - 16F - V133 - MH-37A4B/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 107.4 V/m; Power Drift = -0.517 dB

Peak SAR (extrapolated) = 14.6 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 7.35 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.7 mW/g

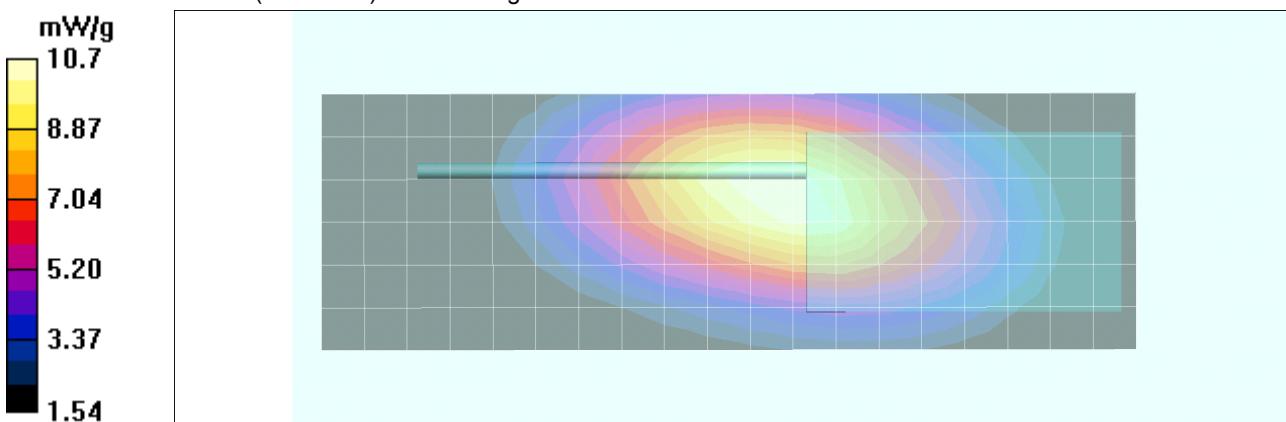

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 38 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot A3

Date Tested: 06/11/2013

DUT: EVX-534-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: UHF 400-512

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 498$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

534 - 498MHz - 16F - V133 - MH-360S/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.1 mW/g

534 - 498MHz - 16F - V133 - MH-360S/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 107.8 V/m; Power Drift = -0.506 dB

Peak SAR (extrapolated) = 14.7 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 7.39 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.8 mW/g

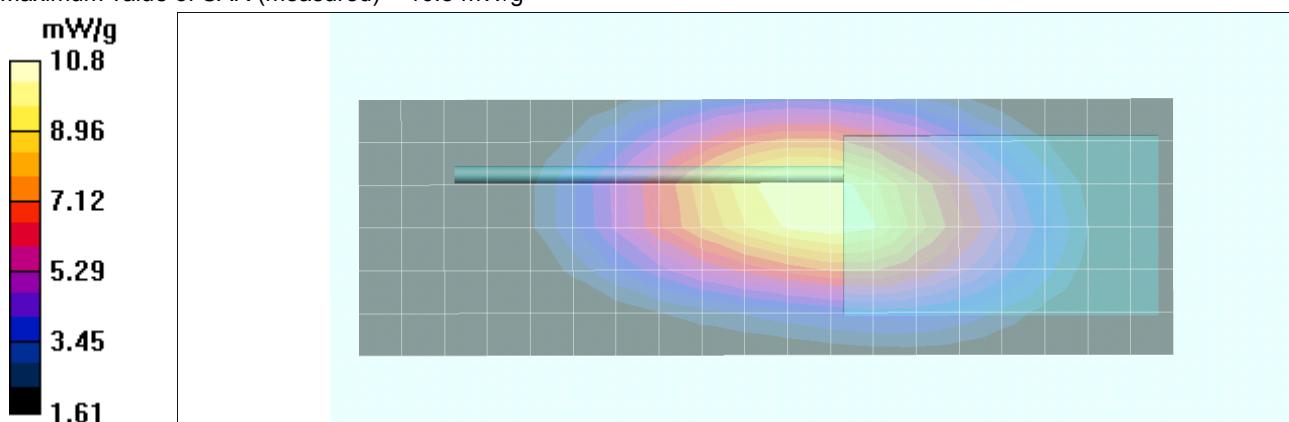

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Plot A4

Date Tested: 06/11/2013

DUT: EVX-539-G7-5; Type: UHF PTT Radio Transceiver; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: UHF 400-512

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 498$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Repeat - 498MHz - 16F - V133 - MH-360S/Area Scan (7x20x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.2 mW/g

Repeat - 498MHz - 16F - V133 - MH-360S/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 110.8 V/m; Power Drift = -0.522 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 7.77 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 11.3 mW/g



Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	EVX-534/539-G7-5	450 - 512 MHz	
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 68	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

System Performance Check - 450 MHz Body

Date Tested: 06/10/2013

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1068; Calibrated: 04/27/2012

Program Notes: Ambient Temp: 23C; Fluid Temp: 22.0C; Barometric Pressure: 101.3 kPa; Humidity: 33%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.98, 7.98, 7.98); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body d=15mm Pin=398mW/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.81 mW/g


Body d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.4 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 1.8 mW/g; SAR(10 g) = 1.2 mW/g


Maximum value of SAR (measured) = 1.92 mW/g

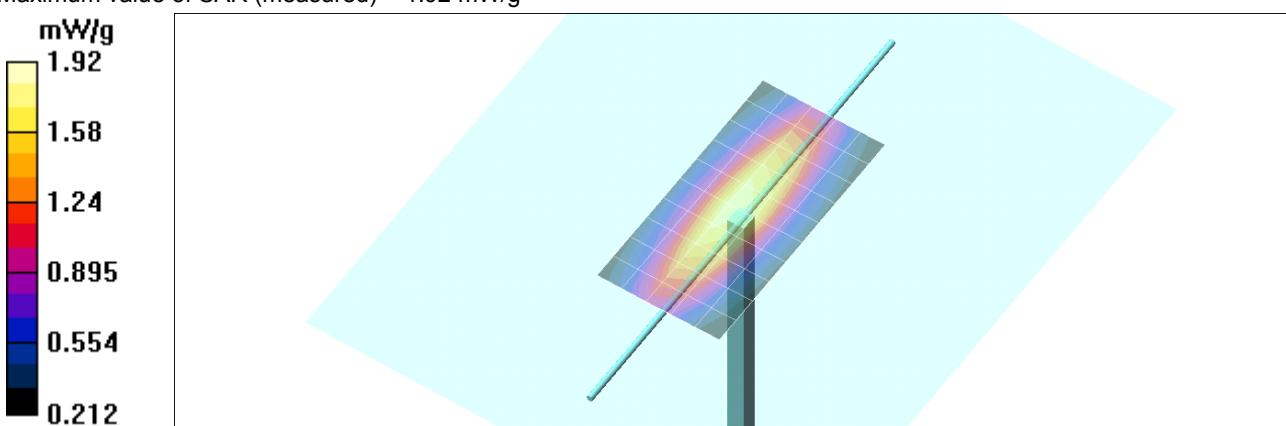

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 ilac-MRA  TÜV ACCREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan

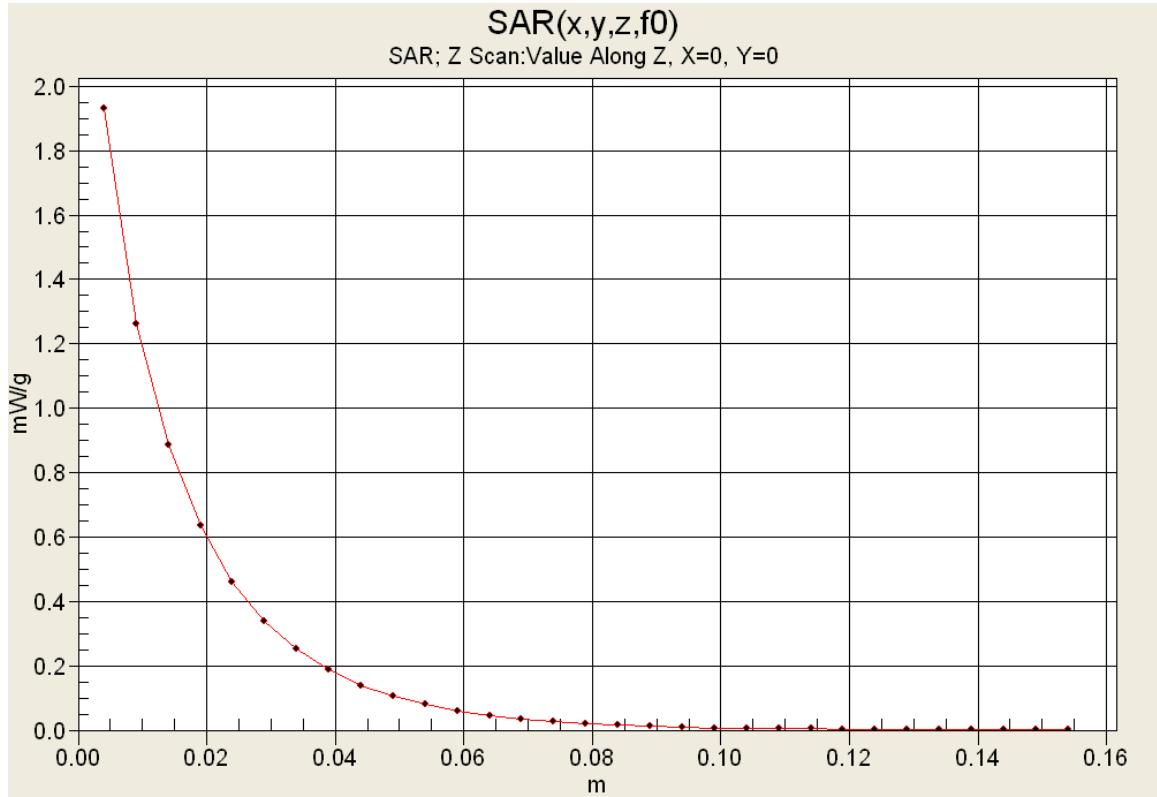

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 43 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA <small>ACREDITED</small>
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

System Performance Check - 450 MHz Head

Date Tested: 06/12/2013

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1068; Calibrated: 04/27/2012

Program Notes: Ambient Temp: 23.0C; Fluid Temp: 22.3C; Barometric Pressure: 101.8 kPa; Humidity: 33%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 44.3$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.53, 7.53, 7.53); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Head d=15mm Pin=398mW/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.95 mW/g


Head d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.4 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 1.86 mW/g; SAR(10 g) = 1.22 mW/g

Maximum value of SAR (measured) = 1.98 mW/g

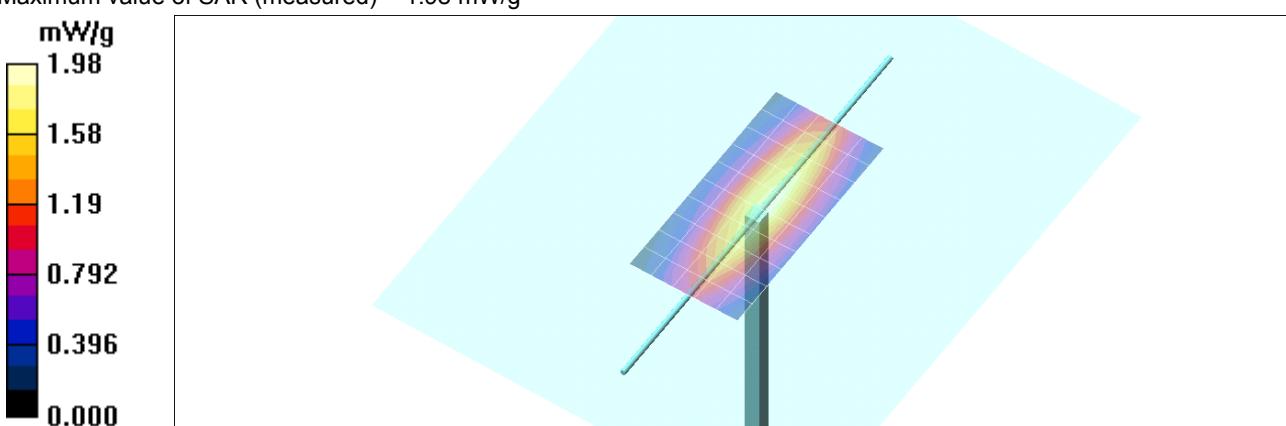


Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

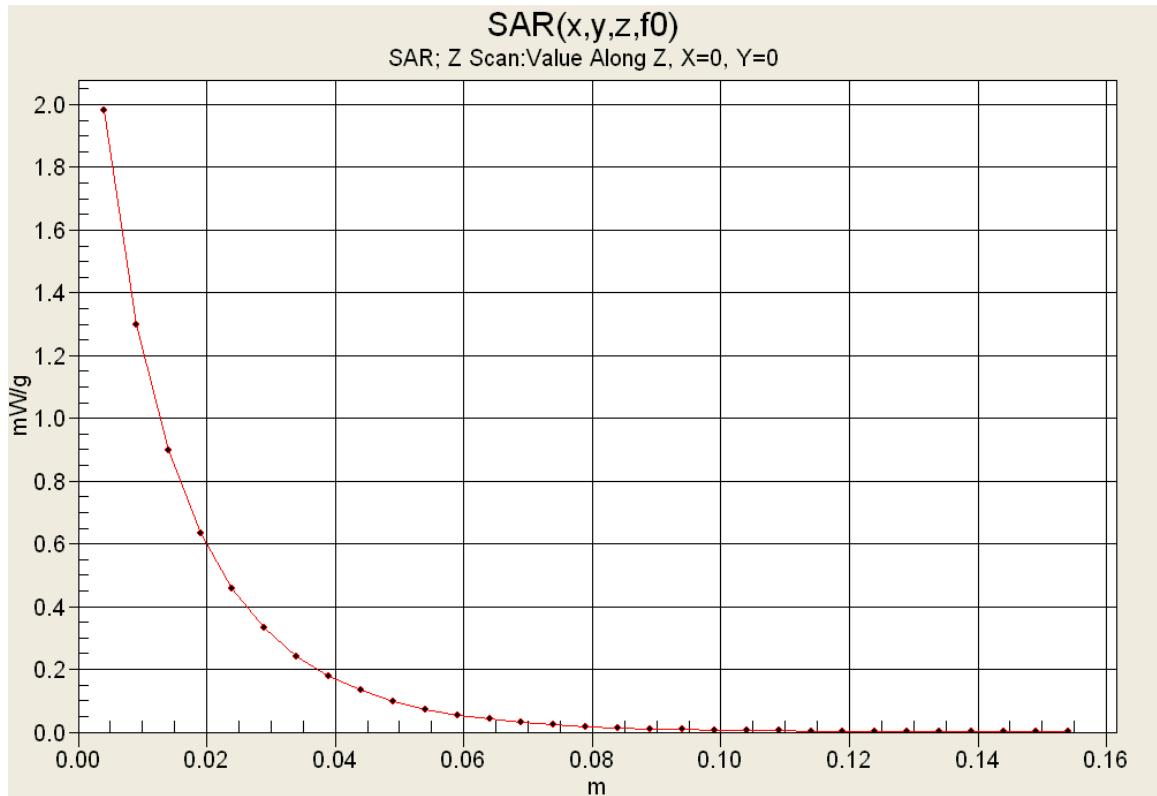

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	EVX-534/539-G7-5	450 - 512 MHz	
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 46 of 68	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

10&11/Jun/2013

Freq Frequency(GHz)

FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	59.04	0.85
0.3600	57.60	0.93	58.07	0.85
0.3700	57.50	0.93	57.92	0.87
0.3800	57.40	0.93	57.86	0.88
0.3900	57.30	0.93	58.11	0.89
0.4000	57.20	0.93	57.55	0.89
0.4100	57.10	0.93	57.64	0.90
0.4200	57.00	0.94	57.58	0.91
0.4300	56.90	0.94	57.54	0.92
0.4400	56.80	0.94	57.88	0.92
0.4500	56.70	0.94	56.68	0.93
0.4600	56.66	0.94	56.68	0.93
0.4700	56.62	0.94	57.43	0.95
0.4800	56.58	0.94	56.94	0.98
0.4900	56.54	0.94	56.18	0.96
0.5000	56.51	0.94	56.52	0.96
0.5100	56.47	0.94	56.33	0.98
0.5200	56.43	0.95	55.80	0.99
0.5300	56.39	0.95	55.53	1.00
0.5400	56.35	0.95	55.88	1.00
0.5500	56.31	0.95	55.88	1.01

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Head

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

12&13/Jun/2013

Freq Frequency(GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC	sH	Test_e	Test_s
0.3500	44.70	0.87	46.78	0.80
0.3600	44.58	0.87	45.96	0.81
0.3700	44.46	0.87	46.01	0.82
0.3800	44.34	0.87	45.87	0.81
0.3900	44.22	0.87	45.37	0.83
0.4000	44.10	0.87	45.07	0.86
0.4100	43.98	0.87	45.79	0.86
0.4200	43.86	0.87	44.96	0.86
0.4300	43.74	0.87	45.04	0.88
0.4400	43.62	0.87	45.03	0.89
0.4500	43.50	0.87	44.25	0.88
0.4600	43.45	0.87	44.55	0.90
0.4700	43.40	0.87	44.24	0.91
0.4800	43.34	0.87	43.82	0.91
0.4900	43.29	0.87	43.22	0.91
0.5000	43.24	0.87	43.19	0.92
0.5100	43.19	0.87	43.00	0.93
0.5200	43.14	0.88	42.47	0.95
0.5300	43.08	0.88	43.16	0.96
0.5400	43.03	0.88	42.95	0.97
0.5500	42.98	0.88	43.15	0.97

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5		450 - 512 MHz	
2013 Celltech Labs Inc.						Page 48 of 68

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> June 10-13, 2013	<u>Test Report Serial No.</u> 060513AXI-1237S	<u>Test Report Revision No.</u> Rev. 1.0 (1st Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> Jun. 18, 2013	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 49 of 68



Date(s) of Evaluation
June 10-13, 2013

Test Report Serial No.
060513AXI-1237S

Test Report Revision No.
Rev. 1.0 (1st Release)

Test Report Issue Date
Jun. 18, 2013

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)




FACE-HELD SAR TEST SETUP PHOTOGRAPHS



Face-held SAR Configuration Test Setup

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 50 of 68

FACE-HELD SAR TEST SETUP PHOTOGRAPHS

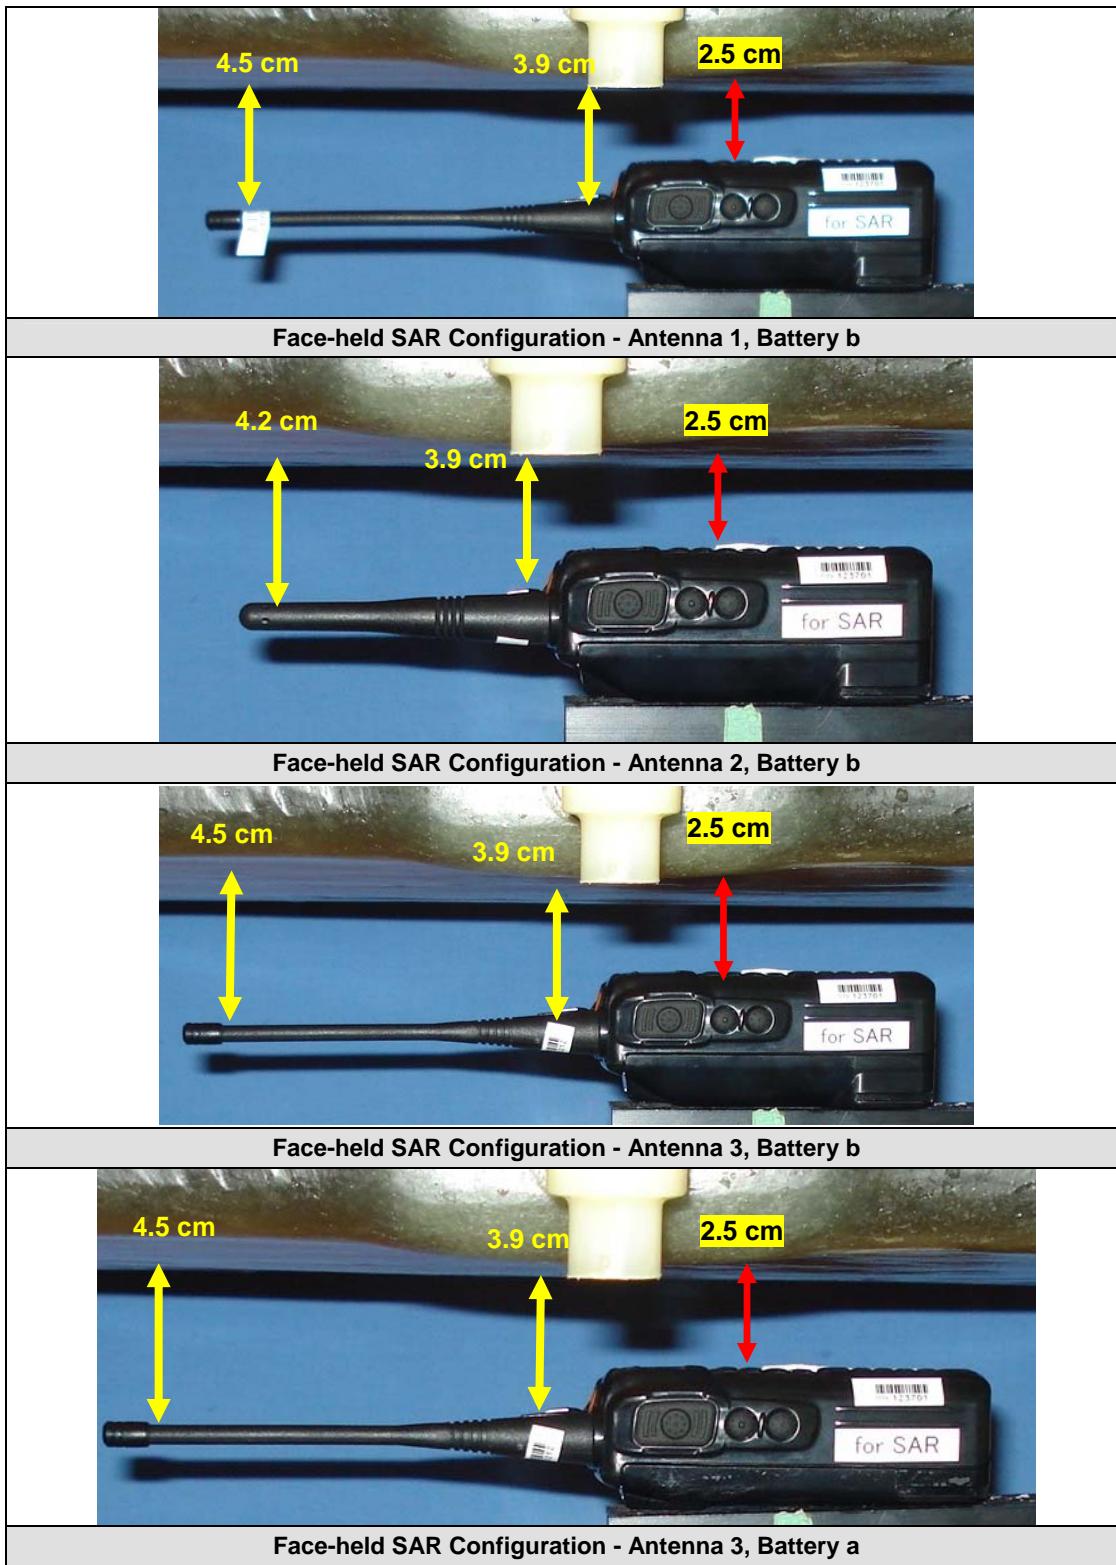

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. Page 51 of 68



Date(s) of Evaluation
June 10-13, 2013

Test Report Serial No.
060513AXI-1237S

Test Report Revision No.
Rev. 1.0 (1st Release)

Test Report Issue Date
Jun. 18, 2013

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01





BODY-WORN SAR TEST SETUP PHOTOGRAPHS (WITH DEFAULT AUDIO ACC.)



Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		

2013 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. Page 52 of 68

BODY-WORN SAR TEST SETUP PHOTOGRAPHS (WITH DEFAULT AUDIO ACC.)

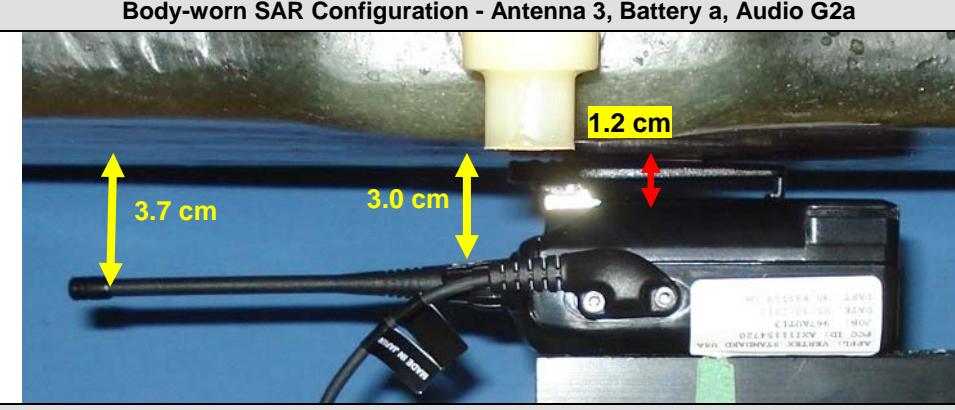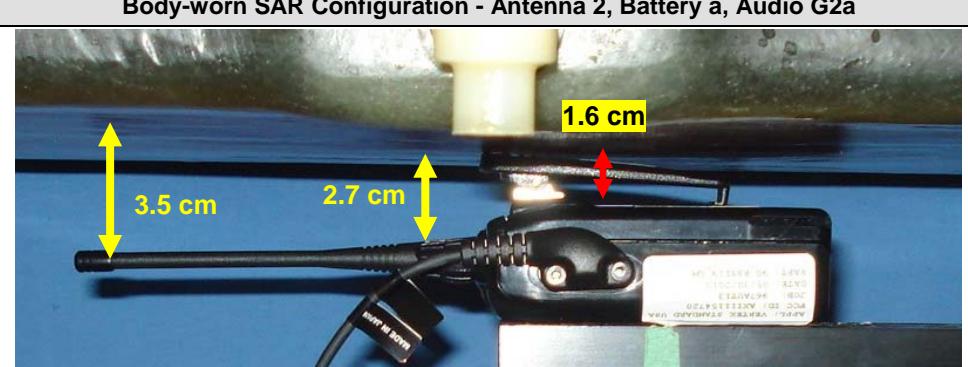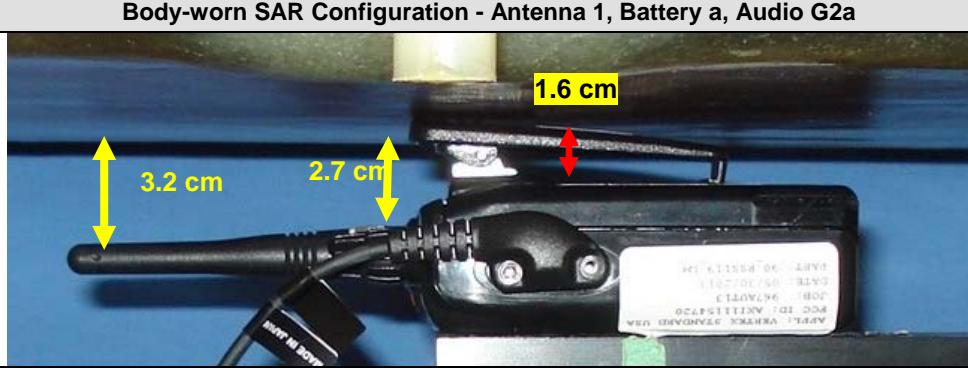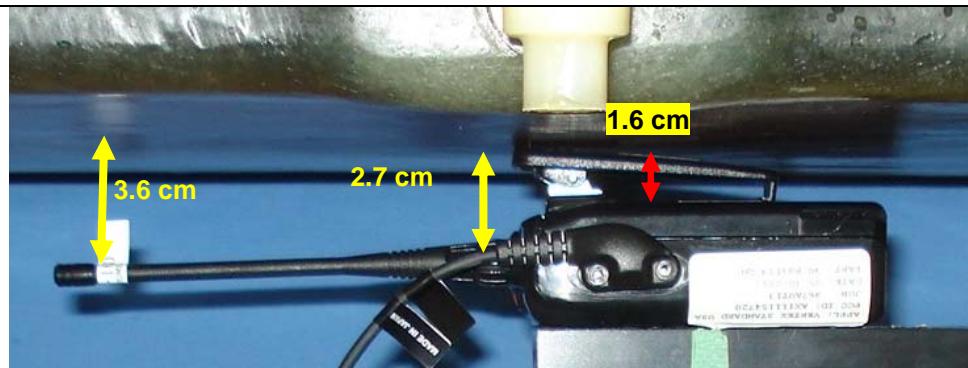

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 53 of 68

Date(s) of Evaluation

June 10-13, 2013

Test Report Serial No.

060513AXI-1237S

Test Report Revision No.

Rev. 1.0 (1st Release)

Test Report Issue Date

Jun. 18, 2013

Description of Test(s)

Specific Absorption Rate

RF Exposure Category

Occupational (Controlled)



Test Lab Certificate No. 2470.01

BODY-WORN SAR TEST SETUP PHOTOGRAPHS (w/ DEF. AUDIO ACC. PER CAT.)**Body-worn SAR Configuration - Antenna 3, Battery a, Audio G1a**

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		



Date(s) of Evaluation
June 10-13, 2013

Test Report Serial No.
060513AXI-1237S

Test Report Revision No.
Rev. 1.0 (1st Release)

Test Report Issue Date
Jun. 18, 2013

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

BODY-WORN SAR TEST SETUP PHOTOGRAPHS (w/ DEF. AUDIO ACC. PER CAT.)



Body-worn SAR Configuration - Antenna 3, Battery a, Audio G3a

Applicant:	Vertex Standard USA Inc.	FCC ID:	AXI11154720	IC ID:	10239A-11154720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	EVX-534/539-G7-5	450 - 512 MHz		
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 55 of 68