



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 90
406.1-470 MHz UHF PORTABLE
TEST REPORT

APPLICANT	VERTEX STANDARD USA, INC.
	8000 WEST SUNRISE BLVD. FT. LAUDERDALE FL 33322 USA
FCC ID	AXI11284620
MODEL NUMBER	VX-261-G6-5
PRODUCT DESCRIPTION	PORTABLE UHF TRANCEIVER
STANDARD APPLIED	CFR 47 Part 90
DATE SAMPLE RECEIVED	2/20/2015
DATE TESTED	2/25/2015
REPORT ISSUE DATE	2/26/2015
TESTED BY	Cory Leverett
APPROVED BY	Sid Sanders
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Version Number	Description	Issue Date
390AUT15TestReport.docx	Rev.1	Initial Issue	2/26/2015

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

Table of Contents

GENERAL REMARKS	3
GENERAL INFORMATION.....	4
TEST REPORT SUMMARY.....	5
TEST PROCEDURE.....	6
RF POWER OUTPUT.....	7
MODULATION CHARACTERISTICS	8
VOICE MODULATED COMMUNICATION EQUIPMENT	10
OCCUPIED BANDWIDTH	12
UNWANTED EMISSIONS / EMISSION MASKS	13
UNWANTED EMISSIONS / EMISSION MASKS	14
UNWANTED EMISSIONS / EMISSION MASKS	15
UNWANTED EMISSIONS / EMISSION MASKS	16
UNWANTED EMISSIONS / EMISSION MASKS	17
UNWANTED EMISSIONS / EMISSION MASKS	18
UNWANTED EMISSIONS / EMISSION MASKS	19
UNWANTED EMISSIONS / EMISSION MASKS	20
UNWANTED EMISSIONS / EMISSION MASKS	21
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	22
RADIATED SPURIOUS EMISSIONS.....	27
RADIATED SPURIOUS EMISSIONS.....	28
TRANSIENT FREQUENCY BEHAVIOR	30
TRANSIENT FREQUENCY BEHAVIOR	32
EQUIPMENT LIST	33

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.


All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:

Cory Leverett
Engineering Project Manager

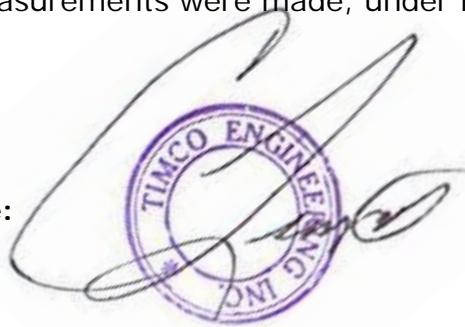

Date: 2/26/2015

Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 3 of 33

GENERAL INFORMATION

EUT Specification

EUT Description	UHF PORTABLE RADIO
FCC ID	AXI11274620
Model Number	VX-264-G6-5
Operating Frequency	403 – 470 MHz
Test Frequencies	406.25, 429.75, 450.25, 469.75 MHz
Type of Emission	11K0F3E
Modulation	FM Voice
EUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power 12V
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
Test Conditions	The temperature was 26°C with a relative humidity of 50%.
Revision History to the EUT	None
Test Exercise	The EUT was placed in continuous transmit mode.
Applicable Standards	ANSI/TIA 603-D:2010, FCC CFR 47 Part 90
Test Facility	Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669 USA.

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 4 of 33

TEST REPORT SUMMARY

Rule Part No.	Scope of Work	Status Pass/Fail/NA
<u>Part 2.1033(c)(8),</u> <u>Part 2.1046(a), Part</u> <u>90</u>	RF Power Output	Pass
<u>Part 2.1033(c) (4)</u> <u>Part 2.1047(a)(6)</u>	Modulation Characteristics	Pass
<u>2.1049(c),</u> <u>90.210(b), 90.210 (c)</u> <u>90.210(d), 90.210(e)</u>	Emission Mask and Occupied Bandwidths	Pass
<u>2.1051(a)</u>	Antenna Conducted Emissions	Pass
<u>2.1053, Part 90</u>	Field Strength Spurious Emissions	Pass
<u>Part 2.1055, Part</u> <u>90.213</u>	Frequency Stability	Pass
<u>Part 90.214</u>	Transient Frequency Behavior	Pass

Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 5 of 33

TEST PROCEDURE

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-D:2010, using a 50uH LISN. Both lines were observed with the EUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-D:2010, using an Rohde & Schwarz – EMI test receiver. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

[Table of Contents](#)

RF POWER OUTPUT


Rule Part No.: Part 2.1046(a), Part 90

Test Requirements: Manufacturer's Specification

Method of Measurement: RF power is measured by using a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage (if battery operated), or a properly adjusted power supply (if not battery operated), and the transmitter properly adjusted the RF output measures:

For the device with a fixed or integral antenna, the RF power is measured as ERP. The substitution method was used. The RF output measures:

Test Setup Diagram:

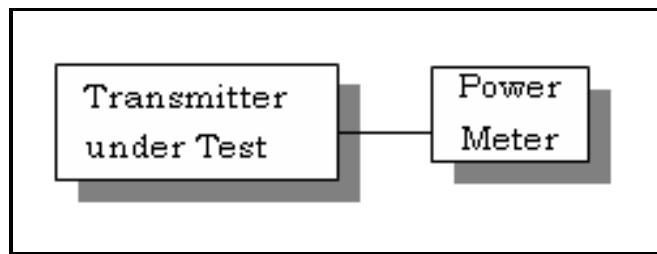

Test Data: Conducted RF power of the EUT can be set to High or Low

OUTPUT POWER:

Tuned Frequency (MHz)	RF POWER (dBm)	
	HI	LOW
406.25	37.3	30.4
429.75	37.7	30.5
450.25	37.5	30.0
469.75	37.3	30.1

Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER: $(7.4V)(.6A) = 4.44$ Watts
 FOR HIGH POWER SETTING INPUT POWER: $(7.4V)(2A) = 14.8$ Watts

[Table of Contents](#)

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.1047(a)(b)

Test Requirements:

Method of Measurement:

Part 2.1033(c)

Part 90.209

Part 90.207

Part 2.1033(c) (4) Type of Emission: 11K0F3E

$$Bn = 2M + 2DK$$

$$M = 3000$$

$$D = 2500$$


$$K=1$$

$$Bn = 2(3000) + 2(2500) = 11.0k$$

[Table of Contents](#)


Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-D: 2010. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

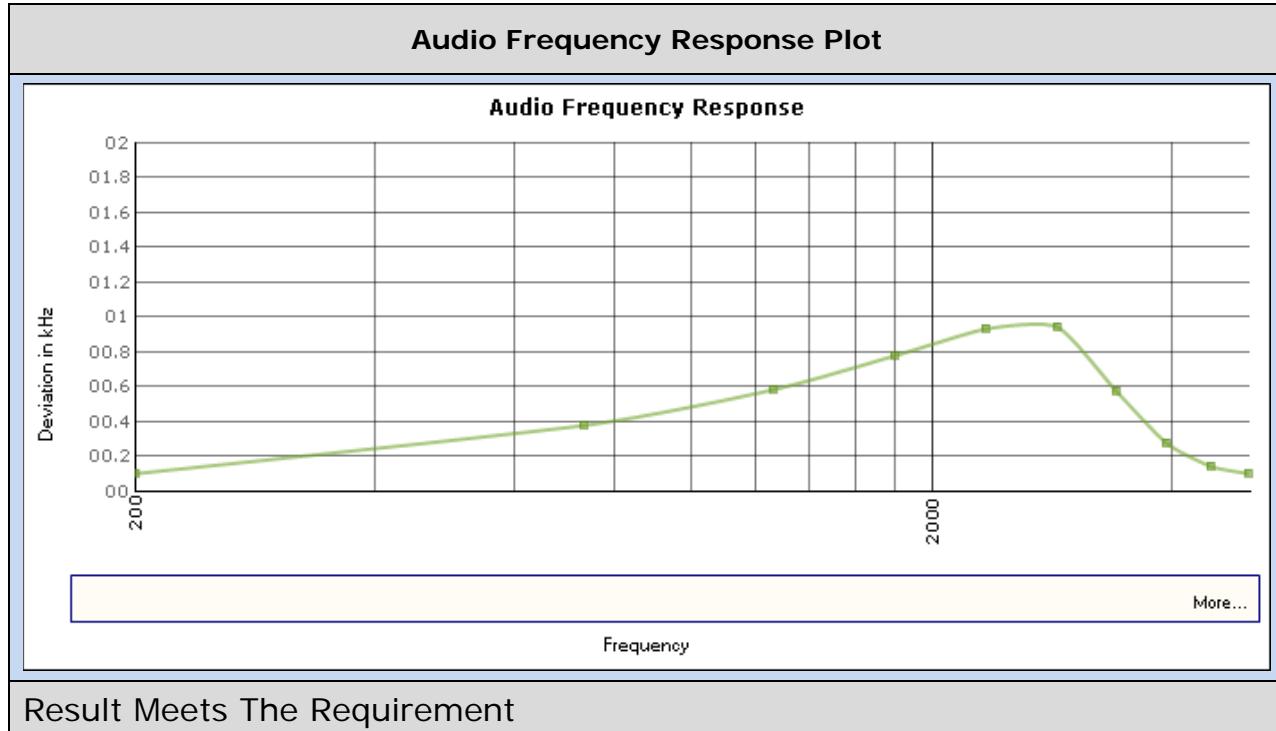

VOICE MODULATED COMMUNICATION EQUIPMENT

Part 2.1047(a): For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

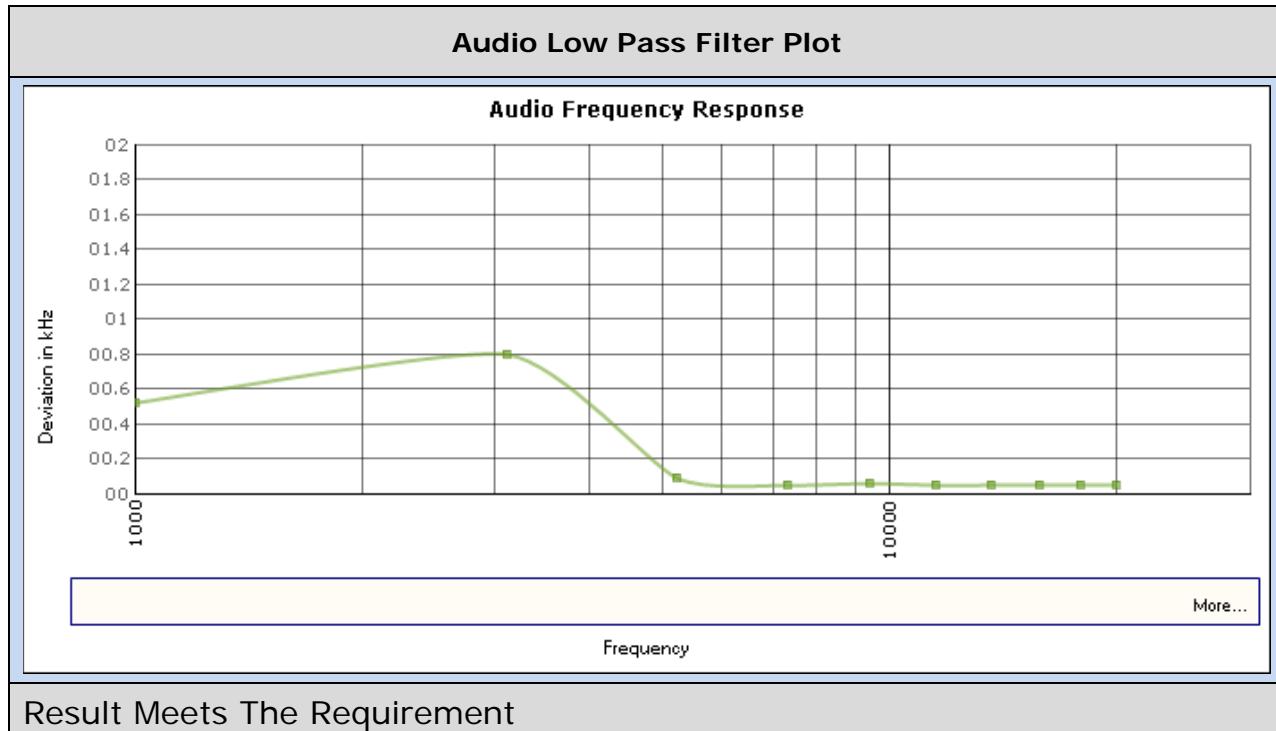

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 10 of 33


AUDIO INPUT VERSUS MODULATION

Rule Part No.: Part 2.1047(b) & 90

Test Requirements:

Method of Measurement: **Modulation cannot exceed 100%**, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-D: 2010. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Test data:

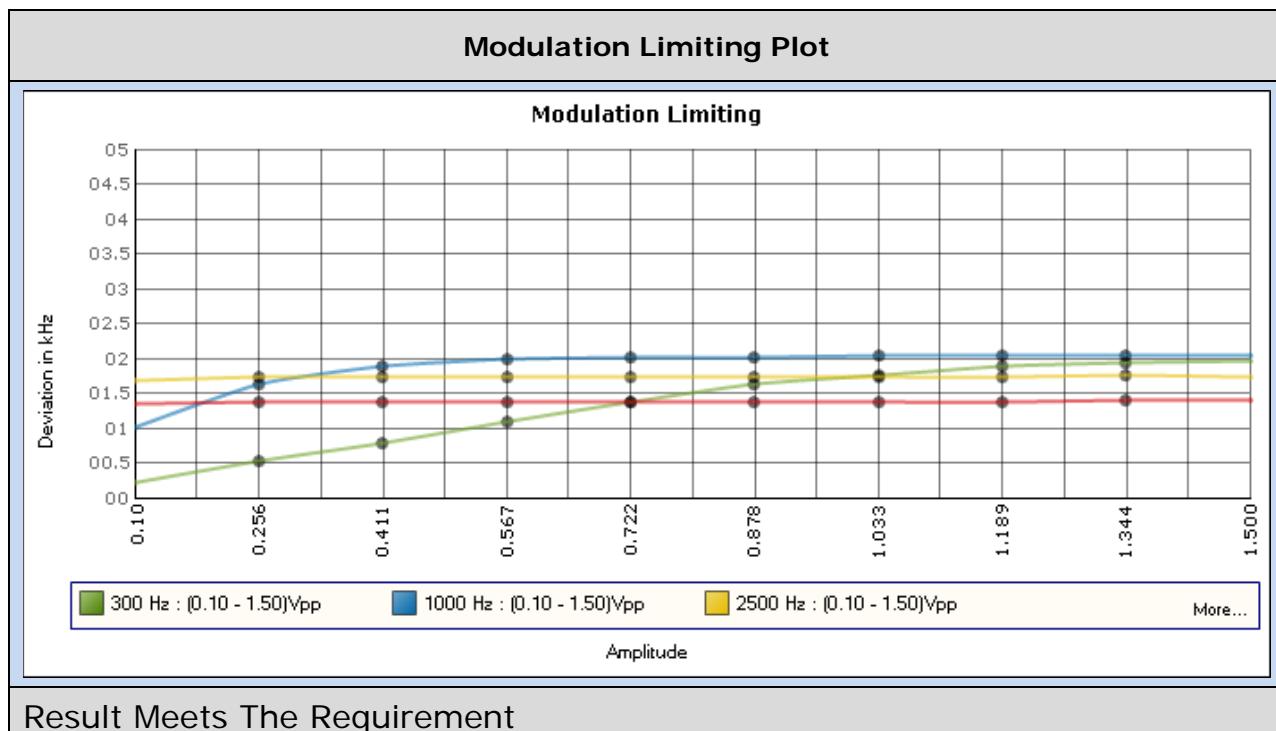

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620


Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 11 of 33

OCCUPIED BANDWIDTH

Rule Part: 2.1049(c)

Method of Measurement: ANSI/TIA 603-D: 2010

Test Setup Diagram:

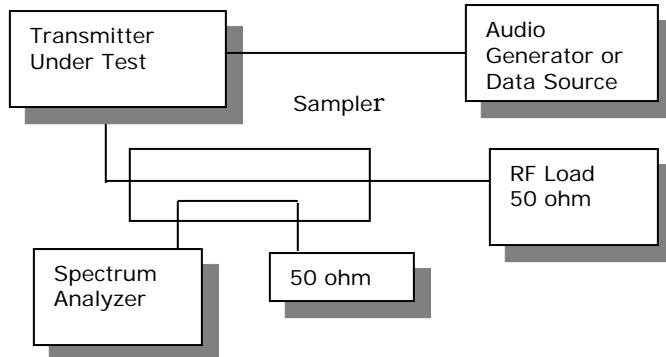

Test Data: 11K0F3E 20 dB Occupied Bandwidth Table

Tuned Frequency (MHz)	Measured Bandwidth (KHz)	Necessary Bandwidth (KHz)	Authorized Bandwidth (KHz)	Channel Spacing (KHz)
406.25	9.8	11	11.25	12.5
429.75	9.8	11	11.25	12.5
450.25	9.8	11	11.25	12.5
469.75	9.8	11	11.25	12.5

Notes: See Spectrum Mask Plots for measurements.

UNWANTED EMISSIONS / EMISSION MASKS

Rule Part: 90.210(d)


Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27 (f_d - 2.88)$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Method of Measurement: ANSI/TIA 603-D: 2010

Test Setup Diagram:

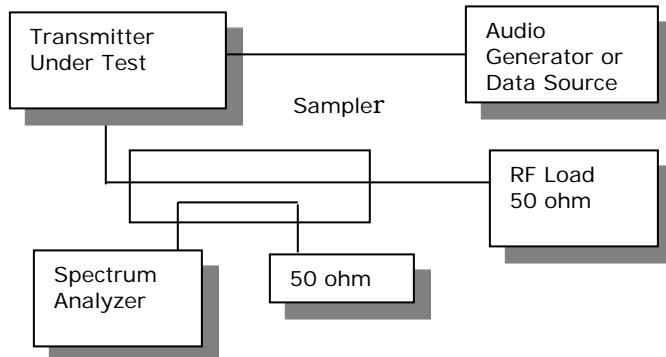

UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11K0F3E Mask D High Power Low End of Band

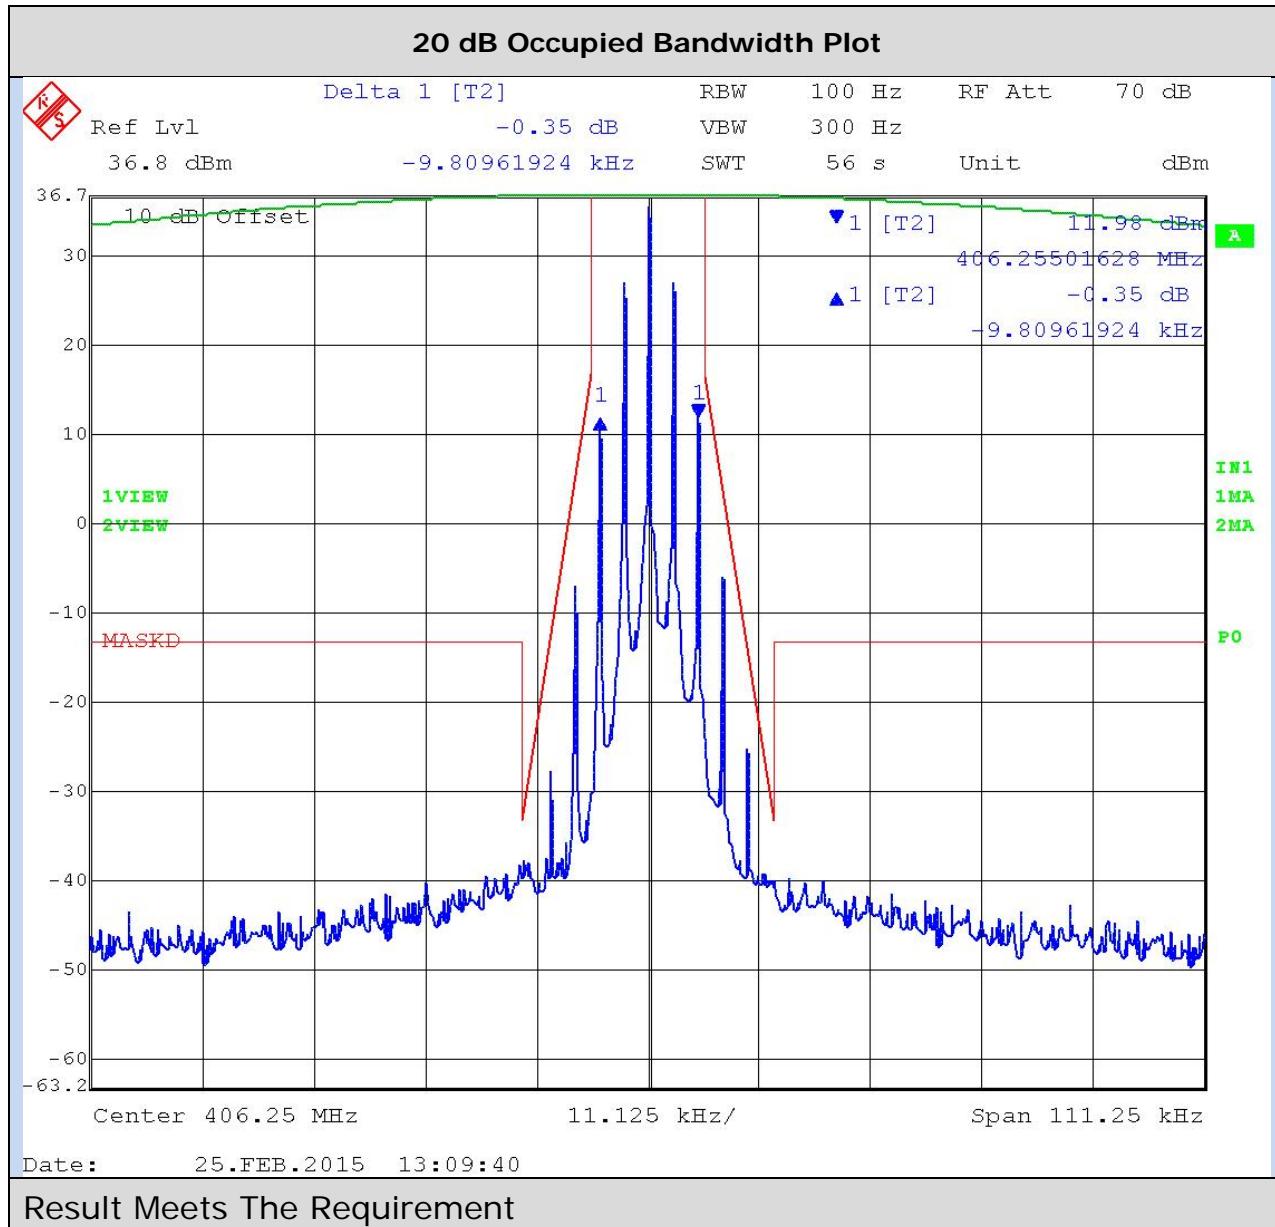


Table of Contents

Applicant: VERTEX STANDARD USA, INC.

Applicant: VERTEX STAN
ECC ID: AXI11284620

Report: VVVERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 14 of 33

UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E High Power Middle of Band

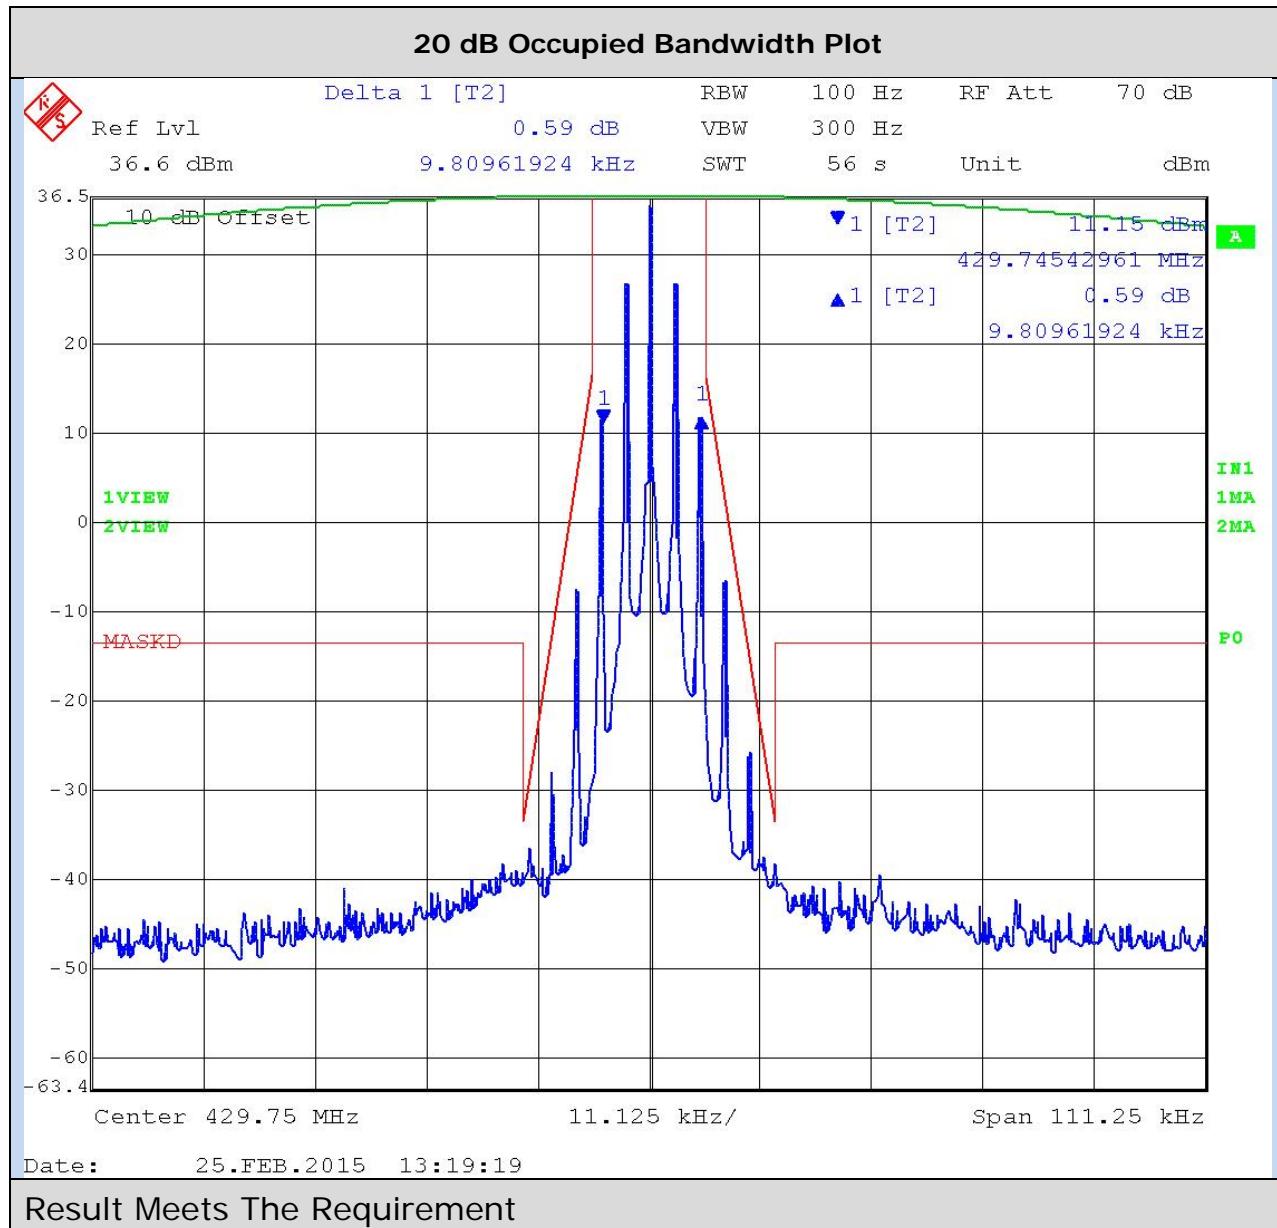


Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 15 of 33

UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E High Power Middle of Band

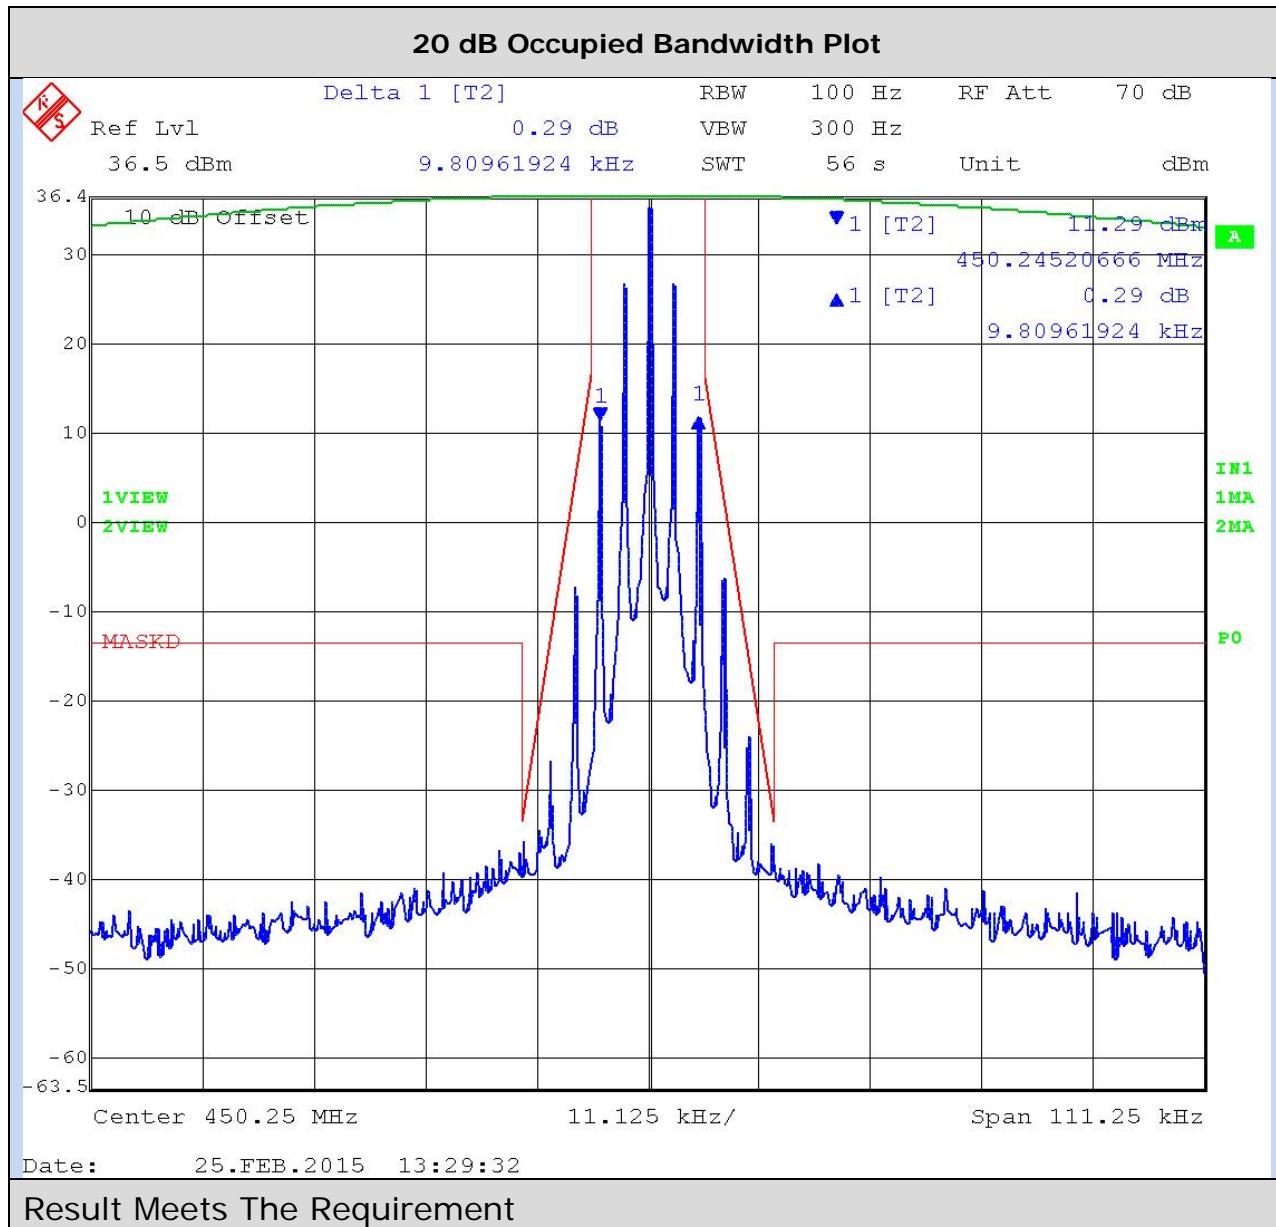


Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 16 of 33

UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E High Power High End of Band

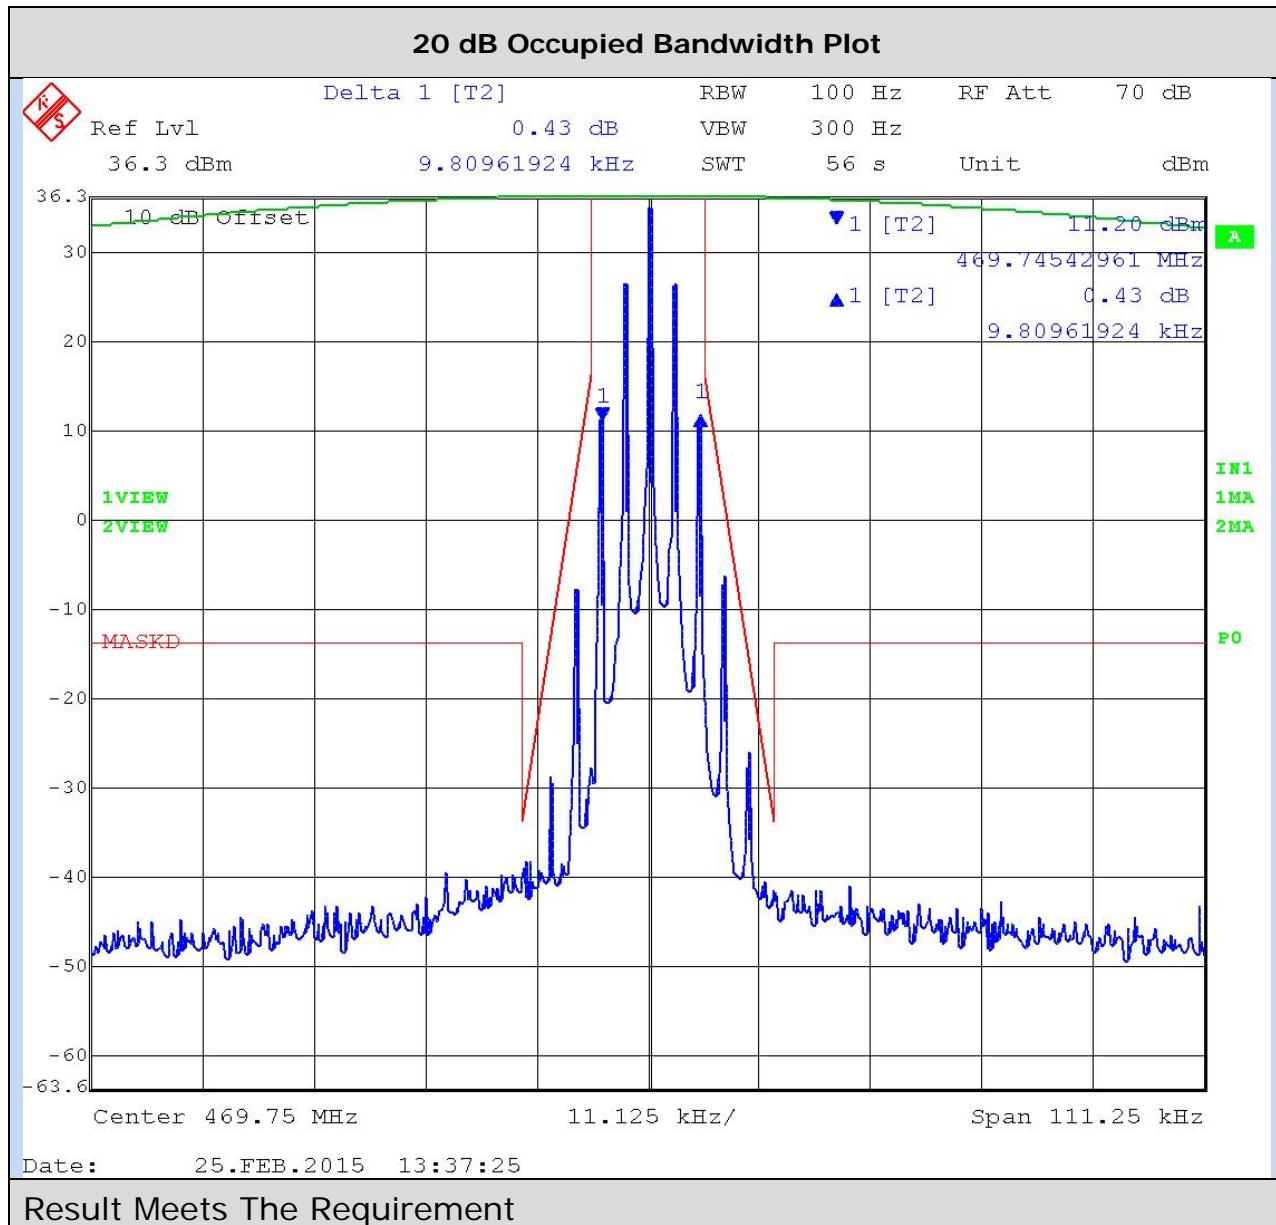


Table of Contents


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 17 of 33

UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E Low Power Low end of Band

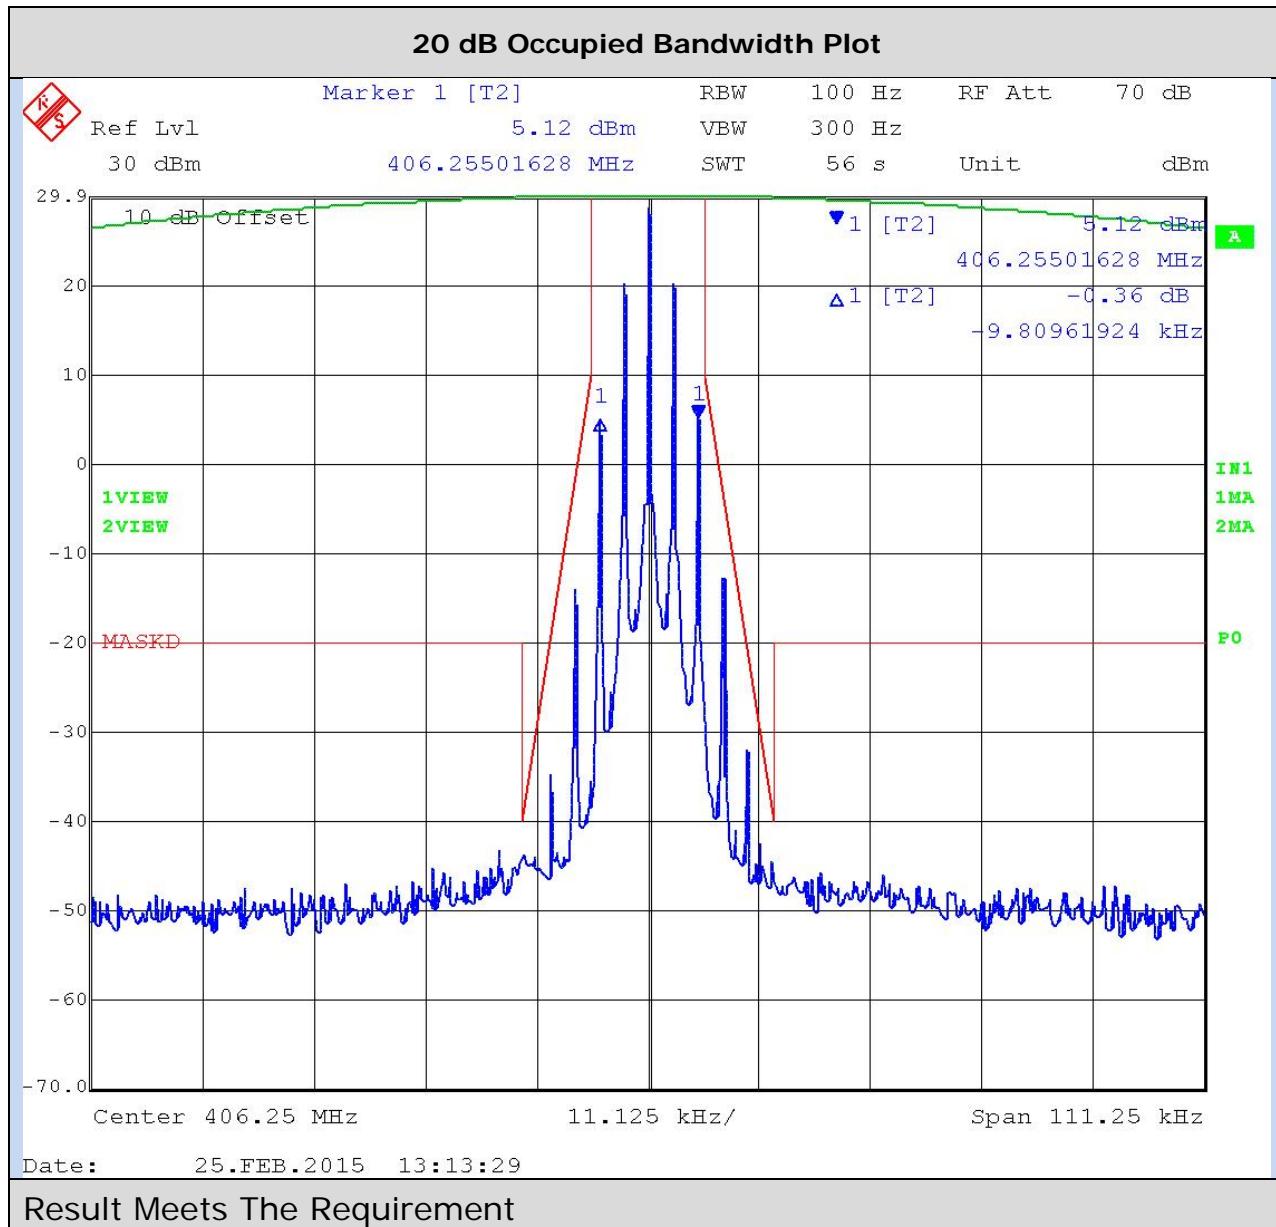

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 18 of 33

UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E Low Power Middle of Band

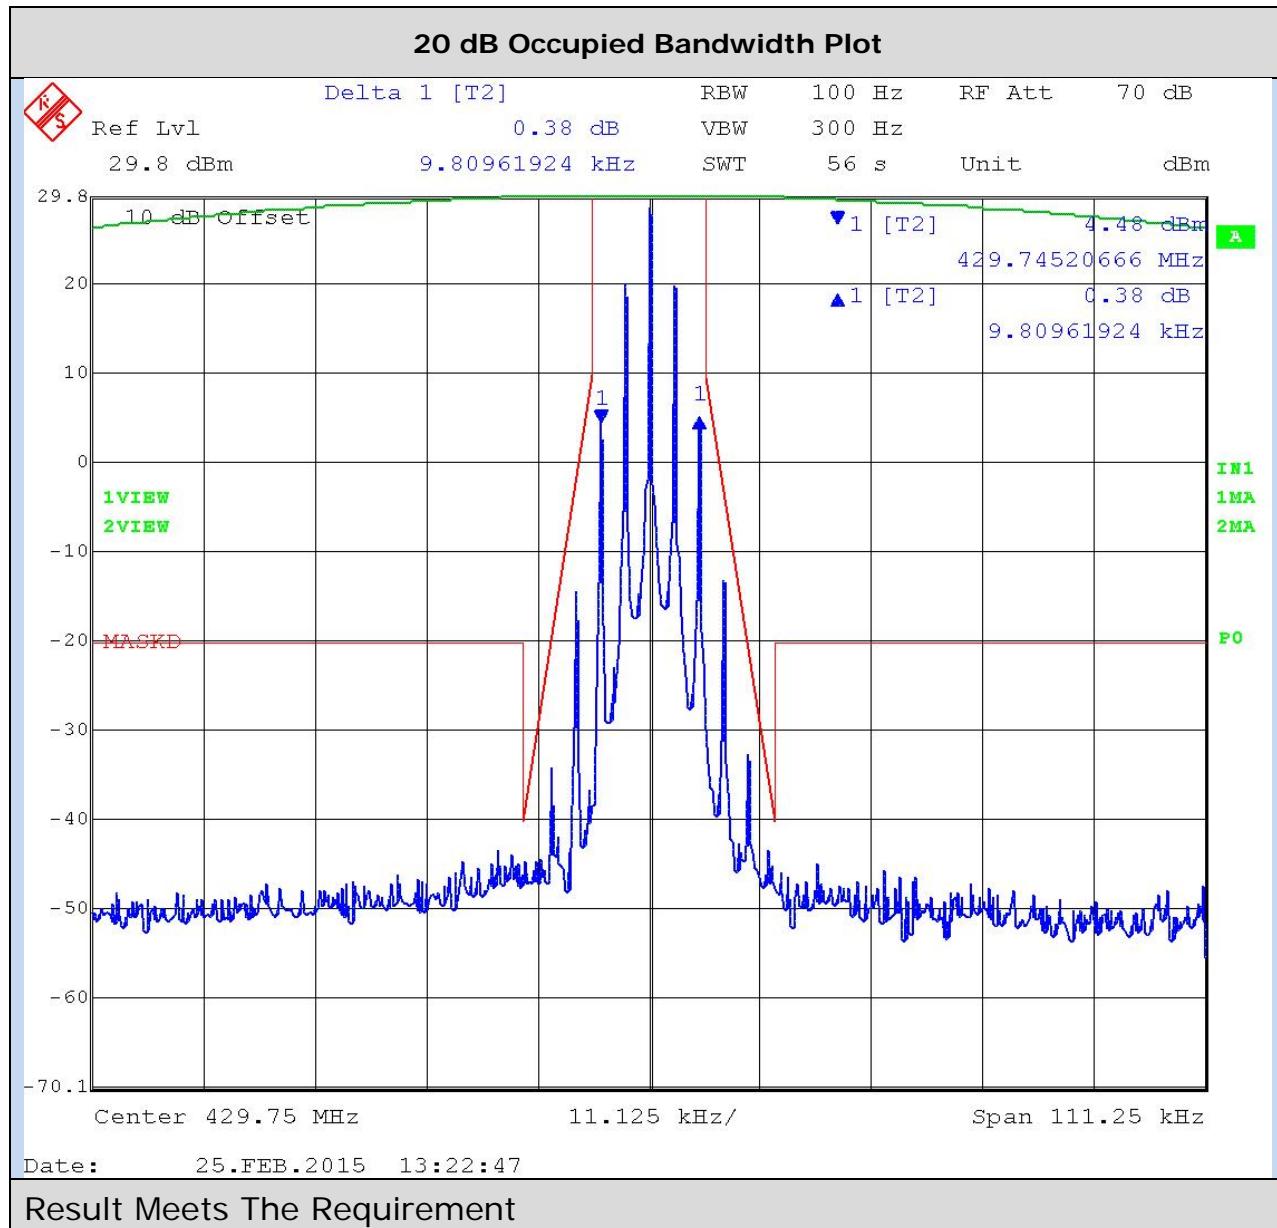


Table of Contents


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 19 of 33

UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E Low Power Middle of Band

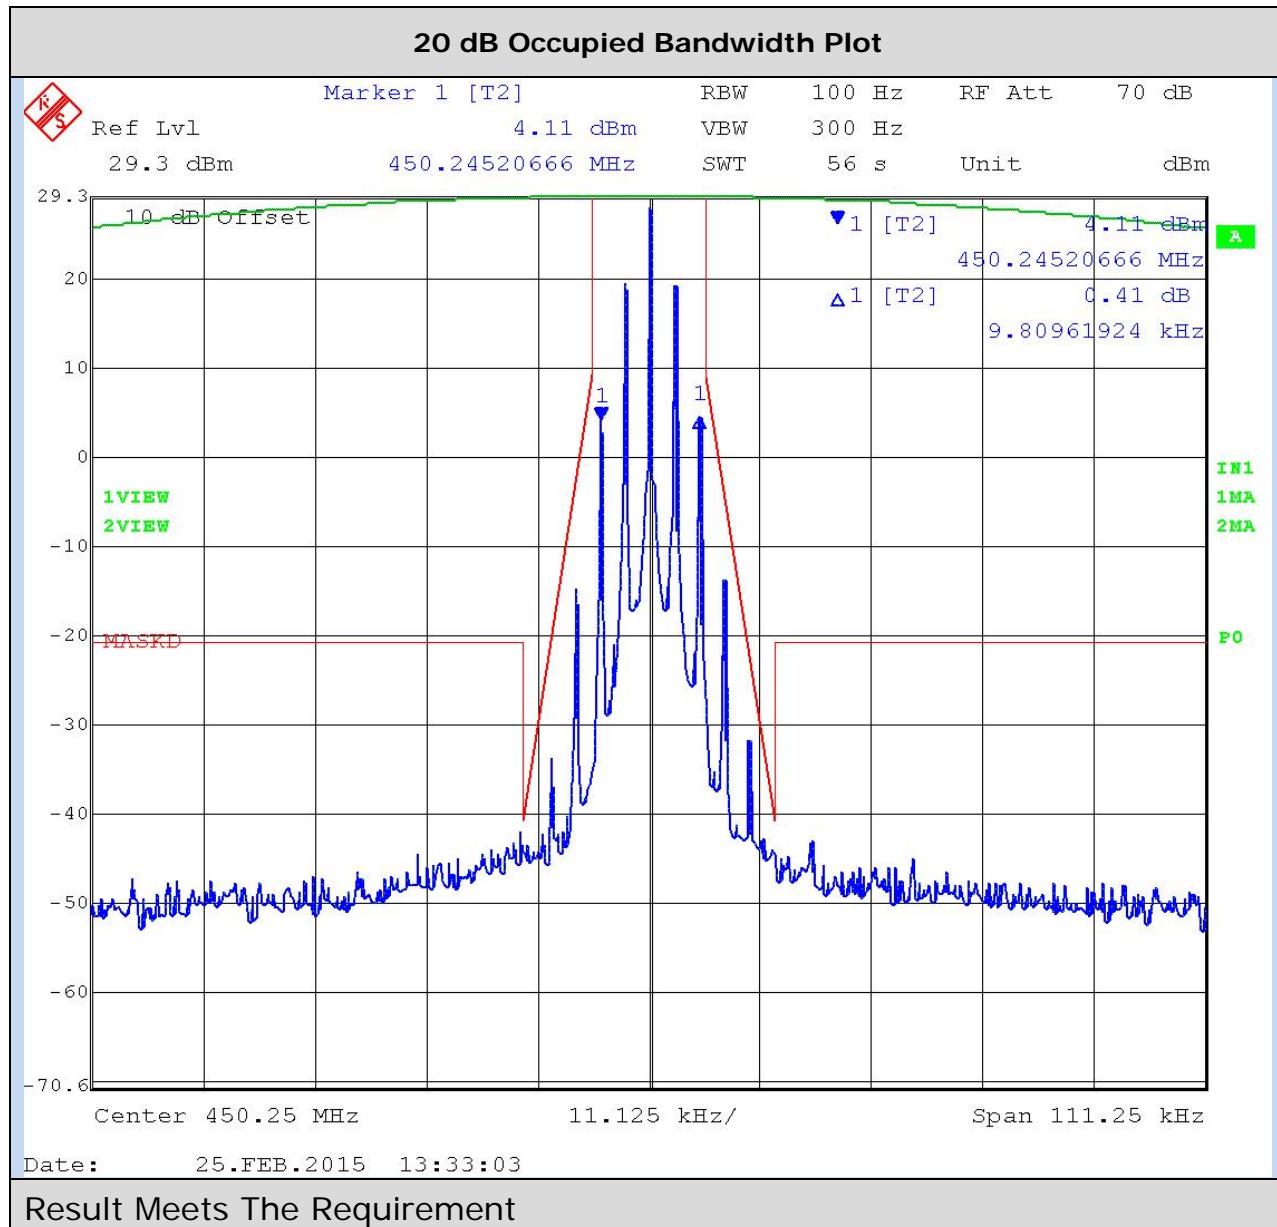

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 20 of 33

UNWANTED EMISSIONS / EMISSION MASKS

11k0F3E low Power High End of Band

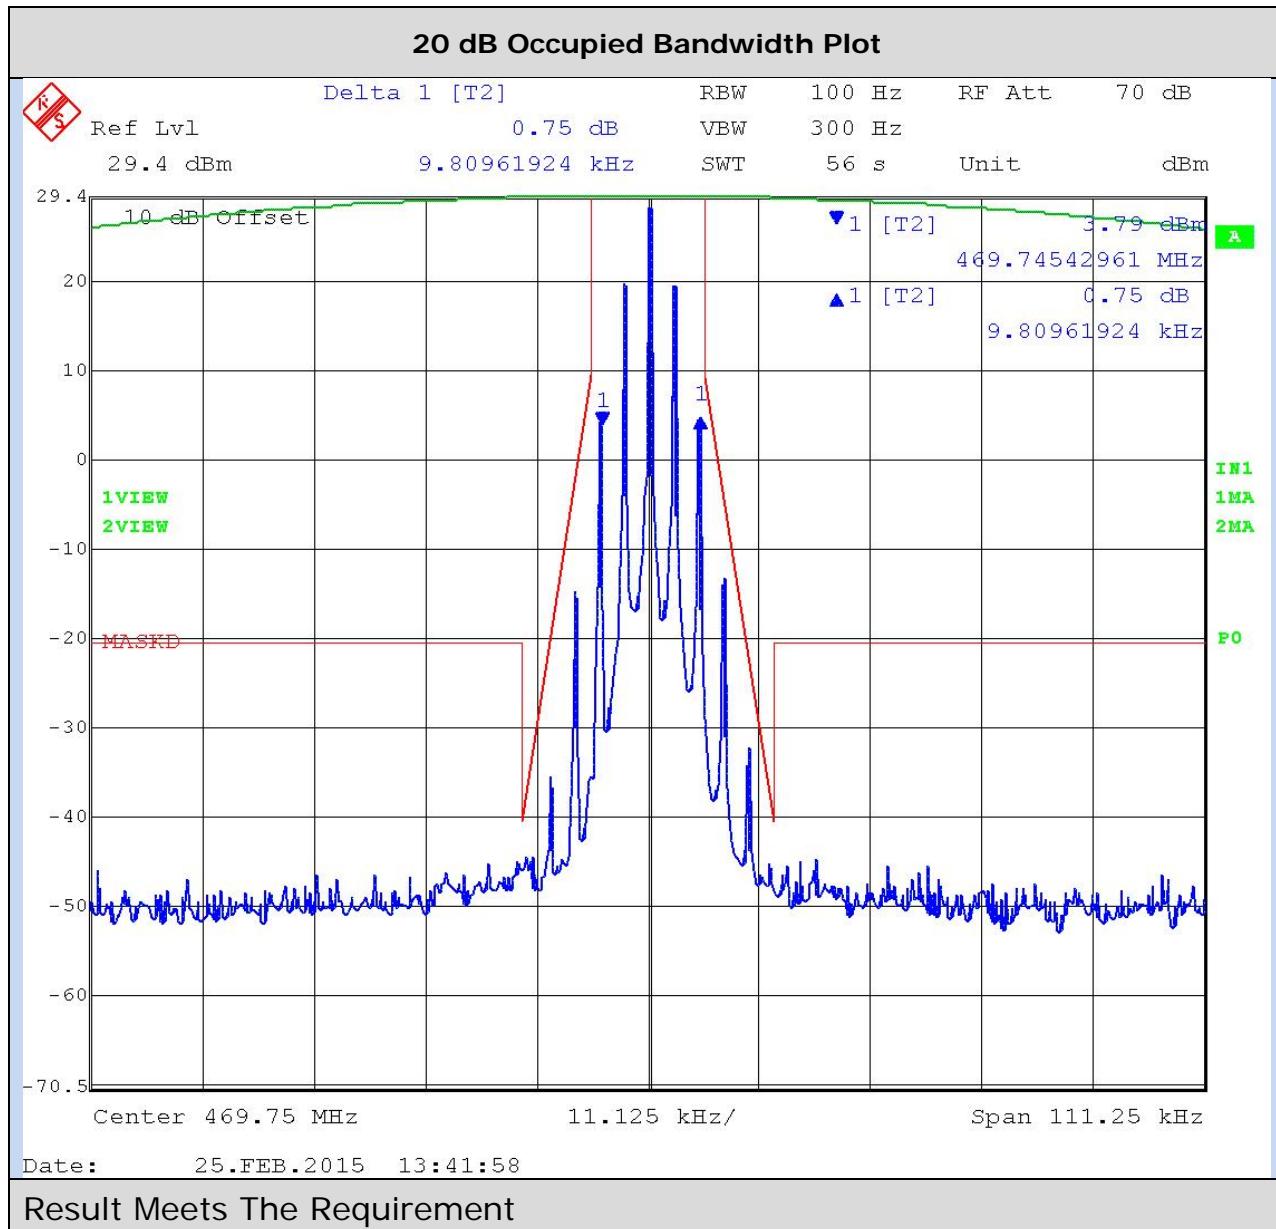


Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 21 of 33

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)


Rule Part No.: Part 2.1051(a)

Requirements:

12.5 kHz Channel Spacing = On any frequency removed from the center of the authorized bandwidth by more than 12.5 KHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from the lowest frequency generated to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-D: 2010.

Method of Measuring Conducted Spurious Emissions

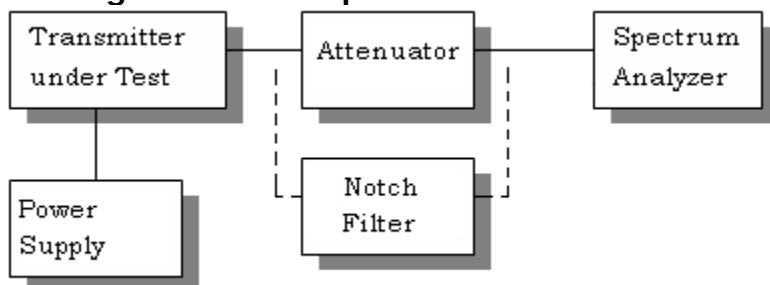

Test Data: 11k0F3E High Power Low end of Band

	dBm	Watts	Limit
Power Output	37.3	5.4	57.3
	Frequency	dBc	Margin
	406.25	0	
	812.5	67.8	10.5
	1218.75	104	46.7
	1625	112.4	55.1
	2031.25	NE	
	2437.5	NE	
	2843.75	NE	
	3250	106.1	48.8
	3656.25	100.5	43.2
	4062.5	105.8	48.5

Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 22 of 33

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Data: 11k0F3E High Power Middle of Band

	dBm	Watts	Limit
Power Output	37.7	5.8	57.6
	Frequency	dBc	Margin
	429.75	0	
	859.5	74.9	17.3
	1289.25	100	42.4
	1719	NE	
	2148.75	NE	
	2578.5	NE	
	3008.25	112	54.4
	3438	101.5	43.9
	3867.75	100.2	42.6
	4297.5	79.9	22.3

Test Data: 11k0F3E High Power Middle of Band

	dBm	Watts	Limit
Power Output	37.5	5.6	57.5
	Frequency	dBc	Margin
	450.25	0	
	900.5	88.3	30.8
	1350.75	90.4	32.9
	1801	NE	
	2251.25	NE	
	2701.5	NE	
	3151.75	109.4	51.9
	3602	103	45.5
	4052.25	106.9	49.4
	4502.5	79	21.5

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Data: 11k0F3E High Power High End of Band

	dBm	Watts	Limit
Power Output	37.3	5.4	57.3
	frequency	dBc	Margin
	469.75	0	
	939.5	89.6	32.3
	1409.25	99.6	42.3
	1879	NE	
	2348.75	NE	
	2818.5	NE	
	3288.25	NE	
	3758	107.1	49.8
	4227.75	105.2	47.9
	4697.5	106.5	49.2

Test Data: 11k0F3E Low Power Low end of Band

	dBm	Watts	Limt
Power Output	30.4	1.1	50.4
	Frequency	dBc	Margin
	406.25	0	
	812.5	87.1	36.7
	1218.75	103.5	53.1
	1625	NE	
	2031.25	NE	
	2437.5	NE	
	2843.75	NE	
	3250	NE	
	3656.25	NE	
	4062.5	NE	

Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 24 of 33

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Data: 11k0F3E Low Power Middle of Band

	dBm	Watts	Limit
Power Output	30.5	1.1	50.4
	Frequency	dBc	Margin
	429.75	0	
	859.5	77.4	27
	1289.25	101.1	50.7
	1719	NE	
	2148.75	NE	
	2578.5	NE	
	3008.25	NE	
	3438	NE	
	3867.75	NE	
	4297.5	NE	

Test Data: 11k0F3E Low Power Middle of Band

	dBm	Watts	Limit
Power Output	30	1	50
	Frequency	dBc	Margin
	450.25	0	
	900.5	84.5	34.5
	1350.75	100.1	50.1
	1801	NE	
	2251.25	NE	
	2701.5	NE	
	3151.75	NE	
	3602	NE	
	4052.25	NE	
	4502.5	86.6	36.6

Table of Contents

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 25 of 33

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

11k0F3E low Power High End of Band

	dBm	Watts	Limit
Power Output	30.1	1	50
	Frequency	dBc	Margin
	469.75	0	
	939.5	88.1	38.1
	1409.25	108	58
	1879	NE	
	2348.75	NE	
	2818.5	NE	
	3288.25	NE	
	3758	NE	
	4227.75	104.7	54.7
	4697.5	108.5	58.5

RESULTS: PASS

[Table of Contents](#)

RADIATED SPURIOUS EMISSIONS

Rule Parts. No.: Part 2.1053


Requirements:

$$12.5 \text{ kHz Channel Spacing} = 50 + 10\log(P) = \text{dBc}$$

$$12.5 \text{ kHz Channel Spacing} = 50 + 10\log(P) = \text{dBc}$$

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-D: 2010 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

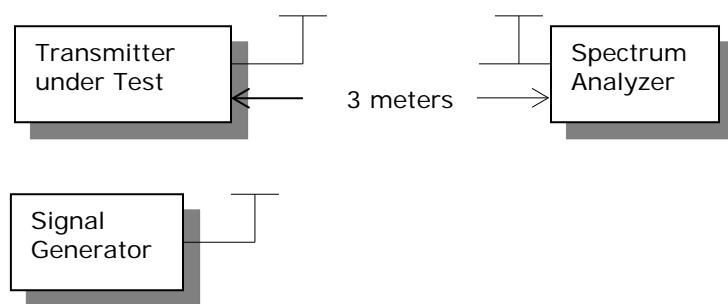

Test Data: High Power Low End of Band

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
406.25	Hi	37.30	5.37	57.30	12.50
Emission Frequency (MHz)	Ant. Polarity		Below Carrier (dBc)	Margin	
812.50	V		98.62	41.32	
1,218.75	H		85.81	28.51	
1,625.00	V		86.36	29.06	
2,031.25	H		105.44	48.14	
2,437.50	H		67.43	47.43	
2,843.75	H		65.79	45.79	
3,250.00	V		78.72	21.42	
3,656.25	H		82.99	25.69	
4,062.50	H		81.01	23.71	

RESULTS: PASS

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 27 of 33

RADIATED SPURIOUS EMISSIONS

Test Data: High Power High End of Band

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
469.75	Hi	37.3	5.37	57.30	12.50
Emission Frequency (MHz)		Ant. Polarity		Below Carrier (dBc)	Margin
939.50		H		82.60	25.30
1,409.25		H		88.43	31.13
1,879.00		H		87.52	30.22
2,348.75		H		89.30	32.00
2,818.50		V		98.21	40.91
3,288.25		H		68.92	11.62
3,758.00		H		77.85	20.55
4,227.75		H		81.54	24.24
4,697.50		H		79.62	22.32

LOW POWER: Middle of the Band

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
429.75	Lo	30.50	1.12	50.50	12.50
Emission Frequency (MHz)		Ant. Polarity		Below Carrier (dBc)	Margin
859.50		V		88.48	37.98
1,289.25		H		82.02	31.52
1,719.00		V		79.13	28.63
2,148.75		H		98.90	48.40
2,578.50		H		97.22	46.72
3,008.25		H		64.41	44.41
3,438.00		H		62.99	42.99
3,867.75		H		58.82	38.82
4,297.50		H		60.62	40.62

RESULTS: PASS

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 90.213

Requirements: Temperature range requirements: -30 to +50° C.
 Voltage Variation +, -15%
 ± 2.5 PPM

Method of Measurements: ANSI/TIA 603-D: 2010.

Test Data:

Temperature	Frequency MHz	Cycles	PPM
25°C (reference)	406.249982	0	0
-30°C	406.249836	-146	-0.359
-20°C	406.249701	-281	-0.692
-10°C	406.249767	-215	-0.529
0°C	406.249825	-157	-0.386
10°C	406.249901	-81	-0.199
20°C	406.249948	-34	-0.084
30°C	406.249951	-31	-0.076
40°C	406.249959	-23	-0.057
50°C	406.249969	-13	-0.032
Battery Voltage	Frequency	Cycles	PPM
-15%	406.25	18	0.044
15%	406.249975	-7	-0.017

RESULTS: PASS

[Table of Contents](#)

TRANSIENT FREQUENCY BEHAVIOR

Part 90.214 Transient Frequency Behavior

REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

t_1^4	± 25.0 kHz	5.0 ms	10.0 ms
t_2	± 12.5 kHz	20.0 ms	25.0 ms
t_3^4	± 25.0 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

t_1^4	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3^4	± 12.5 kHz	5.0 ms	10.0 ms


Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

t_1^4	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3^4	± 6.25 kHz	5.0 ms	10.0 ms

[Table of Contents](#)

TEST PROCEDURE: ANSI/TIA 603-D:2010, the levels were set as follows:


1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above, the transient frequency behavior was observed and recorded.

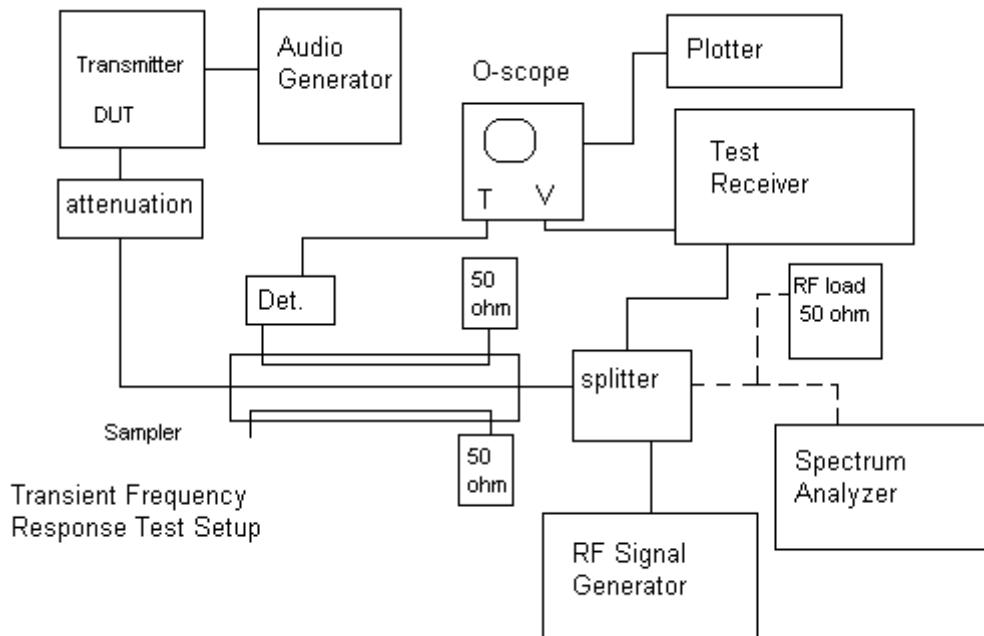


TRANSIENT FREQUENCY BEHAVIOR

Test Results:

12.5KHz Turn On

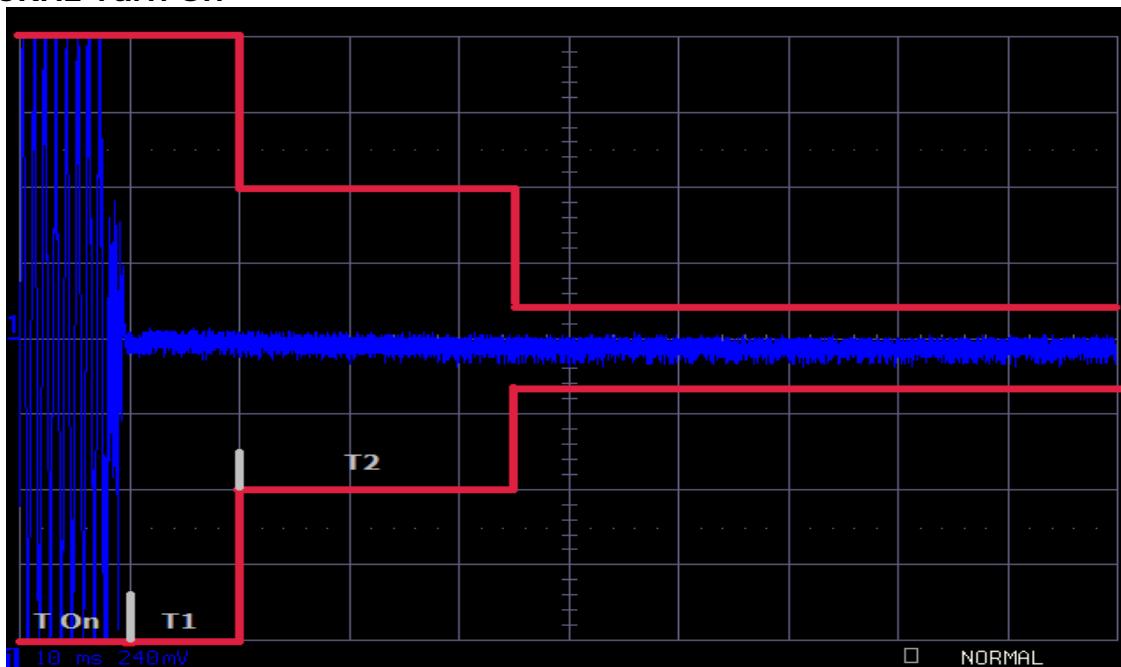

12.5 KHz Turn Off

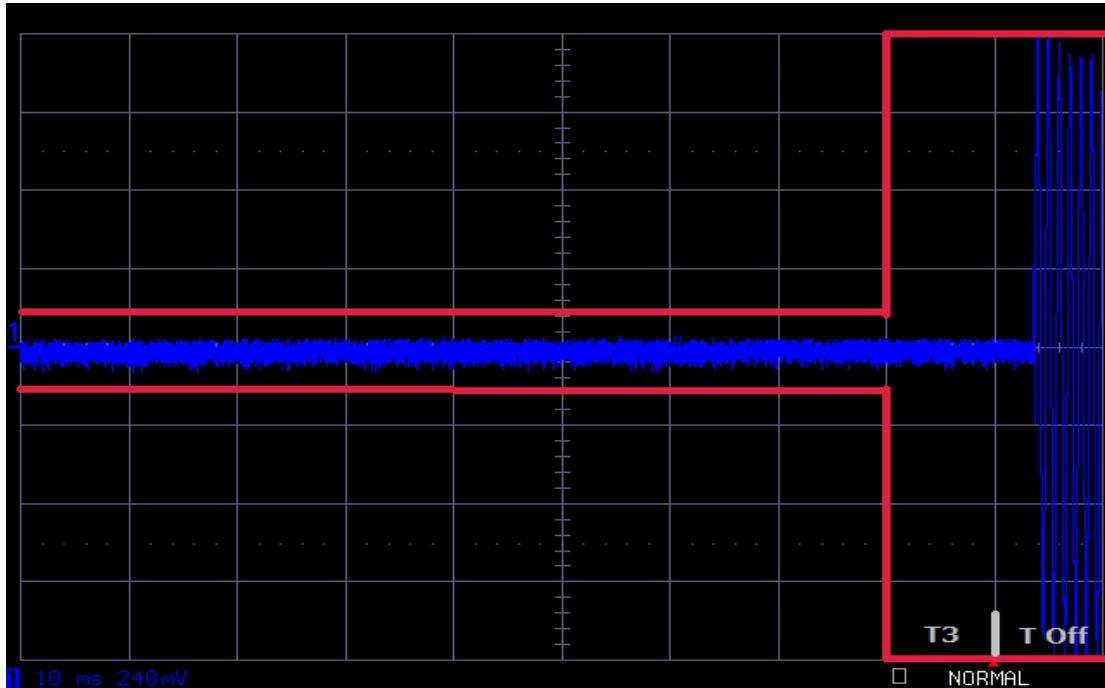

RESULTS: PASS

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 32 of 33

EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
DC Power Supply	HP	6286A	1744A03842	12/12/99	12/12/99
Antenna: Biconical Chamber	Eaton Chamber	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	05/31/15
AC Voltmeter	HP	400FL	2213A14728	06/26/13	06/26/15
Digital Multimeter	Fluke	77	35053830	08/22/13	08/22/15
Audio Analyzer	HP	8903B	3011A13084	08/22/13	08/22/15
DC Power Supply	HP	6286A	2411A09414	12/12/99	12/12/99
Frequency Counter Small Chamber	HP	5385A	3242A07460	06/16/13	06/16/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
Audio Analyzer	HP	8903A	2336A03066	08/30/13	08/30/15
Temperature Chamber Small	Thermotron Corp.	S1.2 Mini Max	25-1420-09	08/20/14	08/20/16
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	12/12/99	12/12/99
Hygro-Thermometer	Extech	445703	0602	06/20/13	06/20/15
30 dB Attenuator	Narda	769-30	10267	03/15/13	03/15/15
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16
Signal Generator HP 8648C	HP	8648C	3623A02898	08/29/13	08/29/15

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11284620

Report: V\VERTEX STANDARD USA\390AUT15\390AUT15TestReport.docx Pg 33 of 33