

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 1 of 84

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
DAT-P-176/94-D1



Independent ETSI
compliance test house



Accredited Bluetooth® Test Facility (BQTF)

Test report no.: 4-1610-01-05/05
optiPoint WL2 professional / S
FCC Part 15.247 / CANADA RSS-210
FCC ID: AY3-OPWL2PRO
IC: 267AQ-OPWL2PRO

Table of contents

1. ADMINISTRATIVE DATA	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items.....	3
1.1.3 Applicant 's details	4
1.2. ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3. DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
1.3.2 If RF component testing only, description of additional used HW/SW.....	5
1.3.3 Additional EUT information	5
1.3.4 Additional EUT information for IC Canada (appendix 2).....	6
1.3.5 EUT operating modes	<i>Fehler! Textmarke nicht definiert.</i>
1.3.6 Extreme conditions testing values.....	<i>Fehler! Textmarke nicht definiert.</i>
2 TESTSTANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	7
3 RF MEASUREMENT TESTING	8
3.1 DESCRIPTION OF TEST SET-UP	8
3.1.1 Radiated measurements	8
3.1.2 Conducted measurements	8
3.2 REFERENCED DOCUMENTS	9
3.3 ADDITIONAL COMMENTS	9
3.4 ANTENNA GAIN	9
3.5 PEAK POWER SPECTRAL DENSITY (DIGITALLY MODULATED SYSTEMS) §15.247(D)	10
3.6 SPECTRUM BANDWIDTH OF A DSSS SYSTEM / 6 DB BANDWITH §15.247(A2)	16
3.7 MAXIMUM OUTPUT POWER (CONDUCTED) §15.247 (B) (1)	22
3.8 MAX. PEAK OUTPUT POWER (RADIATED) §15.247 (B) (1)	31
3.9 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (C)	32
3.10 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS §15.205	40
3.11 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) §15.247 (C)	48
3.12 SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) §15.209	56
3.13 SPURIOUS EMISSIONS - RADIATED (RECEIVER) §15.109 / 209	64
3.14 SPURIOUS EMISSIONS - RADIATED <30 MHZ §15.109	67
3.15 CONDUCTED EMISSIONS <30 MHZ §15.107/207	68
4 PHOTOGRAPHS	73

ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29


Page 3 of 84

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory


Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-176/94-D1 Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Harro Ames, Michael Berg Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de


..... /
Responsible for testing laboratory
(Harro Ames, Michael Berg)

1.1.2 Organizational items

Reference No.:	4-1610-01-05/05
Order No.:	
Responsible for test report and project leader:	Harro Ames, Michael Berg
Receipt of EUT:	2005-06-20
Date(s) of test:	2005-06-20 to 2005-06-22
Date of report:	2005-06-29
Number of report pages:	84
Number of diagram pages (annex):	

Version of template:	1.2


..... /
Responsible for test report
(Harro Ames, Michael Berg)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 4 of 84

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	Siemens AG
Address:	Haidenauplatz 1 D-81667 München Germany
Contact person:	Mr. Karlheinz Stöger Phone: +49 89 722 23658 Fax: +49 89 722 91 36 34 email: karlheinz.stoeger@siemens.com
Contact person:	Mr. Heinrich Niessner Phone: +49 89 722 23858 Fax: +49 89 722 91 93 69 email: heinrich.niessner@siemens.com

1.2 Administrative data of manufacturer / member

Manufacturer's name	- applicant -
Address:	

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 5 of 84

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
optiPoint WL2 professional, optiPoint WL2 professional S		Wireless IP-phone			
Frequency Band [MHz]	Type of Modulation	Number of channels	Antenna	Power Supply	Temperature Range
ISM 2.400 - 2.483,5	DSSS/ OFDM	11	Build-in ¼ lambda antenna	3.9V battery and charging cradle with AC power supply	0° - 45° C

FCC ID: AY3-OPWL2PRO
IC: 267AQ-OPWL2PRO

1.3.2 If RF component testing only, description of additional used HW/SW

none

1.3.3 Additional EUT information

The tested phone is an IP-phone to use with normal WLAN-AP, possible to work in 802.11b and -g mode.

The DSSS-mode was measured with 1 Mbit data rate, the OFDM-mode with 54 Mbit data rate.

During test we used a special software delivered by the customer and a laptop to set the phone in the required modes. The radiated tests were performed in the charging cradle with all cables.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 6 of 84

1.3.4 Additional EUT information for IC Canada (appendix 2)

Certification Number:	267AQ-OPWL2PRO
Product Name:	optiPoint WL2 professional, optiPoint WL2 professional S
Manufacturer:	Siemens AG Haidenauplatz 1 D-81667 München Germany Mr. Karlheinz Stöger Phone: +49 89 722 23658 Fax: +49 89 722 91 36 34 email: karlheinz.stoeger@siemens.com
Tested to Radio Standards Specification (RSS) No.:	RSS-210 Issue 6
Open Area Test Site Industry Canada Number:	3463
Frequency Range (or fixed frequency) [MHz]:	2412 - 2462 MHz
Antenna Type:	Build-in ¼ lambda antenna
RF: Power [W] (max) DSSS:	Rad. EIRP: 0.098 Conducted : 0.112
RF: Power [W] (max) OFDM:	Rad. EIRP: 0.123 Conducted : 0.155
Occupied Bandwidth (99% BW) [kHz]:	DSSS Mode: 13080 OFDM Mode: 16580
Type of Modulation:	PSK
Emission Designator (TRC-43):	13M6P7D (DSSS) 16M6P7D (OFDM)
Transmitter Spurious (worst case) [μ V/m in 3m]:	63.10
Receiver Spurious (worst case) [μ V/m in 3m]:	84.14

ATTESTATION:

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Signature: | H. Ames



Date: 2005-06-29

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 7 of 84

2 Teststandard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210			

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (d)	Peak power spectral density	Yes			
§15.247(a2)	Spectrum Bandwidth of a DSSS/OFDM System at 6dB BW	Yes			
§ 15.247 (b) (3)	Maximum output power (conducted)	Yes			
§ 15.247 (b) (3)	Max. peak output power (radiated)	Yes			
§15.247 (c)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (c)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.209	Spurious Emission -radiated (Transmitter)	Yes			
§ 15.247 (c)	Spurious Emissions-radiated (Receiver)	Yes			
§ 15.109	Spurious Emissions-radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3 RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

9 kHz – 150 kHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna


200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn with lownoise preamp

The EUT is powered by a special shielded laptop to avoid spurs that do not come from the test object.

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal paths are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

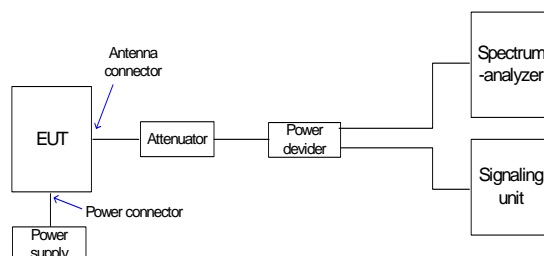

3.2 Referenced Documents

none

3.3 Additional comments

Hardware / software changes during testing

none

3.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

It is 0 dBi.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29


Page 10 of 84

3.5 Peak Power Spectral density (digitally modulated systems) §15.247(d)

DSSS

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

	Marker 1 [T1 NOI]	RBW	3 kHz	RF Att	20 dB
Ref Lvl	-55.83 dBm/Hz	VBW	10 kHz		
10 dBm	2.41245240 GHz	SWT	500 s	Unit	dBm

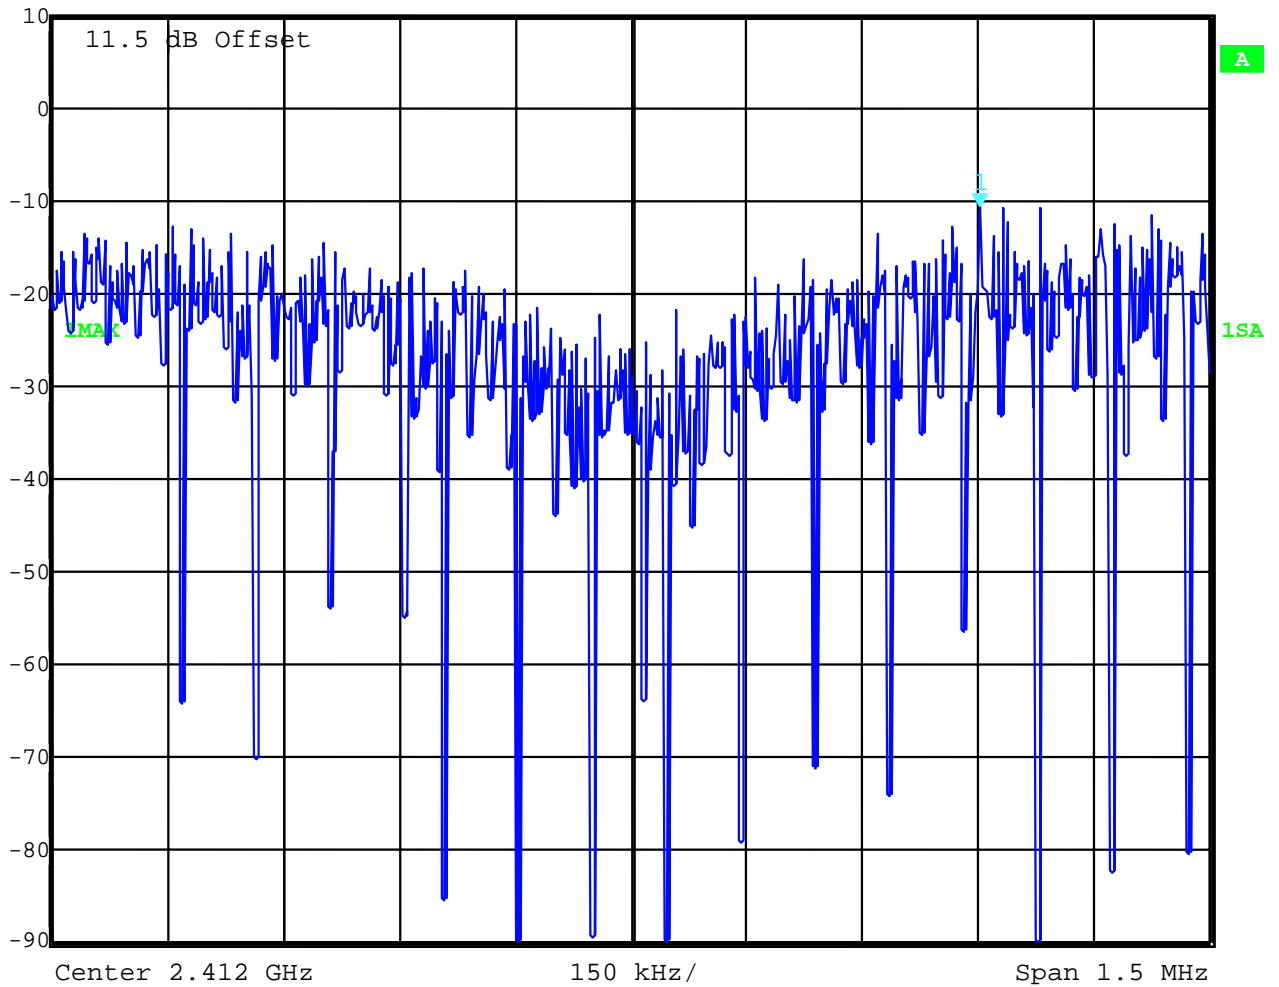

Date: 21.JUN.2005 12:50:23

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 11 of 84

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

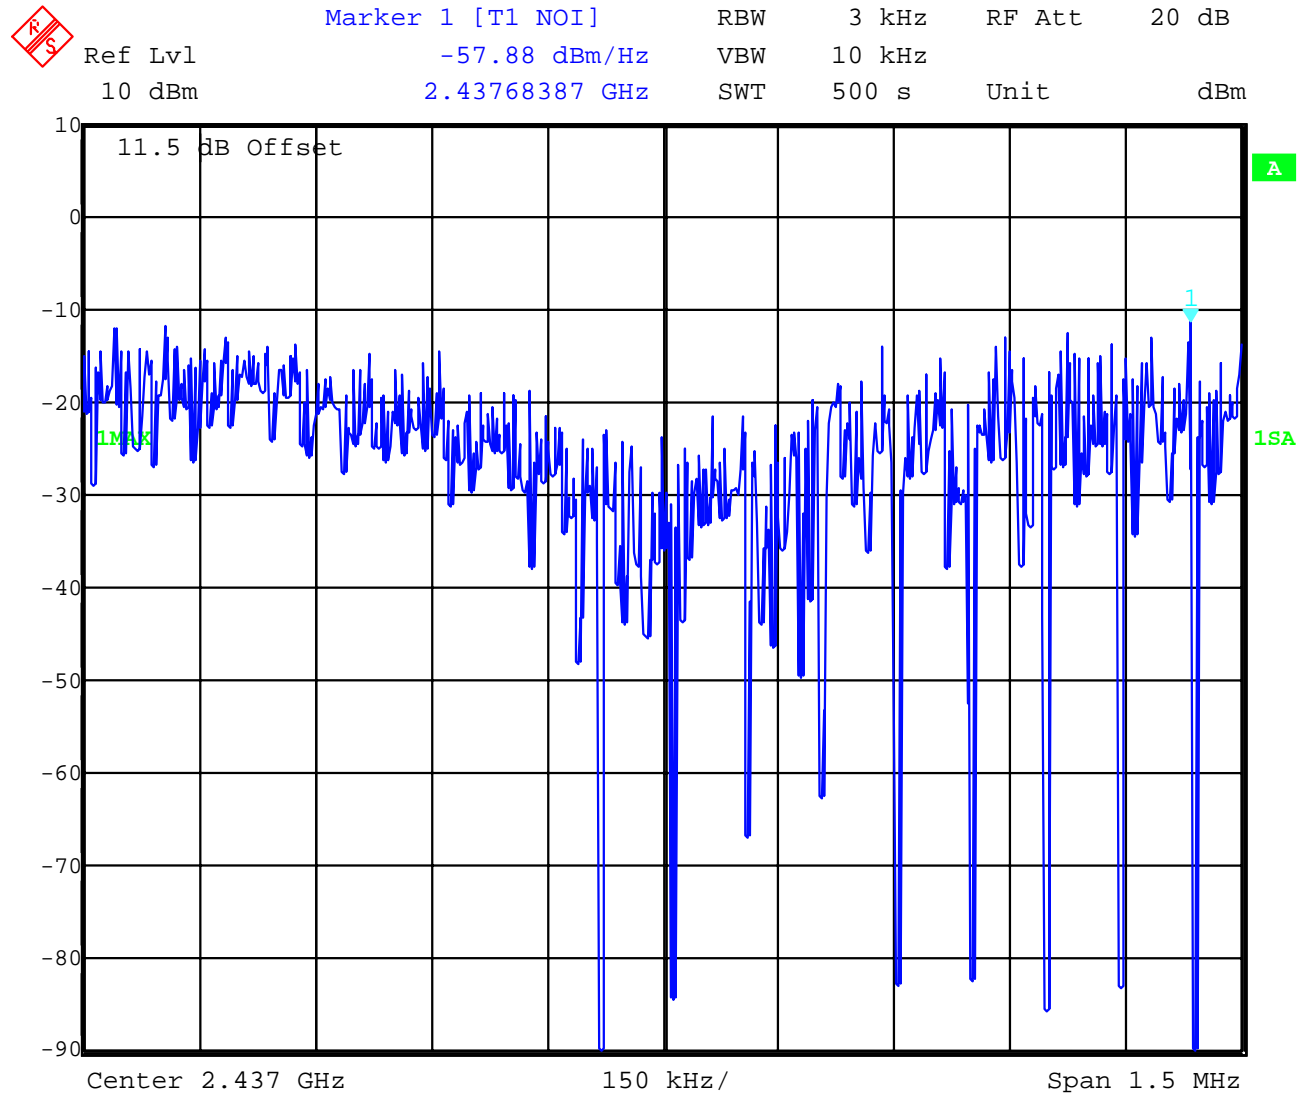

Date: 21.JUN.2005 12:52:35

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 12 of 84

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

	Marker 1 [T1 NOI]	RBW	3 kHz	RF Att	20 dB
Ref Lvl	-52.54 dBm/Hz	VBW	10 kHz		
10 dBm	2.46134920 GHz	SWT	500 s	Unit	dBm

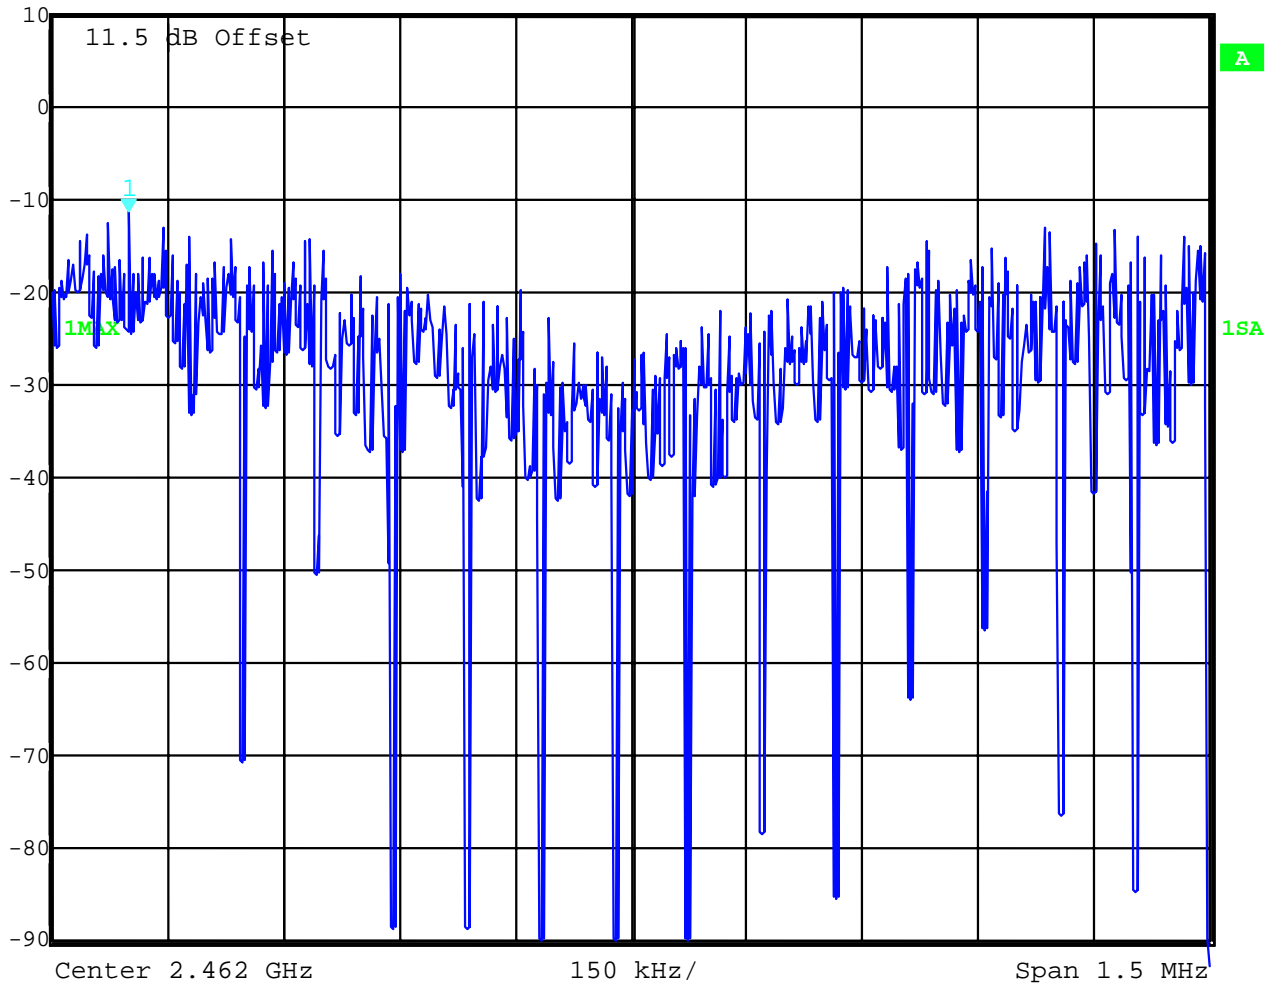

Date: 21.JUN.2005 12:53:49

Results: Plot 1: Power density : - 55.8 dBm/Hz = - 21.0 dBm / 3 KHz
 Plot 2: Power density : - 57.9 dBm/Hz = - 23.1 dBm / 3 KHz
 Plot 3: Power density : - 55.6 dBm/Hz = - 20.8 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 13 of 84

OFDM

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

	Marker 1 [T1 NOI]	RBW	3 kHz	RF Att	20 dB
	Ref Lvl	-57.27 dBm/Hz	VBW	10 kHz	
	10 dBm	2.41167986 GHz	SWT	500 s	Unit dBm

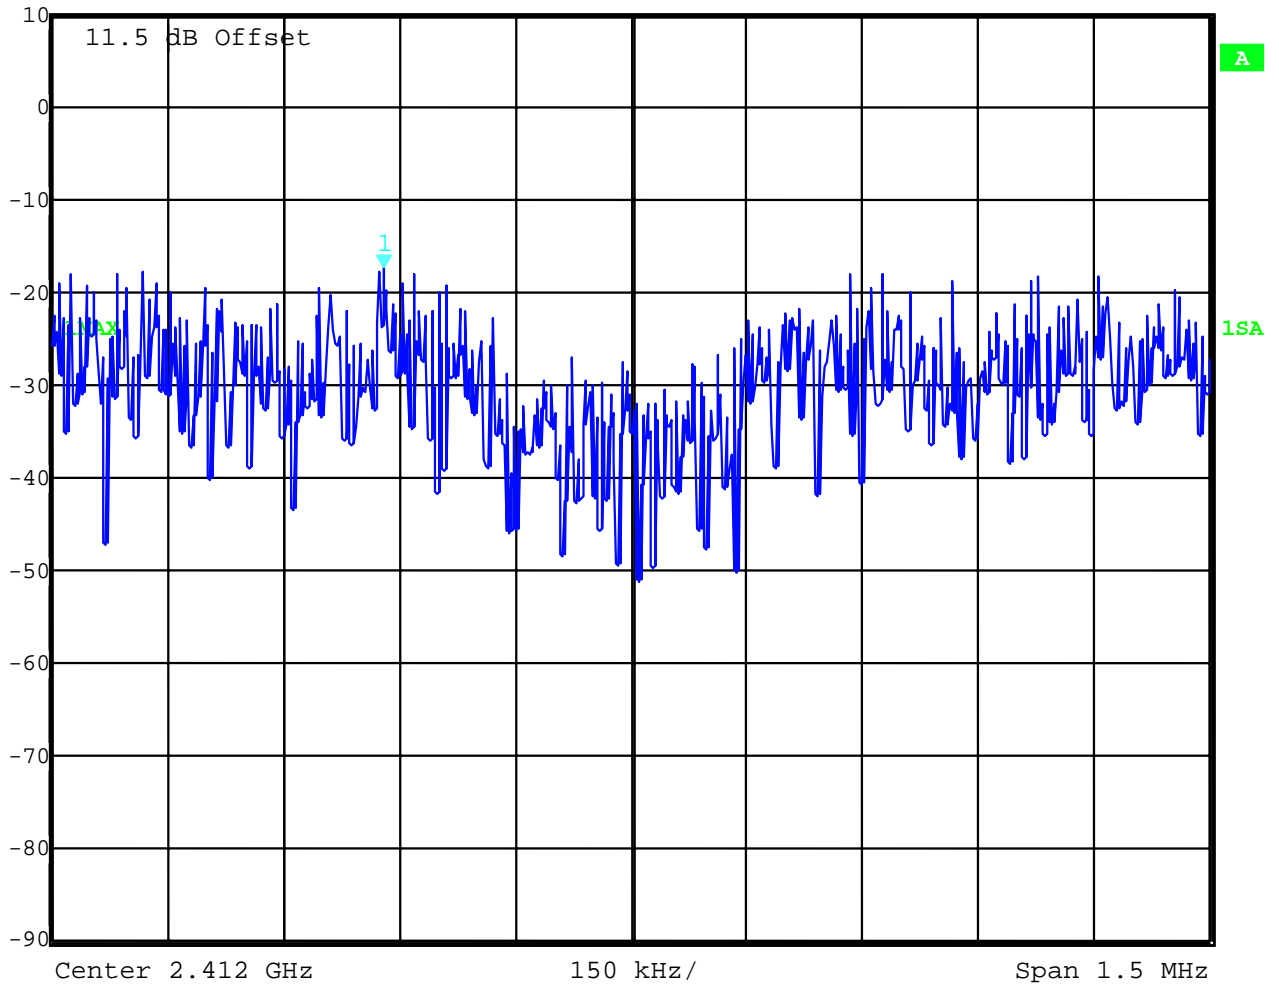

Date: 21.JUN.2005 12:55:50

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 14 of 84

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

	Marker 1 [T1 NOI]	RBW	3 kHz	RF Att	20 dB
Ref Lvl	-58.17 dBm/Hz	VBW	10 kHz		
10 dBm	2.43672796 GHz	SWT	500 s	Unit	dBm

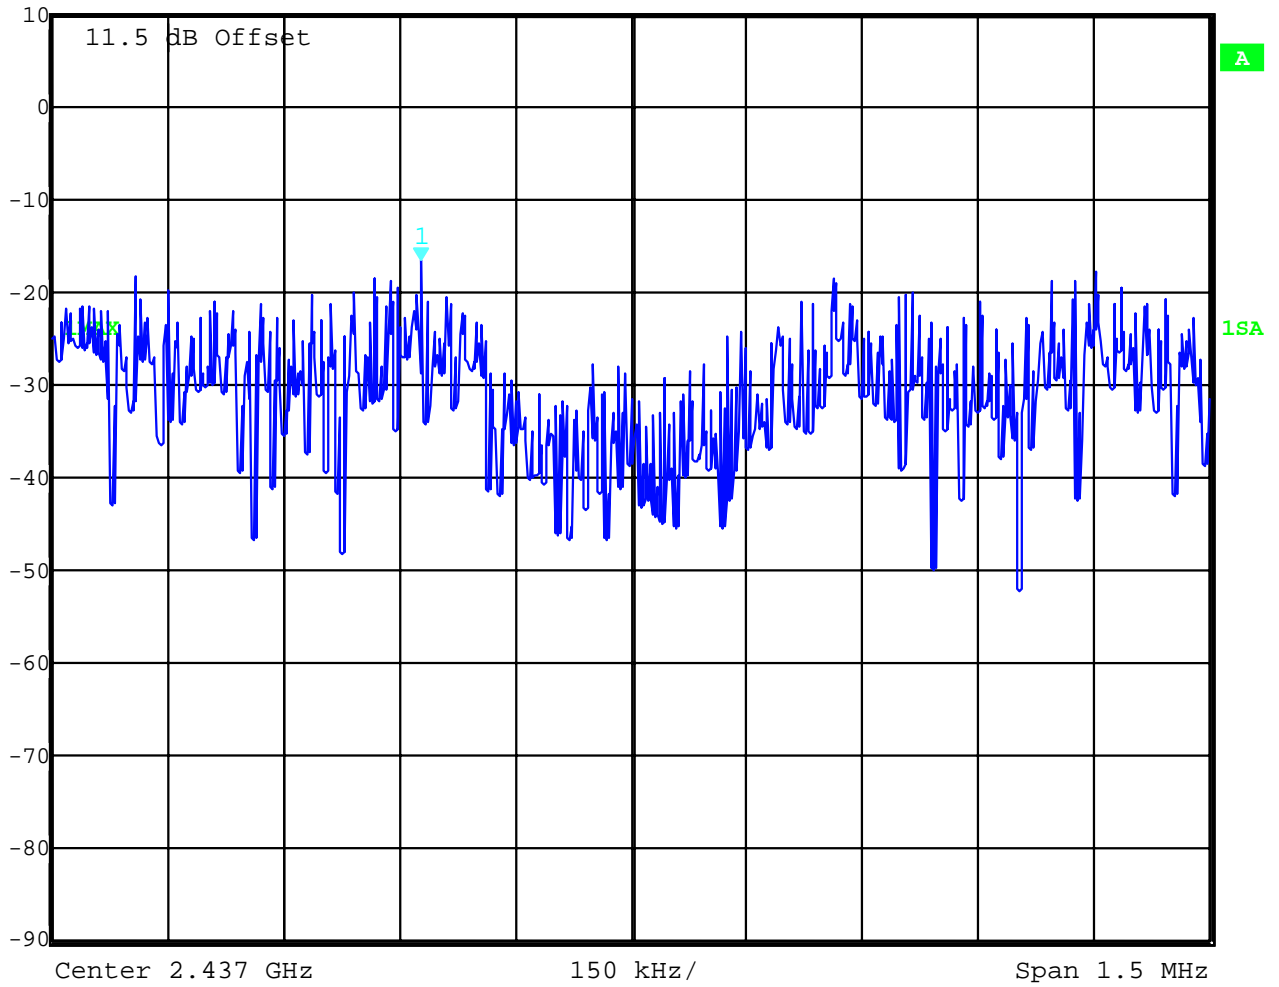

Date: 21.JUN.2005 12:57:01

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 15 of 84

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

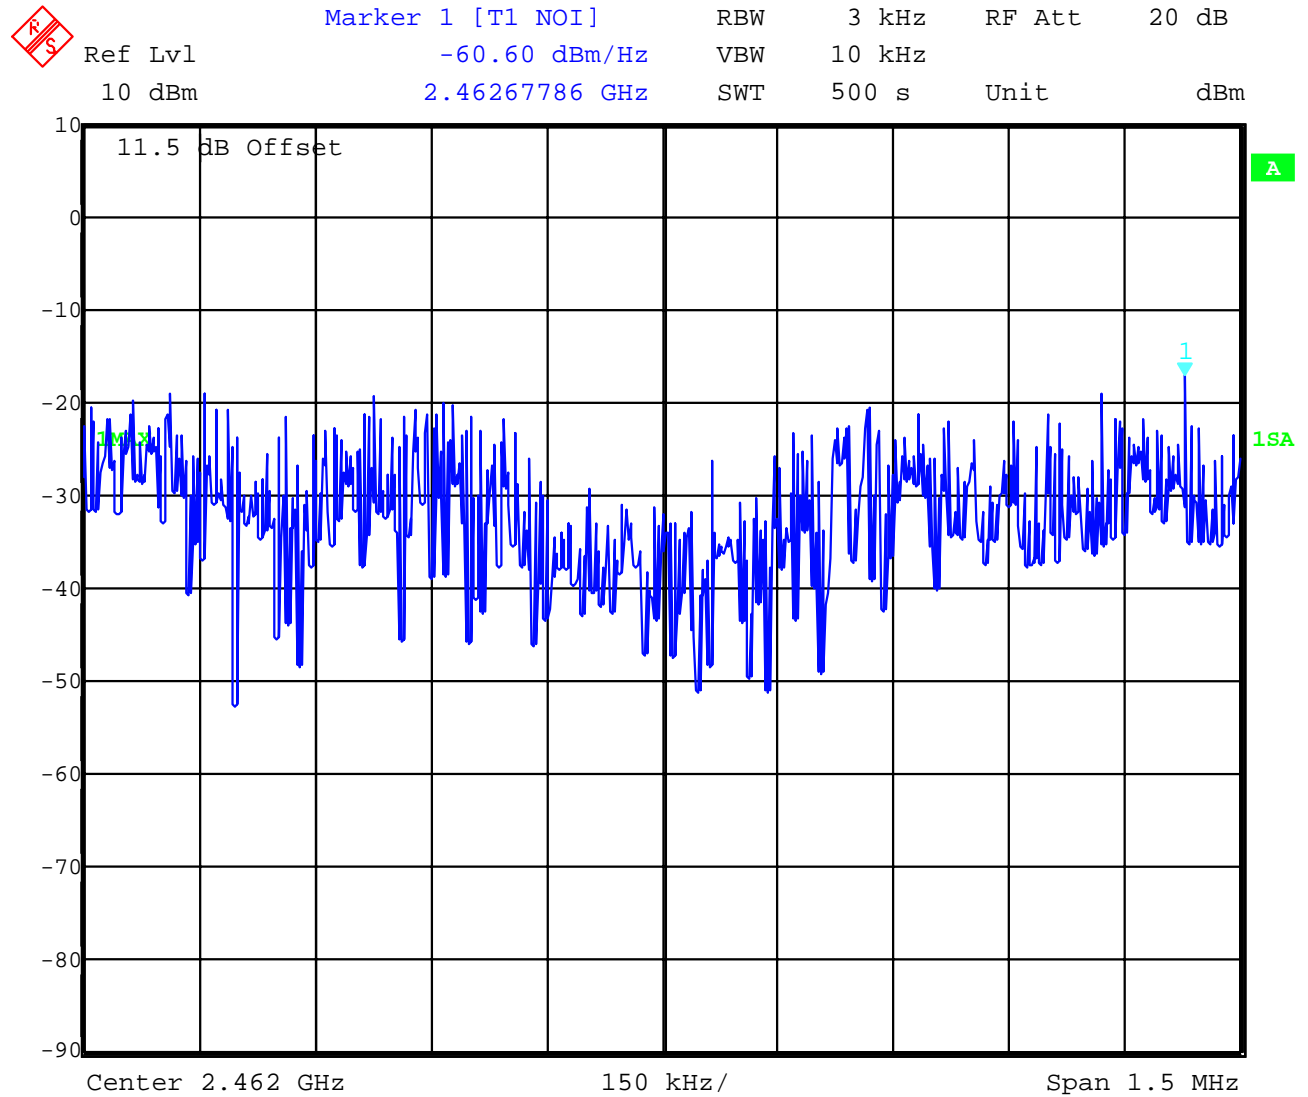

Date: 21.JUN.2005 12:58:26

Results: Plot 1: Power density : - 57.3 dBm/Hz = - 22.5 dBm / 3 KHz
 Plot 2: Power density : - 58.2 dBm/Hz = - 23.4 dBm / 3 KHz
 Plot 3: Power density : - 60.6 dBm/Hz = - 25.8 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 16 of 84

3.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwith §15.247(a2)

Plot 1 :

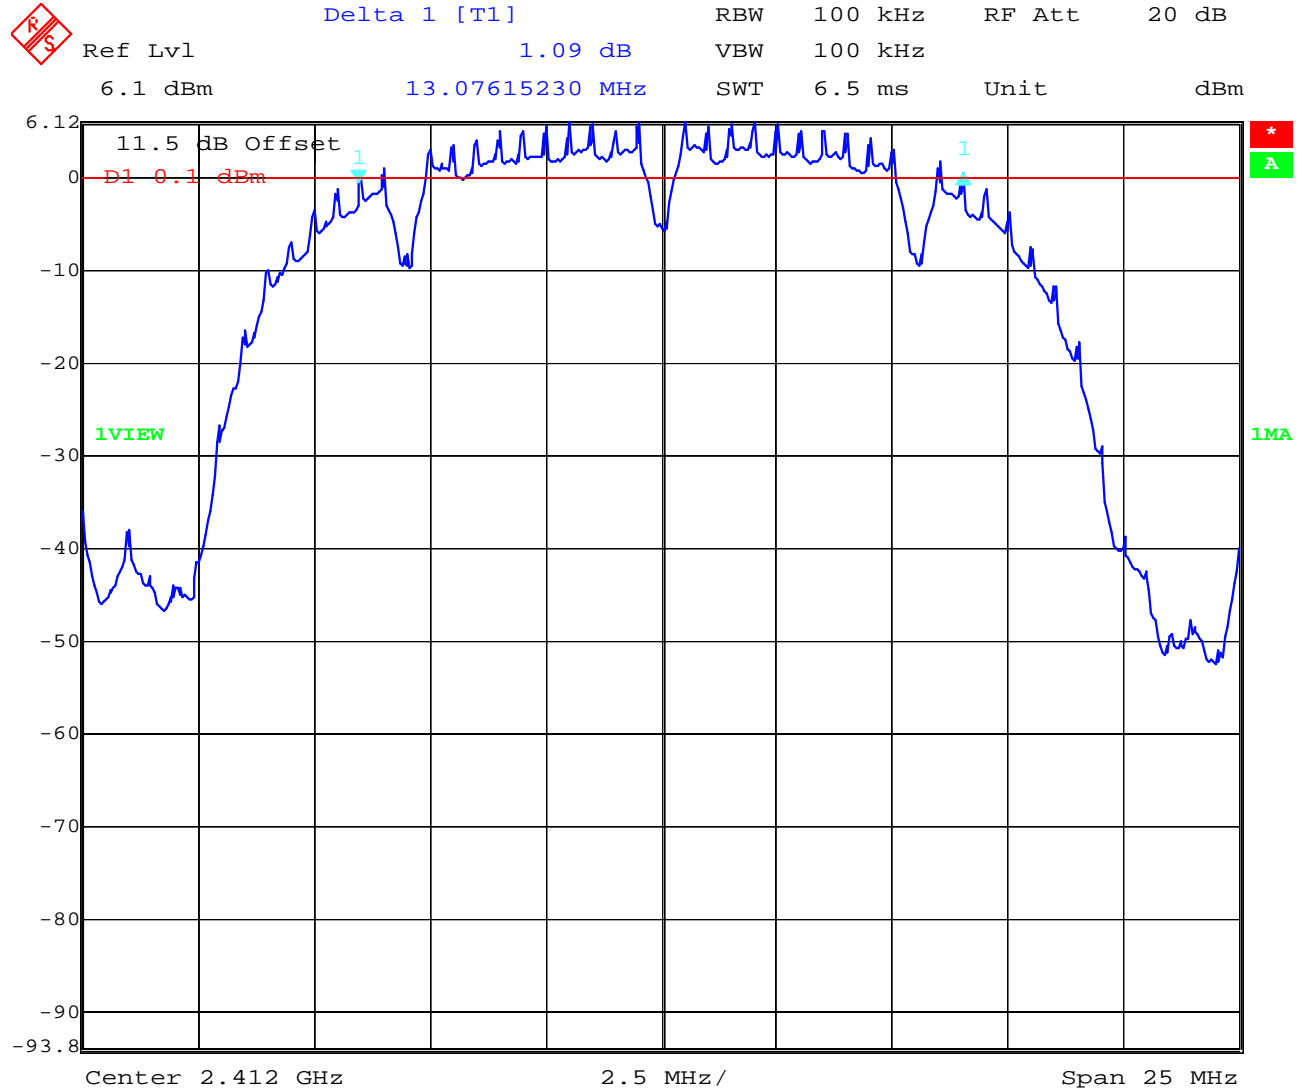

Date: 21.JUN.2005 13:01:15

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 17 of 84

Plot 2:

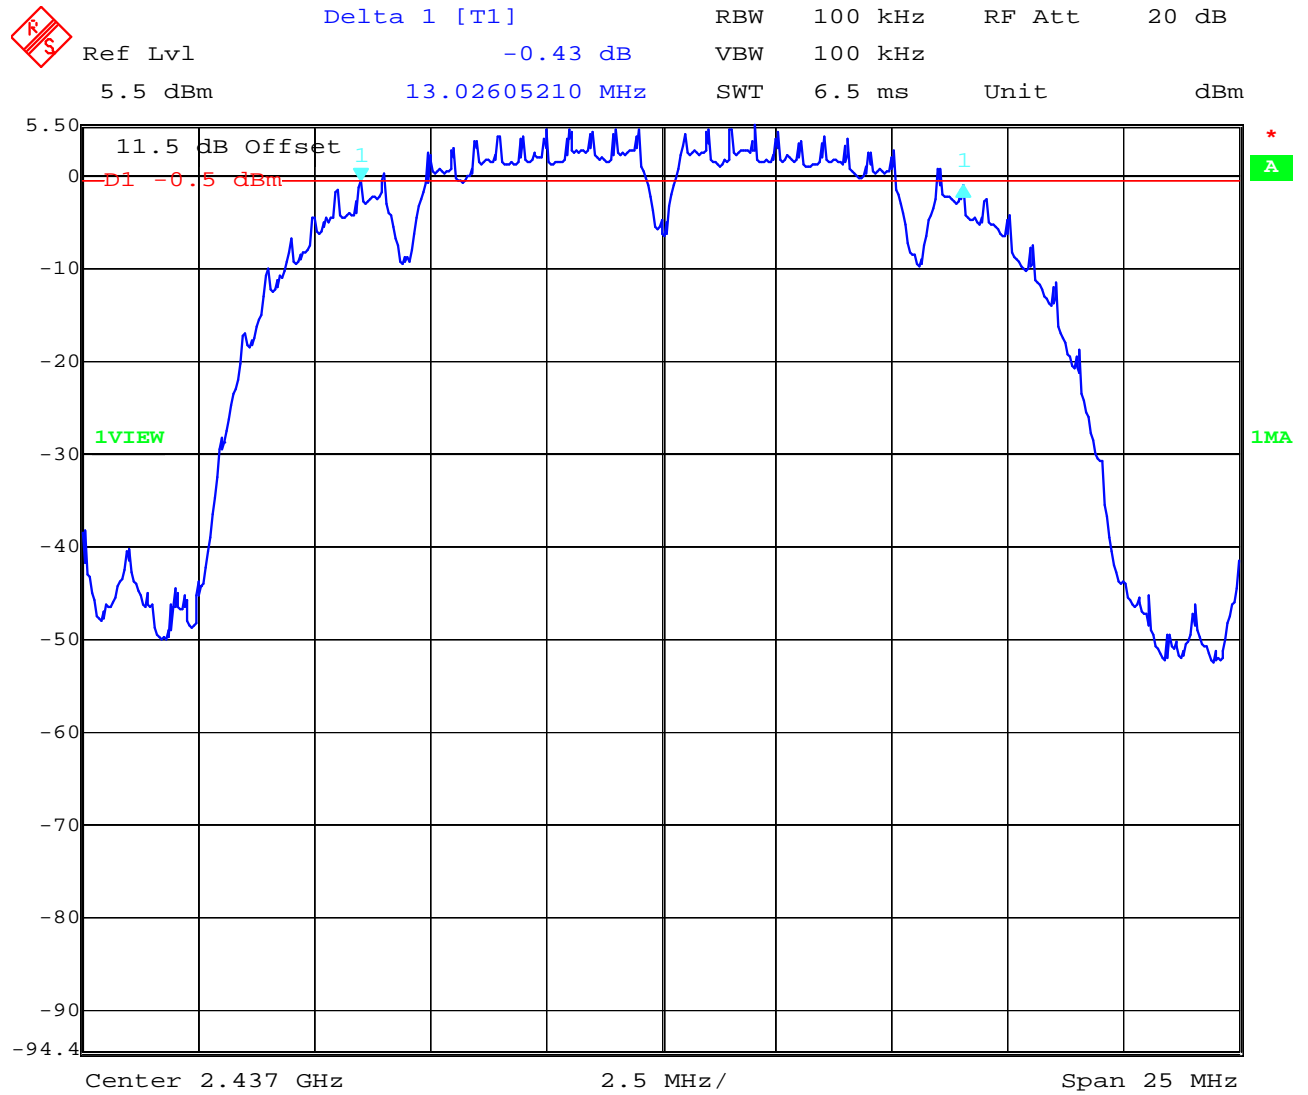

Date: 21.JUN.2005 13:02:39

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 18 of 84

Plot 3:

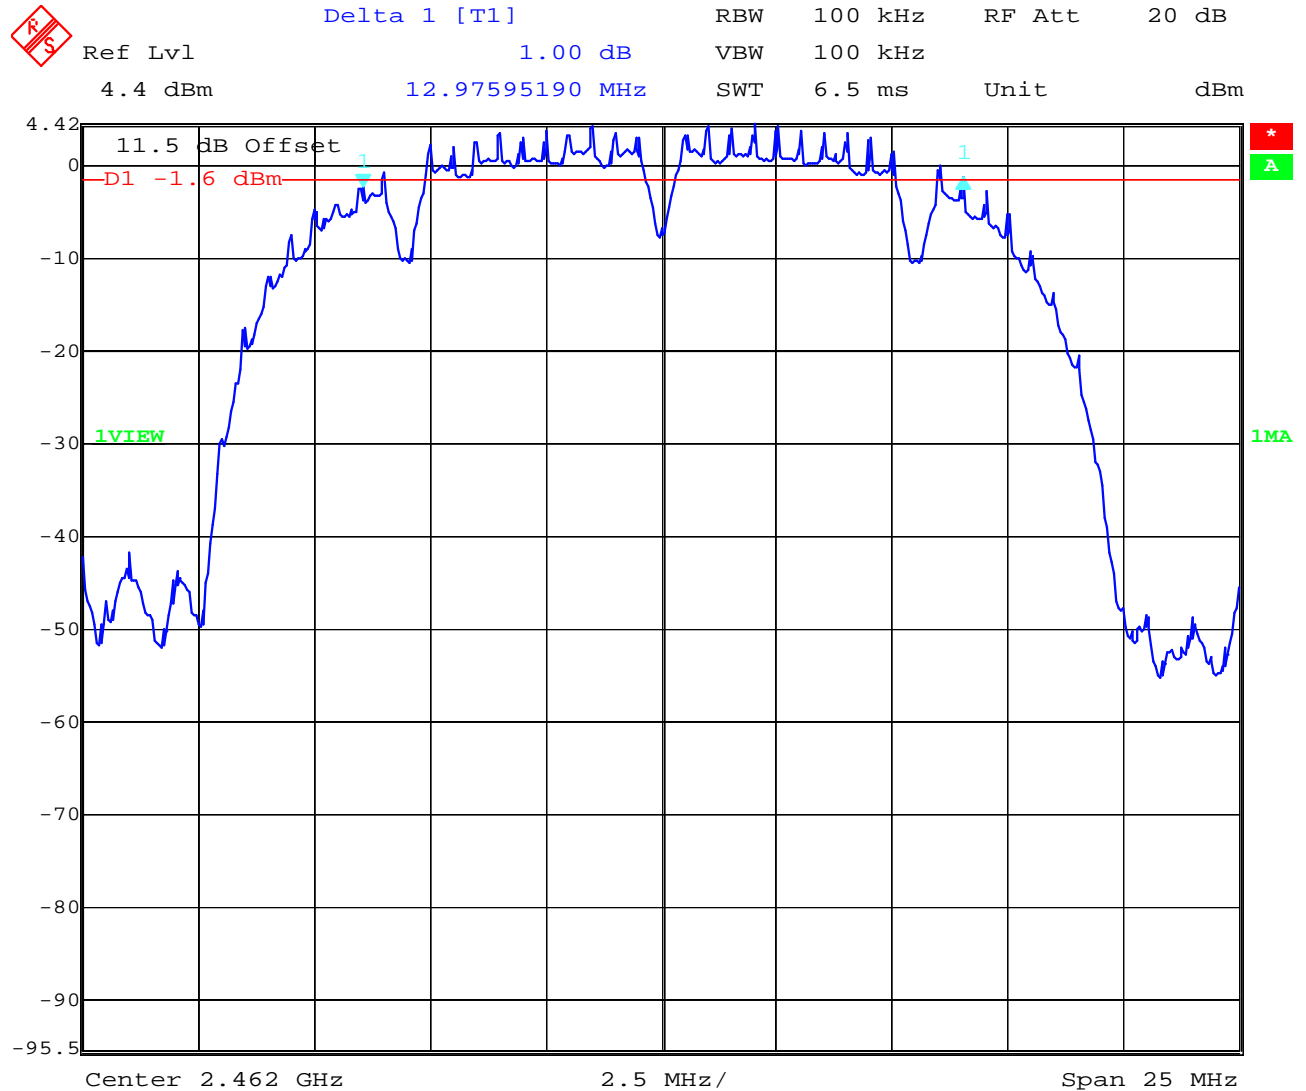

Date: 21.JUN.2005 13:04:08

Results:

Test conditions		6 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	13.08	13.03	12.98
Measurement uncertainty		±1kHz		

RBW: 100 kHz / VBW 100 kHz

Limits :

Under normal test conditions only	> 500 KHz
-----------------------------------	-----------

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 19 of 84

Spectrum Bandwidth of a OFDM System / 6 dB Bandwidth §15.247(a2)

Plot 1 :

	Delta 1 [T1]	RBW	100 kHz	RF Att	10 dB
Ref Lvl	0.94 dB	VBW	100 kHz		
0.4 dBm	16.58316633 MHz	SWT	6.5 ms	Unit	dBm

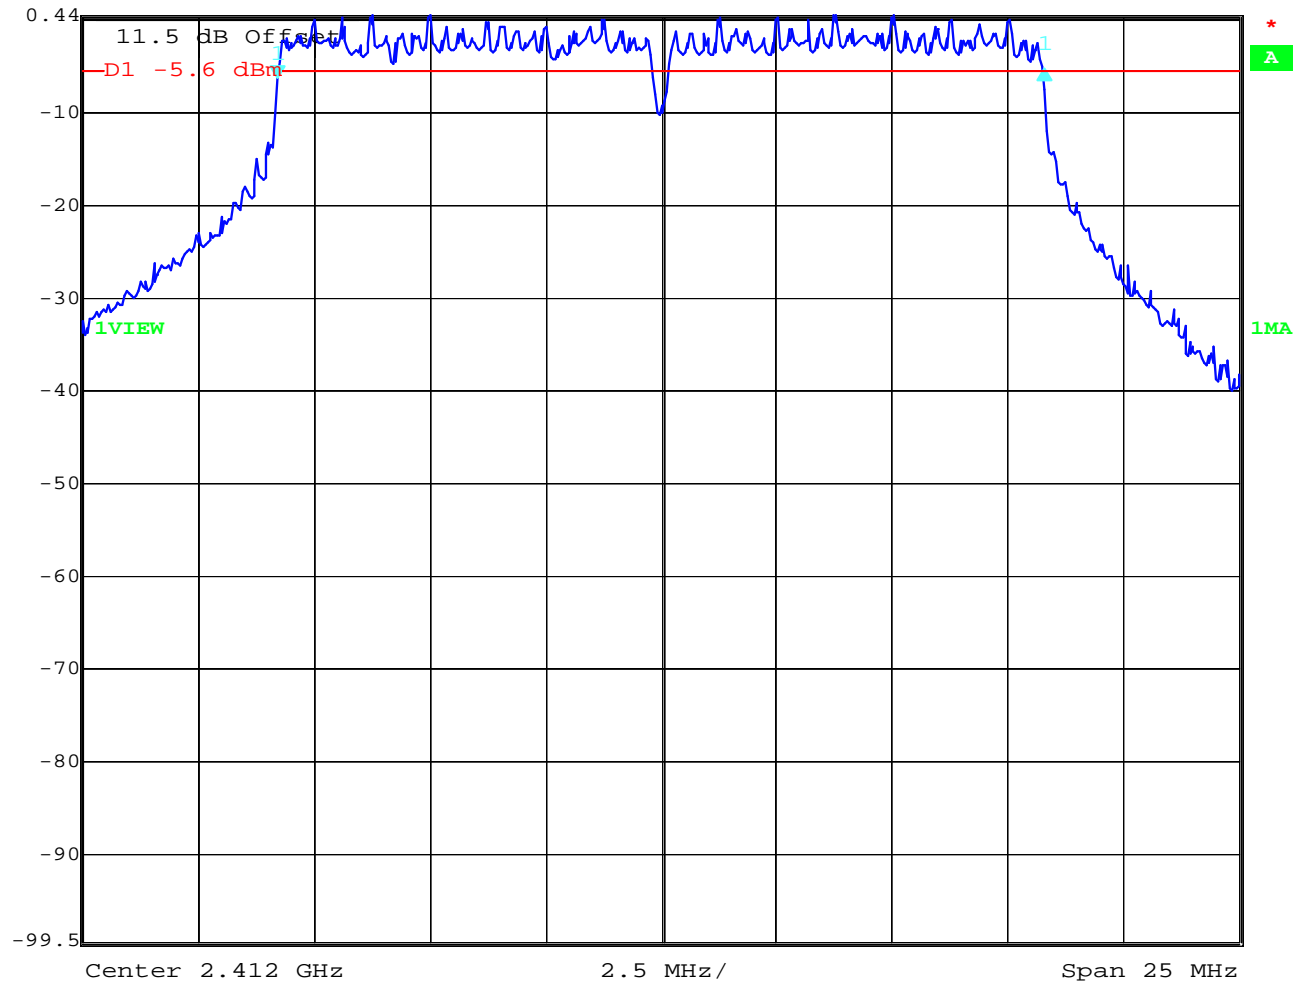

Date: 21.JUN.2005 13:05:32

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 20 of 84

Plot 2:

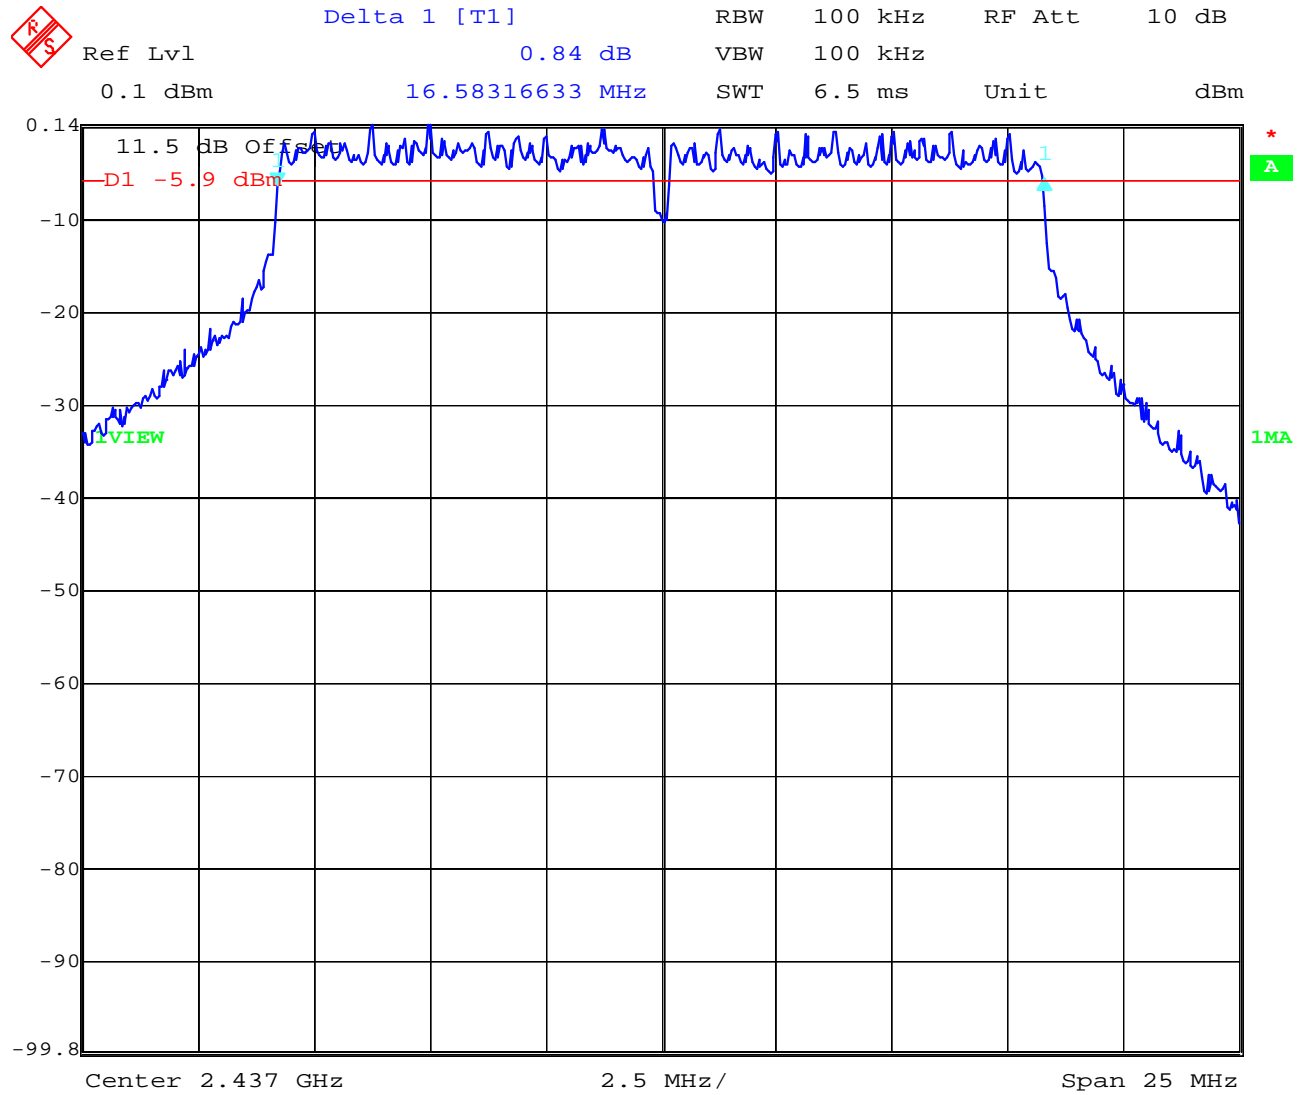

Date: 21.JUN.2005 13:06:27

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 21 of 84

Plot 3:

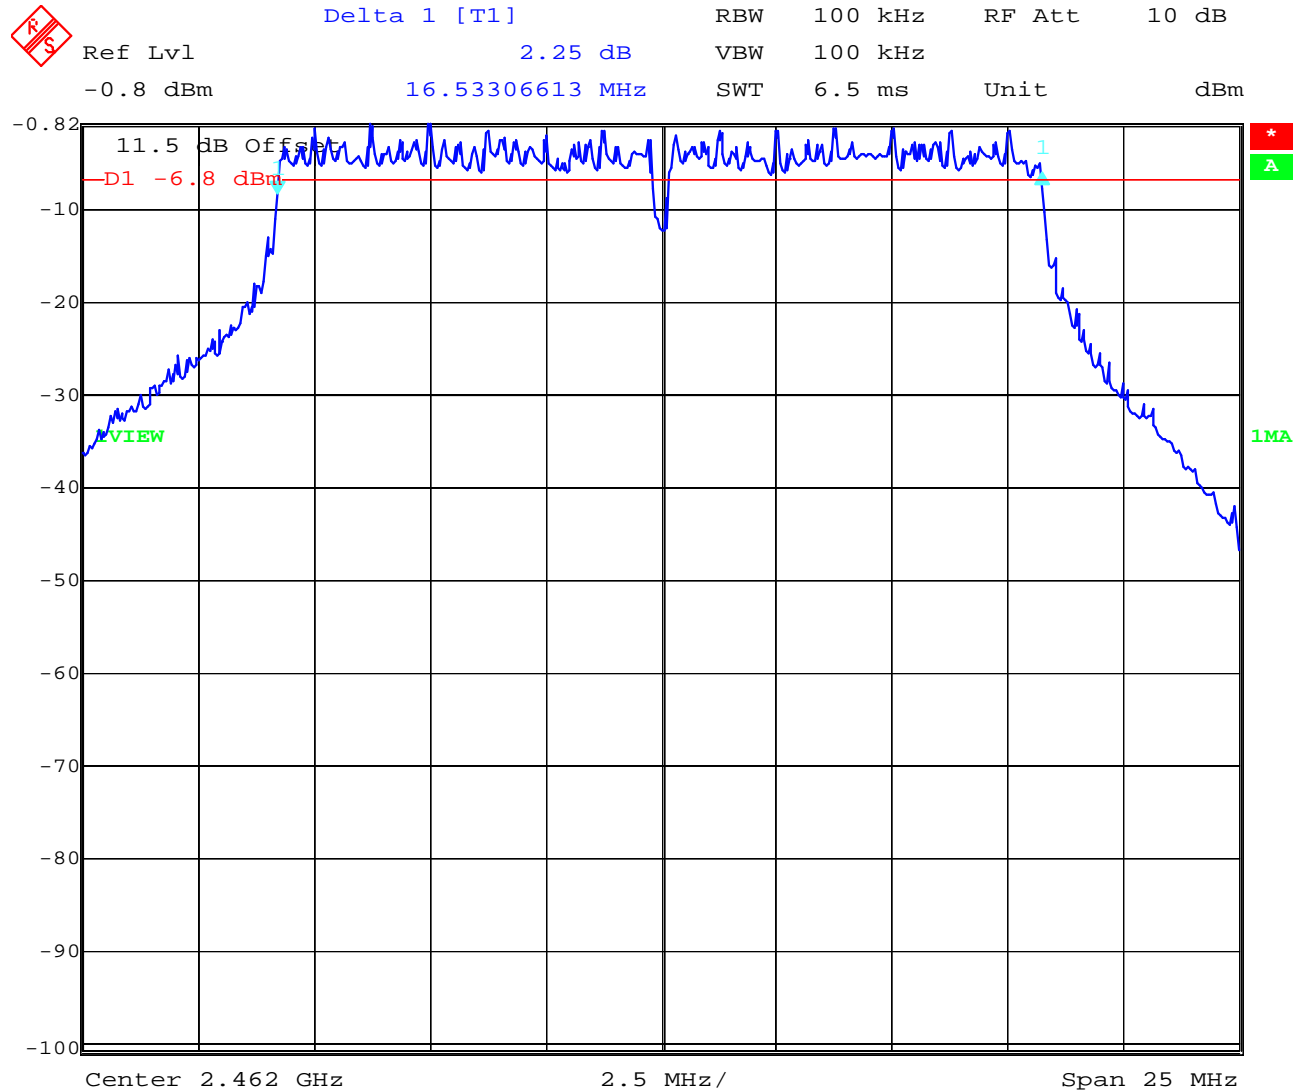

Date: 21.JUN.2005 13:07:18

Results:

Test conditions		6 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	16.58	16.58	16.53
Measurement uncertainty		±1kHz		

RBW: 100 kHz / VBW 100 kHz

Limits :

Under normal test conditions only	> 500 KHz
-----------------------------------	-----------

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 22 of 84

3.7 Maximum output power (conducted) §15.247 (b) (1)

DSSS

Plot 1:

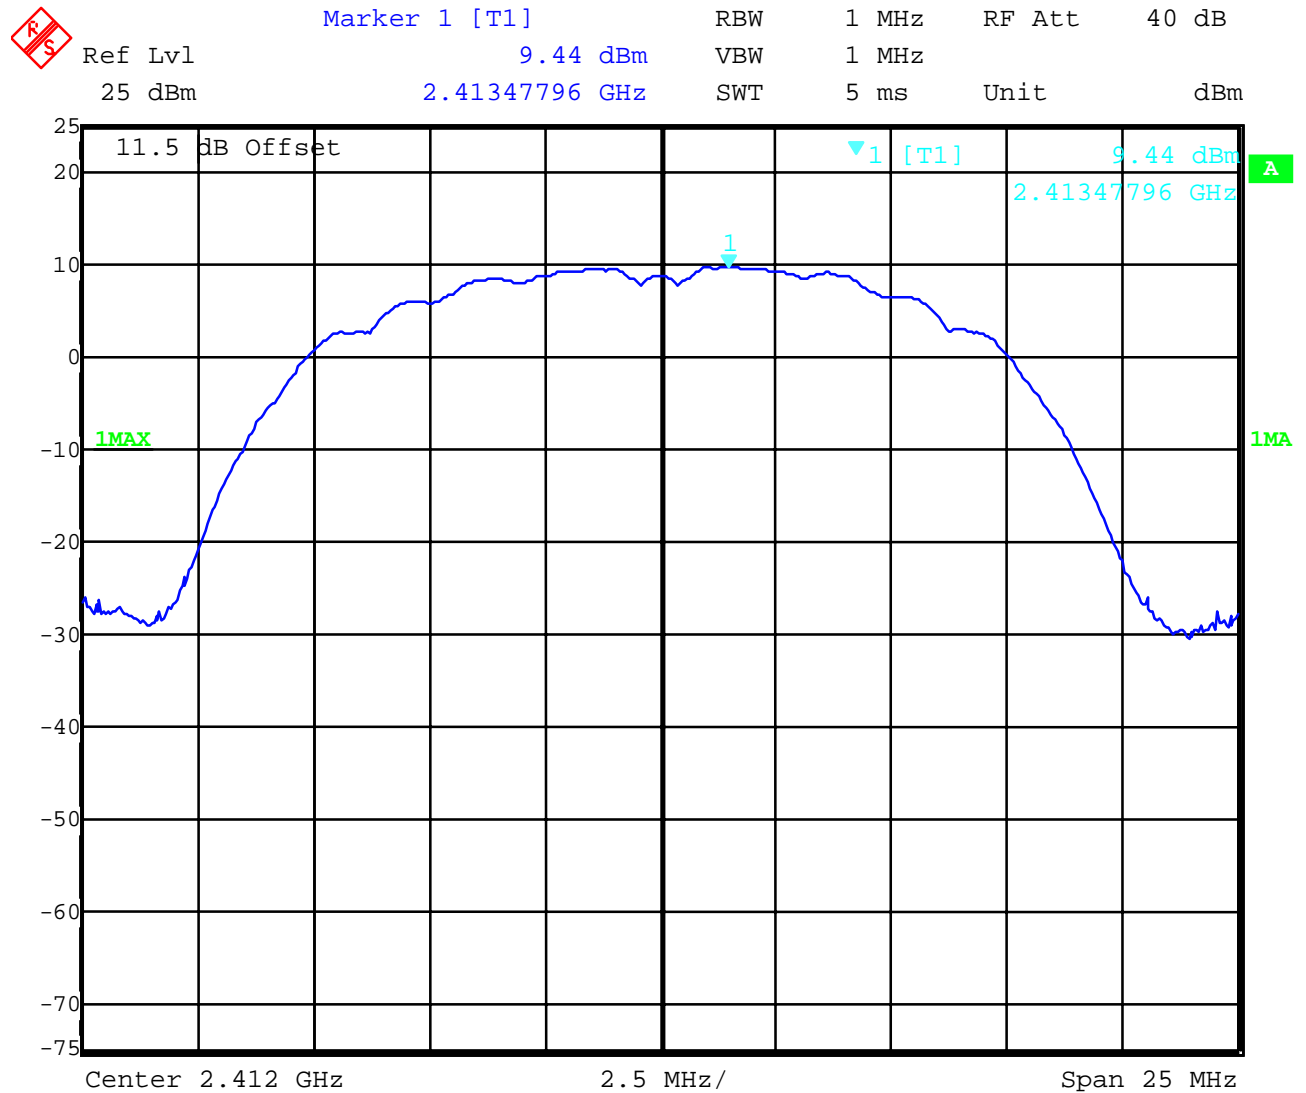

Date: 21.JUN.2005 13:15:35

Correction factor Used BW/Occupied BW = 11.1 dB => max output power = 20.5 dBm

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 23 of 84

Plot 2:

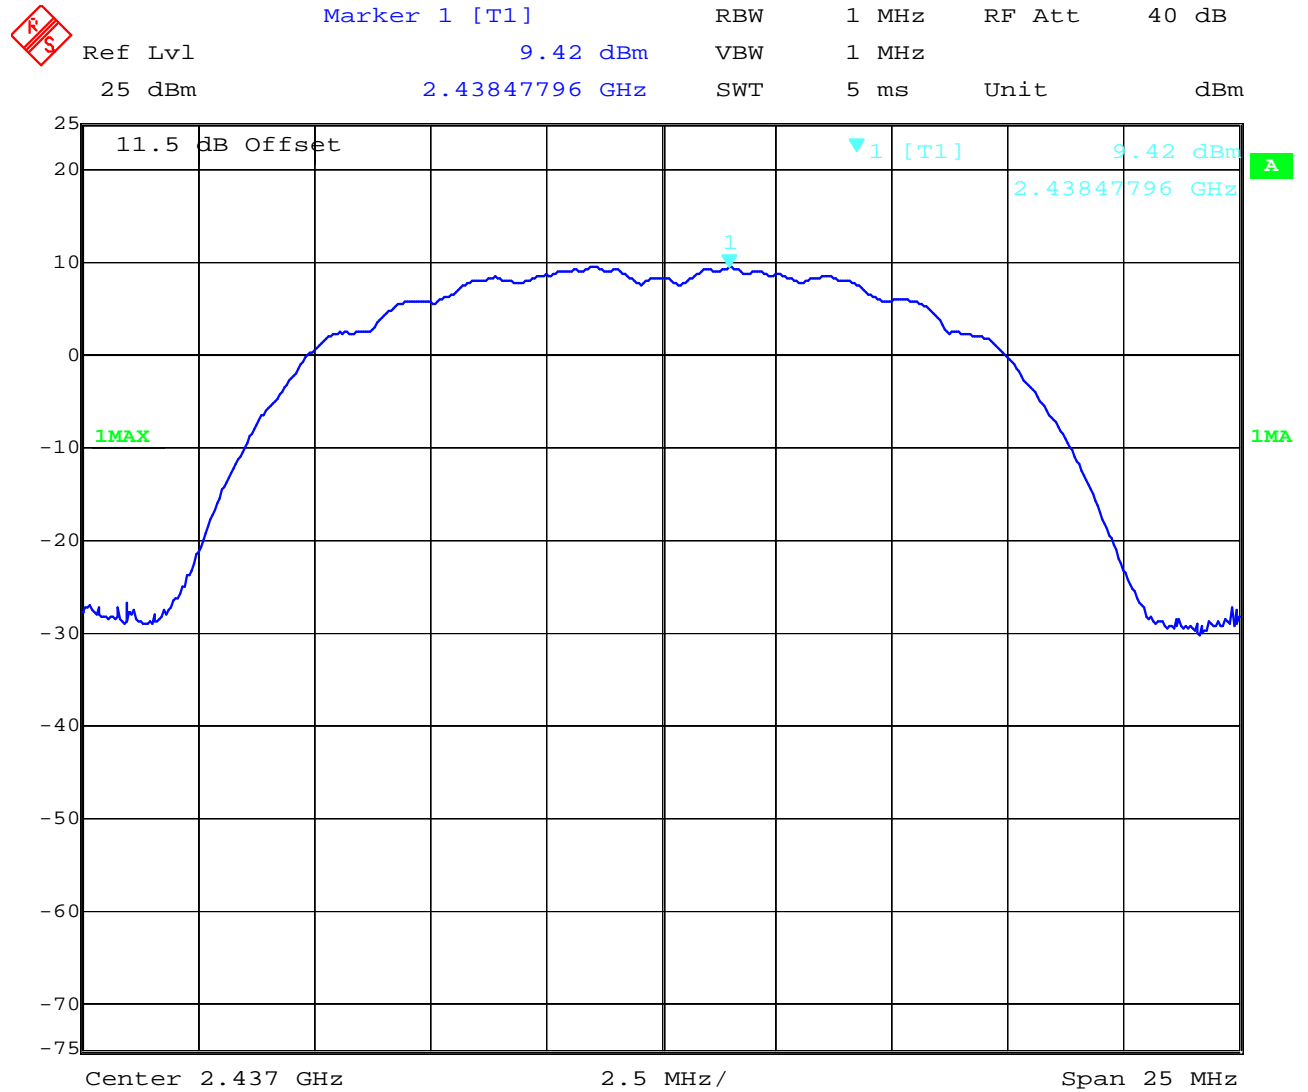

Date: 21.JUN.2005 13:16:50

Correction factor Used BW/Occupied BW = 11.1 dB => max output power = 20.5 dBm

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 24 of 84

Plot 3:

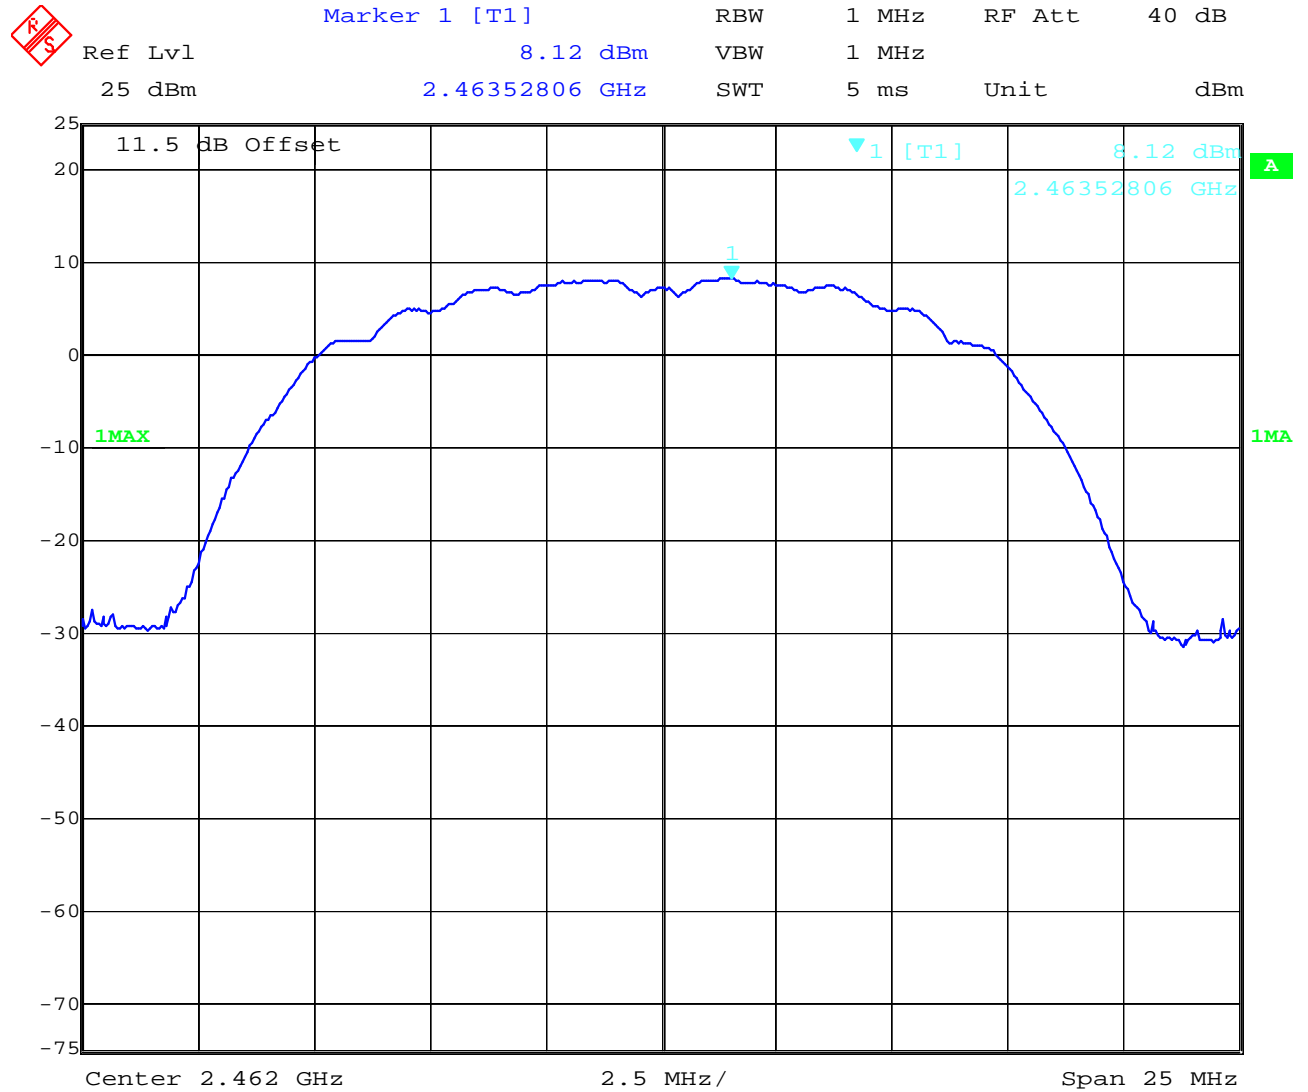

Date: 21.JUN.2005 13:17:15

Correction factor Used BW/Occupied BW = 11.1 dB => max output power = 19.2 dBm

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 25 of 84

Results:

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]		2412		2437	2462
T _{nom}	V _{nom}	PK	9.4	9.4	8.1
		PK corrected	20.5	20.5	19.2
Measurement uncertainty		±3dB			

RBW / VBW : 1 MHz

Remark:

The correction factor is calculated by $10 \times \log(\text{measured BW} / \text{used BW})$ [dB], here 11.1 dB

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 26 of 84

OFDM

Plot 1:

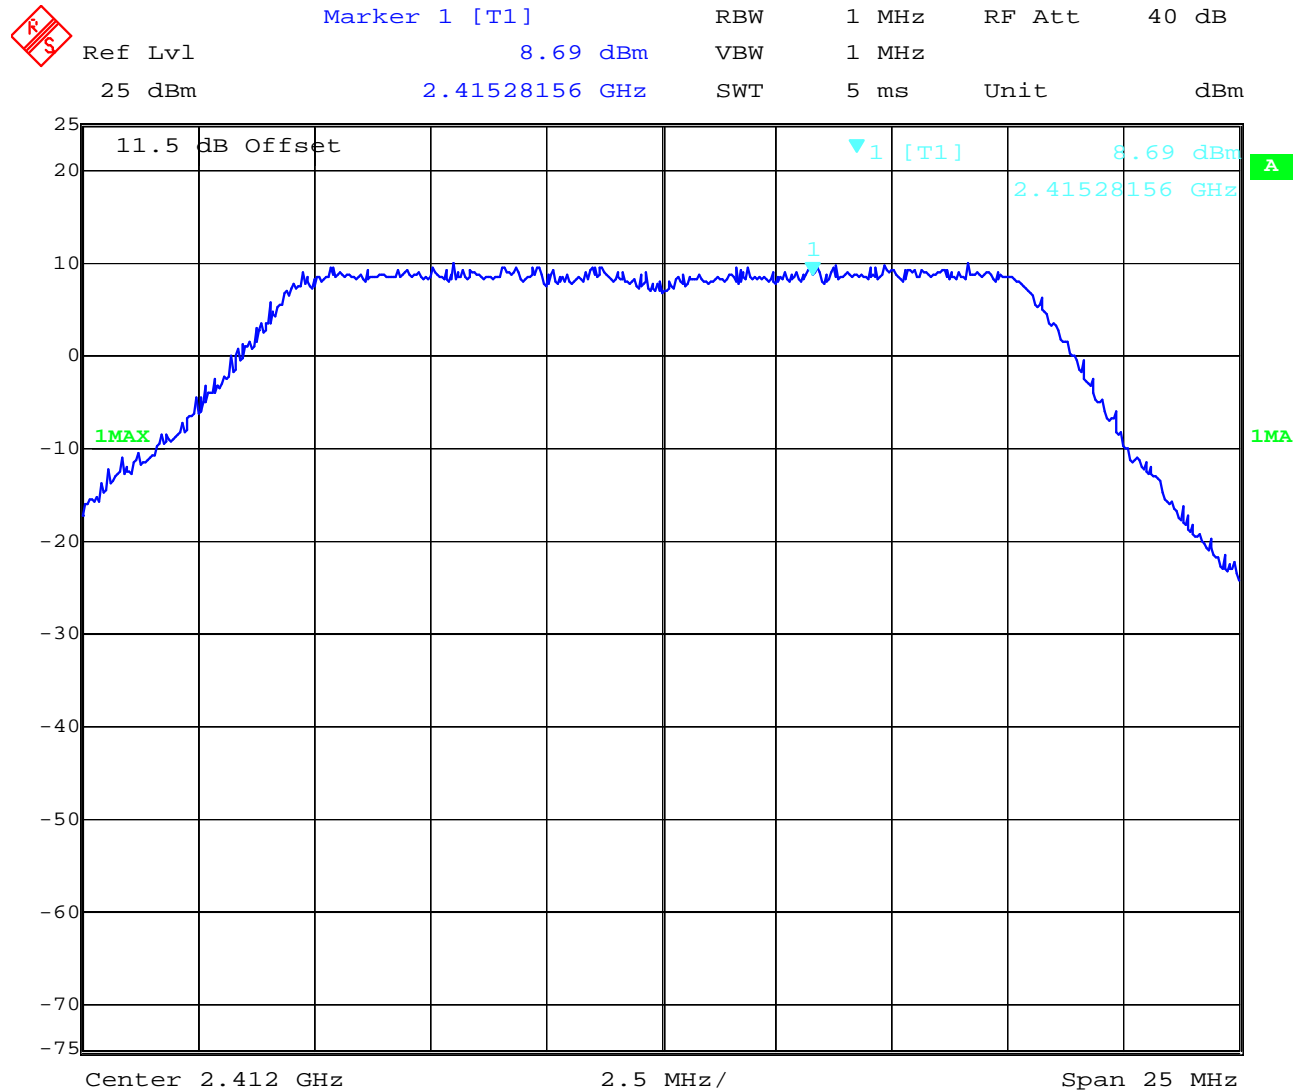

Date: 21.JUN.2005 13:18:48

Correction factor Used BW/Occupied BW = 12.2 dB => max output power = 20.9 dBm

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 27 of 84

Plot 2:

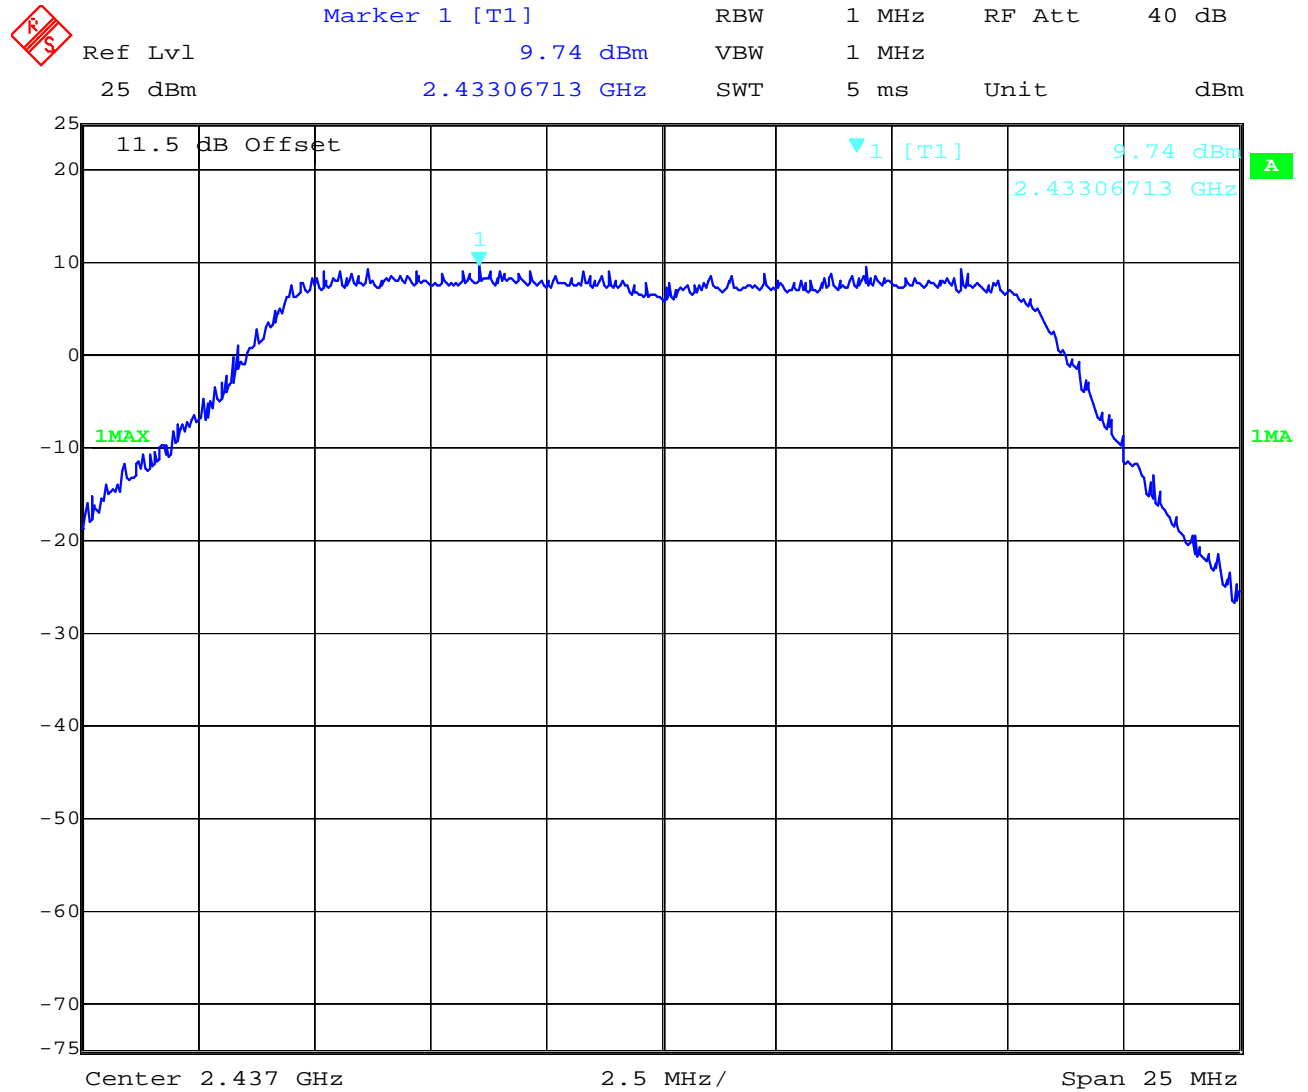

Date: 21.JUN.2005 13:20:33

Correction factor Used BW/Occupied BW = 12.2 dB => max output power = 21.9 dBm

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 28 of 84

Plot 3:

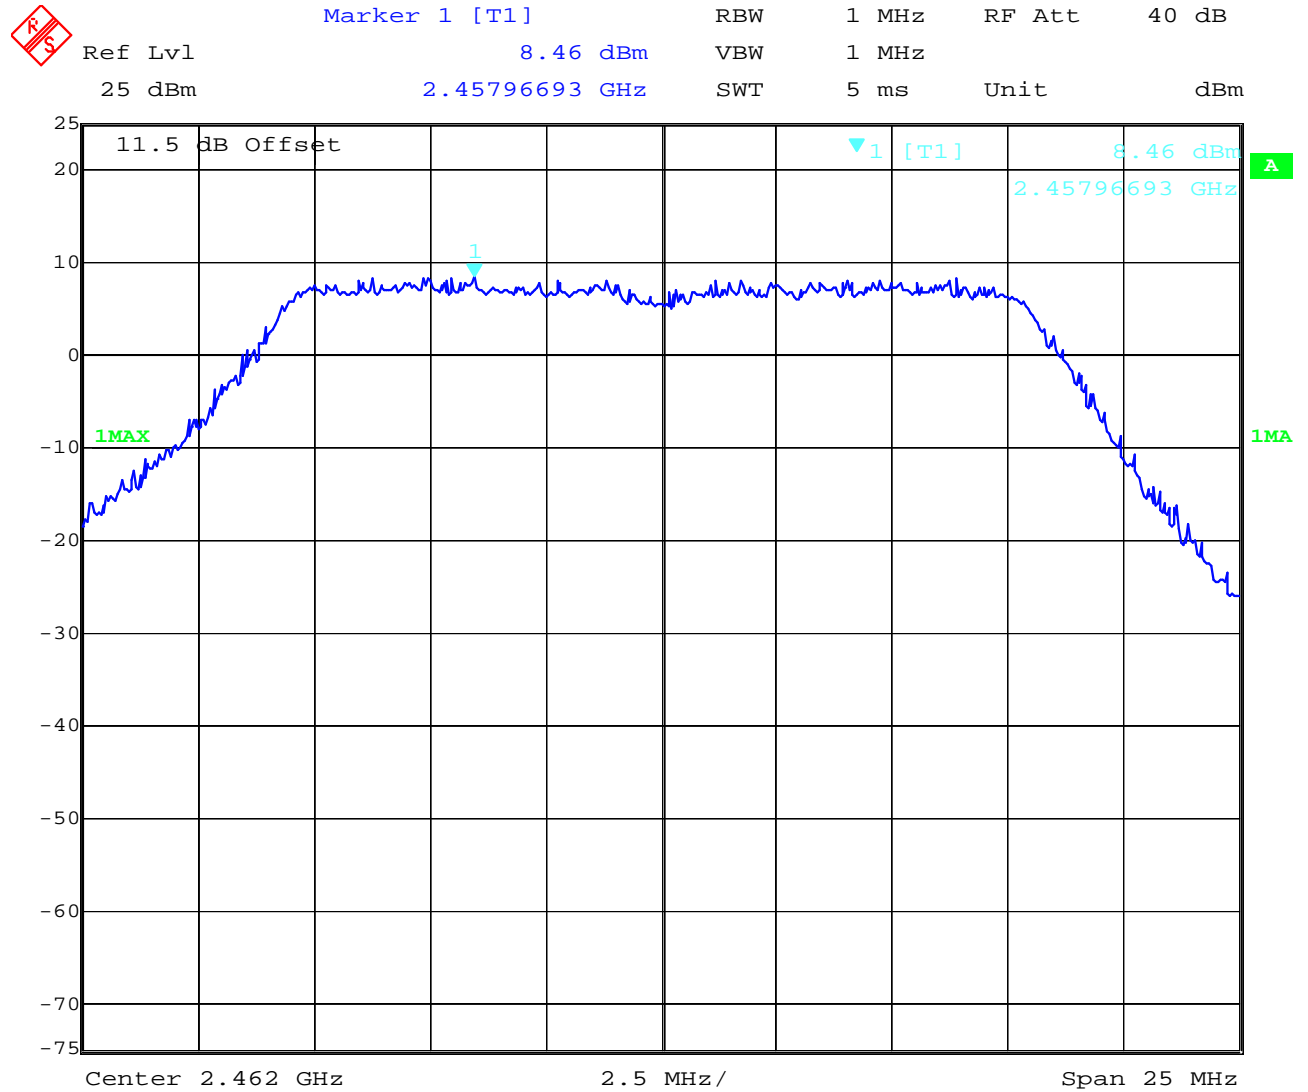

Date: 21.JUN.2005 13:21:26

Correction factor Used BW/Occupied BW = 12.2 dB => max output power = 20.7 dBm

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 29 of 84

Results:

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]		2412		2437	2462
T _{nom}	V _{nom}	PK	8.7	9.7	8.5
		PK corrected	20.9	21.9	20.7
Measurement uncertainty		±3dB			

RBW / VBW : 10 MHz

Remark:

The correction factor is calculated by $10 \times \log(\text{measured BW} / \text{used BW})$ [dB], here 12.2 dB

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 30 of 84

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)
 P = power input to the antenna (in appropriate units e.g. mW)
 G = power gain of the antenna in the direction of interest relative to the isotropic radiator
 R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation: (here for the maximum radiated output with OFDM)

(Calculated for max. EIRP)

EIRP: 21.9 dBm = 154.9 mW

calculated at distance of 20 cm:

power density = $154.9 / 4\pi 20^2 = 0.0308 \text{ mW/cm}^2$

Limit:

1mW/ cm ² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 31 of 84

3.8 Max. peak output power (radiated) §15.247 (b) (1)

Results:

Test conditions		Max. peak output power EIRP [dBm]			
Frequency [MHz]			2412	2437	2462
T _{nom}	V _{nom}	DSSS	19.3	19.1	18.7
T _{nom}	V _{nom}	OFDM	20.3	18.9	19.0
Measurement uncertainty		±3dB			

RBW / VBW : 1 MHz with correction factor
 Measured at a distance of 3m

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 32 of 84

3.9 Band-edge compliance of conducted emissions §15.247 (c)

DSSS

Plot 1, lowest channel

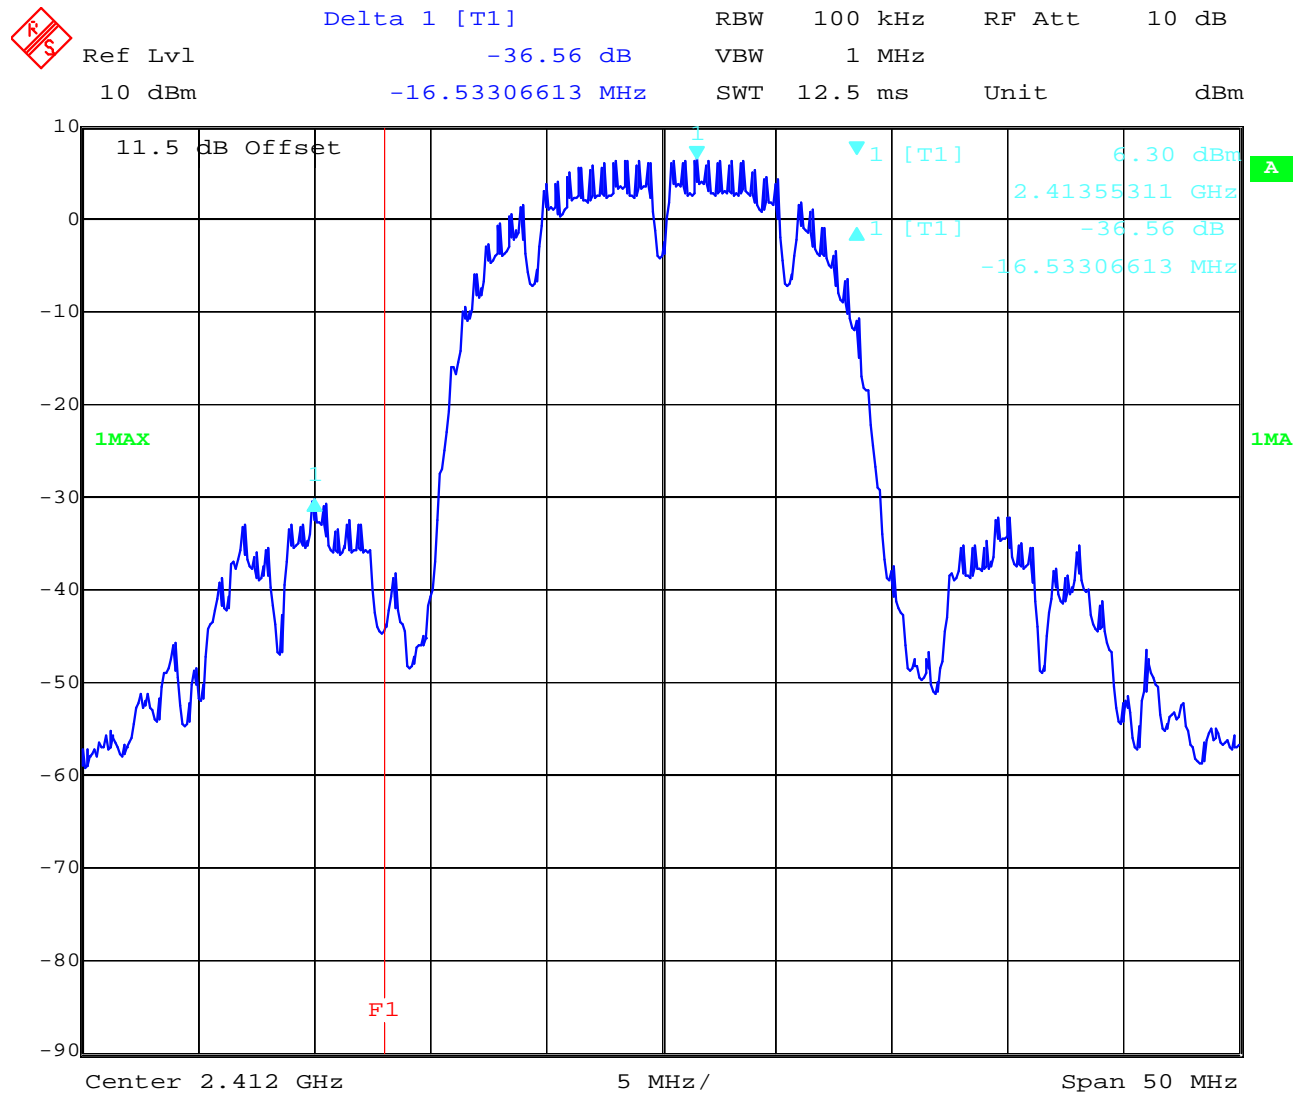

Date: 21.JUN.2005 13:23:54

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 33 of 84

Plot 2, highest channel

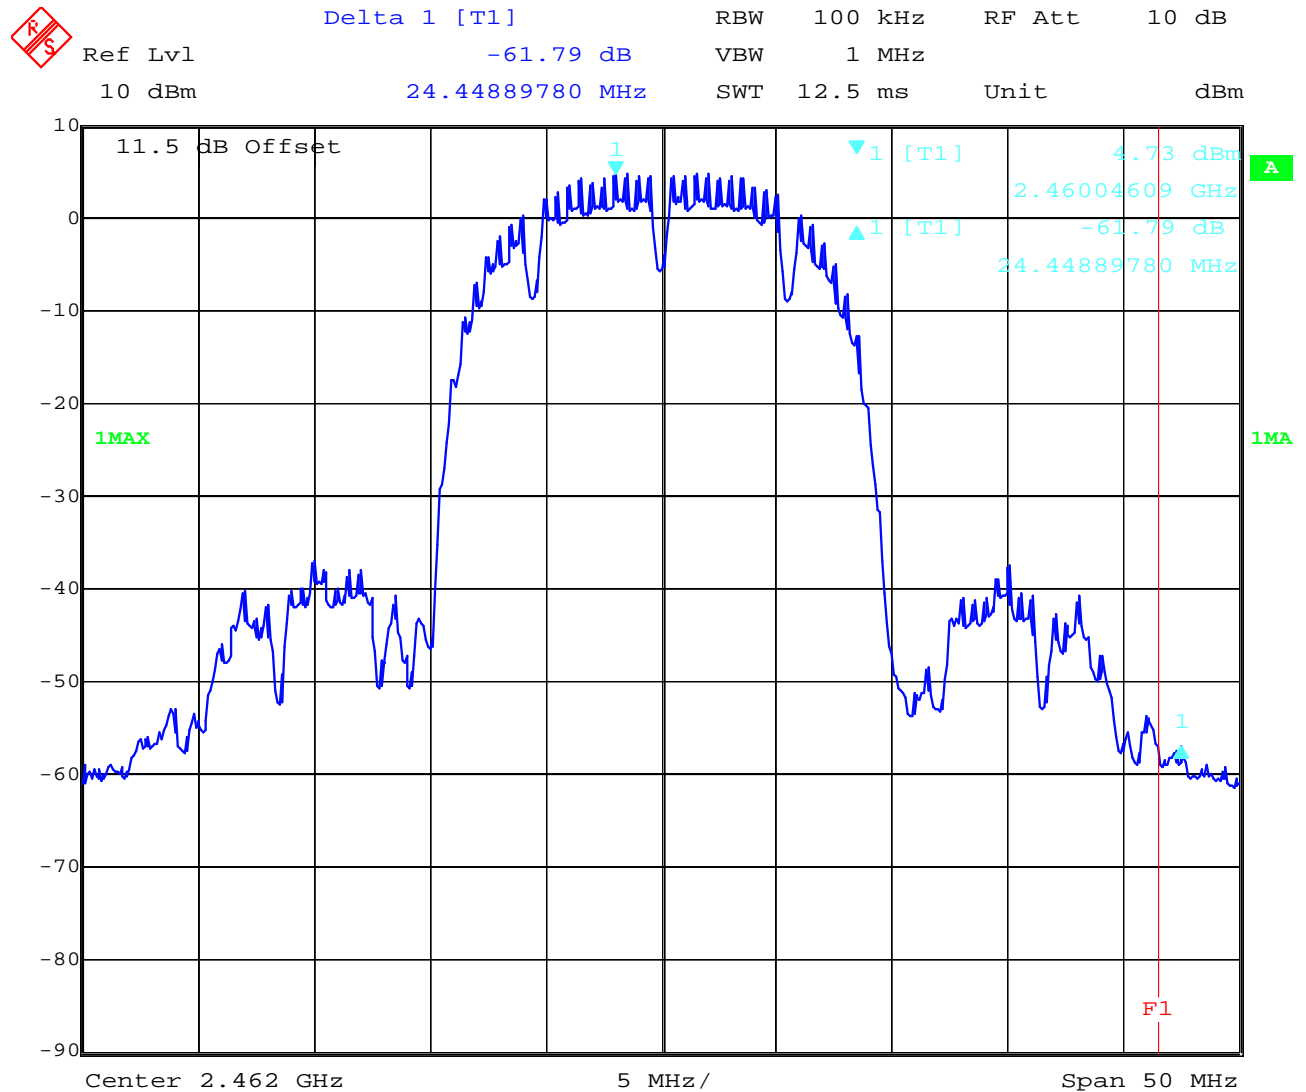

Date: 21.JUN.2005 13:25:02

Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 34 of 84

This plot shows the conducted emissions below the 2.4 GHz band.

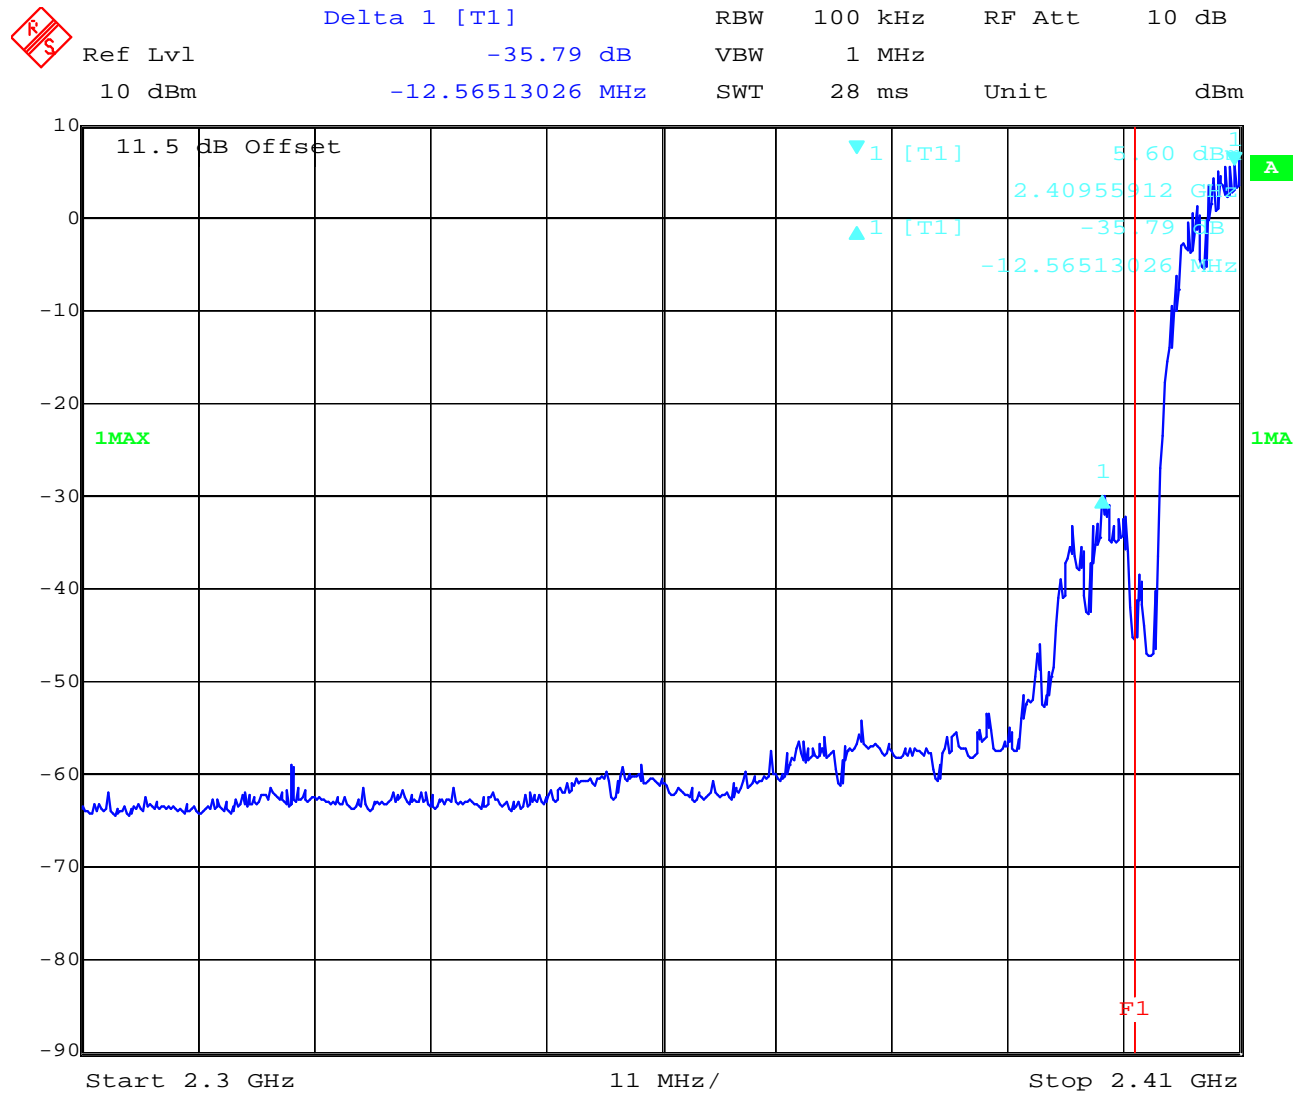

Date: 21.JUN.2005 13:27:26

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 35 of 84

This plot shows the conducted emissions above the 2.4 GHz band.

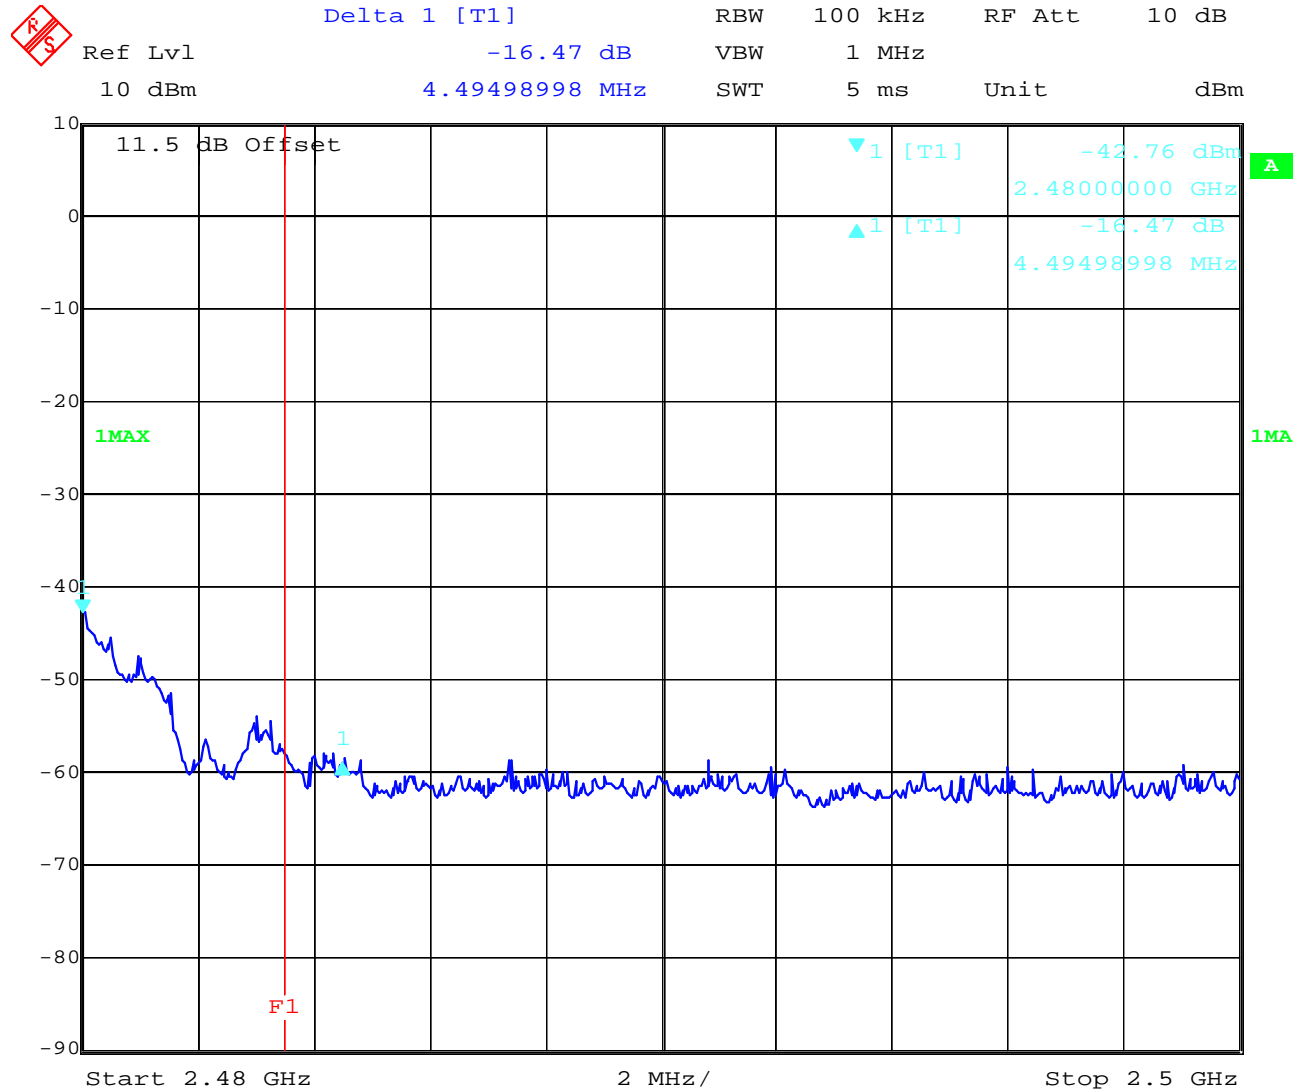

Date: 21.JUN.2005 13:26:04

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 36 of 84

OFDM

Plot 1, lowest channel

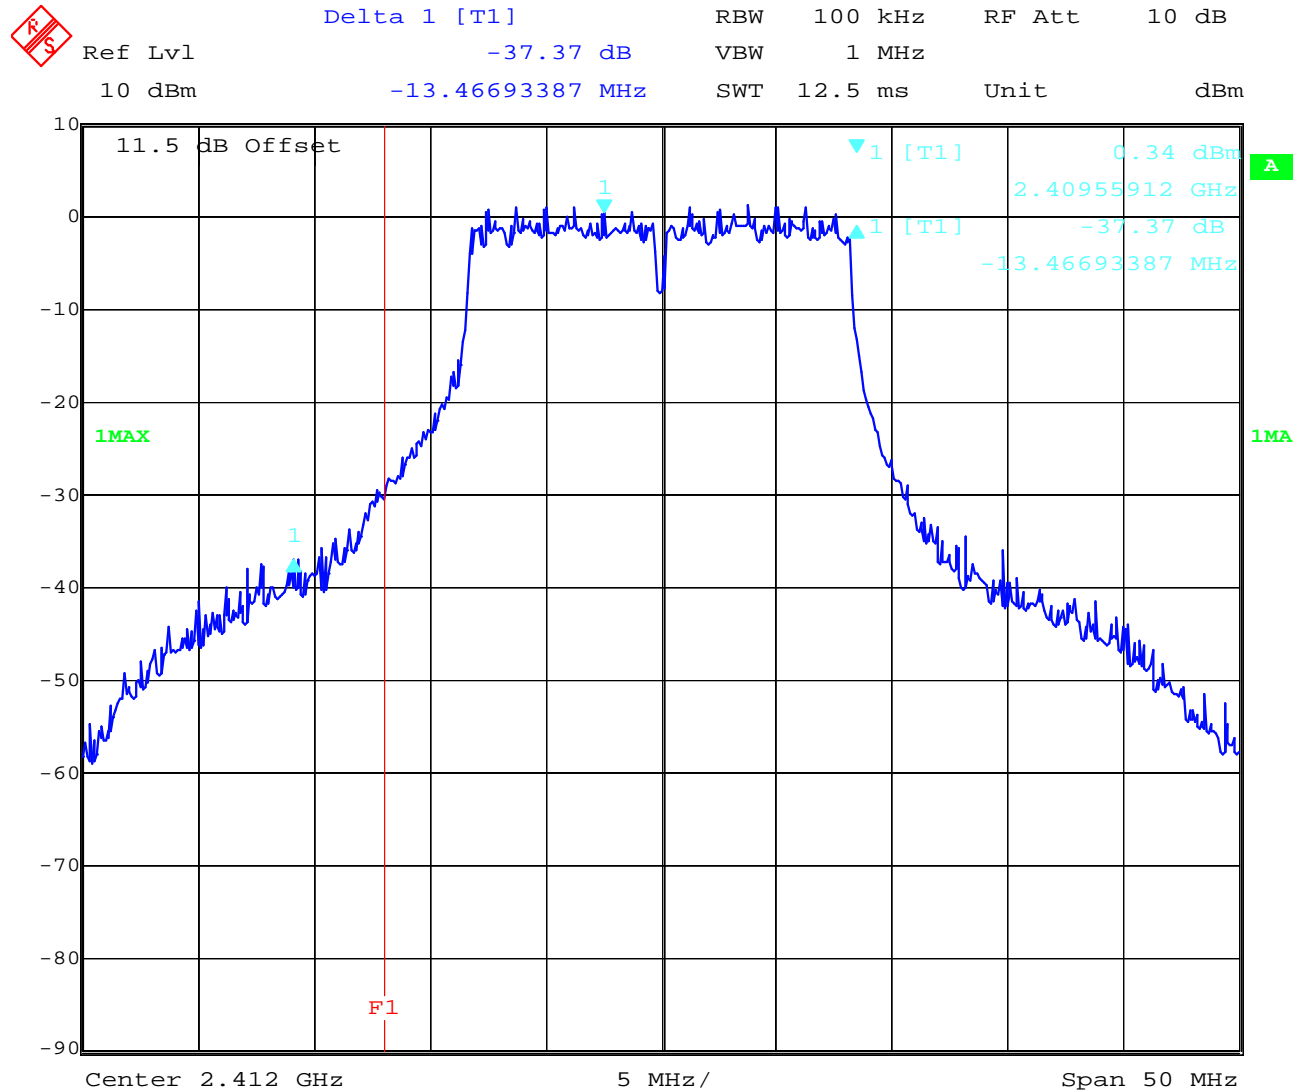

Date: 21.JUN.2005 13:28:54

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 37 of 84

Plot 2, highest channel

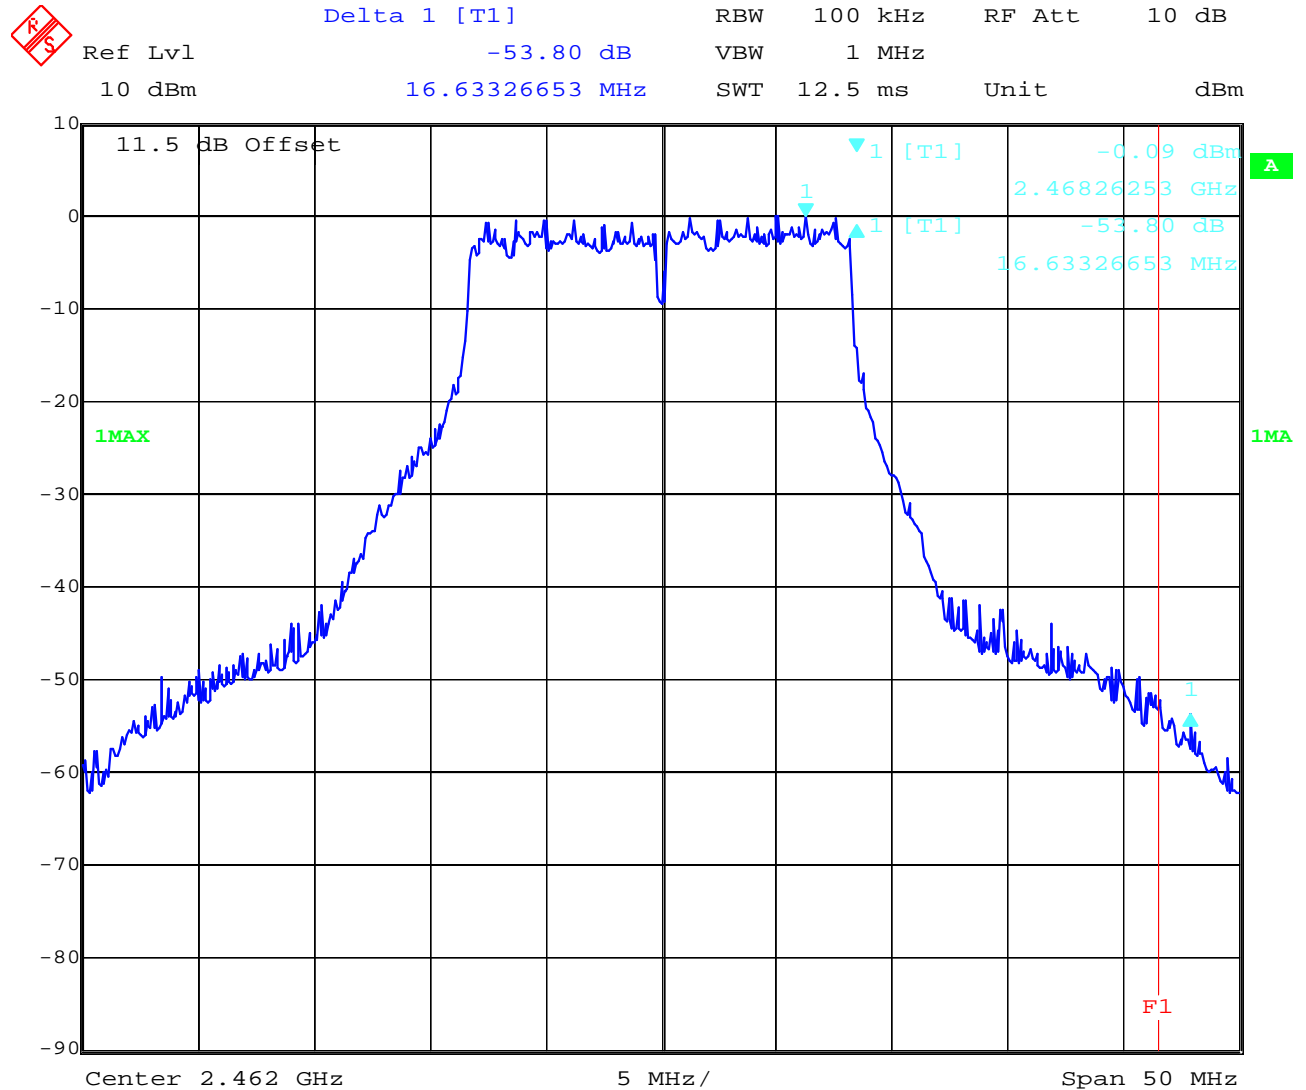

Date: 21.JUN.2005 13:29:49

Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 38 of 84

This plot shows the conducted emissions below the 2.4 GHz band.

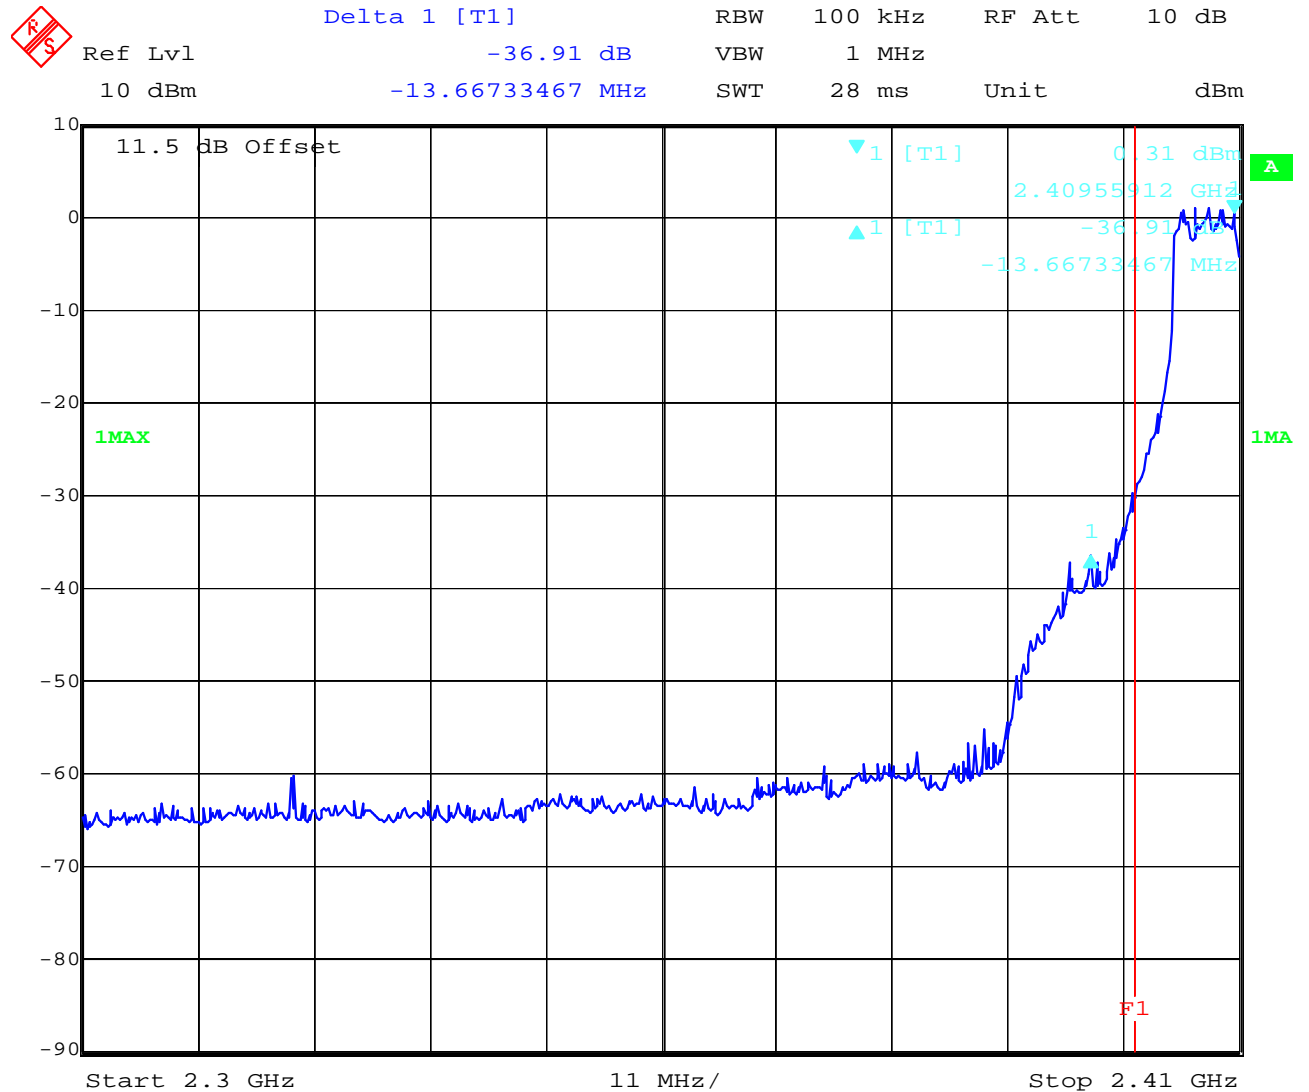

Date: 21.JUN.2005 13:28:17

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 39 of 84

This plot shows the conducted emissions above the 2.4 GHz band.

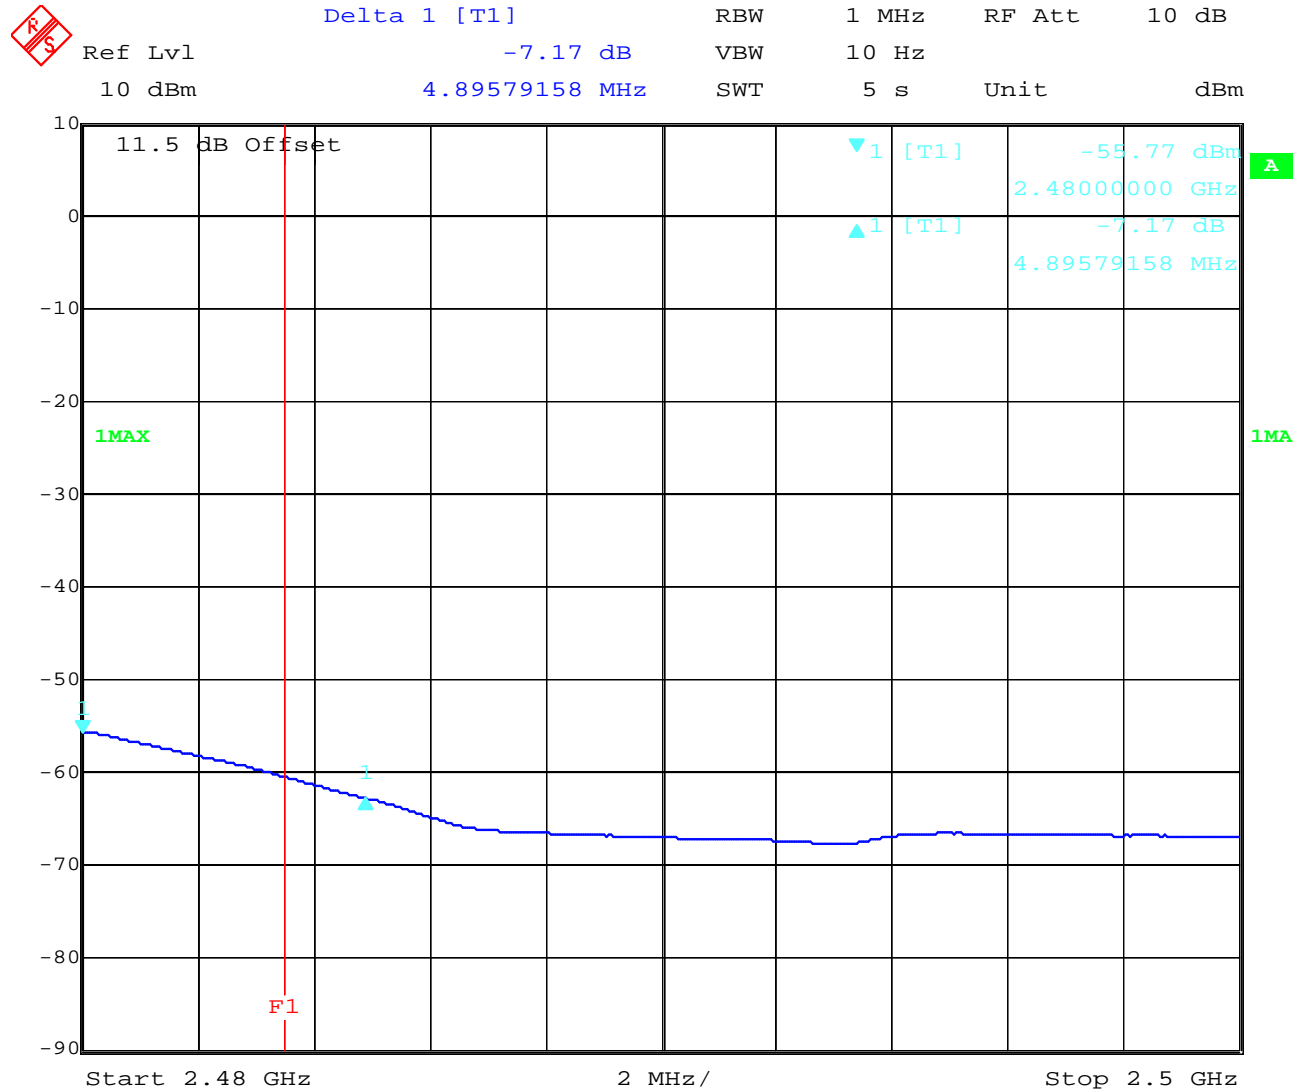

Date: 21.JUN.2005 13:30:39

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 40 of 84

3.10 Band-edge compliance of radiated emissions §15.205

DSSS

Plot 1 : Max field strength in 3m distance (single frequency) peak

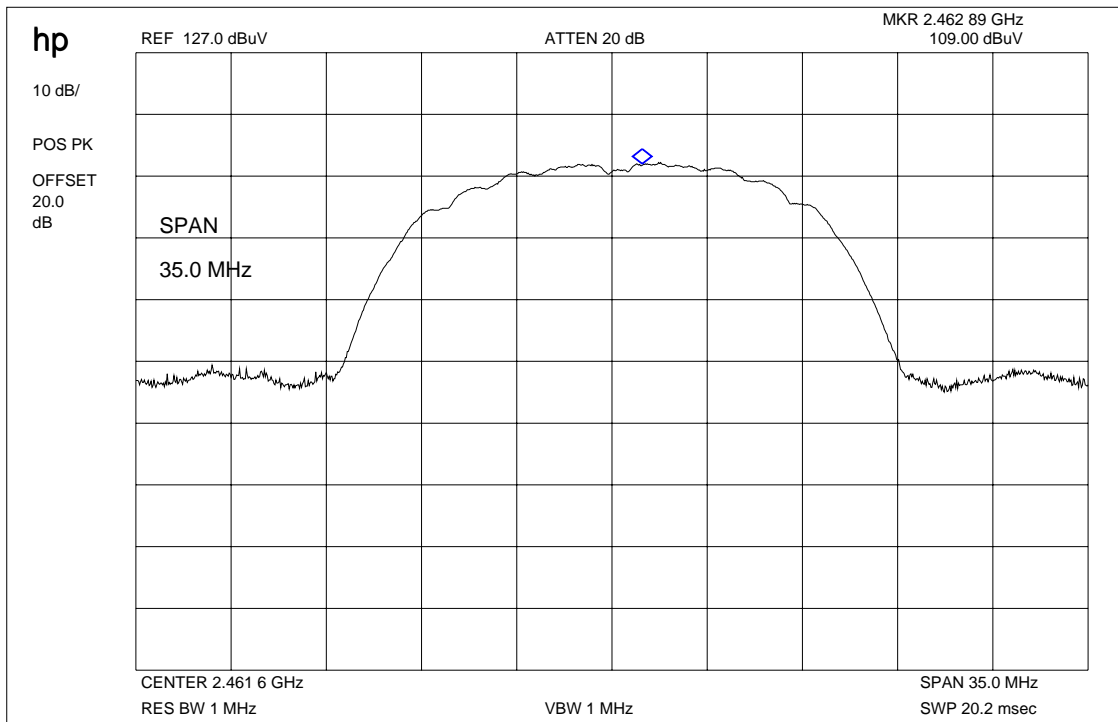

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-7.2	109.0 dB μ V/m Peak
This values are set into the internal calculation of the analyzer.				

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 41 of 84

Plot 2 : Max field strength in 3m distance (single frequency) average

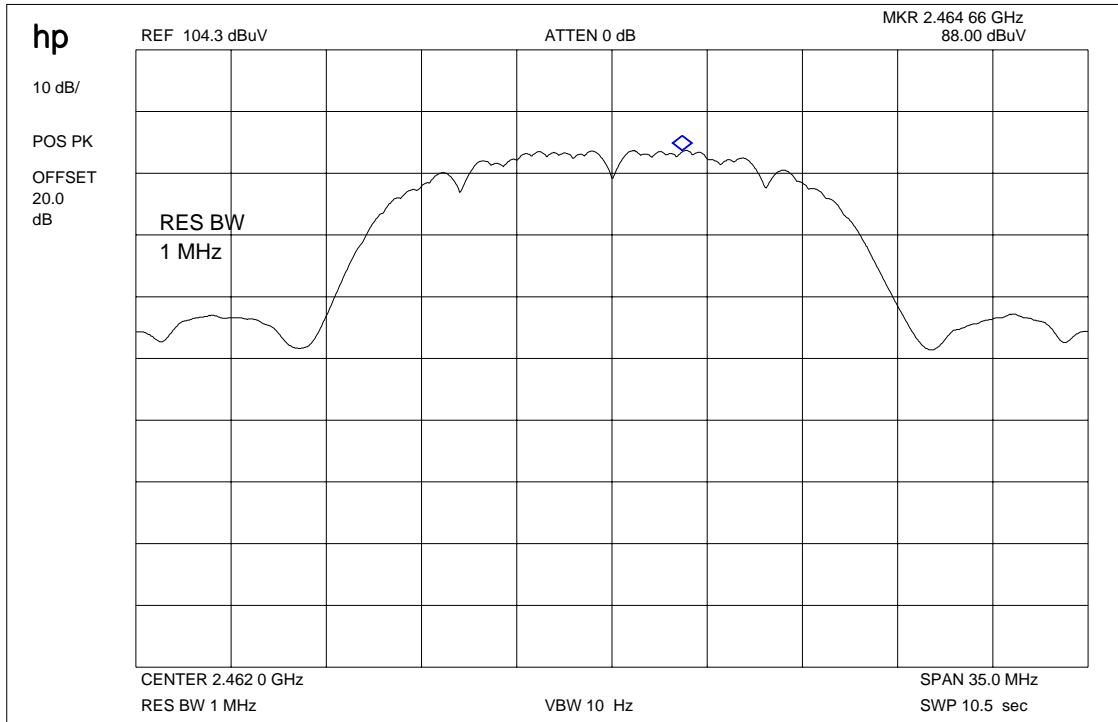

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-7.2	88.0 dB μ V/m
		This values are set into the internal calculation of the analyzer.		

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 42 of 84

Plot 3: Marker-Delta Method RBW/VBW = 1% of span

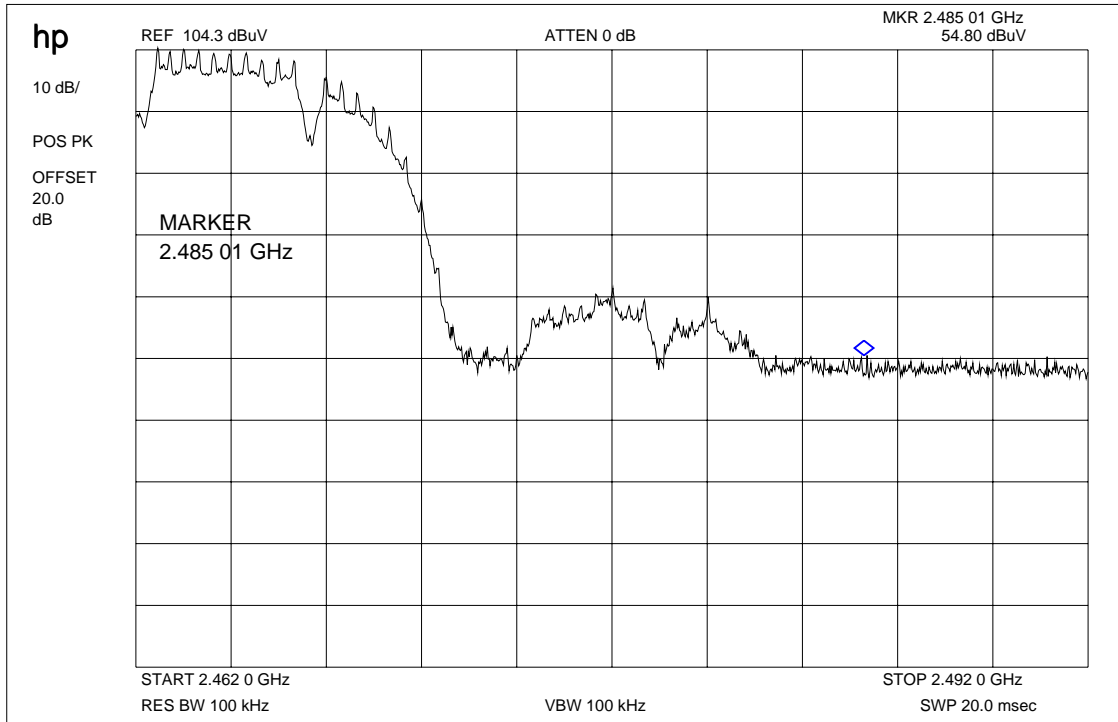

Result:

Marker-Delta-Value : 49.6 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 43 of 84

Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	93.4 dB μ V/m	+15,6 dB	109.0 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	72.4 dB μ V/m	+15.6 dB	88.0 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	49.6 dB		
Value at band edge	limit 54 dB μ V/m			38.4 dB μ V/m
Statement:				Complies

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 44 of 84

OFDM

Plot 1 : Max field strength in 3m distance (single frequency) peak

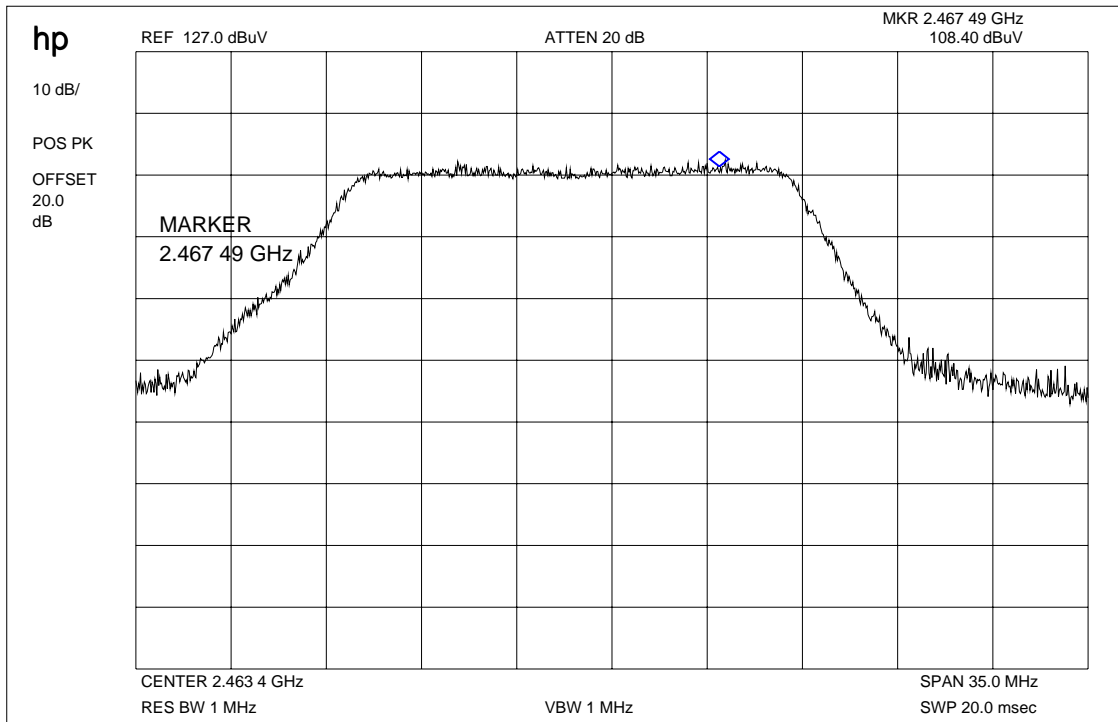

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-7.2	108.4 dB μ V/m Peak
		This values are set into the internal calculation of the analyzer.		

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 45 of 84

Plot 2 : Max field strength in 3m distance (single frequency) average

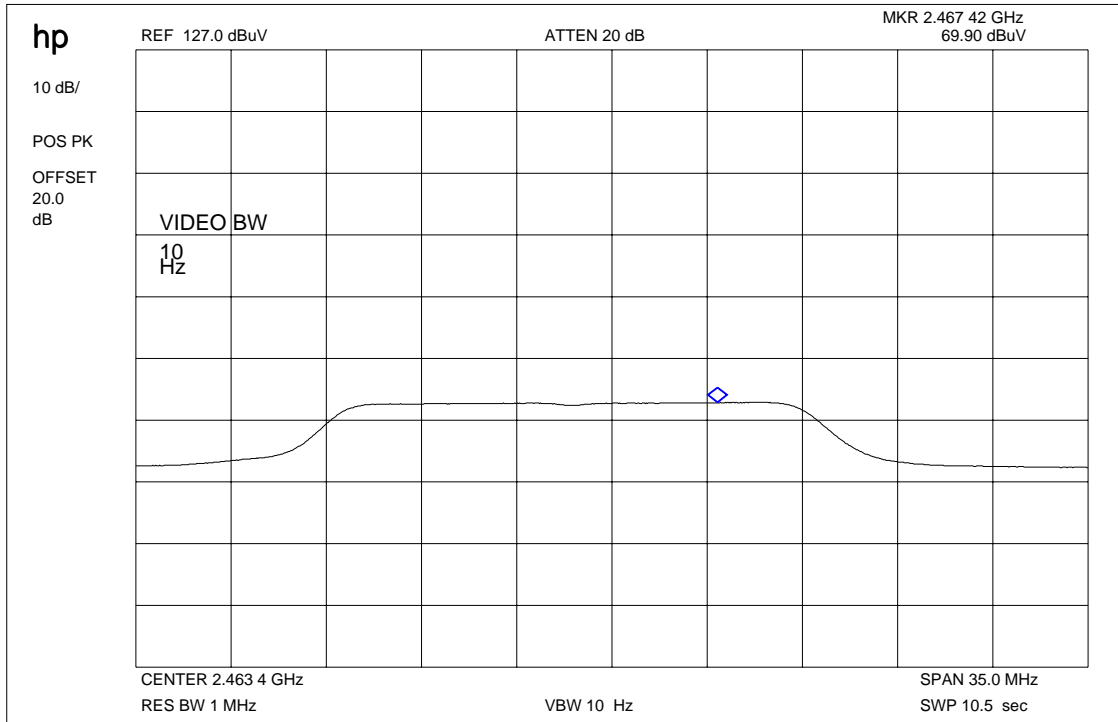

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-7.2	69.8 dB μ V/m
		This values are set into the internal calculation of the analyzer.		

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 46 of 84

Plot 3: Marker-Delta Method RBW/VBW = 1% of span

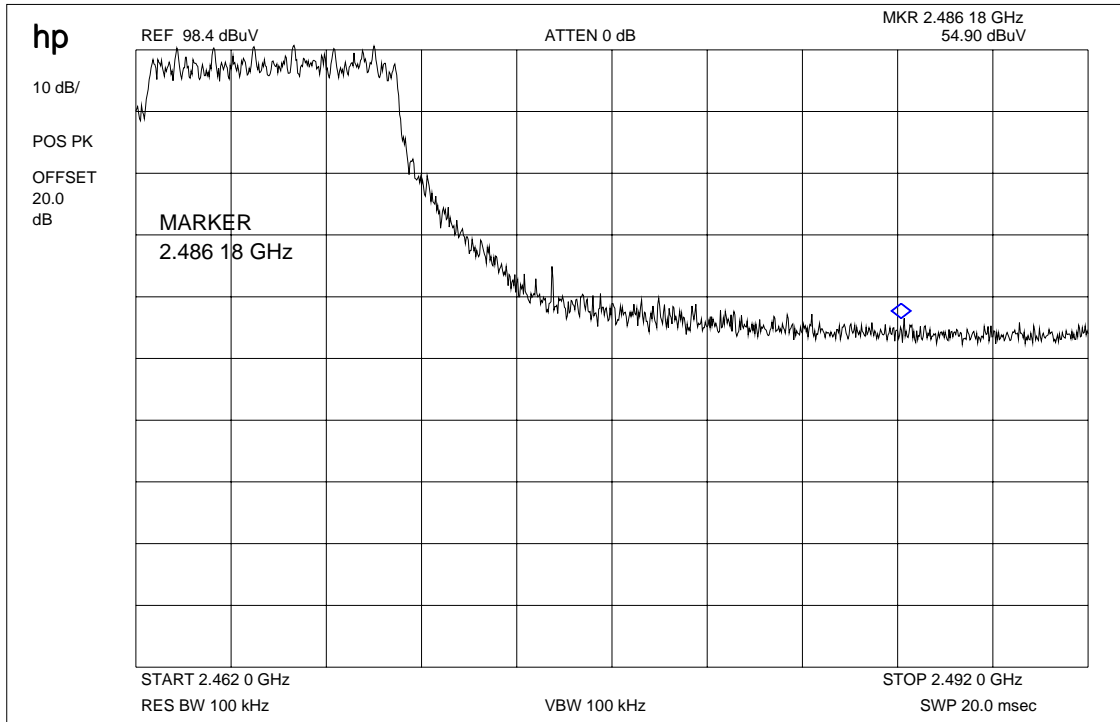

Result:

Marker-Delta-Value : 43.5 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 47 of 84

Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	93.4 dB μ V/m	+15,6 dB	108.4 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	54.2 dB μ V/m	+15.6 dB	69.8 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	43.5 dB		
Value at band edge	limit 54 dB μ V/m			26.4 dB μ V/m
Statement:				Complies

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29


Page 48 of 84

3.11 Spurious Emissions - conducted (Transmitter) §15.247 (c)

DSSS

Low channel

Marker 4 [T1]
RBW 100 kHz
RF Att 10 dB
Ref Lvl -52.07 dBm
VBW 100 kHz
10 dBm
4.80962651 GHz
SWT 6.4 s
Unit dBm

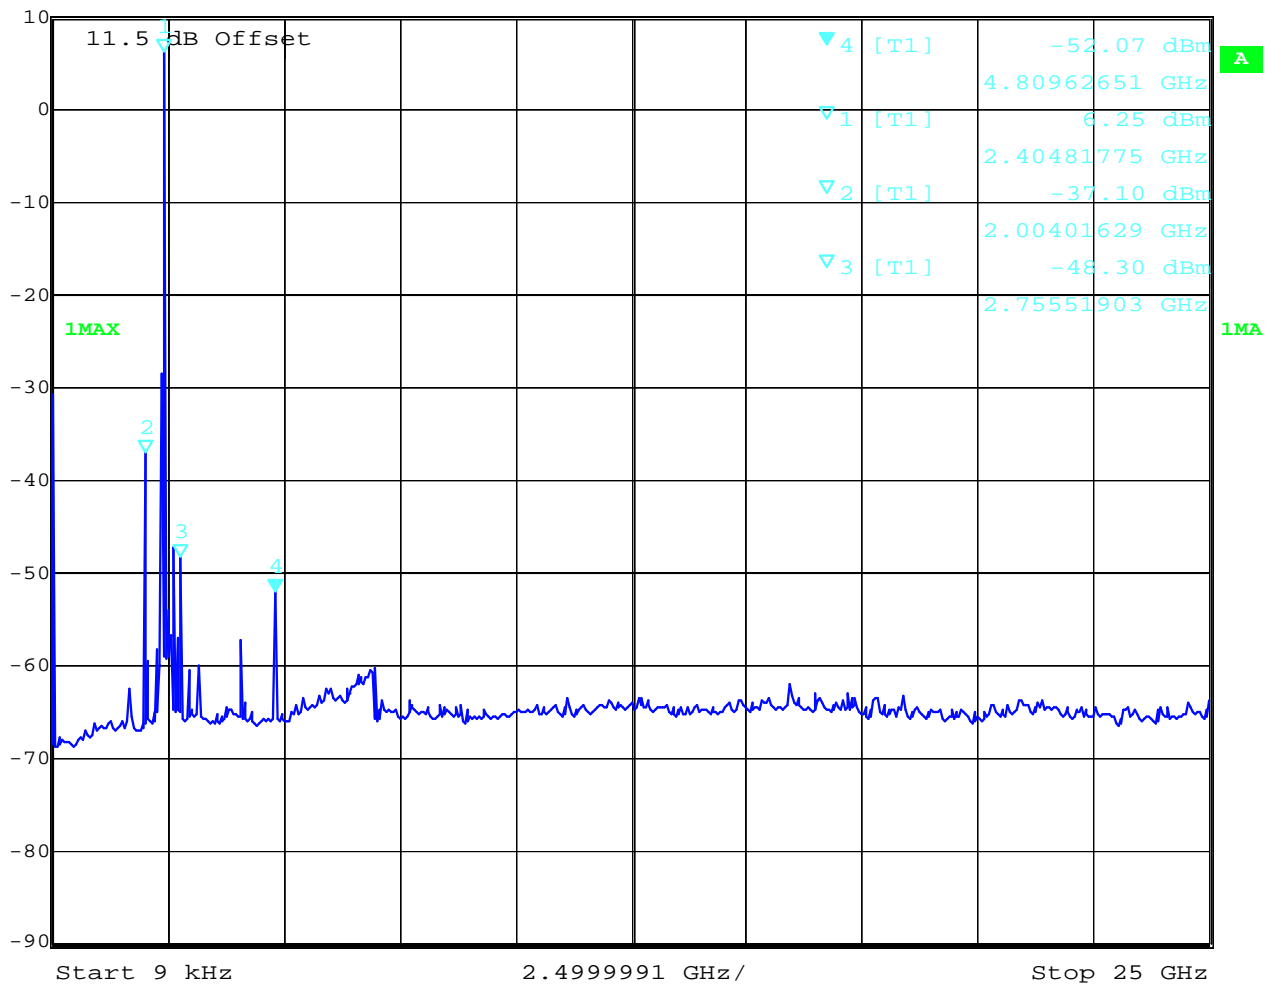

Date: 21.JUN.2005 13:45:48

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 49 of 84

Mid channel



Marker 4 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -54.49 dBm VBW 100 kHz
 10 dBm 4.85972669 GHz SWT 6.4 s Unit dBm

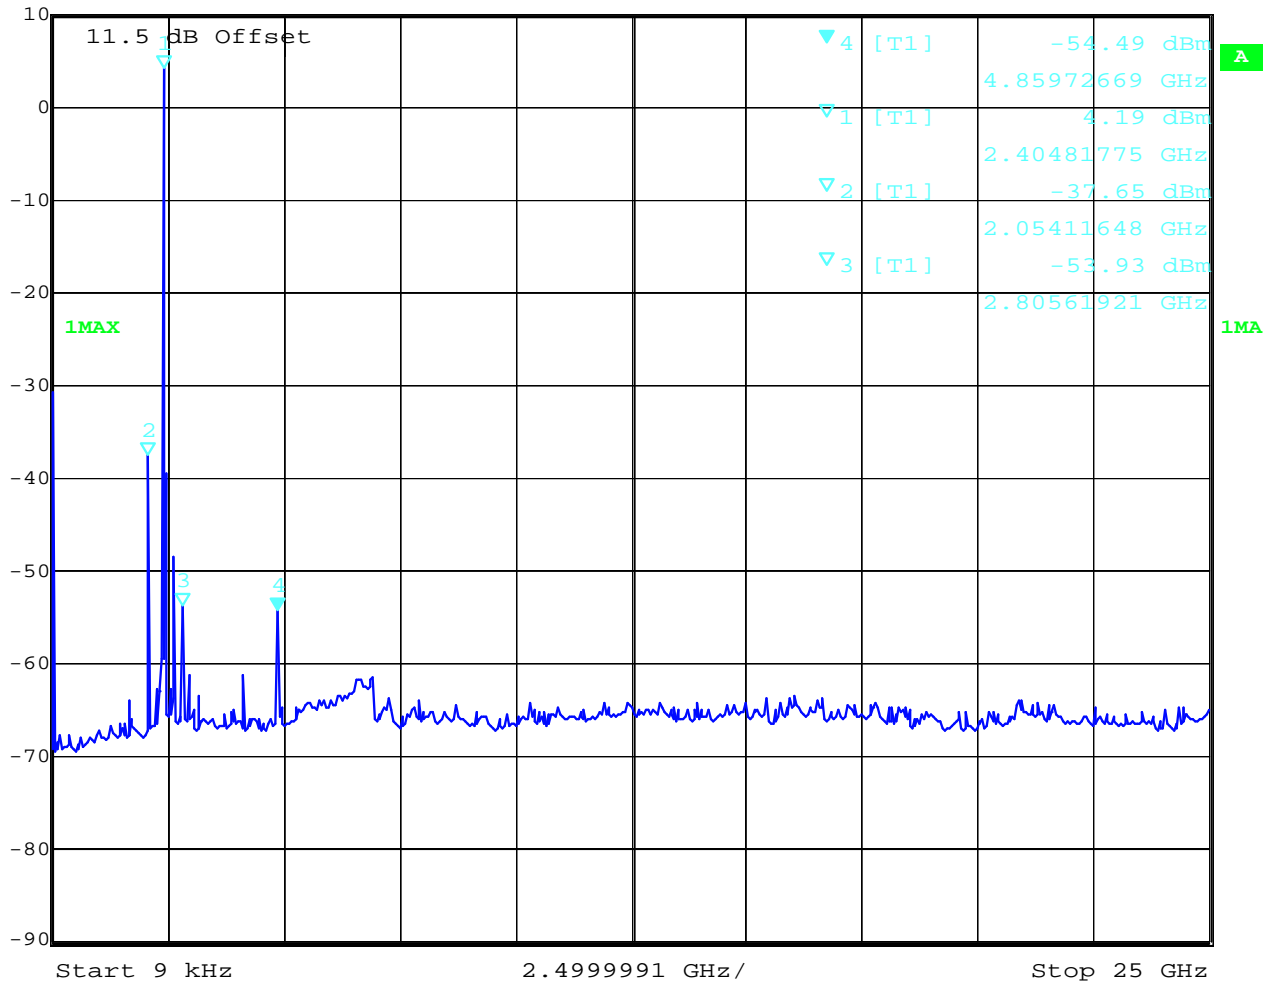

Date: 21.JUN.2005 13:46:20

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 50 of 84

High channel:



Marker 4 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl -53.35 dBm VBW 100 kHz
 10 dBm 4.90982687 GHz SWT 6.4 s Unit dBm

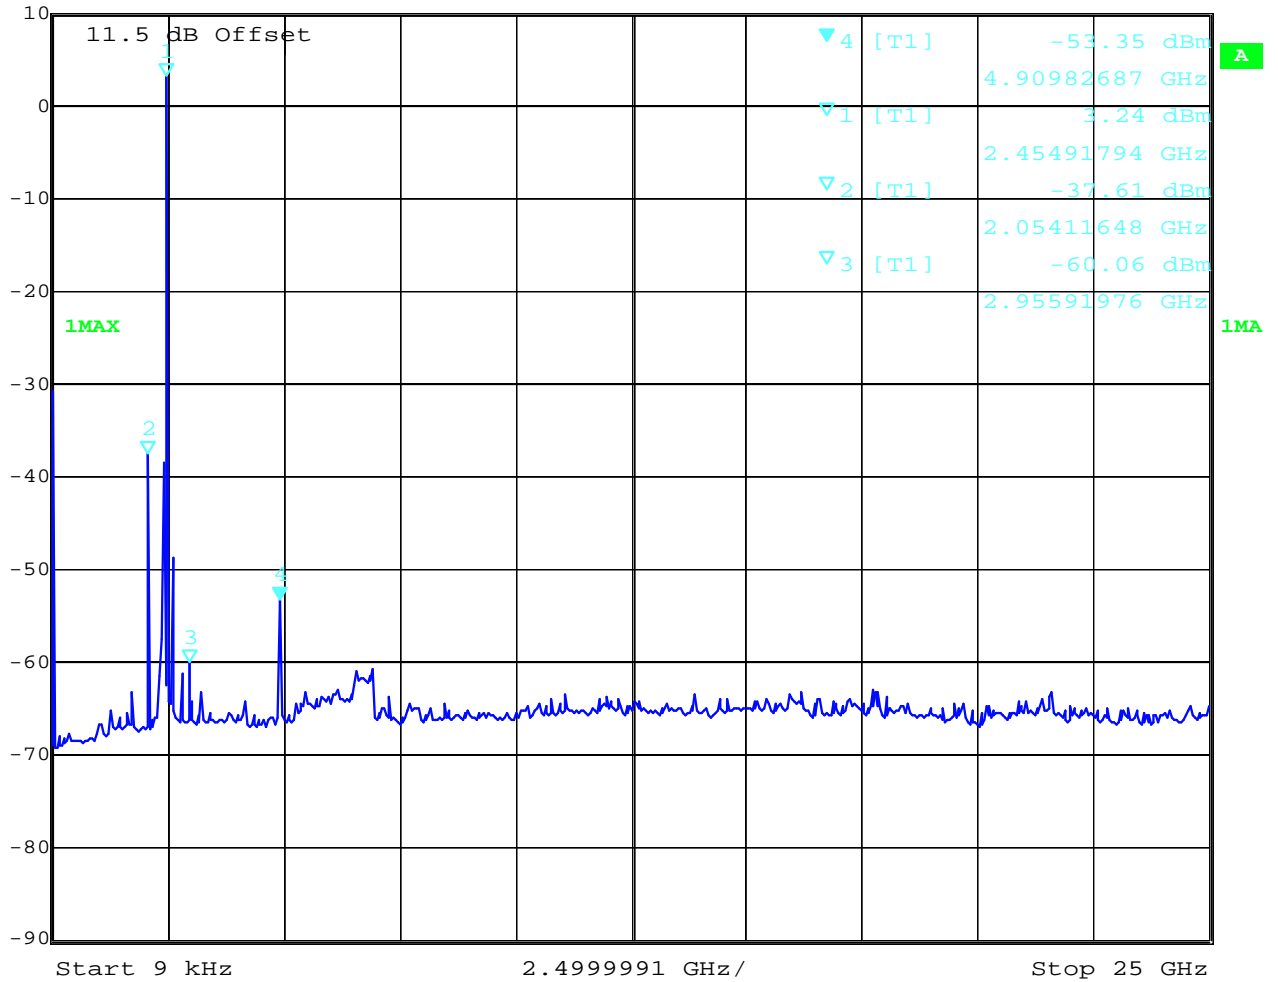

Date: 21.JUN.2005 13:47:04

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 51 of 84

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmission power	actual attenuation below frequency of operation [dB]	results
2412		19.3	30 dBm	-	Operating frequency
2038		-37.1	-20 dBc	56.4	
2755		-48.3		67.6	
4824		-52.1		71.4	
2437		19.1	30 dBm		Operating frequency
2063		-37.7	-20 dBc	56.8	
2806		-53.9		73.0	
4874		-54.5		73.6	
2462		18.7	30 dBm		Operating frequency
2088		-37.6	-20 dBc	56.3	
2956		-60.1		78.8	
4924		-53.4		72.1	
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 100 kHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 52 of 84

OFDM

Low channel

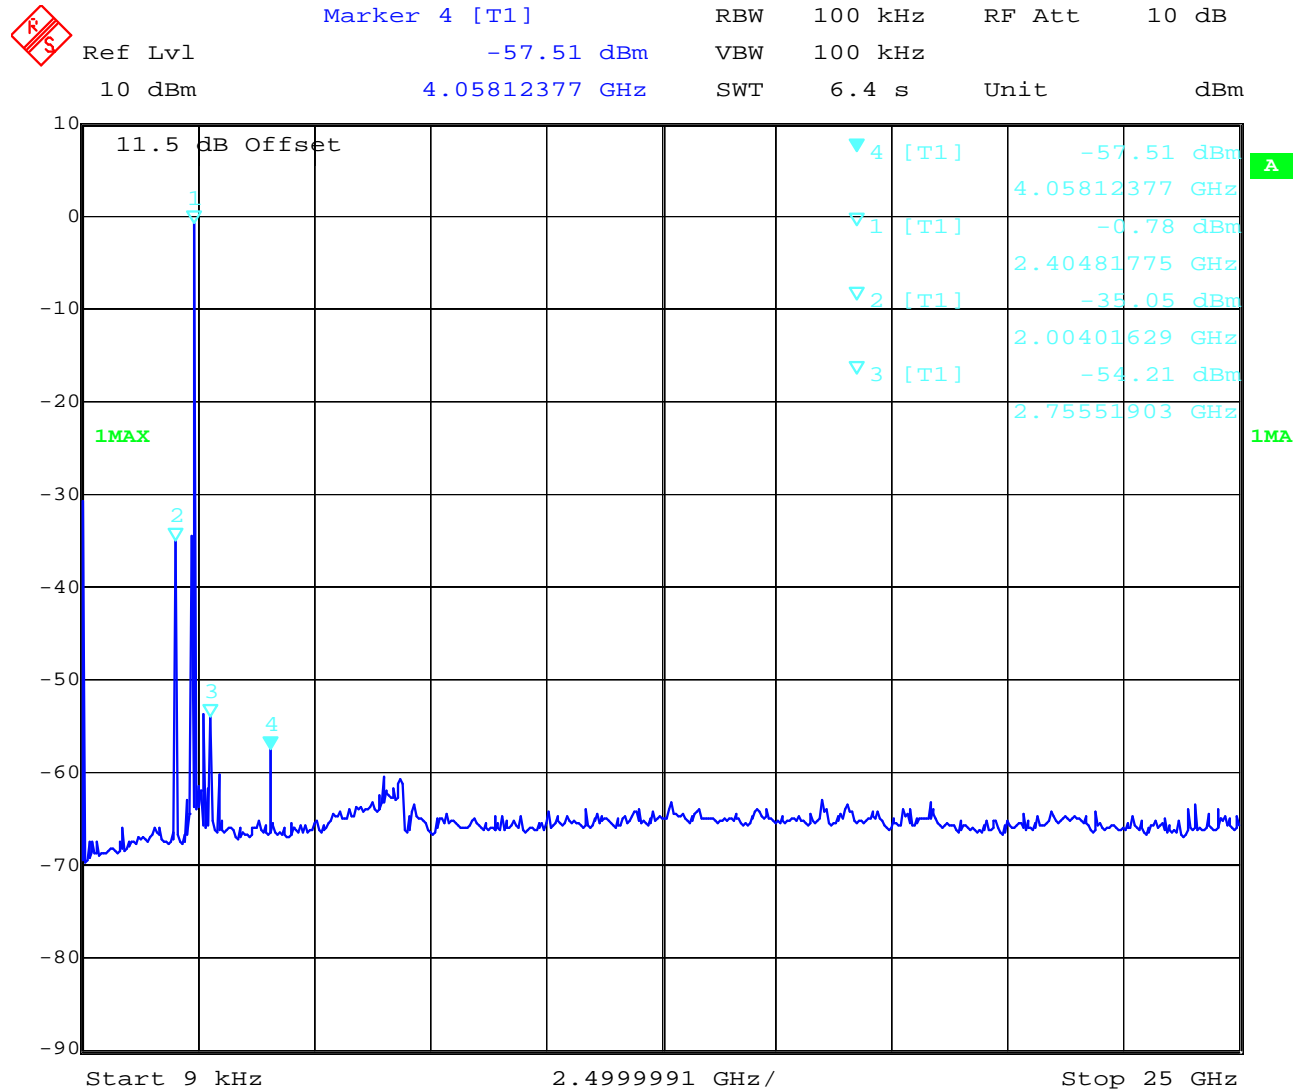

Date: 21.JUN.2005 13:49:33

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 53 of 84

Mid channel

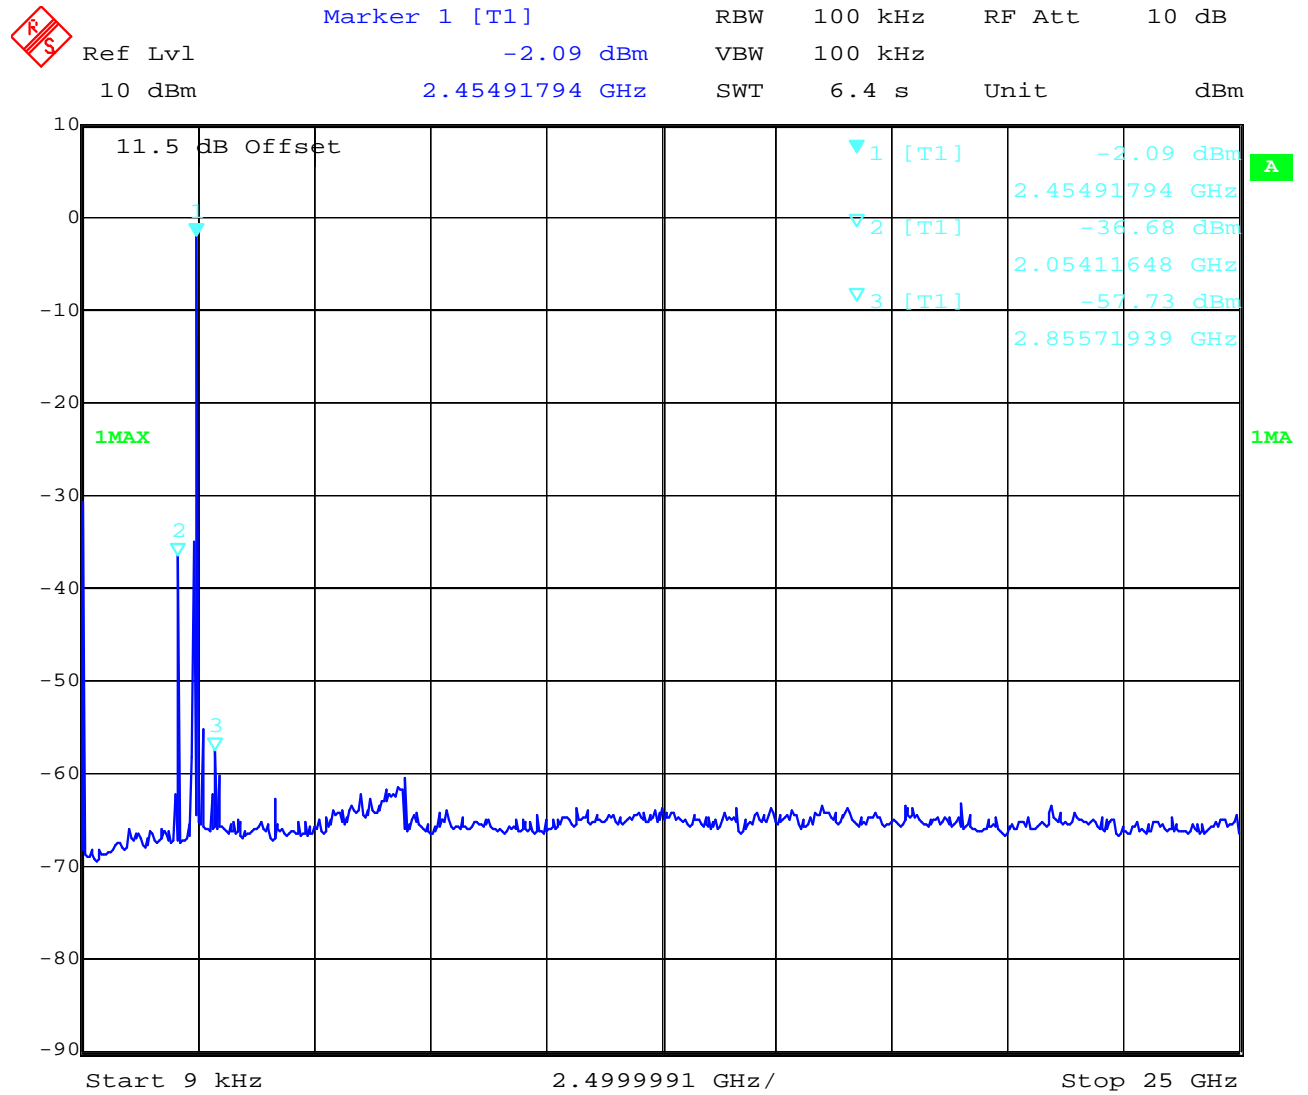

Date: 21.JUN.2005 13:48:15

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 54 of 84

High channel:

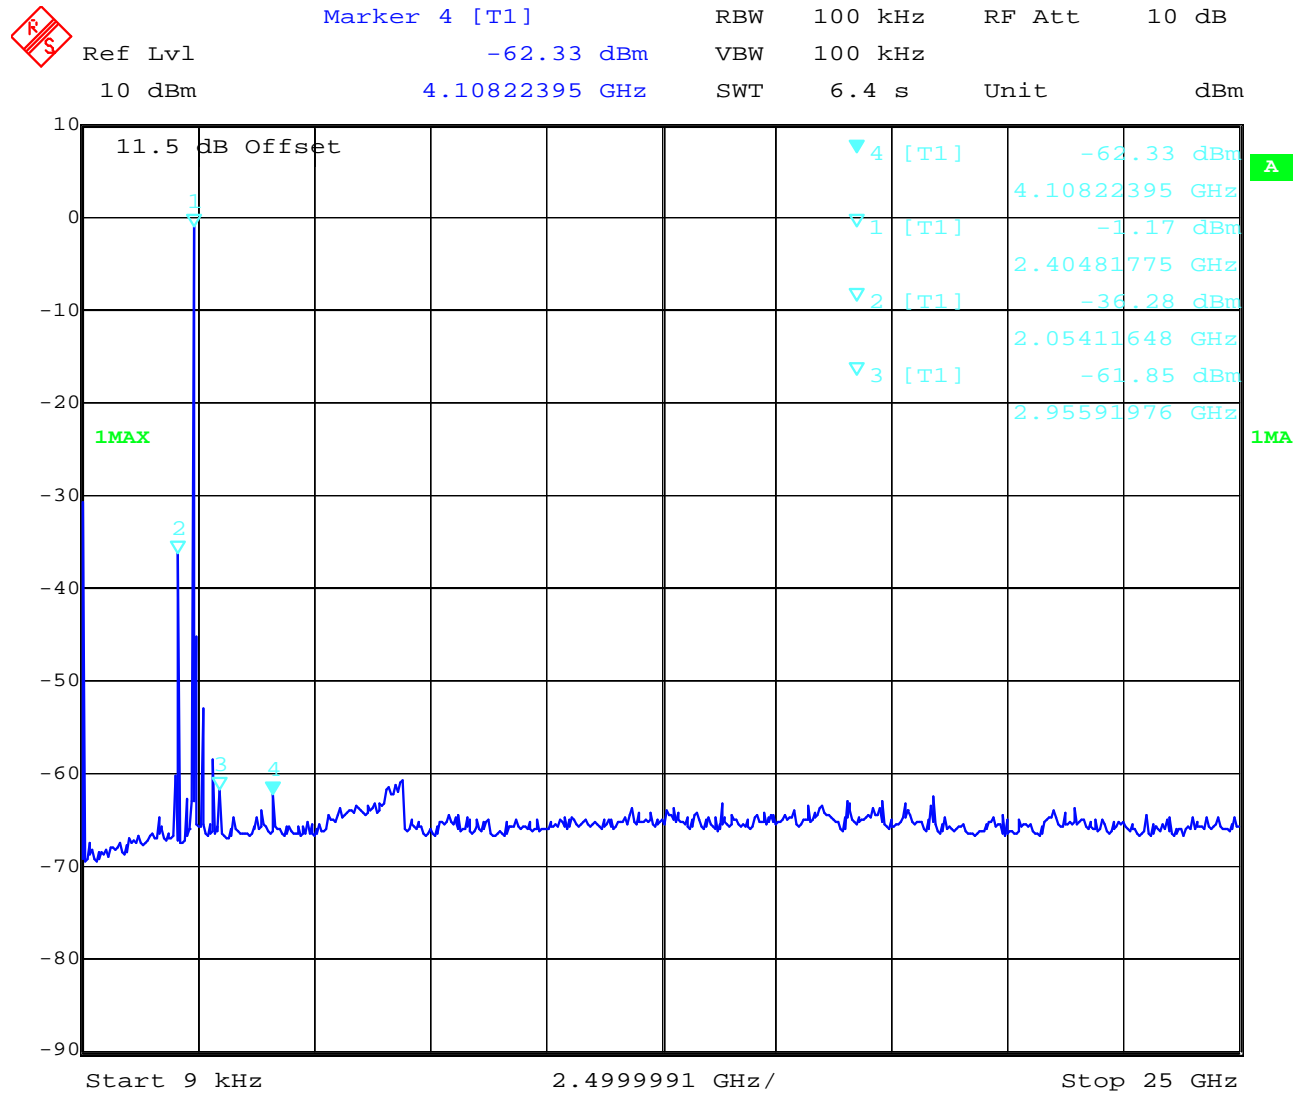

Date: 21.JUN.2005 13:48:52

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 55 of 84

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmission power	actual attenuation below frequency of operation [dB]	results
2412		20.3	30 dBm	-	Operating frequency
2038		-35.1	-20 dBc	55.4	
2755		-54.2		74.5	
4076		-57.5		77.8	
2437		18.9	30 dBm		Operating frequency
2063		-36.7	-20 dBc	55.6	
2855		-57.7		76.6	
4126		-64.3		83.2	
2462		19.0	30 dBm		Operating frequency
2088		-36.3	-20 dBc	55.3	
2955		-61.9		80.9	
4176		-62.3		81.3	
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 100 kHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 56 of 84


3.12 Spurious Emissions - radiated (Transmitter) §15.209

DSSS

Plot 1: 30 MHz to 4 GHz (lowest channel)

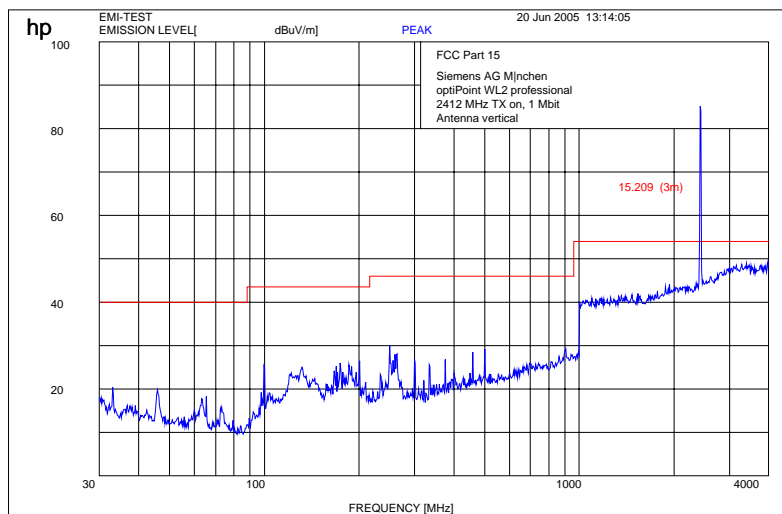

Plot 2: 4000 - 12000 MHz (lowest channel)

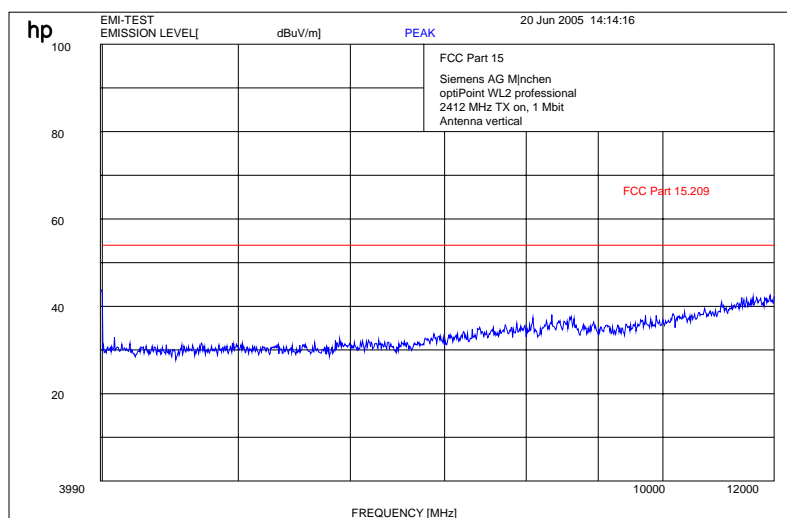

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 57 of 84

Plot 3: 12 – 25 GHz (lowest channel), valid for all three channels

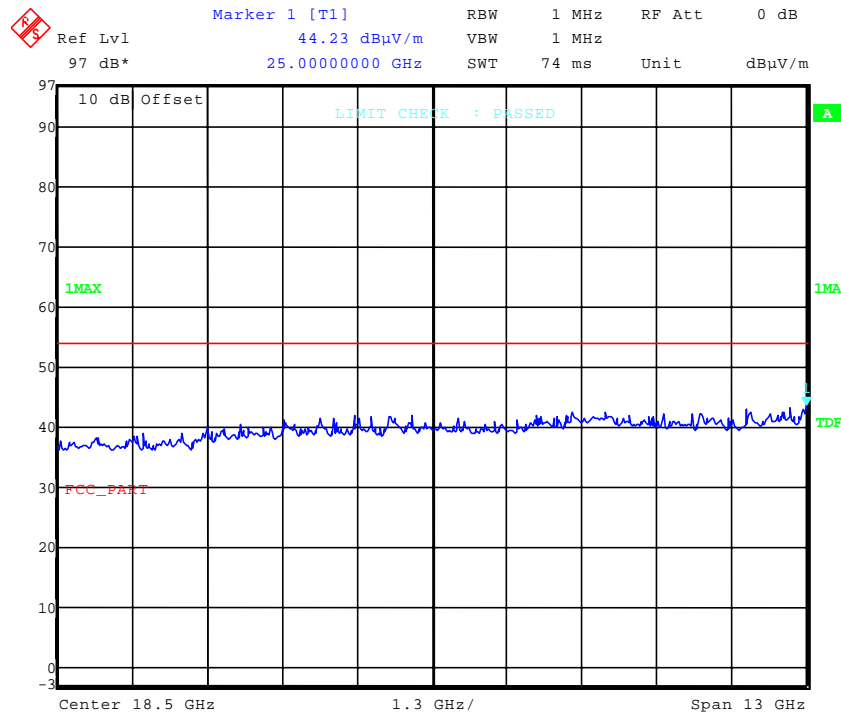

Plot 4: 30 – 4000 MHz (middle channel)

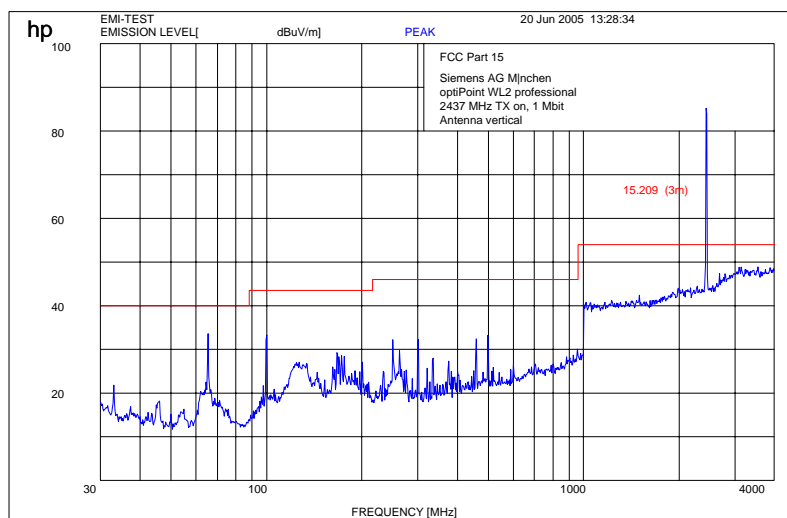

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 58 of 84

Plot 5: 4 – 12 GHz (middle channel)

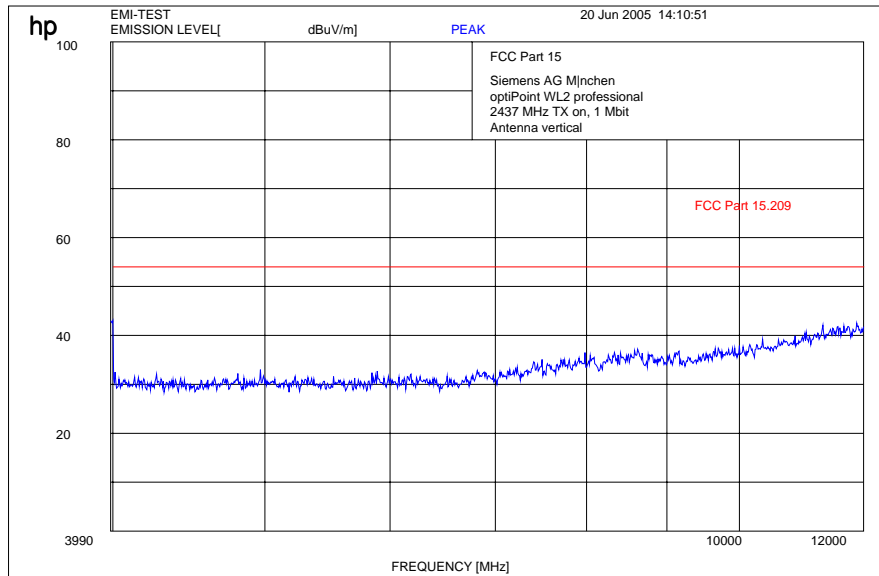

Plot 6: 30 MHz – 4 GHz (highest channel)

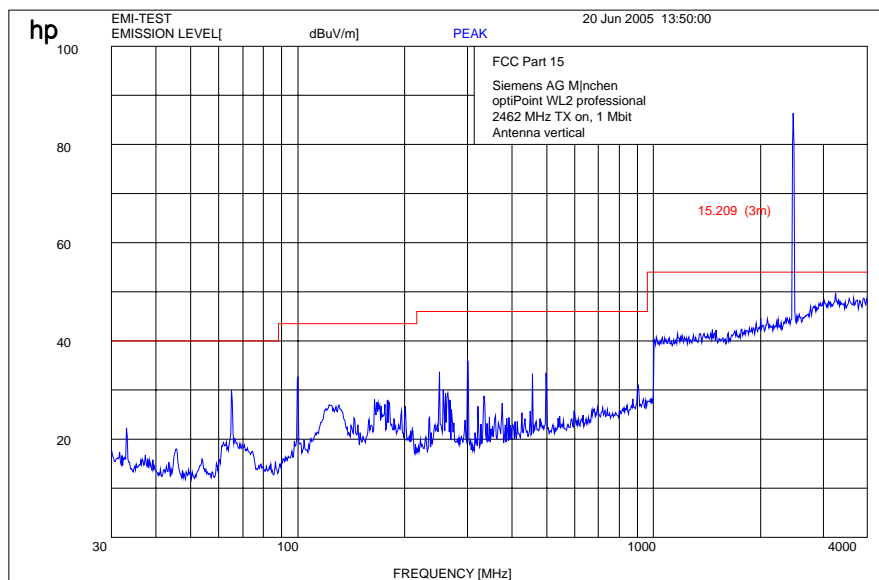

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 59 of 84

Plot 7: 4 – 12 GHz (highest channel)

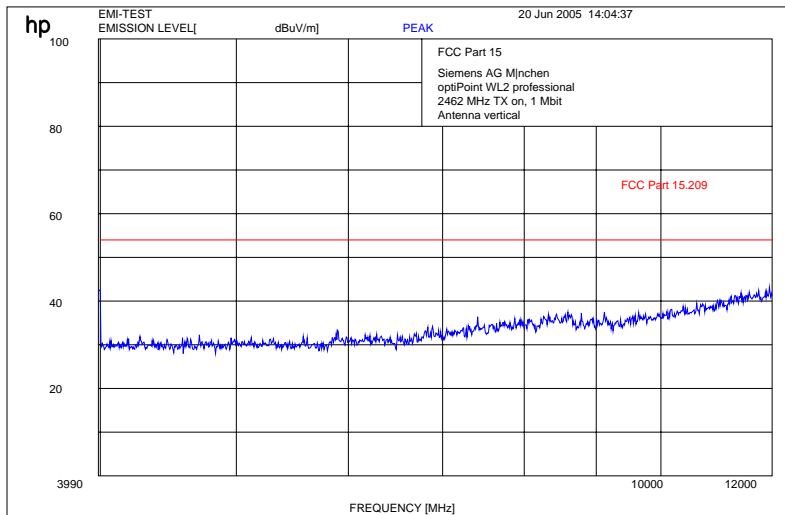

Results:

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
No	peaks	found	< 10 dB	below	limit			
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


Test report No.: 4-1610-01-05/05

Date: 2005-06-29


Page 60 of 84

OFDM

Plot 1: 30 MHz to 4 GHz (lowest channel)

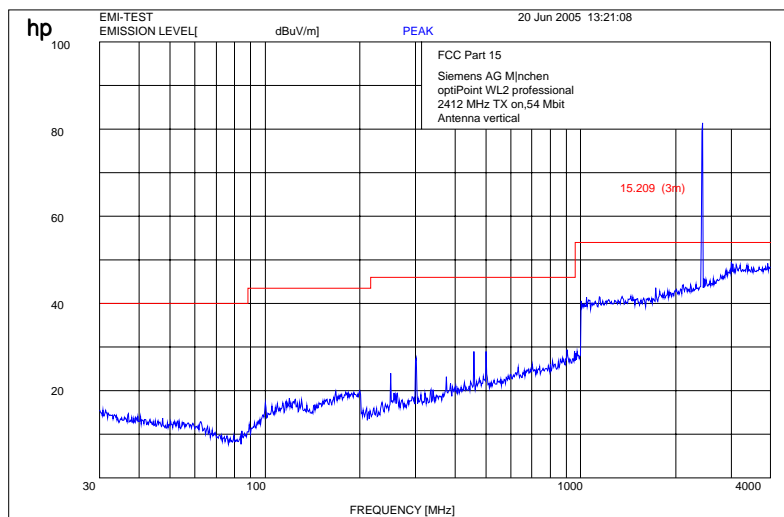

Plot 2: 4000 - 12000 MHz (lowest channel)

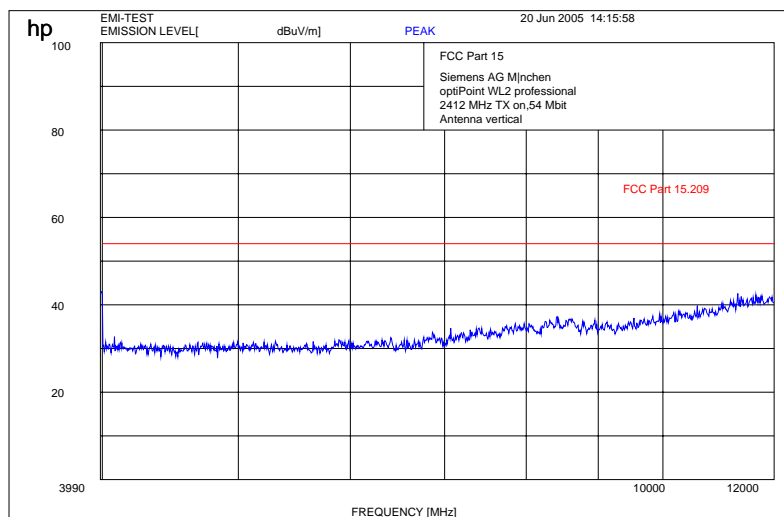

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 61 of 84

Plot 3: 12 – 25 GHz (lowest channel), valid for all three channels

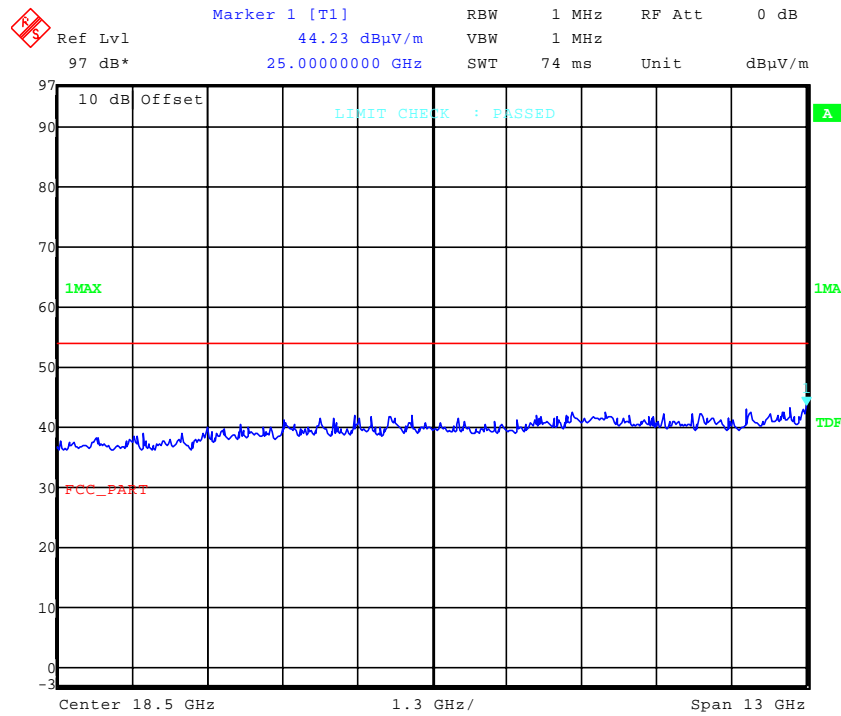

Plot 4: 30 – 4000 MHz (middle channel)

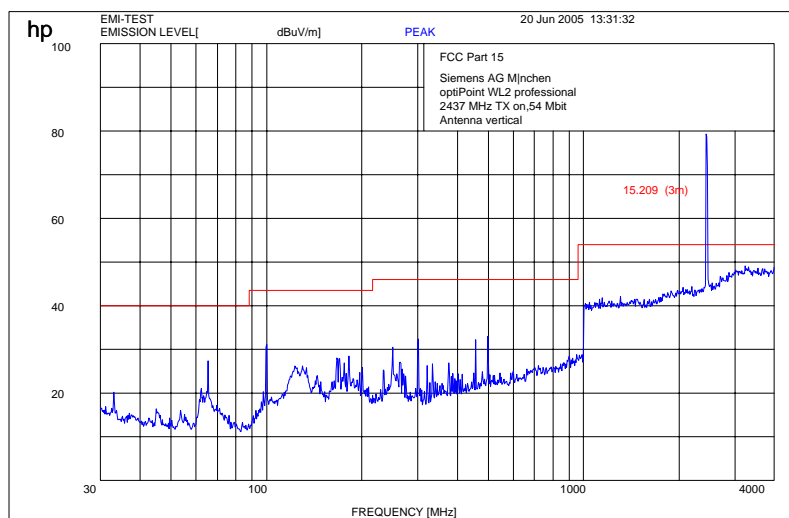

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 62 of 84

Plot 5: 4 – 12 GHz (middle channel)

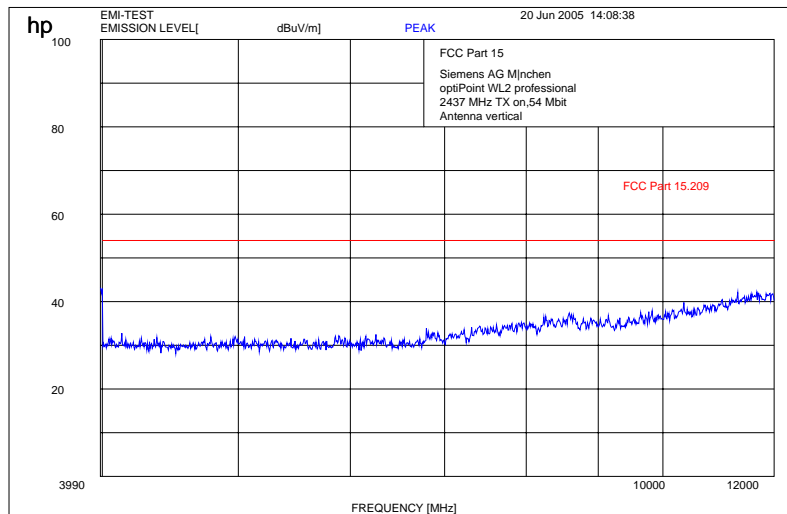

Plot 6: 30 MHz – 4 GHz (highest channel)

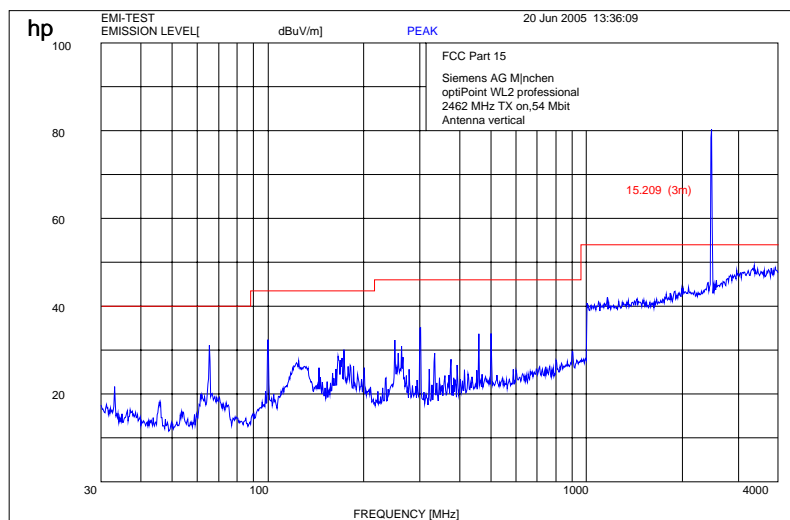

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 63 of 84

Plot 7: 4 – 12 GHz (highest channel)

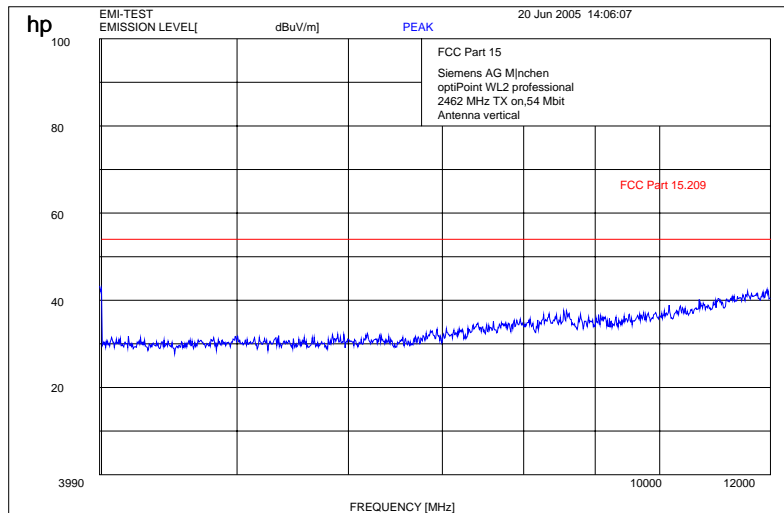

Results:

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
No	peaks	found	< 10 dB	below	limit			
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 64 of 84

3.13 Spurious Emissions - radiated (Receiver) §15.109 / 209

Measured with connected headset and active charging cradle

Plot 1: 9 kHz to 30 MHz (receiver)

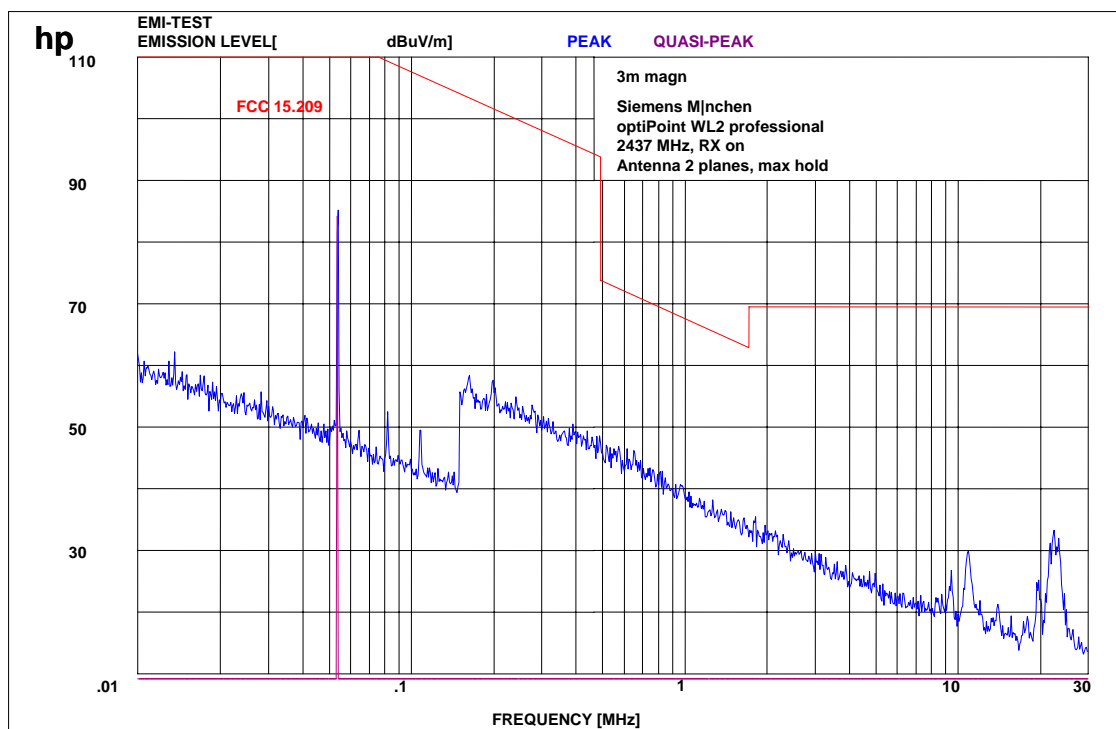

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Limits:

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05


Date: 2005-06-29

Page 65 of 84

Plot 2: 30 MHz - 4 GHz (receiver)

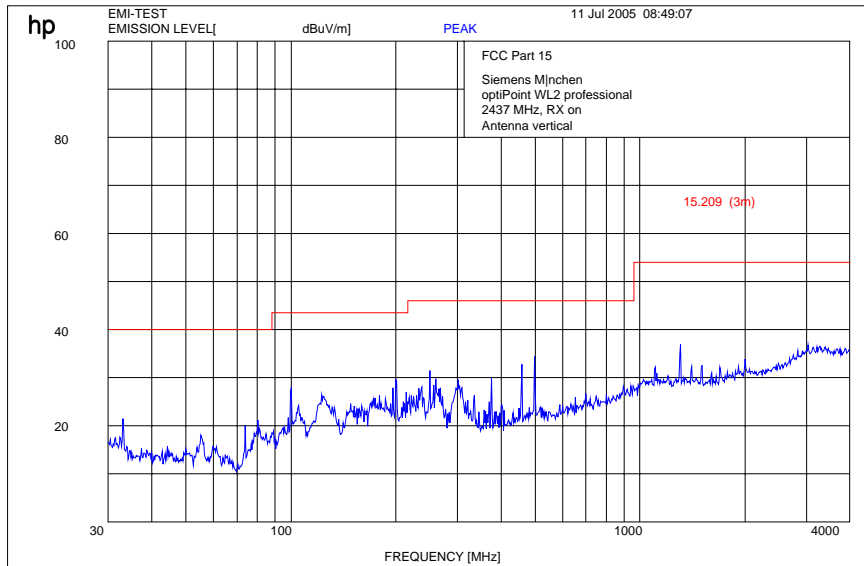

Plot 3: 14 - 12 GHz (receiver)

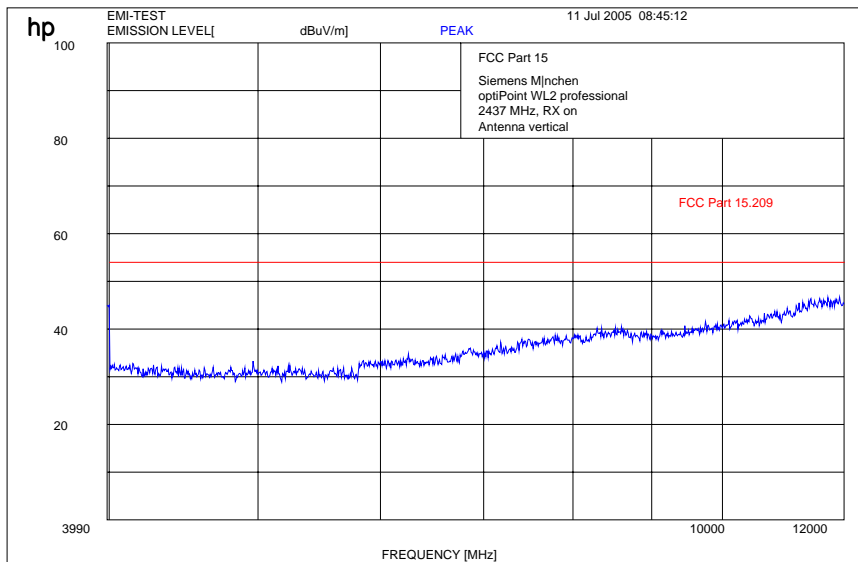

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 66 of 84

Plot 4: 12-25 GHz (receiver)

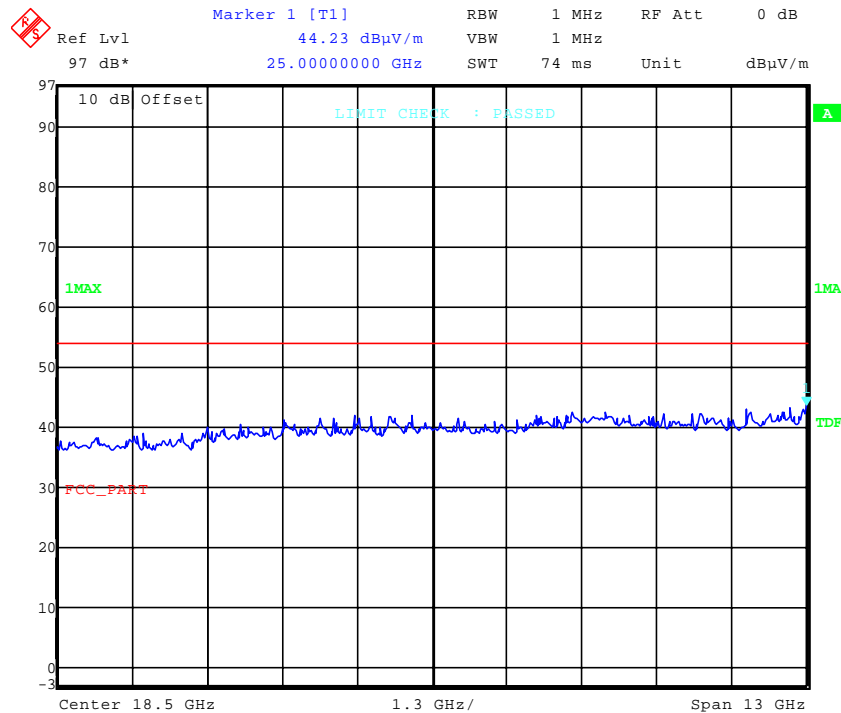

Results:

Spurious Emissions level [$\mu\text{V/m}$]								
CH 1 / 2 / 3								
f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]
All	peaks >	15 dB	below	limit				
Measurement uncertainty			± 3 dB					

$f < 1$ GHz : RBW/VBW: 100 kHz
see above plots

$f \geq 1$ GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits : § 15.109 / 209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29


Page 67 of 84

3.14 Spurious Emissions - radiated <30 MHz §15.109

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1: 9 kHz – 30 MHz radiated emissions

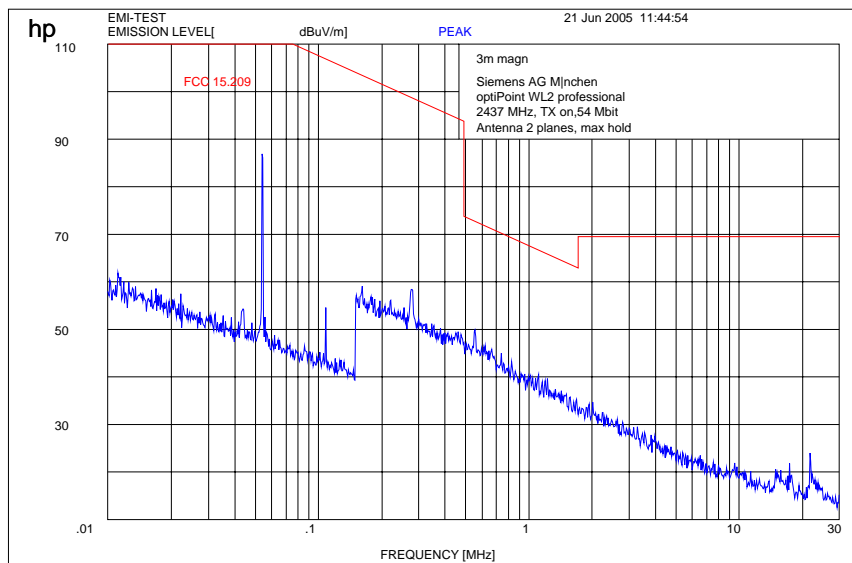


Limits:

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V}/\text{m}$	30

3.15 Conducted Emissions <30 MHz §15.107/207

Plot 1: CISPR 22

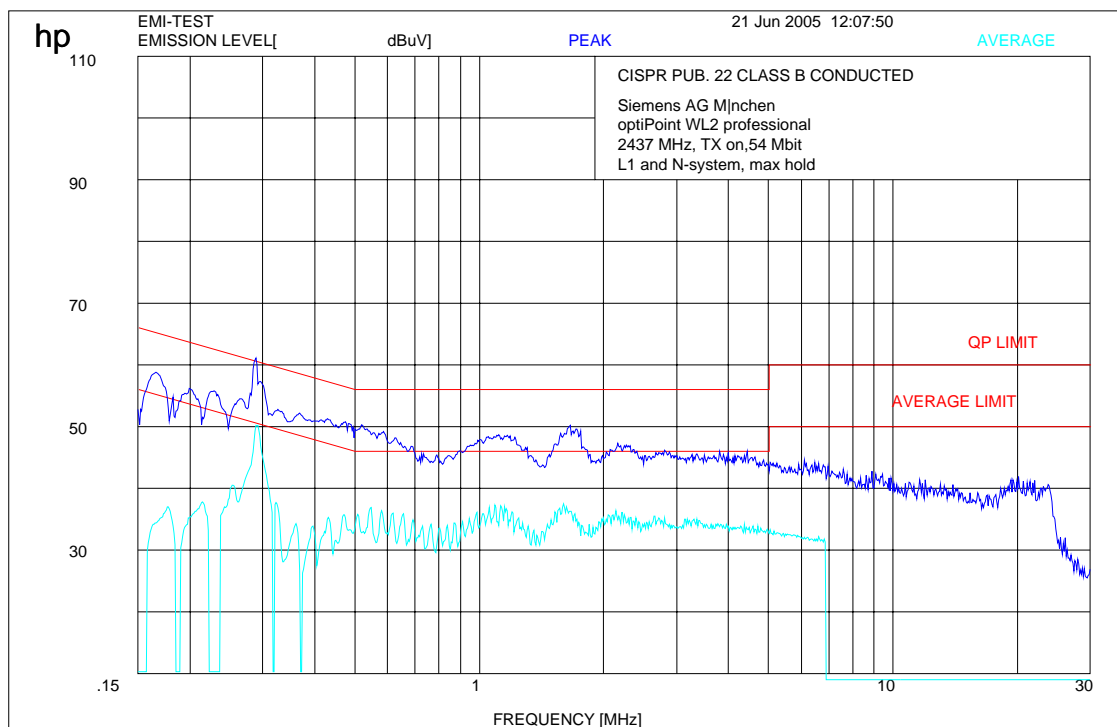

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

289.2 kHz 50.2 dB μ V, Verdict : **Pass**

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 69 of 84

3.16 Used Testequipment

Anechoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Dupply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Biconical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory:

Device	300001207	Type	S/N Number	Inv. No. Cetecom
Spectrum Analyzer	300001208	494AP	B010241	300000863
Spectrum Analyzer	HP	71210A (70000)	2731A02347	300000321
Spectrum Analyzer Display	HP	70206A	2840A01553	300002017
Reference Frequency	HP	70310A	2736A00707	300002018
Local Oscillator	HP	70900A	2842A02221	300002019
ZF-Modul 10Hz-300 kHz	HP	70902A	2840A02145	300002020
ZF-Modul 100 kHz-3 MHz	HP	70903A	2835A01069	300002021
HF-Teil für 71210A 100Hz- 22GHz	HP	70908A		300002022
Spectrum Analyzer 2	HP	85660B	3138A07614	
Spectrum Analyzer Display 2	HP	85662A	3144A20627	

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 70 of 84

Signal Generator DC-600 KHz	HP	8904A	2822A01213	300001157
Signal Generator DC-600 KHz	HP	8904A	2822A01214	300001158
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funkions)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 71 of 84

Powersensor	HP	8484A	2237A10494	300001666
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funkions)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791
Powersensor	HP	8484A	2237A10494	300001666

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 72 of 84

Powersensor	HP	8485A	2238A00849	300001668
Bandfilter	Telonic	TTF7255EE	20293-11	300001300
Bandfilter	Telonic	TTF12555EE	20292-6	300001302
Bandfilter	Telonic	TTF25055EE	20291-8	300001304
Bandfilter	Telonic	TTF50055EE	20290-7	300001305
Bandfilter	Telonic	TTF100055EE	20289-7	300001307
Bandfilter	Telonic	TTA300055EESN	20370-2	300001312
Bandstop	Telonic	TTR3753EE1	30013-1	300001314
Bandstop	Telonic	TTR723EE	20417-2	300001316
Bandstop	Telonic	TTR95-3EE	20372-4	300001318
Bandstop	Telonic	TTR1903EE	30036-4	300001320
Bandstop	Telonic	TTR3753EE	20369-5	300001321
Bandstop	Telonic	TTR750-3EE1	90177-1	300002387
Highpass	Pro Nova	HDP120-6GG	ohne	300001348
Highpass	Pro Nova	HMC500-6AA	HJ67-01?	300001350
Highpass	Narda	NHP 9000	0004	300001362
Highpass	Narda	HDP16-6GH	JV70-01	300001364
Highpass	RSD	HDP50-6GH, HDP200-6GG		300001371
Highpass	RSD	2099-02-01		300000370
Signal Generator 0.1-2060 MHz	HP	8657A	2838U00736	300001009
Radio Code Analyzer	Schlumberger	SL4922		300001038
Signal Analyzer	B&K	2033		300001047
Frequency counter	HP	5386A	2704A01243	300000998
Laufzeitelement	WR-Elektronik			300001036
Powersupply Stromversorgung	Systron	M5P 40/15A	828233	300001291
Powersupply	Heiden	1108-32	1701	300001392
Powersupply	Heiden	1108-32	1802	300001383
Powersupply	Heiden	1108-32	003202	300001187
Powersupply	Zentro	LA 2x30/5GB1	2011	300001276
Powersupply	Zentro	LA 2x30/5GB2	2012	300001275
Powersupply	Zentro	LA 30/5GA	2041,2042	300001287
Trenntrafo	Grundig	RT5A	8781	300001277
Trenntrafo	Grundig	RT5A	9242	300001263
Multimeter	Goerz Elektro	Unigor 6e P	911 355	300001625
Multimeter	Goerz Elektro	Unigor 6e P	911 391	300001281
Climatic Box	Heraeus Voetsch	VUK04/500	32679	300000299
Powersensor + Att.	HP	8482B	2703A02586	300001492
Attenuator 30 dB	HP	8498A	1801A02445	300001475
Signal Generator NF	HP		2822A01203	300001004
Attenuator	Spinner	BN 534171 D	51881	300001516
Attenuator coaxial	Bird	8325	2429	300001513
Impulsbegrenzer	R&S	ESH 3 Z2		300001460
4Port Box	R&S	4Port Box	860457/005	300001472
Signal Generator 0.1-4200 MHz	HP	8665A	2833A0011	300002299
NF-Spektrumanalyzer	B&K	2033A		300002301
Swissphone Freifeld-Messbox	Swissphone Schweiz			300002302
Trenntrafo regelbar	Grundig	RT5H	9242	300001628
Signal Generator	HP	8111A	2215G00867	300001117

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 73 of 84

4 Photographs

optiPoint WL2 professional

Test site




SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 74 of 84

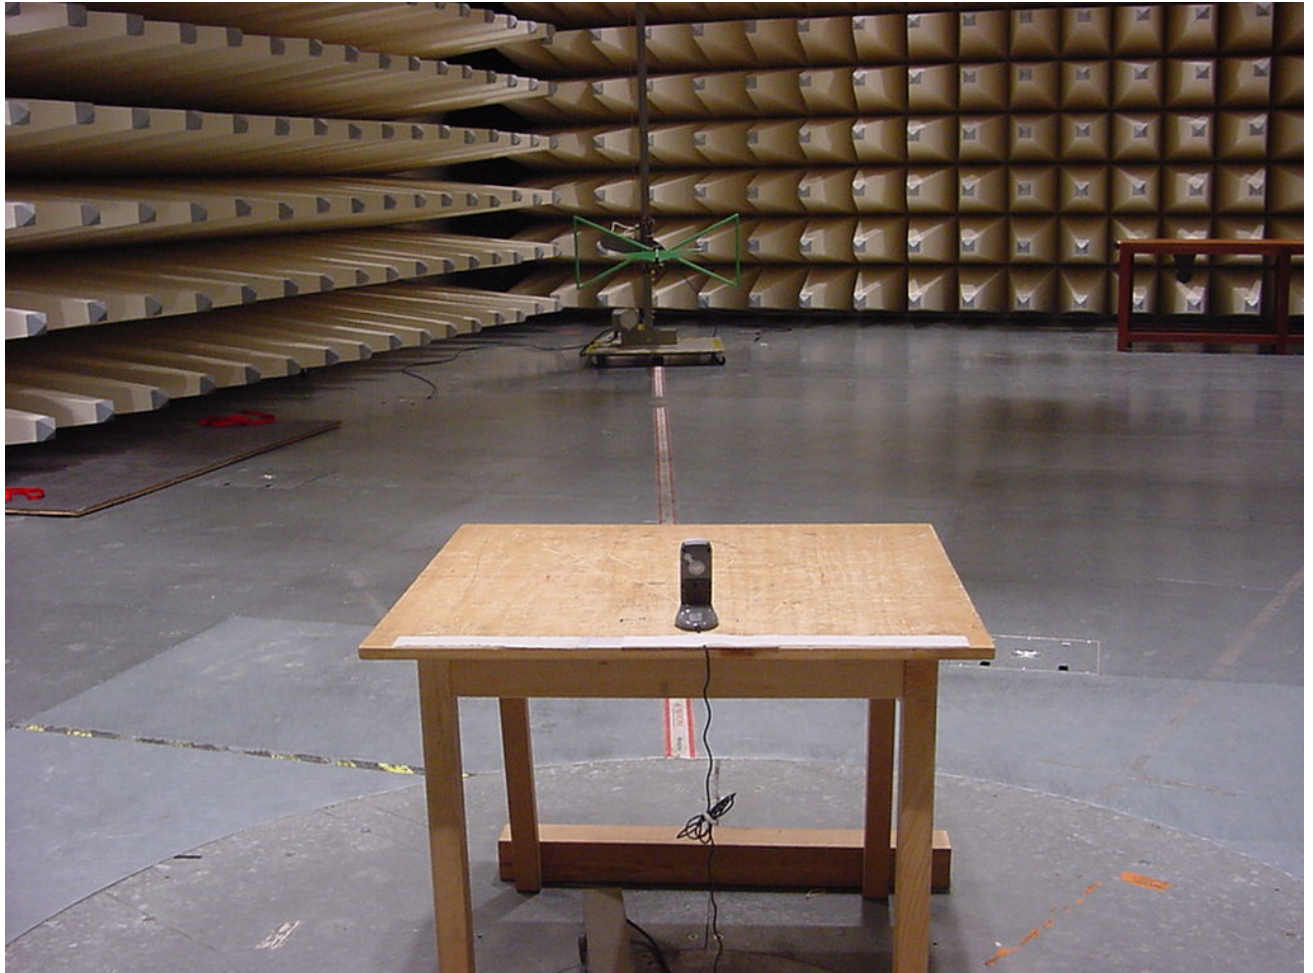

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 75 of 84

AC conducted:



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 76 of 84

Test sample:



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 77 of 84



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 78 of 84



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 79 of 84




SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 80 of 84

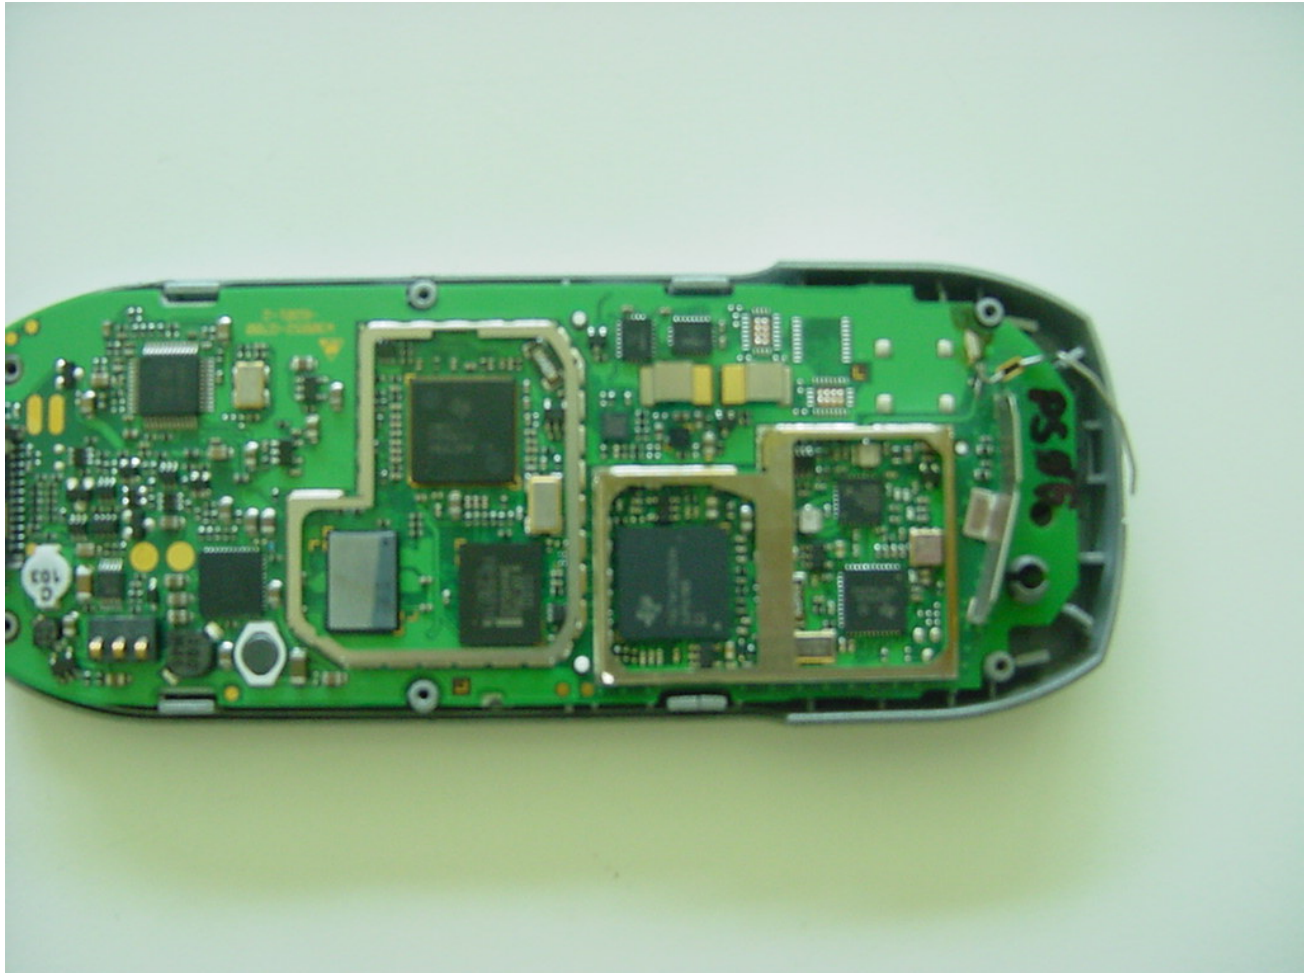


SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 81 of 84

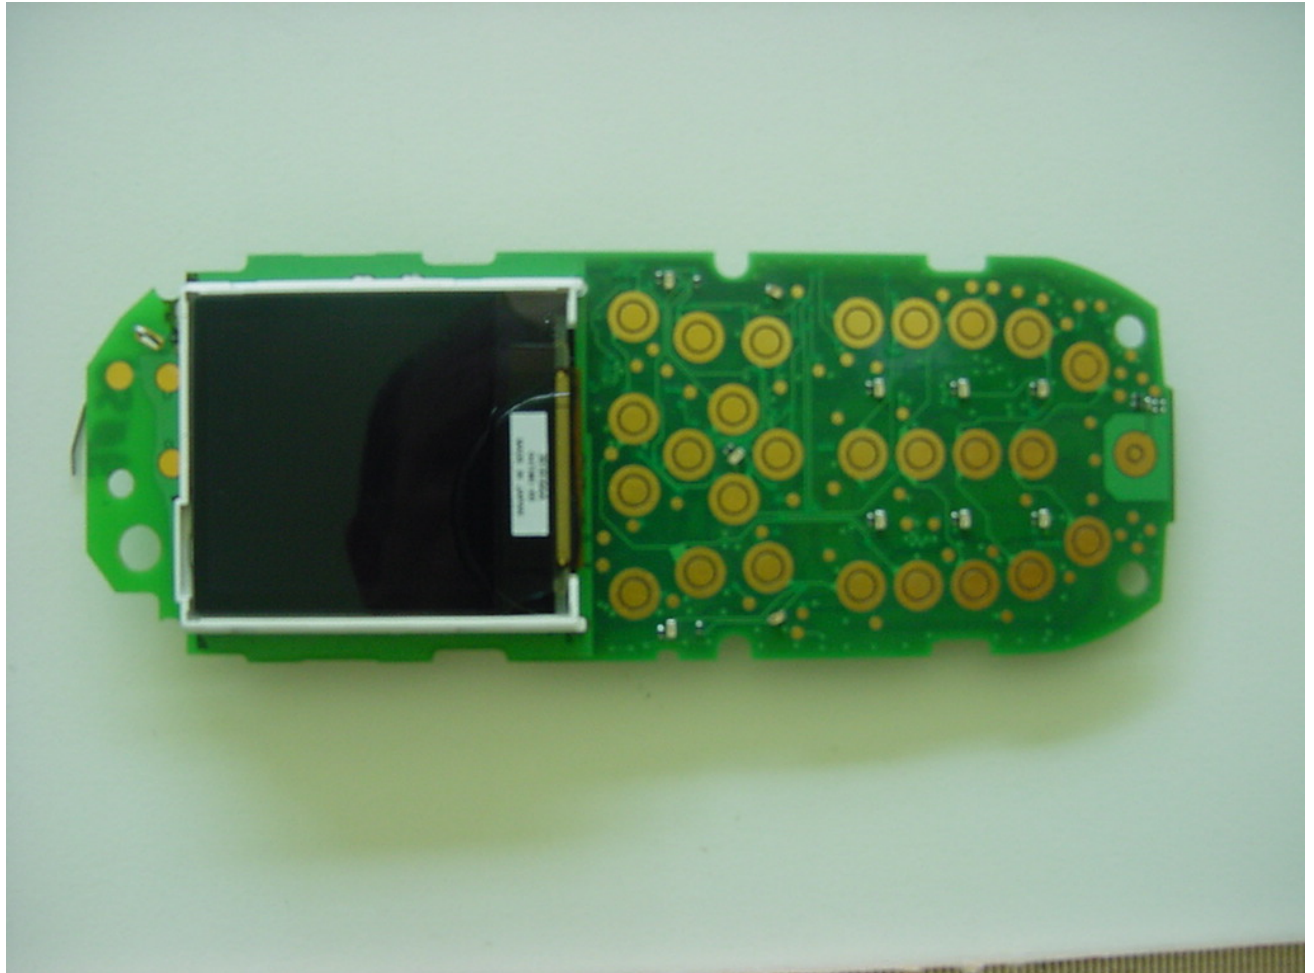

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 82 of 84



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 83 of 84



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

Test report No.: 4-1610-01-05/05

Date: 2005-06-29

Page 84 of 84

