


MOTOROLA

TESTING CERT # 2518.05
FCC ID: AZ489FT3822
DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 1 of 2
Government & Public Safety
EME Test Laboratory
Motorola Technology Sdn Bhd (455657-H)
Customer Solution Center
**Plot 2, Bayan Lepas Technoplex Industrial Park,
Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.**
Date of Report: 2/12/09
Report Revision: B
Report ID: SAR rpt_PMUD2444AAN_Rev B_090212_SR6789

Responsible Engineer: Veerapan Veeramani (EME Eng.)
Report Author: Veerapan Veeramani (EME Eng.)
Date/s Tested: 12/09/08 – 12/18/08
Manufacturer/Location: China
Sector/Group/Div.: G&PS
Date submitted for test: 11/30/08
DUT Description: LKP with channel knob 136-174MHz 5W 12.5/25kHz 16ch

Test TX mode(s): CW
Max. Power output: 6.0 Watts
Nominal Power: 5.0 Watts
Tx Frequency Bands: 136-174 MHz
Signaling type: FM
Model(s) Tested: PMUD2444AAN
Model(s) Certified: PMUD2444AAN
Serial Number(s): 1338JX0810
Classification: Occupational/Controlled
Rule Part(s): 90

DUT Photo
 (Refer to Exhibit 7B)

Approved Accessories:
Antenna(s):

NAD6502AR (146-174MHz, Heliflex ¼ wave antenna, -10dBi); NAD6579A (148-161MHz, Whip ¼ wave antenna, -6.25dBi); PMAD4012A (136-155MHz, Stubby ¼ antenna, -12dBi); PMAD4013A (155-174MHz, Stubby ¼ wave antenna, -14.5dBi); PMAD4014A (136-155MHz, Helical ¼ wave antenna, -13dBi); PMAD4015A (155-174MHz, Helical ¼ wave antenna, -12.5dBi); PMAD4049A (146-174MHz, Helical ¼ wave antenna, -4dBi); HAD9338BR (136-162MHz, Heliflex ¼ wave antenna, -10dBi); HAD9742A (146-162MHz, Stubby ¼ wave antenna, -11dBi); HAD9743A (162-174MHz, Stubby ¼ wave antenna, -11dBi)

Battery(ies):

PMNN4080A (LiIon High Capacity 2150mAh); PMNN4082A (NiMH-1300mAh); PMNN4081A (LiIon – 1500mAh)

Body worn accessory(ies):

HLN9844A (Spring Action Belt Clip – 2 inch); PMLN5334A (Protective Leather Case).

Audio/Data cable accessory(ies):

See section 3.0 for list of approved audio accessories.

Max. Calc. : 1-g Avg. SAR: 3.17 W/kg (Body); 10-g Avg. SAR: 1.76 W/kg (Body)

Max. Calc. : 1-g Avg. SAR: 1.57 W/kg (Face); 10-g Avg. SAR: 1.13 W/kg (Face)

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8W/kg per the requirements of 47 CFR 2.1093(d).

The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300GHz), Health Physics 74, 494-522 RF Exposure limits of 10W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 2.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Signature on file- Deanna Zakharia

**Deanna Zakharia G&PS EME Lab Senior Resource Manager,
Laboratory Director**

Approval Date: 2/12/2009

Certification Date: 12/22/2008

Certification No.: L1081213

Part 1 of 2

1.0	Introduction and Overview.....	3
2.0	Referenced Standards and Guidelines.....	3
2.1	SAR Limits	4
3.0	Description of Device Under Test (DUT)	4
4.0	Description of Test System	5
4.1	Description of Robotics/Probes/Readout Electronics	5
4.2	Description of Phantom(s).....	6
4.2.1	Flat Phantom.....	6
4.2.2	SAM Phantom	6
4.2.3	Elliptical Phantom.....	6
4.3	Description of Equivalent Tissues	6
5.0	Additional Test Equipment.....	7
6.0	SAR Measurement System Verification.....	7
6.1	Equivalent Tissue Test results	8
6.2	System Check Test results	8
7.0	DUT Test Strategy and Methodology	9
7.1	DUT Configuration(s)	9
7.2	Device Positioning Procedures.....	10
7.2.1	Body	10
7.2.2	Head	10
7.2.3	Face	10
8.0	Environmental Test Conditions.....	10
9.0	Test Results Summary.....	11
9.1	Highest SAR results calculation methodology	17
10.0	Conclusion.....	17

APPENDICES

A	Measurement Uncertainty	18
B	Probe Calibration Certificates	21

Part 2 of 2

C	Dipole Calibration Certificates.....	2
D	Test System Verification Scans.....	9
E	DUT Scans (Shortened Scans and Highest SAR configurations).....	21
F	DUT Supplementary Data (e.g. Power Slump)	35
G	DUT Test Position Photos	36
H	DUT and Body-worn Accessory Photos	37
I	DUT Antenna Separation Distances and Offered Accessory Test Status	38

Report Revision History

Date	Revision	Comments
12/22/08	O	Initial release
1/20/09	A	Revised the report to address the comments from FCC.
2/12/09	B	Revised the report to address additional comments from FCC (received 2/5/09)

1.0 Introduction and Overview

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the G&PS EME Test Lab for the model number PMUD2444AAN FCC ID: AZ489FT3822. The results herein reflect final pilot test results.

2.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1*(2005) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 2.1093 sub-part J:1999
- Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- IEEE 1528*, 2003 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- American National Standards Institute (ANSI) / Institute of Electrical and Electronic Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronic Engineers (IEEE) C95.1-2005 Edition
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6. Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz, 1999
- Australian Communications Authority Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9KHz and 300 GHz." and "Attachment to resolution # 303 from July 2, 2002"
- Draft of IEC62209-2 Ed.1: Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices – Human models, Instrumentation, and Procedures Part 2: Procedure to determine the specific absorption rate (SAR) for mobile wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz), revised on Oct 3, 2008.

* The IEC62209-1 and IEEE1528 are applicable for hand-held devices used in close proximity to the ear only.

2.1 SAR Limits

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.60	8.0
Spatial Peak – ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Localized SAR - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

3.0 Description of Device Under Test (DUT)

FCC ID: AZ489FT3822, operates using frequency modulation (FM) incorporating traditional simplex two-way radio transmission protocol. The radio model PMUD2444AAN utilizes removable antennas and is capable of transmitting in the 136-174 MHz band. The nominal output power is 5.0 Watts with maximum output powers of 6.0 Watts as defined by upper limit of the production line final test station. The intended operating positions are “at the face” with the DUT 1 to 2 inches from the mouth, and “at the body” by means of the offered body-worn accessories. Body-worn audio and PTT operation is accomplished by means of optional remote accessories that connect to the radio.

This device will be marketed to and used by employees solely for occupational operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of the agencies, which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user’s manual, instruction sessions or other means. Motorola also makes available to its customers training classes on the proper use of the two-way radios.

FCC ID: AZ489FT3822 is offered with the options and accessories listed below.

Audio Accessories:

- PMLN4442A Earbud with in-Line Mic/PTT/VOX Switch (MagOne)
- PMLN4443A Ear Receiver with in-Line Mic/PTT/VOX Switch (MagOne)
- PMLN4444A Earset with Boom Mic and in-Line PTT/VOX Switch (MagOne)
- PMLN4445A Ultra-Light Headset with Boom Mic and PTT/VOX Switch (MagOne)
- PMMN4008A Remote Speaker Microphone (MagOne)
- HMN9013B Lightweight Single Muff Adjustable Headset with Swivel Boom Microphone
- HMN9754D 2 Piece Surveillance kit with Microphone and PTT combined, Beige (2-wire – rubber eartip style)
- PMLN4606A 2 wire earpiece with clear acoustic tube (consisting of PMLN4605A & PMLN4294D)
- PMLN5003A Retail Temple Transducer Headset
- PMMN4001A Earset with Mic and PTT
- PMMN4029A Remote Speaker Microphone with IP57
- PMMN4013A Remote Speaker Microphone with Ear Jack
- RLN4941A Receive only Earpiece with Translucent Tube

AARLN4885B	Receive only Earbud (for PMMN4013A Remote Speaker Microphone)
WADN4190B	Receive only Flexible Earpiece (for PMMN4013A Remote Speaker Microphone)
PMLN4620A	Receive only D-Style Earpiece (for PMMN4013A Remote Speaker Microphone)
PMLN5001A	D-style Earpiece with Mic/PTT
RLN6230A	High Noise kit (Includes Foam Earplugs with Acoustic Tube) (Black)
RLN6231A	High Noise kit (Includes Foam Earplugs with Acoustic Tube) (Beige)
RLN6232A	Low Noise kit (Includes Rubber Tips with Acoustic Tube) (Black)
RLN6241A	Low Noise kit (Includes Rubber Tips with Acoustic Tube) (Beige)
RLN6242A	Quick Disconnect Acoustic Tube Accessory

Test Output Power

A table of the characteristic power slump versus time is provided in Appendix F.

4.0 Description of Test System



4.1 Descriptions of Robotics/probes/Readout Electronics

The laboratory utilizes a Dosimetric Assessment System (DASY4™) SAR measurement system Version 4.7 build 71 manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. The test system consists of a Stäubli RX90L robot, DAE4, and ES3DV3 E-field probe. Please reference the SPEAG user manual and application notes for detailed probe, robot, and SAR computational procedures. Section 5.0 presents relevant test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

4.2 Description of Phantom(s)

4.2.1 Rectangular Flat Phantom

Not Applicable

4.2.2 SAM Phantom

Not Applicable

4.2.3 Elliptical Flat Phantom

Phantom ID	Material Parameters	Phantom Dimensions LxWxD (mm)	Material Thickness (mm)	Support structure material	Loss Tangent (wood)
ELI4 1028	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = <0.05	600x400x190	2mm +/- 0.2mm	Wood	< 0.05
ELI4 1037	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = <0.05	600x400x190	2mm +/- 0.2mm	Wood	< 0.05

4.3 Description of Equivalent tissues

Type of Simulated Tissue

The simulated tissue used is compliant to that specified in FCC Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01) and IEEE 1528, 2003 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques". The simulated tissue used is also compliant to that specified in IEC62209-1 (2005) and adopted by CENELEC as EN62209-1 (2006).

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. For Diacetin and similar type simulates, sugar and HEC ingredients are not needed. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

Simulated Tissue Composition

% of listed ingredients	150MHz/ 300MHz	
	Head	Body
Sugar	56.0	47.1
Diacetin	NA	NA
De ionized -Water	37.5	49.48
Salt	5.4	2.32
HEC	1.0	1.0
Bact.	0.1	0.1

Reference section 6.1 for target parameters

5.0 Additional Test Equipment

Equipment Type	Model Number	Serial Number	Calibration Due Date
Power Meter	E4418B	MY45100739	5/28/2009
Power Sensor	8481B	MY41091243	5/28/2009
Power Meter	E4418B	MY45100911	5/28/2009
Power Sensor	8481B	SG41090258	5/28/2009
Signal Generator	E4438C	MY45091270	5/29/2010
Amplifier	10W1000C	312858	CNR
NARDA Bi-Directional	3020A	41931	8/13/2009
Thermometer	HH806AU	080307	7/19/2009
Them. probe	80PK-22	9135	5/22/2009
Dickson Temp & RH Data	TM320	06153216	5/16/2009
Network Analyzer (HP)	E5071B	MY42403147	8/26/2010
Dielectric Probe Kit (HP)	85070E	MY44300183	CNR
Speag Dipole	D300V3	1003	12/15/2009

6.0 SAR Measurement System Verification

The SAR measurements were conducted with probe model/serial number ES3DV3/SN3122. The system performance check was conducted daily and within 24 hours prior to testing. DASY output files of the probe/dipole calibration certificates and system performance test results are included in appendices B, C, D respectively. The table below summarizes the system performance check results normalized to 1W.

Dipole validation scans using head tissue equivalent medium are provided in APPENDIX D. The G&PS EME lab validated the dipole to the applicable IEEE system performance targets. Within the same day system validation was performed using FCC body tissue parameters to generate the system performance target values for body at the applicable frequency. The results of the G&PS EME system performance validation are provided herein.

6.1 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 5.0.

Tissue Target Tolerances

FCC Body				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target (S/m)	Conductivity Meas. (Range) (S/m)
155	61.8 +/- 5%	60.9-61.5	0.80 +/- 5%	0.79-0.83
300	58.2 +/- 5%	57.7 -58.5	0.92 +/- 5%	0.88-0.92

IEEE/IEC Head				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target (S/m)	Conductivity Meas. (Range) (S/m)
155	52.1 +/- 5%	52.2-53.0	0.76 +/- 5%	0.73-0.75
300	45.3 +/- 5%	45.8-46.7	0.87 +/- 5%	0.85-0.87

6.2 System Check Test Results

Probe Serial #	Tissue Type	Probe Cal Date	Dipole Kit / Serial #	Reference SAR @ 1W (mW/g)	System Check Test Results when normalized to 1W (mW/g)	Test Date(s)
3122	FCC Body	5/15/08	SPEAG D300V3 /1003	2.72 +/- 10%	2.67-2.77	12/9-12/12, 12/15 (5 test days)
3122	IEEE Head	5/15/08	SPEAG D300V3 /1003	2.69 +/- 10%	2.69-2.74	12/13-12/14, 12/16, 12/18 (4 test days)

Note: See APPENDIX D for an explanation of the reference SAR targets stated above.
(System performance results reflects the median performance +/- ½ of the test date(s) performance ranges)

The DASY4™ system is operated per the instructions in the DASY4™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess EME SAR compliance was calibrated according to 17025 A2LA guidelines.

7.0 DUT Test Strategy and Methodology

7.1 DUT Configuration(s)

The DUT is a portable device with FM transmission signaling operational at the body and face using the offered accessories. The device is placed in the test positions presented in Appendix G.

Test Plan

All options and accessories listed on the cover page of this report were considered in order to develop the SAR test plan for this product. SAR measurements were performed using an elliptical flat phantom with the applicable simulated tissue to assess performance at the body and face respectively using the relevant transmission modes.

Note that a Coarse-to-Cube approximation methodology (applicable between 136-2484 MHz) was utilized to determine the worst-case SAR performance configuration for each applicable body location. The test configurations that produced the highest SAR results for each body position using the coarse-to-cube approximation methodology were assessed using the full DASY4™ coarse and 5x5x7 zoom scans. The “Coarse-to-Cube approximation methodology” is also known as the “Motorola Fast SAR I” which implements in the DASY4 software system. This algorithm is described in the Motorola publication (M.Y. Kanda, M.G. Douglas, E. Mendivil, M. Ballen, A.V. Gessner, C.K. Chou, “Faster Determination of Mass-Averaged SAR from 2-D Area Scans,” *IEEE Transactions on Microwave Theory and Techniques*, vol. 52, no. 8, pp. 2013 – 2020, August, 2004.).

Assessments at the Body (CW mode) [Page 11, 12 & 13 of 31; Table 1]

- Assessment of each offered antennas at their respective center frequencies per range.
- Assessment of each offered batteries with the worst case antenna from above.
- Assessment of the offered body worn accessories with the worst case configuration from above.
- Assessment of the offered audio accessories with the worst case configuration from above.
- Assessment of each offered antenna’s frequency band edges using the worst case configuration from above.

Assessments at the Body 2.5cm [Page 13 of 31; Table 1]

- Assessment with the DUT’s back facing phantom and the radio’s antenna at 2.5cm from the phantom, without the body worn accessory, using the highest test configuration for each antenna from the applicable Body assessment above.
- Assessment with the DUT’s front separated 2.5cm from the phantom without a body worn accessory using the highest test configuration for each antenna from the applicable Body assessment above.

Assessments at the Face (CW mode)] [Page 14, 15 of 31; Table 2]

- Assessment of each offered antennas at their respective center frequencies per range.
- Assessment of each offered batteries using the worst case antenna from above.
- Assessment of each offered antenna's frequency band edges using the worst case configuration from above.

Shortened scan assessment [Page 15 of 31; Table 3]

- A "shortened" scan was performed using the offered battery and test configuration that produced the highest SAR results overall. Note that the shortened scan is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a cube scan only was performed. The shortened scan represents the cube scan performance results.

7.2 Device Positioning Procedures

Reference Appendix G for photos of the DUT tested positions.

7.2.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory.

The DUT was positioned with its' front side separated 2.5cm and the back side with antenna separated 2.5cm from the phantom.

7.2.2 Head

Not applicable.

7.2.3 Face

The DUT was positioned with its' front side separated 2.5cm from the phantom.

8.0 Environmental Test Conditions

The EME Laboratory ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within $\pm 2^{\circ}\text{C}$ of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the SAR tests reported herein:

	Target	Measured
Ambient Temperature	18 - 25 °C	Range: 22.2-22.7°C Avg. 22.40°C
Relative Humidity	30 - 70 %	Range: 47.6-62.9% Avg. 53.54%
Tissue Temperature	NA	Range: 20.7-21.5°C Avg. 21.1 °C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

9.0 Test Results Summary

All SAR results obtained by the tests described in Section 7.1 are listed below. As noted in section 7.1, a coarse-to-cube approximation methodology, was utilized to ascertain the worst case test configuration for each body location per band (in bold with *). The worst case test configurations observed for each body location were assessed using the full DASY4™ coarse and 5x5x7 zoom methodology and they are summarized in the worst case table below. The associated SAR plots are provided in APPENDIX E. Appendix E also presents shortened SAR cube scans to assess the validity of the calculated results presented herein.

Note1: The results of the shortened cube scans presented in Appendix E demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid.

Note2: There are “Motorola Fast SAR” plots also added to the Appendix E to include the highest SAR test configuration for other antennas, and the test configuration indicated lowest SAR result observed within the audio accessory search section.

Table 1

Assessments at Body												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment of offered antennas												
CcC-AB-081216-07/ 1338JX0810	NAD6502AR	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	6.030	-0.332	0.558	0.394	0.30	0.21
Vee-AB-081209-10/ 1338JX0810	NAD6579A	154.500	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	6.100	-0.199	1.700	1.130	0.89	0.59
Vee-AB-081209-11/ 1338JX0810	PMAD4012A	145.500	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	6.250	-0.395	1.090	0.764	0.60	0.42
Vee-AB-081209-12/ 1338JX0810	PMAD4013A	164.500	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	5.880	-0.459	1.130	0.810	0.64	0.46
Vee-AB-081209-13/ 1338JX0810	PMAD4014A	145.500	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	6.260	-0.154	1.740	1.210	0.90	0.63
Vee-AB-081209-14/ 1338JX0810	PMAD4015A	164.500	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	5.920	-0.488	1.330	0.956	0.75	0.54
Vee-AB-081209-15/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	6.280	-0.691	1.990	1.380	1.17	0.81
Vee-AB-081209-16/ 1338JX0810	HAD9338BR	149.000	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	6.210	-0.0525	1.340	0.924	0.68	0.47
Vee-AB-081209-17/ 1338JX0810	HAD9742A	154.000	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	6.240	-0.156	1.010	0.733	0.52	0.38
Vee-AB-081209-18/ 1338JX0810	HAD9743A	168.000	PMNN4081A	Against phantom	HLN9844A	PMMN4008A	5.770	-0.759	0.354	0.258	0.22	0.16
Assessment of offered batteries with the worst case configuration from above												
Vee-AB-081209-19/ 1338JX0810	PMAD4049A	160.000	PMNN4082A	Against phantom	HLN9844A	PMMN4008A	5.920	-0.649	1.550	1.110	0.91	0.65
Vee-AB-081209-20/ 1338JX0810	PMAD4049A	160.000	PMNN4080A	Against phantom	HLN9844A	PMMN4008A	6.230	-0.688	1.520	1.120	0.89	0.66
Assessment of offered body worn accessory with the worst case configuration from above												
CcC-AB-081210-02/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	PMLN5334A w/ HLN9844A	PMMN4008A	6.200	-0.616	1.630	1.140	0.94	0.66
Assessment of offered audio accessories with the worst case configuration from above												
CcC-AB-081210-03/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4013A	6.190	-0.639	3.060	2.120	1.77	1.23
CcC-AB-081210-04/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4013A w/AARLN48 85B	6.240	-0.610	3.560	2.410	2.05	1.39
CcC-AB-081210-05/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4013A w/RLN4941A	6.230	-0.512	3.650	2.520	2.05	1.42
CcC-AB-081210-06/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4029A	6.200	-0.613	3.110	2.150	1.79	1.24
CcC-AB-081210-07/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMLN4443A	6.280	-0.634	3.240	2.250	1.87	1.30
CcC-AB-081210-08/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMLN4444A	6.250	-0.476	4.370	2.960	2.44	1.65

Table 1 (continued)

Assessments at Body												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment of offered audio accessories with the worst case configuration from above												
CcC-AB-081210-09/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMLN4445A	6.230	-0.512	4.250	2.900	2.39	1.63
CcC-AB-081210-10/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMLN4606A	6.290	-0.785	2.190	1.540	1.31	0.92
CcC-AB-081210-11/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.230	-0.455	4.600	3.070	2.55	1.70
CcC-AB-081210-12/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMLN5001A	6.280	-0.549	1.370	0.939	0.78	0.53
CcC-AB-081210-13/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	PMLN5003A	6.270	-0.543	3.660	2.520	2.07	1.43
CcC-AB-081210-14/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	HMN9013B	6.240	-0.682	3.330	2.260	1.95	1.32
CcC-AB-081210-15/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	HMN9754D	6.270	-0.681	2.580	1.790	1.51	1.05
CcC-AB-081210-16/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Against phantom	HLN9844A	HMN9754D w/RLN6230A	6.240	-0.550	3.550	2.420	2.01	1.37
Assessment across the freq. band for each antenna with the worst case configuration from above												
CcC-AB-081210-17/ 1338JX0810	PMAD4049A	146.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.240	-0.273	2.360	1.560	1.26	0.83
Vee-AB-081210-18/ 1338JX0810	PMAD4049A	174.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.240	-0.456	1.010	0.693	0.56	0.38
CcC-AB-081216-08/ 1338JX0810	NAD6502AR	146.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.060	-0.438	3.110	2.070	1.72	1.14
CcC-AB-081216-09/ 1338JX0810	NAD6502AR	160.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.100	-0.454	1.510	1.020	0.84	0.57
Vee-AB-081210-21/ 1338JX0810	NAD6502AR	174.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.260	-0.421	0.485	0.334	0.27	0.18
Vee-AB-081210-22/ 1338JX0810	NAD6579A	148.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.240	-0.0456	0.662	0.456	0.33	0.23
Vee-AB-081210-23/ 1338JX0810	NAD6579A	154.500	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.190	0.155	1.160	0.776	0.58	0.39
Vee-AB-081210-24/ 1338JX0810	NAD6579A	161.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.230	-0.264	1.140	0.772	0.61	0.41
Vee-AB-081210-25/ 1338JX0810	PMAD4012A	136.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.200	0.352	0.392	0.270	0.20	0.14
Vee-AB-081210-26/ 1338JX0810	PMAD4012A	145.500	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.240	-0.538	0.788	0.556	0.45	0.31
Vee-AB-081210-27/ 1338JX0810	PMAD4012A	155.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.200	-0.559	0.742	0.496	0.42	0.28
Vee-AB-081210-28/ 1338JX0810	PMAD4013A	155.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.180	-0.199	0.782	0.524	0.41	0.27
Vee-AB-081210-29/ 1338JX0810	PMAD4013A	164.500	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	5.890	0.169	3.670	2.490	1.87	1.27
Vee-AB-081210-30/ 1338JX0810	PMAD4013A	174.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.110	-0.815	1.510	1.050	0.91	0.63
PL-AB-081211-02/ 1338JX0810	PMAD4014A	136.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.050	0.210	1.850	1.190	0.93	0.60
PL-AB-081211-03/ 1338JX0810	PMAD4014A	145.500	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.120	-0.302	4.900	3.050	2.63	1.63
PL-AB-081211-04/ 1338JX0810	PMAD4014A	155.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.060	-0.587	2.850	1.810	1.63	1.04
PL-AB-081211-05/ 1338JX0810	PMAD4015A	155.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.010	-0.297	2.250	1.440	1.20	0.77
*PL-AB-081211-06/ 1338JX0810	PMAD4015A	164.500	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	5.800	-0.453	5.560	3.750	3.19	2.15
PL-AB-081211-07/ 1338JX0810	PMAD4015A	174.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.170	-0.489	2.360	1.550	1.32	0.87

Table 1 (continued)

Assessments at Body												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment across the freq. band for each offered antenna with the worst case configuration from above												
PL-AB-081211-08/ 1338JX0810	HAD9338BR	136.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.260	-0.249	2.290	1.410	1.21	0.75
PL-AB-081211-09/ 1338JX0810	HAD9338BR	149.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.070	-0.044	0.968	0.671	0.49	0.34
PL-AB-081211-10/ 1338JX0810	HAD9338BR	162.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	5.950	-0.264	0.793	0.528	0.42	0.28
PL-AB-081211-11/ 1338JX0810	HAD9742A	146.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.100	-0.102	1.620	1.040	0.83	0.53
PL-AB-081211-12/ 1338JX0810	HAD9742A	154.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.060	-0.196	1.870	1.160	0.98	0.61
PL-AB-081211-13/ 1338JX0810	HAD9742A	162.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.040	-0.537	0.699	0.461	0.40	0.26
PL-AB-081211-14/ 1338JX0810	HAD9743A	162.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.000	0.194	2.420	1.550	1.21	0.78
PL-AB-081211-15/ 1338JX0810	HAD9743A	168.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	5.710	-0.416	3.200	2.110	1.85	1.22
PL-AB-081211-16/ 1338JX0810	HAD9743A	174.000	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	6.200	-0.719	1.050	0.696	0.62	0.41
Assessment at 2.5cm												
CcC-AB-081211-17/ 1338JX0810	PMAD4013A	164.500	PMNN4081A	DUT Back - Antenna at 2.5cm	None	PMMN4001A	5.900	-0.186	4.040	3.020	2.14	1.60
CcC-AB-081211-19/ 1338JX0810	PMAD4013A	164.500	PMNN4081A	DUT Front - radio at 2.5cm	None	PMMN4001A	5.900	0.259	1.040	0.784	0.53	0.40
CcC-AB-081211-20/ 1338JX0810	PMAD4015	164.500	PMNN4081A	DUT Back - Antenna at 2.5cm	None	PMMN4001A	5.900	-0.441	4.110	3.080	2.31	1.73
CcC-AB-081211-22/ 1338JX0810	PMAD4015	164.500	PMNN4081A	DUT Front - radio at 2.5cm	None	PMMN4001A	5.970	-0.300	1.150	0.869	0.62	0.47
CcC-AB-081211-23/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	DUT Back - Antenna at 2.5cm	None	PMMN4001A	6.240	-0.397	3.210	2.380	1.76	1.30
CcC-AB-081211-25/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	DUT Front - radio at 2.5cm	None	PMMN4001A	6.280	-0.457	2.240	1.690	1.24	0.94
CcC-AB-081211-26/ 1338JX0810	HAD9338BR	136.000	PMNN4081A	DUT Back - Antenna at 2.5cm	None	PMMN4001A	6.200	-0.249	1.890	1.400	1.00	0.74
CcC-AB-081211-28/ 1338JX0810	HAD9338BR	136.000	PMNN4081A	DUT Front - radio at 2.5cm	None	PMMN4001A	6.260	-0.187	1.890	1.430	0.99	0.75
CcC-AB-081211-29/ 1338JX0810	NAD6579A	154.500	PMNN4081A	DUT Back - Antenna at 2.5cm	None	PMMN4008A	6.220	-0.379	1.180	0.893	0.64	0.49
CcC-AB-081211-31/ 1338JX0810	NAD6579A	154.500	PMNN4081A	DUT Front - radio at 2.5cm	None	PMMN4008A	6.150	-0.678	1.640	1.240	0.96	0.72

Table 2

Assessments at Face												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment of offered antennas												
CcC-Face-081216-02/ 1338JX0810	NAD6502AR	160.000	PMNN4081A	Front 2.5cm	None	None	6.020	-0.541	1.370	1.040	0.78	0.59
CcC-Face-081218-03/ 1338JX0810	NAD6579A	154.500	PMNN4081A	Front 2.5cm	None	None	5.970	0.0485	2.320	1.760	1.17	0.88
CcC-Face-081218-04/ 1338JX0810	PMAD4012A	145.500	PMNN4081A	Front 2.5cm	None	None	6.160	-0.0621	1.500	1.120	0.76	0.57
Vee-Face-081214-02/ 1338JX0810	PMAD4013A	164.500	PMNN4081A	Front 2.5cm	None	None	5.730	0.662	1.210	0.903	0.63	0.47
CcC-Face-081212-10/ 1338JX0810	PMAD4014A	145.500	PMNN4081A	Front 2.5cm	None	None	6.230	-0.154	1.970	1.490	1.02	0.77
CcC-Face-081212-11/ 1338JX0810	PMAD4015A	164.500	PMNN4081A	Front 2.5cm	None	None	5.920	0.108	2.220	1.680	1.13	0.85
CcC-Face-081212-12/ 1338JX0810	PMAD4049A	160.000	PMNN4081A	Front 2.5cm	None	None	6.200	-0.277	2.500	1.900	1.33	1.01
CcC-Face-081212-13/ 1338JX0810	HAD9338BR	149.000	PMNN4081A	Front 2.5cm	None	None	6.020	-0.193	2.530	1.910	1.32	1.00
CcC-Face-081212-14/ 1338JX0810	HAD9742A	154.000	PMNN4081A	Front 2.5cm	None	None	6.080	-0.414	2.050	1.530	1.13	0.84
CcC-Face-081212-15/ 1338JX0810	HAD9743A	168.000	PMNN4081A	Front 2.5cm	None	None	5.800	0.183	3.140	2.340	1.62	1.21
Assessment of offered batteries with the worst case configuration from above												
CcC-Face-081212-16/ 1338JX0810	HAD9743A	168.000	PMNN4082A	Front 2.5cm	None	None	5.430	-0.0211	2.840	2.120	1.58	1.18
*CcC-Face-081212-17/ 1338JX0810	HAD9743A	168.000	PMNN4080A	Front 2.5cm	None	None	5.740	0.355	3.130	2.340	1.64	1.22
Assessment across the freq. band for each offered antenna with the worst case configuration from above												
CcC-Face-081216-03/ 1338JX0810	NAD6502AR	146.000	PMNN4080A	Front 2.5cm	None	None	6.080	-0.370	1.200	0.906	0.65	0.49
CcC-Face-081216-04/ 1338JX0810	NAD6502AR	160.000	PMNN4080A	Front 2.5cm	None	None	6.170	-0.445	1.320	1.000	0.73	0.55
CcC-Face-081212-20/ 1338JX0810	NAD6502AR	174.000	PMNN4080A	Front 2.5cm	None	None	6.240	-0.302	0.383	0.289	0.21	0.15
CcC-Face-081212-21/ 1338JX0810	NAD6579A	148.000	PMNN4080A	Front 2.5cm	None	None	6.160	-0.252	2.900	2.210	1.54	1.17
CcC-Face-081212-22/ 1338JX0810	NAD6579A	154.500	PMNN4080A	Front 2.5cm	None	None	6.100	0.00482	2.300	1.740	1.15	0.87
CcC-Face-081212-23/ 1338JX0810	NAD6579A	161.000	PMNN4080A	Front 2.5cm	None	None	6.220	-0.220	1.200	0.913	0.63	0.48
PL-Face-081213-02/ 1338JX0810	PMAD4012A	136.000	PMNN4080A	Front 2.5cm	None	None	6.140	0.169	0.166	0.124	0.08	0.06
PL-Face-081213-03/ 1338JX0810	PMAD4012A	145.500	PMNN4080A	Front 2.5cm	None	None	6.110	0.134	1.700	1.270	0.85	0.64
PL-Face-081213-04/ 1338JX0810	PMAD4012A	155.000	PMNN4080A	Front 2.5cm	None	None	6.100	-0.573	0.936	0.701	0.53	0.40
PL-Face-081213-05/ 1338JX0810	PMAD4013A	155.000	PMNN4080A	Front 2.5cm	None	None	6.060	-0.07790	0.275	0.205	0.14	0.10
PL-Face-081213-06/ 1338JX0810	PMAD4013A	164.500	PMNN4080A	Front 2.5cm	None	None	5.750	0.404	1.250	0.938	0.65	0.49
PL-Face-081213-07/ 1338JX0810	PMAD4013A	174.000	PMNN4080A	Front 2.5cm	None	None	6.160	-0.706	1.420	1.070	0.84	0.63
PL-Face-081213-08/ 1338JX0810	PMAD4014A	136.000	PMNN4080A	Front 2.5cm	None	None	6.100	0.0561	0.431	0.327	0.22	0.16
PL-Face-081213-09/ 1338JX0810	PMAD4014A	145.500	PMNN4080A	Front 2.5cm	None	None	6.050	-0.174	1.910	1.450	0.99	0.75

Table 2 (continued)

Assessments at Face												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment across the freq. band for each offered antenna with the worst case configuration from above												
PL-Face-081213-10/ 1338JX0810	PMAD4014A	155.000	PMNN4080A	Front 2.5cm	None	None	6.100	0.0181	1.890	1.430	0.95	0.72
CcC-Face-081213-11/ 1338JX0810	PMAD4015A	155.000	PMNN4080A	Front 2.5cm	None	None	6.150	-0.296	0.636	0.481	0.34	0.26
CcC-Face-081213-12/ 1338JX0810	PMAD4015A	164.500	PMNN4080A	Front 2.5cm	None	None	5.850	0.0822	1.990	1.500	1.02	0.77
CcC-Face-081213-13/ 1338JX0810	PMAD4015A	174.000	PMNN4080A	Front 2.5cm	None	None	6.250	-0.325	2.190	1.650	1.18	0.89
CcC-Face-081213-14/ 1338JX0810	PMAD4049A	146.000	PMNN4080A	Front 2.5cm	None	None	6.090	-0.226	0.745	0.565	0.39	0.30
CcC-Face-081213-15/ 1338JX0810	PMAD4049A	160.000	PMNN4080A	Front 2.5cm	None	None	6.210	-0.300	2.500	1.890	1.34	1.01
CcC-Face-081213-16/ 1338JX0810	PMAD4049A	174.000	PMNN4080A	Front 2.5cm	None	None	6.190	-0.395	0.948	0.717	0.52	0.39
CcC-Face-081213-17/ 1338JX0810	HAD9338BR	136.000	PMNN4080A	Front 2.5cm	None	None	6.130	0.0227	0.613	0.466	0.31	0.23
CcC-Face-081213-18/ 1338JX0810	HAD9338BR	149.000	PMNN4080A	Front 2.5cm	None	None	6.120	-0.132	2.370	1.800	1.22	0.93
CcC-Face-081213-19/ 1338JX0810	HAD9338BR	162.000	PMNN4080A	Front 2.5cm	None	None	6.010	-0.156	0.670	0.508	0.35	0.26
CcC-Face-081213-20/ 1338JX0810	HAD9742A	146.000	PMNN4080A	Front 2.5cm	None	None	6.030	-0.102	0.649	0.485	0.33	0.25
CcC-Face-081213-21/ 1338JX0810	HAD9742A	154.000	PMNN4080A	Front 2.5cm	None	None	6.040	-0.239	1.980	1.480	1.05	0.78
CcC-Face-081213-22/ 1338JX0810	HAD9742A	162.000	PMNN4080A	Front 2.5cm	None	None	5.980	-0.661	0.642	0.477	0.38	0.28
CcC-Face-081213-23/ 1338JX0810	HAD9743A	162.000	PMNN4080A	Front 2.5cm	None	None	6.000	0.122	0.905	0.674	0.45	0.34
CcC-Face-081213-24/ 1338JX0810	HAD9743A	174.000	PMNN4080A	Front 2.5cm	None	None	6.260	-0.595	1.280	0.951	0.73	0.55

Table 3

*Worst case configuration per body and face location from above (including shortened scan) –using the DASY 4 full coarse and 5x5x7 cube scan measurements.												
Full Scan CcC-AB-081215-06 / 1338JX0810	PMAD4015A	164.500	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	5.800	-0.0184	6.070	3.430	3.15	1.78
Full Scan CcC-Face-081218-05 / 1338JX0810	HAD9743A	168.000	PMNN4080A	Front 2.5cm	None	None	5.700	0.304	2.980	2.150	1.57	1.13
Shorten Scan CcC-AB-081215-07 / 1338JX0810	PMAD4015A	164.500	PMNN4081A	Against phantom	HLN9844A	PMMN4001A	5.890	0.005490	6.220	3.460	3.17	1.76

9.1 Highest SAR results calculation methodology

The calculated maximum 1-gram and 10-gram averaged SAR results reported herein for the full DASY™ coarse and 5x5x7 cube measurements are determined by scaling the measured SAR to account for power leveling variations and power slump. For this device the Maximum Calculated 1-gram and 10-gram averaged peak SAR is calculated using the following formula:

Max. Calc. 1-g/10-g Avg. SAR = ((SAR meas. / (10^(Pdrift/10)))*(Pmax/Pint))* DC%

P_{max} = Maximum Power (W)

P_{int} = Initial Power (W);

Pdrift = DASY drift results (dB);

SAR_{meas.} = Measured 1-g/10-g Avg. SAR (mW/g)

DC % = Transmission mode duty cycle in % where applicable

50% duty cycle is applied for PTT operation.

Note: for conservative results, the followings are applied:

If Pint > Pmax, then Pmax/Pint = 1. If Pdrift is positive, then 10^(Pdrift/10) = 1.

10.0 Conclusion

The highest Operational Maximum Calculated 1-gram and 10-gram average SAR values found for FCC ID: AZ489FT3822 model PMUD2444AAN.

Max. Calc. : 1-g Avg. SAR: 3.17 W/kg (Body); 10-g Avg. SAR: 1.76 W/kg (Body)

Max. Calc. : 1-g Avg. SAR: 1.57 W/kg (Face); 10-g Avg. SAR: 1.13 W/kg (Face)

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of **8 W/kg** per the requirements of 47 CFR 2.1093(d).

Appendix A

Measurement Uncertainty

Table 1: Uncertainty Budget for Device Under Test: 30 – 3000 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i> = <i>f</i> (<i>d</i> , <i>k</i>)	<i>f</i>	<i>g</i>	<i>h</i> = <i>c</i> x <i>f</i> / <i>e</i>	<i>i</i> = <i>c</i> x <i>g</i> / <i>e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	10	N	1.00	1	1	10	10	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				14	13	960
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				27	27	

Table 2: Uncertainty Budget for System Validation: 30 – 3000 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i> = <i>f</i> (<i>d</i> , <i>k</i>)	<i>f</i>	<i>g</i>	<i>h</i> = <i>c</i> x <i>f</i> / <i>e</i>	<i>i</i> = <i>c</i> x <i>g</i> / <i>e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	10	N	1.00	1	1	10	10	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Dipole									
Dipole Axis to Liquid Distance	8, E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8, 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
Combined Standard Uncertainty			RSS				12	12	99999
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				24	23	

Notes for Tables 1 and 2

a) Column headings *a-k* are given for reference.

b) Tol. - tolerance in influence quantity.

c) Prob. Dist. – Probability distribution

d) N, R - normal, rectangular probability distributions

e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty

f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.g) *u_i* – SAR uncertaintyh) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Appendix B

Probe Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Motorola MY**

Certificate No: **ES3-3122_May08**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3122**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5, QA CAL-14.v3 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 15, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Fin Bornholt	R&D Director	

Issued: May 15, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **ES3-3122_May08**

Page 1 of 9

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3122

May 15, 2008

Probe ES3DV3

SN:3122

Manufactured:	July 11, 2006
Last calibrated:	April 24, 2007
Recalibrated:	May 15, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3122

May 15, 2008

DASY - Parameters of Probe: ES3DV3 SN:3122**Sensitivity in Free Space^A****Diode Compression^B**

NormX	1.31 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	94 mV
NormY	1.28 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95 mV
NormZ	1.43 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect**TSL 900 MHz Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	10.3	6.4
SAR _{be} [%]	With Correction Algorithm	0.6	0.5

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	8.7	5.1
SAR _{be} [%]	With Correction Algorithm	0.6	0.2

Sensor OffsetProbe Tip to Sensor Center **2.0 mm**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

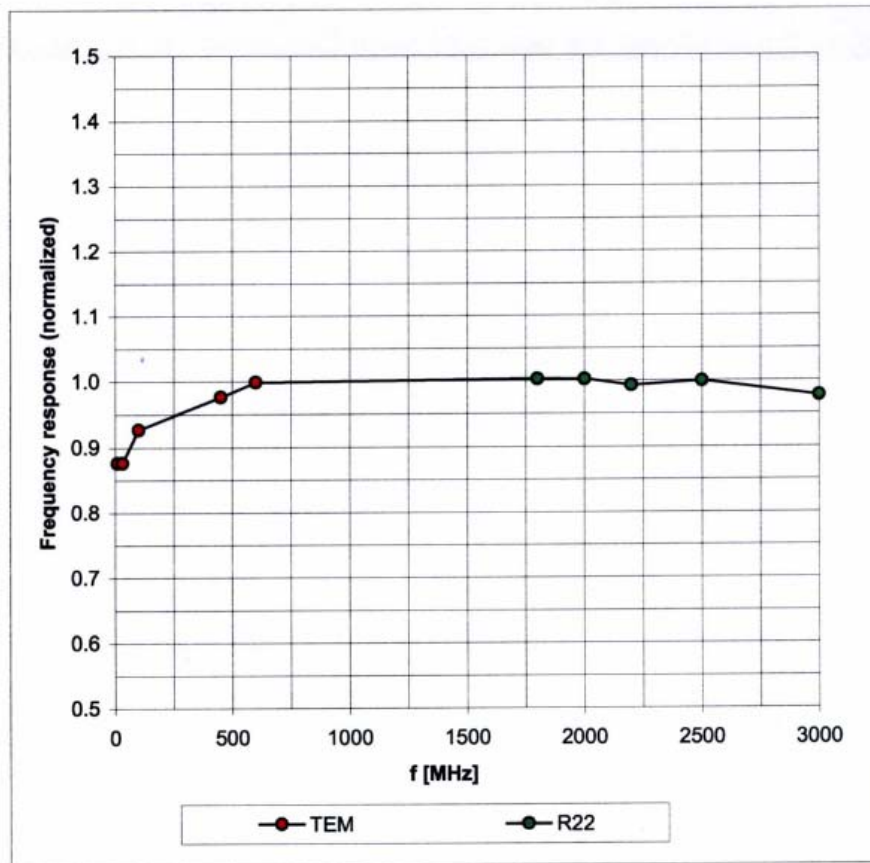
^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3122

May 15, 2008

Frequency Response of E-Field

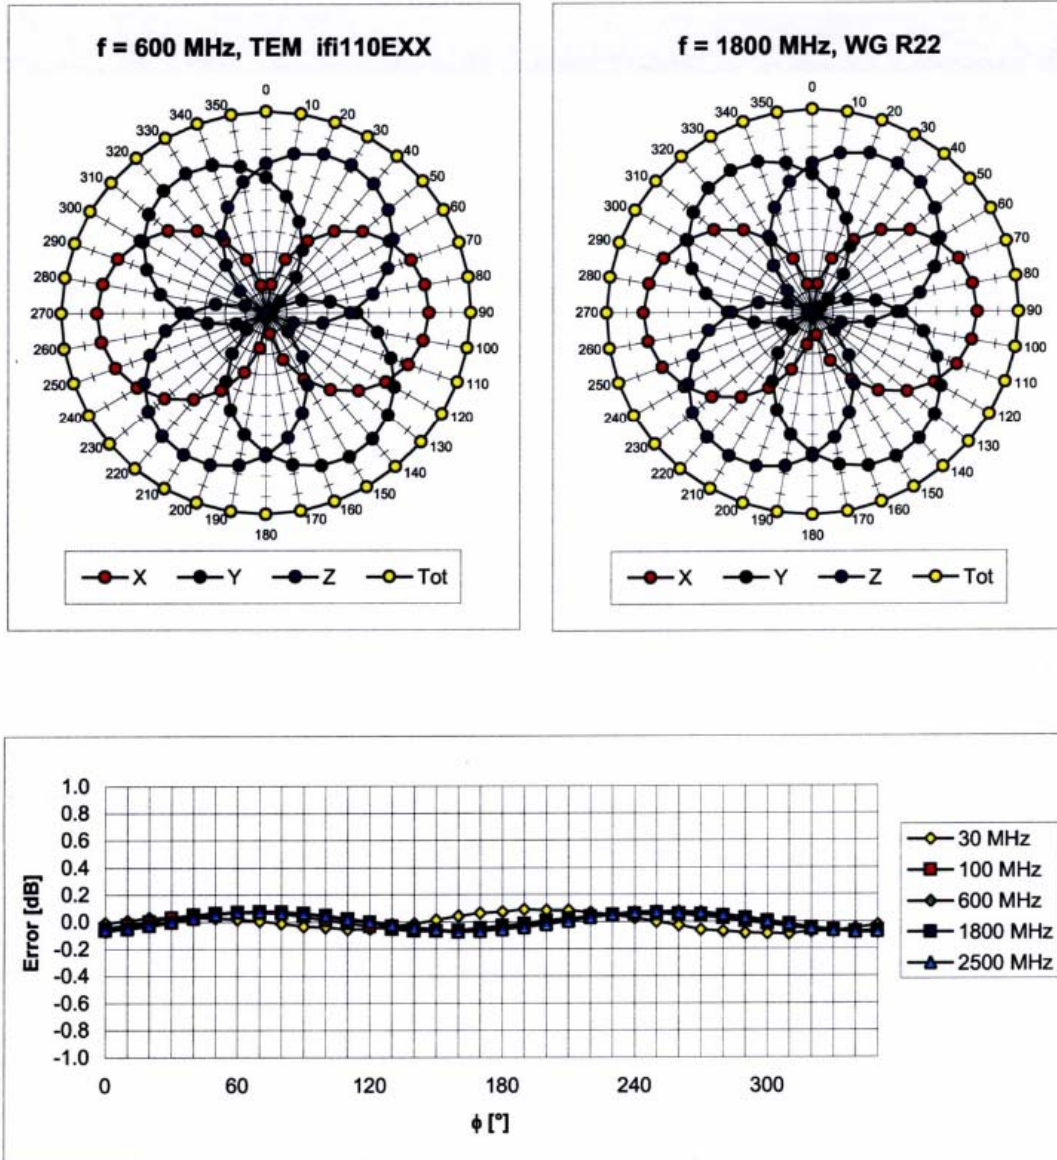
(TEM-Cell:ifi110 EXX, Waveguide: R22)

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3 SN:3122

May 15, 2008

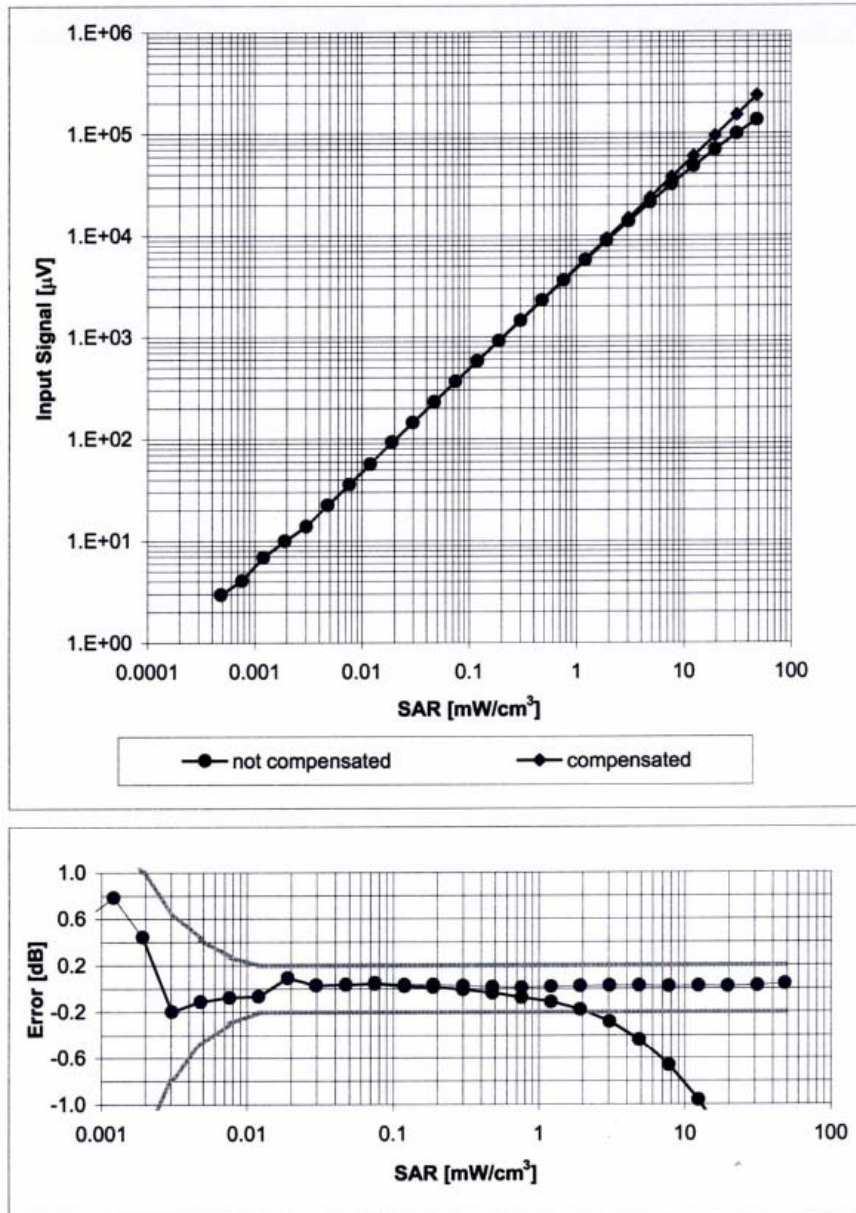
Receiving Pattern (ϕ), $\vartheta = 0^\circ$



ES3DV3 SN:3122

May 15, 2008

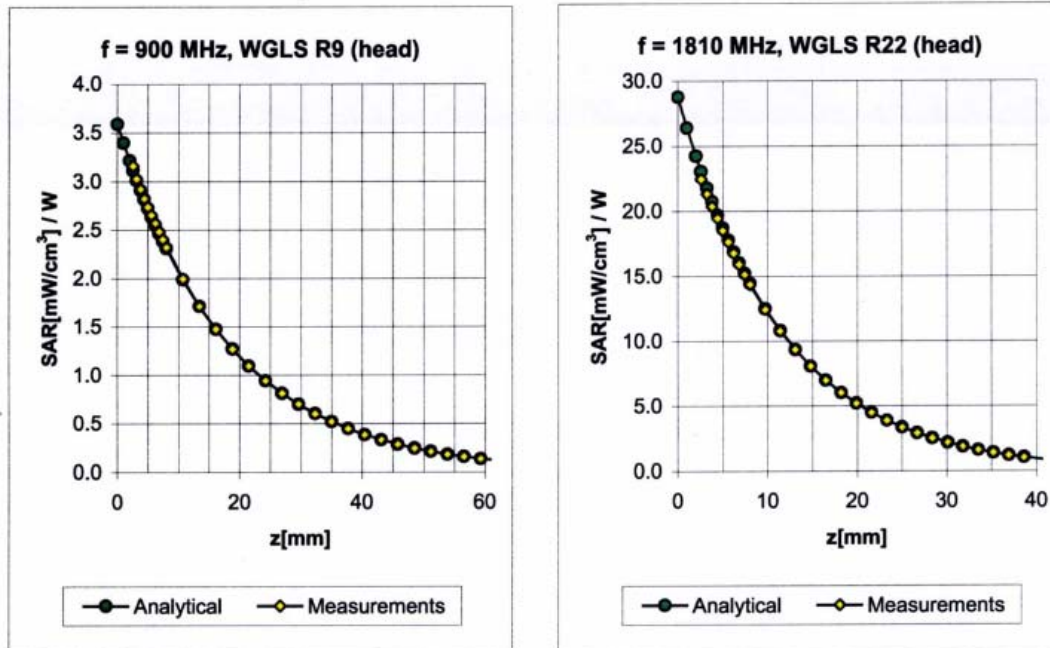
Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800$ MHz)

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ES3DV3 SN:3122

May 15, 2008

Conversion Factor Assessment



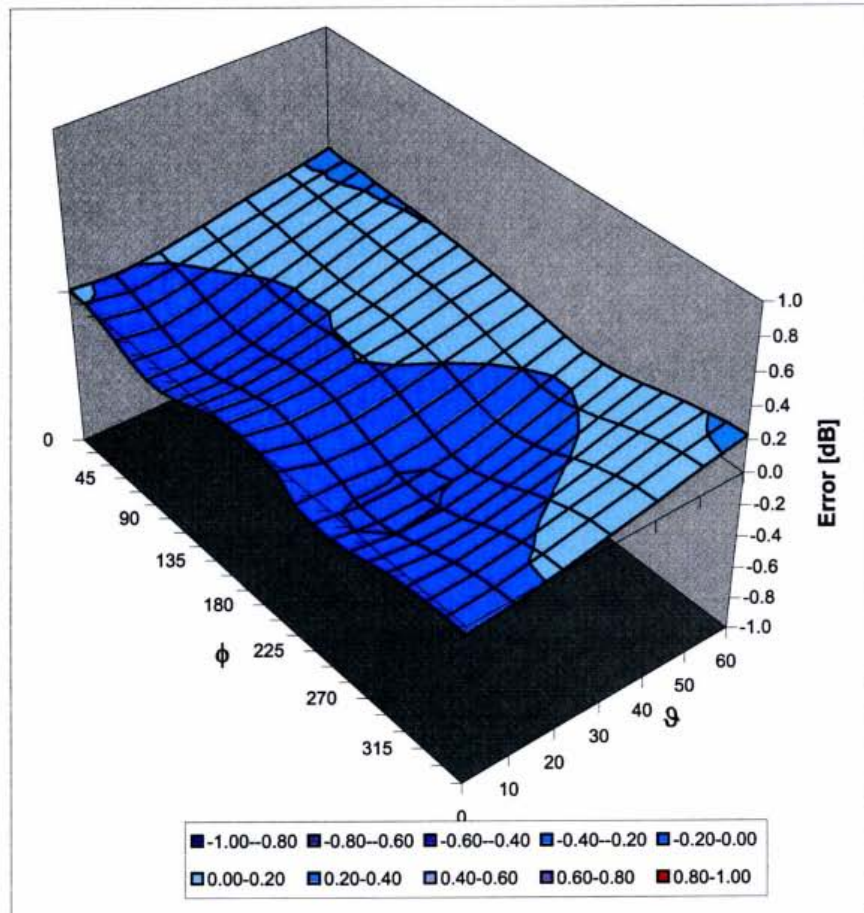
f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.31	1.41	6.35 ± 13.3% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.38	1.66	5.72 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.43	1.60	5.01 ± 11.0% (k=2)
2300	± 50 / ± 100	Head	39.4 ± 5%	1.71 ± 5%	0.47	1.58	4.70 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.47	1.58	4.51 ± 11.0% (k=2)
2600	± 50 / ± 100	Head	39.0 ± 5%	1.96 ± 5%	0.47	1.58	4.44 ± 11.0% (k=2)
3500	± 50 / ± 100	Head	37.9 ± 5%	2.91 ± 5%	0.80	1.35	4.22 ± 13.1% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.24	1.29	6.75 ± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.45	1.60	5.76 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.50	1.58	4.73 ± 11.0% (k=2)
2300	± 50 / ± 100	Body	52.8 ± 5%	1.85 ± 5%	0.55	1.58	4.28 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.50	1.58	4.10 ± 11.0% (k=2)
2600	± 50 / ± 100	Body	52.5 ± 5%	2.16 ± 5%	0.53	1.58	4.02 ± 11.0% (k=2)
3500	± 50 / ± 100	Body	51.3 ± 5%	3.31 ± 5%	0.80	1.49	3.47 ± 13.1% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3122

May 15, 2008

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHzUncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:

ES3DV3

Serial Number:

3122

Place of Assessment:

Zurich

Date of Assessment:

May 17, 2008

Probe Calibration Date:

May 15, 2008

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1810 MHz.

Assessed by:



Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Dosimetric E-Field Probe ES3DV3 SN:3122Conversion factor (\pm standard deviation)

150 MHz	<i>ConvF</i>	$7.8 \pm 10\%$	$\epsilon_r = 52.3$ $\sigma = 0.76 \text{ mho/m}$ (head tissue)
250 MHz	<i>ConvF</i>	$7.1 \pm 10\%$	$\epsilon_r = 47.6$ $\sigma = 0.83 \text{ mho/m}$ (head tissue)
300 MHz	<i>ConvF</i>	$7.0 \pm 9\%$	$\epsilon_r = 45.3$ $\sigma = 0.87 \text{ mho/m}$ (head tissue)
750 MHz	<i>ConvF</i>	$6.0 \pm 7\%$	$\epsilon_r = 41.9$ $\sigma = 0.89 \text{ mho/m}$ (head tissue)
150 MHz	<i>ConvF</i>	$7.5 \pm 10\%$	$\epsilon_r = 61.9$ $\sigma = 0.80 \text{ mho/m}$ (body tissue)
250 MHz	<i>ConvF</i>	$7.1 \pm 10\%$	$\epsilon_r = 59.4$ $\sigma = 0.88 \text{ mho/m}$ (body tissue)
300 MHz	<i>ConvF</i>	$7.0 \pm 9\%$	$\epsilon_r = 58.2$ $\sigma = 0.92 \text{ mho/m}$ (body tissue)
750 MHz	<i>ConvF</i>	$5.8 \pm 7\%$	$\epsilon_r = 55.5$ $\sigma = 0.96 \text{ mho/m}$ (body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also Section 4.7 of the DASY4 Manual.

ES3DV3-SN:3122

Page 2 of 2

May 17, 2008

Note: The standard deviation for each Conversion factor stated in above numerical assessments were taken at $k = 1$.