



DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 1 of 2

Motorola Solutions, Inc
EME Test Laboratory
 8000 West Sunrise Blvd
 Fort Lauderdale, FL. 33322

Date of Report: 10/15/2014
Report Revision: A

Responsible Engineer: Deanna Zakharia (EME Lab Senior Resource Manager, Laboratory Director)
Report Author: Jessica Zada (EME Engineer)
Date/s Tested: 08/28/14-08/30/14
Manufacturer/Location: Motorola Solutions, Inc, Penang
Sector/Group/Div.: EMS
Date submitted for test: 08/25/14
DUT Description: Handheld Portable 136-174MHz, 5W rated power, 6.25kHz/12.5kHz/25kHz, Capable of digital and analog FM transmission. Also capable of TDMA transmission.
Test TX mode(s): CW (PTT)
Max. Power output: 5.9W
Nominal Power: 5.0 W
Tx Frequency Bands: 136-174 MHz
Signaling type: TDMA
Model(s) Tested: H84KDD9PW5AN (MUD3305)
Model(s) Certified: H84KDD9PW5AN (MUD3305) & H84KDH9PW7AN (MUD3277)
Serial Number(s): 873TQR0184
Classification: Occupational/Controlled
FCC ID: AZ489FT3834; Rule Part 90 (150.8-173.4 MHz); Rule Part 80 (154-161.625MHz, 161.775-162.0375MHz)
IC : 109U-89FT3834; (138-144 MHz, 148-149.9 MHz and 150.05-174 MHz)

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of 47 CFR 2.1093(d). The 10 grams result is not applicable to FCC filing. The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz), Health Physics 74, 494-522 RF Exposure limits of 10 W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Deanna Zakharia
EME Lab Senior Resource Manager,
Laboratory Director
Approval Date: 10/15/2014

Certification Date: 9/30/2014

Certification No. L1140917P &
 L1140918P

Part 1 of 2

1.0 Introduction..... 4

2.0 FCC SAR Summary..... 4

3.0 Abbreviations / Definitions..... 4

4.0 Referenced Standards and Guidelines 4

5.0 SAR Limits 6

6.0 Description of Device Under Test (DUT) 6

7.0 Optional Accessories and Test Criteria..... 7

 7.1 Antenna..... 7

 7.2 Battery..... 7

 7.3 Body worn Accessory..... 7

 7.4 Audio cable Accessories..... 8

8.0 Description of Test System..... 11

 8.1 Descriptions of Robotics/Probes/Readout Electronics 11

 8.2 Description of Phantom(s)..... 12

 8.3 Description of Simulated Tissue..... 12

9.0 Additional Test Equipment..... 13

10.0 SAR Measurement System Validation and Verification 13

 10.1 System Validation..... 13

 10.2 System Verification 14

 10.3 Equivalent Tissue Test Results..... 14

11.0 Environmental Test Conditions 15

12.0 DUT Test Setup and Methodology..... 16

 12.1 Measurements..... 16

 12.2 DUT Configuration(s)..... 16

 12.3 DUT Positioning Procedures 16

 12.3.1 Body..... 17

 12.3.2 Head..... 17

 12.3.3 Face..... 17

 12.4 DUT Test Channels 17

 12.5 SAR Result Scaling Methodology..... 17

 12.6 DUT Test Plan 18

13.0 DUT Test Data..... 16

 13.1 Assessments at the Body 16

 Assessments at the Body with Body worn PMLN7008A 16

 Assessments at the Body with Body worn PMLN4651A 17

 Assessments at the Body with Body worn PMLN6085A 18

 Assessments at the Body with Body worn PMLN6085A w/NNTN5243A 19

 Assessments at the Body with other audio accessories 20

 Assessments outside FCC Part 90 at the Body 20

13.2 Assessments at the Face..... 20
 Assessments outside FCC Part 90 at the Face 21
 13.3 Assessments for Industry Canada 21
 13.4 Shortened Scan Assessment..... 22
 14.0 Simultaneous Transmission Exclusion 22
 15.0 Results Summary 22
 16.0 Variability Assessment 23
 17.0 System Uncertainty 25

APPENDICES

A Measurement Uncertainty Budget 24
 B Probe Calibration Certificates..... 26
 C Dipole Calibration Certificates 41

Report Revision History

Date	Revision	Comments
9/25/2014	O	Initial Release
10/15/2014	A	Added Rule Part 80, Fixed FCC Summary Table, Fixed Uncertainty Budget, Fixed Antenna Gain

1.0 Introduction

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the Motorola Solutions Inc. EME Test Laboratory for model number H84KDD9PW5AN (MUD3305). This device is classified as Occupational/Controlled.

2.0 FCC SAR Summary

TABLE 1

Equipment Class	Frequency band (MHz)	Max Calc at Body (W/Kg)		Max Calc at Face (W/Kg)		Max Calc at Head (W/Kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR	1g-SAR	10g-SAR
TNF	150.8-173.4	1.02	0.64	0.60	0.46	NA	NA
*Simultaneous Results		NA	NA	NA	NA	NA	NA

3.0 Abbreviations / Definitions

- CNR: Calibration Not Required
- EME: Electromagnetic Energy
- DUT: Device Under Test
- NA: Not Applicable
- PTT: Push to Talk
- SAR: Specific Absorption Rate
- RSM: Remote Speaker Microphone
- 4FSK: 4 Level Frequency Shift Keying
- TDMA: Time Division Multiple Access
- DSP: Digital Signal Processor
- TNF: Licensed Non-Broadcast Transmitter Held to Face

Audio accessories: These accessories allow communication while the DUT is worn on the body.

Body worn accessories: These accessories allow the DUT to be worn on the body of the user.

Maximum Power: Defined as the upper limit of the production line final test station.

4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1*(2005) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C.:1997.
- IEEE 1528*(2003), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronics Engineers (IEEE) C95.1-2005
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2009), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- Australian Communications Authority Radio communications (Electromagnetic Radiation - Human Exposure) Standard (2003)
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9 kHz and 300 GHz." and “Attachment to resolution # 303 from July 2, 2002”
- IEC62209-2 Edition 1.0 2010-03, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).
(*)The IEC62209-1 and IEEE 1528 are applicable for hand-held devices used in close proximity to the ear only.
- FCC KDB – 648474 D01 SAR Evaluation Considerations for Wireless Handsets
v01r02 (12/04/2013)
- FCC KDB – 643646 D01 SAR Test for PTT Radios v01r01 (04/04/2011)
- FCC KDB – 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r02 (12/05/2013)
D02 RF Exposure Reporting v01r01 (05/28/2013)
- FCC KDB – 447498 D01 General RF Exposure Guidance v05r01 (05/28/2013)

5.0 SAR Limits

TABLE 2

EXPOSURE LIMITS	SAR (W/Kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.6	8.0
Spatial Peak – ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Spatial Peak - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

6.0 Description of Device Under Test (DUT)

This portable device operates using frequency modulation (FM) and TDMA signals incorporating traditional simplex two-way radio transmission protocol.

Time Division Multiple Access (TDMA) is used to allocate portions of the RF signal by dividing time into two slots. Time allocation enables independent units to transmit voice information without interference from each other. Transmission from a unit or base station is accommodated in time-slot lengths of 30 milliseconds and frame lengths of 60 milliseconds. The 4FSK TDMA modulation technique requires sophisticated algorithms and a digital signal processor (DSP) to perform voice compressions/decompressions and RF modulation/demodulation. The maximum duty cycle for TDMA 1:2 is 50%.

This device operates in a half duplex system. A half duplex system only allows the user to transmit or receive. This device cannot transmit and receive simultaneously. The user must stop transmitting in order to receive a signal or listen for a response, regardless of PTT button or use of voice activated audio accessories. This type of operation, along with the RF safety booklet, which instructs the user to transmit no more than 50% of the time, justifies the use of 50% duty factor for this device.

The model represented under this filing utilizes removable antennas capable of transmitting in the 136-174 MHz band respectively. The nominal output powers are 5.0 W with maximum output powers of 5.9 W as defined by upper limit of the production line final test station.

The intended operating positions are “at the face” with the DUT at least 2.5cm inch from the mouth, and “at the body” by means of the offered body worn accessories. Body worn audio and PTT operation is accomplished by means of optional remote accessories that are connected to the radio.

7.0 Optional Accessories and Test Criteria

This device is offered with optional accessories. All accessories were individually evaluated during the test plan creation to determine if testing was required per the guidelines outlined in section 4.0 to assess compliance of this device. The following sections identify the test criteria and details for each accessory category.

7.1 Antennas

There is one antenna offered for this product. The table below lists its description.

TABLE 3

Antenna Models	Description	Selected for test	Tested
NAR6593A	Antenna VHF/GPS, 136-174 MHz, ¼ wave, -7.0 dBi gain	Yes	Yes

7.2 Battery

There are three batteries offered for this product. The table below lists their descriptions.

TABLE 4

Battery Model	Description	Selected for test	Tested	Comments
PMNN4424AR	Li-Ion 2300mAh Non FM Battery	Yes	Yes	
NNTN8128B	Li-Ion 1900 mAh Non FM Battery	Yes	Yes	
PMNN4448AR	Li-Ion 2700mAh	Yes	Yes	

7.3 Body worn Accessories

All body worn accessories were considered. The table below lists the body worn accessories, and body worn accessory descriptions.

TABLE 5

Body worn Models	Description	Selected for test	Tested	Comments
PMLN4651A	2" Belt Clip	Yes	Yes	
PMLN7008A	2.5" Belt Clip	Yes	Yes	
PMLN6085A	APX2000 Metal Carry Holder w/2.5 in Swivel Belt Loop	Yes	Yes	
NTN5243A	Carry Strap	Yes	Yes	

7.4 Audio Cable Accessories

All offered audio cable accessories were considered. The table below lists the audio cable accessories and their descriptions. Exhibit 7B illustrates photos of the tested audio accessories.

TABLE 6

Audio Acc. Models	Description	Selected for test	Tested	Comments
PMLN6130A	Impress 2 Wire with Translucent Tube, Beige	yes	yes	
NNTN7869A	Hirose Surveillance Keyload Adaptor	yes		Intended for test. Per KDB provisions, test not required. Tested with ZMN6031A or ZMN6032A
ZMN6031A	3 Wire Surveillance Kit- Beige	yes		Intended for test. Per KDB provisions, test not required. Tested with NNTN7869A
ZMN6032A	2 Wire Surveillance Kit- Beige	yes		Intended for test. Per KDB provisions, test not required. Tested with NNTN7869A
ZMN6038A	2 Wire Surveillance Kit- Beige	no		B/S ZMN6032A
ZMN6039A	3 Wire Surveillance Kit- Beige	no		B/S ZMN6031A
BDN6664A	1 Wire Earpiece with Standard Earphone, Beige	no		Receive Only
BDN6665A	1 Wire Extra Loud Earpiece with Standard Earphone, Beige	no		Receive Only
BDN6667A	2 Wire Earpiece with Microphone and PTT Combined, Beige	no		B/S BDN6729A
BDN6668A	3 Wire Earpiece with Microphone and PTT Separate, Beige	no		B/S BDN6730A
BDN6669A	2 Wire Extra Loud Earpiece with Microphone and PTT Combined, Beige	no		B/S BDN6729A
BDN6726A	1 Wire Earpiece with Standard Earphone, Black	no		Receive Only
BDN6727A	1 Wire Extra Loud Earpiece with Standard Earphone, Black	no		Receive Only
BDN6730A	3 Wire Earpiece with Microphone and PTT Separate, Black	yes		Intended for test. Per KDB provisions, test not required. Tested w/BDN6783A
BDN6731A	2 Wire Extra Loud Earpiece with Microphone and PTT Combined, Black	no		B/S BDN6729A
BDN6729A	2 Wire Earpiece with Microphone and PTT Combined, Black	yes		Intended for test. Per KDB provisions, test not required. Tested w/BDN6783A
PMLN6123A	Impress 3 Wire with Translucent Tube, Black	no		B/S PMLN5097A
PMLN6124A	Impress 3 Wire with Translucent Tube, Beige	no		B/S PMLN5097A
PMLN6127A	Impress 2 Wire Surveillance Kit- Black	no		B/S PMLN6130A
PMLN6128A	Impress 2 Wire Surveillance Kit- Beige	no		B/S PMLN6130A
PMLN6129A	Impress 2 Wire with Translucent Tube, Black	no		B/S PMLN6130A
RLN5886A	Low Noise Kit Tube	no		replacement parts
RLN5887A	High Noise Kit	no		replacement parts
PMLN6125A	1 Wire Surveillance Kit- Black	no		Receive Only
PMLN6126A	1 Wire Surveillance Kit- Beige	no		Receive Only
PMMN4040A	Impres IP57 Submersible Remote Speaker	yes		Intended for test. Per KDB

	Microphone			provisions, test not required.
PMMN4046A	Impres Speaker Microphone with Volume, IP57	yes		Intended for test. Per KDB provisions, test not required.

TABLE 6 (Continued)

Audio Acc. Models	Description	Selected for test	Tested	Comments
PMMN4050A	Impres Remote Speaker Mic, NC	yes		Intended for test. Per KDB provisions, test not required.
PMLN5102A	Core Ultra-Lite Headset	yes		Intended for test. Per KDB provisions, test not required.
PMLN5096B	Core Earset- D-Shell	yes		Intended for test. Per KDB provisions, test not required.
PMLN5653A	Impres Ear Microphone System	yes		Intended for test. Per KDB provisions, test not required.
HMN4101B	Display RSM	no		B/S HMN4104B
PMMN4062A	Large Plus Noise Cancelling RSM IP55 3.5mmJack RX Only	yes		
PMMN4065A	Standard Large IP57 RSM	yes		
PMMN4024A	Core RSM	yes		
PMMN4025A	Smart RSM	no		B/S PMMN4062A
RLN6424B	Receive Only Earpiece	no		B/S RMN5116A
PMMN4069A	APX Basic Smart RSM, IP55	no		B/S PMMN4062A
PMLN5101A	Impres Temple Transducer	yes		
PMLN5275C	Core H/D Headset	yes		
RMN5058A	Core L/W Headset	yes		
RMN5116A	Temple Transducer Headset	yes		tested with HMN4104B
AARLN4885B	3.5mm RX Only Earbud for Remote Speaker Microphone Short Coiled Cable	no		Receive Only
RLN4941A	3.5mm RX Only Earpiece with Translucent Tube-Short Coiled Cable	no		Receive Only
WADN4190B	3.5mm Ear Receiver with Coil Cable-Short	no		Receive Only
BDN6783B	3.5mm Audio Adaptor	yes		Tested with BDN6729A or BDN6730A
PMLN4620B	RX Only Earpiece	no		Receive Only

8.0 Description of Test System



8.1 Descriptions of Robotics/Probes/Readout Electronics

TABLE 7

Dosimetric System type	System version	DAE type	Probe Type
Schmid & Partner Engineering AG SPEAG DASY 5	52.8.7.1137	DAE4	ES3DV3 (E-Field)

The DASY5™ system is operated per the instructions in the DASY5™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess EME SAR compliance was calibrated according to ISO/IEC 17025 A2LA guidelines. Section 9.0 presents additional test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

8.2 Description of Phantom(s)

TABLE 8

Phantom type	Phantom ID (s)	Material Parameters	Phantom Dimensions LxWxD (mm)	Material Thickness (mm)	Support Structure Material	Loss Tangent (Wood)
Dual Flat	NA	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = ≤0.05	600x400x190	2mm +/- 0.2mm	Wood	< 0.05
SAM	NA					
Elliptical	OVAL 1016 OVAL 1090					

8.3 Description of Simulated Tissue

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. For Diacetin and similar type simulates, sugar and HEC ingredients are not needed. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

The simulated tissue mixture was mixed based on the Simulated Tissue Composition indicated in Table 9. During the daily testing of this product, the applicable mixture was used to measure the Di-electric parameters at each of the tested frequencies to verify that the Di-electric parameters were within the tolerance of the tissue specifications.

Simulated Tissue Composition (by mass)

TABLE 9

Ingredients	300 MHz	
	Head	Body
Sugar	56.0	47.1
Diacetin	0	0
De ionized – Water	37.5	49.48
Salt	5.4	2.32
HEC	1.0	1.0
Bacteria	0.1	0.1

9.0 Additional Test Equipment

The table below lists additional test equipment used during the SAR assessment.

TABLE 10

Equipment Type	Model Number	Serial Number	Calibration Date	Calibration Due Date
Power Meter (Agilent)	E4419B	MY50000505	9/4/2013	9/4/2014
Power Meter (HP)	E4418B	US39251267	1/27/2014	1/27/2015
Power Sensor (HP)	8481B	3318A10982	4/9/2014	4/9/2015
E-Series Avg. Power Sensor (Agilent)	E9301B	MY41495733	4/10/2014	4/10/2015
N-Series Avg. Power Sensor (Agilent)	E9301B	MY41495730	4/10/2014	4/10/2015
Bi-Directional Coupler (NARDA)	3020A	40296	1/31/2014	1/31/2016
Signal Generator (Agilent)	E4428C	MY47381119	6/7/2013	6/7/2015
Amplifier	10W1000	5924	CNR	CNR
Dickson Temperature Recorder	TM320	7081356	9/6/2013	9/6/2014
Omega Digital Thermometer with J Type TC Probe	HH200A	20857	10/23/2013	10/23/2014
Omega Digital Thermometer with J Type TC Probe	HH200A	48870	6/9/2014	6/9/2015
Omega Digital Thermometer with J Type TC Probe	HH202A	18800	3/3/2014	3/3/2015
Omega Digital Thermometer with J Type TC Probe	HH202A	18801	6/9/2014	6/9/2015
Omega Digital Thermometer with J Type TC Probe	HH202A	18812	6/19/2014	6/19/2015
Agilent PNA-L Network Analyzer	N5230C	MY49002155	8/4/2014	8/4/2015
Dielectric Probe Kit (DAK2)	DAK-3.5	1088	10/22/2013	10/22/2014
Dielectric Probe Kit (DAK2)	DAK-12	1040	10/22/2013	10/22/2014
Speag Dipole	CLA-150	4005	12/3/2013	12/3/2015
Speag Probe	ES3DV3	3163	5/15/2014	5/15/2015
Speag DAE	DAE4	1231	2/12/2014	2/12/2015

10.0 SAR Measurement System Validation and Verification

DASY output files of the probe/dipole calibration certificates and system performance test results are included in appendices B, C and D respectively.

10.1 System Validation

The SAR measurement system was validated according to the procedures in KDB 865664. The validation status summary table is below.

TABLE 11

Dates	Probe Calibration Point		Probe SN	Measured Tissue Parameters		Validation for CW		
				σ	ϵ_r	Sensitivity	Linearity	Isotropy
8/28/2014	Body	150	3163	0.83	60.0	Pass	Pass	Pass
8/29/2014	Body	150	3163	0.81	59.9	Pass	Pass	Pass
8/30/2014	Head	150	3163	0.76	54.0	Pass	Pass	Pass
8/30/2014	Body	150	3163	0.82	60.1	Pass	Pass	Pass

10.2 System Verification

System performance checks were conducted each day during the SAR assessment. The results are normalized to 1W. APPENDIX D includes DASY plots for each day during the SAR assessment. The table below summarizes the daily system check results used for the SAR assessment.

TABLE 12

Probe Serial #	Tissue Type	Dipole Kit / Serial #	Ref SAR @ 1W (W/kg)	System Check Results Measured (W/kg)	System Check Test Results when normalized to 1W (W/kg)	Tested Date
3163	FCC Body	SPEAG CLA-150/ 4005	*3.75 +/- 10%	3.99	3.99	08/28/14
				3.83	3.83	08/29/14
				3.86	3.86	08/30/14
	IEEE/IEC Head	SPEAG CLA-150/ 4005	*3.68 +/- 10%	3.80	3.80	8/30/2014

*Targets were set for 150MHz per the guidance in KDB 8865664 System verification options. Details results are available in Appendix J.

10.3 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 9.0. The table below summarizes the measured tissue parameters used for the SAR assessment.

TABLE 13

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Meas. (S/m)	Dielectric Constant Meas.	Tested Date
138	FCC Body	0.79 (0.75-0.83)	62.2 (59.1-65.3)	0.81	60.3	08/29/14
	IEEE/ IEC Head	0.75 (0.71-0.79)	52.9 (50.2- 55.5)	0.75	54.6	08/30/14
144.4	FCC Body	0.80 (0.76-0.84)	62.1 (58.9-65.2)	0.81	60.1	08/29/14
				0.82	60.3	08/30/14
	IEEE/ IEC Head	0.76 (0.72-0.79)	52.6 (49.9- 55.2)	0.75	54.3	08/30/14
150.8	FCC Body	0.80 (0.76-0.84)	61.9 (58.8-65.0)	0.83	60.0	08/28/14
				0.81	59.9	08/29/14
	IEEE/ IEC Head	0.76 (0.72-0.80)	52.3 (49.7- 54.9)	0.76	54.0	08/30/14

11.0 Environmental Test Conditions

The EME Laboratory’s ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the SAR tests reported herein:

TABLE 14

	Target	Measured
Ambient Temperature	18 – 25 °C	Range: 22.1 – 23.6°C Avg. 22.9 °C
Relative Humidity	30 – 70 %	Range: 55.6 – 62.9 % Avg. 58.2 %
Tissue Temperature	NA	Range: 22.5-23.0°C Avg. 22.7°C

Relative humidity target range is a recommended target

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

12.0 DUT Test Setup and Methodology

12.1 Measurements

SAR measurements were performed using the DASY system described in section 8.0 using zoom scans. Elliptical flat phantoms filled with applicable simulated tissue were used for body and face testing.

The table below includes the step sizes and resolution of area and zoom scans per KDB 865664 requirements.

TABLE 15

Description		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: ΔxArea, ΔyArea		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: ΔxZoom, ΔyZoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: ΔzZoom(n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

12.2 DUT Configuration(s)

The DUT is a portable device operational at the body and face as described in section 6.0 while using the applicable accessories listed in section 7.0. All accessories listed in section 7.0 of this report were considered when implementing the guidelines specified in KDB 643646.

12.3 DUT Positioning Procedures

The positioning of the device for each body location is described below and illustrated in APPENDIX H.

12.3.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory with the offered audio accessories as applicable.

12.3.2 Head

Not applicable.

12.3.3 Face

The DUT was positioned with its' front side separated 2.5cm from the phantom.

12.4 DUT Test Channels

The number of test channels was determined by using the following IEEE 1528 equation. The use of this equation produces the same or more test channels compared to the FCC KDB 447498 number of test channels formula.

$$N_c = 2 * \text{roundup}[10 * (f_{high} - f_{low}) / f_c] + 1$$

Where

N_c = Number of channels

F_{high} = Upper channel

F_{low} = Lower channel

F_c = Center channel

12.5 SAR Result Scaling Methodology

The calculated 1-gram and 10-gram averaged SAR results indicated as “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” in the data tables is determined by scaling the measured SAR to account for power leveling variations and power slump. A table and graph of output power versus time is provided in APPENDIX F. For this device the “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” are scaled using the following formula:

$$Max_Calc = SAR_meas \cdot 10^{\frac{-Drift}{10}} \cdot \frac{P_max}{P_int} \cdot DC$$

P_max = Maximum Power (W)

P_int = Initial Power (W)

Drift = DASY drift results (dB)

SAR_meas = Measured 1-g or 10-g Avg. SAR (W/kg)

DC = Transmission mode duty cycle in % where applicable

50% duty cycle is applied for PTT operation

Note: for conservative results, the following are applied:

If $P_int > P_max$, then $P_max/P_int = 1$.

Drift = 1 for positive drift

Additional SAR scaling was applied using the methodologies outlined in FCC KDB 865664 using tissue sensitivity values. SAR was scaled for conditions where the tissue permittivity was measured above the nominal target and for tissue conductivity that was measured below the nominal target. Negative or reduced SAR scaling is not permitted.

12.6 DUT Test Plan

The guidelines and requirements outlined from section 4.0 were used to assess compliance of this device. All modes of operation identified in section 6.0 were considered during the development of the test plan. All tests were performed in TDMA mode and then 50% duty cycle was applied respectively to the final results.

13.0 DUT Test Data

13.1 Assessments at the Body

The battery NNTN8128B was selected as the default battery for assessments at the Body because it is the thinnest battery (refer to Exhibit 7B for the illustration of the battery). The default battery was used during conducted power measurement for all test channels within Part 90 frequency range (150.8-173.4 MHz) which is listed in Table 16. SAR plots of the highest result per Table (bolded) are presented in Appendix E.

TABLE 16

Test Freq (MHz)	Power (W)
150.80	5.86
156.45	5.82
162.10	5.79
167.75	5.69
173.40	5.70

Assessments at the Body with Body-worn PMLN7008A

Assessment of the offered antenna with the default battery and optional body worn per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Testing of additional channels was not required per KDB 447498. All results are below 4.0 W/kg. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

TABLE 17

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6593A	NNTN8128B	PMLN7008A	PMLN6130A	150.80	5.90	-0.70	1.38	0.87	0.81	0.51	HvH-Ab-140828-10
				156.45							
				162.10							
				167.75							
				173.40							
Assessment of Additional Batteries											
NAR6593A	PMNN4424AR	PMLN7008A	PMLN6130A	150.80	5.82	-0.51	1.23	0.75	0.70	0.43	HvH-Ab-140828-11
				156.45							
				162.10							
				167.75							
				173.40							
	PMNN4448AR			150.80	5.90	-0.46	1.26	0.79	0.70	0.44	HvH-Ab-140828-12
				156.45							
				162.10							
				167.75							
				173.40							

Assessments at the Body with Body-worn PMLN4651A

Assessment of the offered antenna with the default battery and optional body worn per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Testing of additional channels was not required per KDB 447498. All results are below 4.0 W/kg. SAR plots of the highest result per Table (bolded) is presented in Appendix E.

TABLE 18

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6593A	NNTN8128B	PMLN4651A	PMLN6130A	150.80	5.82	-0.47	1.81	1.13	1.02	0.64	HvH-Ab-140829-02
				156.45							
				162.10							
				167.75							
				173.40							

TABLE 18 (Continued)

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Assessment of Additional Batteries											
NAR6593A	PMNN4424AR	PMLN4651A	PMLN6130A	150.80	5.82	-0.43	1.64	1.00	0.92	0.56	HvH-Ab-140829-03
				156.45							
				162.10							
				167.75							
				173.40							
	PMNN4448AR			150.80	5.90	-0.40	1.61	0.99	0.88	0.54	HvH-Ab-140829-04
				156.45							
				162.10							
				167.75							
				173.40							

Assessments at the Body with Body-worn PMLN6085A

Assessment of the offered antenna with the default battery and optional body worn per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Testing of additional channels was not required per KDB 447498. All results are below 4.0 W/kg. SAR plots of the highest result per Table (bolded) are presented in Appendix E.

TABLE 19

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6593A	NNTN8128B	PMLN6085A	PMLN6130A	150.80	5.90	-0.67	0.34	0.27	0.20	0.15	HvH-Ab-140829-05
				156.45							
				162.10							
				167.75							
				173.40							

TABLE 19 (Continued)

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Assessment of Additional Batteries											
NAR6593A	PMNN4424AR	PMLN6085A	PMLN6130A	150.80	5.83	-0.53	0.31	0.25	0.18	0.14	HvH-Ab-140829-06
				156.45							
				162.10							
				167.75							
				173.40							
	PMNN4448AR			150.80	5.90	-0.75	0.29	0.22	0.17	0.13	HvH-Ab-140829-07
				156.45							
				162.10							
				167.75							
				173.40							

Assessments at the Body with Body-worn PMLN6085A with NNTN5243A without loop

Assessment of the offered antenna with the default battery and optional body worn per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Testing of additional channels was not required per KDB 447498. All results are below 4.0 W/kg. SAR plots of the highest result per Table (bolded) is presented in Appendix E.

TABLE 20

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6593A	NNTN8128B	PMLN6085A w/NNTN5243A w/no loop	PMLN6130A	150.80	5.90	-0.47	1.36	0.60	0.76	0.33	HvH-Ab-140829-08
				156.45							
				162.10							
				167.75							
				173.40							
Assessment of Additional Batteries											
NAR6593A	PMNN4424AR	PMLN6085A w/NNTN5243A w/no loop	PMLN6130A	150.80	5.78	-0.45	1.14	0.51	0.65	0.29	HvH-Ab-140829-09
				156.45							
				162.10							
				167.75							
				173.40							
	PMNN4448AR			150.80	5.87	-0.48	1.15	0.58	0.65	0.32	HvH-Ab-140829-10
				156.45							
				162.10							
				167.75							
				173.40							

Assessment at the Body with other audio accessories

Assessment per “KDB 643646 D01 Body SAR Test Consideration for Audio Accessories without Built-in Antenna; Sec 1, A. when overall < 4.0 W/kg, SAR testing for that audio accessory is not necessary.” This was applicable to all remaining accessories.

Assessment outside FCC Part 90 at the Body

Assessment using highest SAR configuration Part 90 assessment above run# HvH-Ab-140829-02, (Table 18) across the offered antennas (if applicable).

TABLE 21

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6593A	NNTN8128B	PMLN4651A	PMLN6130A	138.0	5.76	0.52	2.29	1.41	1.17	0.72	HvH-Ab-140829-11
				144.4	5.84	-0.43	2.52	1.57	1.41	0.88	HvH-Ab-140829-12

13.2 Assessments at the Face

The battery PMNN4448A was used for assessments at the Face because it is the highest capacity battery (refer to Exhibit 7B for the illustration of the battery). The conducted power measurement for all test channels within Part 90 frequency range (150.8-173.4 MHz) which is listed in Table 20. SAR plot of the highest result per Table (bolded) is presented in Appendix E.

TABLE 22

Test Freq (MHz)	Power (W)
150.80	5.86
156.45	5.79
162.10	5.78
167.75	5.68
173.40	5.67

Assessment of the offered antennas with the default battery with front of DUT positioned 2.5cm facing phantom. SAR plot of the highest result per Table (bolded) is presented in Appendix E.

TABLE 23

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#		
NAR6593A	PMNN4448AR	None @ front	N/A	150.80	5.84	-0.33	1.10	0.85	0.60	0.46	HvH-Face-140830-02		
				156.45									
				162.10									
				167.75									
				173.40									
Assessment of Additional Batteries													
NAR6593A	PMNN4424AR	None @ front	N/A	150.80	5.78	-0.39	1.02	0.80	0.57	0.44	HvH-Face-140830-03		
				156.45									
				162.10									
				167.75									
				173.40									
	NNTN8128B				150.80	5.89	-0.36	1.09	0.84	0.59	0.46		HvH-Face-140830-04
					156.45								
					162.10								
					167.75								
					173.40								

Assessment outside FCC Part 90 at the Face

Assessment using highest SAR configuration Part 90 assessment above run# HvH-Face-140830-02, (Table 23) across the offered antennas (if applicable).

TABLE 24

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
NAR6593A	PMNN4448AR	None @ front	N/A	138.0	5.72	0.42	0.84	0.66	0.43	0.34	HvH-Face-140830-05
				144.4	5.77	0.29	2.14	1.67	1.09	0.85	HvH-Face-140830-06

13.3 Assessments for Industry Canada

Based on the assessment results for body and face per KDB643646 D01, additional tests were not required for the Industry Canada frequency range (138-144, 148-149.9 MHz and 150.05-174 MHz) as the testing performed is in compliance with Industry Canada frequency range.

13.4 Shortened Scan Assessment

A “shortened” scan using the highest SAR configuration overall from the Part 90 was performed to validate the SAR drift of the full DASY5™ coarse and zoom scans. Note that the shortened scan represents the zoom scan performance result; this is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a zoom scan only was performed. The results of the shortened cube scan presented in APPENDIX E demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid. The SAR results from the table below are provided in APPENDIX E.

TABLE 25

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)	Run#
Shorten scan											
NAR6593A	NNTN8128B	PMLN4651A	PMLN6130A	144.4	5.90	-0.25	2.68	1.67	1.42	0.88	HvH-Ab-140830-12

14.0 Simultaneous Transmission Exclusion

Not applicable.

15.0 Results Summary

Based on the test guidelines from KDB 643646 and satisfying frequencies with Part 90 FCC band to be in compliance with Industry Canada Frequency range, the highest Operational Maximum Calculated 1-gram and 10-gram average SAR values found for this filing:

TABLE 26

Designator	Frequency band (MHz)	Max Calc at Body (W/kg)		Max Calc at Face (W/kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR
Overall	136-174	1.42	0.88	1.09	0.85
FCC	150.8-173.4	1.02	0.64	0.60	0.46
Industry Canada	138-174	1.42	0.88	1.09	0.85

All results are scaled to the maximum output power

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of 47 CFR 2.1093(d). The 10 grams result is not applicable to FCC filing.

16.0 Variability Assessment

Per the guidelines in KDB 865664 SAR variability assessment is not required because SAR results are below 4.0W/kg (Occupational).

17.0 System Uncertainty

A system uncertainty analysis is not required for this report per KDB 865664 because the highest report SAR value for Occupational exposure is less than 7.5W/kg.

Per the guidelines of ISO 17025 a reported system uncertainty is required and therefore measurement uncertainty budget is included in Appendix A.

Appendix A

Measurement Uncertainty Budget

Uncertainty Budget for Device Under Test, for 150 MHz									
<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob. Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	6.7	N	1.00	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11	11	477
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				23	22	

Notes for uncertainty budget Table:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u_i* – SAR uncertainty
- h) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Appendix B

Probe Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola EME**

Certificate No: **ES3-3163_May14**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3163**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 15, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)*C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Name** Claudio Leubler **Function** Laboratory Technician **Signature**

Approved by: **Name** Katja Pokovic **Function** Technical Manager **Signature**

Issued: May 17, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., θ = 0 is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

ES3DV3 – SN:3163

May 15, 2014

Probe ES3DV3

SN:3163

Manufactured: October 8, 2007
Calibrated: May 15, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ES3DV3-- SN:3163

May 15, 2014

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3163

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.31	1.12	1.04	$\pm 10.1 \%$
DCP (mV) ^B	104.3	102.9	104.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	216.3	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		203.1	
		Z	0.0	0.0	1.0		190.3	
10012-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	3.01	69.5	19.3	1.87	128.2	$\pm 0.5 \%$
		Y	3.15	69.9	19.2		138.1	
		Z	2.99	69.2	18.8		130.7	
10013-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	11.13	70.8	23.5	9.46	123.4	$\pm 3.0 \%$
		Y	10.99	70.3	22.9		135.5	
		Z	10.75	70.0	22.9		124.0	
10059-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	3.57	72.0	20.4	2.12	127.7	$\pm 0.5 \%$
		Y	3.62	71.7	19.9		138.6	
		Z	3.29	70.3	19.3		130.8	
10060-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	14.52	99.5	30.0	2.83	137.9	$\pm 0.7 \%$
		Y	9.55	90.9	26.8		148.9	
		Z	11.15	94.5	28.1		138.7	
10061-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	12.48	92.4	28.1	3.60	140.5	$\pm 0.9 \%$
		Y	8.08	84.0	24.8		127.8	
		Z	9.07	87.0	26.1		142.2	
10071-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	11.42	71.4	24.2	9.83	121.7	$\pm 3.0 \%$
		Y	11.12	70.5	23.3		131.7	
		Z	10.98	70.5	23.5		122.8	
10072-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	11.79	73.3	25.2	9.62	147.0	$\pm 3.3 \%$
		Y	10.74	70.4	23.2		129.7	
		Z	11.22	72.1	24.4		147.1	
10073-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	11.95	73.8	25.7	9.94	143.0	$\pm 3.8 \%$
		Y	10.82	70.7	23.6		126.7	
		Z	11.27	72.4	24.8		141.9	
10074-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	12.20	74.4	26.4	10.30	140.5	$\pm 3.0 \%$
		Y	10.89	70.7	23.8		125.5	
		Z	11.43	72.8	25.3		138.7	
10075-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	12.44	75.1	27.1	10.77	136.0	$\pm 3.0 \%$
		Y	11.06	71.1	24.4		122.5	
		Z	11.63	73.3	26.0		136.0	

ES3DV3- SN:3163

May 15, 2014

10076-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	12.59	75.5	27.5	10.94	135.6	±3.3 %
		Y	11.11	71.2	24.6		121.3	
		Z	11.73	73.7	26.4		134.6	
10077-CAA	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	12.60	75.6	27.6	11.00	134.5	±3.3 %
		Y	11.12	71.3	24.7		120.5	
		Z	11.69	73.7	26.4		133.1	
10111-CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	7.09	67.8	20.4	6.44	144.0	±1.7 %
		Y	6.91	66.9	19.7		133.8	
		Z	7.02	67.8	20.3		147.3	
10112-CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	7.30	67.3	20.1	6.59	125.3	±1.9 %
		Y	7.38	67.3	19.9		139.7	
		Z	7.22	67.1	19.8		127.8	
10113-CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.35	68.1	20.7	6.62	145.8	±1.7 %
		Y	7.12	67.0	19.8		134.5	
		Z	7.27	68.0	20.5		148.4	
10114-CAA	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	10.29	69.3	21.7	8.10	129.5	±2.5 %
		Y	10.19	68.9	21.2		144.0	
		Z	10.14	69.0	21.3		131.5	
10115-CAA	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	10.84	69.9	22.2	8.46	133.8	±2.7 %
		Y	10.75	69.5	21.7		148.7	
		Z	10.70	69.6	21.9		135.5	
10116-CAA	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	10.33	69.4	21.7	8.15	131.0	±2.5 %
		Y	10.23	69.0	21.3		144.3	
		Z	10.21	69.2	21.5		132.1	
10142-CAB	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	5.92	67.1	19.9	5.73	135.8	±1.4 %
		Y	5.91	66.7	19.4		146.3	
		Z	5.79	66.7	19.5		136.2	
10143-CAB	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	6.91	68.0	20.5	6.35	142.5	±1.4 %
		Y	6.64	66.8	19.6		128.9	
		Z	6.73	67.6	20.1		142.1	
10145-CAB	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	5.66	66.8	19.8	5.76	131.2	±1.4 %
		Y	5.64	66.4	19.3		140.0	
		Z	5.49	66.4	19.3		131.2	
10146-CAB	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	6.59	67.8	20.5	6.41	135.3	±1.7 %
		Y	6.60	67.7	20.1		144.9	
		Z	6.38	67.5	20.0		134.6	
10154-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.02	67.0	19.8	5.75	136.2	±1.4 %
		Y	6.09	67.0	19.5		146.1	
		Z	5.95	66.8	19.5		137.9	
10155-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	7.09	67.8	20.5	6.43	143.8	±1.7 %
		Y	6.88	66.9	19.7		130.7	
		Z	6.99	67.7	20.2		145.9	

ES3DV3- SN:3163

May 15, 2014

10156-CAB	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	5.83	66.8	19.8	5.79	132.8	±1.4 %
		Y	5.86	66.6	19.4		142.3	
		Z	5.73	66.6	19.4		134.5	
10157-CAB	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	6.85	67.8	20.5	6.49	138.3	±1.9 %
		Y	6.88	67.7	20.2		149.6	
		Z	6.73	67.6	20.2		140.6	
10158-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	7.35	68.1	20.7	6.62	145.2	±1.7 %
		Y	7.10	67.0	19.8		132.0	
		Z	7.23	67.8	20.3		147.6	
10159-CAB	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	6.98	67.9	20.6	6.56	139.4	±1.4 %
		Y	6.73	66.8	19.7		127.1	
		Z	6.83	67.7	20.3		140.9	
10166-CAB	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	5.23	67.2	20.0	5.46	146.3	±1.2 %
		Y	5.05	66.1	19.1		133.7	
		Z	5.12	67.1	19.7		148.6	
10167-CAB	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.99	67.5	20.3	6.21	126.9	±1.4 %
		Y	5.98	67.4	19.9		137.9	
		Z	6.05	68.3	20.5		149.6	
10175-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	5.05	67.3	20.2	5.72	139.4	±1.2 %
		Y	4.84	66.1	19.3		128.3	
		Z	4.94	67.1	19.9		140.9	
10176-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	5.88	68.5	21.2	6.52	139.1	±1.7 %
		Y	5.57	67.1	20.1		127.6	
		Z	5.66	68.1	20.8		138.6	
10177-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	5.07	67.4	20.3	5.73	139.4	±1.2 %
		Y	4.87	66.3	19.4		127.2	
		Z	4.96	67.3	20.0		139.7	
10178-CAB	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	5.92	68.7	21.3	6.52	140.7	±1.7 %
		Y	5.58	67.2	20.1		127.3	
		Z	5.63	68.0	20.7		138.4	
10179-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	5.88	68.6	21.2	6.50	140.3	±1.7 %
		Y	5.59	67.3	20.2		127.6	
		Z	5.63	68.1	20.7		137.3	
10180-CAB	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	5.91	68.7	21.3	6.50	141.3	±1.7 %
		Y	5.80	68.2	20.7		145.8	
		Z	5.62	68.0	20.7		136.9	
10184-CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	5.09	67.4	20.3	5.73	140.2	±1.4 %
		Y	5.03	67.0	19.8		146.0	
		Z	4.92	67.0	19.9		139.3	
10185-CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	5.92	68.7	21.3	6.51	141.5	±1.7 %
		Y	5.77	68.0	20.6		145.2	
		Z	5.63	68.0	20.7		138.1	

ES3DV3- SN:3163

May 15, 2014

10187-CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	5.10	67.5	20.4	5.73	140.4	±1.4 %
		Y	5.04	67.0	19.8		144.6	
		Z	4.95	67.2	20.0		139.5	
10188-CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	5.93	68.7	21.2	6.52	143.8	±1.9 %
		Y	5.79	68.1	20.6		145.0	
		Z	5.67	68.2	20.8		139.6	
10298-AAA	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	5.74	66.9	19.8	5.72	135.2	±1.4 %
		Y	5.67	66.4	19.3		134.7	
		Z	5.54	66.3	19.3		131.0	
10299-AAA	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	6.73	67.9	20.5	6.39	141.9	±1.4 %
		Y	6.65	67.4	20.0		141.4	
		Z	6.56	67.7	20.2		136.9	
10315-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	3.01	70.5	20.1	1.71	131.6	±0.5 %
		Y	3.00	69.6	19.1		133.8	
		Z	2.89	69.2	18.9		131.3	
10316-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	10.21	69.5	22.1	8.36	127.7	±2.5 %
		Y	9.98	68.6	21.3		129.8	
		Z	9.93	68.9	21.6		124.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^a The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL. (see Pages 8 and 9).
^a Numerical linearization parameter: uncertainty not required.
^e Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3163

May 15, 2014

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3163

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
150	52.3	0.76	7.15	7.15	7.15	0.05	1.20	± 13.3 %
220	49.0	0.81	7.09	7.09	7.09	0.05	1.20	± 13.3 %
300	45.3	0.87	7.34	7.34	7.34	0.25	1.25	± 13.3 %
450	43.5	0.87	6.51	6.51	6.51	0.22	1.80	± 13.3 %
750	41.9	0.89	6.41	6.41	6.41	0.44	1.50	± 12.0 %
900	41.5	0.97	6.06	6.06	6.06	0.35	1.72	± 12.0 %
1810	40.0	1.40	5.18	5.18	5.18	0.77	1.27	± 12.0 %
1950	40.0	1.40	4.87	4.87	4.87	0.66	1.29	± 12.0 %
2300	39.5	1.67	4.67	4.67	4.67	0.80	1.23	± 12.0 %
2450	39.2	1.80	4.35	4.35	4.35	0.53	1.64	± 12.0 %
2600	39.0	1.96	4.26	4.26	4.26	0.71	1.42	± 12.0 %
3500	37.9	2.91	4.27	4.27	4.27	0.80	1.20	± 13.1 %
3700	37.7	3.12	4.15	4.15	4.15	0.90	1.20	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively.

^F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3163

May 15, 2014

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3163

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
150	61.9	0.80	6.87	6.87	6.87	0.08	1.35	± 13.3 %
220	60.2	0.86	6.65	6.65	6.65	0.05	1.35	± 13.3 %
300	58.2	0.92	6.94	6.94	6.94	0.13	1.80	± 13.3 %
450	56.7	0.94	7.19	7.19	7.19	0.15	1.82	± 13.3 %
750	55.5	0.96	6.14	6.14	6.14	0.65	1.28	± 12.0 %
900	55.0	1.05	5.94	5.94	5.94	0.50	1.43	± 12.0 %
1810	53.3	1.52	4.82	4.82	4.82	0.62	1.45	± 12.0 %
1950	53.3	1.52	4.82	4.82	4.82	0.53	1.55	± 12.0 %
2300	52.9	1.81	4.43	4.43	4.43	0.76	1.28	± 12.0 %
2450	52.7	1.95	4.22	4.22	4.22	0.70	1.18	± 12.0 %
2600	52.5	2.16	4.07	4.07	4.07	0.80	1.03	± 12.0 %
3500	51.3	3.31	3.72	3.72	3.72	0.85	1.30	± 13.1 %
3700	51.0	3.55	3.53	3.53	3.53	0.80	1.50	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3-- SN:3163

May 15, 2014

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


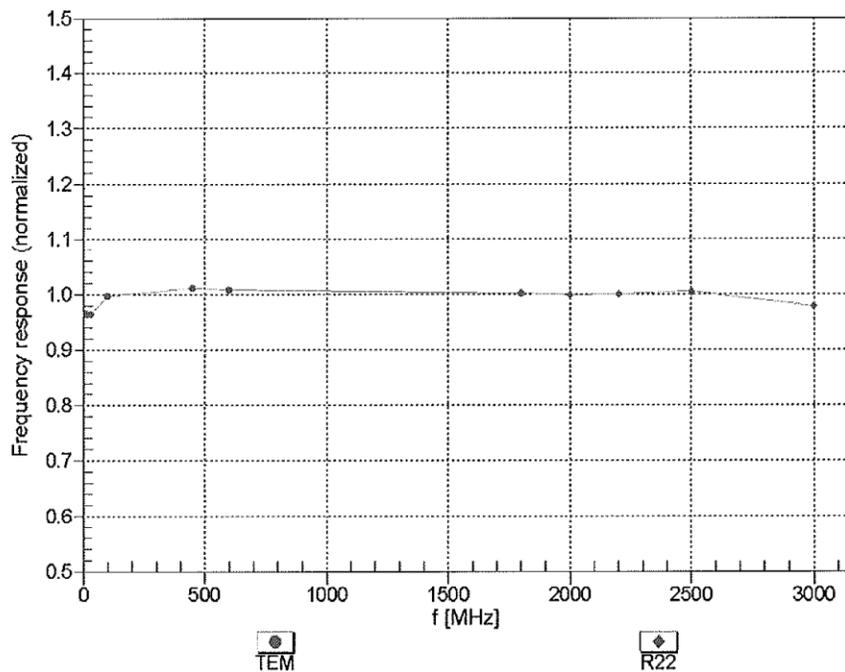


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

ES3DV3-SN:3163

May 15, 2014

Receiving Pattern (ϕ), $\theta = 0^\circ$

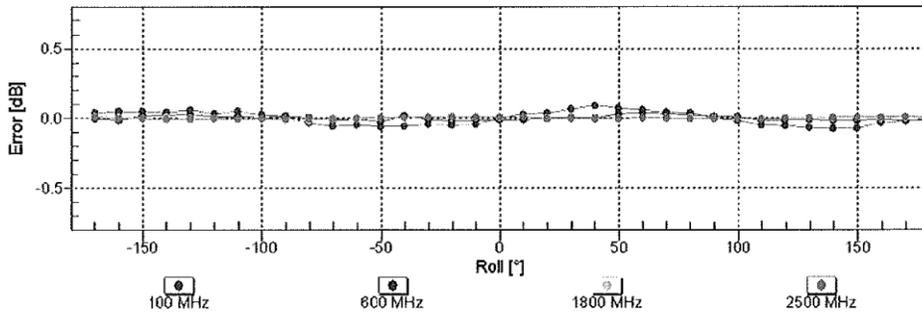
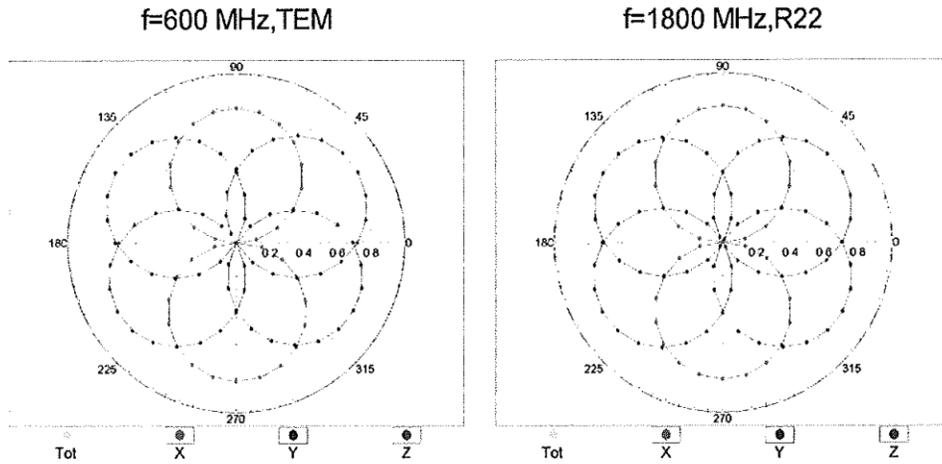


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ES3DV3- SN:3163

May 15, 2014

Dynamic Range f(SAR_{head}) (TEM cell, f_{eval}= 1900 MHz)

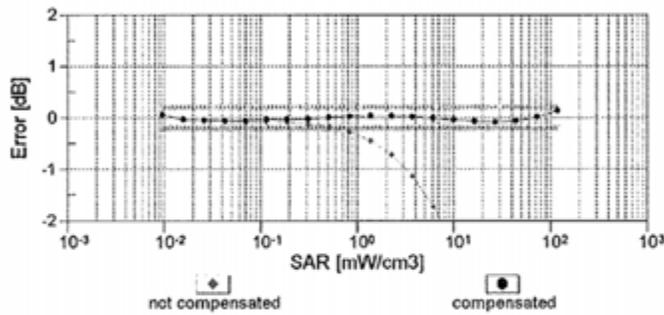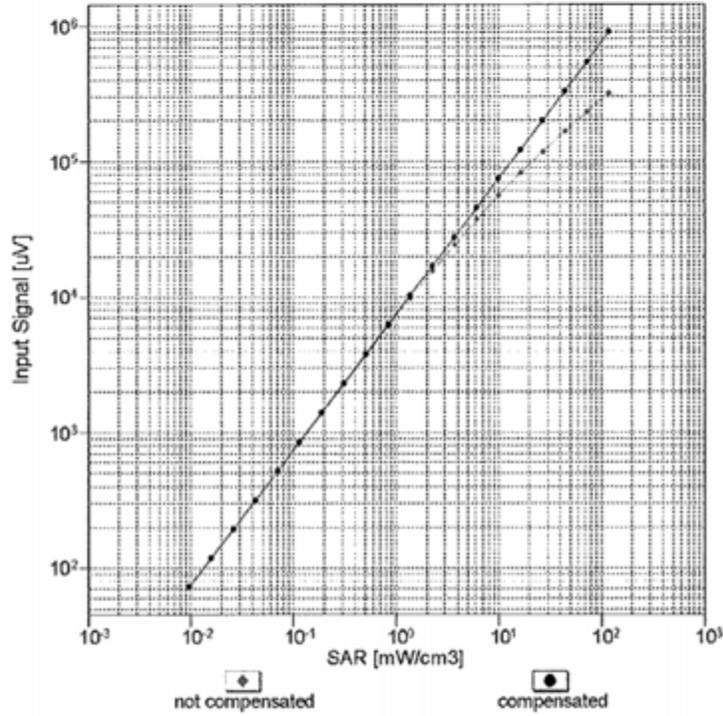


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



ES3DV3-SN:3163

May 15, 2014

Conversion Factor Assessment

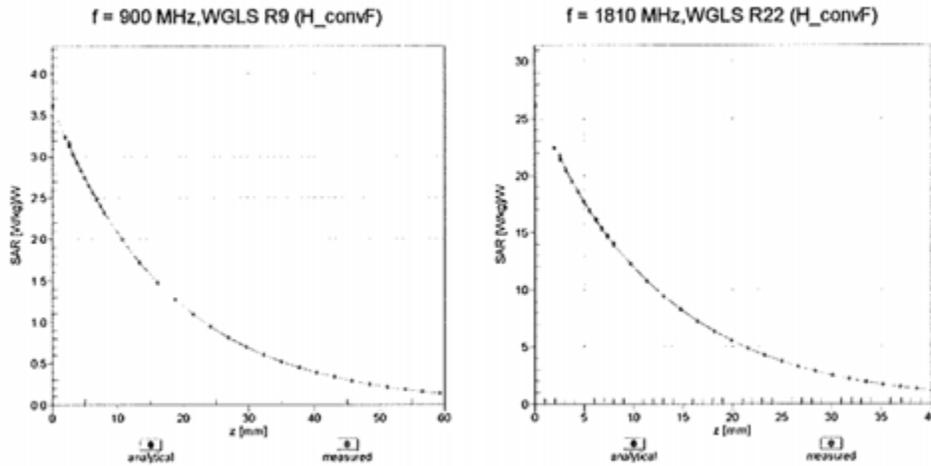

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

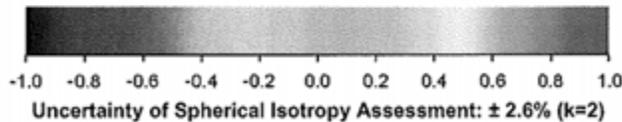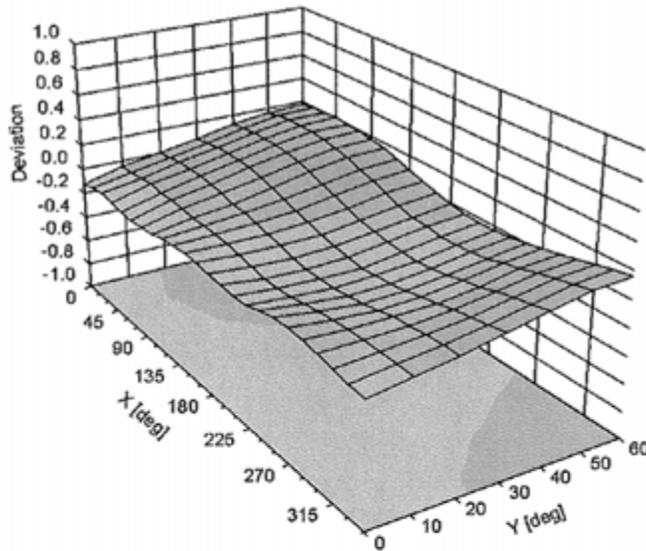

ES3DV3- SN:3163

May 15, 2014

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3163

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	9.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Appendix C

Dipole Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola EME**

Certificate No: **CLA150-4005_Dec13/2**

CALIBRATION CERTIFICATE (Replacement of No: CLA150-4005_Dec13)

Object **CLA150 - SN: 4005**

Calibration procedure(s) **QA CAL-15.v8
Calibration procedure for system validation sources below 700 MHz**

Calibration date: **December 03, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe EX3DV4	SN: 3877	26-Nov-13 (No. EX3-3877_Nov13)	Nov-14
DAE4	SN: 654	18-Jul-13 (No. DAE4-654_Jul13)	Jul-14

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by:	Name Israe El-Naouq	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 14, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

DASY5 Validation Report for Head TSL

Date: 02.12.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: CLA150; Type: CLA150; Serial: CLA150 - SN: 4005


Communication System: UID 0 - CW; Frequency: 150 MHz
 Medium parameters used: $f = 150 \text{ MHz}$; $\sigma = 0.75 \text{ S/m}$; $\epsilon_r = 50$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:


- Probe: EX3DV4 - SN3877; ConvF(11.76, 11.76, 11.76); Calibrated: 26.11.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 18.07.2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

CLA Calibration for HSL-LF Tissue/CLA150, touch configuration, Pin=1W/Area Scan (81x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 4.75 W/kg

CLA Calibration for HSL-LF Tissue/CLA150, touch configuration, Pin=1W/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 79.280 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 5.88 W/kg
SAR(1 g) = 3.68 W/kg; SAR(10 g) = 2.45 W/kg
 Maximum value of SAR (measured) = 4.74 W/kg

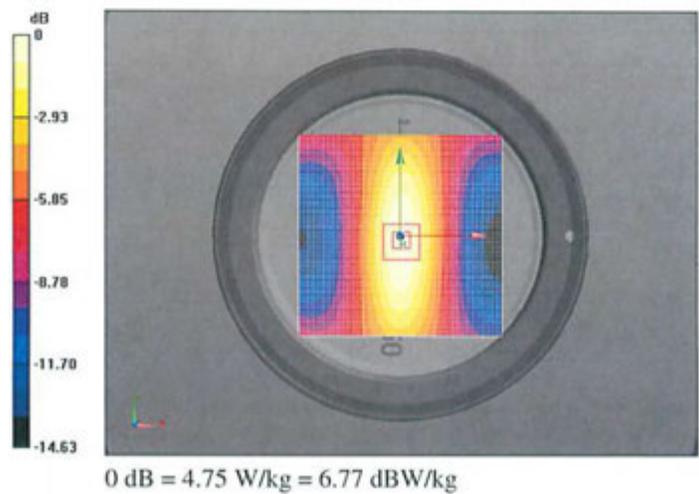

Impedance Measurement Plot for Head TSL

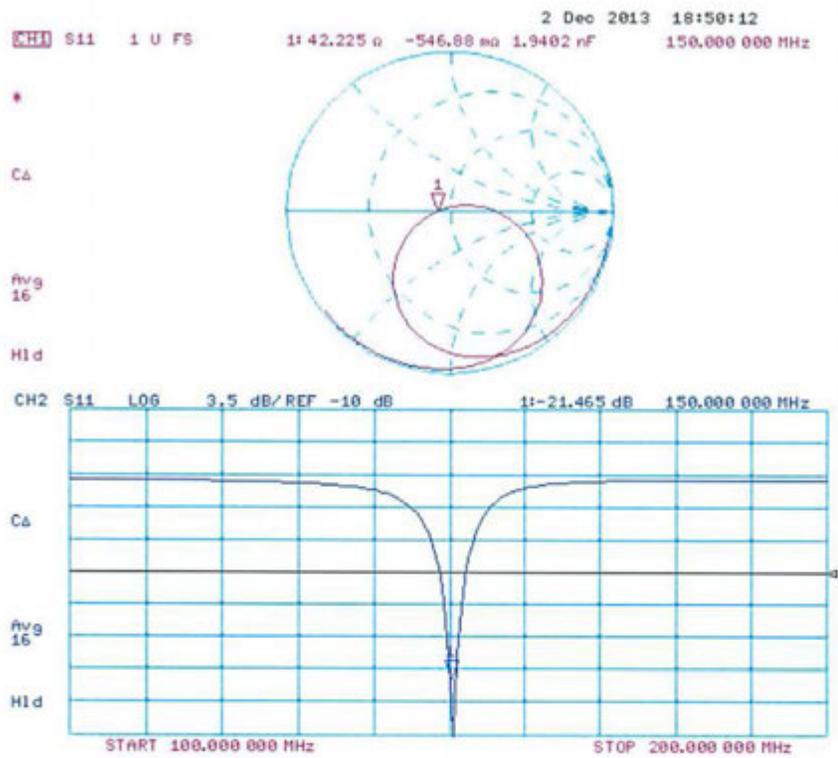

DASY5 Validation Report for Body TSL

Date: 03.12.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: CLA150; Type: CLA150; Serial: CLA150 - SN: 4005

Communication System: UID 0 - CW; Frequency: 150 MHz
 Medium parameters used: $f = 150$ MHz; $\sigma = 0.806$ S/m; $\epsilon_r = 63$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(11.45, 11.45, 11.45); Calibrated: 26.11.2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 18.07.2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

CLA Calibration for MSL-LF Tissue/CLA150, touch configuration, Pin=1W/Area Scan

(81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.99 W/kg

CLA Calibration for MSL-LF Tissue/CLA150, touch configuration, Pin=1W/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.591 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 6.19 W/kg

SAR(1 g) = 3.89 W/kg; SAR(10 g) = 2.6 W/kg

Maximum value of SAR (measured) = 4.99 W/kg

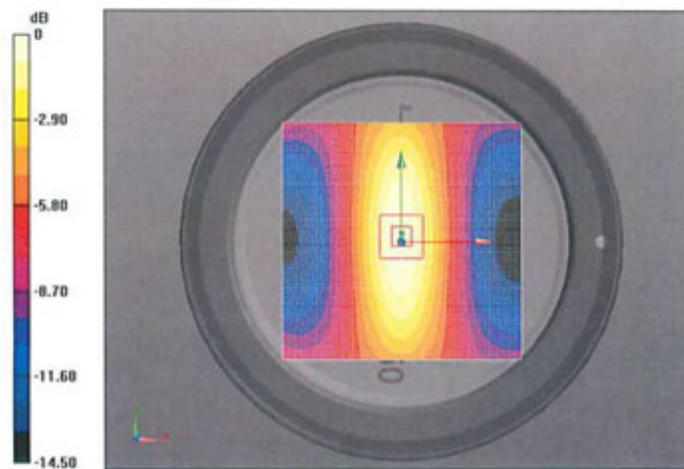

0 dB = 4.99 W/kg = 6.98 dBW/kg

Impedance Measurement Plot for Body TSL

