



DECLARATION OF COMPLIANCE SAR ASSESSMENT PCII Report

Motorola Solutions Inc
EME Test Laboratory
 Motorola Solutions Malaysia Sdn Bhd (Innoplex) (455657-H)
 Plot 2A, Medan Bayan Lepas,
 Mukim 12 SWD, 11900 Bayan Lepas Penang, Malaysia.

Date of Report: 04/12/2016
Report Revision: B

Responsible Engineer: Veeramani (Sr. EME Engineer)
Report Author: Veeramani (Sr. EME Engineer)
Date/s Tested: 03/21/2016- 03/23/2016
Manufacturer: Motorola Solutions Inc.
DUT Description: T200 GMRS/FRS Consumer Radio 462-467MHz
Test TX mode(s): CW (PTT)
Max. Power output: 0.75W (GMRS/FRS)
Nominal Power: 0.5W (GMRS/FRS)
Tx Frequency Bands: FRS 462.5625 – 462.7125 MHz
 FRS 467.5625 – 467.7125 MHz
 GMRS 462.5500 – 462.7250 MHz
Signaling type: FM
Model(s) Tested: T200 (PMUE5040A)
Model(s) Certified: T200 (PMUE5040A)
Serial Number(s): 1651NP0013
Classification: General Population/Uncontrolled
FCC ID: AZ489FT4928; FRS 467.5625 – 467.7125 MHz, FRS 462.5625 – 462.7125 MHz, GMRS 462.5500 – 462.7250 MHz
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.
IC: 109U-89FT4928; This report contains results that are immaterial for IC equipment approval, which are clearly identified.

The test results clearly demonstrate compliance with FCC General Population/Uncontrolled RF Exposure limits of 1.6 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing. The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz), Health Physics 74, 494-522 RF Exposure limits of 2 W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Tiong
Tiong Nguk Ing
 Deputy Technical Manager
 Approval Date: 4/12/2016

Certification Date: 3/14/2016
Certification No.: L1160314

Part 1 of 2

1.0	Introduction.....	4
2.0	FCC SAR Summary.....	4
3.0	Abbreviations / Definitions.....	4
4.0	Referenced Standards and Guidelines	5
5.0	SAR Limits	5
6.0	Description of Devices under Test (DUT).....	6
7.0	Optional Accessories and Test Criteria	7
7.1	Antenna.....	7
7.2	Batteries	7
7.3	Body worn Accessory.....	7
7.4	Audio Accessories	8
8.0	Description of Test System.....	8
8.1	Descriptions of Robotics/Probes/Readout Electronics	9
8.2	Description of Phantom(s)	9
8.3	Description of Simulated Tissue.....	10
9.0	Additional Test Equipment.....	11
10.0	SAR Measurement System Validation and Verification	12
10.1	System Validation.....	12
10.2	System Verification	12
10.3	Equivalent Tissue Test Results.....	13
11.0	Environmental Test Conditions	14
12.0	DUT Test Setup and Methodology.....	14
12.1	Measurements	14
12.2	DUT Configuration(s)	15
12.3	DUT Positioning Procedures	15
12.3.1	Body.....	15
12.3.2	Head.....	15
12.3.3	Face.....	15
12.4	DUT Test Channels	16
12.5	SAR Result Scaling Methodology.....	16
12.6	DUT Test Plan	16
13.0	DUT Test Data.....	17
13.1	Assessments at the Body for FRS band (467.5625 -467.7125 MHz).....	17
13.2	Assessment at the Body for GMRS band (462.5500 – 462.7250 MHz) and FRS band (462.5625 – 462.7125 MHz)	18
13.3	Assessment at the Face for FRS band (467.5625 -467.7125 MHz)	19
13.4	Assessment at the Face for GMRS band (462.5500 – 462.7250 MHz) and FRS band (462.5625 – 462.7125 MHz)	20
13.5	Assessment for Industry Canada	20
13.6	Shortened Scan Assessment	21
14.0	Simultaneous Transmission Exclusion for BT	21
15.0	Results Summary	21

16.0 Variability Assessment 22
 17.0 System Uncertainty 22

APPENDICES

A Measurement Uncertainty Budget 23
 B Probe Calibration Certificates 26
 C Dipole Calibration Certificates 57
 D System Verification Check Scans 67
 E DUT Scans - (Shortened Scan and Highest SAR Configurations) 72
 F DUT Test Position Photos 76

Report Revision History

Date	Revision	Comments
03/30/2016	A	Release of PCII results with new hardware.
04/12/2016	B	Include dipole annual validation results.

1.0 Introduction

This report details the utilization, test setups, test equipments, and test results of the Specific Absorption Rate (SAR) measurements performed at the Motorola Solutions Inc. EME Test Laboratory for handheld portable model number T200 (PMUE5040A). This device is classified as General Population/Uncontrolled. The information herein is to show evidence of Class II Permissive Change compliance base on the SAR evaluation of a design change (transmitter path) made to the DUT.

2.0 FCC SAR Summary

Table 1

Equipment Class	Frequency band (MHz)	Max Calc at Body (W/kg)		Max Calc at Face (W/kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR
FRF	462.5625 – 462.7125 (FRS)	0.75	0.53	0.43	0.31
	462.5500 – 462.7250 (GMRS)				
	467.5625 - 467.7125 (FRS)	0.92	0.65	0.46	0.33
Simultaneous Results		NA	NA	NA	NA

3.0 Abbreviations / Definitions

CNR: Calibration Not Required
 CW: Continuous Wave
 DUT: Device under Test
 EME: Electromagnetic Energy
 FM: Frequency Modulation
 NA: Not Applicable
 NiMH: Nickel Metal Hydride
 PTT: Push to Talk
 SAR: Specific Absorption Rate
 FRF: Part 95 Family Radio Face Held Transmitter
 FRS: Family Radio Service
 GMRS: General Mobile Radio Service

Audio accessories: These accessories allow communication while the DUT is worn on the body.

Body worn accessories: These accessories allow the DUT to be worn on the body of the user.

Maximum Power: Defined as the upper limit of the production line final test station.

4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1 (2005) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C.: 1997.
- IEEE 1528 (2013), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronics Engineers (IEEE) C95.1-2005
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 5) – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
- Australian Communications Authority Radio communications (Electromagnetic Radiation - Human Exposure) Standard (2014)
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9 kHz and 300 GHz." and “Attachment to resolution # 303 from July 2, 2002”
- IEC62209-2 Edition 1.0 2010-03, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).
- FCC KDB – 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB – 865664 D02 RF Exposure Reporting v01r02
- FCC KDB – 447498 D01 General RF Exposure Guidance v06

5.0 SAR Limits

Table 2

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.6	8.0
Spatial Peak – ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Spatial Peak - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

6.0 Description of Devices under Test (DUT)

This portable device operates with analog Frequency Modulation (FM) incorporating traditional simplex two-way radio transmission protocol. This model's intended use is 5-5-90 (5% Transmit, 5% Receive and 90 % Standby); with a maximum transmit duty cycle of 50%.

The model represented under this filing with a fixed antenna and cover both GMRS and FRS band.

Table 3 below summarizes the bands and maximum output powers. Maximum output powers are defined as upper limit of the production line final test station.

Table 3

Band (MHz)	Duty Cycle (%)	Max Power (W)
462.5625 – 462.7125 (FRS)	*50	0.75
467.5625 – 467.7125 (FRS)	*50	0.75
462.5500 – 462.7250 (GMRS)	*50	0.75

Note - * includes 50% PTT operation

The intended operating positions are “at the face” with the DUT at least 2.5cm from the mouth, and “at the body” by means of the offered body worn accessories. Body worn audio and PTT operation is accomplished by means of optional remote accessories that are connected to the radio.

7.0 Optional Accessories and Test Criteria

This device is offered with optional accessories. All accessories were individually evaluated during the test plan creation to determine if testing was required per the guidelines outlined in section 4.0 to assess compliance of this device. The following sections identify the test criteria and details for each accessory category.

7.1 Antenna

Only one fixed antenna offered with this product. The table below lists its description.

Table 4

Antenna Model	Description	Selected for test	Tested
Fixed antenna	Fixed antenna, 100-500 MHz , ¼ Wavelength, -0.05 dBd	Yes	Yes

7.2 Batteries

There are optional batteries offered for this product. The Table below lists their descriptions.

Table 5

Battery Models	Description	Selected for test	Tested	Comments
PMNN4477A	3xAA NiMH Rechargeable Battery Pack 800 mAh	Yes	Yes	
AA Alkaline	3xAA Alkaline individual batteries	Yes	Yes	

7.3 Body worn Accessory

There is one body worn offered for this product. The table below lists its description.

Table 6

Body worn Models	Description	Selected for test	Tested	Comments
1564028V01	TLKR- T3 T40 T50 T60 XTB Belt clip	Yes	Yes	

7.4 Audio Accessories

All audio accessories were considered. The Table below lists the offered audio accessories and their descriptions. Exhibit 7B illustrates photos of the tested audio accessories.

Table 7

Audio Acc. Models	Description	Selected for test	Tested	Comments
53724B	Remote Speaker Microphone	Yes	Yes	Default Audio
53725B	Headset w/Swivel Boom Microphone	Yes	Yes	With VOX feature
PMLN7251A	Earbud with PTT Microphone	Yes	Yes	
GU7140A	Wired PTT button + Headset with Boom Microphone Bundle(56320B)	Yes	Yes	Tested with 56320B
56320B	Earpiece w/Boom Microphone	Yes	Yes	Tested with GU7140A
53727B	Earbud W/Push-to-Talk Microphone	Yes	Yes	
GU6970A	Electronic Earmuff	Yes	Yes	
GU6987A	Electronic Earmuff	No	No	By similarity to GU6970A
GU6953A	Isolation Earmuff	No	No	By similarity to GU6970A
GU6443A	Surveillance Headset	No	No	By similarity to 53727B
53728A	Flexible Ear Receiver	No	No	Receive only

8.0 Description of Test System



8.1 Descriptions of Robotics/Probes/Readout Electronics

Table 8

Dosimetric System type	System version	DAE type	Probe Type
Schmid & Partner Engineering AG SPEAG DASY 5	52.8.8.1222	DAE4	ES3DV3 EX3DV4 (E-Field)

The DASY5™ system is operated per the instructions in the DASY5™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess SAR compliance was calibrated according to ISO/IEC 17025 A2LA guidelines. Section 9.0 presents additional test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

8.2 Description of Phantom(s)

Table 9

Phantom Type	Phantom(s) Used	Material Parameters	Phantom Dimensions LxWxD (mm)	Material Thickness (mm)	Support Structure Material	Loss Tangent (wood)
Triple Flat	NA	200MHz -6GHz; Er = 3-5, Loss Tangent = ≤0.05	280x175x175	2mm +/- 0.2mm	Wood	< 0.05
SAM	NA	300MHz -6GHz; Er = < 5, Loss Tangent = ≤0.05	Human Model			
Oval Flat	√	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = ≤0.05	600x400x190			

8.3 Description of Simulated Tissue

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. For Diacetin and similar type simulates, sugar and HEC ingredients are not needed. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

The simulated tissue mixture was mixed based on the Simulated Tissue Composition indicated in Table 10. During the daily testing of this product, the applicable mixture was used to measure the Di-electric parameters at each of the tested frequencies to verify that the Di-electric parameters were within the tolerance of the tissue specifications.

Simulated Tissue Composition (percent by mass)

Table 10

Ingredients	450 MHz	
	Head	Body
Sugar	56.00	46.50
Diacetin	0	0
De ionized –Water	39.10	50.53
Salt	3.80	1.87
HEC	1.00	1.00
Bact.	0.10	0.10

9.0 Additional Test Equipment

The Table below lists additional test equipment used during the SAR assessment.

Table 11

Equipment Type	Model Number	Serial Number	Calibration Date	Calibration Due Date
Speag Probe	EX3DV4	7364	23-Jun-15	23-Jun-16
Speag Probe	ES3DV3	3122	19-Jun-15	19-Jun-16
Speag DAE	DAE4	1483	16-Jun-15	16-Jun-16
Speag DAE	DAE4	1488	14-Jul-15	14-Jul-16
Signal Generator	E4438C	MY47272101	12-Aug-14	12-Aug-16
Power Meter	E4419B	MY40330364	29-May-15	29-May-17
Power Meter	E4418B	MY45100739	29-May-15	29-May-17
Power Sensor	8481B	MY41091243	3-Jun-15	3-Jun-16
Power Sensor	8482B	3318A07392	3-Jun-15	3-Jun-16
Bi-directional Coupler	3020A	41935	27-Aug-15	27-Aug-16
Amplifier	10W1000C	312859	CNR	CNR
Power Meter	E4418B	MY45100532	4-Nov-15	4-Nov-17
Power Sensor	8481B	SG41090248	14-Dec-15	14-Dec-16
Dickson Temperature Recorder	HH202A	35881	18-Apr-15	18-Apr-16
Temperature Probe	80PK-22	8766	21-Aug-15	21-Aug-16
Thermometer	TM320	06153216	20-Jul-15	20-Jul-16
Dielectric Assessment Kit	DAK-12	1069	12-May-15	12-May-16
Network Analyzer	E5071B	MY42403218	4-Aug-15	4-Aug-16
Speag Dipole	D450V3	1053	17-Mar-15	17-Mar-17

10.0 SAR Measurement System Validation and Verification

DASY output files of the probe/dipole calibration certificates and system verification test results are included in appendices B, C & D respectively.

10.1 System Validation

The SAR measurement system was validated according to procedures in KDB 865664. The validation status summary Table is below.

Table 12

Dates	Probe Calibration Point		Probe SN	Measured Tissue Parameters		Validation		
				σ	ϵ_r	Sensitivity	Linearity	Isotropy
CW								
09/27/2015	Body	450	7364	0.92	55.3	Pass	Pass	Pass
07/24/2015	Head	450		0.87	44.3	Pass	Pass	Pass
08/25/2015	Body	450	3122	0.91	54.8	Pass	Pass	Pass
08/26/2015	Head	450		0.91	43.9	Pass	Pass	Pass

10.2 System Verification

System verification checks were conducted each day during the SAR assessment. The results are normalized to 1W. Appendix D includes DASY plots for each day during the SAR assessment. The Table below summarizes the daily system check results used for the SAR assessment.

Table 13

Probe Serial #	Tissue Type	Dipole Kit / Serial #	Ref SAR @ 1W (W/kg)	System Check Results Measured (W/kg)	System Check Test Results when normalized to 1W (W/kg)	Tested Date
7364	FCC Body	SPEAG D450V3 / 1053	4.41 +/- 10%	1.11	4.44	03/21/2016
3122	FCC Body		4.41 +/- 10%	1.10	4.40	03/22/2016
	IEEE/IEC Head		4.45 +/- 10%	1.11	4.44	03/23/2016
			4.45 +/- 10%	1.10	4.40	03/23/2016

10.3 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 9.0. The Table below summarizes the measured tissue parameters used for the SAR assessment.

Table 14

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Meas. (S/m)	Dielectric Constant Meas.	Tested Date
450	FCC Body	0.94 (0.89-0.99)	56.7 (53.9-59.5)	0.97	54.6	03/21/2016
				0.91	55.5	03/22/2016
				0.94	55.1	03/23/2016
	IEEE/IEC Head	0.87 (0.83-0.91)	43.5 (41.3-45.7)	0.84	42.1	03/23/2016
463	FCC Body	0.94 (0.89-0.99)	56.6 (53.8-59.5)	0.98	54.4	03/21/2016
				0.92	55.3	03/22/2016
				0.85	41.9	03/23/2016
	IEEE/IEC Head	0.87 (0.83-0.91)	43.4 (41.3-45.6)	0.85	41.9	03/23/2016
468	FCC Body	0.94 (0.89-0.99)	56.6 (53.8-59.5)	0.92	55.2	03/22/2016
				0.96	54.8	03/23/2016
				0.85	41.8	03/23/2016
	IEEE/IEC Head	0.87 (0.83-0.91)	43.4 (41.2-45.6)	0.85	41.8	03/23/2016

11.0 Environmental Test Conditions

The EME Laboratory’s ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The Table below presents the range and average environmental conditions during the SAR tests reported herein:

Table 15

	Target	Measured
Ambient Temperature	18 – 25 °C	Range: 19.9 – 23.6°C Avg. 21.8 °C
Tissue Temperature	NA	Range: 19.8 -22.0°C Avg. 20.8°C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

12.0 DUT Test Setup and Methodology

12.1 Measurements

SAR measurements were performed using the DASY system described in section 8.0 using zoom scans. Oval flat phantoms filled with applicable simulated tissue were used for body and face testing.

The Table below includes the step sizes and resolution of area and zoom scans per KDB 865664 requirements.

Table 16

Description		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

12.2 DUT Configuration(s)

The DUT is a portable device operational at the body and face as described in section 6.0 while using the applicable accessories listed in section 7.0. All accessories listed in section 7.0 of this report were considered.

12.3 DUT Positioning Procedures

The positioning of the device for each body location is described below and illustrated in Appendix G.

12.3.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory.

12.3.2 Head

Not applicable.

12.3.3 Face

The DUT was positioned with its' front sides separated 2.5cm from the phantom.

12.4 DUT Test Channels

The number of test channels was determined by using the following IEEE 1528 equation. The use of this equation produces the same or more test channels compared to the FCC KDB 447498 number of test channels formula.

$$N_c = 2 * \text{roundup}[10 * (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

Where

N_c = Number of channels

F_{high} = Upper channel

F_{low} = Lower channel

F_c = Center channel

12.5 SAR Result Scaling Methodology

The calculated 1-gram and 10-gram averaged SAR results indicated as “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” in the data Tables is determined by scaling the measured SAR to account for power leveling variations and drift. Appendix F includes a shortened scan to justify SAR scaling for drift. For this device the “Max Calc. 1g-SAR” and “Max Calc.10g-SAR” are scaled using the following formula:

$$\text{Max_Calc} = \text{SAR_meas} \cdot 10^{\frac{-\text{Drift}}{10}} \cdot \frac{P_{\text{max}}}{P_{\text{int}}} \cdot \text{DC}$$

P_{max} = Maximum Power (W)

P_{int} = Initial Power (W)

Drift = DASY drift results (dB)

SAR_meas = Measured 1-g or 10-g Avg. SAR (W/kg)

DC = Transmission mode duty cycle in % where applicable

50% duty cycle is applied for PTT operation

Note: for conservative results, the following are applied:

If $P_{\text{int}} > P_{\text{max}}$, then $P_{\text{max}}/P_{\text{int}} = 1$.

Drift = 1 for positive drift

Additional SAR scaling was applied using the methodologies outlined in FCC KDB 865664 using tissue sensitivity values. SAR was scaled for conditions where the tissue permittivity was measured above the nominal target and for tissue conductivity that was measured below the nominal target. Negative or reduced SAR scaling is not permitted.

12.6 DUT Test Plan

The guidelines and requirements outlined in section 4.0 were used to assess compliance of this device. All modes of operation identified in section 6.0 were considered during the development of the test plan. All tests were performed in CW and 50% duty cycle was applied to PTT configurations in the final results.

13.0 DUT Test Data

13.1 Assessments at the Body for FRS band (467.5625 -467.7125 MHz)

Assessment at the Body were done using PMNN4477A and AA Alkaline battery (refer to Exhibit 7B for batteries illustration). The batteries were used during conducted power measurements for all test channels within FCC allocated frequency range (467.5625 -467.7125 MHz) which are listed in Table 17.

Table 17

Test Freq (MHz)	AA Alkaline	PMNN4477A
	Power (W)	Power (W)
467.6375	0.625	0.539

Assessments at the Body with Body worn 1564028V01

Assessment of the fixed antenna with offered batteries, body worn and audio accessories were performed. Testing of additional channels was not required per KDB 447498. SAR plots of the highest results per Table 18 (bolded) are presented in Appendix E.

Table 18

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Fixed	PMNN4477A	1564028V01	53724B	467.6375	0.539	-0.56	0.986	0.697	0.78	0.55	ZR(KBK)-AB-160322-11
Assessment of Additional Batteries											
Fixed	3x AA Alkaline	1564028V01	53724B	467.6375	0.625	-0.66	0.965	0.673	0.67	0.47	ZR(KBK)-AB-160322-10
Assessment of Additional Audio Accessories											
Fixed	PMNN4477A	1564028V01	GU6970A	467.6375	0.539	-0.72	0.945	0.671	0.78	0.55	ZR(KBK)-AB-160322-12
Fixed	PMNN4477A	1564028V01	53727B	467.6375	0.539	-0.76	1.110	0.782	0.92	0.65	ZR(KBK)-AB-160322-13
Fixed	PMNN4477A	1564028V01	GU7140A w/56320B	467.6375	0.539	-0.60	1.020	0.713	0.81	0.57	ZR-AB-160322-14
Fixed	PMNN4477A	1564028V01	PMLN7251A	467.6375	0.539	-0.76	0.988	0.699	0.82	0.58	ZR-AB-160322-15
Fixed	PMNN4477A	1564028V01	53725B	467.6375	0.539	-0.58	0.990	0.699	0.79	0.56	ZR-AB-160322-16

13.2 Assessment at the Body for GMRS band (462.5500 – 462.7250 MHz) and FRS band (462.5625-462.7125 MHz)

Assessment at the Body were done using PMNN4477A and AA Alkaline battery (refer to Exhibit 7B for batteries illustration). The batteries were used during conducted power measurements for all test channels within FCC allocated frequency range (462.5500 – 462.7250 MHz and 462.5625 – 462.7125 MHz) which are listed in Table 19.

Table 19

Test Freq (MHz)	AA Alkaline	PMNN4477A
	Power (W)	Power (W)
462.6375	0.675	0.575

Assessments at the Body with Body worn 1564028V01

Assessment of the fixed antenna with offered batteries, body worn and audio accessories were performed. Testing of additional channels was not required per KDB 447498.

Table 20

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Fixed	PMNN4477A	1564028V01	53724B	462.6375	0.575	-0.68	0.891	0.641	0.68	0.49	AZ-AB-160321-08
Assessment of Additional Batteries											
Fixed	3xAA Alkaline	1564028V01	53724B	462.6375	0.675	-0.78	0.946	0.672	0.63	0.45	AZ-AB-160321-10
Assessment of Additional Audio Accessories											
Fixed	PMNN4477A	1564028V01	GU6970A	462.6375	0.575	-0.67	0.981	0.691	0.747	0.526	ZWS(KBK)-AB-160322-04
Fixed	PMNN4477A	1564028V01	53727B	462.6375	0.575	-0.73	0.877	0.622	0.68	0.48	ZWS-AB-160322-05
Fixed	PMNN4477A	1564028V01	GU7140A w/56320B	462.6375	0.575	-0.59	0.990	0.698	0.740	0.521	ZWS-AB-160322-07
Fixed	PMNN4477A	1564028V01	PMLN7251A	462.6375	0.575	-0.67	0.799	0.562	0.61	0.43	ZWS-AB-160322-06
Fixed	PMNN4477A	1564028V01	53725B	462.6375	0.575	-0.68	0.977	0.690	0.745	0.526	ZWS-AB-160322-08

13.3 Assessment at the Face for FRS band (467.5625 -467.7125 MHz)

Assessment at the Face were done using AA Alkaline battery and PMNN4477A rechargeable battery pack (refer to Exhibit 7B for batteries illustration). The batteries were used during conducted power measurements for all test channels within FCC allocated frequency range (467.5625 -467.7125 MHz) which are listed in Table 21.

Table 21

Test Freq (MHz)	AA Alkaline	PMNN4477A
	Power (W)	Power (W)
467.6375	0.625	0.539

Assessment of fix antenna with offered batteries with front of DUT positioned 2.5cm facing phantom was performed. SAR plots of the highest results per Table 22 (bolded) are presented in Appendix E.

Table 22

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Fixed	PMNN4477A	None	None	467.6375	0.539	-0.67	0.531	0.381	0.43	0.31	ZWS(KBK)-FACE-160323-07
Assessment of Additional Batteries											
Fixed	3xAA Alkaline	None	None	467.6375	0.625	-0.88	0.624	0.446	0.46	0.33	ZWS(KBK)-FACE-160323-08

13.4 Assessment at the Face for GMRS band (462.5500 – 462.7250 MHz) and FRS band (462.5625-462.7125 MHz)

Assessment at the Face were done using AA Alkaline battery and PMNN4477A rechargeable battery pack (refer to Exhibit 7B for batteries illustration). The batteries were used during conducted power measurements for all test channels within FCC allocated frequency range (462.5500 – 462.7250 MHz and 462.5625 – 462.7125 MHz) which are listed in Table 23.

Table 23

Test Freq (MHz)	AA Alkaline	PMNN4477A
	Power (W)	Power (W)
462.6375	0.675	0.575

Assessment of fix antenna with offered batteries with front of DUT positioned 2.5cm facing phantom was performed.

Table 24

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Fixed	PMNN4477A	None	None	462.6375	0.575	-0.62	0.537	0.385	0.40	0.29	ZWS-FACE-160323-05
Assessment of Additional Batteries											
Fixed	3xAA Alkaline	None	None	462.6375	0.68	-0.89	0.640	0.458	0.43	0.31	ZWS-FACE-160323-06

13.5 Assessment for Industry Canada

Additional tests were not required for Industry Canada frequency range as testing performed is in compliance with Industry Canada frequency range.

13.6 Shortened Scan Assessment

A “shortened” scan using the highest SAR configuration overall from above was performed to validate the SAR drift of the full DASY5™ coarse and zoom scans. Note that the shortened scan represents the zoom scan performance result; this is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a zoom scan only was performed. The results of the shortened cube scan presented in Appendix D demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid. The SAR result from the Table below is provided in Appendix E.

Table 25

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Meas. 10g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Max Calc. 10g-SAR (W/kg)	Run#
Fixed	PMNN4477A	1564028V01	53727B	467.6375	0.539	-0.41	1.11	0.785	0.85	0.60	ZWS-AB-160323-03

14.0 Simultaneous Transmission Exclusion for BT

Not applicable.

15.0 Results Summary

Based on the test guidelines from section 4.0 and satisfying frequencies within FCC bands and Industry Canada Frequency bands, the highest Operational Maximum Calculated 1-gram and 10-gram average SAR values found for this filing:

Table 26

Designator	Frequency band (MHz)	Max Calc at Body (W/kg)		Max Calc at Face (W/kg)	
		1g-SAR	10g-SAR	1g-SAR	10g-SAR
FCC / Industry Canada	462.5625 – 462.7125 (FRS)	0.75	0.53	0.43	0.31
	462.5500 – 462.7250 (GMRS)				
	467.5625 - 467.7125 (FRS)	*0.92	0.66	0.46	0.33

*The previously reported result at the body 0.88 W/kg is hereby replaced with the result presented herein.

The test results clearly demonstrate compliance with General Population / Uncontrolled RF Exposure limits of 1.6 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing.

16.0 Variability Assessment

Per the guidelines in KDB 865664 SAR variability assessment is required because SAR results are above 0.8W/kg (General population).

The Table below includes test results of the original measurement(s), the repeated measurement(s), and the ratio (SAR_{high}/SAR_{low}) for the applicable test configuration(s).

Table 27

Run#	Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq. (MHz)	Adj Calc. 1g-SAR (W/kg)	Ratio	Comments
ZR(KBK)-AB-160322-13	Fixed Antenna	PMNN4477A	1564028V01	53727B	467.6375	0.66	1.08	No additional repeated scans is required due to the Ratio (SAR_{high}/SAR_{low}) < 1.20
ZWS-AB-160323-03						0.61		

17.0 System Uncertainty

A system uncertainty analysis is not required for this report per KDB 865664 because the highest report SAR value General Population exposure is less than 1.5W/kg.

Per the guidelines of ISO 17025 a reported system uncertainty is required and therefore measurement uncertainty budget is included in Appendix A.

Appendix A

Measurement Uncertainty Budget

Table A.1: Uncertainty Budget for Device Under Test for 450 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	ci (1 g)	ci (10 g)	1 g u_i (±%)	10 g u_i (±%)	v_i
Measurement System									
Probe Calibration	E.2.1	6.7	N	1.00	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11	11	477
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				23	22	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *ci* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *ui* – SAR uncertainty
- h) *vi* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Table A.2: Uncertainty Budget for System Validation (dipole & flat phantom) for 450 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>U_i</i> (±%)	10 g <i>U_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	6.7	N	1.00	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Dipole									
Dipole Axis to Liquid Distance	8, E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8, 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
Combined Standard Uncertainty			RSS				10	9	99999
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				19	18	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u_i* – SAR uncertainty
- h) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

Appendix B
Probe Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zaughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Motorola Solutions MY**

Certificate No: **ES3-3122_Jun15**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3122**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **June 19, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41496087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastali	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 20, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical Isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

ES3DV3 – SN:3122

June 19, 2015

Probe ES3DV3

SN:3122

Manufactured: July 11, 2006
Calibrated: June 19, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ES3DV3- SN:3122

June 19, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3122

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V/m})^2$) ^A	1.34	1.22	1.42	$\pm 10.1\%$
DCP (mV) ^B	102.6	103.7	101.0	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	209.7	$\pm 3.0\%$
		Y	0.0	0.0	1.0		202.5	
		Z	0.0	0.0	1.0		200.4	
10021-DAB	GSM-FDD (TDMA, GMSK)	X	27.38	99.6	27.9	9.39	147.3	$\pm 2.5\%$
		Y	27.71	99.5	27.9		147.9	
		Z	26.04	99.6	28.1		137.2	
10023-DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	27.85	100.0	28.2	9.57	143.3	$\pm 2.5\%$
		Y	26.86	99.4	28.1		145.7	
		Z	25.87	99.3	28.0		131.5	
10024-DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	38.48	99.1	25.1	6.56	119.9	$\pm 1.9\%$
		Y	41.84	99.6	25.1		149.5	
		Z	29.41	94.8	23.6		137.4	
10025-DAB	EDGE-FDD (TDMA, 8PSK, TN 0)	X	13.71	94.1	35.6	12.62	94.9	$\pm 2.7\%$
		Y	15.75	99.6	38.3		92.3	
		Z	12.29	91.8	34.9		87.0	
10026-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	15.93	94.8	32.6	9.55	121.3	$\pm 2.5\%$
		Y	19.12	99.6	34.3		147.2	
		Z	19.09	99.8	34.3		135.4	
10027-DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	57.39	99.7	23.3	4.80	132.9	$\pm 1.9\%$
		Y	54.04	99.8	23.6		131.2	
		Z	59.21	99.7	23.1		122.7	
10028-DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	62.80	99.8	22.5	3.55	139.9	$\pm 2.2\%$
		Y	62.85	99.6	22.4		138.5	
		Z	84.57	99.8	21.6		129.1	
10029-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	16.17	94.0	30.7	7.78	137.1	$\pm 2.7\%$
		Y	19.76	99.6	33.0		134.5	
		Z	15.07	93.3	30.5		125.4	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	4.90	66.8	18.9	4.57	144.7	$\pm 1.2\%$
		Y	4.88	67.3	19.3		145.2	
		Z	4.65	66.0	18.3		136.8	
10058-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	14.14	91.7	29.2	6.52	142.1	$\pm 1.9\%$
		Y	18.83	98.5	31.7		141.2	
		Z	11.43	87.2	27.3		131.6	
10081-CAB	CDMA2000 (1xRTT, RC3)	X	3.96	65.9	18.2	3.97	138.0	$\pm 0.7\%$
		Y	3.99	66.5	18.8		138.7	
		Z	3.77	65.0	17.6		131.9	

Certificate No: ES3-3122_Jun15

Page 4 of 12

ES3DV3– SN:3122

June 19, 2015

10090-DAB	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	42.71	99.9	25.1	6.56	147.2	±1.9 %
		Y	39.29	99.6	25.2		119.4	
		Z	40.45	99.7	25.0		135.9	
10099-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	10.62	86.0	29.5	9.55	96.1	±3.0 %
		Y	15.83	97.2	34.3		96.8	
		Z	10.00	85.3	29.3		91.4	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	4.46	67.1	18.6	3.91	143.1	±0.9 %
		Y	4.40	67.5	19.0		143.6	
		Z	4.15	66.0	17.9		134.7	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	3.63	66.2	18.1	3.46	137.6	±0.7 %
		Y	3.65	66.8	18.7		138.2	
		Z	3.40	65.0	17.3		130.5	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	3.58	66.3	18.2	3.39	137.5	±0.7 %
		Y	3.63	67.1	18.8		137.8	
		Z	3.39	65.3	17.5		130.2	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	3.68	66.4	18.3	3.50	137.4	±0.7 %
		Y	3.67	66.8	18.7		138.4	
		Z	3.43	65.0	17.3		130.3	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	14.16	89.1	34.0	12.49	103.9	±2.2 %
		Y	19.23	99.8	38.9		102.8	
		Z	14.30	90.8	35.0		94.2	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	4.62	66.7	17.9	3.76	127.8	±0.7 %
		Y	4.64	67.4	18.4		127.7	
		Z	4.57	66.9	17.8		142.5	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.75	67.7	18.4	3.77	149.9	±0.7 %
		Y	4.74	68.3	18.9		149.9	
		Z	4.41	66.6	17.7		140.6	
10406-AAA	CDMA2000, RC3, SO32, SCH0, Full Rate	X	6.18	67.6	19.1	5.22	132.8	±1.2 %
		Y	6.23	68.4	19.6		132.7	
		Z	6.19	68.1	19.1		148.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^a The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 8 and 7).

^b Numerical linearization parameter: uncertainty not required.

^c Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3122

June 19, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3122

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth (mm) ^g	Unct. (k=2)
150	52.3	0.76	7.00	7.00	7.00	0.08	1.20	± 13.3 %
300	45.3	0.87	6.79	6.79	6.79	0.15	1.20	± 13.3 %
450	43.5	0.87	6.79	6.79	6.79	0.21	1.30	± 13.3 %
750	41.9	0.89	6.39	6.39	6.39	0.33	1.76	± 12.0 %
900	41.5	0.97	6.02	6.02	6.02	0.46	1.51	± 12.0 %
1810	40.0	1.40	5.07	5.07	5.07	0.59	1.40	± 12.0 %
1900	40.0	1.40	5.02	5.02	5.02	0.80	1.16	± 12.0 %
2450	39.2	1.80	4.46	4.46	4.46	0.80	1.31	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3122

June 19, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3122

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^h (mm)	Unct. (k=2)
150	61.9	0.80	6.58	6.58	6.58	0.06	1.20	± 13.3 %
300	58.2	0.92	6.71	6.71	6.71	0.12	1.30	± 13.3 %
450	56.7	0.94	6.78	6.78	6.78	0.15	1.30	± 13.3 %
750	55.5	0.96	6.06	6.06	6.06	0.55	1.38	± 12.0 %
900	55.0	1.05	5.88	5.88	5.88	0.46	1.45	± 12.0 %
1810	53.3	1.52	4.74	4.74	4.74	0.38	1.85	± 12.0 %
1900	53.3	1.52	4.63	4.63	4.63	0.43	1.76	± 12.0 %
2450	52.7	1.95	4.28	4.28	4.28	0.80	1.20	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3-SN:3122

June 19, 2015

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

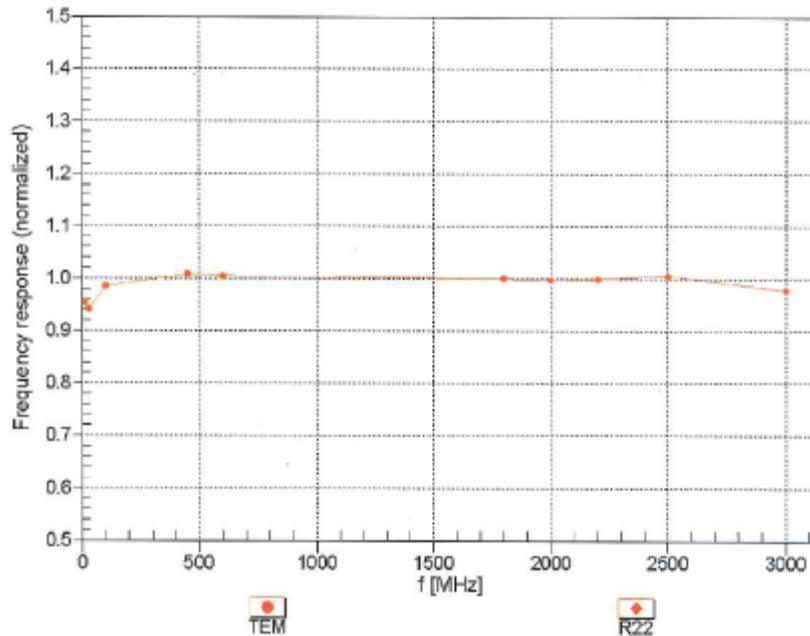

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



ES3DV3-SN:3122

June 19, 2015

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

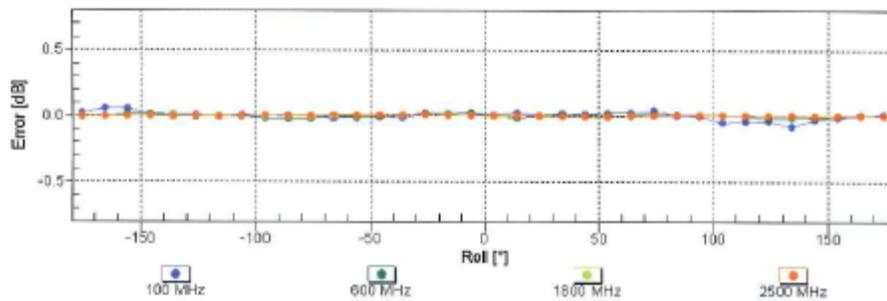
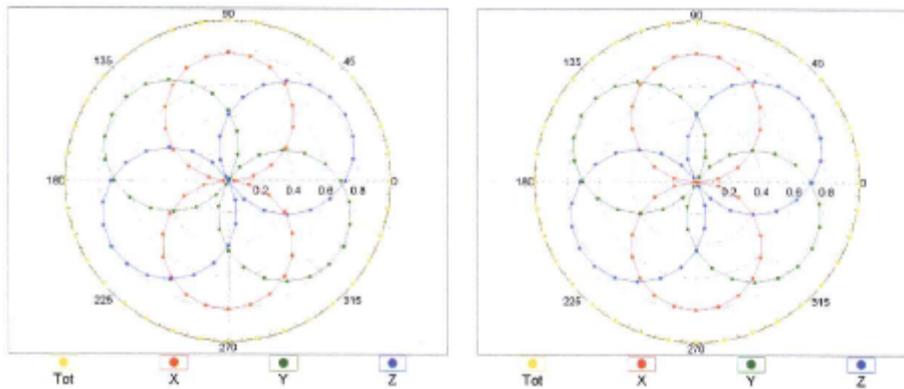


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ES3DV3-SN:3122

June 19, 2015

Dynamic Range f(SAR_{head}) (TEM cell, f_{eval}= 1900 MHz)

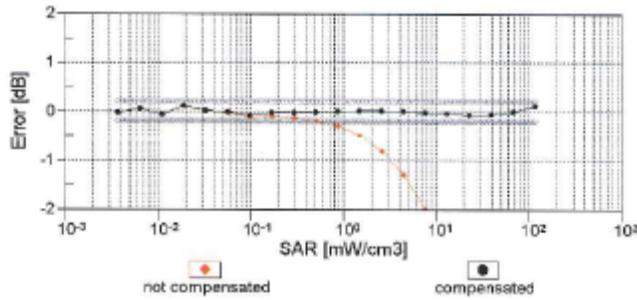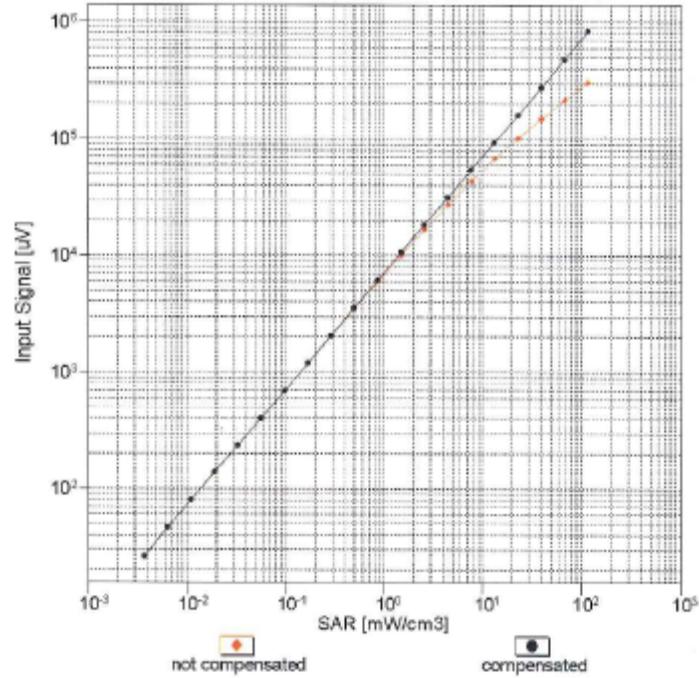


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

ES3DV3-SN:3122


June 19, 2015

Conversion Factor Assessment

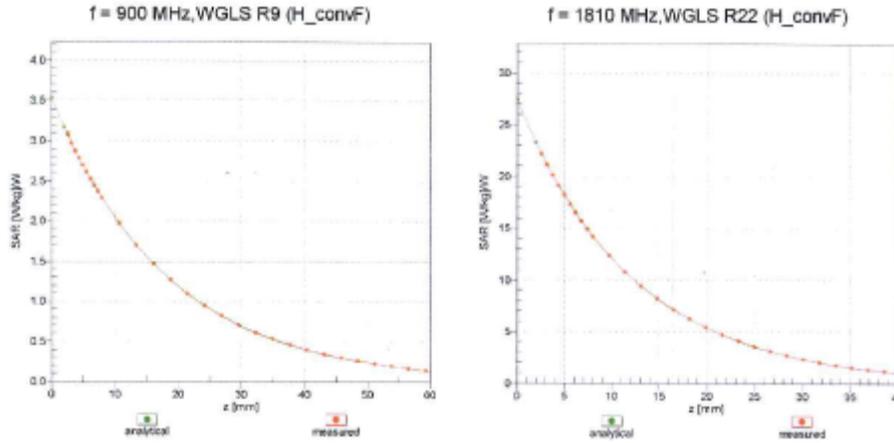

Deviation from Isotropy in Liquid

Error (ϕ, θ), f = 900 MHz

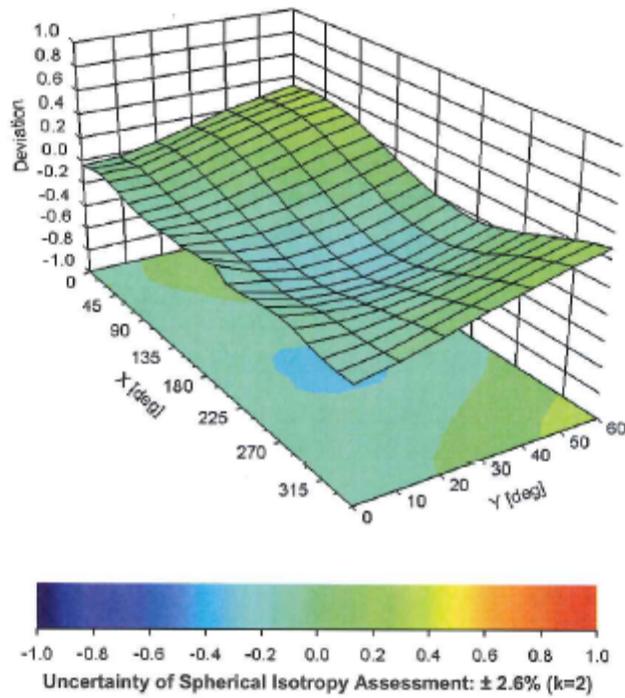

ES3DV3- SN:3122

June 19, 2015

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3122

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	24.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Motorola Solutions MY**

Certificate No: **EX3-7364_Jun15**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7364**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **June 23, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41486087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37380585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: June 24, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:7364

June 23, 2015

Probe EX3DV4

SN:7364

Manufactured: February 5, 2015
Calibrated: June 23, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:7364

June 23, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $(\mu V)/(V/m)^2$ ^A	0.48	0.46	0.59	± 10.1 %
DCP (mV) ^B	97.7	96.3	97.3	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	115.0	±3.5 %
		Y	0.0	0.0	1.0		110.5	
		Z	0.0	0.0	1.0		124.6	
10011-CAB	UMTS-FDD (WCDMA)	X	3.42	67.2	16.6	2.91	122.6	±0.5 %
		Y	3.14	64.8	16.9		117.5	
		Z	3.48	67.3	18.5		135.3	
10012-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	2.86	68.1	18.5	1.87	122.4	±0.5 %
		Y	2.39	63.9	15.8		117.3	
		Z	3.01	69.0	18.8		135.0	
10013-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	10.47	68.7	22.2	9.46	115.4	±2.7 %
		Y	10.30	68.1	21.6		107.3	
		Z	10.58	69.3	22.6		126.2	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	3.03	69.0	19.0	2.12	120.5	±0.5 %
		Y	2.58	65.1	16.6		115.0	
		Z	2.93	68.2	18.4		133.3	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	3.74	77.3	22.8	2.83	148.9	±0.5 %
		Y	2.75	70.3	19.2		141.7	
		Z	3.40	75.1	21.8		118.0	
10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	3.83	73.4	21.4	3.60	145.6	±0.7 %
		Y	3.06	68.2	18.5		139.1	
		Z	3.96	74.0	21.7		117.9	
10062-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	10.17	68.5	21.5	8.68	116.8	±2.5 %
		Y	9.91	67.6	20.8		107.4	
		Z	10.39	69.3	22.0		132.5	
10063-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	10.01	68.4	21.4	8.63	116.3	±2.5 %
		Y	9.85	67.7	20.9		108.8	
		Z	10.24	69.2	22.0		131.7	
10064-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	10.46	68.7	21.9	9.09	117.4	±2.7 %
		Y	10.34	68.2	21.3		110.7	
		Z	10.69	69.6	22.5		132.1	
10065-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	10.10	68.4	21.7	9.00	113.5	±2.5 %
		Y	10.01	68.0	21.2		107.5	
		Z	10.29	69.2	22.2		127.6	
10066-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	10.32	68.7	22.1	9.38	113.2	±2.5 %
		Y	10.20	68.1	21.6		106.0	
		Z	10.49	69.4	22.6		125.8	

Certificate No: EX3-7364_Jun15

Page 4 of 18

EX3DV4- SN:7364

June 23, 2015

10067-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	10.83	69.1	22.8	10.12	111.9	±3.0 %
		Y	10.70	68.6	22.3		105.5	
		Z	11.04	70.0	23.5		125.5	
10068-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	10.64	69.0	22.9	10.24	108.5	±3.3 %
		Y	11.07	70.0	23.2		145.3	
		Z	10.83	69.9	23.5		121.7	
10069-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	10.95	69.2	23.2	10.56	109.6	±3.5 %
		Y	11.36	70.3	23.6		148.1	
		Z	11.13	70.1	23.8		122.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	10.46	68.7	22.4	9.83	110.6	±2.5 %
		Y	10.36	68.2	21.9		105.8	
		Z	10.71	69.6	23.1		124.2	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	10.01	68.4	22.2	9.62	106.7	±3.0 %
		Y	10.38	69.2	22.4		144.1	
		Z	10.18	69.1	22.7		119.4	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	10.78	70.9	23.9	9.94	149.7	±3.0 %
		Y	10.27	69.1	22.6		139.1	
		Z	10.17	69.3	23.1		115.9	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	10.82	71.0	24.2	10.30	144.0	±3.3 %
		Y	10.30	69.2	22.9		133.6	
		Z	10.22	69.5	23.4		111.6	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	10.91	71.3	24.8	10.77	138.9	±3.3 %
		Y	10.34	69.2	23.3		129.4	
		Z	10.31	69.7	23.9		108.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	10.84	71.1	24.9	10.94	134.9	±3.3 %
		Y	10.25	69.0	23.3		125.9	
		Z	10.28	69.7	24.1		106.3	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	10.81	71.1	24.9	11.00	133.2	±3.5 %
		Y	10.23	69.1	23.4		124.7	
		Z	11.06	72.3	25.8		148.3	
10097-CAB	UMTS-FDD (HSDPA)	X	4.84	66.4	18.3	3.98	129.4	±0.7 %
		Y	4.47	65.1	17.4		126.4	
		Z	4.82	67.2	18.8		144.7	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	4.86	66.5	18.4	3.98	130.1	±0.7 %
		Y	4.50	65.3	17.5		126.7	
		Z	4.78	67.0	18.7		145.5	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.59	67.6	19.7	5.67	136.1	±1.4 %
		Y	6.37	66.4	18.8		131.7	
		Z	6.14	66.0	18.9		107.5	
10101-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	7.68	67.9	20.1	6.42	146.1	±1.7 %
		Y	7.50	67.0	19.4		140.3	
		Z	7.24	66.6	19.5		115.2	
10102-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	8.00	68.2	20.4	6.60	148.5	±1.7 %
		Y	7.78	67.2	19.6		141.8	
		Z	7.54	66.9	19.7		117.4	

Certificate No: EX3-7364_Jun15

Page 5 of 18

EX3DV4- SN:7364

June 23, 2015

10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.41	67.0	19.5	5.80	133.0	±1.2 %
		Y	6.24	66.1	18.8		128.4	
		Z	6.04	65.7	18.9		106.2	
10109-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	7.40	67.6	20.0	6.43	141.0	±1.7 %
		Y	7.23	66.7	19.3		135.5	
		Z	6.98	66.3	19.4		111.0	
10110-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	6.05	66.5	19.2	5.75	129.1	±1.4 %
		Y	5.89	65.5	18.5		124.3	
		Z	6.26	67.4	19.8		145.9	
10111-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	7.12	67.4	20.0	6.44	136.5	±1.4 %
		Y	6.94	66.5	19.2		130.6	
		Z	6.69	66.0	19.3		107.3	
10112-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	7.64	67.8	20.2	6.59	142.4	±1.7 %
		Y	7.46	66.9	19.5		136.7	
		Z	7.21	66.5	19.6		111.3	
10113-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.32	67.5	20.1	6.62	137.7	±1.7 %
		Y	7.15	66.6	19.4		131.4	
		Z	6.92	66.2	19.4		108.9	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	10.23	68.5	21.0	8.10	124.2	±2.5 %
		Y	10.04	67.9	20.5		117.0	
		Z	10.56	69.5	21.7		142.7	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	10.80	69.1	21.5	8.46	128.6	±2.5 %
		Y	10.61	68.5	21.0		120.9	
		Z	11.08	70.0	22.1		145.6	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	10.31	68.7	21.1	8.15	125.0	±2.5 %
		Y	10.13	68.1	20.6		118.2	
		Z	10.59	69.6	21.7		142.4	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	10.27	68.6	21.1	8.07	125.9	±2.5 %
		Y	10.08	68.0	20.5		119.0	
		Z	10.52	69.4	21.6		142.8	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	10.91	69.2	21.7	8.59	128.3	±2.5 %
		Y	10.70	68.6	21.1		121.2	
		Z	11.21	70.2	22.3		146.3	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	10.27	68.6	21.1	8.13	125.1	±2.5 %
		Y	10.10	68.0	20.6		118.1	
		Z	10.57	69.6	21.7		142.8	
10140-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	7.93	68.3	20.4	6.49	147.7	±1.7 %
		Y	7.73	67.4	19.6		142.8	
		Z	7.42	66.8	19.6		116.6	
10141-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	8.04	68.2	20.3	6.53	149.1	±1.7 %
		Y	7.84	67.4	19.6		143.2	
		Z	7.56	66.9	19.7		117.6	
10142-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	5.83	66.2	19.1	5.73	125.7	±1.2 %
		Y	5.68	65.2	18.4		121.2	
		Z	6.04	67.0	19.6		142.9	

Certificate No: EX3-7364_Jun15

Page 6 of 18

EX3DV4- SN:7364

June 23, 2015

10143-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	6.82	67.3	19.9	6.35	131.4	±1.4 %
		Y	6.65	66.3	19.1		126.5	
		Z	7.04	68.1	20.4		148.1	
10144-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	7.15	67.5	20.1	6.65	132.6	±1.4 %
		Y	6.96	66.6	19.4		127.2	
		Z	7.36	68.4	20.7		149.1	
10145-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	5.54	65.9	19.0	5.76	120.5	±1.2 %
		Y	5.42	65.1	18.3		116.1	
		Z	5.76	66.9	19.6		135.7	
10146-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	6.48	67.3	19.9	6.41	124.0	±1.4 %
		Y	6.28	66.2	19.1		119.2	
		Z	6.70	68.1	20.4		140.0	
10147-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	6.74	67.4	20.1	6.72	124.3	±1.7 %
		Y	6.55	66.4	19.4		119.3	
		Z	6.97	68.3	20.7		140.2	
10149-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	7.35	67.4	19.9	6.42	138.2	±1.4 %
		Y	7.17	66.5	19.2		133.3	
		Z	6.97	66.3	19.4		109.6	
10150-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	7.61	67.7	20.1	6.60	140.5	±1.4 %
		Y	7.45	66.9	19.5		135.0	
		Z	7.22	66.5	19.6		112.4	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.03	66.4	19.2	5.75	127.0	±1.4 %
		Y	5.85	65.3	18.4		122.3	
		Z	6.24	67.3	19.8		145.2	
10155-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	7.06	67.2	19.8	6.43	134.1	±1.4 %
		Y	6.91	66.4	19.2		128.7	
		Z	6.69	66.1	19.3		107.1	
10156-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	5.76	66.0	19.1	5.79	123.3	±1.2 %
		Y	5.63	65.1	18.3		118.7	
		Z	5.97	67.0	19.7		139.3	
10157-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	6.80	67.2	19.9	6.49	128.7	±1.4 %
		Y	6.62	66.3	19.2		123.2	
		Z	6.99	68.0	20.4		144.9	
10158-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	7.30	67.4	20.0	6.62	134.5	±1.4 %
		Y	7.12	66.5	19.3		129.0	
		Z	6.91	66.3	19.5		107.5	
10159-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	6.91	67.4	20.0	6.56	129.3	±1.4 %
		Y	6.69	66.3	19.2		123.1	
		Z	7.12	68.2	20.5		145.9	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.54	67.1	19.6	5.82	132.9	±1.4 %
		Y	6.29	65.9	18.7		126.6	
		Z	6.71	67.9	20.0		149.3	
10161-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	7.41	67.6	20.0	6.43	139.7	±1.7 %
		Y	7.22	66.6	19.3		133.2	
		Z	6.97	66.2	19.3		110.0	

Certificate No: EX3-7364_Jun15

Page 7 of 18

EX3DV4- SN:7364

June 23, 2015

10162-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	7.66	67.9	20.2	6.58	141.5	±1.7 %
		Y	7.48	67.0	19.5		134.6	
		Z	7.18	66.4	19.5		112.1	
10166-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.96	65.8	18.8	5.46	115.4	±0.9 %
		Y	4.76	64.5	17.9		110.2	
		Z	5.13	66.5	19.3		130.4	
10167-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.82	66.9	19.6	6.21	117.4	±1.2 %
		Y	5.60	65.7	18.8		109.9	
		Z	6.07	67.9	20.3		132.7	
10168-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.28	67.1	20.0	6.79	117.2	±1.4 %
		Y	6.06	66.0	19.2		111.0	
		Z	6.49	67.9	20.6		132.0	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.78	65.8	19.1	5.73	109.6	±1.2 %
		Y	4.92	66.1	19.0		145.3	
		Z	4.94	66.5	19.6		123.2	
10170-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	5.36	66.3	19.7	6.52	107.4	±1.4 %
		Y	5.59	67.0	19.8		142.7	
		Z	5.61	67.4	20.4		121.7	
10171-AAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	5.38	66.5	19.7	6.49	107.3	±1.4 %
		Y	5.59	67.1	19.8		144.6	
		Z	5.64	67.6	20.4		121.5	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.71	65.4	18.8	5.72	107.7	±1.2 %
		Y	4.91	66.0	18.9		144.8	
		Z	4.91	66.3	19.4		122.3	
10176-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	5.78	68.1	20.6	6.52	149.6	±1.4 %
		Y	5.57	66.9	19.7		142.9	
		Z	5.65	67.6	20.5		121.7	
10177-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	5.05	67.1	19.7	5.73	150.0	±1.2 %
		Y	4.91	66.0	18.9		144.6	
		Z	4.93	66.5	19.5		122.4	
10178-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	5.80	68.2	20.7	6.52	149.3	±1.4 %
		Y	5.59	67.0	19.8		142.5	
		Z	5.63	67.5	20.4		121.7	
10179-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	5.80	68.3	20.7	6.50	149.2	±1.4 %
		Y	5.62	67.2	19.9		144.9	
		Z	5.61	67.5	20.4		121.4	
10180-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	5.80	68.3	20.7	6.50	148.6	±1.4 %
		Y	5.60	67.1	19.8		144.4	
		Z	5.63	67.5	20.4		121.6	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	5.04	67.0	19.7	5.72	149.4	±1.2 %
		Y	4.94	66.2	19.1		145.6	
		Z	4.92	66.4	19.5		122.1	
10182-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	5.79	68.2	20.7	6.52	148.9	±1.4 %
		Y	5.57	66.9	19.7		142.2	
		Z	5.63	67.5	20.5		121.0	

Certificate No: EX3-7364_Jun15

Page 8 of 18

EX3DV4- SN:7364

June 23, 2015

10183-AAA	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	5.81	68.4	20.8	6.50	148.4	±1.4 %
		Y	5.62	67.2	19.9		144.3	
		Z	5.62	67.5	20.4		121.1	
10184-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	5.06	67.1	19.8	5.73	149.2	±1.2 %
		Y	4.91	66.0	18.9		144.9	
		Z	4.94	66.5	19.5		122.0	
10185-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	5.77	68.1	20.6	6.51	148.4	±1.4 %
		Y	5.57	66.9	19.8		142.5	
		Z	5.62	67.5	20.4		121.5	
10186-AAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	5.81	68.4	20.8	6.50	148.0	±1.7 %
		Y	5.63	67.3	19.9		144.7	
		Z	5.60	67.5	20.3		121.0	
10187-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	5.07	67.1	19.8	5.73	149.3	±1.2 %
		Y	4.94	66.2	19.0		145.6	
		Z	4.91	66.3	19.4		122.3	
10188-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	5.79	68.2	20.7	6.52	148.1	±1.7 %
		Y	5.57	66.9	19.7		142.5	
		Z	5.61	67.4	20.4		121.2	
10189-AAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	5.83	68.5	20.8	6.50	148.1	±1.4 %
		Y	5.60	67.1	19.8		144.5	
		Z	5.64	67.6	20.4		121.5	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	9.64	67.7	20.6	8.09	112.5	±2.2 %
		Y	9.63	67.5	20.3		109.6	
		Z	10.04	68.9	21.4		132.4	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	9.78	68.0	20.9	8.12	116.1	±2.2 %
		Y	9.67	67.5	20.4		110.9	
		Z	10.06	68.9	21.5		131.8	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	9.93	68.3	21.0	8.21	117.1	±2.5 %
		Y	9.81	67.7	20.5		112.3	
		Z	10.19	69.1	21.5		134.2	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.73	68.0	20.8	8.10	116.3	±2.2 %
		Y	9.62	67.5	20.3		111.7	
		Z	10.01	68.9	21.4		132.6	
10197-CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	9.77	68.0	20.8	8.13	116.4	±2.2 %
		Y	9.75	67.7	20.5		111.4	
		Z	10.10	69.0	21.5		132.9	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	9.96	68.2	21.0	8.27	117.4	±2.5 %
		Y	9.88	67.8	20.6		112.8	
		Z	10.29	69.3	21.7		135.1	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	9.62	67.9	20.8	8.03	116.5	±2.2 %
		Y	9.53	67.4	20.3		111.0	
		Z	9.94	68.9	21.4		132.9	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	9.81	68.1	20.9	8.13	117.2	±2.2 %
		Y	9.70	67.6	20.4		111.6	
		Z	10.10	69.0	21.5		134.0	

Certificate No: EX3-7364_Jun15

Page 9 of 18

EX3DV4- SN:7364

June 23, 2015

10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	9.97	68.2	21.0	8.27	118.3	±2.5 %
		Y	9.89	67.8	20.6		112.7	
		Z	10.29	69.2	21.7		135.4	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	10.14	68.4	20.9	8.06	122.8	±2.5 %
		Y	10.02	67.9	20.5		116.9	
		Z	10.48	69.4	21.6		140.6	
10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	10.72	69.0	21.4	8.48	126.2	±2.5 %
		Y	10.54	68.3	20.9		119.3	
		Z	11.04	69.9	22.1		143.9	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	10.13	68.4	20.9	8.08	123.4	±2.5 %
		Y	10.01	68.0	20.5		115.7	
		Z	10.44	69.3	21.5		140.3	
10225-CAB	UMTS-FDD (HSPA+)	X	7.19	67.5	19.6	5.97	143.8	±1.4 %
		Y	7.05	66.7	19.0		138.4	
		Z	6.78	66.2	19.0		112.5	
10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP RelB.10)	X	6.03	66.9	18.8	4.87	136.9	±1.2 %
		Y	5.89	66.1	18.1		131.5	
		Z	5.76	66.1	18.5		109.1	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP RelB.4)	X	4.32	65.7	18.0	3.96	119.3	±0.9 %
		Y	4.16	64.5	17.1		112.7	
		Z	4.57	66.9	18.7		136.2	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.29	66.6	19.2	5.81	126.9	±1.4 %
		Y	6.12	65.6	18.5		120.7	
		Z	6.52	67.5	19.8		142.9	
10298-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	5.62	66.1	19.1	5.72	120.8	±1.2 %
		Y	5.44	65.0	18.3		115.1	
		Z	5.80	66.9	19.6		136.0	
10299-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	6.55	67.1	19.8	6.39	125.4	±1.4 %
		Y	6.35	66.1	19.0		119.2	
		Z	6.82	68.2	20.5		140.5	
10300-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	6.73	67.3	20.0	6.60	125.1	±1.4 %
		Y	6.53	66.3	19.2		118.8	
		Z	6.99	68.2	20.6		140.9	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.94	67.4	19.7	6.06	135.3	±1.4 %
		Y	6.75	66.4	19.0		129.1	
		Z	6.55	66.2	19.2		106.3	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	2.71	67.3	17.7	1.71	120.4	±0.5 %
		Y	2.36	64.0	15.7		114.8	
		Z	2.97	68.9	18.7		133.5	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	9.89	68.1	21.1	8.36	116.2	±2.5 %
		Y	9.75	67.5	20.5		108.9	
		Z	10.15	69.0	21.6		131.4	
10317-AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	9.89	68.1	21.1	8.36	116.7	±2.5 %
		Y	9.76	67.6	20.6		110.0	
		Z	10.16	69.0	21.7		132.3	

Certificate No: EX3-7364_Jun15

Page 10 of 18

EX3DV4- SN:7364

June 23, 2015

10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	2.58	66.6	17.4	1.54	122.6	±0.5 %
		Y	2.36	64.2	15.8		117.2	
		Z	2.79	68.0	18.2		136.1	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	9.83	68.1	21.0	8.23	117.6	±2.2 %
		Y	9.72	67.6	20.5		110.8	
		Z	10.12	69.0	21.6		132.8	
10417-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	9.82	68.1	20.9	8.23	117.7	±2.2 %
		Y	9.76	67.7	20.5		111.5	
		Z	10.11	69.0	21.6		133.6	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	9.69	68.0	20.9	8.14	116.8	±2.2 %
		Y	9.59	67.5	20.4		110.3	
		Z	9.95	68.8	21.4		131.4	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	9.78	68.1	20.9	8.19	117.3	±2.2 %
		Y	9.70	67.6	20.5		111.1	
		Z	10.04	68.9	21.5		132.4	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	10.03	68.4	21.1	8.32	119.6	±2.5 %
		Y	9.90	67.7	20.6		112.6	
		Z	10.29	69.2	21.7		133.6	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	10.19	68.5	21.3	8.47	120.0	±2.5 %
		Y	10.08	68.0	20.8		112.9	
		Z	10.43	69.3	21.8		134.2	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	10.08	68.4	21.2	8.40	119.6	±2.5 %
		Y	9.96	67.8	20.7		112.6	
		Z	10.33	69.2	21.8		133.7	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	10.62	68.9	21.4	8.41	126.1	±2.7 %
		Y	10.42	68.2	20.8		117.7	
		Z	10.92	69.8	22.0		142.2	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	10.66	69.0	21.5	8.45	126.5	±2.7 %
		Y	10.43	68.2	20.8		118.2	
		Z	10.95	69.8	22.0		142.5	
10427-AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	10.65	69.0	21.4	8.41	126.9	±2.7 %
		Y	10.40	68.2	20.8		118.2	
		Z	10.92	69.8	22.0		142.7	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	9.04	67.7	21.1	8.60	103.3	±2.7 %
		Y	9.68	69.3	21.7		143.5	
		Z	9.37	66.8	21.8		116.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 12 and 13).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.