



**DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 1 of 2**

**Motorola Solutions Inc.**  
**EME Test Laboratory**  
 Motorola Solutions Malaysia Sdn Bhd (Innoplex)  
 Plot 2A, Medan Bayan Lepas,  
 Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.

**Date of Report:** 06/03/2019  
**Report Revision:** A

**Responsible Engineer:** Ch'ng Jian Sheng (EME Engineer)  
**Report Author:** Ch'ng Jian Sheng (EME Engineer)  
**Date/s Tested:** 05/16/2019 - 05/17/2019, 05/20/2019 - 05/22/2019  
**Manufacturer:** Motorola Solutions Inc.  
**DUT Description:** Handheld Portable – DEP 250 403-480M 4W NKP  
**Test TX mode(s):** CW (PTT)  
**Max. Power output:** 4.8W  
**Nominal Power:** 4.0W  
**Tx Frequency Bands:** LMR 403-480 MHz  
**Signaling type:** FM  
**Model(s) Tested:** PMUE4526B  
**Model(s) Certified:** LAH87YDC9JA2AN (PMUE4526B)  
**Serial Number(s):** 278TUH0164  
**Classification:** Occupational/Controlled  
**FCC ID:** AZ489FT4953; LMR 403-480MHz  
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.  
**FCC Test Firm Registration Number:** 823256

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of FCC 47 CFR § 2.1093.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report (no deviation from standard methods). This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory.  
 I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

*Tiong*  
**Tiong Nguk Ing**  
**Deputy Technical Manager (Approved Signatory)**  
**Approval Date:** 6/24/2019

**Part 1 of 2**

1.0 Introduction..... 4

2.0 FCC SAR Summary..... 4

3.0 Abbreviations / Definitions..... 4

4.0 Referenced Standards and Guidelines ..... 5

5.0 SAR Limits ..... 6

6.0 Description of Device Under Test (DUT) ..... 6

7.0 Optional Accessories and Test Criteria ..... 7

    7.1 Antennas ..... 7

    7.2 Batteries ..... 7

    7.3 Body worn Accessories ..... 8

    7.4 Audio Accessories ..... 8

8.0 Description of Test System..... 9

    8.1 Descriptions of Robotics/Probes/Readout Electronics ..... 9

    8.2 Description of Phantom(s) ..... 10

    8.3 Description of Simulated Tissue..... 10

9.0 Additional Test Equipment..... 11

10.0 SAR Measurement System Validation and Verification ..... 12

    10.1 System Validation..... 12

    10.2 System Verification ..... 12

    10.3 Equivalent Tissue Test Results..... 13

11.0 Environmental Test Conditions ..... 13

12.0 DUT Test Setup and Methodology..... 14

    12.1 Measurements ..... 14

    12.2 DUT Configuration(s) ..... 14

    12.3 DUT Positioning Procedures ..... 14

        12.3.1 Body..... 14

        12.3.2 Head..... 15

        12.3.3 Face..... 15

    12.4 DUT Test Channels ..... 15

    12.5 SAR Result Scaling Methodology..... 15

    12.6 DUT Test Plan ..... 15

13.0 DUT Test Data..... 16

    13.1 LMR assessments at the Body for 406.125-480MHz band..... 16

    13.2 LMR assessments at the Face for 406.125-480MHz band..... 26

    13.3 Shortened Scan Assessment ..... 28

    13.4 Assessment for Outside FCC Part 90 ..... 28

14.0 Results Summary ..... 29

15.0 Variability Assessment..... 29

16.0 System Uncertainty..... 29

**APPENDICES**

A Measurement Uncertainty Budget ..... 30  
 B Probe Calibration Certificates..... 33  
 C Dipole Calibration Certificates ..... 49

**Part 2 of 2**

**APPENDICES**

D System Verification Check Scans..... 2  
 E DUT Scans..... 9  
 F Shorten Scan of Highest SAR Configuration ..... 18  
 G DUT Test Position Photos ..... 20  
 H DUT, Body worn and audio accessories Photos..... 21

**Report Revision History**

Date	Revision	Comments
06/03/2019	A	Initial release

## 1.0 Introduction

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the Motorola Solutions Inc. EME Test Laboratory for handheld portable model number PMUE4526B. This device is classified as Occupational/Controlled.

## 2.0 FCC SAR Summary

**Table 1**

Equipment Class	Frequency band (MHz)	Max Calc at Body (W/kg)	Max Calc at Face (W/kg)
		1g-SAR	1g-SAR
TNF	406.125-480 (LMR)	4.36	3.92

## 3.0 Abbreviations / Definitions

CNR: Calibration Not Required  
 CW: Continuous Wave  
 DUT: Device Under Test  
 EME: Electromagnetic Energy  
 FM: Frequency Modulation  
 LMR: Land Mobile Radio  
 NA: Not Applicable  
 PTT: Push to Talk  
 RSM: Remote Speaker Microphone  
 SAR: Specific Absorption Rate  
 TNF: Licensed Non-Broadcast Transmitter Held to Face  
 RF: Radio Frequency  
 NKP: Non-Keypad

**Audio accessories:** These accessories allow communication while the DUT is worn on the body.

**Body worn accessories:** These accessories allow the DUT to be worn on the body of the user.

**Maximum Power:** Defined as the upper limit of the production line final test station.

#### 4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1 (2016) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C.: 1997.
- IEEE 1528 (2013), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronics Engineers (IEEE) C95.1-2005
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 5) – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
- Australian Communications Authority Radio communications (Electromagnetic Radiation - Human Exposure) Standard (2014)
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9 kHz and 300 GHz." and “Attachment to resolution # 303 from July 2, 2002”
- IEC62209-2 Edition 1.0 2010-03, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz).
- FCC KDB - 643646 D01 SAR Test for PTT Radios v01r03
- FCC KDB - 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB - 865664 D02 RF Exposure Reporting v01r02
- FCC KDB - 447498 D01 General RF Exposure Guidance v06
- FCC KDB - 648474 D04 Handset SAR v01r03

## 5.0 SAR Limits

**Table 2**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.6	8.0
Spatial Peak – ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Spatial Peak - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

## 6.0 Description of Device Under Test (DUT)

Model PMUE4526B operates using analog frequency modulation (FM) signaling incorporating traditional simplex two-way radio transmission protocol.

This device operates in a half duplex system. A half duplex system only allows the user to transmit or receive. This device cannot transmit and receive simultaneously. The user must stop transmitting in order to receive a signal or listen for a response, regardless of PTT button or use of voice activated audio accessories. This type of operation, along with the RF safety booklet, which instructs the user to transmit no more than 50% of the time, justifies the use of 50% duty factor for this device.

The model represented under this filing utilizes removable antennas and capable of transmitting in the 403-480 MHz band respectively. The nominal output power is 4.0 watts with maximum output power of 4.8 watts defined by upper limit of the production line final test station.

The intended operating positions are “at the face” with the DUT at least 2.5 cm from the mouth, and “at the body” by means of the offered body worn accessories. Body worn audio and PTT operation is accomplished by means of optional accessories that are connected to the radio.

## 7.0 Optional Accessories and Test Criteria

This device is offered with optional accessories. All accessories were individually evaluated during the test plan creation to determine if testing was required per the guidelines outlined in “SAR Test Reduction Considerations for Occupational PTT Radios” FCC KDB 643646 to assess compliance of this device. The following sections identify the test criteria and details for each accessory category. Refer to Exhibit 7B for antenna separation distances.

### 7.1 Antennas

There are optional removable antennas offered for this product. The Table below lists their descriptions.

**Table 3**

Antenna No.	Antenna Models	Description	Selected for test	Tested
1	PMAE4002A	UHF Stubby Antenna 403-433MHz, 1/4 wave, -1dBi gain	Yes	Yes
2	PMAE4003A	UHF Stubby Antenna 430-470MHz, 1/4 wave, -1dBi gain	Yes	Yes
3	PMAE4006A	UHF Stubby Antenna 465-495MHz, 1/4 wave, -1dBi gain	Yes	Yes
4	PMAE4016A	UHF Whip Antenna, Stamped metal, 403-520MHz, 1/4 wave, 0dBi gain	Yes	Yes

### 7.2 Batteries

There are four batteries offered for this product. The Table below lists their descriptions.

**Table 4**

Battery No.	Battery Models	Description	Selected for test	Tested	Comments
1	PMNN4080A	Li-ion battery, IP54, 2250mAh typical	Yes	Yes	Default battery for face testing
2	PMNN4081B	Li-ion battery, IP54, 1700mAh typical	Yes	Yes	
3	PMNN4092A	NiMH battery, IP54, 1400mAh typical	Yes	Yes	
4	PMNN4476A	Li-ion battery, IP54, 1750mAh typical	Yes	Yes	Default battery for body testing

### 7.3 Body worn Accessories

All body worn accessories were considered. The Table below lists the body worn accessories, and body worn accessory descriptions.

**Table 5**

Body worn No.	Body worn Models	Description	Selected for test	Tested	Comments
1	HLN6602A	Universal chest pack	Yes	Yes	
2	HLN9844A	Spring action belt clip 2.0	Yes	Yes	
3	NTN5243A	Carry strap	Yes	Yes	Tested with PMLN7075A
4	PMLN7075A	Nylon carry case	Yes	Yes	Tested with NTN5243A
5	RLN4570A	Breakaway chest pack	Yes	Yes	
6	RLN4815A	Fanny pack carry accessory	Yes	Yes	

### 7.4 Audio Accessories

All audio accessories were considered. The Table below lists the offered audio accessories and their descriptions. Exhibit 7B illustrates photos of the tested audio accessories.

**Table 6**

Audio No.	Audio Acc. Models	Description	Selected for test	Tested	Comments
1	PMMN4092A	RSM, MagOne	Yes	Yes	Default Audio
2	PMLN6531A	Earpiece with in-lin mic/PTT/VOX, MagOne	Yes	Yes	
3	PMLN6532A	Swivel earpiece with mic/PTT, MagOne	Yes	Yes	
4	PMLN6854A	Behind the head heavy duty headset/VOX, 2 pin	Yes	Yes	
5	PMLN6541A	Lightweight temple transducer headset	Yes	Yes	
6	PMLN6538A	Lightweight headset with swivel boom mic	Yes	Yes	
7	PMLN6537A	Earset, Boom mic, in-line PTT/VOX, MagOne	Yes	Yes	
8	PMMN4013A	RSM, rx-jack (2pin)	Yes	Yes	Tested with RLN4941A
9	RLN4941A	Receive only earpiece with translucent tube and rubber eartip for RSM	Yes	Yes	Tested with PMMN4013A
10	PMLN6530A	2-wire with translucent tube, black	Yes	Yes	
11	PMLN6533A	Earset with combined mic/PTT	No	No	By similarity to PMLN6530A
12	PMLN6534A	Earbudd with in-lin mic/PTT/VOX, MagOne	No	No	By similarity to PMLN6531A
13	PMLN6535A	D-style earpiece with mic/PTT	No	No	By similarity to PMLN6530A
14	PMLN6536A	2-wire with translucent tube, black	No	No	By similarity to PMLN6530A
15	PMLN6542A	Breeze headset with boom mic & PTT, MagOne	No	No	By similarity to PMLN6537A



**Table 6 (Continued)**

Audio No.	Audio Acc. Models	Description	Selected for test	Tested	Comments
16	PMLN7468A	Over the head heavy duty headset/VOX, 2pin	No	No	By similarity to PMLN6854A
17	PMMN4029A	RSM, IP57 (2 pin)	No	No	By similarity to PMMN4013A
18	PMLN6445A	2-wire with clear acoustic earpieces, beige	No	No	By similarity to PMLN6530A

**8.0 Description of Test System**



**8.1 Descriptions of Robotics/Probes/Readout Electronics**

**Table 7**

Dosimetric System type	System version	DAE type	Probe Type
Schmid & Partner Engineering AG SPEAG DASY 5	52.10.2.1495	DAE4	EX3DV4 (E-Field)

The DASY5™ system is operated per the instructions in the DASY5™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess SAR compliance was calibrated according to ISO/IEC 17025 A2LA guidelines. Section 9.0 presents additional test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

### 8.2 Description of Phantom(s)

**Table 8**

Phantom Type	Phantom(s) Used	Material Parameters	Phantom Dimensions LxWxD (mm)	Material Thickness (mm)	Support Structure Material	Loss Tangent (wood)
Triple Flat	NA	200MHz -6GHz; Er = 3-5, Loss Tangent = ≤0.05	280x175x175	2mm +/- 0.2mm	Wood	< 0.05
SAM	NA	300MHz -6GHz; Er = < 5, Loss Tangent = ≤0.05	Human Model			
Oval Flat	√	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = ≤0.05	600x400x190			

### 8.3 Description of Simulated Tissue

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

The simulated tissue mixture was mixed based on the Simulated Tissue Composition indicated in Table 10. During the daily testing of this product, the applicable mixture was used to measure the Di-electric parameters at each of the tested frequencies to verify that the Di-electric parameters were within the tolerance of the tissue specifications.

#### Simulated Tissue Composition (% by mass)

**Table 9**

Ingredients	450MHz	
	Head	Body
Sugar	56.0	46.5
De ionized –Water	39.1	50.53
Salt	3.8	1.87
HEC	1.0	1.0
Bact.	0.1	0.1

## 9.0 Additional Test Equipment

The Table below lists additional test equipment used during the SAR assessment.

**Table 10**

Equipment Type	Model Number	Serial Number	Calibration Date	Calibration Due Date
SPEAG Probe	EX3DV4	7364	01/23/2019	01/23/2020
SPEAG DAE	DAE4	1483	01/10/2019	01/10/2020
Amplifier	10W1000C	312859	CNR	CNR
Power Meter*	E4418B	MY45107917	05/22/2017	05/22/2019
Power Meter	E4418B	GB40206480	09/16/2018	09/16/2019
Power Meter	E4419B	MY40330364	09/16/2017	09/16/2019
Power Sensor	E9301B	MY50280001	07/05/2018	07/05/2019
Power Sensor	E9301B	MY55210006	12/19/2018	12/19/2019
Power Sensor	E9301B	MY41495594	08/15/2018	08/15/2019
Temperature & Humidity Logger	TM320	12253047	10/30/2018	10/30/2019
Thermometer	HH806AU	080307	12/05/2018	12/05/2019
Thermometer	HH202A	35881	12/26/2018	12/26/2019
Temperature Probe	80PK-22	06032017	12/05/2018	12/05/2019
Temperature Probe	80PK-22	05032017	12/26/2018	12/26/2019
Network Analyzer	E5071B	MY42403218	09/06/2018	09/06/2019
Dielectric Assessment Kit	DAK 3.5	1156	01/08/2019	01/08/2020
SPEAG Dipole	D450V3	1053	10/19/2018	10/19/2020

Note: \* denotes equipment used for SAR assessment prior to calibration due date

## 10.0 SAR Measurement System Validation and Verification

DASY output files of the probe/dipole calibration certificates and system verification test results are included in appendices B, C & D respectively.

### 10.1 System Validation

The SAR measurement system was validated according to procedures in KDB 865664. The validation status summary table is below.

**Table 11**

Dates	Probe Calibration Point		Probe SN	Measured Tissue Parameters		Validation		
				$\sigma$	$\epsilon_r$	Sensitivity	Linearity	Isotropy
CW								
03/15/2019	Body	450	7364	0.92	55.0	Pass	Pass	Pass
03/15/2019	Head	450		0.85	42.6	Pass	Pass	Pass

### 10.2 System Verification

System verification checks were conducted each day during the SAR assessment. The results are normalized to 1W. Appendix D includes DASY plots for each day during the SAR assessment. The Table below summarizes the daily system check results used for the SAR assessment.

**Table 12**

Probe Serial #	Tissue Type	Dipole Kit / Serial #	Ref SAR @ 1W (W/kg)	System Check Results Measured (W/kg)	System Check Test Results when normalized to 1W (W/kg)	Tested Date
7364	FCC Body	SPEAG D450V3 / 1053	4.53 +/- 10%	1.16	4.64	05/16/2019#
				1.21	4.84	05/17/2019
				1.16	4.64	05/20/2019
				1.17	4.68	05/21/2019
				1.18	4.72	05/22/2019
	IEEE/IEC Head		4.57 +/- 10%	1.21	4.84	05/21/2019#

Note: # denotes system verification covered for next test day (within 24 hours)

### 10.3 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 9.0. The Table below summarizes the measured tissue parameters used for the SAR assessment.

**Table 13**

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Measured (S/m)	Dielectric Constant Measured	Tested Date
450	FCC Body	0.94 (0.89-0.99)	56.7 (53.9-59.5)	0.94	54.9	05/16/2019#
				0.96	55.8	05/17/2019
				0.93	54.9	05/20/2019
				0.93	55.4	05/21/2019
				0.95	55.3	05/22/2019
	IEEE/IEC Head	0.87 (0.83-0.91)	43.5 (41.3-45.7)	0.87	43.8	05/21/2019#

Note: # denotes tissue date covered for next test day (within 24 hours)

### 11.0 Environmental Test Conditions

The EME Laboratory’s ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the SAR tests reported herein:

**Table 14**

	Target	Measured
Ambient Temperature	18 – 25 °C	Range: 19.1-22.8°C Avg. 21.2°C
Tissue Temperature	18 – 25 °C	Range: 20.1-21.0°C Avg. 20.5°C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

## 12.0 DUT Test Setup and Methodology

### 12.1 Measurements

SAR measurements were performed using the DASY system described in section 8.0 using zoom scans. Oval flat phantoms filled with applicable simulated tissue were used for body and face testing.

The Table below includes the step sizes and resolution of area and zoom scans per KDB 865664 requirements.

**Table 15**

Description		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: ΔxArea, ΔyArea		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: ΔxZoom, ΔyZoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: ΔzZoom(n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

### 12.2 DUT Configuration(s)

The DUT is a portable device operational at the body and face as described in section 6.0 while using the applicable accessories listed in section 7.0. All accessories listed in section 7.0 of this report were considered when implementing the guidelines specified in KDB 643646.

### 12.3 DUT Positioning Procedures

The positioning of the device for each body location is described below and illustrated in Appendix G.

#### 12.3.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory as well as with the offered audio accessories as applicable.

### 12.3.2 Head

Not applicable.

### 12.3.3 Face

The DUT was positioned with its' front side separated 2.5cm from the phantom.

## 12.4 DUT Test Channels

The number of test channels was determined by using the following IEEE 1528 equation. The use of this equation produces the same or more test channels compared to the FCC KDB 447498 number of test channels formula.

$$N_c = 2 * \text{roundup}[10 * (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

where:

$N_c$  = Number of channels

$F_{\text{high}}$  = Upper channel

$F_{\text{low}}$  = Lower channel

$F_c$  = Center channel

## 12.5 SAR Result Scaling Methodology

The calculated 1-gram averaged SAR results indicated as “Max Calc. 1g-SAR” in the data Tables is determined by scaling the measured SAR to account for power leveling variations and drift. Appendix F includes a shortened scan to justify SAR scaling for drift. For this device the “Max Calc. 1g-SAR” is scaled using the following formula:

$$\text{Max\_Calc} = \text{SAR\_meas} \cdot 10^{\frac{-\text{Drift}}{10}} \cdot \frac{P_{\text{max}}}{P_{\text{int}}} \cdot \text{DC}$$

$P_{\text{max}}$  = Maximum Power (W)

$P_{\text{int}}$  = Initial Power (W)

Drift = DASY drift results (dB)

$\text{SAR}_{\text{meas}}$  = Measured 1-g or 10-g Avg. SAR (W/kg)

DC = Transmission mode duty cycle in % where applicable

50% duty cycle is applied for PTT operation

Note: for conservative results, the following are applied:

If  $P_{\text{int}} > P_{\text{max}}$ , then  $P_{\text{max}}/P_{\text{int}} = 1$ .

Drift = 1 for positive drift

Additional SAR scaling was applied using the methodologies outlined in FCC KDB 865664 using tissue sensitivity values. SAR was scaled for conditions where the tissue permittivity was measured above the nominal target and for tissue conductivity that was measured below the nominal target. Negative or reduced SAR scaling is not permitted.

## 12.6 DUT Test Plan

The guidelines and requirements outlined in section 4.0 were used to assess compliance of this device. All modes of operation identified in section 6.0 were considered during the development of the test plan. All tests were performed in CW and 50% duty cycle was applied to PTT configurations in the final results.

**13.0 DUT Test Data**

**13.1 LMR assessments at the Body for 406.125-480MHz band**

Battery PMNN4476A was selected as the default battery for assessments at the Body because it is the thinnest battery (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (406.125-480MHz) which are listed in Table 16. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 16**

Test Freq (MHz)	Power (W)
406.125	4.78
418.000	4.79
425.000	4.77
430.000	4.76
433.000	4.78
442.000	4.78
460.800	4.80
465.000	4.80
470.000	4.80
480.000	4.80

**Assessment at the Body with Body worn HLN6602A**

DUT assessment with offered antennas, default battery, default audio accessory and above mentioned body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 16 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 17**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#			
PMAE4002A	PMNN4476A	HLN6602A	PMMN4092A	406.125								
				418.000	4.80	-0.59	3.04	1.74	ZZ-AB-190516-03			
				425.000								
				430.000								
				433.000								
PMAE4003A							430.000					
							433.000					
							442.000					
							460.800	4.80	-0.61	3.06	1.76	ZZ(LWS)-AB-190516-04
PMAE4006A							465.000					
				470.000								
				465.000	4.80	-0.83	6.77	4.10	ZZ(LWS)-AB-190516-05			
				470.000	4.80	-0.57	7.15	4.08	ZZ-AB-190516-06			
			480.000	4.80	-0.49	7.59	<b>4.25</b>	ZZ-AB-190516-07				



**Table 17 (Continued)**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
PMAE4016A	PMNN4476A	HLN6602A	PMMN4092A	406.125					
				418.000					
				425.000					
				430.000					
				433.000					
				442.000					
				460.800	4.80	-0.80	3.16	1.77	ZZ-AB-190516-08
				465.000					
				470.000					
				480.000					
Assessment of Additional Batteries									
PMAE4006A	PMNN4080A	HLN6602A	PMMN4092A	406.125					
				418.000					
				425.000					
				430.000					
				433.000					
				442.000					
				460.800					
				465.000					
				470.000					
				480.000	4.80	-0.34	5.87	3.17	LOH-AB-190516-09
PMAE4006A	PMNN4081B	HLN6602A	PMMN4092A	406.125					
				418.000					
				425.000					
				430.000					
				433.000					
				442.000					
				460.800					
				465.000					
				470.000					
				480.000	4.80	-0.27	7.03	3.74	LOH-AB-190516-10
PMAE4006A	PMNN4092A	HLN6602A	PMMN4092A	406.125					
				418.000					
				425.000					
				430.000					
				433.000					
				442.000					
				460.800					
				465.000					
				470.000					
				480.000	4.80	-0.33	7.45	4.02	LOH-AB-190516-11

**Assessment at the Body with Body worn HLN9844A**

DUT assessment with offered antennas, default battery, default audio accessory and above mentioned body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 16 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 18**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#									
PMAE4002A	PMNN4476A	HLN9844A	PMMN4092A	406.125														
				418.000	4.80	-0.67	2.51	1.46	LOH-AB-190516-12									
				425.000														
				430.000														
				433.000														
PMAE4003A				PMNN4476A	HLN9844A	PMMN4092A	430.000											
							433.000											
							442.000											
							460.800	4.80	-0.46	2.30	1.28	LOH-AB-190516-13						
PMAE4006A							PMNN4476A	HLN9844A	PMMN4092A	465.000	4.80	-0.49	5.25	2.94	LOH-AB-190516-14			
										470.000								
										480.000								
PMAE4016A										PMNN4476A	HLN9844A	PMMN4092A	406.125					
													418.000					
													425.000					
	430.000																	
	433.000																	
	442.000																	
	460.800	4.80	-0.34										2.34	1.27	LOH-AB-190517-01#			
	465.000																	
470.000																		
480.000																		
Assessment of Additional Batteries																		
PMAE4006A	PMNN4080A	HLN9844A	PMMN4092A	406.125														
				418.000														
				425.000														
				430.000														
				433.000														
				442.000														
				460.800														
				465.000	4.80	-0.41	4.83	2.65	LOH-AB-190517-02#									
				470.000														
480.000																		

**Table 18 (Continued)**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#			
Assessment of Additional Batteries												
PMAE4006A	PMNN4081B	HLN9844A	PMMN4092A	406.125								
				418.000								
				425.000								
				430.000								
				433.000								
				442.000								
				460.800								
				465.000	4.80	-0.36	5.82	3.16	LOH-AB-190517-03#			
	470.000											
	480.000											
	PMNN4092A				HLN9844A	PMMN4092A	406.125					
							418.000					
							425.000					
							430.000					
							433.000					
							442.000					
460.800												
465.000		4.80	-0.38				6.10	<b>3.33</b>	LOH-AB-190517-04#			
470.000												
480.000												

**Assessment at the Body with Body worn PMLN7075A with NTN5243A**

DUT assessment with offered antennas, default battery, default audio accessory and above mentioned body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 16 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 19**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#			
PMAE4002A	PMNN4476A	PMLN7075A w/ NTN5243A	PMMN4092A	406.125								
				418.000	4.80	-0.88	2.30	1.41	LOH-AB-190517-05#			
				425.000								
				430.000								
PMAE4003A				PMNN4476A	PMLN7075A w/ NTN5243A	PMMN4092A	433.000					
							430.000					
							433.000					
							442.000					
							460.800	4.80	-0.50	1.99	1.12	LOH-AB-190517-06#
465.000												
470.000												

**Table 19 (Continued)**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#					
PMAE4006A	PMNN4476A	PMLN7075A w/ NTN5243A	PMMN4092A	465.000	4.80	-0.62	4.37	2.52	LOH-AB-190517-17#					
				470.000										
				480.000										
PMAE4016A				PMNN4476A	PMLN7075A w/ NTN5243A	PMMN4092A	406.125							
							418.000							
							425.000							
							430.000							
							433.000							
							442.000							
							460.800	4.80	-0.37	2.35	1.28	ZZ-AB-190517-08#		
							465.000							
							470.000							
							480.000							
Assessment of Additional Batteries														
PMAE4006A	PMNN4080A	PMLN7075A w/ NTN5243A	PMMN4092A				406.125							
							418.000							
				425.000										
				430.000										
				433.000										
				442.000										
				460.800										
				465.000	4.80	-0.43	4.58	2.53	ZZ-AB-190517-09#					
				470.000										
	480.000													
	PMNN4081B			PMNN4081B	PMLN7075A w/ NTN5243A	PMMN4092A	406.125							
							418.000							
							425.000							
							430.000							
							433.000							
							442.000							
							460.800							
							465.000	4.80	-0.23	5.32	2.80	ZZ-AB-190517-10#		
							470.000							
	480.000													
	PMNN4092A			PMNN4092A			PMLN7075A w/ NTN5243A	PMMN4092A	406.125					
									418.000					
									425.000					
									430.000					
									433.000					
									442.000					
									460.800					
465.000		4.80	-0.39						5.64	<b>3.08</b>	ZZ-AB-190517-11#			
470.000														
480.000														

**Assessment at the Body with Body worn RLN4570A**

DUT assessment with offered antennas, default battery, default audio accessory and above mentioned body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 16 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 20**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#									
PMAE4002A	PMNN4476A	RLN4570A	PMMN4092A	406.125														
				418.000	4.78	-0.54	3.34	1.90	BL-AB-190517-15									
				425.000														
				430.000														
				433.000														
PMAE4003A				PMNN4476A	RLN4570A	PMMN4092A	430.000											
							433.000											
							442.000											
							460.800	4.80	-0.47	3.00	1.67	BL-AB-190517-16						
PMAE4006A							PMNN4476A	RLN4570A	PMMN4092A	465.000								
										470.000								
										480.000	4.80	-0.52	6.70	3.94	LOH-AB-190517-26			
PMAE4016A										PMNN4476A	RLN4570A	PMMN4092A	470.000					
													480.000	4.80	-0.52	6.93	3.91	LOH-AB-190517-27
													406.125					
	418.000																	
	425.000																	
	430.000																	
	433.000																	
	442.000																	
	460.800	4.80	-0.40	2.99	1.64	BL-AB-190517-19												
	465.000																	
470.000																		
480.000																		
Assessment of Additional Batteries																		
PMAE4006A	PMNN4080A	RLN4570A	PMMN4092A	406.125														
				418.000														
				425.000														
				430.000														
				433.000														
				442.000														
				460.800														
				465.000	4.80	-0.53	6.49	3.67	LOH-AB-190517-23									
				470.000														
				480.000														

**Table 20 (Continued)**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
Assessment of Additional Batteries									
PMAE4006A	PMNN4081B	RLN4570A	PMMN4092A	406.125					
				418.000					
				425.000					
				430.000					
				433.000					
				442.000					
				460.800					
				465.000	4.80	-0.32	7.33	3.95	LOH-AB-190517-24
	470.000								
	480.000								
	PMNN4092A	RLN4570A	PMMN4092A	406.125					
				418.000					
				425.000					
				430.000					
				433.000					
				442.000					
460.800									
465.000				4.80	-0.47	7.83	<b>4.36</b>	LOH-AB-190517-25	
470.000									
480.000									

**Assessment at the Body with Body worn RLN4815A**

DUT assessment with offered antennas, default battery, default audio accessory and above mentioned body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 16 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 21**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
PMAE4002A				406.125					
				418.000	4.80	-0.48	2.08	1.16	LOH-AB-190520-03
				425.000					
				430.000					
				433.000					
PMAE4003A	PMNN4476A	RLN4815A	PMMN4092A	430.000					
				433.000					
				442.000					
				460.800	4.80	-0.59	1.47	0.84	LOH-AB-190520-04
				465.000					
470.000									

**Table 21 (Continued)**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#			
PMAE4006A	PMNN4476A	PMLN7075A w/ NTN5243A	PMMN4092A	465.000	4.80	-0.51	3.72	2.09	LOH-AB-190520-05			
				470.000								
				480.000								
PMAE4016A							406.125					
							418.000					
							425.000					
							430.000					
							433.000					
							442.000					
							460.800	4.80	-0.50	1.61	0.90	LOH-AB-190520-06
							465.000					
							470.000					
							480.000					
Assessment of Additional Batteries												
PMAE4006A	PMNN4080A	PMLN7075A w/ NTN5243A	PMMN4092A	406.125								
				418.000								
				425.000								
				430.000								
				433.000								
				442.000								
				460.800								
				465.000	4.80	-0.60	3.42	1.96	LOH-AB-190520-07			
				470.000								
	480.000											
	PMNN4081B						406.125					
							418.000					
							425.000					
							430.000					
							433.000					
							442.000					
							460.800					
							465.000	4.80	-0.31	3.78	2.03	LOH-AB-190520-08
							470.000					
	480.000											
	PMNN4092A						406.125					
							418.000					
							425.000					
							430.000					
							433.000					
							442.000					
							460.800					
465.000		4.80	-0.52				3.85	<b>2.17</b>	LOH-AB-190520-09			
470.000												
480.000												

**Assessment at the Body with other audio accessories**

DUT assessment of additional audio accessories per “KDB 643646 Body SAR Test Consideration for Audio Accessories without Built-in Antenna” Section 1, A. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 22**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#		
PMAE4006A	PMNN4092A	RLN4570A	PMLN6531A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
				460.800							
				465.000	4.80	-0.42	6.97	3.84	LOH-AB-190520-10		
				470.000							
				480.000							
			PMLN6532A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
				460.800							
				465.000	4.80	-0.51	7.50	4.22	LOH-AB-190520-11		
				470.000							
				480.000							
			PMLN6854A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
				460.800							
				465.000	4.80	-0.53	7.23	4.08	LOH-AB-190520-12		
				470.000							
				480.000							
			PMLN6541A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
460.800											
465.000	4.80	-0.53		7.54	<b>4.26</b>	LOH-AB-190520-13					
470.000											
480.000											



Table 22 (Continued)

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#		
PMAE4006A	PMNN4092A	RLN4570A	PMLN6538A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
				460.800							
				465.000	4.80	-0.29	7.66	4.09	LOH-AB-190521-02		
				470.000							
				480.000							
			PMLN6537A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
				460.800							
				465.000	4.80	-0.51	7.16	4.03	LOH-AB-190521-03		
				470.000							
				480.000							
			PMMN4013A w/ RLN4941A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
				460.800							
				465.000	4.80	-0.46	7.41	4.12	LOH-AB-190521-04		
				470.000							
				480.000							
			PMLN6530A	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
460.800											
465.000	4.80	-0.42		6.57	3.62	LOH-AB-190521-05					
470.000											
480.000											

**13.2 LMR assessments at the Face for 406.125-480MHz band**

Battery PMMN4080A was selected as the default battery for assessments at the Face because it has the highest capacity (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (406.125-480MHz) which are listed in Table 23. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios). SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 23**

Test Freq (MHz)	Power (W)
406.125	4.76
418.000	4.79
425.000	4.76
430.000	4.76
433.000	4.77
442.000	4.80
460.800	4.78
465.000	4.80
470.000	4.80
480.000	4.80

**Assessment at the Face**

DUT assessment with offered antennas, default battery with front of DUT positioned 2.5cm facing phantom per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 23 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 24**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#		
PMAE4002A	PMNN4080A	None, @front	NA	406.125							
				418.000	4.80	-0.71	3.62	2.13	ZZ-FACE-190521-10		
				425.000							
				430.000							
				433.000							
PMAE4003A				430.000							
				433.000							
				442.000	4.80	-0.75	5.31	3.16	ZZ-FACE-190521-11		
				460.800							
				465.000							
PMAE4006A				470.000							
				465.000	4.80	-0.60	6.64	3.81	ZZ-FACE-190521-12		
				470.000							
				480.000	4.80	-0.48	6.18	3.45	ZZ-FACE-190521-13		

Table 24 (Continued)

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#		
PMAE4016A	PMNN4080A	None, @front	NA	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000	4.80	-0.70	5.05	2.97	ZZ-FACE-190521-14		
				460.800							
				465.000							
				470.000							
				480.000							
Assessment of Additional Batteries											
PMAE4006A	PMNN4081B	None, @front	NA	406.125							
				418.000							
				425.000							
				430.000							
				433.000							
				442.000							
				460.800							
				465.000	4.80	-0.38	6.48	3.54	ZZ-FACE-190521-15		
				470.000							
				480.000							
	PMNN4092A				406.125						
					418.000						
					425.000						
					430.000						
					433.000						
					442.000						
					460.800						
					465.000	4.80	-0.49	6.89	3.86	ZZ-FACE-190521-16	
					470.000						
					480.000						
	PMNN4076A				406.125						
					418.000						
					425.000						
					430.000						
					433.000						
					442.000						
					460.800						
					465.000	4.80	-0.59	6.85	<b>3.92</b>	ZZ-FACE-190522-01#	
					470.000						
					480.000						

### 13.3 Shortened Scan Assessment

A “shortened” scan using the highest SAR configuration overall from above was performed to validate the SAR drift of the full DASY5™ coarse and zoom scans. Note that the shortened scan represents the zoom scan performance result; this is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a zoom scan only was performed. The results of the shortened cube scan presented in Appendix D demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid. The SAR result from the Table below is provided in Appendix F.

**Table 25**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
PMAE4006A	PMNN4092A	RLN4570A	PMMN4092A	465.000	4.80	-0.24	8.15	4.31	LOH-AB-190522-05

### 13.4 Assessment for Outside FCC Part 90

Additional tests were required to cover the frequencies outside of FCC Part 90. The highest SAR configuration for body and face from above were repeated at the outside FCC Part 90 frequency of 403MHz for the applicable antennas. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

**Table 26**

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
Body									
PMAE4002A	PMNN4092A	RLN4570A	PMMN4092A	403.000	4.80	-0.50	6.35	3.60	LOH(LWS)-AB-190521-07
PMAE4016A					4.80	-0.30	8.34	<b>4.52</b>	ZR(LWS)-AB-190521-08
Face									
PMAE4002A	PMNN4476A	None, @front	NA	403.000	4.75	-0.60	6.97	4.00	ZZ-FACE-190522-02#
PMAE4016A					4.75	-0.34	3.97	2.15	ZZ-FACE-190522-03#

### 14.0 Results Summary

Based on the test guidelines from section 4.0 and satisfying frequencies within FCC bands, the highest Operational Maximum Calculated 1-gram average SAR values found for this filing:

**Table 27**

Designator	Frequency band (MHz)	Max Calc at Body (W/kg)	Max Calc at Face (W/kg)
		1g-SAR	1g-SAR
<b>FCC</b>			
LMR	406.125-480	4.36	3.92
<b>Overall</b>			
LMR	403-480	4.52	4.00

All results are scaled to the maximum output power.

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of FCC 47 CFR § 2.1093.

### 15.0 Variability Assessment

Per the guidelines in KDB 865664 SAR variability assessment is required because SAR results are above 4.0W/kg (Occupational).

The Table below includes test results of the original measurement(s), the repeated measurement(s), and the ratio ( $SAR_{high}/SAR_{low}$ ) for the applicable test configuration(s).

**Table 28**

Run#	Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq. (MHz)	Adj Calc. 1g-SAR (W/kg)	Ratio	Comments
LOH-AB-190517-25	PMAE4006A	PMNN4092A	RLN4570A	PMMN4092A	465.000	4.36	1.01	No additional repeated scans is required due to the Ratio ( $SAR_{high}/SAR_{low}$ ) < 1.20
LOH-AB-190522-05						4.31		

### 16.0 System Uncertainty

A system uncertainty analysis is not required for this report per KDB 865664 because the highest report SAR value for Occupational exposure is less than 7.5W/kg.

Per the guidelines of ISO 17025 a reported system uncertainty is required and therefore measurement uncertainty budget is included in Appendix A.

## **Appendix A**

### **Measurement Uncertainty Budget**

**Uncertainty Budget for Device Under Test, for 100 MHz to 800 MHz**

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	<i>g</i>	$h = c \times f / e$	$i = c \times g / e$	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c<sub>i</sub></i> (1 g)	<i>c<sub>i</sub></i> (10 g)	1 g <i>u<sub>i</sub></i> (±%)	10 g <i>u<sub>i</sub></i> (±%)	<i>v<sub>i</sub></i>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.7	N	1.00	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
<b>Test sample Related</b>									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
<b>Combined Standard Uncertainty</b>				RSS			11	11	477
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>				<i>k</i> =2			23	22	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c<sub>i</sub>* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u<sub>i</sub>* – SAR uncertainty
- h) *v<sub>i</sub>* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty

**Uncertainty Budget for System Validation (dipole & flat phantom) for 300 MHz to 800 MHz**

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
<b>Uncertainty Component</b>	IEEE 1528 section	Tol. (± %)	Prob. Dist.	Div.	<i>c<sub>i</sub></i> (1 g)	<i>c<sub>i</sub></i> (10 g)	1 g <i>u<sub>i</sub></i> (±%)	10 g <i>u<sub>i</sub></i> (±%)	<i>v<sub>i</sub></i>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.7	N	1.00	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
<b>Dipole</b>									
Dipole Axis to Liquid Distance	8, E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8, 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
<b>Combined Standard Uncertainty</b>			RSS				10	19	99999
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)			<i>k</i> =2				19	18	

Notes for uncertainty budget Tables:

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c<sub>i</sub>* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u<sub>i</sub>* – SAR uncertainty
- h) *v<sub>i</sub>* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty



## **Appendix B**

### **Probe Calibration Certificates**

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Motorola Solutions MY**

Certificate No: **EX3-7364\_Jan19**

**CALIBRATION CERTIFICATE**

Object **EX3DV4 - SN:7364**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v5, QA CAL-23.v5,  
QA CAL-25.v7  
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 23, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
DAE4	SN: 660	19-Dec-18 (No. DAE4-660_Dec18)	Dec-19
Reference Probe ES3DV2	SN: 3013	31-Dec-18 (No. ES3-3013_Dec18)	Dec-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 26, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

#### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

EX3DV4 – SN:7364

January 23, 2019

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

#### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.46	0.46	0.57	± 10.1 %
DCP (mV) <sup>B</sup>	99.7	97.6	99.3	

#### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	114.6	+ 2.7 %	± 4.7 %
		Y	0.0	0.0	1.0		112.4		
		Y	0.0	0.0	1.0		127.7		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:7364

January 23, 2019

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

### Sensor Model Parameters

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	129.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:7364

January 23, 2019

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth (mm) <sup>G</sup>	Unc (k=2)
150	52.3	0.76	12.97	12.97	12.97	0.00	1.00	± 13.3 %
300	45.3	0.87	12.05	12.05	12.05	0.09	1.20	± 13.3 %
450	43.5	0.87	10.75	10.75	10.75	0.13	1.30	± 13.3 %
750	41.9	0.89	10.42	10.42	10.42	0.56	0.80	± 12.0 %
835	41.5	0.90	10.23	10.23	10.23	0.30	1.09	± 12.0 %
900	41.5	0.97	9.78	9.78	9.78	0.31	1.08	± 12.0 %
1810	40.0	1.40	8.25	8.25	8.25	0.35	0.87	± 12.0 %
1900	40.0	1.40	8.19	8.19	8.19	0.37	0.85	± 12.0 %
2100	39.8	1.49	8.15	8.15	8.15	0.25	1.09	± 12.0 %
2450	39.2	1.80	7.38	7.38	7.38	0.40	0.85	± 12.0 %
5250	35.9	4.71	5.08	5.08	5.08	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.86	4.86	4.86	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.68	4.68	4.68	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.72	4.72	4.72	0.40	1.80	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7364

January 23, 2019

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7364

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth (mm) <sup>G</sup>	Unc (k=2)
150	61.9	0.80	12.37	12.37	12.37	0.00	1.00	± 13.3 %
300	58.2	0.92	11.79	11.79	11.79	0.05	1.20	± 13.3 %
450	56.7	0.94	11.17	11.17	11.17	0.14	1.30	± 13.3 %
750	55.5	0.96	10.24	10.24	10.24	0.50	0.83	± 12.0 %
835	55.2	0.97	9.94	9.94	9.94	0.41	0.90	± 12.0 %
900	55.0	1.05	9.93	9.93	9.93	0.35	0.96	± 12.0 %
1810	53.3	1.52	7.97	7.97	7.97	0.44	0.85	± 12.0 %
1900	53.3	1.52	7.89	7.89	7.89	0.46	0.85	± 12.0 %
2100	53.2	1.62	7.96	7.96	7.96	0.46	0.90	± 12.0 %
2450	52.7	1.95	7.48	7.48	7.48	0.34	0.98	± 12.0 %
5250	48.9	5.36	4.47	4.47	4.47	0.45	1.90	± 13.1 %
5500	48.6	5.65	4.07	4.07	4.07	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.89	3.89	3.89	0.45	1.90	± 13.1 %
5750	48.3	5.94	4.19	4.19	4.19	0.45	1.90	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7364

January 23, 2019

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

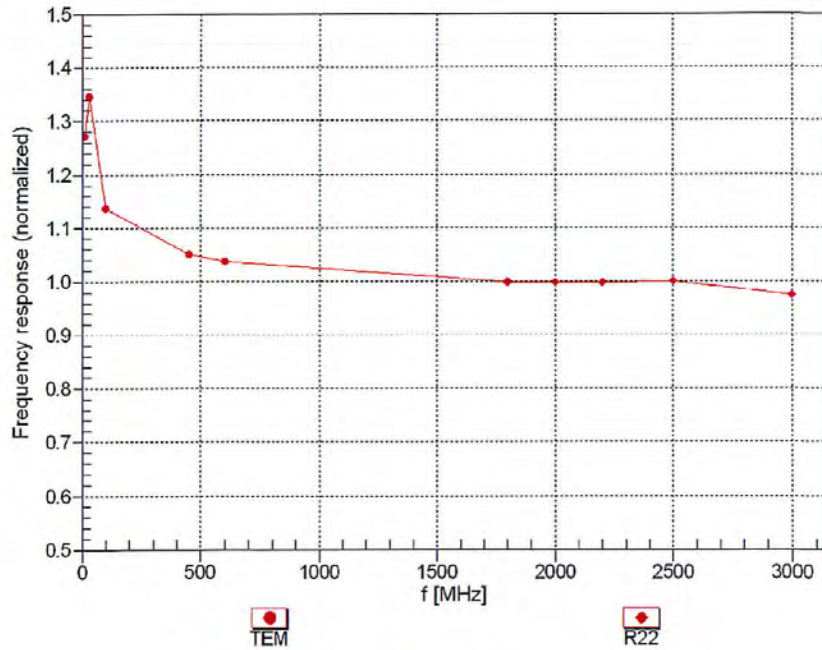

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)





EX3DV4- SN:7364

January 23, 2019

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

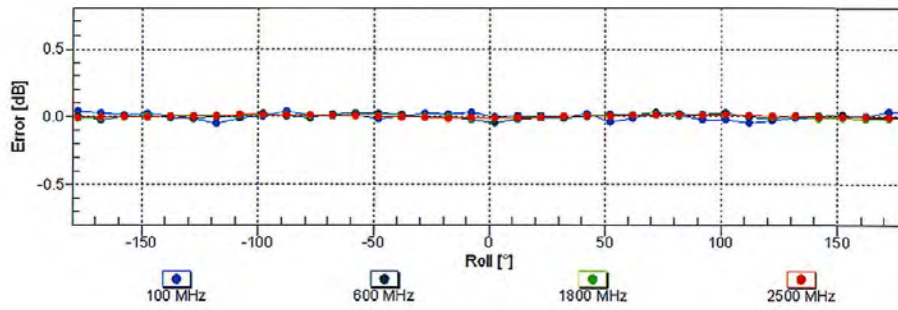
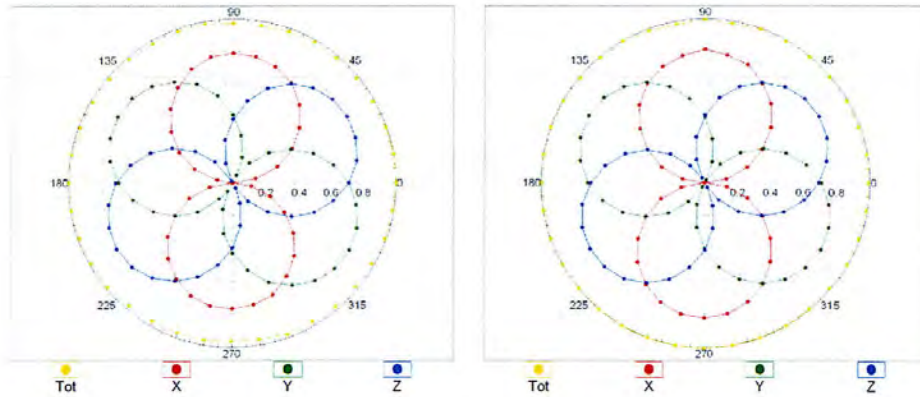


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

EX3DV4- SN:7364

January 23, 2019

### Dynamic Range $f(SAR_{head})$ (TEM cell, $f_{eval} = 1900$ MHz)

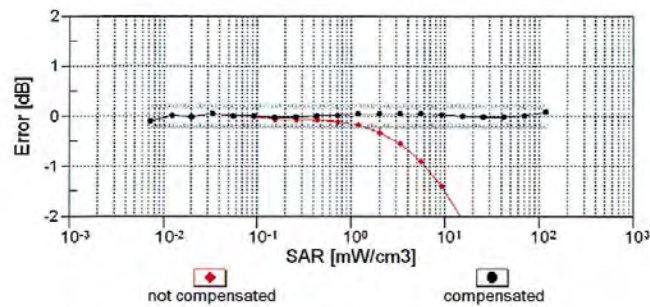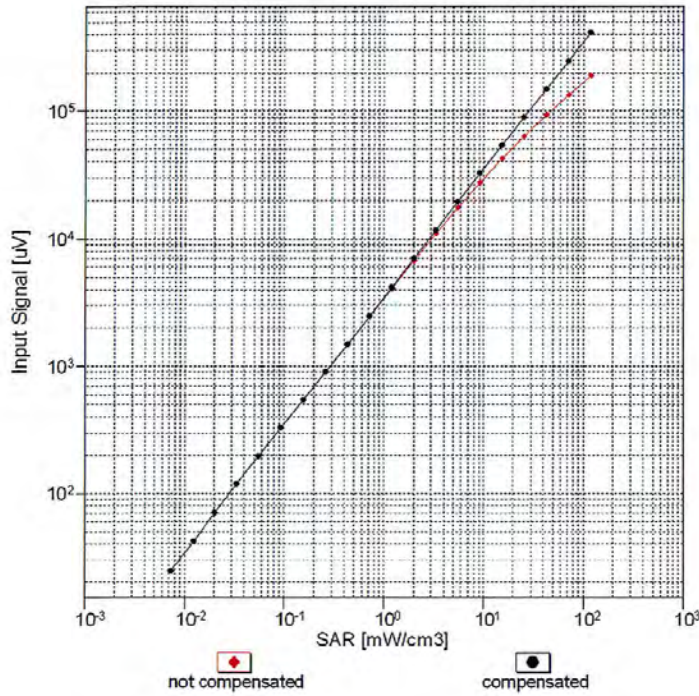


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )


EX3DV4- SN:7364

January 23, 2019

### Conversion Factor Assessment

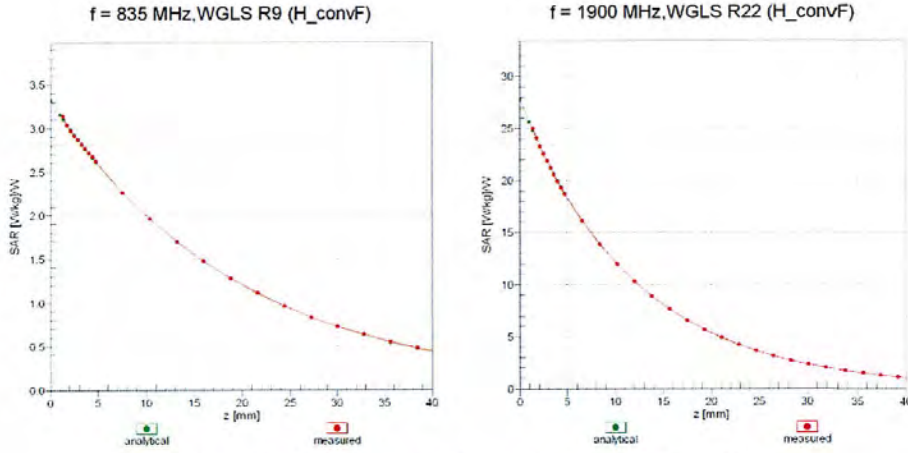

### Deviation from Isotropy in Liquid Error ( $\phi$ , $\vartheta$ ), f = 900 MHz

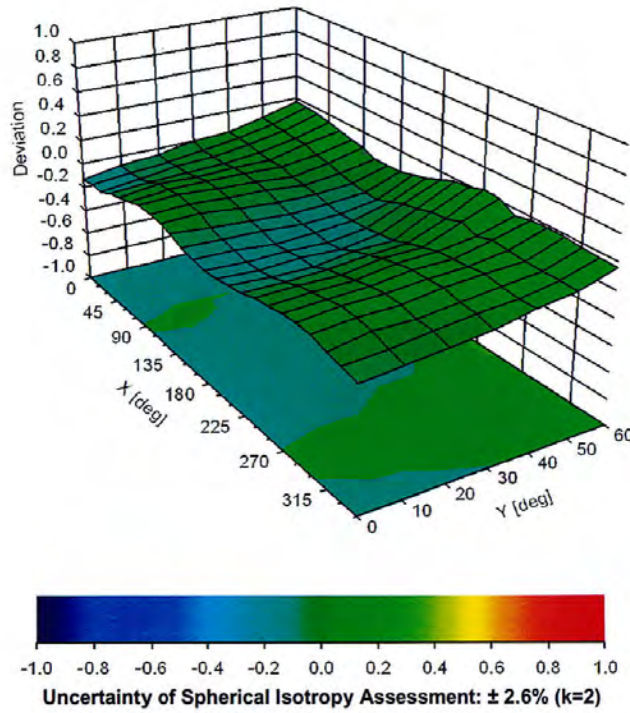

EX3DV4-SN:7364

January 23, 2019

**Appendix: Modulation Calibration Parameters**

UID	Communication System Name		A dB	B dB√μV	C	D dB	VR mV	Unc <sup>F</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	114.6	±2.7 %
		Y	0.0	0.0	1.0		112.4	
		Z	0.0	0.0	1.0		127.7	
10021-DAC	GSM-FDD (TDMA, GMSK)	X	1.72	63.0	12.0	9.39	94.6	±1.9 %
		Y	1.71	65.4	13.2		68.7	
		Z	2.22	65.7	13.5		108.0	
10023-DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	1.75	63.4	12.3	9.57	91.5	±1.7 %
		Y	1.83	65.6	13.2		67.1	
		Z	2.26	65.5	13.3		104.9	
10024-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	1.71	64.7	10.9	6.56	147.1	±1.2 %
		Y	4.98	81.5	18.4		127.8	
		Z	2.35	69.4	14.0		131.0	
10025-DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	5.28	72.4	25.7	12.62	61.2	±1.2 %
		Y	4.38	68.1	23.6		44.2	
		Z	5.84	75.3	27.6		69.5	
10026-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	5.13	74.3	24.8	9.55	140.7	±1.9 %
		Y	4.43	71.4	23.6		100.8	
		Z	5.35	74.8	25.1		128.7	
10027-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	1.22	62.4	8.8	4.80	140.5	±1.7 %
		Y	29.58	100.0	21.9		130.1	
		Z	34.45	99.7	22.2		118.2	
10028-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	54.30	99.7	20.4	3.55	116.7	±1.9 %
		Y	0.97	66.1	10.9		148.2	
		Z	43.93	99.7	21.0		131.0	
10029-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	4.59	72.8	23.2	7.78	137.7	±1.4 %
		Y	3.83	68.9	21.1		125.2	
		Z	5.87	78.6	26.0		118.8	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	4.72	66.7	19.1	4.57	123.7	±0.9 %
		Y	4.44	65.3	18.2		121.2	
		Z	4.88	67.4	19.4		140.2	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	4.17	68.9	23.5	11.01	89.7	±1.4 %
		Y	3.52	65.8	22.2		64.7	
		Z	4.64	71.3	24.8		101.7	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	4.77	75.3	23.9	6.52	116.4	±1.4 %
		Y	4.03	71.6	22.1		147.1	
		Z	5.32	76.9	24.4		133.3	
10081-CAB	CDMA2000 (1xRTT, RC3)	X	4.00	66.6	18.9	3.97	120.2	±0.5 %
		Y	3.78	65.2	18.0		118.1	
		Z	4.11	67.0	19.1		136.1	

EX3DV4- SN:7364

January 23, 2019

10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	1.59	64.6	11.2	6.56	144.9	±1.9 %
		Y	1.86	68.3	12.9		126.4	
		Z	2.87	71.7	14.8		131.1	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	5.33	75.9	25.9	9.55	139.0	±2.2 %
		Y	4.36	71.0	23.4		99.7	
		Z	5.59	76.5	26.3		126.6	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	9.95	68.2	21.0	8.07	124.6	±2.2 %
		Y	9.62	67.4	20.5		119.2	
		Z	10.30	69.2	21.6		143.9	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.61	68.0	21.0	8.10	119.9	±1.9 %
		Y	9.28	67.1	20.4		114.4	
		Z	9.94	69.0	21.6		137.6	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	4.41	67.8	19.3	3.91	123.6	±0.7 %
		Y	4.02	65.7	18.1		120.5	
		Z	4.58	68.5	19.6		139.9	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	3.79	67.8	19.3	3.46	120.1	±0.5 %
		Y	3.37	65.1	17.7		117.4	
		Z	3.91	68.2	19.5		135.9	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	3.75	67.9	19.4	3.39	120.3	±0.5 %
		Y	3.35	65.3	17.8		117.1	
		Z	3.86	68.3	19.5		135.5	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	3.86	68.0	19.4	3.50	120.3	±0.5 %
		Y	3.44	65.4	17.9		117.0	
		Z	3.91	68.0	19.4		135.8	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	5.27	66.0	23.4	12.49	74.0	±1.4 %
		Y	4.56	62.5	21.4		53.0	
		Z	5.70	68.1	24.8		84.1	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	5.20	70.4	19.9	3.76	126.4	±0.5 %
		Y	4.56	67.7	18.4		123.3	
		Z	5.28	70.5	19.9		143.5	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	5.38	71.6	20.6	3.77	124.9	±0.7 %
		Y	4.42	67.3	18.2		121.9	
		Z	5.02	69.8	19.6		142.4	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	6.70	71.0	20.9	5.22	129.5	±0.7 %
		Y	5.85	67.9	19.2		125.2	
		Z	6.66	70.6	20.7		148.5	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	3.44	72.9	21.1	1.54	126.4	±0.5 %
		Y	2.56	67.0	17.9		123.5	
		Z	3.20	71.3	20.2		142.2	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	9.70	68.1	21.2	8.23	119.3	±1.9 %
		Y	9.38	67.2	20.5		114.1	
		Z	10.02	69.0	21.7		137.1	

EX3DV4- SN:7364

January 23, 2019

10417-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	9.70	68.1	21.2	8.23	119.3	±1.9 %
		Y	9.42	67.3	20.6		114.1	
		Z	10.03	69.0	21.7		137.4	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	9.58	68.0	21.1	8.14	118.4	±1.9 %
		Y	9.30	67.2	20.5		113.4	
		Z	9.87	68.9	21.6		136.2	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	7.83	67.4	19.9	6.55	108.2	±1.2 %
		Y	7.69	67.0	19.4		104.5	
		Z	8.11	68.2	20.3		124.3	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	10.63	69.2	21.7	8.25	130.7	±2.2 %
		Y	10.48	68.9	21.4		123.4	
		Z	10.07	67.8	20.9		101.8	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	3.51	73.4	21.3	1.58	125.8	±0.5 %
		Y	2.68	68.0	18.5		122.8	
		Z	3.41	72.6	20.8		142.5	
10518-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	9.68	68.0	21.1	8.23	118.9	±1.9 %
		Y	9.42	67.3	20.6		114.1	
		Z	10.04	69.1	21.7		137.4	
10525-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	9.92	68.2	21.3	8.36	120.5	±1.9 %
		Y	9.66	67.6	20.8		116.3	
		Z	10.24	69.2	21.9		139.1	
10526-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	10.00	68.3	21.4	8.42	120.7	±1.9 %
		Y	9.69	67.5	20.8		116.2	
		Z	10.32	69.3	22.0		139.3	
10534-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	10.41	68.7	21.5	8.45	125.5	±2.2 %
		Y	10.06	67.8	20.9		120.8	
		Z	10.78	69.7	22.1		145.9	
10535-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	10.43	68.7	21.5	8.45	126.5	±2.2 %
		Y	10.08	67.9	20.9		121.2	
		Z	10.78	69.7	22.1		146.0	
10544-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	10.74	69.0	21.5	8.47	130.5	±2.2 %
		Y	10.26	67.9	20.8		123.8	
		Z	10.20	67.7	20.8		101.3	
10545-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	10.83	69.1	21.6	8.55	130.8	±2.2 %
		Y	10.36	68.1	21.0		124.5	
		Z	10.28	67.8	20.9		101.7	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	9.76	68.2	21.2	8.25	119.0	±1.9 %
		Y	9.46	67.4	20.7		114.6	
		Z	10.08	69.1	21.8		137.5	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	3.65	73.3	21.4	1.99	123.5	±0.5 %
		Y	2.71	67.4	18.4		120.2	
		Z	3.53	72.6	21.0		138.6	

EX3DV4- SN:7364

January 23, 2019

10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	3.80	74.3	21.8	1.99	122.7	±0.5 %
		Y	2.83	68.4	18.9		120.1	
		Z	3.60	73.2	21.2		138.7	
10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	9.84	68.2	21.5	8.59	117.1	±1.9 %
		Y	9.55	67.4	20.9		112.7	
		Z	10.17	69.1	22.0		134.4	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	9.84	68.2	21.5	8.60	116.5	±1.9 %
		Y	9.55	67.4	20.9		112.4	
		Z	10.18	69.2	22.1		134.2	
10583-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	9.87	68.3	21.5	8.59	117.1	±1.9 %
		Y	9.55	67.4	20.9		112.6	
		Z	10.18	69.2	22.1		134.3	
10584-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	9.87	68.3	21.5	8.60	116.6	±1.9 %
		Y	9.54	67.4	20.9		112.3	
		Z	10.17	69.2	22.1		134.1	
10591-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	9.98	68.3	21.5	8.63	118.4	±1.9 %
		Y	9.66	67.4	20.9		113.7	
		Z	10.29	69.2	22.1		136.0	
10592-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	10.14	68.4	21.7	8.79	118.6	±2.2 %
		Y	9.83	67.6	21.1		113.8	
		Z	10.49	69.5	22.3		136.9	
10599-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	10.57	68.8	21.8	8.79	124.4	±2.2 %
		Y	10.16	67.8	21.1		118.7	
		Z	10.89	69.7	22.4		143.5	
10600-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	10.65	68.9	21.9	8.88	123.9	±2.2 %
		Y	10.24	67.9	21.2		118.8	
		Z	10.98	69.9	22.5		143.9	
10607-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	9.99	68.3	21.5	8.64	118.6	±2.2 %
		Y	9.67	67.4	20.9		113.5	
		Z	10.33	69.3	22.1		136.4	
10608-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	10.13	68.4	21.7	8.77	118.9	±1.9 %
		Y	9.80	67.6	21.1		113.5	
		Z	10.48	69.5	22.3		137.0	
10616-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	10.58	68.8	21.8	8.82	124.5	±2.2 %
		Y	10.21	67.9	21.2		118.8	
		Z	10.94	69.8	22.4		143.9	
10617-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	10.59	68.8	21.8	8.81	124.8	±2.2 %
		Y	10.21	67.9	21.2		118.9	
		Z	10.93	69.8	22.4		144.1	
10626-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	10.89	69.1	21.8	8.83	128.8	±2.2 %
		Y	10.39	68.0	21.1		121.6	
		Z	11.24	70.1	22.4		149.4	

EX3DV4- SN:7364

January 23, 2019

10627-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	10.94	69.1	21.9	8.88	129.3	±2.2 %
		Y	10.43	68.0	21.1		121.2	
		Z	11.32	70.2	22.5		149.9	
10648-AAA	CDMA2000 (1x Advanced)	X	3.77	67.8	19.4	3.45	120.1	±0.7 %
		Y	3.51	66.0	18.3		117.6	
		Z	3.94	68.6	19.8		136.8	

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



## Appendix C Dipole Calibration Certificates

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Motorola Solutions MY**

Certificate No: **D450V3-1053\_Oct18**

**CALIBRATION CERTIFICATE**

Object	D450V3 - SN:1053		
Calibration procedure(s)	QA CAL-15.v8 Calibration procedure for dipole validation kits below 700 MHz		
Calibration date:	October 19, 2018		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
<b>Primary Standards</b>	<b>ID #</b>	<b>Cal Date (Certificate No.)</b>	<b>Scheduled Calibration</b>
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 3877	30-Dec-17 (No. EX3-3877_Dec17)	Dec-18
DAE4	SN: 654	05-Jul-18 (No. DAE4-654_Jul18)	Jul-19
<b>Secondary Standards</b>	<b>ID #</b>	<b>Check Date (in house)</b>	<b>Scheduled Check</b>
Power meter E4419B	SN: GB41293874	12-Jun-18 (No. 217-02285/02284)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	12-Jun-18 (No. 217-02285)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	12-Jun-18 (No. 217-02284)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19
Calibrated by:	Name	Function	Signature
	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
			Issued: October 19, 2018
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- e) DAS4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	44.1 ± 6 %	0.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>4.57 W/kg ± 18.1 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	0.762 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>3.05 W/kg ± 17.6 % (k=2)</b>

**Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.5 ± 6 %	0.92 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>4.53 W/kg ± 18.1 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	0.753 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>3.05 W/kg ± 17.6 % (k=2)</b>

**Appendix (Additional assessments outside the scope of SCS 0108)**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	57.6 $\Omega$ - 4.4 j $\Omega$
Return Loss	- 21.7 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	55.1 $\Omega$ - 7.0 j $\Omega$
Return Loss	- 21.7 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.351 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	December 16, 2005

**DASY5 Validation Report for Head TSL**

Date: 19.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1053**


Communication System: UID 0 - CW; Frequency: 450 MHz  
 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.87 \text{ S/m}$ ;  $\epsilon_r = 44.1$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(10.5, 10.5, 10.5) @ 450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 05.07.2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)


**Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 38.89 V/m; Power Drift = -0.00 dB  
 Peak SAR (extrapolated) = 1.74 W/kg  
**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.762 W/kg**  
 Maximum value of SAR (measured) = 1.52 W/kg

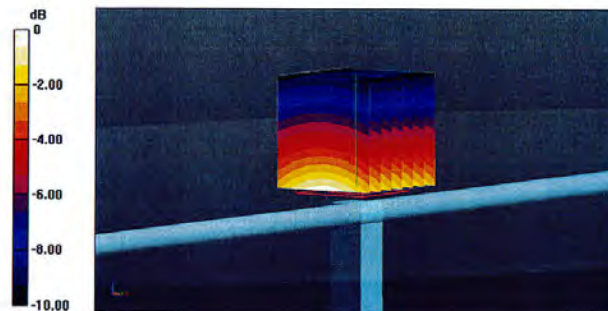

0 dB = 1.52 W/kg = 1.82 dBW/kg

### Impedance Measurement Plot for Head TSL

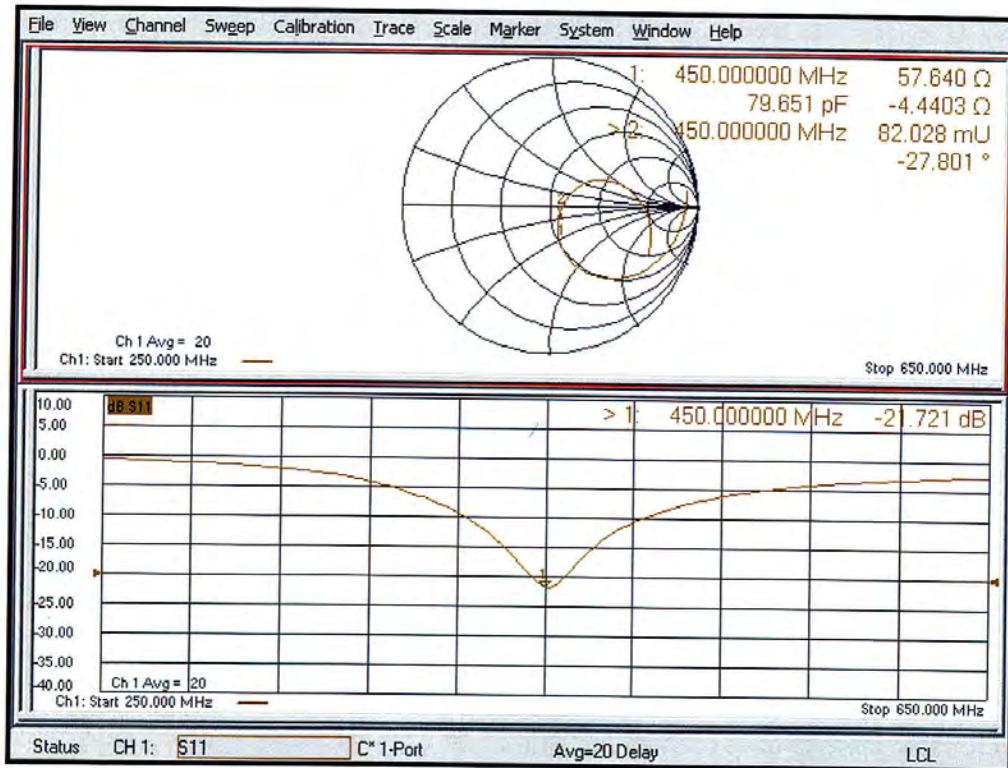

**DASY5 Validation Report for Body TSL**

Date: 19.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1053**


Communication System: UID 0 - CW; Frequency: 450 MHz  
 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 55.5$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(10.8, 10.8, 10.8) @ 450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 05.07.2018
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Dipole Calibration for Body Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 41.78 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.753 W/kg**  
 Maximum value of SAR (measured) = 1.50 W/kg

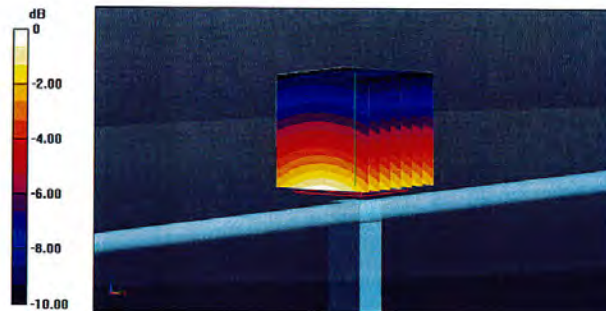

0 dB = 1.50 W/kg = 1.76 dBW/kg



### Impedance Measurement Plot for Body TSL

