

	  MS ISO/IEC 17025 TESTING SAMM No. 0826	  ACCREDITED CERTIFICATE 2518.05
---	--	---


DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 2 of 2

Motorola Solutions Inc. EME Test Laboratory Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.	Date of Report: 04/03/2020 Report Revision: A
--	--

Responsible Engineer: Report Author: Date/s Tested: Manufacturer: DUT Description: Test TX mode(s): Max. Power output: Nominal Power: Tx Frequency Bands: Signaling type: Model(s) Tested: Model(s) Certified: Serial Number(s): Classification: FCC ID: IC: ISED Test Site registration: FCC Test Firm Registration Number:	Ch'ng Jian Sheng Ch'ng Jian Sheng 03/30/2020 - 04/01/2020 Motorola Solutions Inc. Handheld Portable – T470_T475 FRS Consumer Radio 462-467 MHz Yellow CW (PTT) 2.1W (462.5500 MHz – 462.7250 MHz) , 0.54W (467.5625MHz - 467.7125 MHz) 1.9W (462.5500 MHz – 462.7250 MHz) , 0.46W (467.5625MHz - 467.7125 MHz) 462.5500 MHz – 462.7250 MHz, 467.5625 MHz - 467.7125 MHz FM T47X (PMUE5644A) T47X (PMUE5644A) 16514WE0373 General Population / Uncontrolled AZ489FT4959; 462.5500 MHz – 462.7250 MHz, 467.5625 MHz - 467.7125 MHz 109U-89FT4959; 462.5500 MHz – 462.7250 MHz, 467.5625 MHz - 467.7125 MHz 24843 823256
The test results clearly demonstrate compliance with FCC General Population / Uncontrolled RF Exposure limits of 1.6 W/kg averaged over 1 gram per the requirements of FCC 47 CFR § 2.1093 and RSS-102 (Issue 5).	

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report (no deviation from standard methods). This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

 Tiong Nguk Ing Deputy Technical Manager (Approved Signatory) Approval Date: 4/5/2020	
--	--

Appendix D

System Verification Check Scans

Motorola Solutions, Inc. EME Laboratory

Date/Time: 3/30/2020 11:20:47 AM

Robot#: DASY5-PG-1 | Run#: ZR-SYSP-450H-200330-01
 Dipole Model# D450V3
 Phantom#: ELI4 1022
 Tissue Temp: 22.0 (C)
 Serial#: 1054
 Test Freq: 450.0000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.21 dB
 Adjusted SAR (1W): 4.64 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.84$ S/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 450 MHz, ConvF(11.84, 11.84, 11.84) @ 450 MHz
 Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (41x221x1):


Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Reference Value = 44.04 V/m; Power Drift = -0.05 dB
Fast SAR: SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.872 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.57 W/kg

Below 2 GHz-Rev.3/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 44.04 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 1.83 W/kg
SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.773 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 1.57 W/kg

Below 2 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.56 W/kg

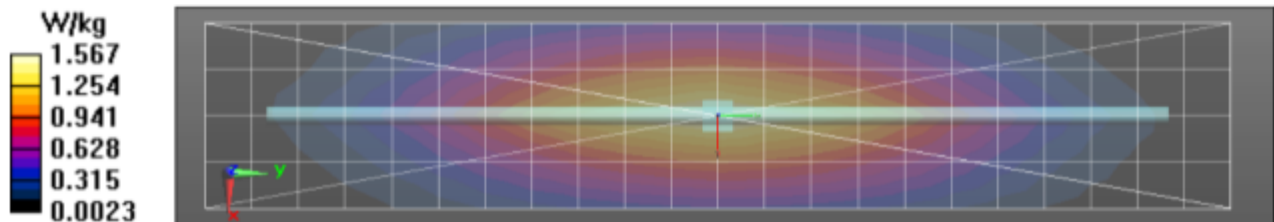

Motorola Solutions, Inc. EME Laboratory

Date/Time: 3/31/2020 9:16:32 AM

Robot#: DASY5-PG-1 | Run#: AM-SYSP-450H-200331-01
Dipole Model# D450V3
Phantom#: ELI4 1022
Tissue Temp: 20.6 (C)
Serial#: 1054
Test Freq: 450.0000 (MHz)
Start Power: 250 (mW)
Rotation (ID): 0.11 dB
Adjusted SAR (1W): 4.72 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 450 MHz, ConvF(11.84, 11.84, 11.84) @ 450 MHz
Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (41x221x1):


Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 43.97 V/m; Power Drift = -0.02 dB
Fast SAR: SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.885 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 1.64 W/kg

Below 2 GHz-Rev.3/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 43.97 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.92 W/kg
SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.787 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 1.64 W/kg

Below 2 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 1.65 W/kg

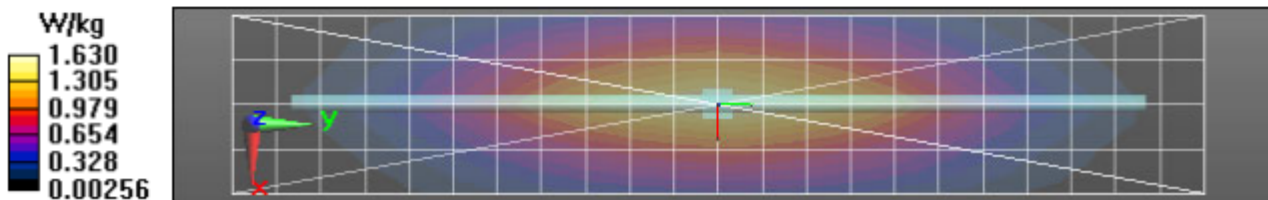

Motorola Solutions, Inc. EME Laboratory
Date/Time: 4/1/2020 10:21:01 AM

Robot#: DASY5-PG-1 | Run#: AM-SYSP-450H-200401-04
Dipole Model# D450V3
Phantom#: ELI4 1022
Tissue Temp: 20.6 (C)
Serial#: 1054
Test Freq: 450.0000 (MHz)
Start Power: 250 (mW)
Rotation (1D): 0.14 dB
Adjusted SAR (1W): 4.84 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 450$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 450 MHz, ConvF(11.84, 11.84, 11.84) @ 450 MHz
Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (41x221x1):


Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 44.77 V/m; Power Drift = -0.02 dB
Fast SAR: SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.911 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 1.66 W/kg

Below 2 GHz-Rev.3/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 44.77 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.94 W/kg
SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.814 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 1.66 W/kg

Below 2 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 1.66 W/kg

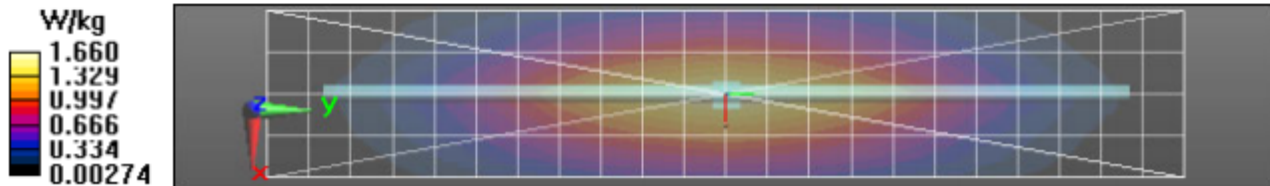

Appendix E DUT Scans

Assessments at the Body - Table 18

Motorola Solutions, Inc. EME Laboratory

Date/Time: 3/31/2020 10:31:40 AM

Robot#: DASY5-PG-1 | Run#: AM-AB-200331-03
 Model#: PMUE5644A
 Phantom#: ELI4 1022
 Tissue Temp: 20.6 (C)
 Serial#: 16514WE0373
 Antenna: Fixed antenna
 Test Freq: 462.6375 (MHz)
 Battery: AA Alkaline
 Carry Acc: 1564028V01 (PMLN7438A)
 Audio Acc: IXTN4011A (IXTN4011AR)
 Start Power: 1.94 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
 Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 462.637 MHz, ConvF(11.84, 11.84, 11.84) @ 462.637 MHz
 Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (71x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$


Reference Value = 48.91 V/m; Power Drift = -0.69 dB
 Fast SAR: SAR(1 g) = 1.64 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 2.04 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 48.91 V/m; Power Drift = -0.85 dB
 Peak SAR (extrapolated) = 2.22 W/kg
 SAR(1 g) = 1.45 W/kg; SAR(10 g) = 1.01 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 1.92 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 1.87 W/kg

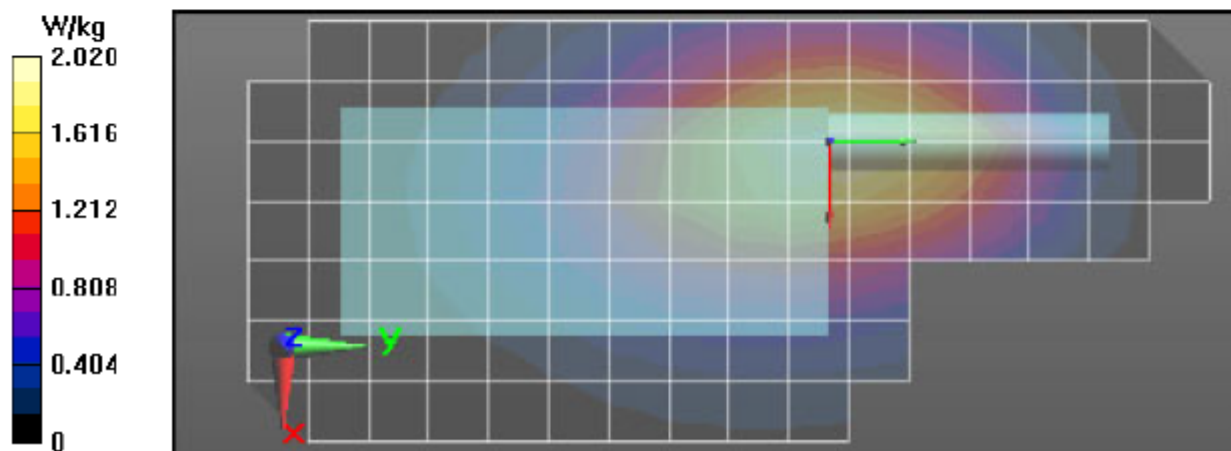

Assessments at the Body - Table 19

Motorola Solutions, Inc. EME Laboratory Date/Time: 3/31/2020 12:03:59 PM

Robot#: DASY5-PG-1 | Run#: AM-AB-200331-06
Model#: PMUE5644A
Phantom#: ELI4 1022
Tissue Temp: 20.7 (C)
Serial#: 16514WE0373
Antenna: Fixed antenna
Test Freq: 462.6375 (MHz)
Battery: AA Alkaline
Cary Acc: 42015005001
Audio Acc: IXTN4011A (IXTN4011AR)
Start Power: 1.94 (W)


Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 462.637 MHz, ConvF(11.84, 11.84, 11.84) @ 462.637 MHz
Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (71x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Reference Value = 46.79 V/m; Power Drift = -0.82 dB
Fast SAR: SAR(1 g) = 1.47 W/kg; SAR(10 g) = 1.04 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 1.84 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 46.79 V/m; Power Drift = -1.00 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.871 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 1.73 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$
Maximum value of SAR (measured) = 1.69 W/kg

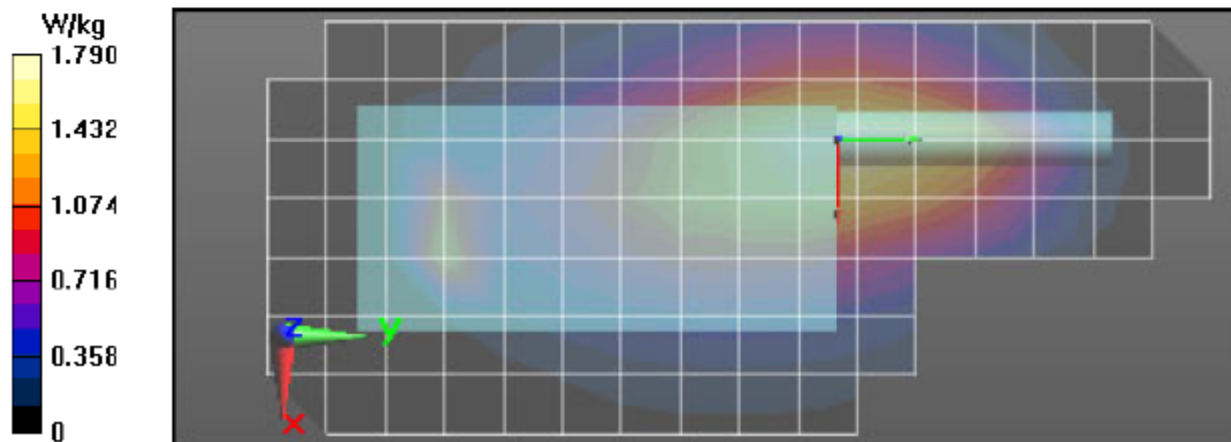

Assessment at the Body – Table 20

Motorola Solutions, Inc. EME Laboratory

Date/Time: 3/31/2020 12:34:52 PM

Robot#: DASY5-PG-1 | Run#: AM-AB-200331-07
 Model#: PMUE5644A
 Phantom#: ELI4 1022
 Tissue Temp: 20.7 (C)
 Serial#: 16514WE0373
 Antenna: Fixed antenna
 Test Freq: 462.6375 (MHz)
 Battery: AA Alkaline
 Carry Acc: 1564028V01 (PMLN7438A)
 Audio Acc: NTN8867A (53724C)
 Start Power: 1.94 (W)


Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
 Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 462.637 MHz, ConvF(11.84, 11.84, 11.84) @ 462.637 MHz
 Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (71x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Reference Value = 50.00 V/m; Power Drift = -0.81 dB
 Fast SAR: SAR(1 g) = 1.68 W/kg; SAR(10 g) = 1.2 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 2.09 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 50.00 V/m; Power Drift = -0.97 dB
 Peak SAR (extrapolated) = 2.26 W/kg
 SAR(1 g) = 1.49 W/kg; SAR(10 g) = 1.04 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 1.96 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$
 Maximum value of SAR (measured) = 1.92 W/kg

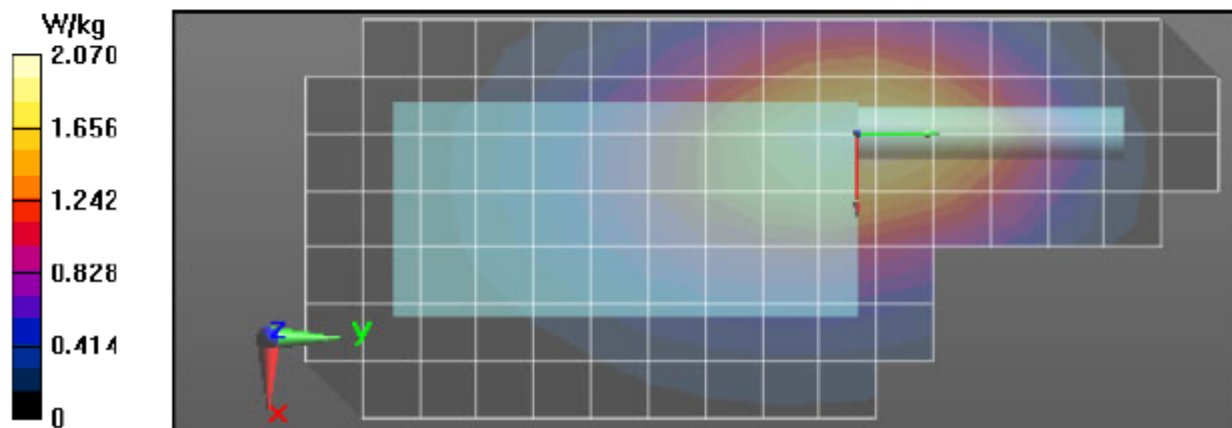

Assessments at the Face - Table 22

Motorola Solutions, Inc. EME Laboratory

Date/Time: 3/31/2020 2:03:33 PM

Robot#: DASY5-PG-1 | Run#: AM-FACE-200331-10
Model#: PMUE5644A
Phantom#: ELI4 1022
Tissue Temp: 20.8 (C)
Serial#: 16514WE0373
Antenna: Fixed antenna
Test Freq: 462.6375 (MHz)
Battery: AA Alkaline
Cary Acc: @ front
Audio Acc: N/A
Start Power: 1.94 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 463$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 462.637 MHz, ConvF(11.84, 11.84, 11.84) @ 462.637 MHz
Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Face Scan/1-Area Scan (71x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 42.27 V/m; Power Drift = -0.79 dB

Fast SAR: SAR(1 g) = 1.4 W/kg; SAR(10 g) = 1.01 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.72 W/kg

Below 2 GHz-Rev.3/Face Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 42.27 V/m; Power Drift = -0.97 dB


Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.898 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.57 W/kg

Below 2 GHz-Rev.3/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.54 W/kg

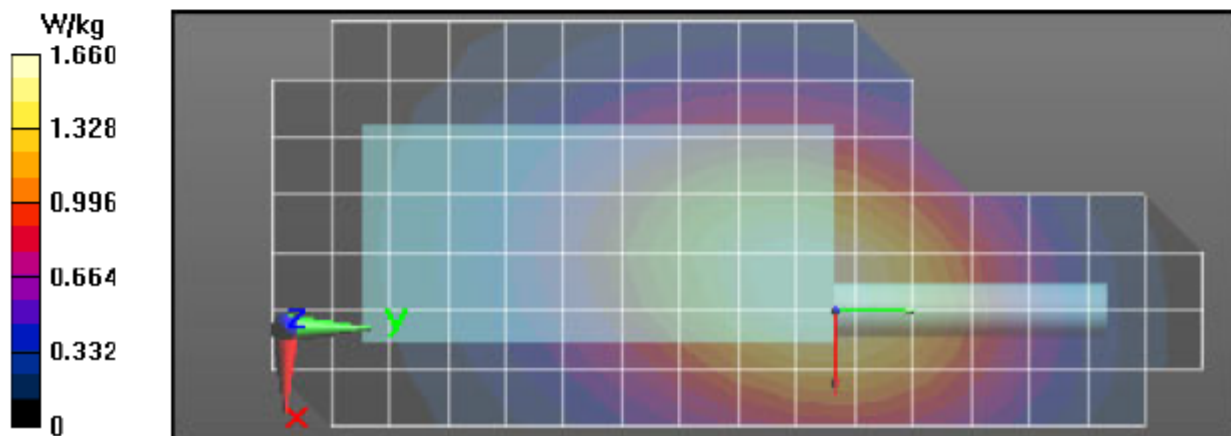

Assessments at the Body - Table 24

Motorola Solutions, Inc. EME Laboratory
Date/Time: 3/31/2020 4:32:24 PM

Robot#: DASY5-PG-1 | Run#: AM-AB-200331-14
 Model#: PMUE5644A
 Phantom#: ELI4 1022
 Tissue Temp: 21.0 (C)
 Serial#: 16514WE0373
 Antenna: Fixed antenna
 Test Freq: 467.6375 (MHz)
 Battery: AA Alkaline
 Carry Acc: 1564028V01 (PMLN7438A)
 Audio Acc: IXTN4011A (IXTN4011AR)
 Start Power: 0.500 (W)

Comments:


Duty Cycle: 1:1, Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$
 Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 467.637 MHz, ConvF(11.84, 11.84, 11.84) @ 467.637 MHz
 Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (71x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Reference Value = 20.79 V/m; Power Drift = -0.48 dB
Fast SAR: SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.220 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 0.385 W/kg

Below 2 GHz-Rev.3/Ab Scan/2-Volume 2D Scan (41x41x1): Interpolated grid: $dx=0.7500 \text{ mm}$, $dy=0.7500 \text{ mm}$, $dz=1.000 \text{ mm}$
 Reference Value = 20.79 V/m; Power Drift = -0.54 dB
Fast SAR: SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.220 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 0.373 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 23.62 V/m; Power Drift = -0.22 dB
 Peak SAR (extrapolated) = 0.535 W/kg
SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.248 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 0.465 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$
 Maximum value of SAR (measured) = 0.371 W/kg

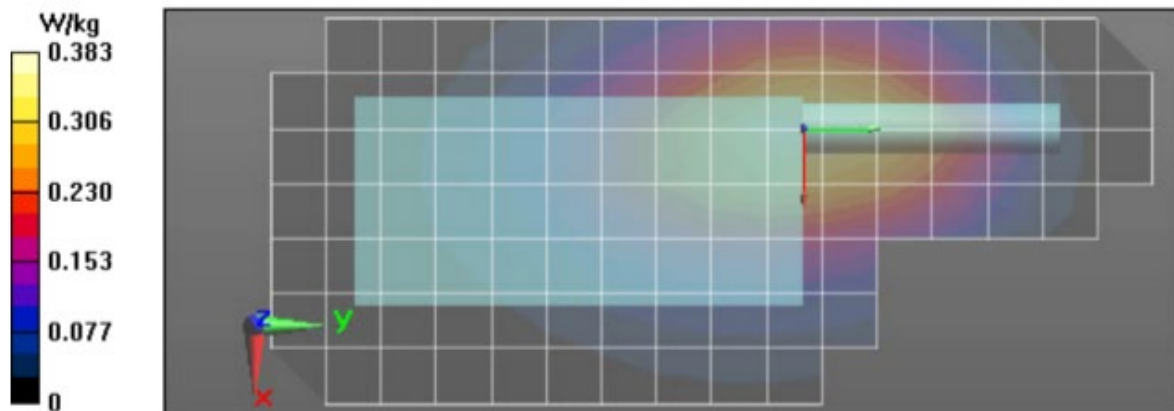

Assessments at the Body - Table 25

Motorola Solutions, Inc. EME Laboratory

Date/Time: 3/31/2020 7:56:45 PM

Robot#: DASY5-PG-1 | Run#: ZZ-AB-200331-17
 Model#: PMUE5644A
 Phantom#: ELI4 1022
 Tissue Temp: 20.8 (C)
 Serial#: 16514WE0373
 Antenna: Fixed antenna
 Test Freq: 467.6375 (MHz)
 Battery: 1532
 Carry Acc: 42015005001
 Audio Acc: IXTN4011A (IXTN4011AR)
 Start Power: 0.469 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$
 Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 467.637 MHz, ConvF(11.84, 11.84, 11.84) @ 467.637 MHz
 Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (71x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$


Reference Value = 18.14 V/m; Power Drift = -0.13 dB
 Fast SAR: SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.165 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 0.293 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$,

$dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 18.14 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 0.341 W/kg
 SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.145 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 0.290 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$,

$dz=10\text{mm}$
 Maximum value of SAR (measured) = 0.289 W/kg

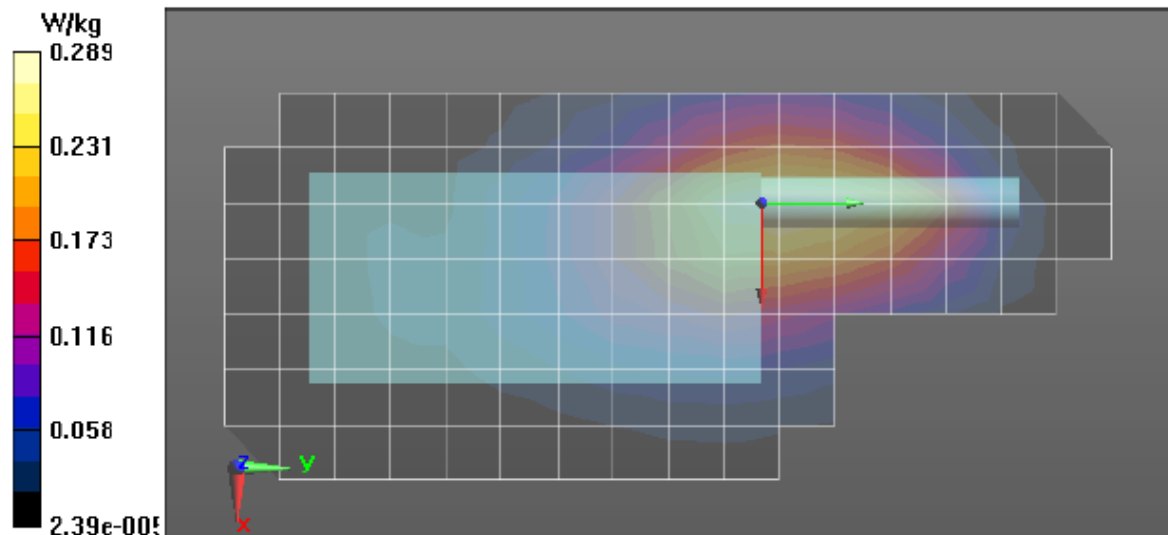

Assessments at the Face - Table 27

Motorola Solutions, Inc. EME Laboratory

Date/Time: 3/31/2020 10:25:36 PM

Robot#: DASY5-PG-1 | Run#: ZZ-FACE-200331-22
 Model#: PMUE5644A
 Phantom#: ELI4 1022
 Tissue Temp: 20.9 (C)
 Serial#: 16514WE0373
 Antenna: Fixed antenna
 Test Freq: 467.6375 (MHz)
 Battery: AA Alkaline
 Carry Acc: @ front
 Audio Acc: N/A
 Start Power: 0.500 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$
 Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 467.637 MHz, ConvF(11.84, 11.84, 11.84) @ 467.637 MHz
 Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Face Scan/1-Area Scan (71x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$


Reference Value = 23.53 V/m; Power Drift = -0.49 dB
Fast SAR: SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.315 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 0.536 W/kg

Below 2 GHz-Rev.3/Face Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.53 V/m; Power Drift = -0.59 dB
 Peak SAR (extrapolated) = 0.573 W/kg
SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.288 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 0.505 W/kg

Below 2 GHz-Rev.3/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 0.498 W/kg

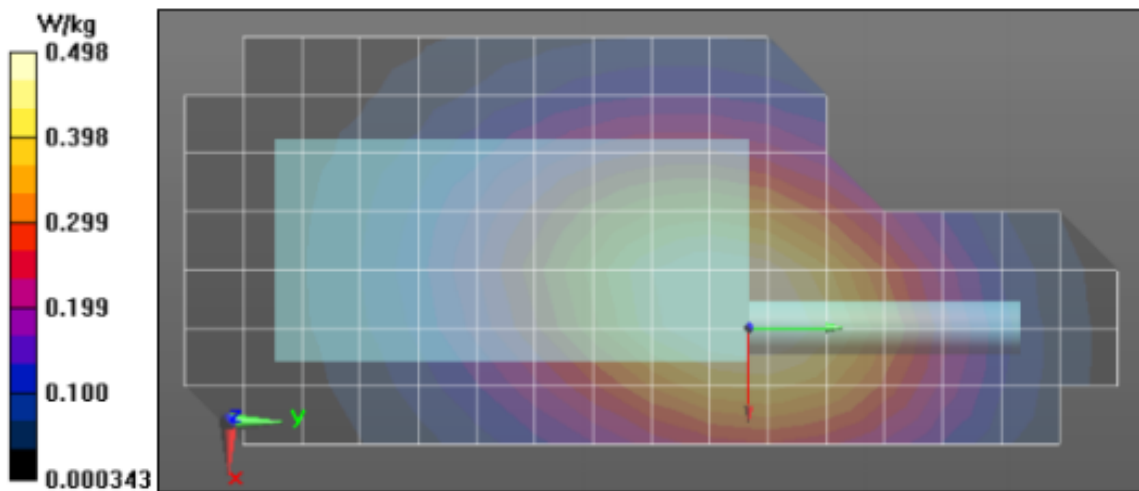

APPENDIX F
Shortened Scan of Highest SAR configuration

Shortened Scan Table 28

Motorola Solutions, Inc. EME Laboratory
Date/Time: 4/1/2020 12:08:47 PM

Robot#: DASY5-PG-1 | Run#: AM-AB-200401-06
 Model#: PMUE5644A
 Phantom#: ELI4 1022
 Tissue Temp: 20.5 (C)
 Serial#: 16514WE0373
 Antenna: Fixed antenna
 Test Freq: 462.6375 (MHz)
 Battery: AA Alkaline
 Carry Acc: 1564028V01 (PMLN7438A)
 Audio Acc: NTN8867A (53724C)
 Start Power: 1.94 (W)

Comments: Shorten Scan


Duty Cycle: 1:1, Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$
 Probe: EX3DV4 - SN7533, Calibrated: 11/6/2019, Frequency: 462.637 MHz, ConvF(11.84, 11.84, 11.84) @ 462.637 MHz
 Electronics: DAE4 Sn1488, Calibrated: 7/23/2019

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (71x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Reference Value = 49.39 V/m; Power Drift = -0.73 dB
 Fast SAR: SAR(1 g) = 1.64 W/kg; SAR(10 g) = 1.16 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 2.03 W/kg

Below 2 GHz-Rev.3/Ab Scan/2-Volume 2D Scan (41x41x1): Interpolated grid: $dx=0.7500 \text{ mm}$,
 $dy=0.7500 \text{ mm}$, $dz=1.000 \text{ mm}$
 Reference Value = 49.39 V/m; Power Drift = -0.81 dB
 Fast SAR: SAR(1 g) = 1.58 W/kg; SAR(10 g) = 1.14 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.94 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (7x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$,
 $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 49.39 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 2.44 W/kg
 SAR(1 g) = 1.61 W/kg; SAR(10 g) = 1.13 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 2.11 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$,
 $dz=10\text{mm}$
 Maximum value of SAR (measured) = 1.89 W/kg

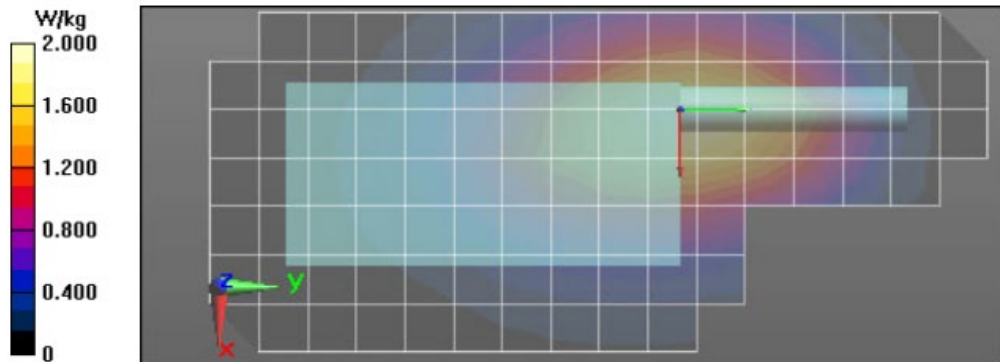

Shortened scan reflects highest SAR producing configuration and is compared to the full scan.

Scan Description	Referenced Table	Test Time (min.)	SAR 1g (W/kg)
Shorten scan (zoom)	28	8	0.88
Full scan (area & zoom)	20	20	1.01

APPENDIX G
DUT Test Position Photos

Photos available in Exhibit 7B

APPENDIX H
DUT, Body worn and audio accessories Photos

Photos available in Exhibit 7B