

## **Certification Test Report**

**FCC ID: AZ489FT7077**  
**IC: 109U-89FT7077**

**FCC Rule Part: 15.247**  
**IC Radio Standards Specification: RSS-247**

**ACS Report Number: 16-2008.W06.1A**

Applicant: Motorola Solutions Sdn Bhd

Model(s): H98QDH9PW7BN

Test Begin Date: **March 7, 2016**  
Test End Date: **April 1, 2016**

Report Issue Date: April 4, 2016



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Reviewed by:**



A handwritten signature in black ink, appearing to read 'Thierry Jean-Charles'.

**Thierry Jean-Charles**  
**EMC Engineer**  
**Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 34 pages**

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	Purpose .....	3
1.2	Applicant Information .....	3
1.3	Product Description.....	3
1.4	Test Methodology and Considerations .....	4
<b>2</b>	<b>TEST FACILITIES .....</b>	<b>5</b>
2.1	Location.....	5
2.2	Laboratory Accreditations/Recognitions/Certifications .....	5
2.3	Radiated & Conducted Emissions Test Site Description .....	6
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>8</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT.....</b>	<b>9</b>
<b>5</b>	<b>SUPPORT EQUIPMENT .....</b>	<b>10</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>	<b>11</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>12</b>
7.1	Antenna Requirement – FCC: Section 15.203 .....	12
7.2	6 dB Bandwidth - FCC: Section 15.247(a)(2) IC: RSS-247 5.5(1); 99% Bandwidth IC: RSS- GEN 6.6 .....	12
7.3	Peak Output Power - FCC Section 15.247(b)(3) IC: RSS-247 5.4(4) .....	16
7.4	Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-247 5.5.....	18
7.5	Power Spectral Density - FCC Section 15.247(e) IC: RSS-247 5.2(2) .....	29
7.6	Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 8.8.....	31
<b>8</b>	<b>CONCLUSION.....</b>	<b>34</b>

**1 GENERAL****1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-247.

**1.2 Applicant Information**

Motorola Solutions Sdn Bhd  
Plot 2 Bayan Lepas Innoplex,  
Industrial Park Mukim 12 SWD  
11900 Bayan Lepas, Penang Malaysia

**1.3 Product Description**

The APX6000 UHF R1 model H98QDH9PW7BN is a two way portable radio capable of analog FM, digital C4FM and TDMA. This radio includes Bluetooth 2.0+EDR, Bluetooth Low Energy (BLE), WLAN 802.11 b/g/n and GPS features. This test report documents compliance of the BLE transceiver.

Technical Details

Mode of Operation: Bluetooth Low Energy (BLE)  
Frequency Range: 2402 MHz - 2480 MHz  
Number of Channels: 40  
Channel Separation: 2 MHz  
Modulations: GFSK  
Antenna Type/Gain: PIFA, 2.58 dBi  
Input Power: 7.4 V Lithium Ion Battery

Model Number: H98QDH9PW7BN

Test Sample Serial Number(s): 756TRZ0368 (RF Conducted Emissions), 756TRX0603 (Radiated and Power Line Conducted Emissions).

Test Sample Condition: The equipment was provided in good condition without any physical damage.

#### **1.4 Test Methodology and Considerations**

The EUT was evaluated for radiated, RF conducted and power line conducted emissions for the Bluetooth Low Energy (BLE) radio while configured using software power setting 24.

Preliminary radiated emission evaluation was performed for the EUT standalone, set in three orthogonal orientations as well as for the EUT set on a single unit charger, the EUT set on a multi-unit charger and the unit connected to a laptop computer via a GCAI cable. The worst case configuration was obtained with the EUT standalone, lying on one side.

The EUT was also evaluated for radiated intermodulation product for the BLE radio transmitting at the same time as the land mobile radio. All intermodulation products were observed to be compliant to the limits of the FCC Section 15.209 and RSS-Gen.

The RF conducted measurements were performed on a sample modified with a temporary connector at the antenna port for direct coupling to the spectrum analyzer.

For power line conducted emissions, preliminary measurements were performed on the unit powered via a multi-unit charger and on the unit set on a single unit charger. The multi-unit charger was fully loaded during the evaluation and led to the worst case configuration as reported in this document.

The assessment for unintentional emissions is documented separately in a Declaration of Conformity/Verification test report.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 475089  
Industry Canada Lab Code: 4175C

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

**2.3 Radiated & Conducted Emissions Test Site Description**

**2.3.1 Semi-Anechoic Chamber Test Site**


The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

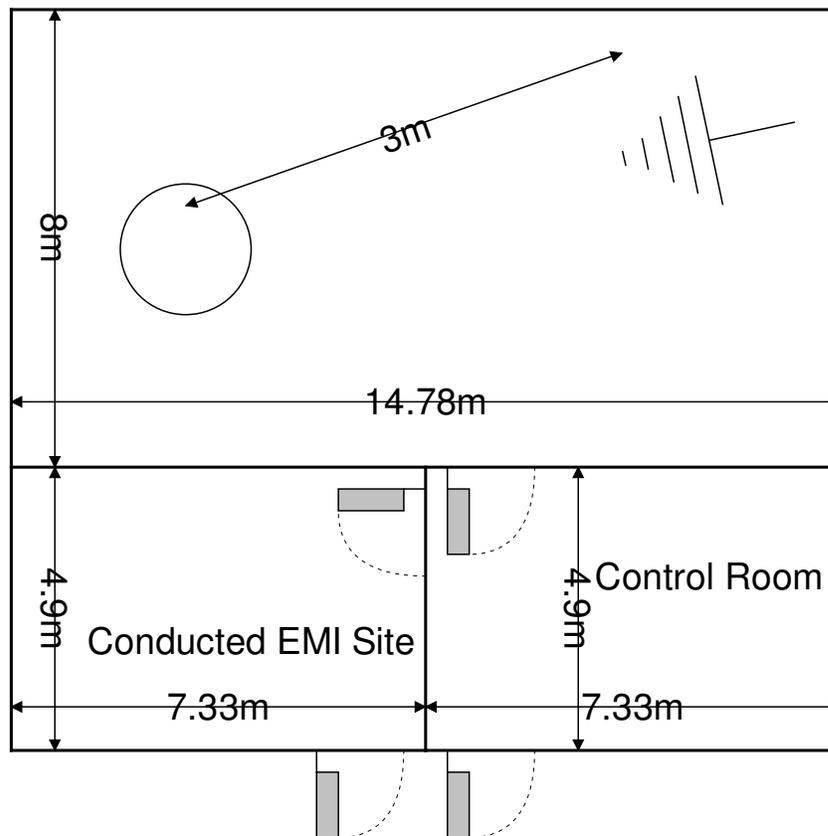


**Figure 2.3.1-1: Semi-Anechoic Chamber Test Site**

**2.3.2 Conducted Emissions Test Site Description**

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m<sup>3</sup>. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50 Ω/50 μH and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

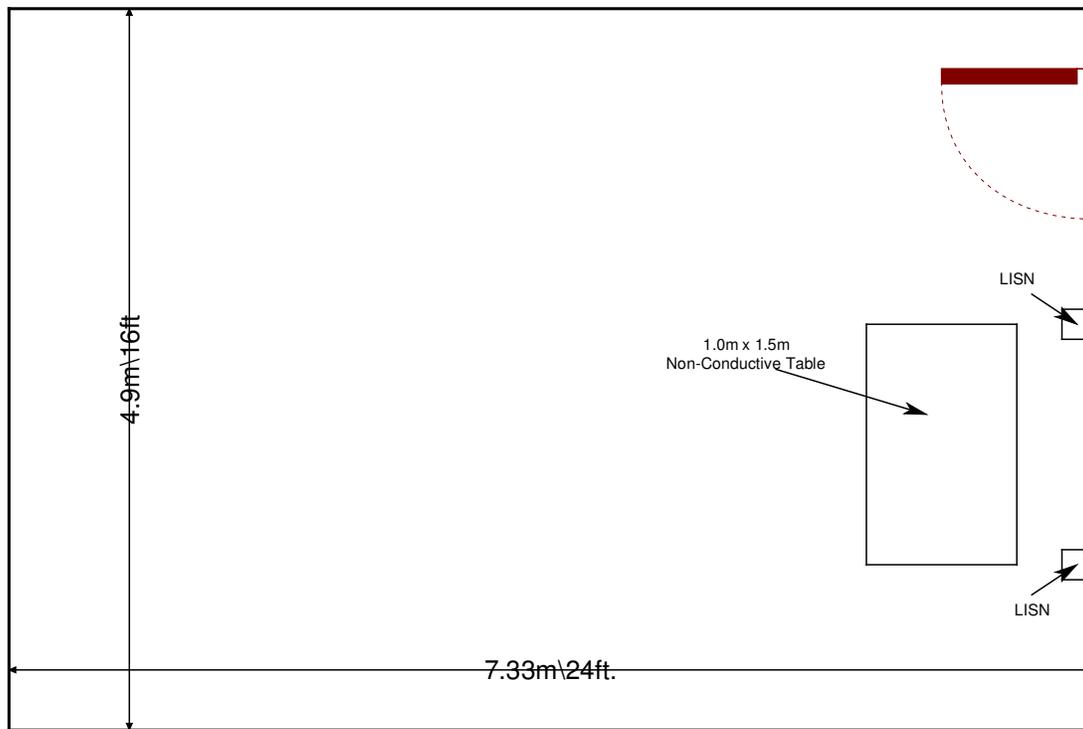

**Figure 2.3.2-1: AC Mains Conducted EMI Site**

### **3 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- ❖ ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ Industry Canada Radio Standards Specification: RSS-247 — Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

**Table 4-1: Test Equipment List**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	7/1/2015	7/1/2016
479	Electro-Metrics	ALP-70	Antennas	158	12/3/2015	12/3/2017
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/26/2014	12/26/2016
653	Suhner	SF-102A	Cables	0944/2A	4/13/2015	4/13/2016
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2006	EMCO	3115	Antennas	2573	4/14/2015	4/14/2017
2008	COM-Power	AH-826	Antennas	81009	NCR	NCR
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	11/18/2015	11/18/2016
2022	EMCO	LISN3825/2R	LISN	1095	9/14/2015	9/14/2017
2045	ACS Boca	Conducted Cable Set	Cable Set	2045	11/11/2015	11/11/2016
2070	Mini Circuits	VHF-8400+	Filter	2070	11/17/2015	11/17/2016
2072	Mini Circuits	VHF-3100+	Filter	30737	11/17/2015	11/17/2016
2086	Merrimac	FAN-6-10K	Attenuators	23148-83-1	11/16/2015	11/16/2016
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/9/2015	12/9/2016
2111	Aeroflex Inmet	40AH2W-20	Attenuator	2111	7/22/2015	7/22/2016
2112	Teledyne Storm Products	921-0101-036	Cables	12-06-698	11/13/2015	11/13/2016
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/22/2015	8/22/2016
3004	Teseq	CFL 9206A	Attenuators	34720	10/7/2015	10/7/2016

**Note: NCR=No Calibration Required**

## 5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment (Radiated Emissions)

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Motorola Solutions	H98QDH9PW7BN	756TRX0603

Note: The EUT was evaluated standalone without any support equipment

Table 5-2: EUT and Support Equipment (Power Line Conducted Emissions)

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Motorola Solutions	H98QDH9PW7BN	756TRX0603
2	Multi-Unit Charger	Motorola Solutions	NNTN8844A	N/A
3	SRX2200 UHF1 ULP Two-Way Radio	Motorola Solutions	H99QDH9PW7BN	756TSB0792
4	APX6000 UHF2 Two-Way Radio	Motorola Solutions	H98SDH9PW7BN	756TSB0824
5	APX6000 7/800 Two-Way Radio	Motorola Solutions	H98UCH9PW7BN	756TSD0459
6	APX6000 UHF1 Two-Way Radio	Motorola Solutions	H98QDH9PW7BN	756TRX0633
7	APX6000 7/800 Two-Way Radio	Motorola Solutions	H98UCH9PW7BN	756TSD0467
8	6 x Resistive Loads	Motorola Solutions	N/A	N/A

Table 5-3: Cable Description (Power Line Conducted Emissions)

Cable #	Cable Type	Length	Shield	Termination
A	Power	2.2 m	No	Charger to AC Mains
B	6 x USB	0.2 m	Yes	Charger to Resistive Load

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

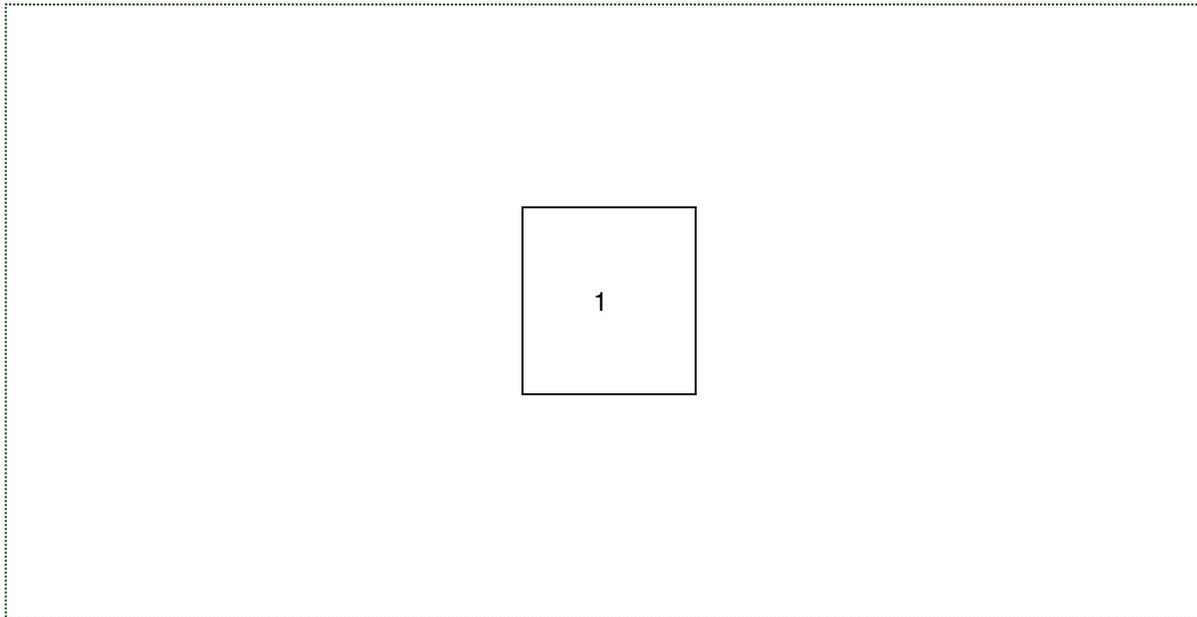


Figure 6-1: EUT Test Setup (Radiated Emissions)

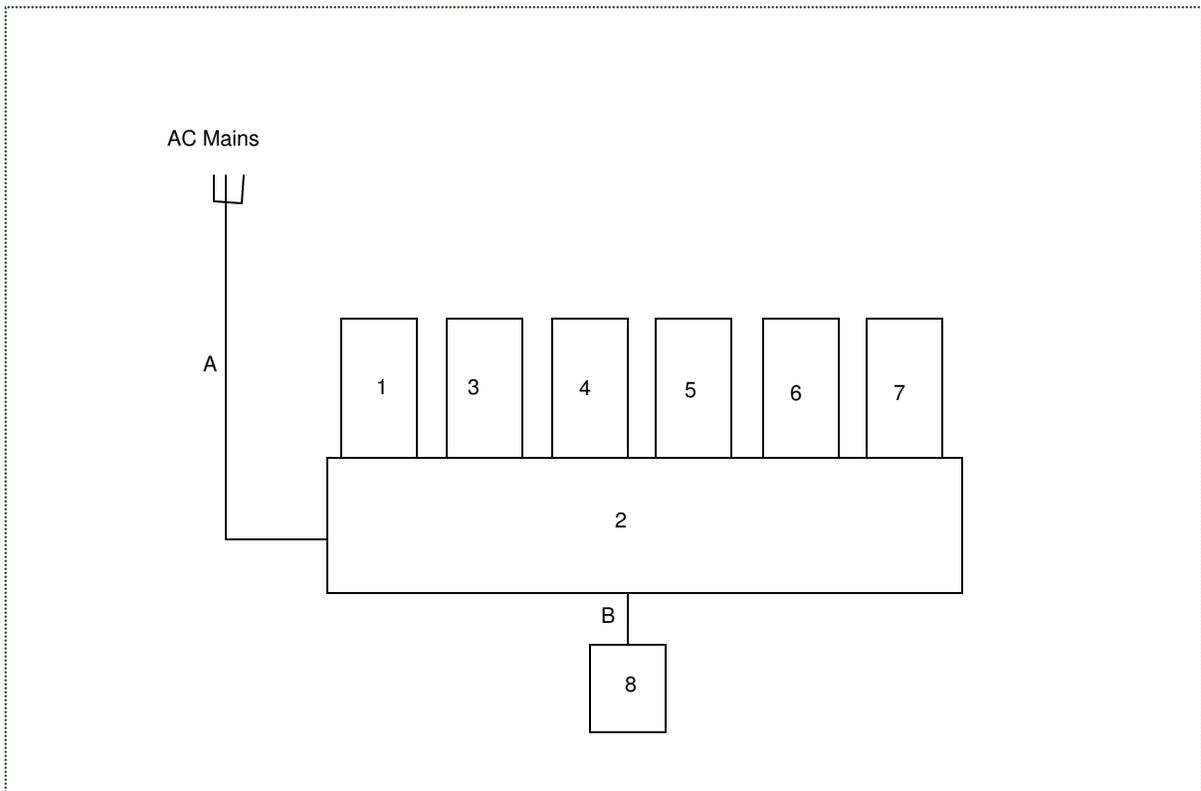


Figure 6-2: EUT Test Setup (Power Line Conducted Emissions)

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses a 2.58 dBi internal PIFA which connects to the RF port via a spring contact. The EUT meets the requirements of FCC Section 15.203.

### 7.2 6 dB Bandwidth - FCC: Section 15.247(a)(2) IC: RSS-247 5.5(1); 99% Bandwidth IC: RSS-GEN 6.6

#### 7.2.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with ANSI C63.10:2013 Section 11.8 DTS Bandwidth Option 2. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. Span was set large enough to capture the emissions and >> RBW.


The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission. The RBW was set to 1% to 5% of the approximated bandwidth. The occupied 99% bandwidth was measured by using 99% bandwidth equipment function of the spectrum analyzer.

#### 7.2.2 Measurement Results

Results are shown below.


**Table 7.2.2-1: 6dB / 99% Bandwidth**

Frequency [MHz]	6dB Bandwidth [kHz]	99% Bandwidth (kHz)
2402	764.00	1050.00
2440	760.00	1050.00
2480	760.00	1050.00

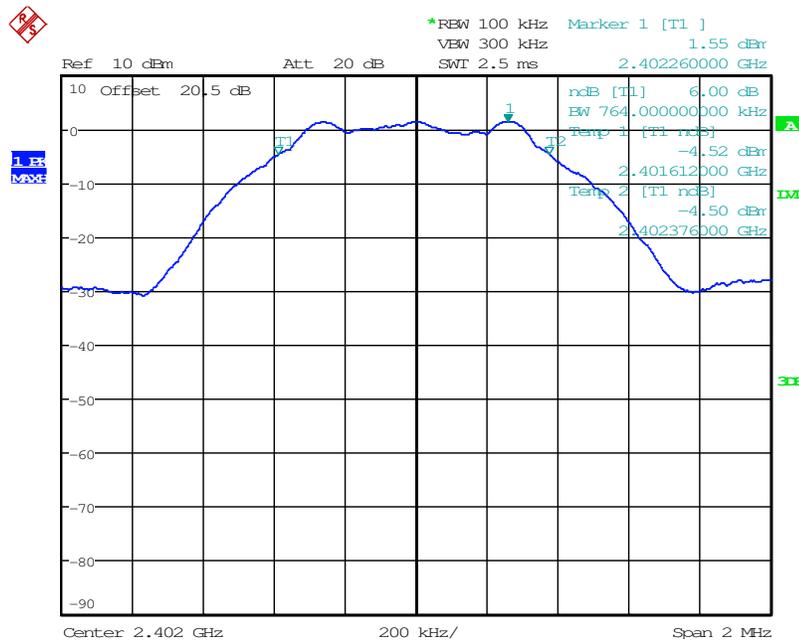


Date: 17.MAR.2016 14:06:37

Figure 7.2.2-1: 6dB BW - Low Channel

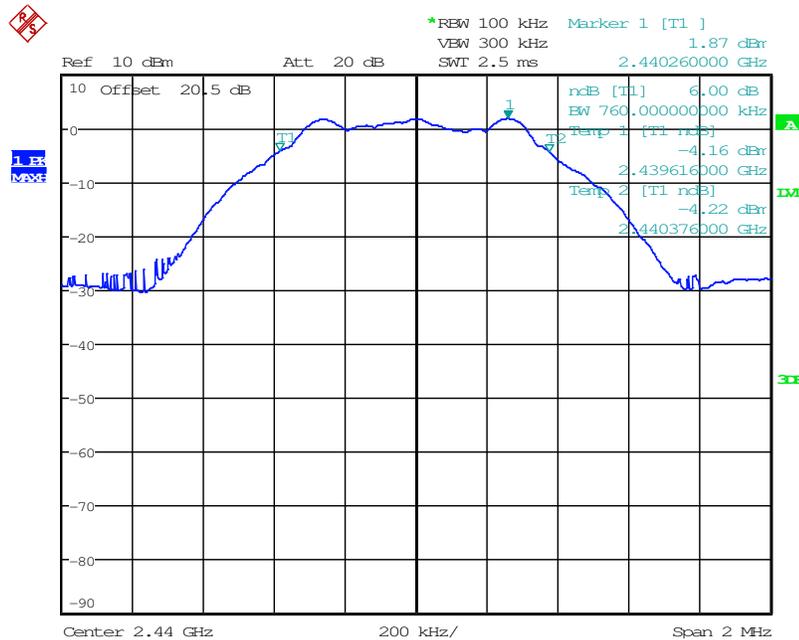


Date: 17.MAR.2016 13:48:40

Figure 7.2.2-2: 6dB BW - Middle Channel

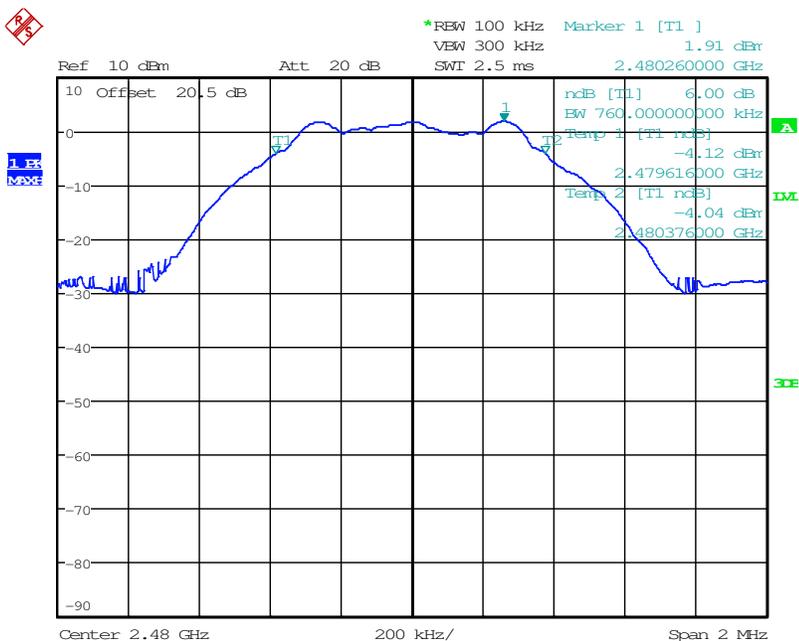


Date: 17.MAR.2016 13:23:49

Figure 7.2.2-3: 6dB BW - High Channel

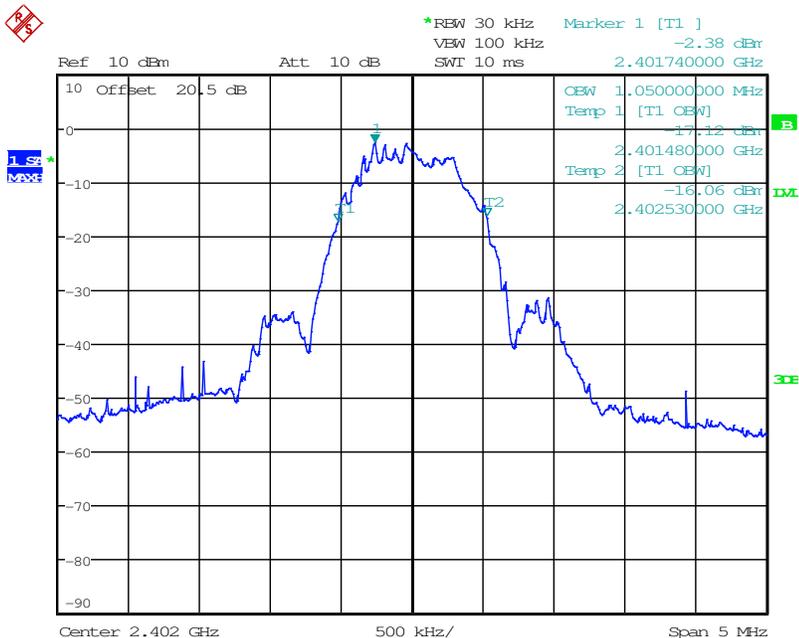


Date: 17.MAR.2016 13:59:39

Figure 7.2.2-4: 99% OBW - Low Channel

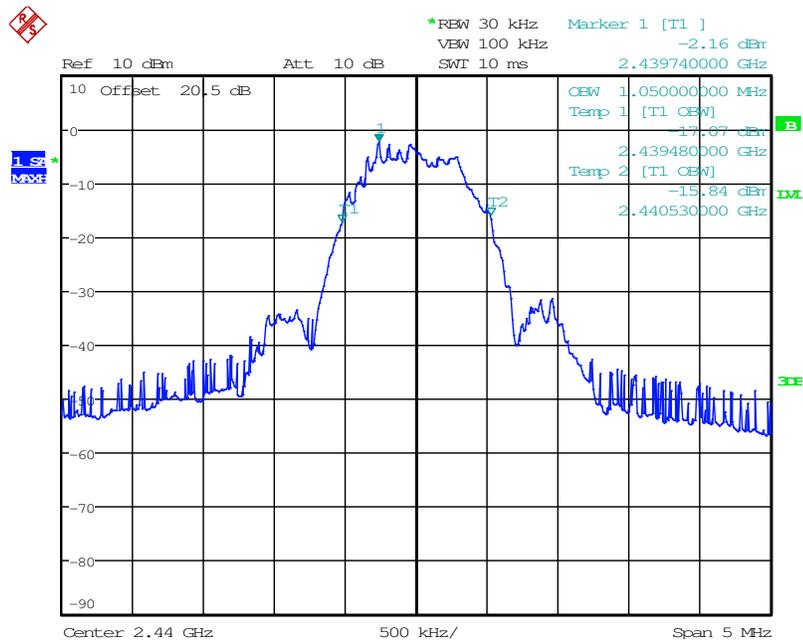

Date: 17.MAR.2016 13:39:29

Figure 7.2.2-5: 99% OBW - Middle Channel

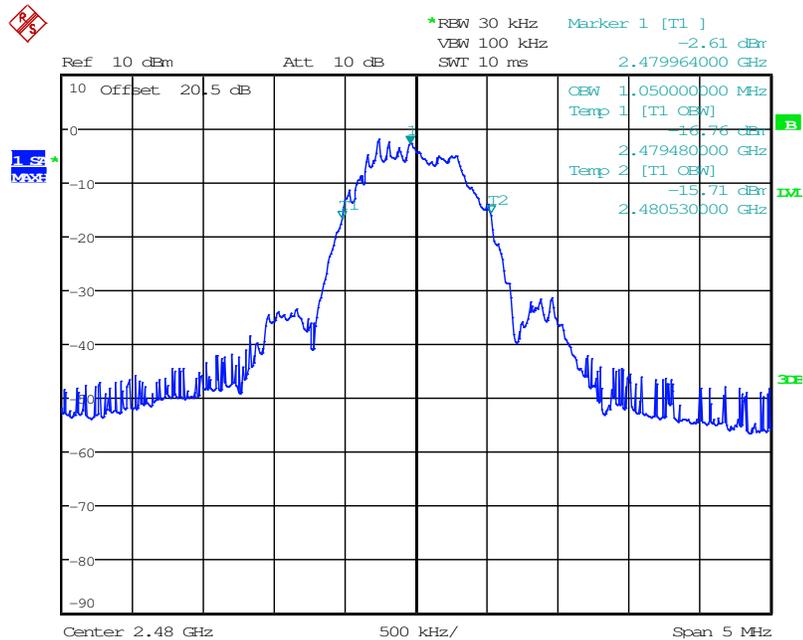

Date: 17.MAR.2016 13:36:09

Figure 7.2.2-6: 99% OBW - High Channel

7.3 Peak Output Power - FCC Section 15.247(b)(3) IC: RSS-247 5.4(4)

7.3.1 Measurement Procedure (Conducted Method)


The fundamental emission output power was measured in accordance with ANSI C63.10:2013 Section 11.9.1.1 RBW ≥ DTS bandwidth. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer through suitable attenuation.

7.3.2 Measurement Results

Results are shown below.


Table 7.3.2-1: RF Output Power

Frequency [MHz]	Level [dBm]
2402	2.65
2440	2.90
2480	2.96

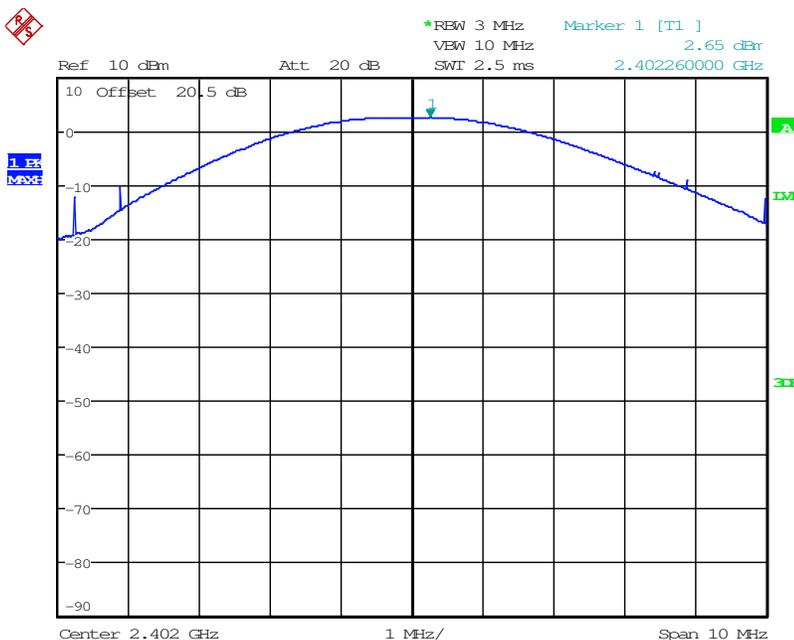


Date: 17.MAR.2016 14:02:26

Figure 7.3.2-1: RF Output Power - Low Channel

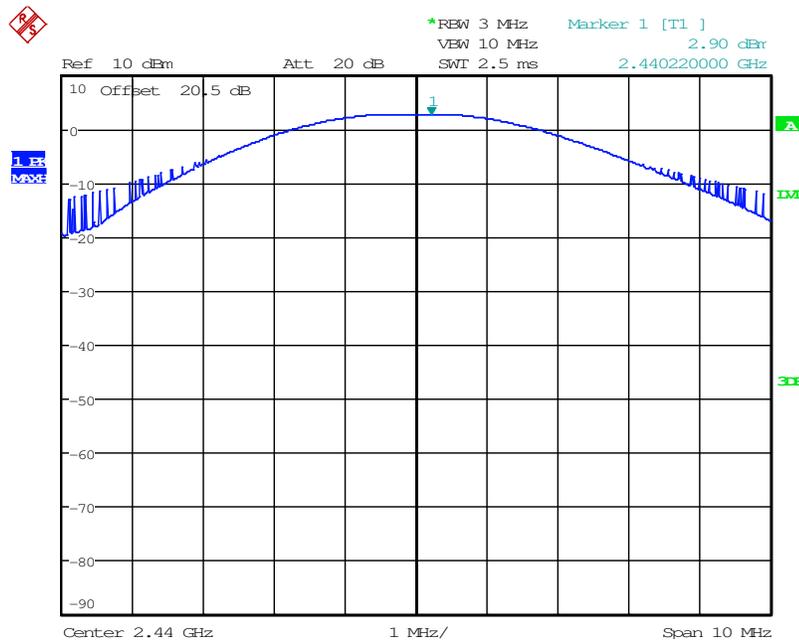

Date: 17.MAR.2016 13:45:17

Figure 7.3.2-2: RF Output Power - Middle Channel

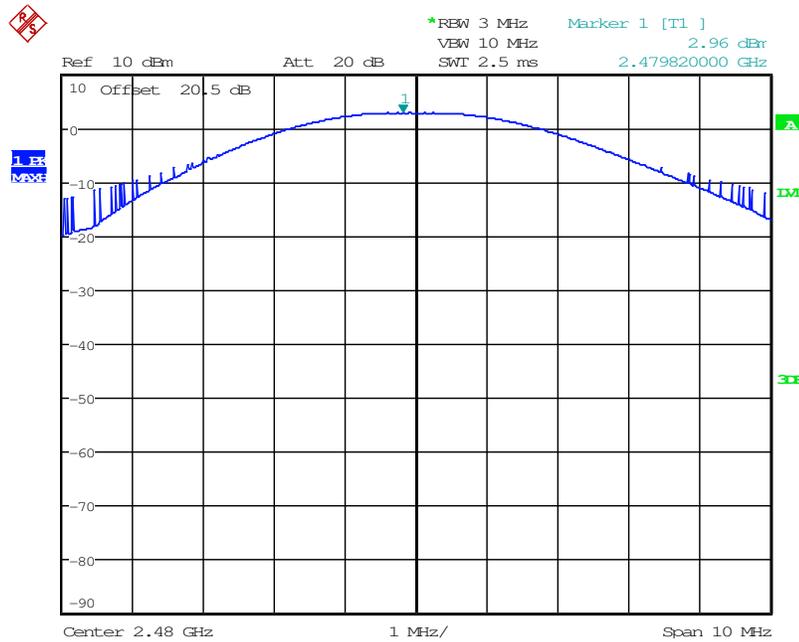

Date: 17.MAR.2016 13:11:27

Figure 7.3.2-3: RF Output Power - High Channel

7.4 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-247 5.5


7.4.1 Band-Edge Compliance of RF Conducted Emissions

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer via suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to 300 kHz.


7.4.1.2 Measurement Results

Results are shown below.

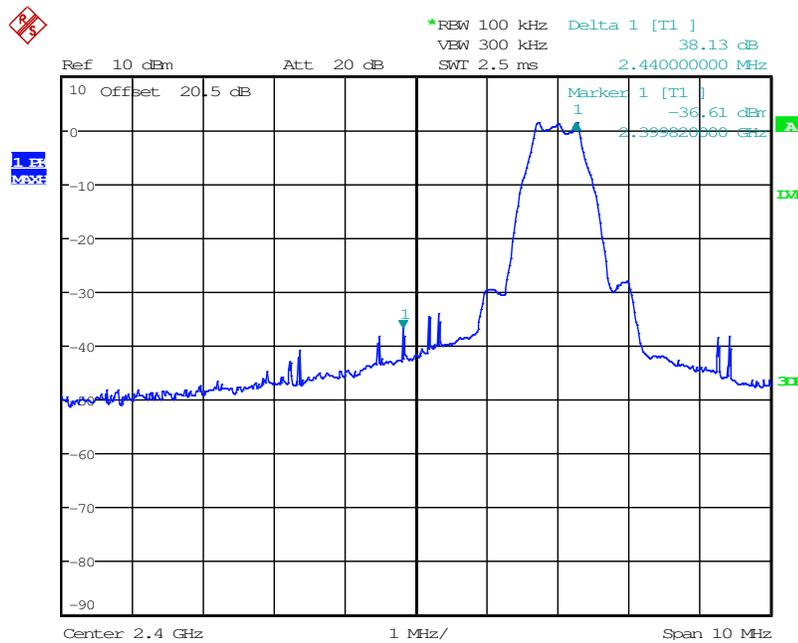

Date: 17.MAR.2016 14:16:44

Figure 7.4.1.2-1: Lower Band-edge

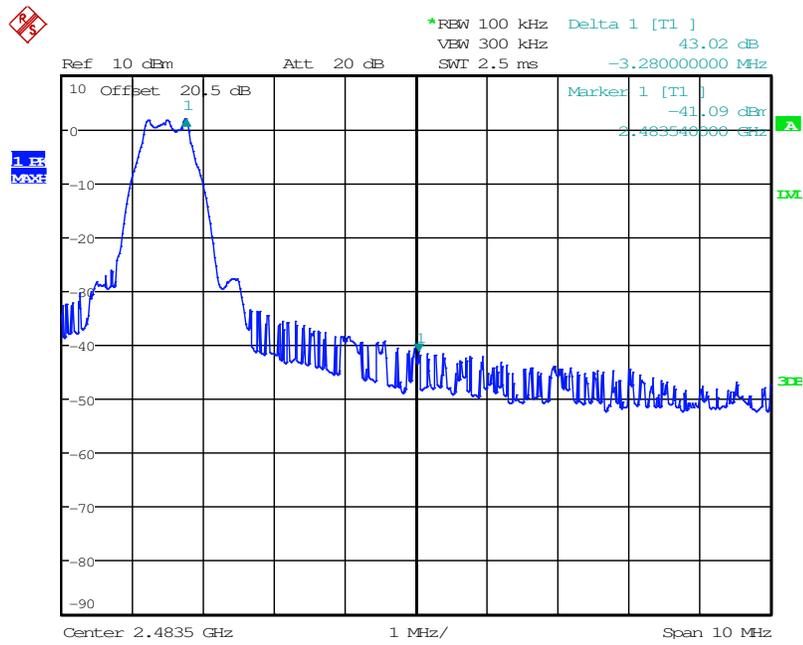

Date: 17.MAR.2016 14:22:35

Figure 7.4.1.2-2: Upper Band-edge


### 7.4.2 RF Conducted Spurious Emissions

#### 7.4.2.1 Measurement Procedure

The RF Conducted Spurious Emissions were measured in accordance with ANSI C63.10:2013 Section 11.11 Emissions in non-restricted frequency bands. The RF output port of the equipment under test was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 26 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak Max Hold function of the analyzer was utilized. The reference level was determined by measuring the Peak PSD level in any 100 kHz bandwidth within the DTS channel bandwidth.


#### 7.4.2.2 Measurement Results

Results are shown below.

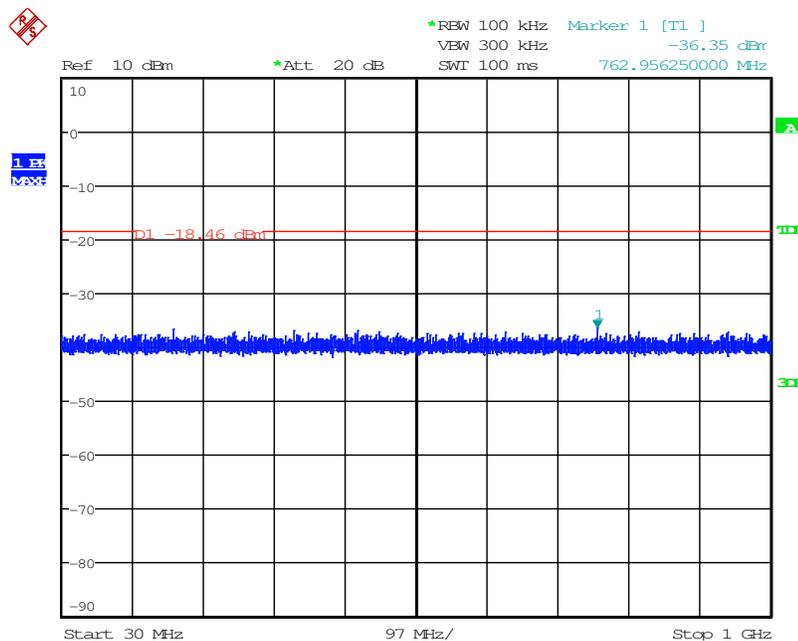


Date: 25.MAR.2016 17:20:24

Figure 7.4.2.2-1: 30 MHz – 1 GHz – Low Channel

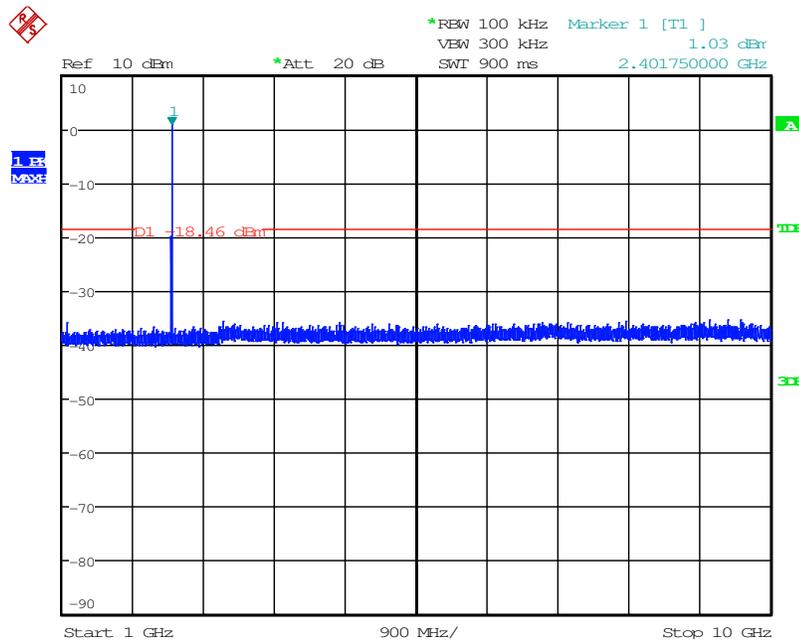


Date: 25.MAR.2016 17:18:29

Figure 7.4.2.2-2: 1 GHz –10 GHz – Low Channel

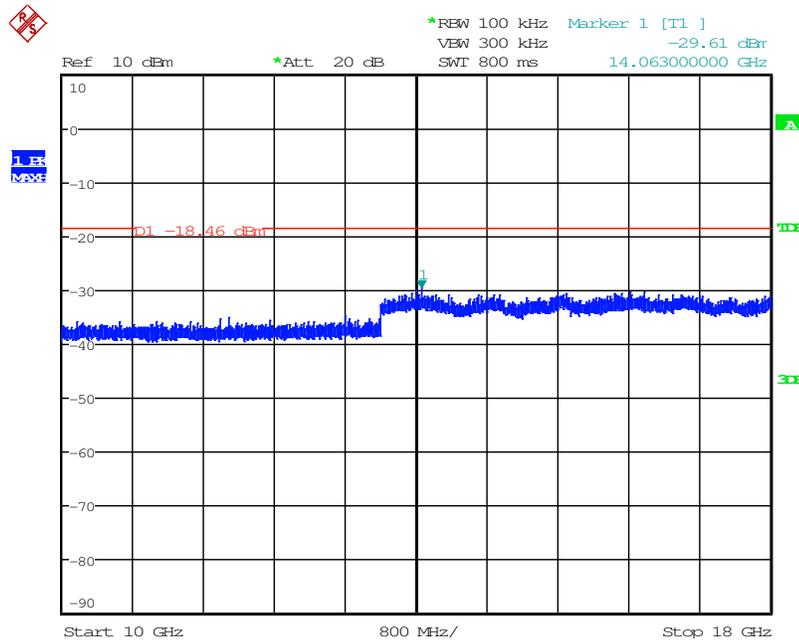


Date: 25.MAR.2016 17:10:42

Figure 7.4.2.2-3: 10 GHz –18 GHz – Low Channel

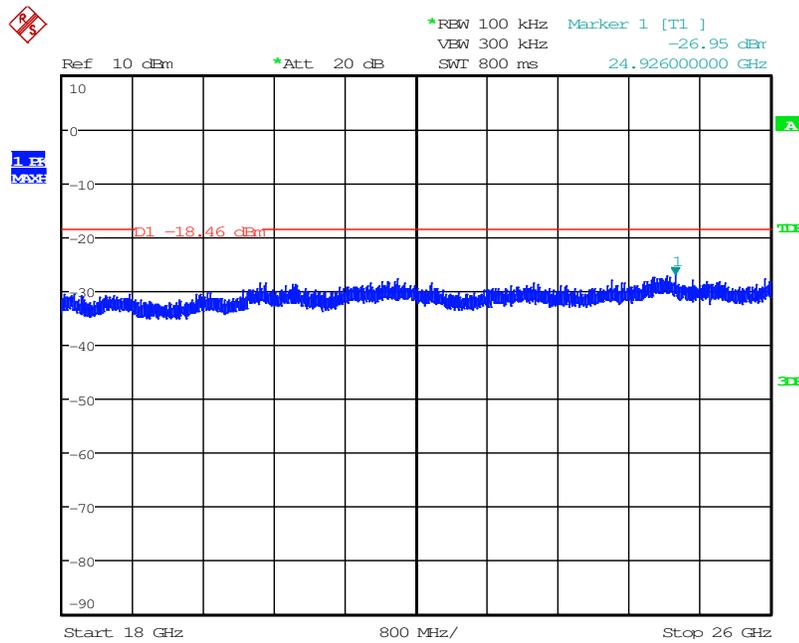


Date: 25.MAR.2016 17:06:28

Figure 7.4.2.2-4: 18 GHz – 26 GHz – Low Channel

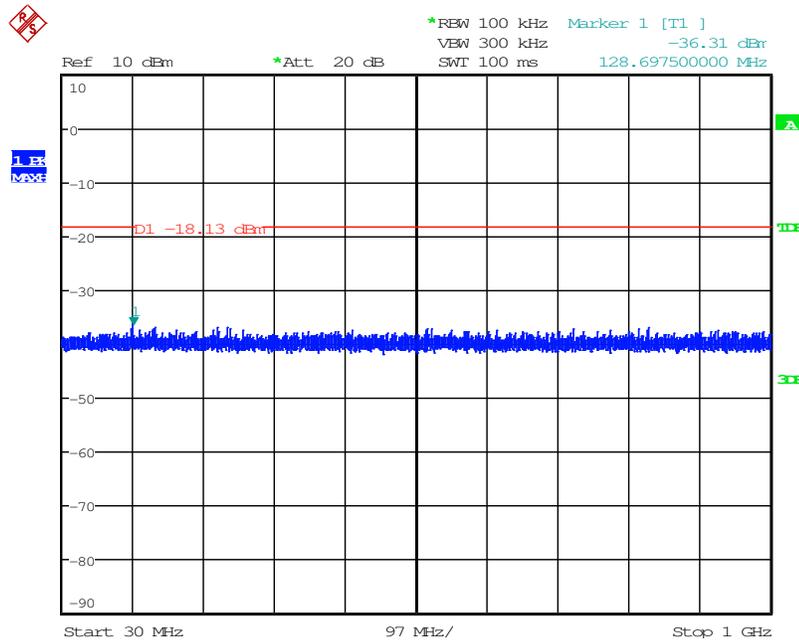


Date: 25.MAR.2016 16:51:15

Figure 7.4.2.2-5: 30 MHz – 1 GHz – Middle Channel

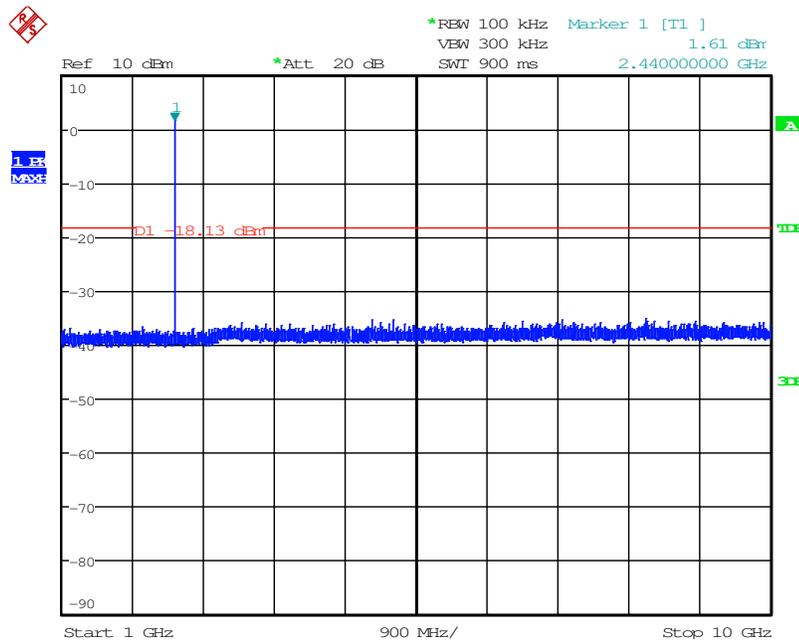


Date: 25.MAR.2016 16:59:47

Figure 7.4.2.2-6: 1 GHz –10 GHz – Middle Channel

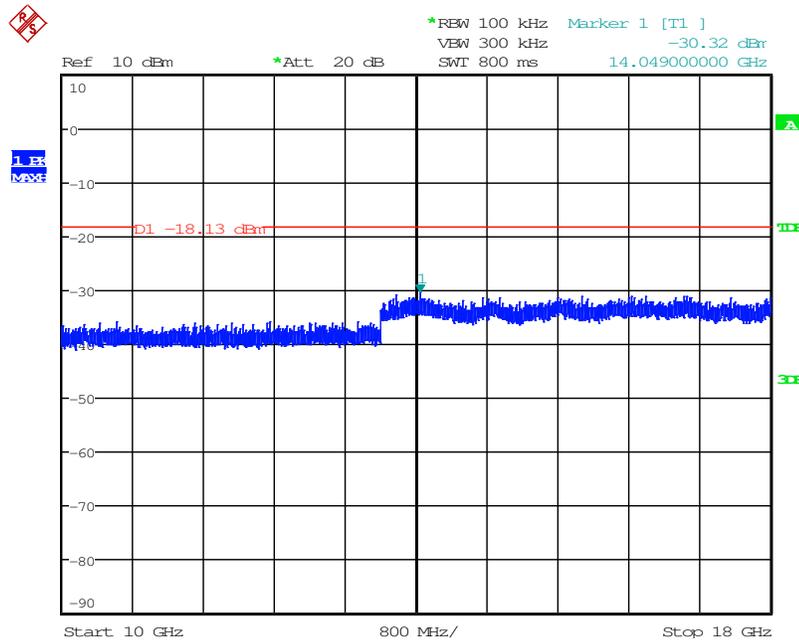


Date: 25.MAR.2016 17:00:59

Figure 7.4.2.2-7: 10 GHz –18 GHz – Middle Channel

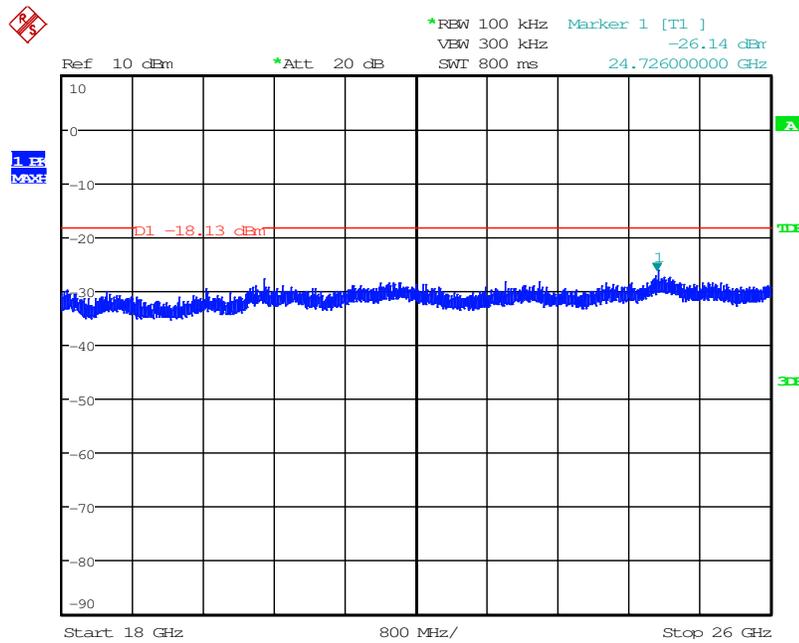


Date: 25.MAR.2016 17:03:17

Figure 7.4.2.2-8: 18 GHz – 26 GHz – Middle Channel

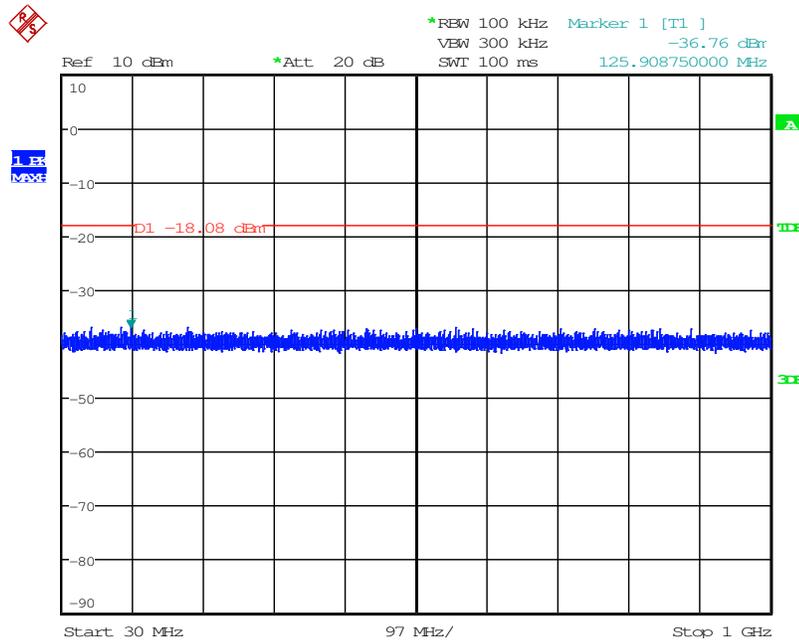


Date: 25.MAR.2016 16:47:55

Figure 7.4.2.2-9: 30 MHz – 1 GHz – High Channel

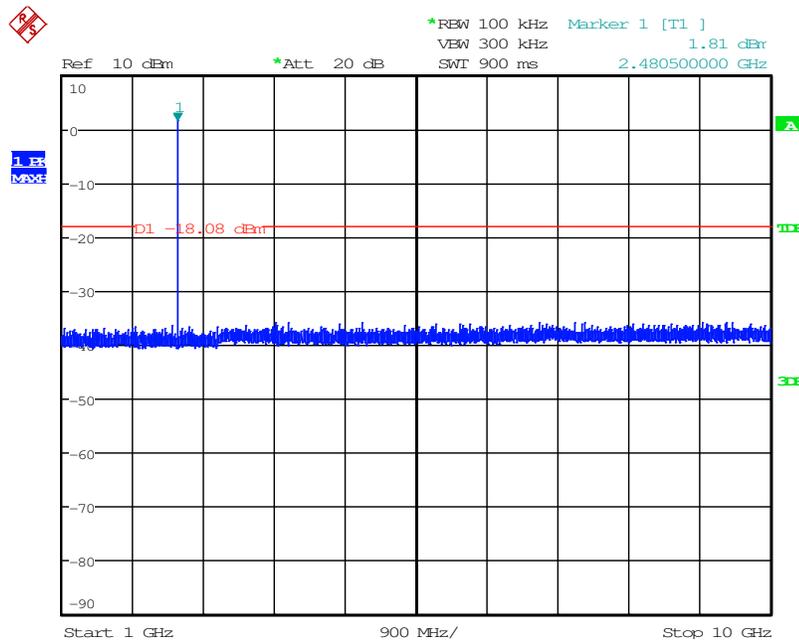


Date: 25.MAR.2016 16:41:44

Figure 7.4.2.2-10: 1 GHz –10 GHz –High Channel

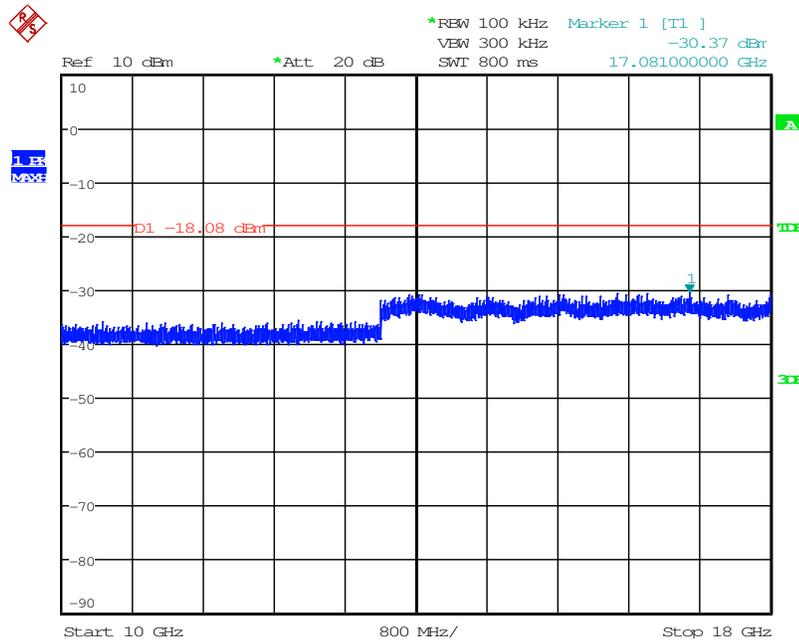

Date: 25.MAR.2016 16:43:34

Figure 7.4.2.2-11: 10 GHz – 18 GHz –High Channel

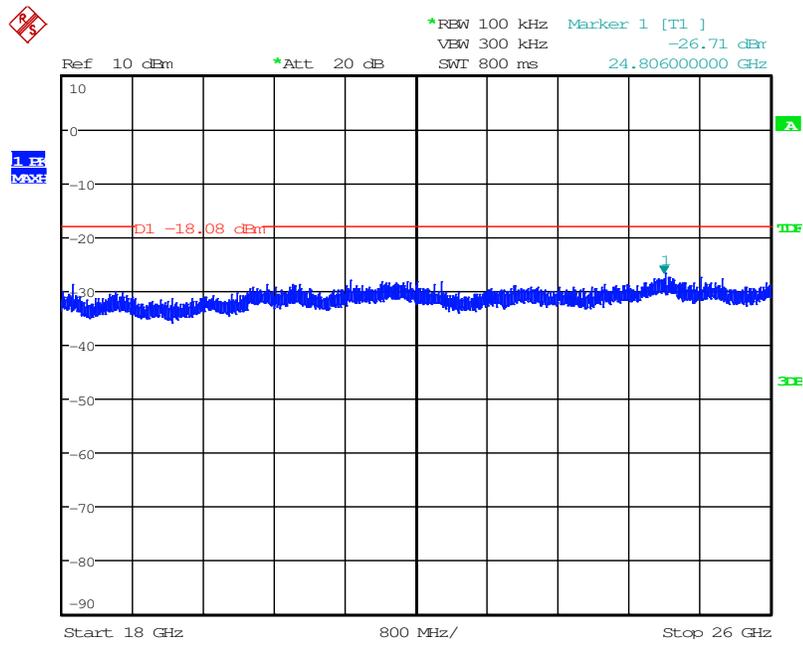

Date: 25.MAR.2016 16:45:38

Figure 7.4.2.2-12: 18 GHz – 26 GHz –High Channel

### 7.4.3 Radiated Spurious Emissions into Restricted Frequency Bands - FCC 15.205, 15.209; IC: RSS-Gen 8.9, 8.10

#### 7.4.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements are made with RBW of 1 MHz and VBW of 3 MHz. Average measurements are performed in the linear scale using VBW of 30 Hz over a 5 second sweep.

#### 7.4.3.2 Measurement Results

Radiated band-edge and spurious emissions found in the restricted frequency bands of 9 kHz to 26 GHz are reported in the tables below.

**Table 7.4.3.2-1: Radiated Spurious Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Low Channel = 2402 MHz</b>										
2390	62.59	47.68	H	-5.60	56.99	42.08	74.0	54.0	17.0	11.9
12010	40.69	30.12	H	16.59	57.28	46.71	83.5	63.5	26.2	16.8
12010	41.65	30.36	V	16.59	58.24	46.95	83.5	63.5	25.3	16.6
<b>Middle Channel = 2440 MHz</b>										
7320	48.14	40.15	H	8.84	56.98	48.99	74.0	54.0	17.0	5.0
7320	45.23	36.26	V	8.84	54.07	45.10	74.0	54.0	19.9	8.9
<b>High Channel = 2480 MHz</b>										
2483.5	77.90	53.04	H	-5.15	72.75	47.89	74.0	54.0	1.3	6.1
2483.5	63.35	45.33	V	-5.15	58.20	40.18	74.0	54.0	15.8	13.8
7440	47.13	39.12	H	9.37	56.50	48.49	74.0	54.0	17.5	5.5
7440	44.83	35.49	V	9.37	54.20	44.86	74.0	54.0	19.8	9.1

**Notes:**

- The emissions above 10 GHz were measured at a test distance of 1m. The limits are corrected accordingly using a distance factor of  $20 \cdot \log(10/3)$  dB = 9.5 dB.
- All emissions above 12.01 GHz were attenuated below the limits and the noise floor of the measurement equipment.

**7.4.3.3 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

$CF_T$	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
$R_U$	=	Uncorrected Reading
$R_C$	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

**Example Calculation: Peak**Corrected Level:  $62.59 + (-5.6) = 56.99$  dB $\mu$ V/mMargin:  $74$  dB $\mu$ V/m  $- 56.99$  dB $\mu$ V/m =  $17.0$  dB**Example Calculation: Average**Corrected Level:  $47.68 + (-5.6) = 42.08$  dB $\mu$ V/mMargin:  $54$  dB $\mu$ V/m  $- 42.08$  dB $\mu$ V/m =  $11.9$  dB

7.5 Power Spectral Density - FCC Section 15.247(e) IC: RSS-247 5.2(2)

7.5.1 PSD Measurement Procedure (Conducted Method)


The power spectral density was measured in accordance with ANSI C63.10:2013 Section 10.2 Method PKPSD (peak PSD). The RF output port of the EUT was directly connected to the input of the spectrum analyzer. Offset values were input for cable and external attenuation. The spectrum analyzer RBW was set to 3 kHz and VBW 10 kHz. Span was adjusted to 1.5 times the 6 dB bandwidth and the sweep time was set to auto.

7.5.2 Measurement Results

Results are shown below.


Table 7.5.2-1: Power Spectral Density

Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
2402	-12.81	8.0	20.81
2440	-12.46	8.0	20.46
2480	-12.46	8.0	20.46

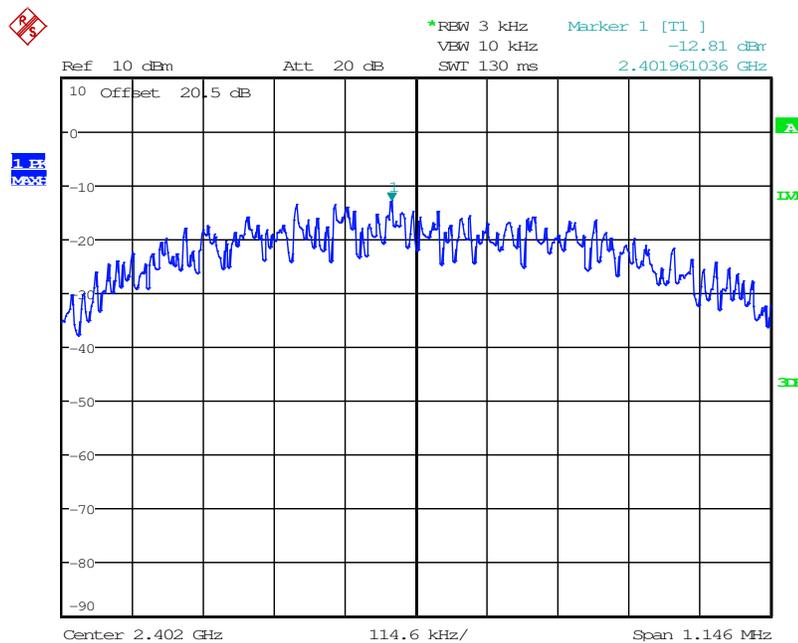


Date: 17.MAR.2016 14:12:27

Figure 7.5.2-1: Power Spectral Density - Low Channel

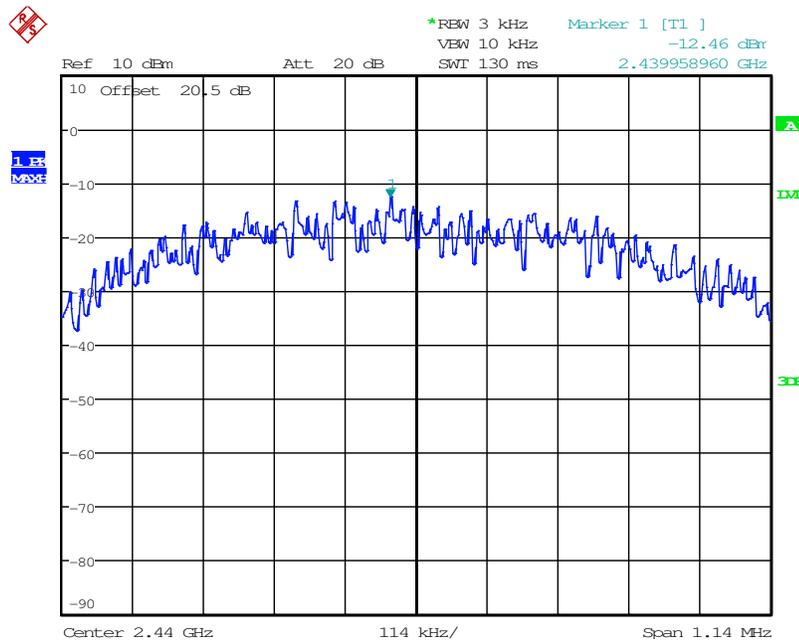

Date: 17.MAR.2016 13:54:56

Figure 7.5.2-2: Power Spectral Density - Middle Channel

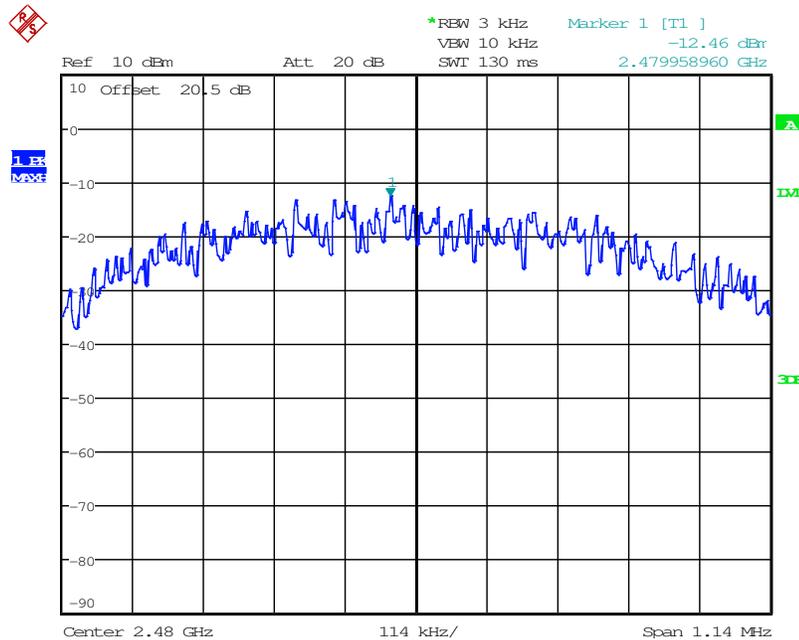

Date: 17.MAR.2016 13:29:38

Figure 7.5.2-3: Power Spectral Density – High Channel

7.6 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 8.8

7.6.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer’s resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

$$\text{Corrected Reading} = \text{Analyzer Reading} + \text{LISN Loss} + \text{Cable Loss}$$

$$\text{Margin} = \text{Applicable Limit} - \text{Corrected Reading}$$

7.6.2 Measurement Results

Results are shown below.

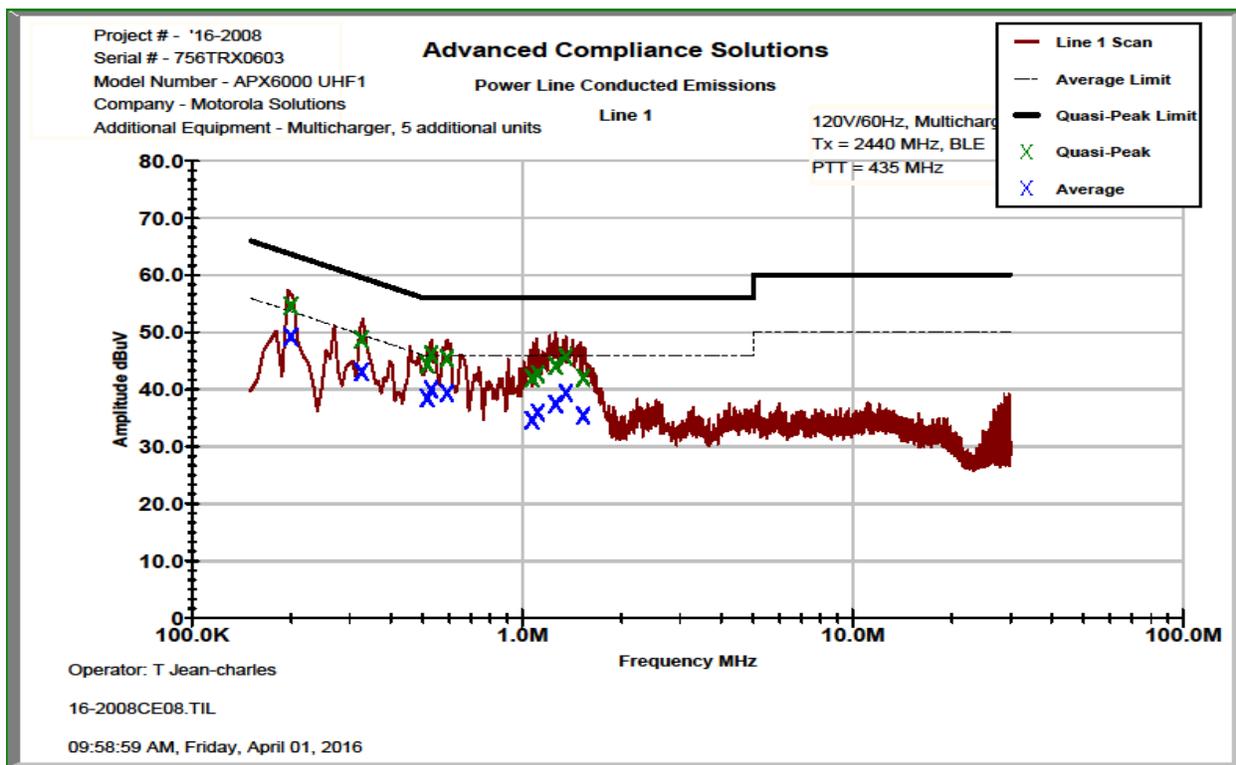


Figure 7.6.2-1: Conducted Emissions Results – Line 1

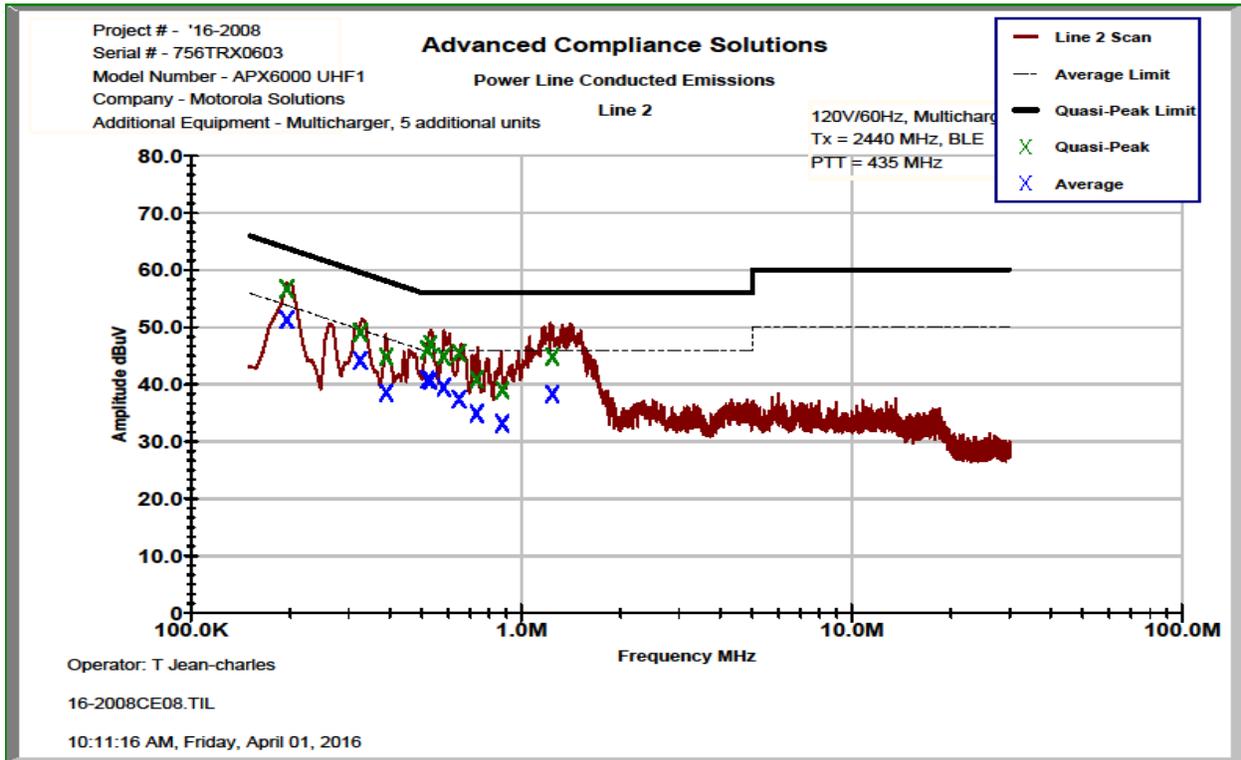


Figure 7.6.2-2: Conducted Emissions Results – Line 2

Table 7.6.2-1: Conducted EMI Results

Line 1    Line 2    Line 3  
 Line 4  
 To Ground    Floating  
 Telecom Port \_\_\_\_\_  
 dBµV    dBµA  
 Plot Number: 16-2008CE08  
 Power Supply Description: N/A

Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
<b>Line 1</b>									
0.199175	44.368	39.02	10.20	54.57	49.22	63.64	53.64	9.1	4.4
0.325949	38.551	32.854	10.20	48.75	43.06	59.55	49.55	10.8	6.5
0.51495	34.125	28.239	10.20	44.33	38.44	56.00	46.00	11.7	7.6
0.529338	35.91	29.738	10.20	46.11	39.94	56.00	46.00	9.9	6.1
0.591488	35.195	29.161	10.20	45.40	39.36	56.00	46.00	10.6	6.6
1.06875	31.806	24.429	10.20	42.01	34.63	56.00	46.00	14.0	11.4
1.11345	32.482	25.763	10.20	42.69	35.97	56.00	46.00	13.3	10.0
1.26025	33.902	27.227	10.20	44.11	37.43	56.00	46.00	11.9	8.6
1.35351	35.446	29.11	10.20	45.65	39.31	56.00	46.00	10.4	6.7
1.52877	31.804	25.123	10.20	42.01	35.33	56.00	46.00	14.0	10.7
<b>Line 2</b>									
0.194925	46.463	41.033	10.22	56.69	51.26	63.82	53.82	7.1	2.6
0.325299	38.866	33.962	10.21	49.08	44.17	59.57	49.57	10.5	5.4
0.389899	34.547	28.335	10.20	44.75	38.54	58.07	48.07	13.3	9.5
0.51965	35.81	30.612	10.21	46.02	40.82	56.00	46.00	10.0	5.2
0.530888	36.851	30.438	10.21	47.06	40.65	56.00	46.00	8.9	5.4
0.581024	34.655	29.268	10.21	44.87	39.48	56.00	46.00	11.1	6.5
0.647	35.238	27.19	10.21	45.45	37.40	56.00	46.00	10.6	8.6
0.731038	30.637	24.676	10.23	40.87	34.90	56.00	46.00	15.1	11.1
0.87565	28.793	22.938	10.21	39.00	33.15	56.00	46.00	17.0	12.9
1.2401	34.526	28.04	10.25	44.78	38.29	56.00	46.00	11.2	7.7

**8 CONCLUSION**

In the opinion of ACS, Inc., the model H98QDH9PW7BN manufactured by Motorola Solutions Sdn Bhd meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-247 for the test procedures documented in the test report.

**END REPORT**