

Certification Test Report

FCC ID: AZ489FT7085

FCC Rule Part: 15.247

ACS Report Number: 16-2009.W06.2B

Manufacturer: Motorola Solutions Sdn Bhd
Model(s): H98SDH9PW7BN

Test Begin Date: **March 7, 2016**
Test End Date: **April 6, 2016**

Report Issue Date: May 10, 2016



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Project Manager:

A handwritten signature in blue ink, appearing to read "Thierry Jean-Charles".

Thierry Jean-Charles
EMC Engineer
Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 69 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	Purpose	3
1.2	Product Description.....	3
1.3	Manufacturer Information	3
1.4	Test Methodology and Considerations	4
2	TEST FACILITIES	5
2.1	Location.....	5
2.2	Laboratory Accreditations/Recognitions/Certifications	5
2.3	Radiated & Conducted Emissions Test Site Description	6
3	APPLICABLE STANDARD REFERENCES.....	8
4	LIST OF TEST EQUIPMENT.....	9
5	SUPPORT EQUIPMENT	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	11
7	SUMMARY OF TESTS.....	13
7.1	Antenna Requirement – FCC: Section 15.203	13
7.2	Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 8.8.....	13
7.3	Peak Output Power - FCC Section 15.247(b)(1) IC: RSS-247 5.4(2)	16
7.4	Channel Usage Requirements.....	22
7.5	Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-247 5.5.....	39
8	CONCLUSION.....	68

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-247.

1.2 Product Description

The APX6000 UHF R2 model H98SDH9PW7BN is a two way portable radio capable of analog FM, digital C4FM and TDMA. This radio includes Bluetooth 2.0+EDR, Bluetooth Low Energy (BLE), WLAN 802.11 b/g/n and GPS features. This test report documents compliance of the Bluetooth 2.0+EDR transceiver.

Technical Details

Mode of Operation:	Bluetooth 2.1 + Enhanced Data Rate (EDR)
Frequency Range:	2402 MHz - 2480 MHz
Number of Channels:	79
Channel Separation:	1 MHz
Modulations:	GFSK, $\pi/4$ -DQPSK, 8DPSK
TX Data Rates:	GFSK: 1Mbps $\pi/4$ -DQPSK: 2Mbps 8DPSK: 3Mbps
Antenna Type/Gain:	PIFA, 2.58 dBi

1.3 Manufacturer Information

Motorola Solutions Sdn Bhd
Plot 2 Bayan Lepas Innoplex,
Industrial Park Mukim 12 SWD
11900 Bayan Lepas, Penang Malaysia

Model Number: H98SDH9PW7BN (Radiated and Power Line Conducted Emissions), H98QDH9PW7BN (RF Conducted Emissions)

Test Sample Serial Number(s): 756TSB0824 (Radiated & Power Line Conducted Emissions), 756TRZ0368 (RF Conducted)

Test Sample Condition: The samples were in good conditions with no observable physical damages.

1.4 Test Methodology and Considerations

The EUT was evaluated for radiated and power line conducted emissions for the Bluetooth radio.

The hardware on the 2.4 GHz transceiver is identical among all the APX6000 product family models. Per the manufacturer's request, the RF conducted data from the assessment of the APX6000 UHF1 Model H98QDH9PW7BN (FCC ID: AZ489FT7077 / IC: 109U-89FT7077) was used for this test report. Preliminary RF output power measurements were performed and it was determined that the data from the APX6000 UHF1 test report 16-2008.W06.2A is representative of the RF parameters of the EUT.

Preliminary radiated emission evaluation was performed for the EUT standalone, set in three orthogonal orientations as well as for the EUT set on a single unit charger, the EUT set on a multi-unit charger and the unit connected to a laptop computer via a GCAI cable. The worst case configuration was obtained with the EUT standalone, lying on one side for the band edge measurements and the unit on the multi-unit charger for the radiated spurious emissions.

The EUT was also evaluated for radiated intermodulation product for the Bluetooth radio transmitting at the same time as the land mobile radio. All intermodulation products were observed to be compliant to the limits of the FCC Section 15.209 and RSS-Gen.

For power line conducted emissions, preliminary measurements were performed for the unit powered via a multi-unit charger and for the unit set on a single unit charger. The configuration leading to the highest emissions as compared to the limits was then investigated for all the modulations. The results reported in this document correspond to the overall worst case configuration.

Table 1.4-1: Bluetooth Radio Test configuration

Mode of Operations	Frequency (MHz)	Data Rate (kbps)
GFSK	2402	1000
	2441	1000
	2480	1000
$\pi/4$ DQPSK	2402	2000
	2441	2000
	2480	2000
8 DPSK	2402	3000
	2441	3000
	2480	3000

The EUT was also evaluated for unintentional emissions. The results are documented separately in a Declaration of Conformity/Verification test report.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
www.acstestlab.com

FCC Test Firm Registration #: 475089
Industry Canada Lab Code: 4175C

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

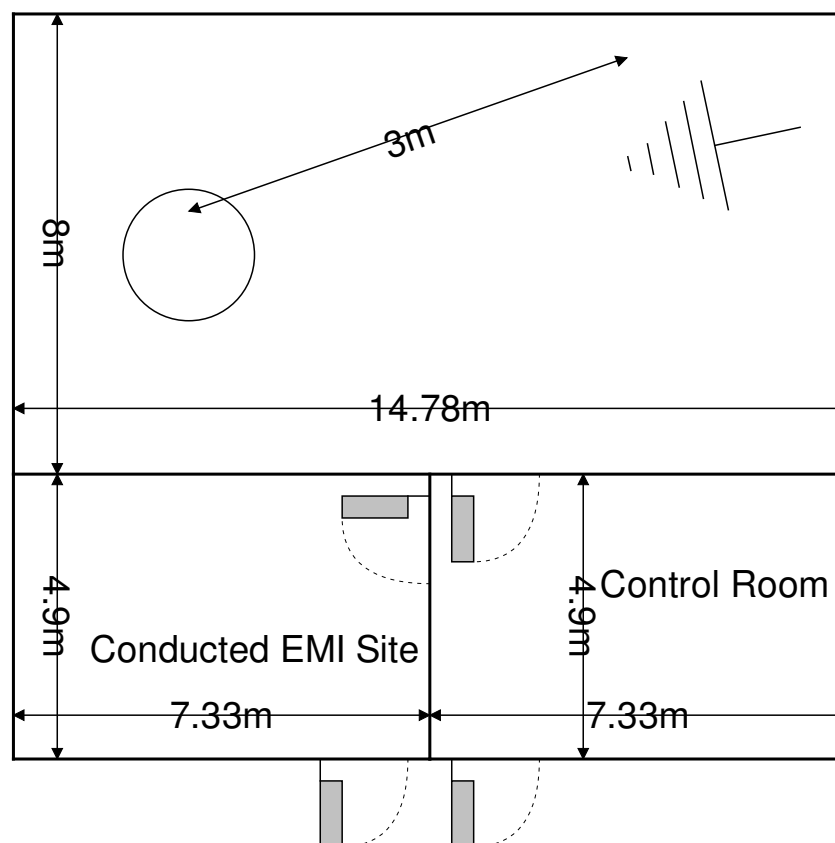


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are $7.3 \times 4.9 \times 3 \text{ m}^3$. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 $50 \Omega/50 \mu\text{H}$ and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

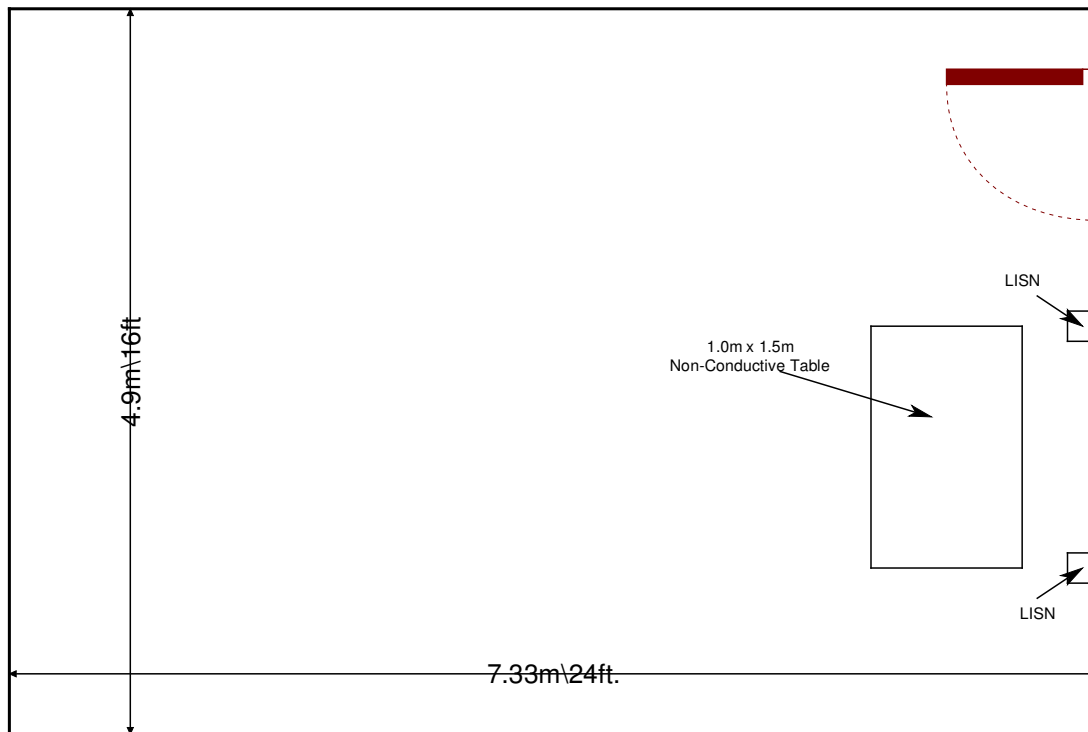


Figure 2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ Industry Canada Radio Standards Specification: RSS-247 — Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	7/1/2015	7/1/2016
479	Electro-Metrics	ALP-70	Antennas	158	12/3/2015	12/3/2017
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/26/2014	12/26/2016
653	Suhner	SF-102A	Cables	0944/2A	4/13/2015	4/13/2016
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2006	EMCO	3115	Antennas	2573	4/14/2015	4/14/2017
2008	COM-Power	AH-826	Antennas	81009	NCR	NCR
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	11/18/2015	11/18/2016
2022	EMCO	LISN3825/2R	LISN	1095	9/14/2015	9/14/2017
2045	ACS Boca	Conducted Cable Set	Cable Set	2045	11/11/2015	11/11/2016
2070	Mini Circuits	VHF-8400+	Filter	2070	11/17/2015	11/17/2016
2072	Mini Circuits	VHF-3100+	Filter	30737	11/17/2015	11/17/2016
2086	Merrimac	FAN-6-10K	Attenuators	23148-83-1	11/16/2015	11/16/2016
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/9/2015	12/9/2016
2111	Aeroflex Inmet	40AH2W-20	Attenuator	2111	7/22/2015	7/22/2016
2112	Teledyne Storm Products	921-0101-036	Cables	12-06-698	11/13/2015	11/13/2016
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/22/2015	8/22/2016
3004	Teseq	CFL 9206A	Attenuators	34720	10/7/2015	10/7/2016
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
2082	Teledyne Storm Products	90-010-048	Cables	2082	4/22/2015	4/22/2016

Note: NCR=No Calibration Required

5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment (Radiated Band-Edge Emissions)

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Motorola Solutions	H98SDH9PW7BN	756TSB0824

Note: The EUT was evaluated standalone without any support equipment

Table 5-2: EUT and Support Equipment (Radiated Spurious Emissions)

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Motorola Solutions	H98SDH9PW7BN	756TSB0824
2	Multi-Unit Charger	Motorola Solutions	NNTN8844A	N/A

Table 5-3: Cable Description (Radiated Spurious Emissions)


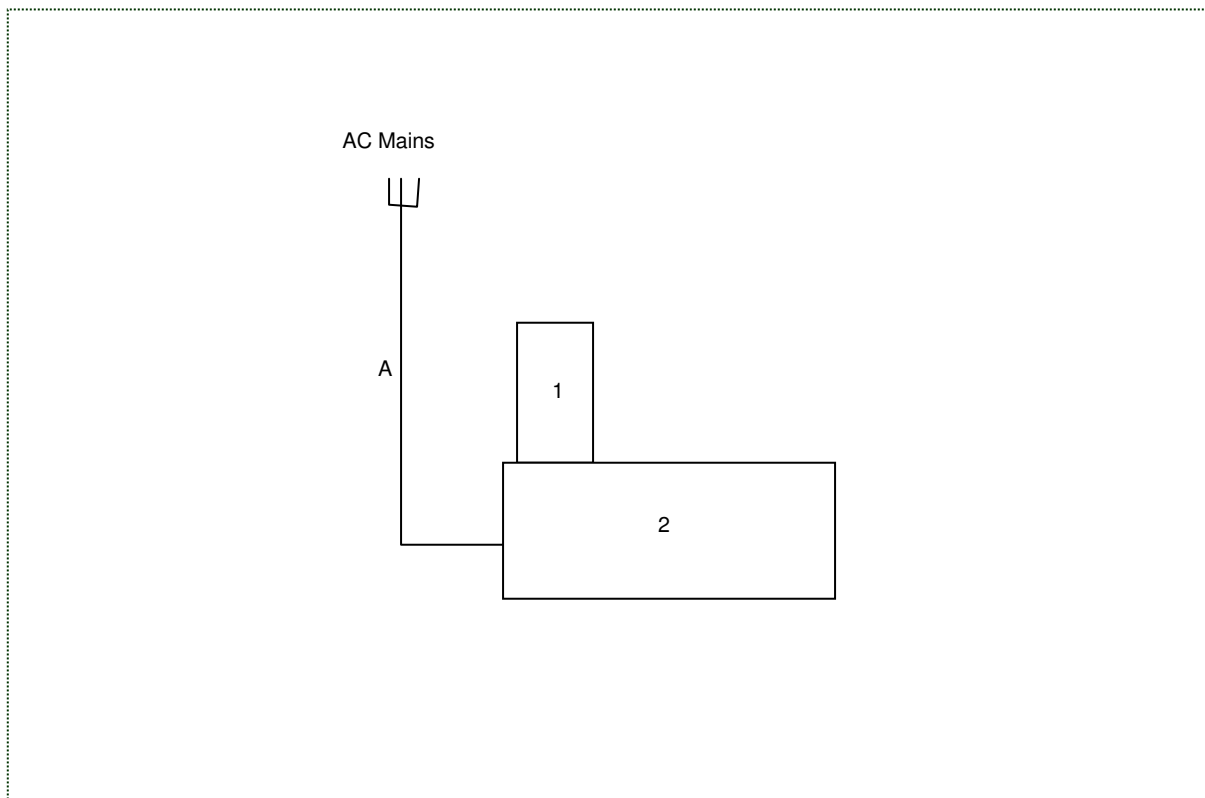
Cable #	Cable Type	Length	Shield	Termination
A	Power	2.2 m	No	Charger to AC Mains

Table 5-4: EUT and Support Equipment (Power Line Conducted Emissions)

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Motorola Solutions	H98SDH9PW7BN	756TSB0824
2	Multi-Unit Charger	Motorola Solutions	NNTN8844A	N/A
3	SRX2200 UHF1 ULP Two-Way Radio	Motorola Solutions	H99QDH9PW7BN	756TSB0792
4	APX6000 UHF1 Two-Way Radio	Motorola Solutions	H98QDH9PW7BN	756TRX0603
5	APX6000 7/800 Two-Way Radio	Motorola Solutions	H98UCH9PW7BN	756TSD0459
6	APX6000 UHF1 Two-Way Radio	Motorola Solutions	H98QDH9PW7BN	756TRX0633
7	APX6000 7/800 Two-Way Radio	Motorola Solutions	H98UCH9PW7BN	756TSD0467
8	6 x Resistive Loads	Motorola Solutions	N/A	N/A

Table 5-5: Cable Description (Radiated Spurious and Power Line Conducted Emissions)

Cable #	Cable Type	Length	Shield	Termination
A	Power	2.2 m	No	Charger to AC Mains
B	6 x USB	0.2 m	Yes	Charger to Resistive Load

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM**Figure 6-1: EUT Test Setup (Radiated Band Edge Emissions)****Figure 6-2: EUT Test Setup (Radiated Spurious Emissions)**

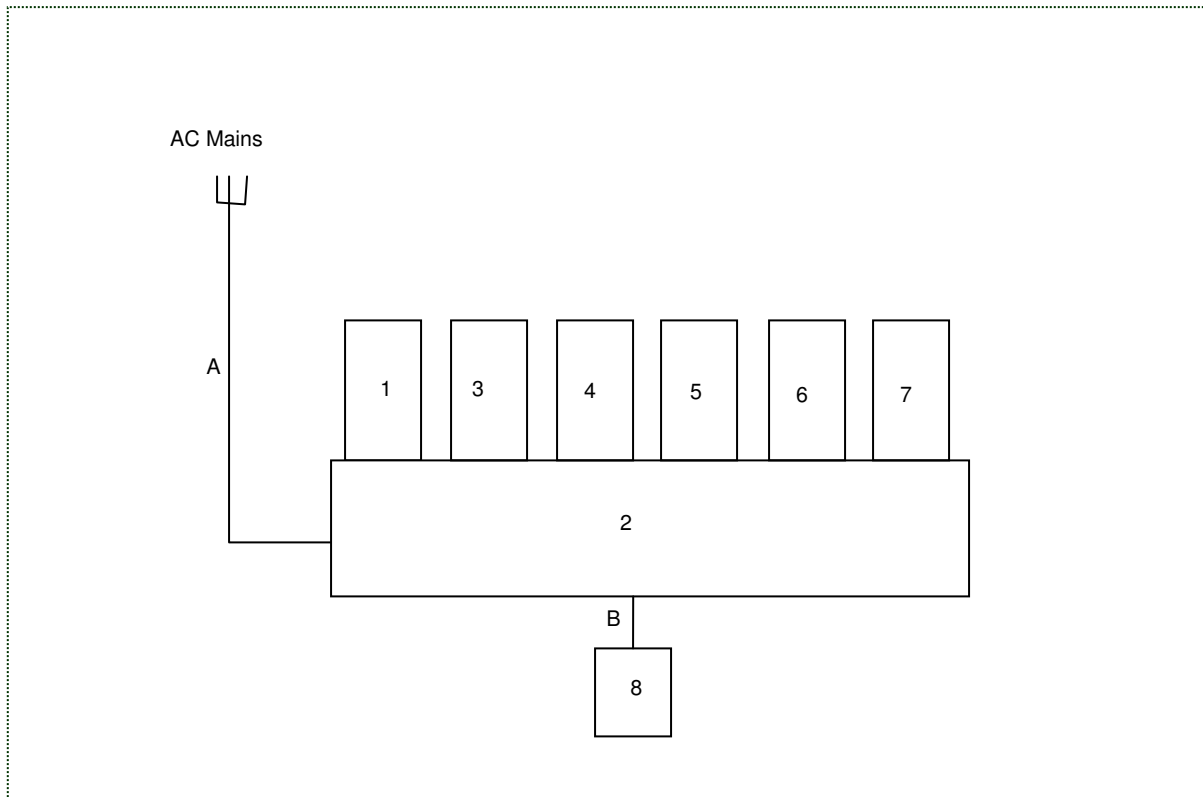


Figure 6-3: EUT Test Setup (Power Line Conducted Emissions)

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses a 2.58 dBi internal PIFA which connects to the RF port via a spring contact. The EUT meets the requirements of FCC Section 15.203.

7.2 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 8.8

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

$$\text{Corrected Reading} = \text{Analyzer Reading} + \text{LISN Loss} + \text{Cable Loss}$$

$$\text{Margin} = \text{Applicable Limit} - \text{Corrected Reading}$$

7.2.2 Measurement Results

Results of the test corresponding to the EUT configuration leading to the worse case emissions are shown below:

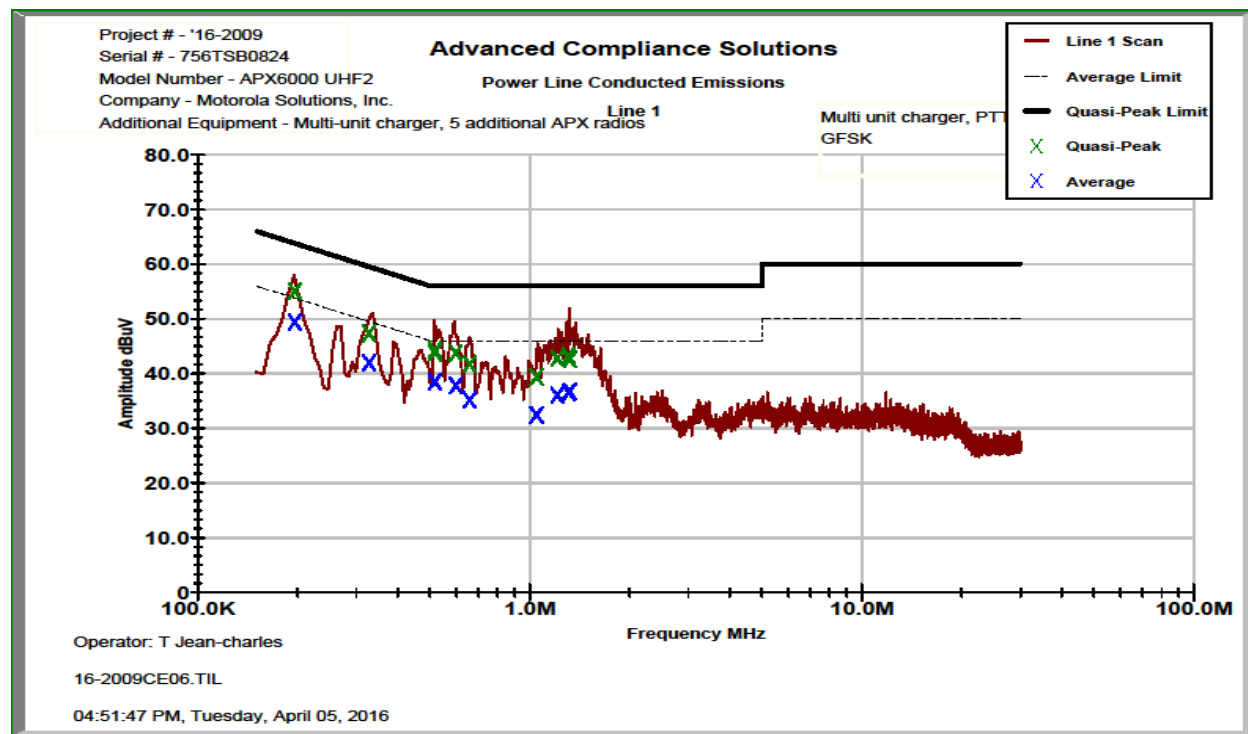


Figure 7.2.2-1: Conducted Emissions Results – Line 1

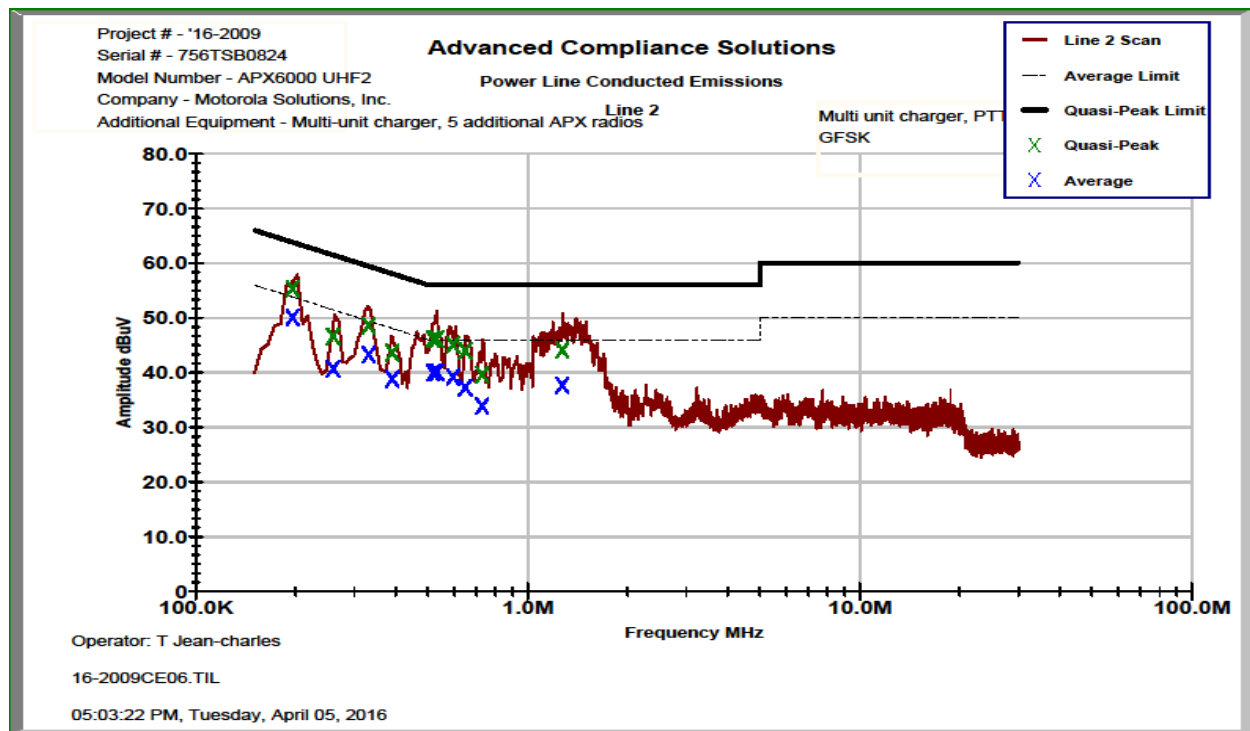


Figure 7.2.2-2: Conducted Emissions Results – Line 2

Table 7.2.2-1: Conducted EMI Results

☒ Line 1 ☒ Line 2 ☐ Line 3 ☐ Line 4 ☒ To Ground ☐ Floating ☐ Telecom Port _____ ☒ dBµV ☐ dBµA									
Plot Number: <u>16-2009CE06</u>			Power Supply Description: <u>N/A</u>						
Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
Line 1									
0.195625	44.825	39.169	10.20	55.03	49.37	63.79	53.79	8.8	4.4
0.327563	37.115	31.739	10.20	47.32	41.94	59.51	49.51	12.2	7.6
0.5168	33.625	28.204	10.20	43.83	38.41	56.00	46.00	12.2	7.6
0.517212	34.07	28.295	10.20	44.27	38.50	56.00	46.00	11.7	7.5
0.598488	33.572	27.576	10.20	43.78	37.78	56.00	46.00	12.2	8.2
0.65785	31.495	24.903	10.20	41.69	35.10	56.00	46.00	14.3	10.9
1.04651	29.174	22.239	10.20	39.38	32.44	56.00	46.00	16.6	13.6
1.20759	32.541	25.784	10.20	42.74	35.99	56.00	46.00	13.3	10.0
1.30461	33.006	26.356	10.20	43.21	36.56	56.00	46.00	12.8	9.4
1.31705	32.331	26.473	10.20	42.53	36.68	56.00	46.00	13.5	9.3
Line 2									
0.195288	45.133	39.838	10.22	55.36	50.06	63.81	53.81	8.5	3.7
0.258988	36.417	30.493	10.21	46.62	40.70	61.46	51.46	14.8	10.8
0.33155	38.374	33.028	10.21	48.59	43.24	59.41	49.41	10.8	6.2
0.3904	33.396	28.622	10.20	43.60	38.83	58.06	48.06	14.5	9.2
0.5183	35.923	29.711	10.21	46.13	39.92	56.00	46.00	9.9	6.1
0.531588	35.945	29.899	10.21	46.15	40.11	56.00	46.00	9.8	5.9
0.594375	34.915	28.979	10.21	45.13	39.19	56.00	46.00	10.9	6.8
0.647587	33.765	27.056	10.21	43.97	37.27	56.00	46.00	12.0	8.7
0.728425	29.369	23.616	10.23	39.60	33.84	56.00	46.00	16.4	12.2
1.26894	33.82	27.406	10.25	44.07	37.66	56.00	46.00	11.9	8.3

7.3 Peak Output Power - FCC Section 15.247(b)(1) IC: RSS-247 5.4(2)

7.3.1 Measurement Procedure (Conducted Method)


The RF output port of the EUT was directly connected to the input of the spectrum analyzer through suitable attenuation.

7.3.2 Measurement Results

Results are shown below:


Table 7.3.2-1 RF Output Power (GFSK)

Frequency (MHz)	Power (dBm)
2402	8.28
2441	8.77
2480	9.04

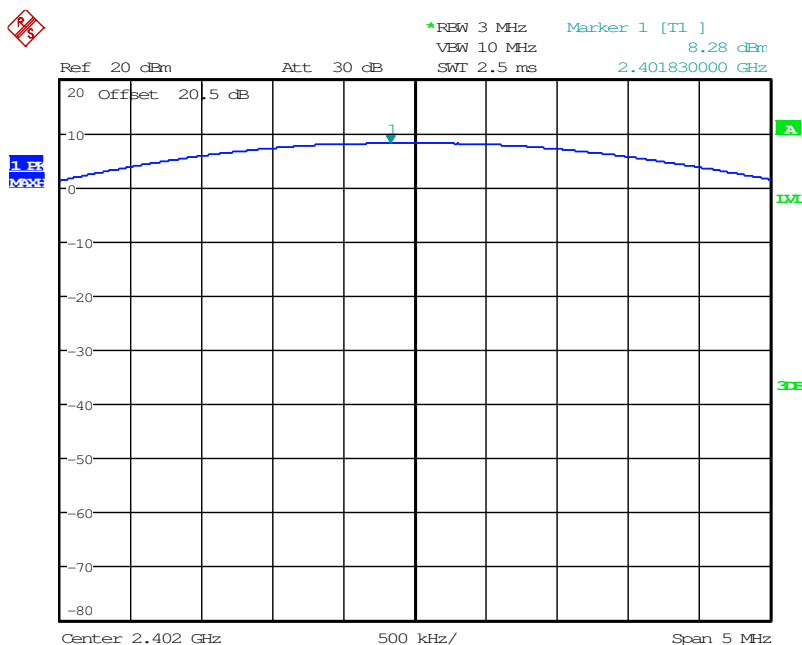


Date: 24.MAR.2016 12:01:27

Figure 7.3.2-1: RF Output Power (GFSK) - Low Channel

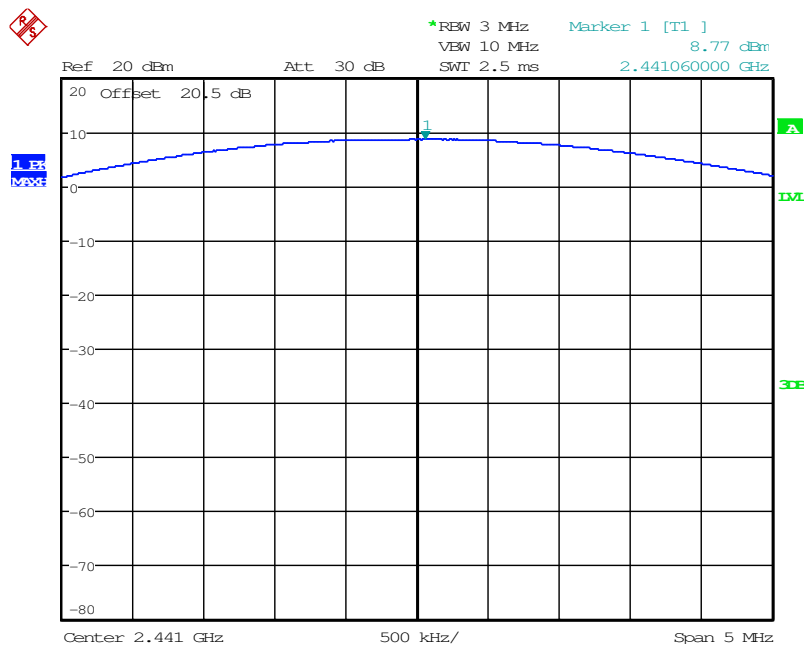

Date: 24.MAR.2016 12:09:18

Figure 7.3.2-2: RF Output Power (GFSK) - Middle Channel

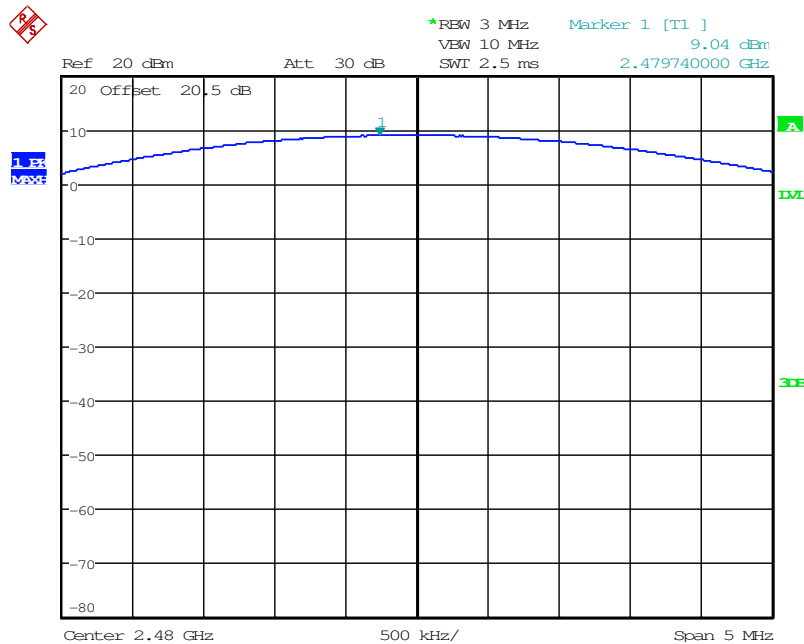


Date: 24.MAR.2016 12:43:21

Figure 7.3.2-3: RF Output Power (GFSK) - High Channel


Table 7.3.2-2: RF Output Power ($\pi/4$ DQPSK)

Frequency (MHz)	Power (dBm)
2402	5.90
2441	6.42
2480	6.72

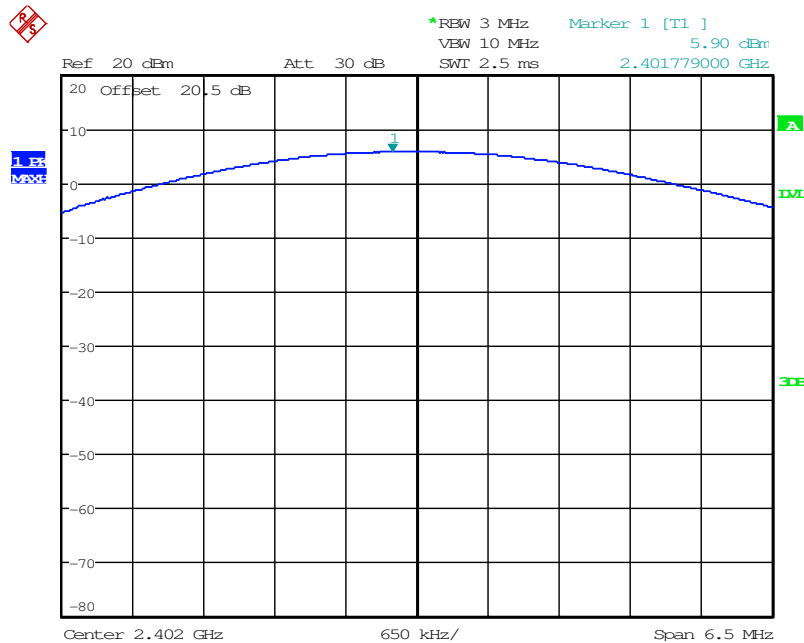


Date: 24.MAR.2016 13:18:34

Figure 7.3.2-4: RF Output Power ($\pi/4$ DQPSK) - Low Channel

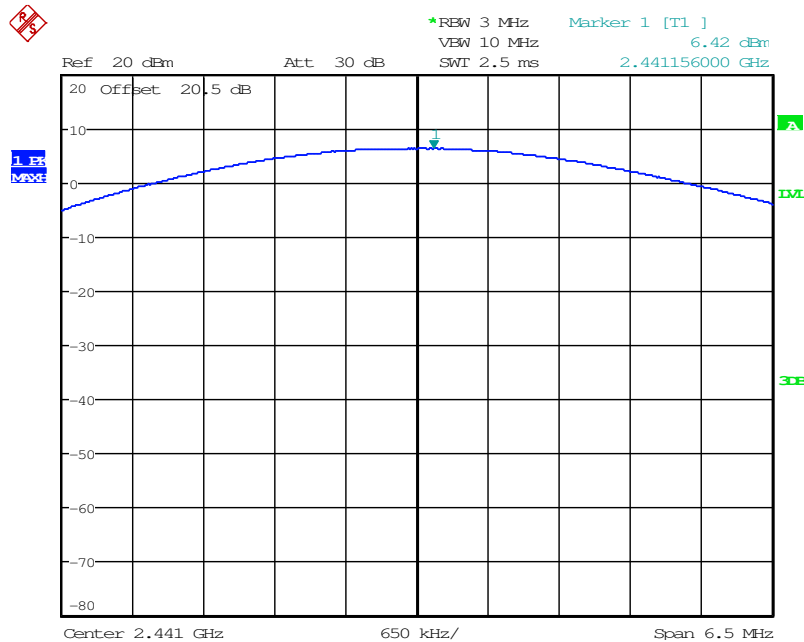

Date: 24.MAR.2016 13:23:14

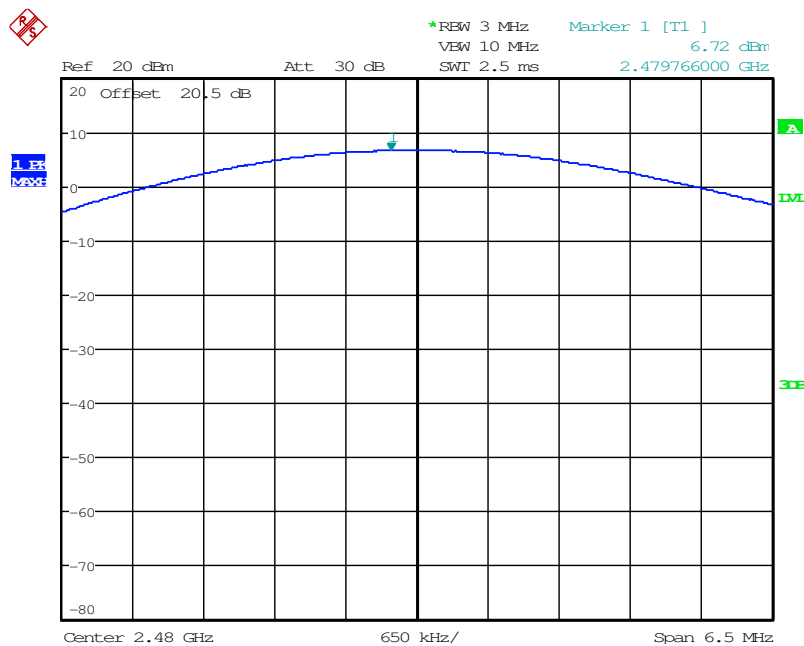
Figure 7.3.2-5: RF Output Power ($\pi/4$ DQPSK) - Middle Channel

Date: 24.MAR.2016 13:53:31

Figure 7.3.2-6: RF Output Power ($\pi/4$ DQPSK) - High Channel


Table 7.3.2-3: RF Output Power (8DPSK)

Frequency (MHz)	Power (dBm)
2402	6.48
2441	6.93
2480	7.27

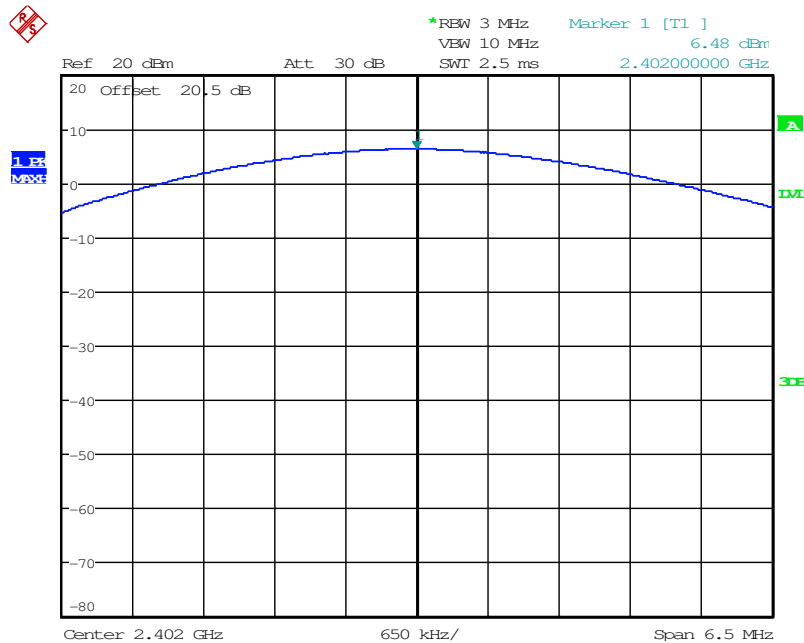


Date: 24.MAR.2016 13:04:24

Figure 7.3.2-7: RF Output Power (8DPSK) - Low Channel

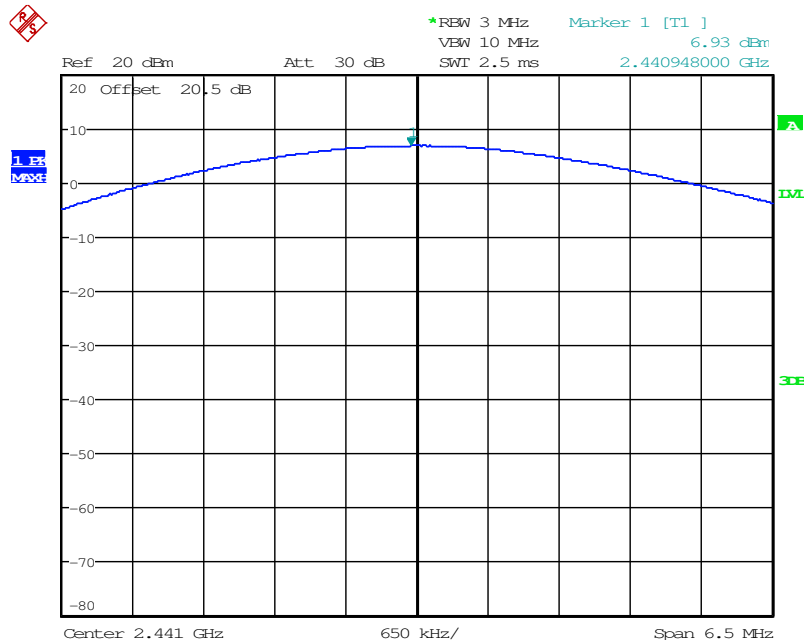

Date: 24.MAR.2016 13:40:48

Figure 7.3.2-8: RF Output Power (8DPSK) - Middle Channel

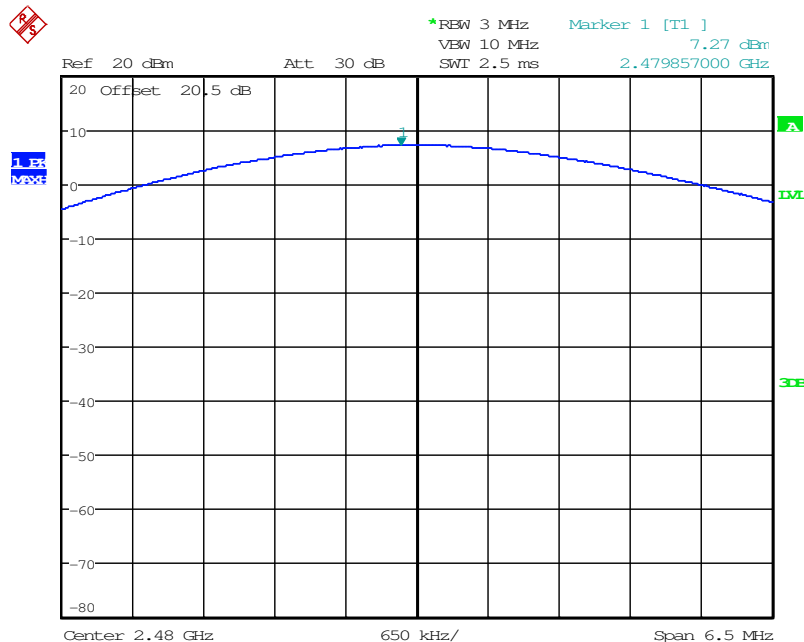

Date: 24.MAR.2016 14:32:23

Figure 7.3.2-9: RF Output Power (8DPSK) - High Channel

7.4 Channel Usage Requirements


7.4.1 Carrier Frequency Separation – FCC: Section 15.247(a)(1) IC: RSS-247 5.1(2)

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to approximately 30% of the channel spacing.

7.4.1.2 Measurement Results

Results are shown below:

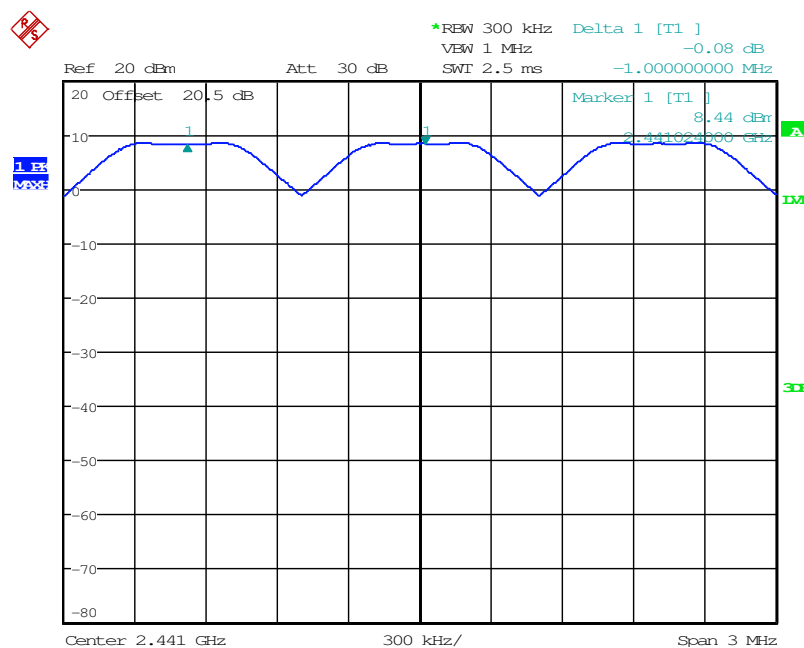

Date: 25.MAR.2016 13:50:40

Figure 7.4.1.2-1: Carrier Frequency Separation


7.4.2 Number of Hopping Channels – FCC: Section 15.247(a)(1)(iii) IC: RSS-247 5.1(4)

7.4.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture the number of hopping channels. The peak detector max hold function was enabled for the measurements.


7.4.2.2 Measurement Results

Results are shown below:

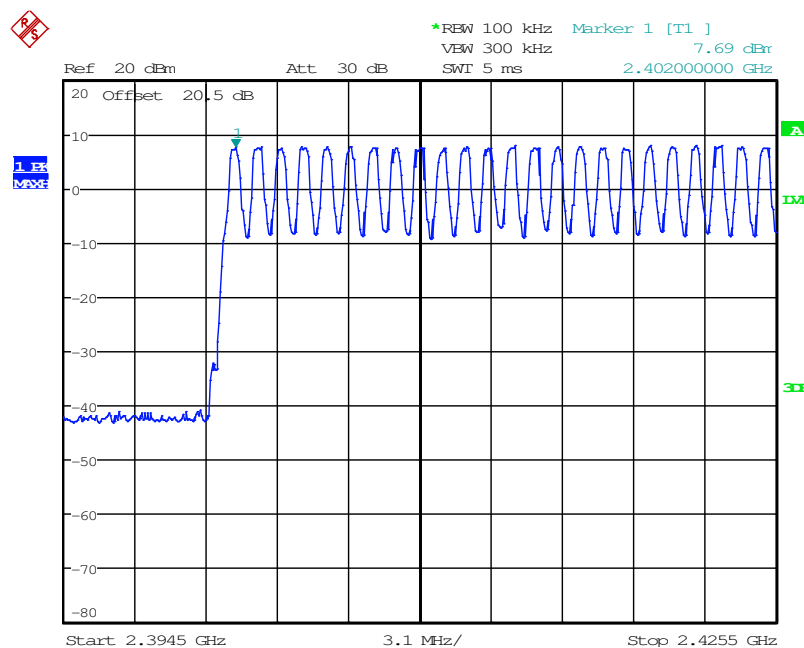


Date: 25.MAR.2016 14:01:15

Figure 7.4.2.2-1: Number of Hopping Channels (1 – 24)

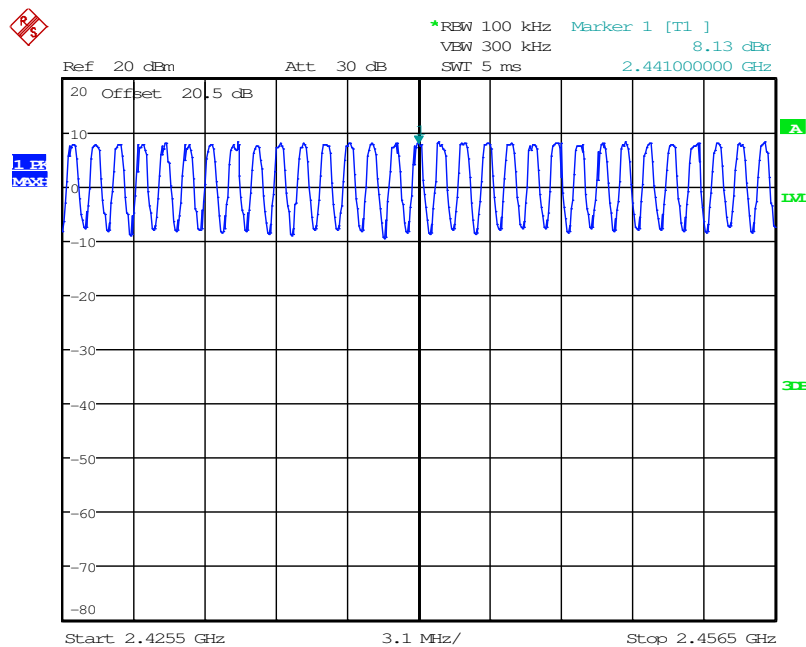

Date: 25.MAR.2016 13:58:11

Figure 7.4.2.2-2: Number of Hopping Channels (25 – 55)

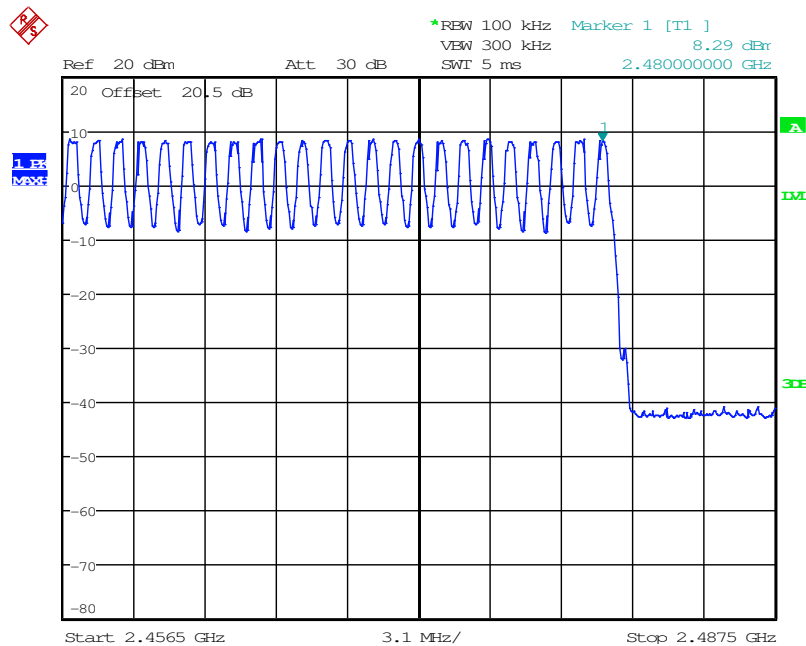

Date: 25.MAR.2016 14:04:37

Figure 7.4.2.2-3: Number of Hopping Channels (56 – 79)

7.4.3 Channel Dwell Time – FCC: Section 15.247(a)(1)(iii) IC: RSS-247 5.1(4)

7.4.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set 0 Hz centered on a hopping channel. The RBW was set to less than 30% of the channel spacing and the sweep time adjusted to capture the entire dwell time per channel with peak detector max hold function.

7.4.3.2 Measurement Results

Results are shown below:

Table 7.4.3.2-1 Dwell Time on a 31.6 Second Cycle

Packet Format	Number of Hops Per Sec. (NHPS)	Number of Hops per Channel Per Sec. (NHPCPS)	Number of hops on a 31.6 s Cycle (NHPC)	Measured Dwell Times (ms)	Dwell Times on a 31.6 s Cycle	Limit (ms)	Status
DH1	800	10.13	320	0.396	126.72	400	PASS
DH3	400	5.06	160	1.66	265.60	400	PASS
DH5	266.67	3.38	106.67	2.92	311.48	400	PASS


*Notes:

NHPS = (1600 /sec)/ (NT+NR) (where NT and NR are the number of transmit and receive packets, respectively)

NHPCPS = NHPS/79


NHPC = NHPCPS * 31.6s

Dwell Time per Cycle = NHPC * Measured Dwell Time

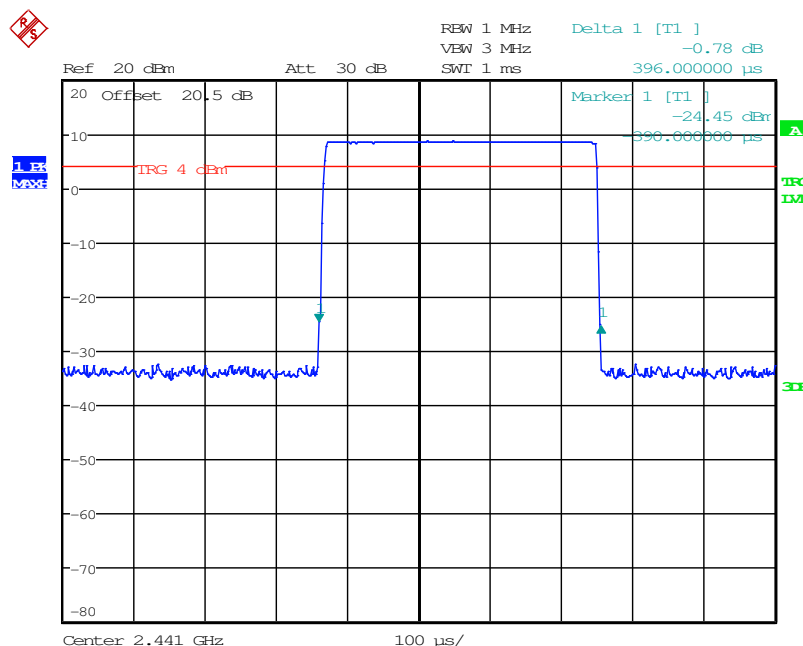


Date: 25.MAR.2016 15:39:48

Figure 7.4.3.2-1: Channel Dwell Time – DH1

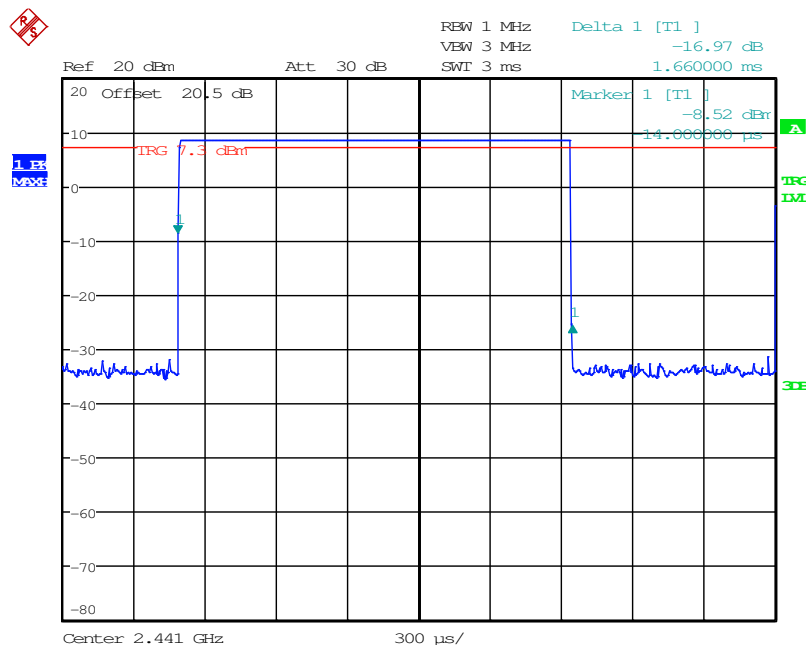

Date: 25.MAR.2016 15:20:34

Figure 7.4.3.2-2: Channel Dwell Time – DH3

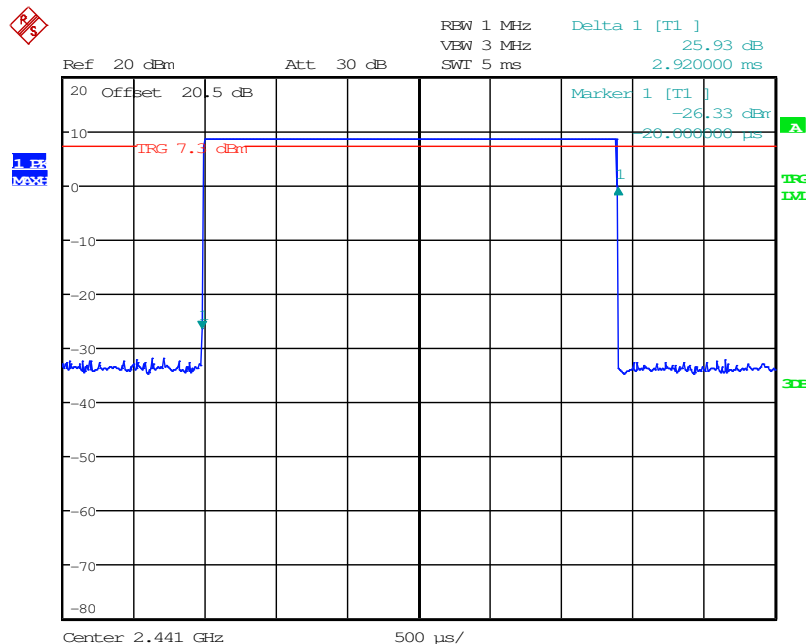

Date: 25.MAR.2016 15:18:01

Figure 7.4.3.2-3: Channel Dwell Time – DH5

7.4.4 20dB / 99% Bandwidth - FCC: Section 15.247(a)(1)(i) IC: RSS-247 5.1(1)

7.4.4.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 5 times the estimated bandwidth of the emission. The RBW was set to 1% to 5% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. For the GFSK modulation, the Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emissions. For the 8 DPSK and Pi/4DQPSK modulations, the N dB function of the spectrum analyzer was used to measure the 20 dB bandwidth.


The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission. The RBW was set to 1% to 5% of the approximated bandwidth. The occupied 99% bandwidth was measured by using the 99% bandwidth equipment function of the spectrum analyzer.

7.4.4.2 Measurement Results

Results are shown below:


Table 7.4.4.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
2402	918.00	852.00
2441	924.00	852.00
2480	924.00	852.00

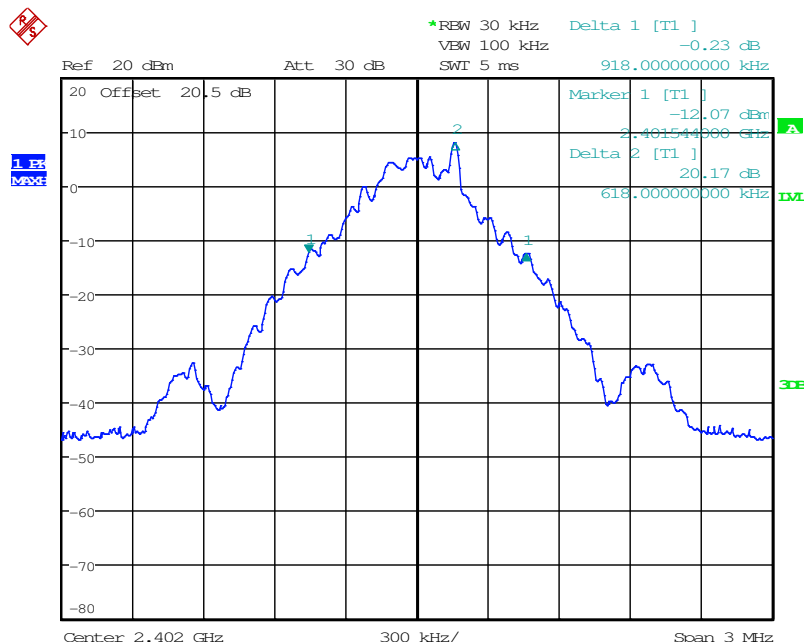


Date: 24.MAR.2016 11:59:39

Figure 7.4.4.2-1: 20dB BW Low Channel (GFSK)

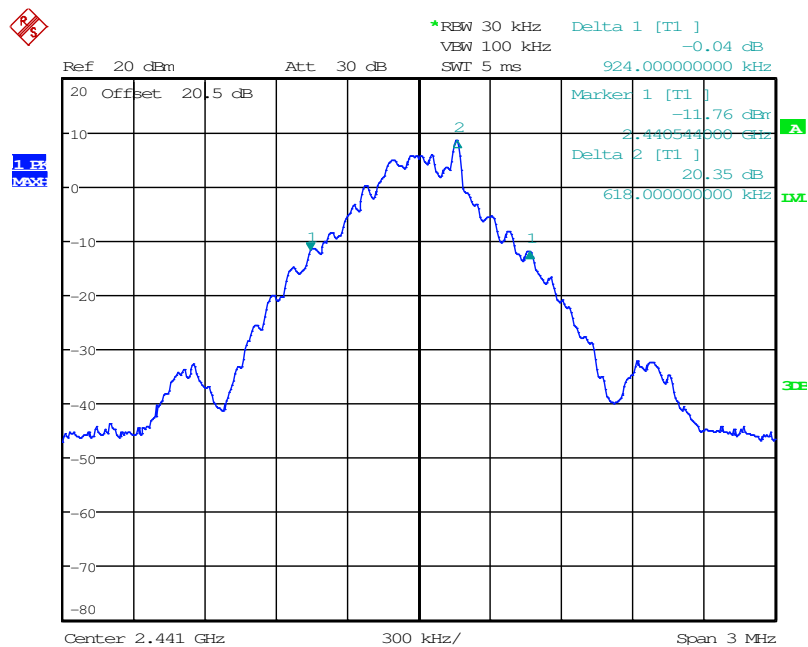


Date: 24.MAR.2016 12:15:47

Figure 7.4.4.2-2: 20dB BW Middle Channel (GFSK)

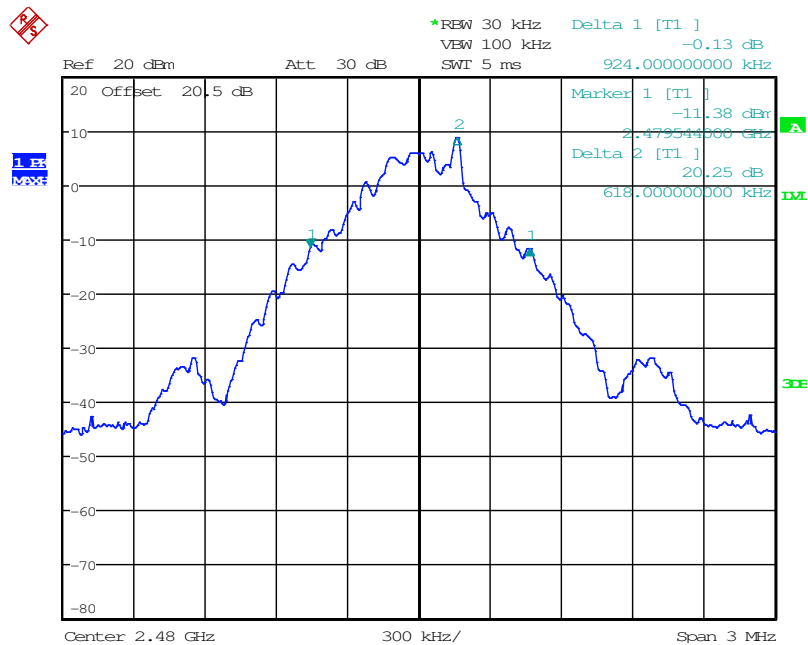


Date: 24.MAR.2016 12:39:30

Figure 7.4.4.2-3: 20dB BW High Channel (GFSK)

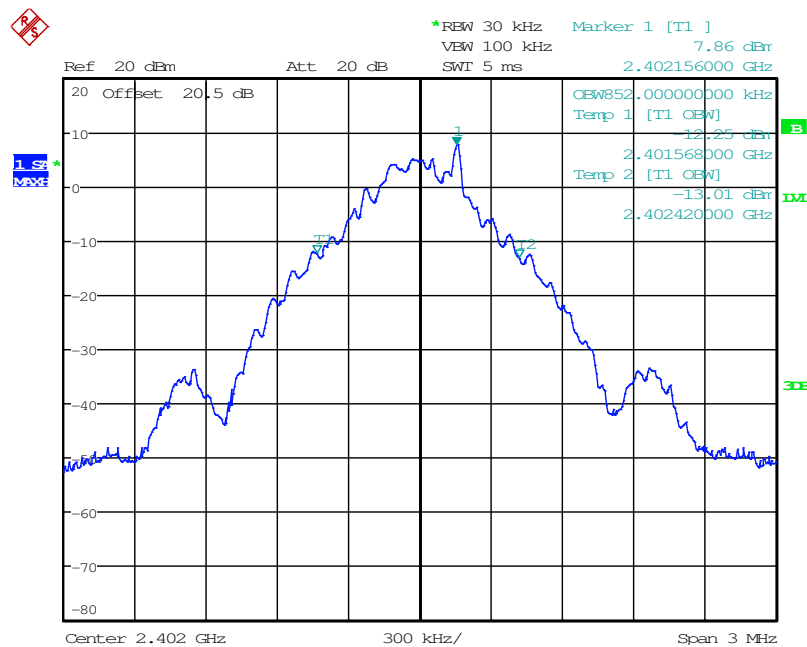


Date: 24.MAR.2016 12:04:37

Figure 7.4.4.2-4: 99% OBW Low Channel (GFSK)

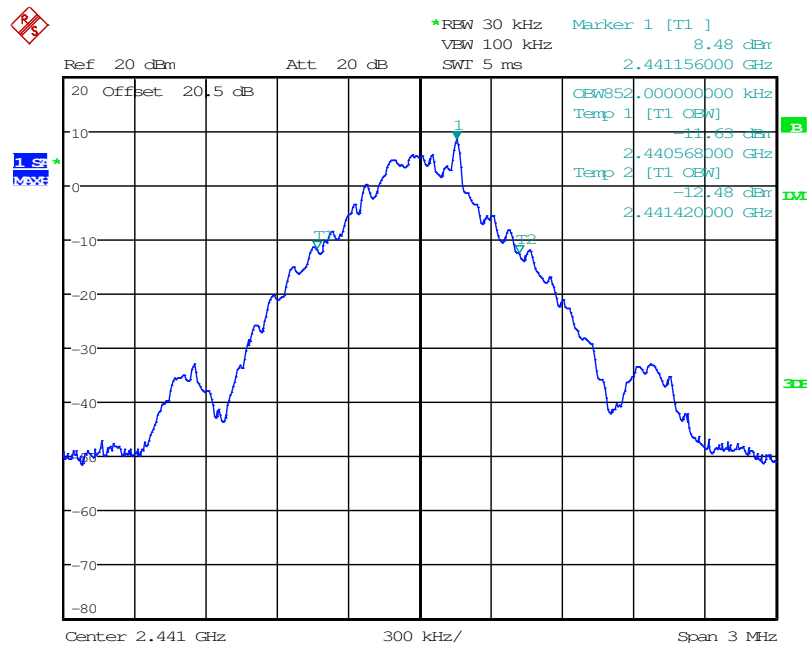

Date: 24.MAR.2016 12:06:58

Figure 7.4.4.2-5: 99% OBW Middle Channel (GFSK)

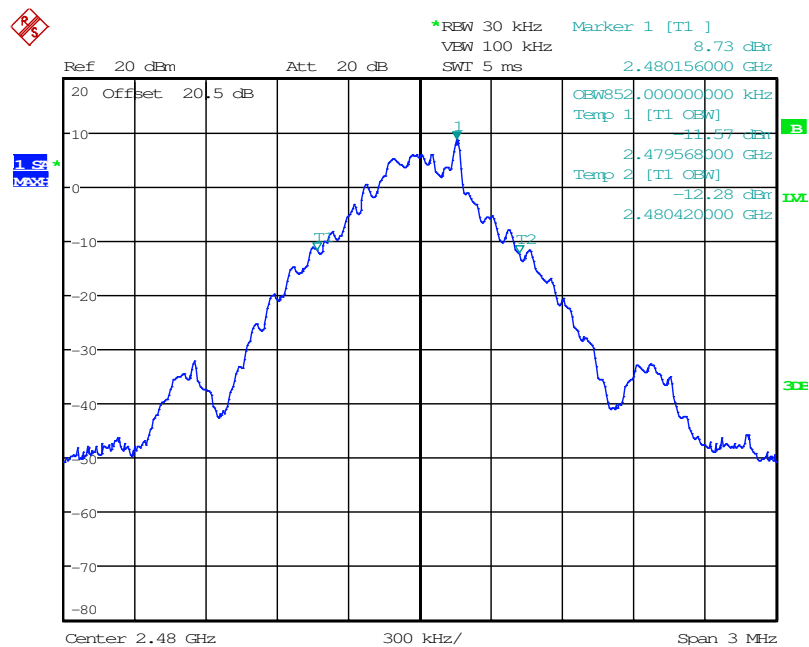


Date: 24.MAR.2016 12:46:04

Figure 7.4.4.2-6: 99% OBW High Channel (GFSK)


Table: 7.4.4.2-2: 20dB / 99% Bandwidth ($\pi/4$ DQPSK)

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
2402	1266.00	1170.00
2441	1242.00	1160.00
2480	1260.00	1170.00

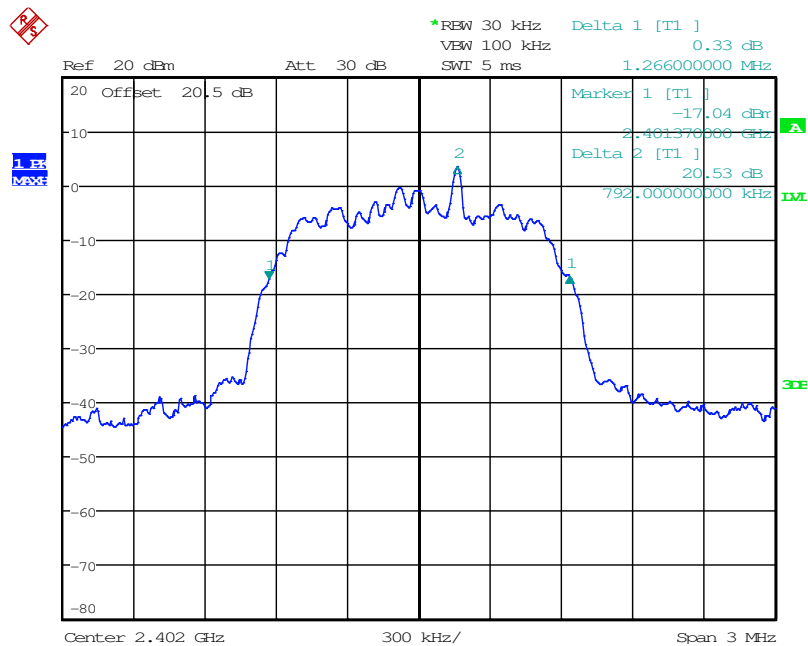


Date: 24.MAR.2016 12:55:48

Figure 7.4.4.2-7: 20dB BW Low Channel ($\pi/4$ DQPSK)

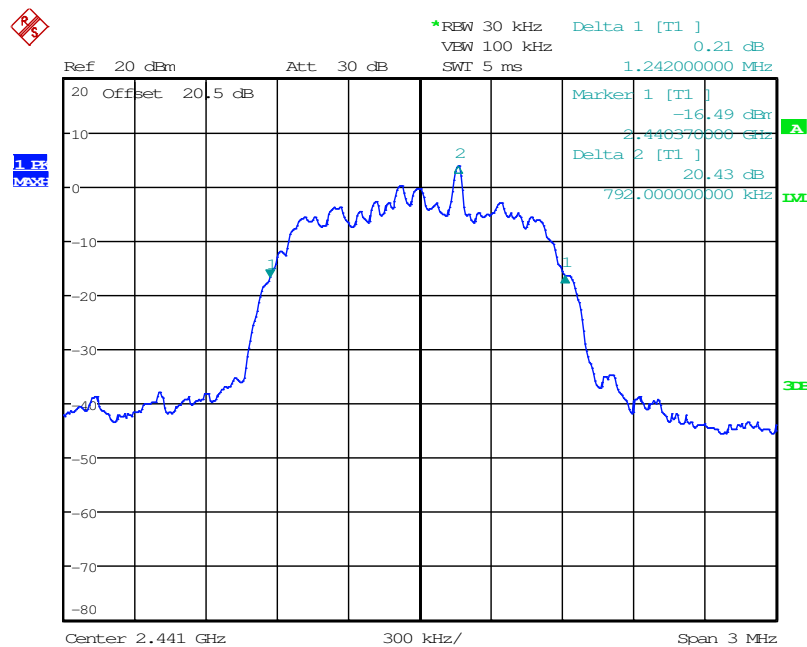


Date: 24.MAR.2016 13:26:41

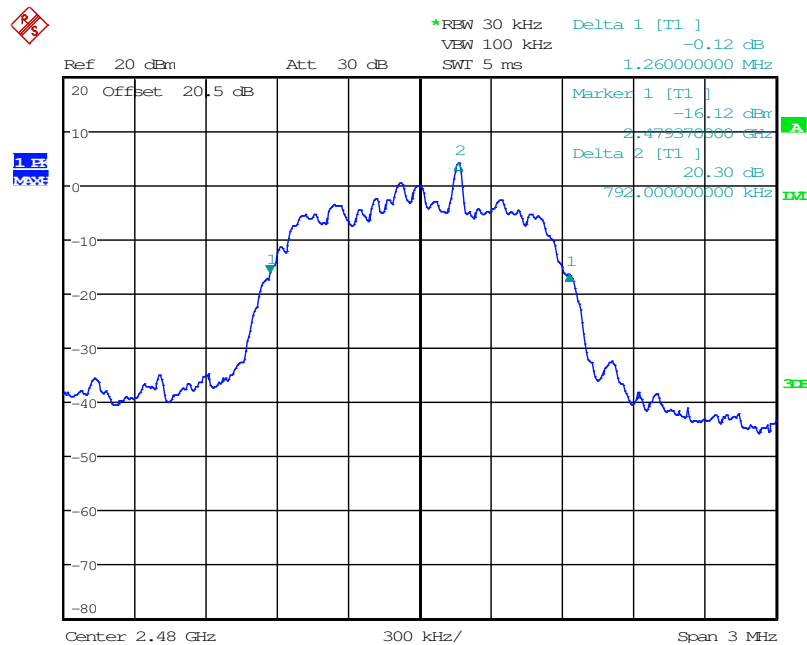
Figure 7.4.4.2-8: 20dB BW Middle Channel ($\pi/4$ DQPSK)

Date: 24.MAR.2016 13:59:51

Figure 7.4.4.2-9: 20dB BW High Channel ($\pi/4$ DQPSK)

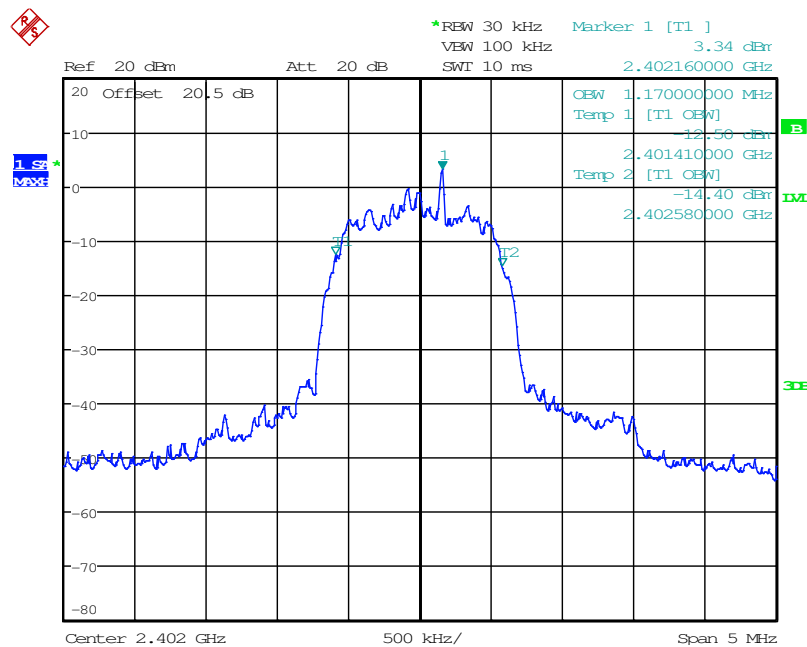


Date: 24.MAR.2016 12:49:50

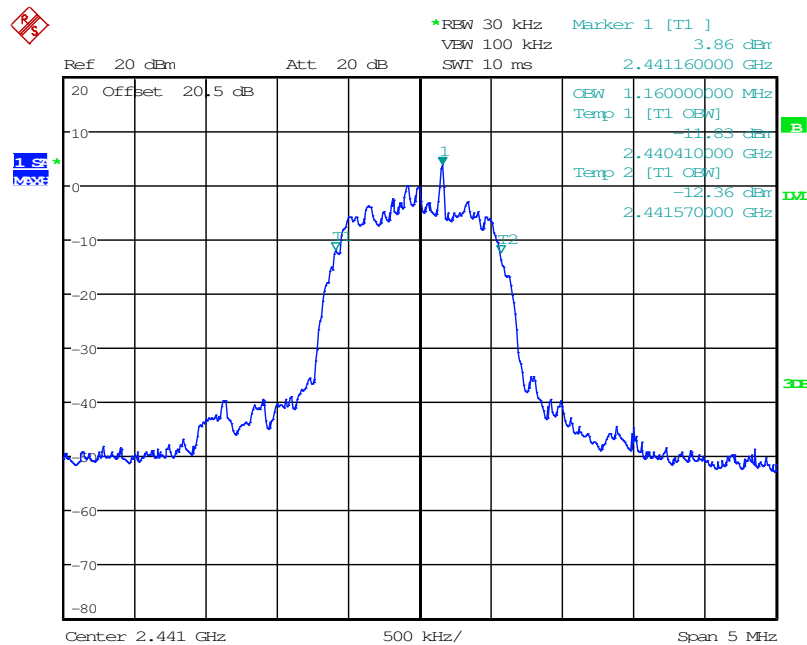Figure 7.4.4.2-10: 99% OBW Low Channel ($\pi/4$ DQPSK)

Date: 24.MAR.2016 13:30:35

Figure 7.4.4.2-11: 99% OBW Middle Channel ($\pi/4$ DQPSK)

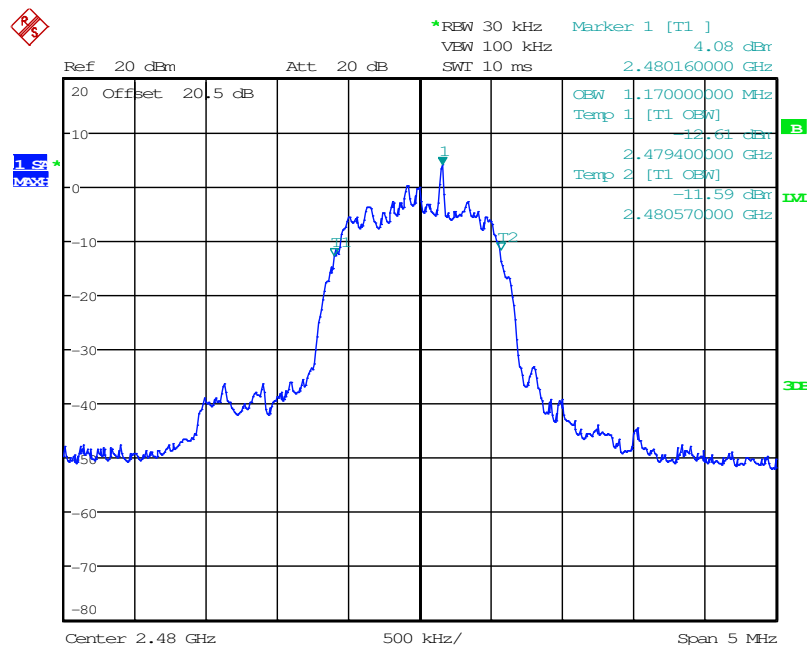


Date: 24.MAR.2016 14:03:05

Figure 7.4.4.2-12: 99% OBW High Channel ($\pi/4$ DQPSK)


Table 7.4.4.2-3: 20dB / 99% Bandwidth (8DPSK)

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
2402	1278.00	1180.00
2441	1272.00	1180.00
2480	1272.00	1190.00

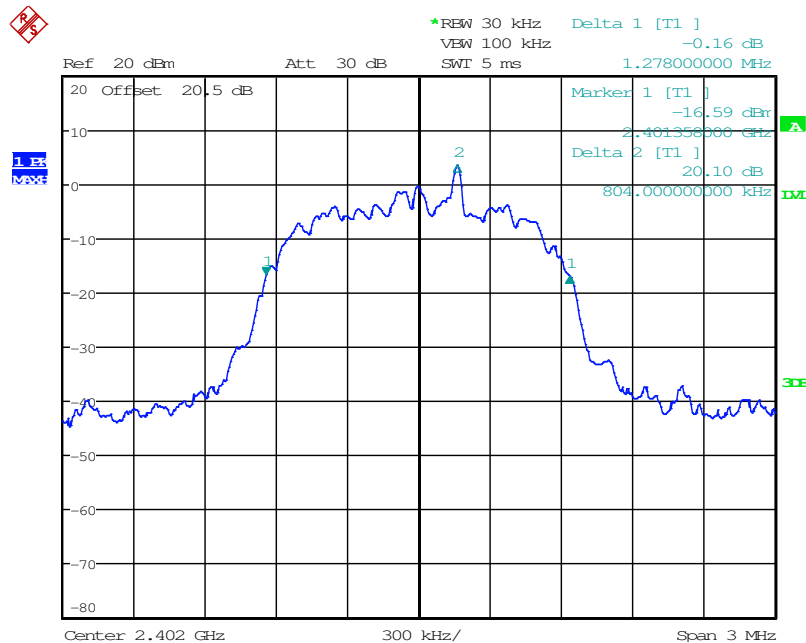


Date: 24.MAR.2016 12:59:31

Figure 7.4.4.2-13: 20dB BW Low Channel (8DPSK)

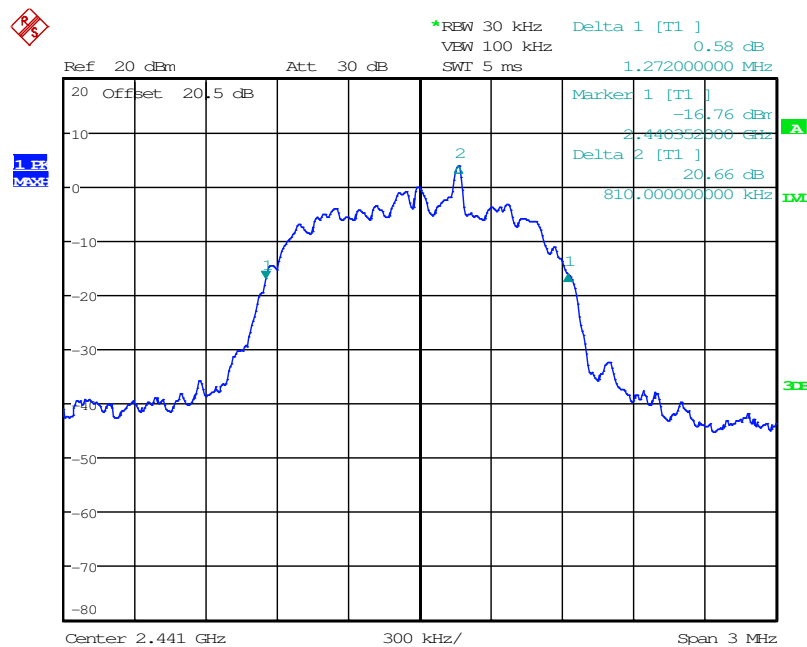


Date: 24.MAR.2016 13:36:11

Figure 7.4.4.2-14: 20dB BW Middle Channel (8DPSK)

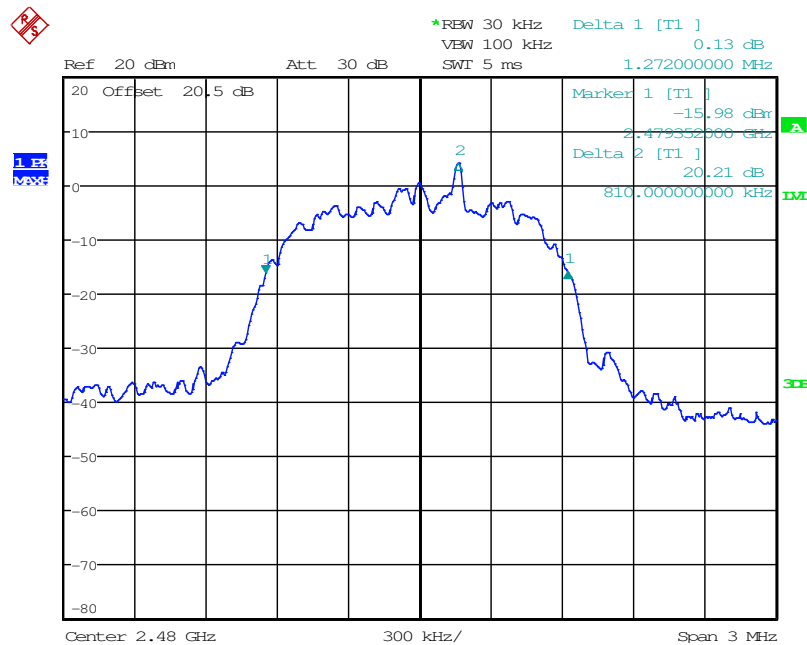


Date: 24.MAR.2016 14:27:49

Figure 7.4.4.2-15: 20dB BW High Channel (8DPSK)

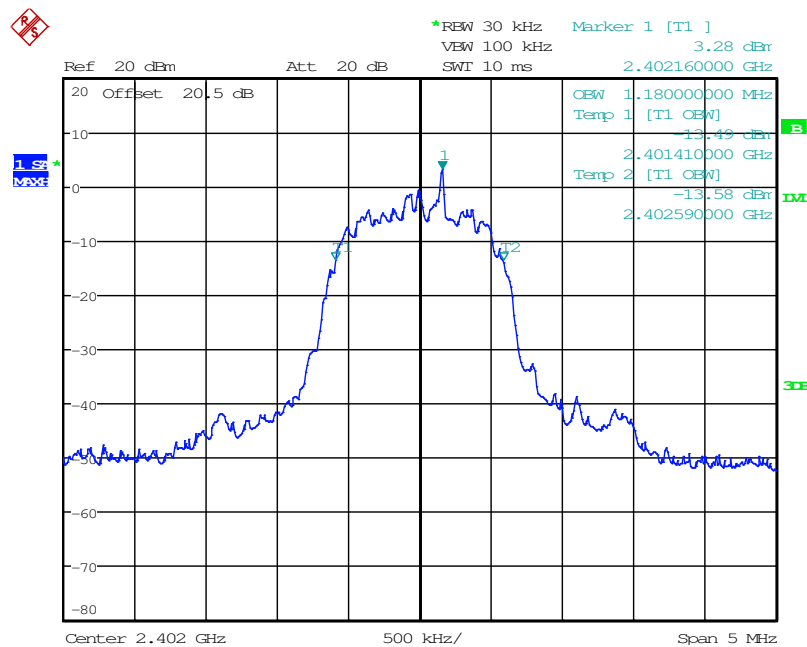


Date: 24.MAR.2016 13:08:14

Figure 7.4.4.2-16: 99% OBW Low Channel (8DPSK)

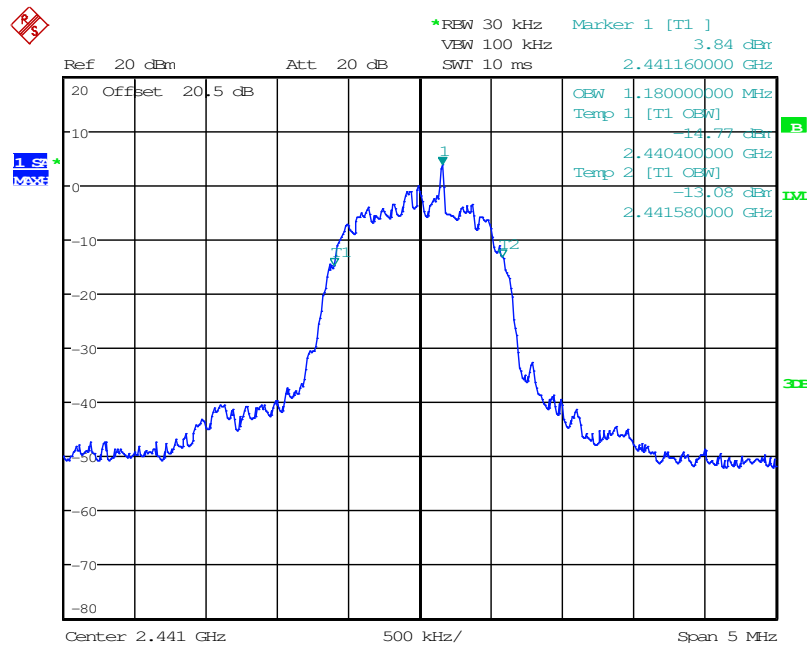

Date: 24.MAR.2016 13:33:33

Figure 7.4.4.2-17: 99% OBW Middle Channel (8DPSK)

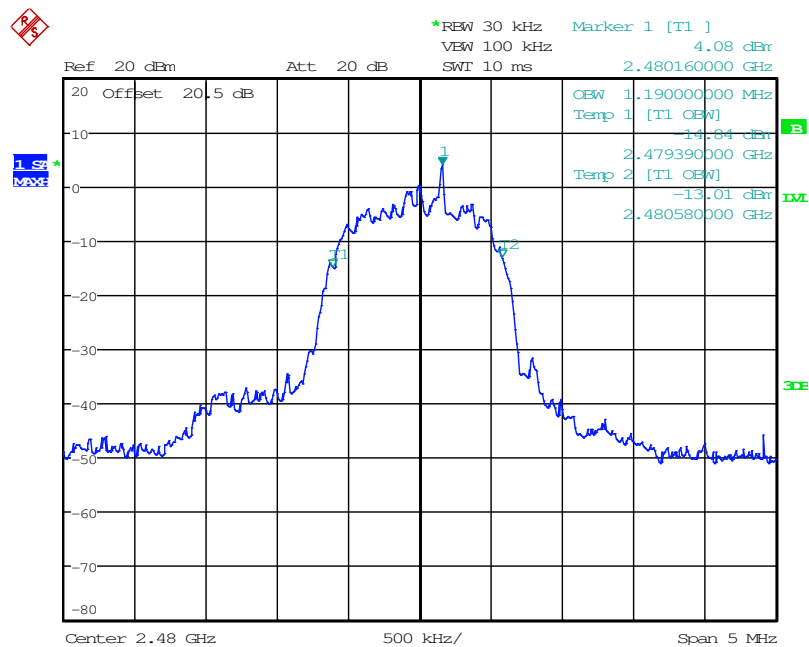

Date: 24.MAR.2016 14:13:11

Figure 7.4.4.2-18: 99% OBW High Channel (8DPSK)


7.5 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC: RSS-247 5.5

7.5.1 Band-Edge Compliance of RF Conducted Emissions

7.5.1.1 Measurement Procedure


The RF output port of the EUT was connected to the input of the spectrum analyzer through suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, which is $\geq 1\%$ of the span, and the VBW was set to ≥ 300 kHz.

7.5.1.2 Measurement Results

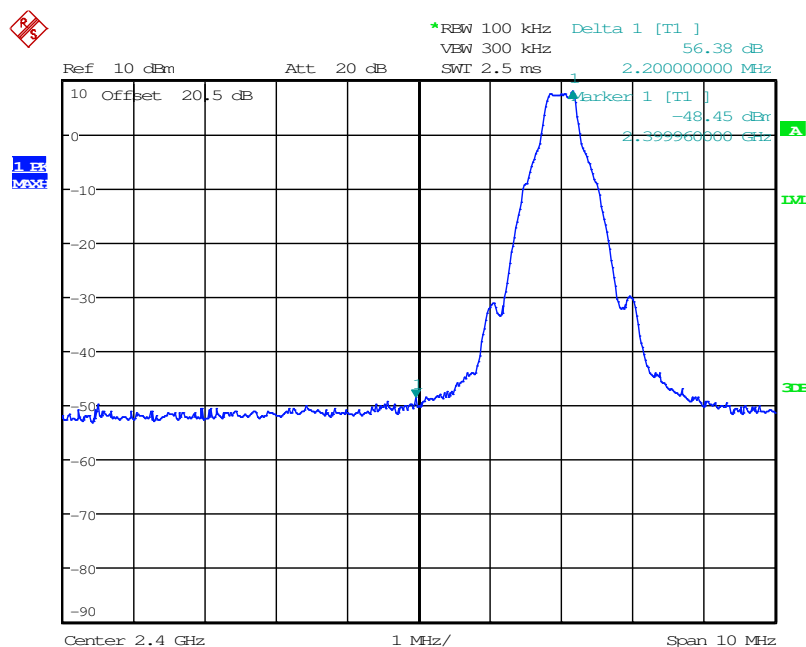


Date: 24.MAR.2016 16:13:17

Figure 7.5.1.2-1: Lower Band-edge (GFSK)

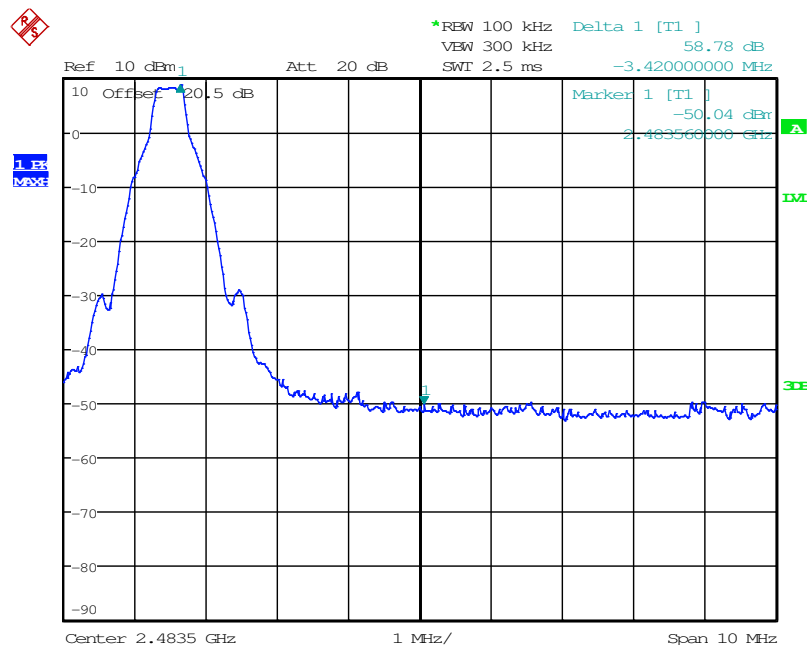


Date: 24.MAR.2016 15:59:26

Figure 7.5.1.2-2: Upper Band-edge (GFSK)

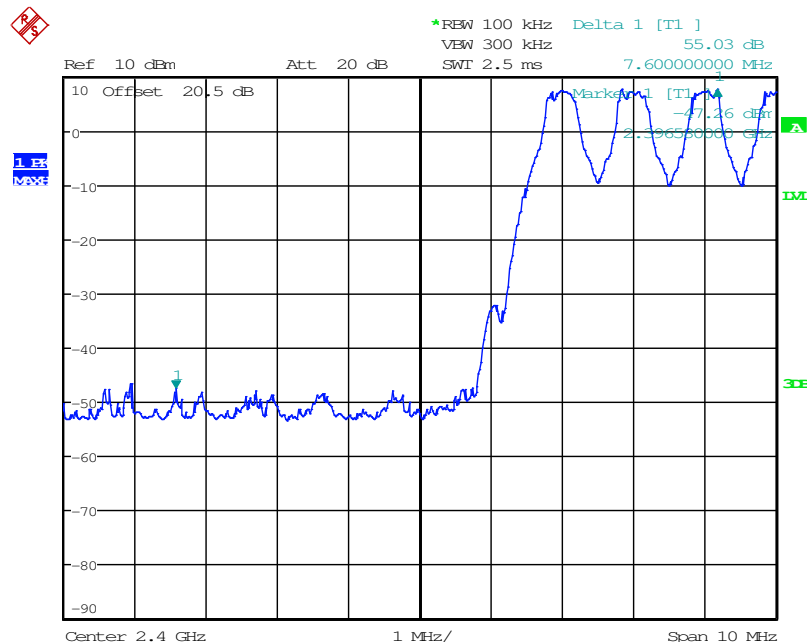


Date: 24.MAR.2016 16:08:06

Figure 7.5.1.2-3: Lower Band-edge – Hopping Mode (GFSK)

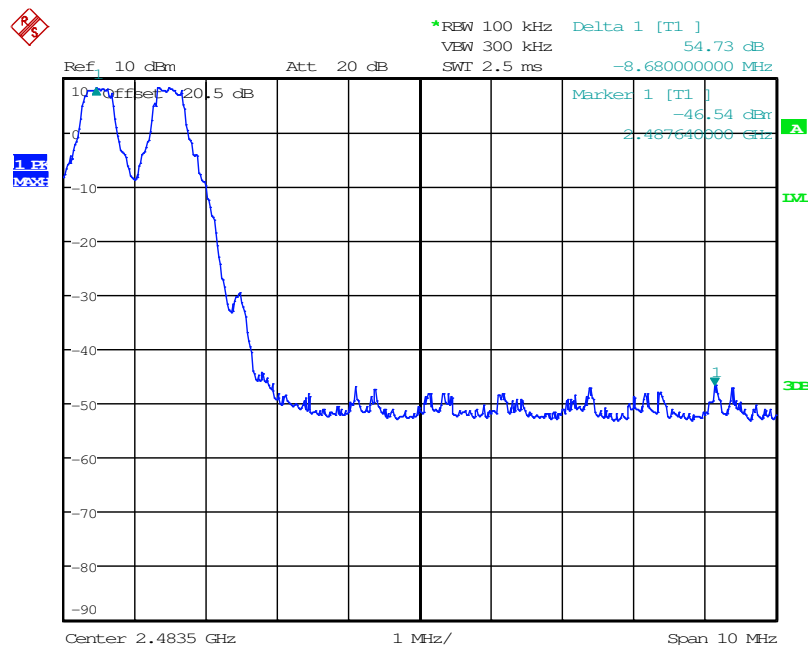


Date: 24.MAR.2016 16:03:55

Figure 7.5.1.2-4: Upper Band-edge – Hopping Mode (GFSK)

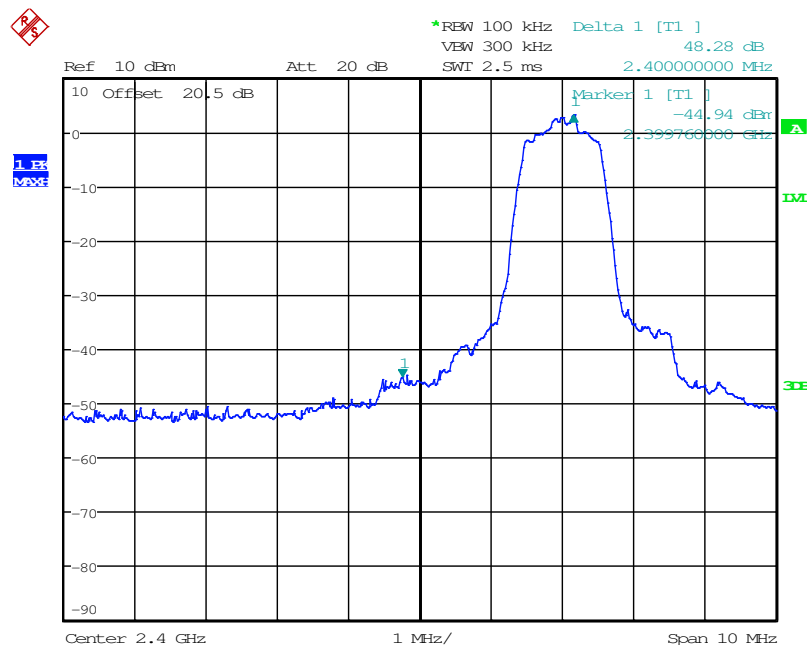


Date: 24.MAR.2016 15:45:09

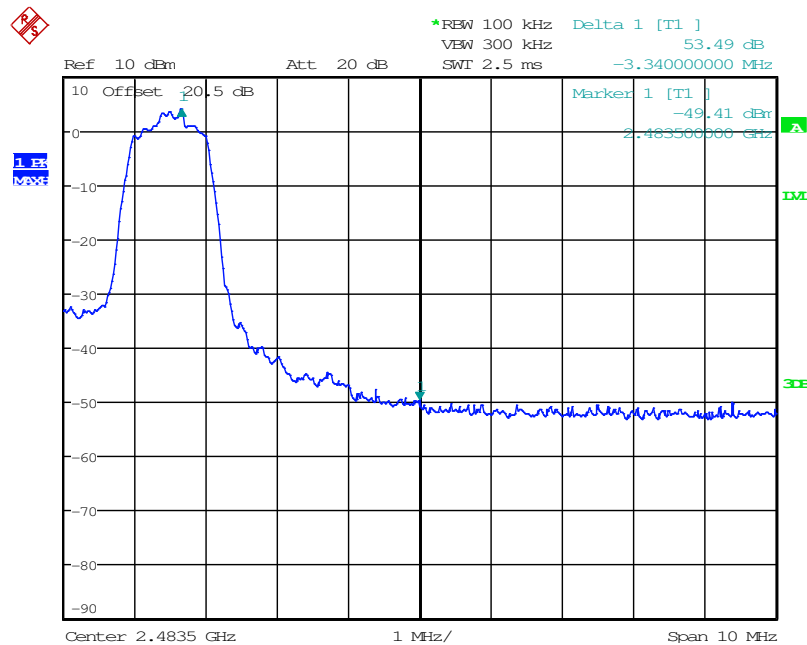
Figure 7.5.1.2-5: Lower Band-edge ($\pi/4$ DQPSK)

Date: 24.MAR.2016 15:56:42

Figure 7.5.1.2-6: Upper Band-edge ($\pi/4$ DQPSK)

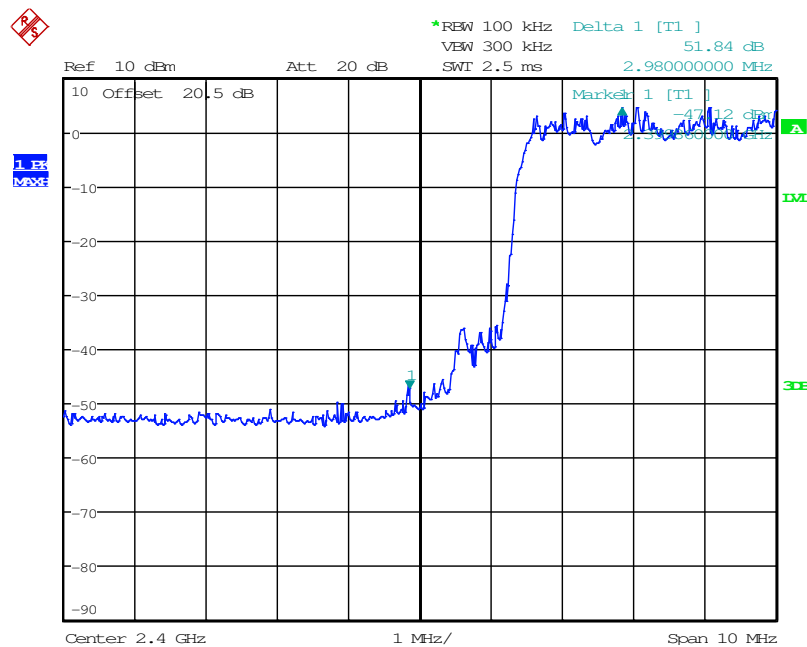


Date: 24.MAR.2016 15:48:07

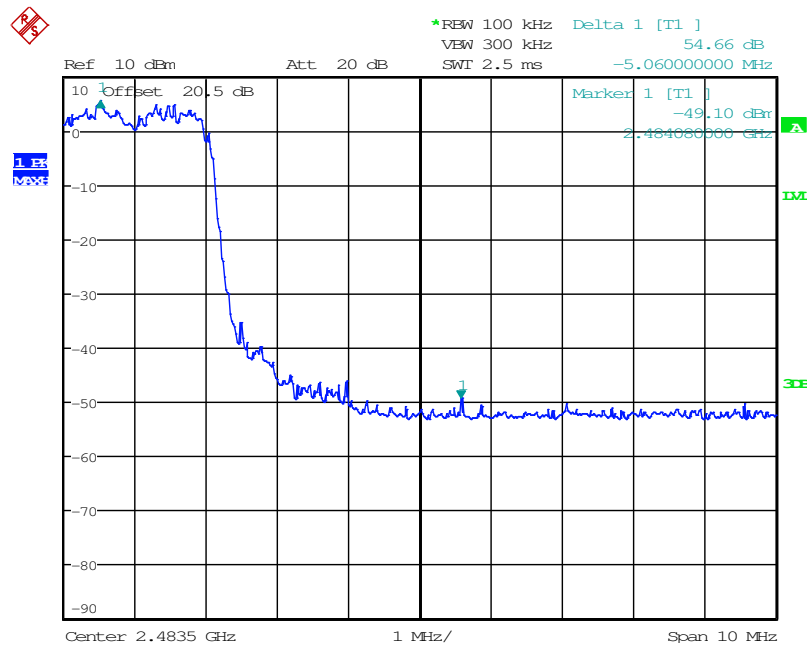Figure 7.5.1.2-7: Lower Band-edge – Hopping Mode ($\pi/4$ DQPSK)


Date: 24.MAR.2016 15:51:23

Figure 7.5.1.2-8: Upper Band-edge – Hopping Mode ($\pi/4$ DQPSK)

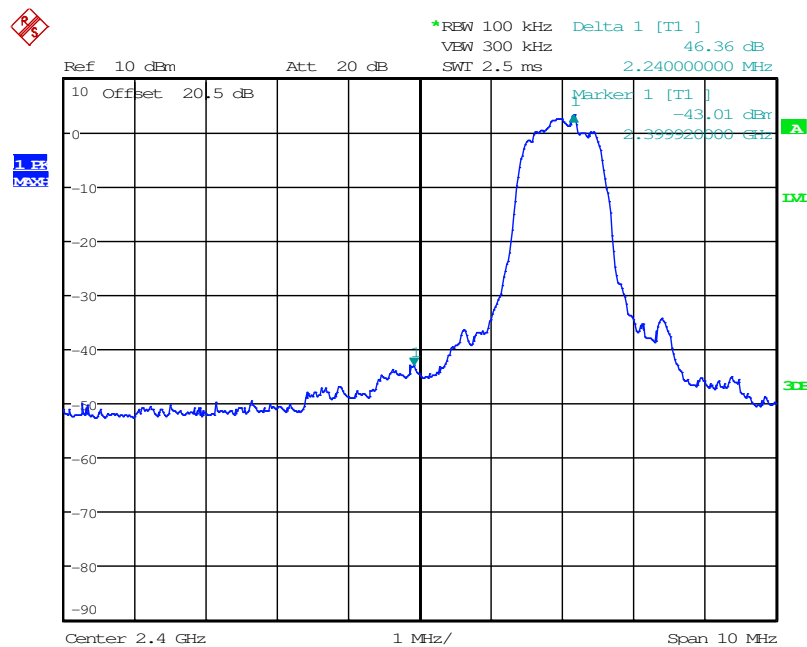


Date: 24.MAR.2016 15:40:20

Figure 7.5.1.2-9: Lower Band-edge (8DPSK)

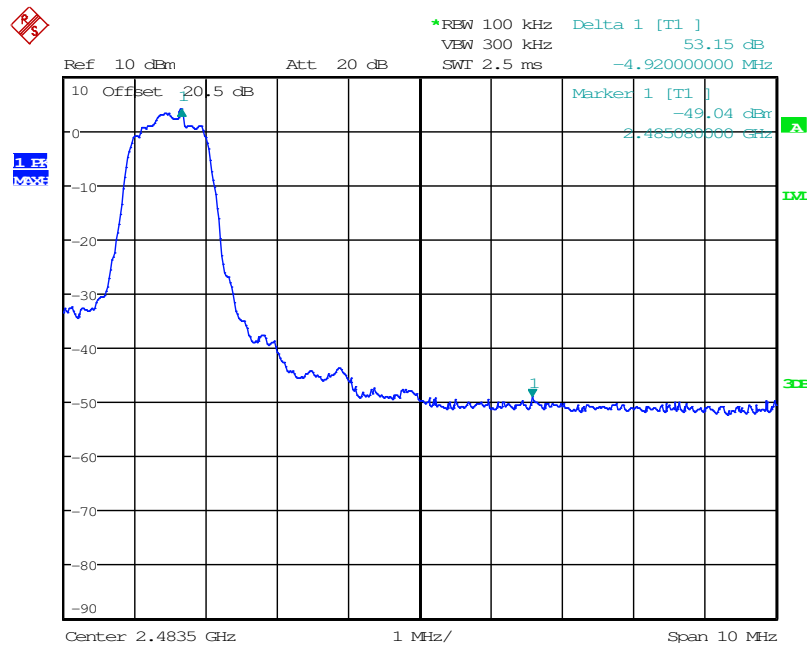


Date: 24.MAR.2016 14:58:35

Figure 7.5.1.2-10: Upper Band-edge (8DPSK)

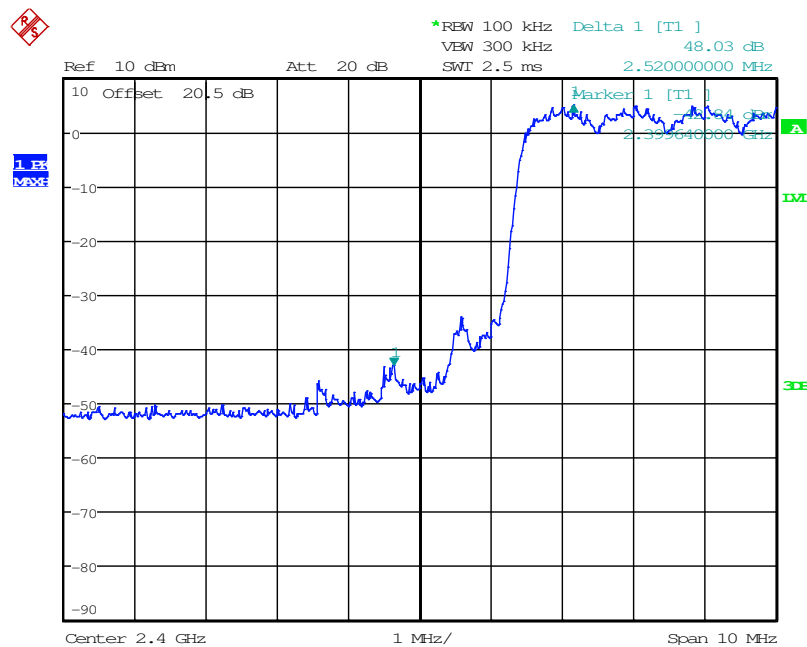

Date: 24.MAR.2016 15:24:00

Figure 7.5.1.2-11: Lower Band-edge – Hopping Mode (8DPSK)

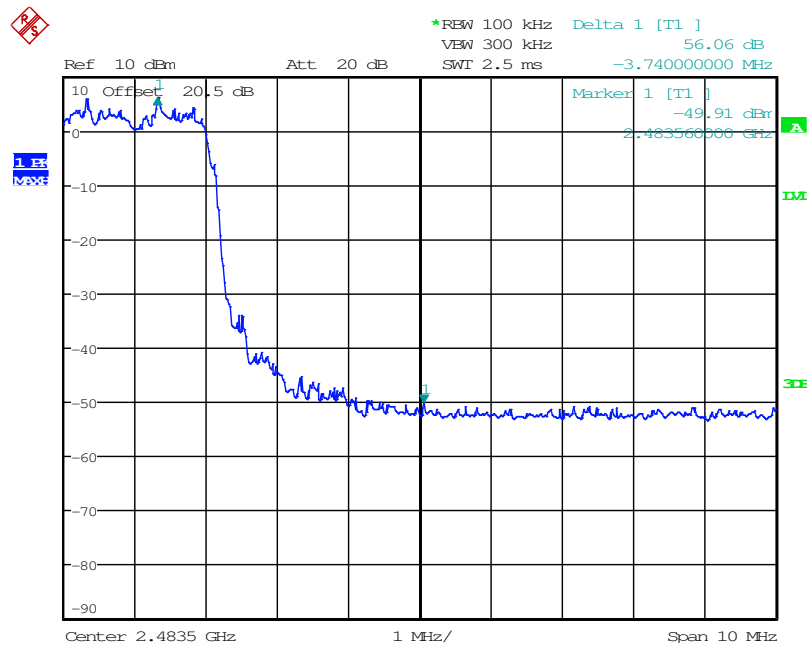

Date: 24.MAR.2016 15:07:42

Figure 7.5.1.2-12: Upper Band-edge – Hopping Mode (8DPSK)


7.5.2 RF Conducted Spurious Emissions

7.5.2.1 Measurement Procedure

The RF output port of the EUT was connected to the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30 MHz to 26 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz. A peak detector function was used with the trace set to max hold. The levels were corrected for cable and attenuator losses.


7.5.2.2 Measurement Results

Results are shown below:

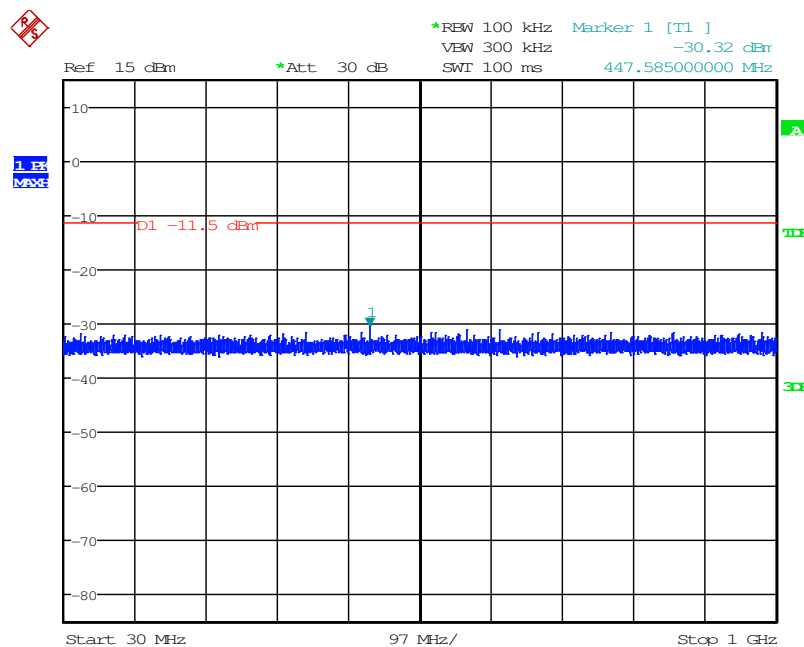


Date: 28.MAR.2016 14:17:41

Figure 7.5.2.2-1: 30 MHz – 1 GHz – Low Channel (GFSK)

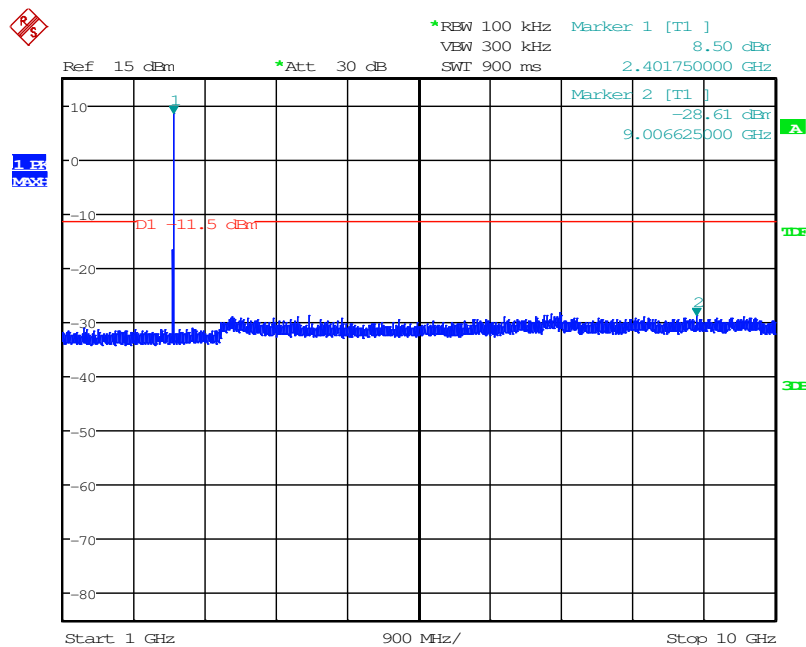


Date: 28.MAR.2016 14:11:43

Figure 7.5.2.2-2: 1 GHz –10 GHz – Low Channel (GFSK)

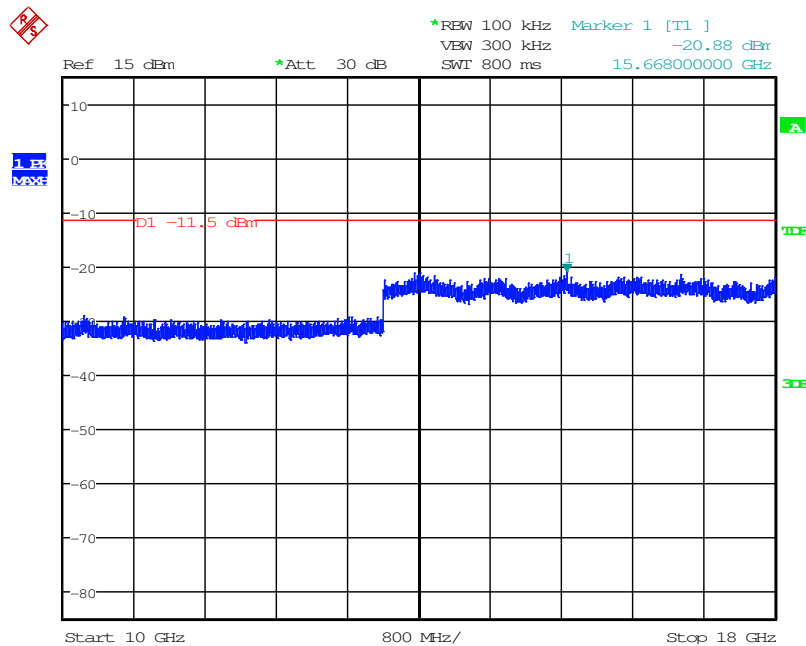


Date: 28.MAR.2016 14:20:23

Figure 7.5.2.2-3: 10 GHz –18 GHz – Low Channel (GFSK)

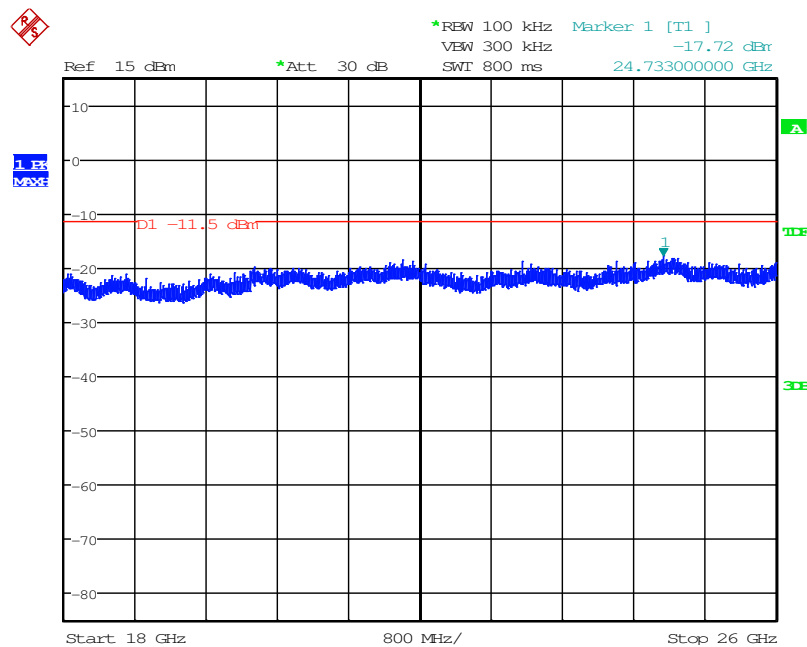


Date: 28.MAR.2016 14:23:40

Figure 7.5.2.2-4: 18 GHz –26 GHz – Low Channel (GFSK)

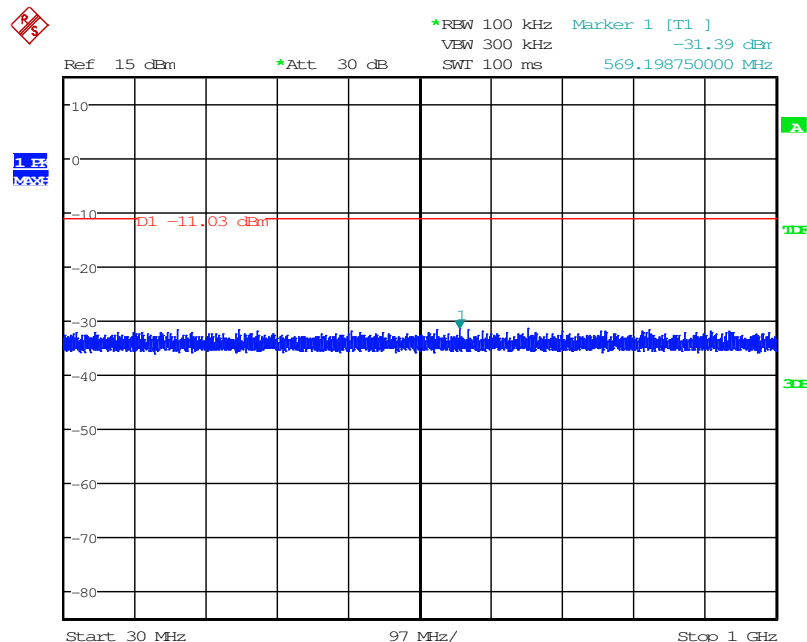


Date: 28.MAR.2016 14:33:25

Figure 7.5.2.2-5: 30 MHz – 1 GHz –Middle Channel (GFSK)

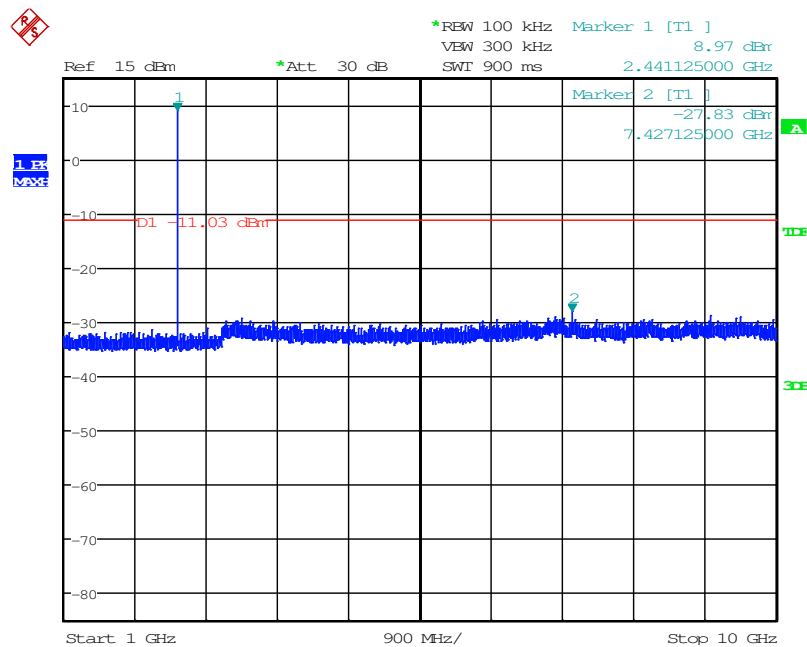


Date: 28.MAR.2016 14:30:25

Figure 7.5.2.2-6: 1 GHz –10 GHz – Middle Channel (GFSK)

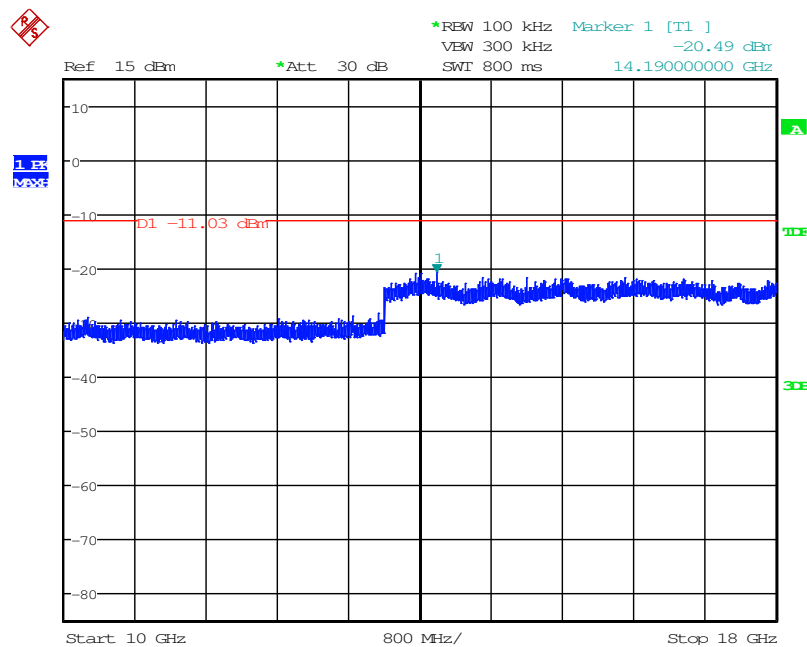


Date: 28.MAR.2016 14:36:26

Figure 7.5.2.2-7: 10 GHz –18 GHz – Middle Channel (GFSK)

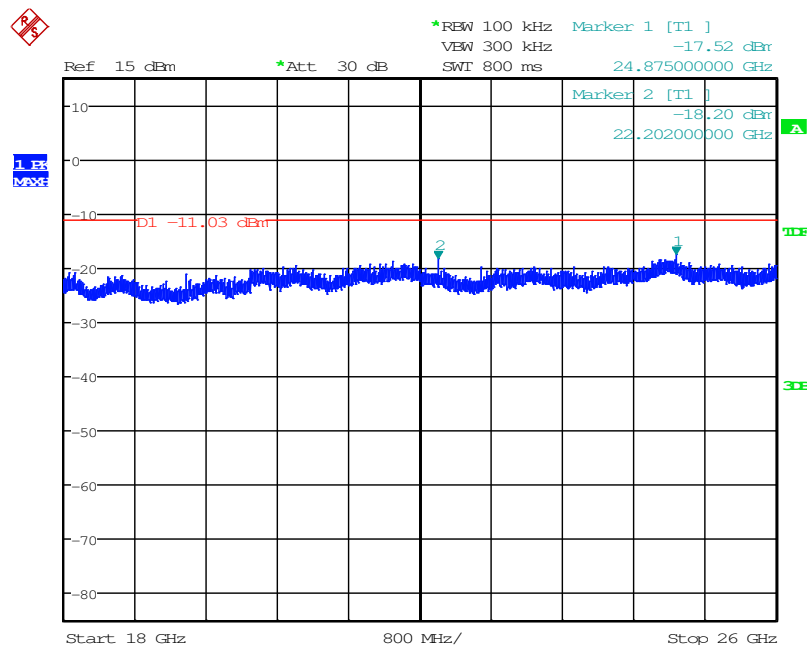


Date: 28.MAR.2016 14:39:07

Figure 7.5.2.2-8: 18 GHz –26 GHz – Middle Channel (GFSK)

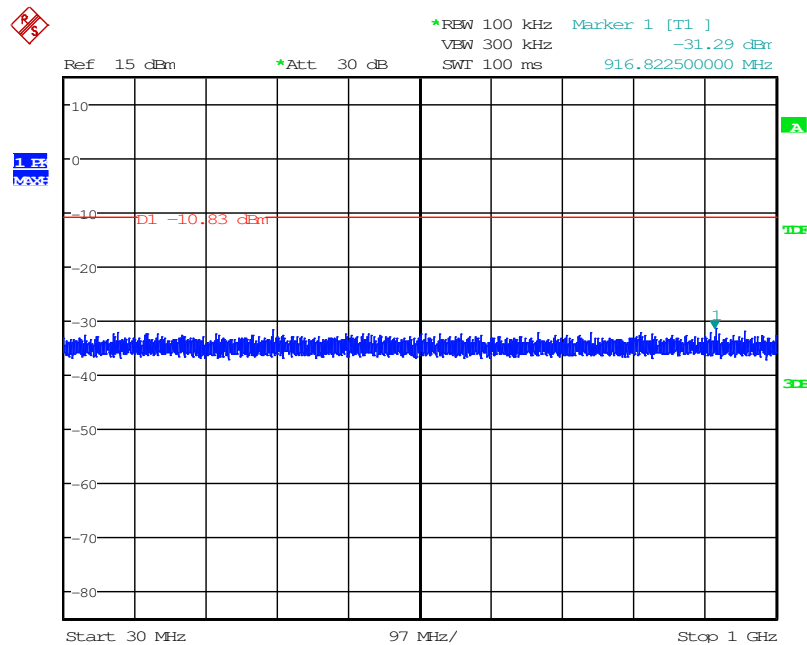


Date: 28.MAR.2016 14:53:43

Figure 7.5.2.2-9: 30 MHz – 1 GHz – High Channel (GFSK)

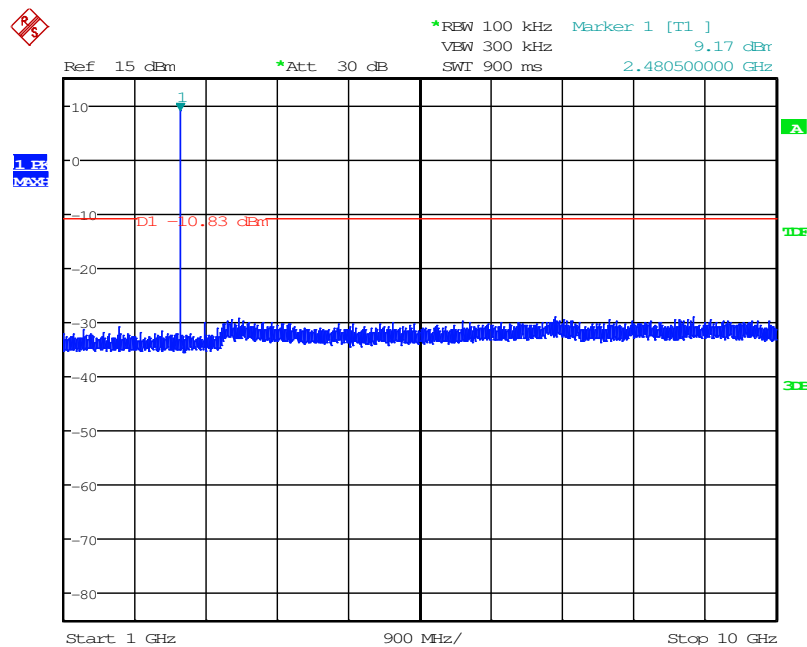


Date: 28.MAR.2016 14:52:43

Figure 7.5.2.2-10: 1 GHz –10 GHz –High Channel (GFSK)

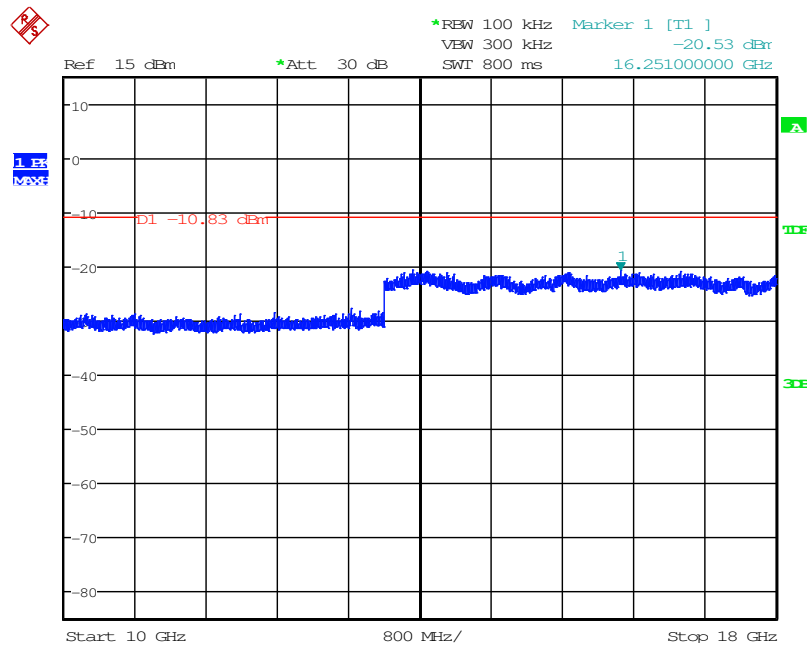


Date: 28.MAR.2016 15:21:55

Figure 7.5.2.2-11: 10 GHz –18 GHz – High Channel (GFSK)

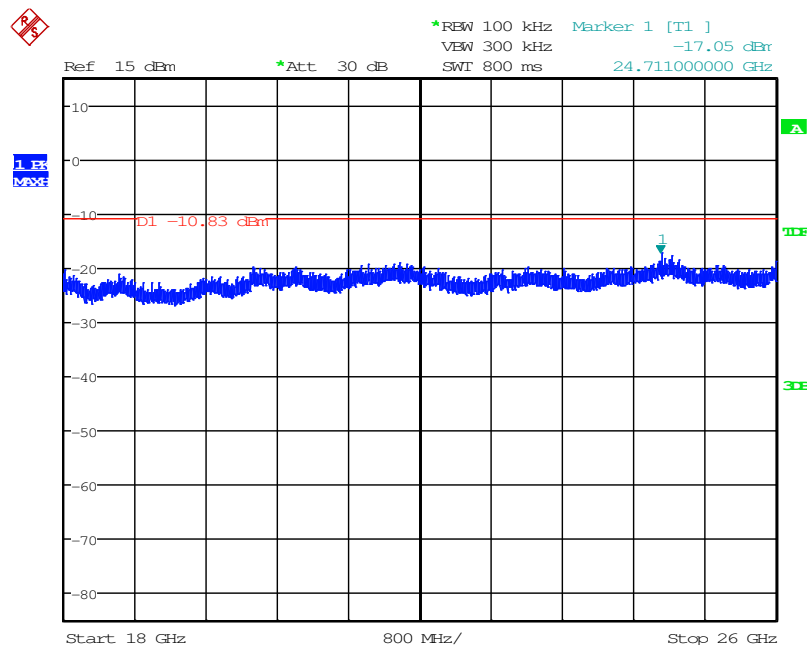


Date: 28.MAR.2016 15:24:08

Figure 7.5.2.2-12: 18 GHz –26 GHz – High Channel (GFSK)

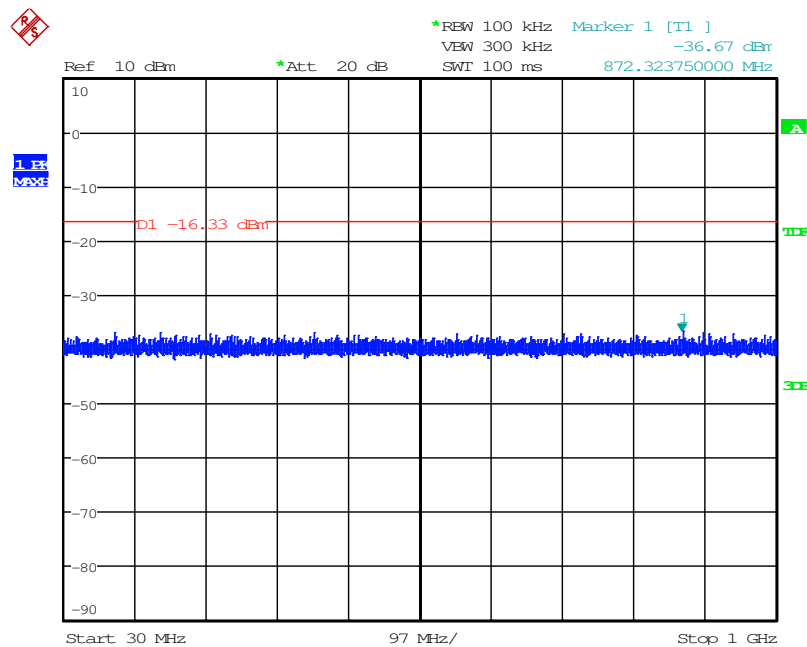


Date: 28.MAR.2016 15:33:04

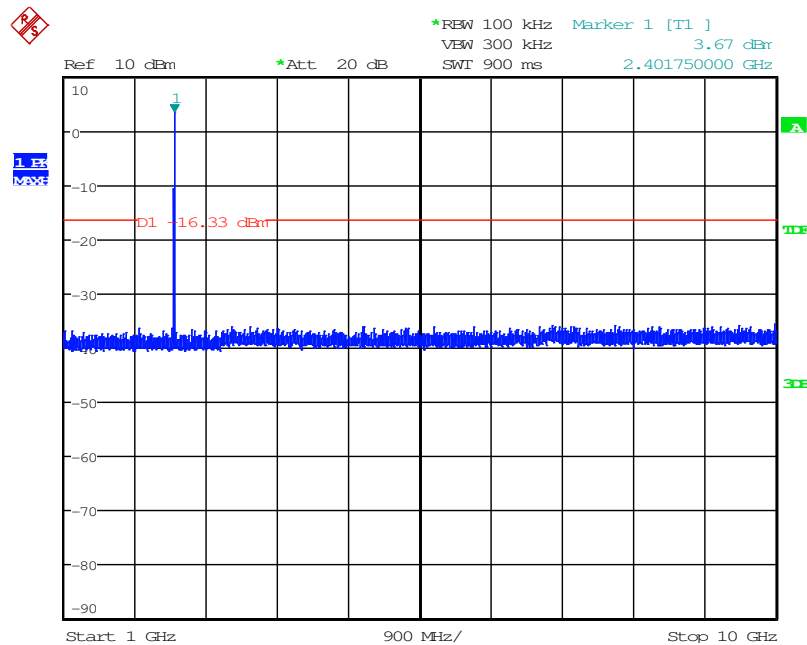
Figure 7.5.2.2-13: 30 MHz – 1 GHz – Low Channel ($\pi/4$ DQPSK)

Date: 28.MAR.2016 15:31:11

Figure 7.5.2.2-14: 1 GHz –10 GHz – Low Channel ($\pi/4$ DQPSK)

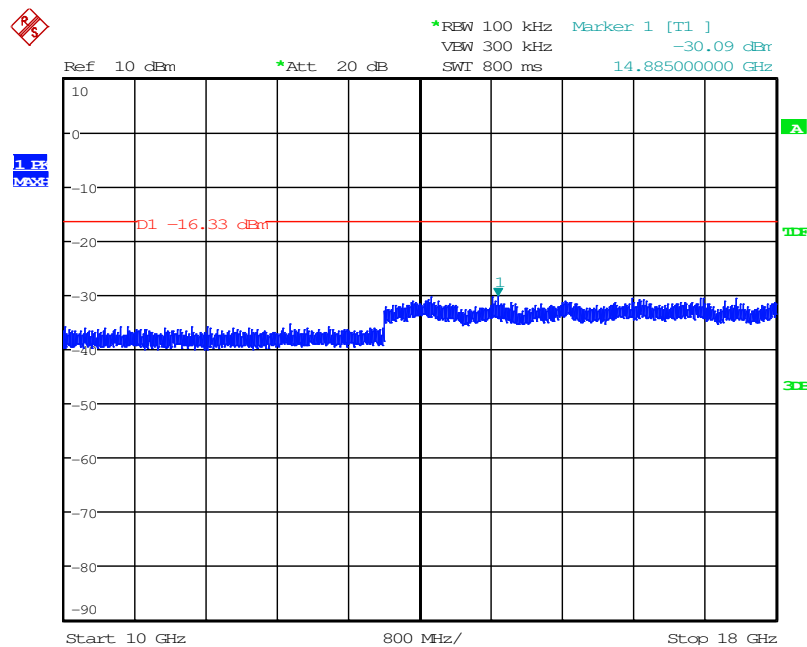


Date: 28.MAR.2016 15:35:30

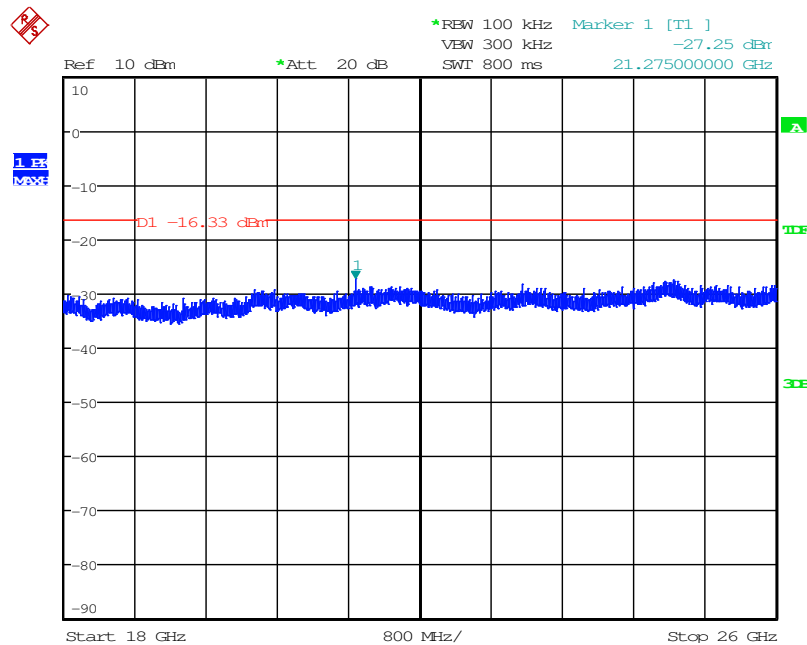
Figure 7.5.2.2-15: 10 GHz –18 GHz – Low Channel ($\pi/4$ DQPSK)

Date: 28.MAR.2016 15:37:26

Figure 7.5.2.2-16: 18 GHz –26 GHz – Low Channel ($\pi/4$ DQPSK)

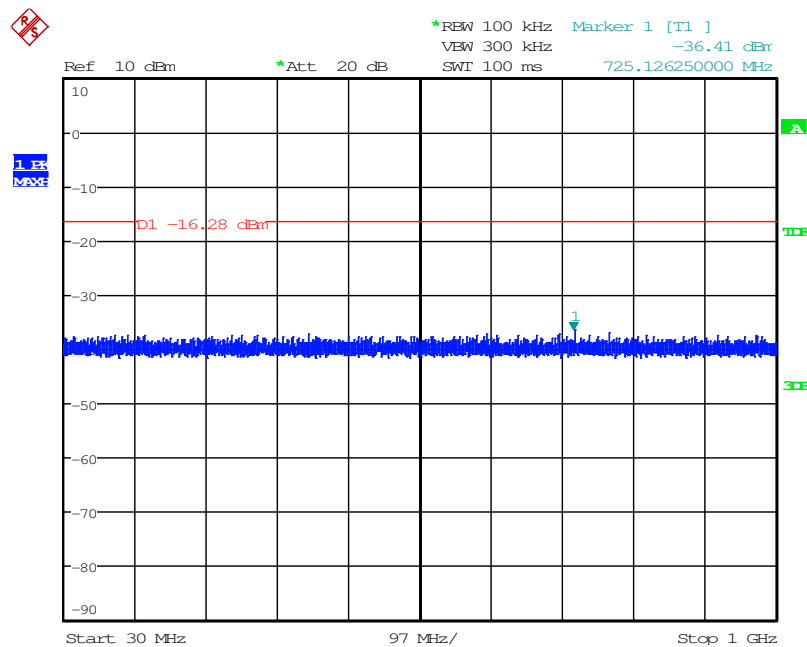


Date: 28.MAR.2016 15:46:26

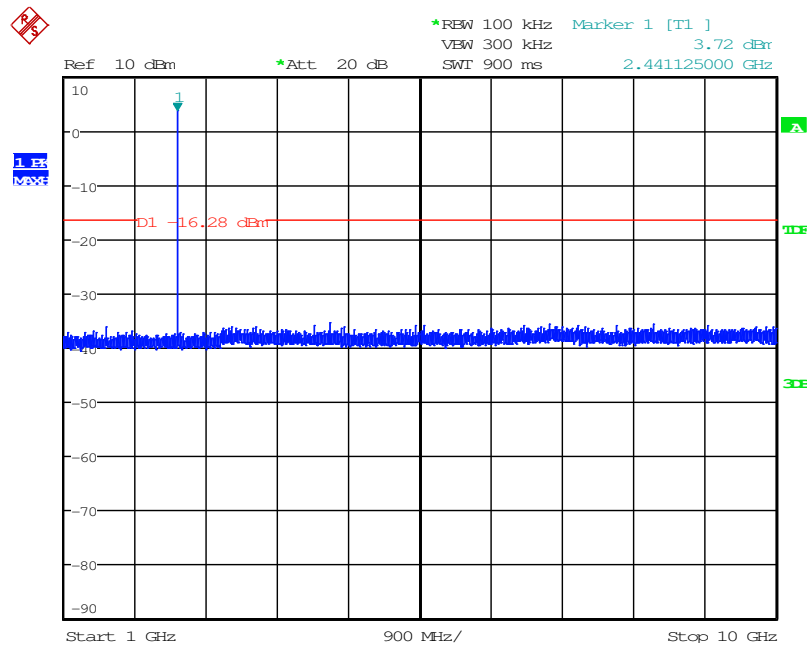
Figure 7.5.2.2-17: 30 MHz – 1 GHz –Middle Channel ($\pi/4$ DQPSK)

Date: 28.MAR.2016 15:44:35

Figure 7.5.2.2-18: 1 GHz –10 GHz – Middle Channel ($\pi/4$ DQPSK)

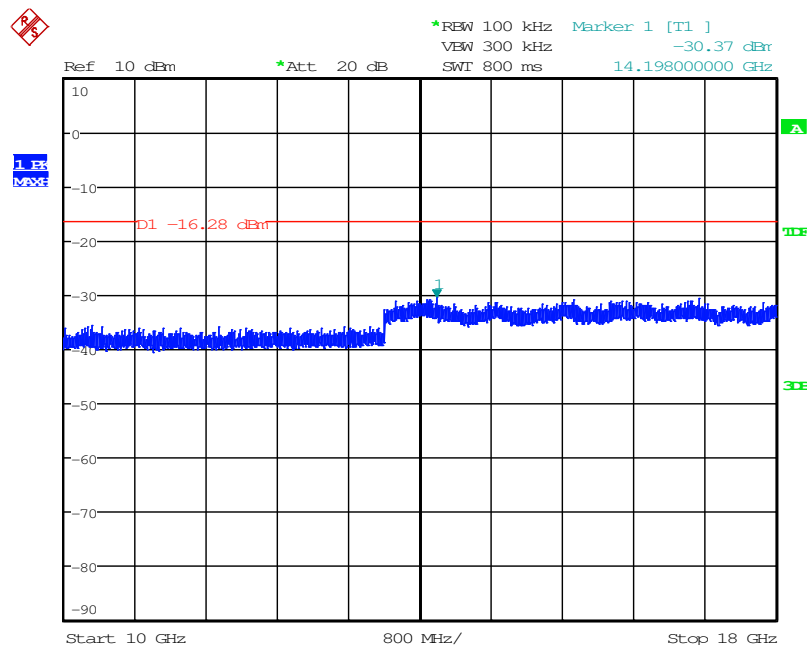


Date: 28.MAR.2016 15:48:09

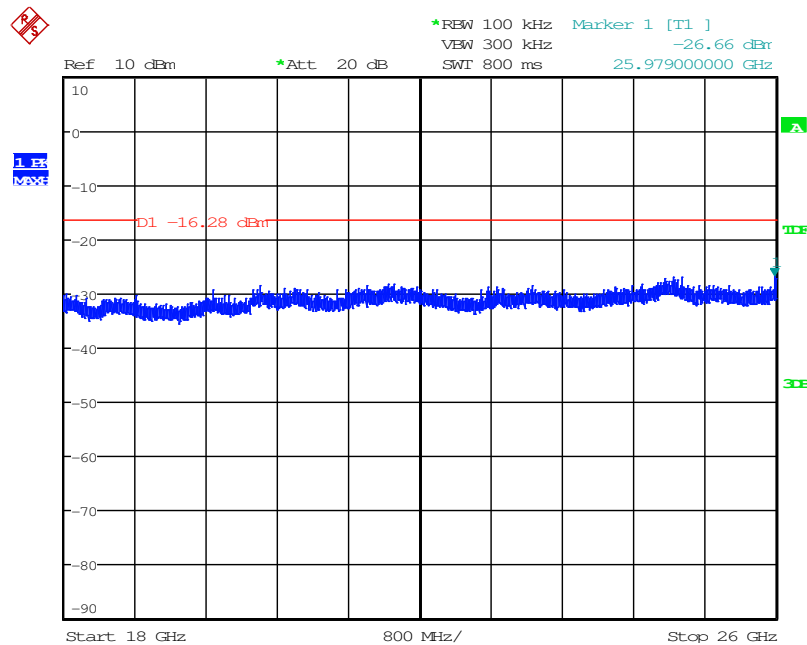
Figure 7.5.2.2-19: 10 GHz –18 GHz – Middle Channel ($\pi/4$ DQPSK)

Date: 28.MAR.2016 15:50:51

Figure 7.5.2.2-20: 18 GHz –26 GHz – Middle Channel ($\pi/4$ DQPSK)

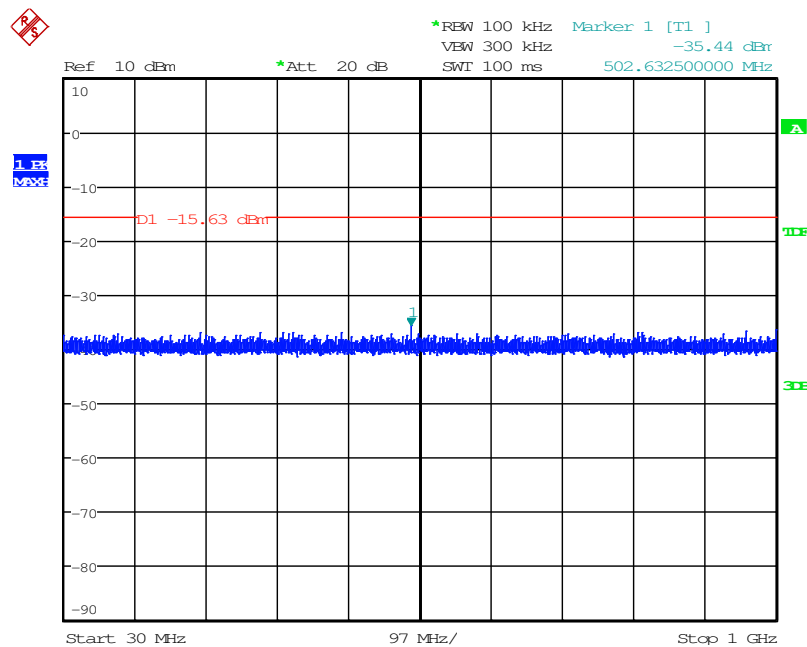


Date: 28.MAR.2016 16:03:20

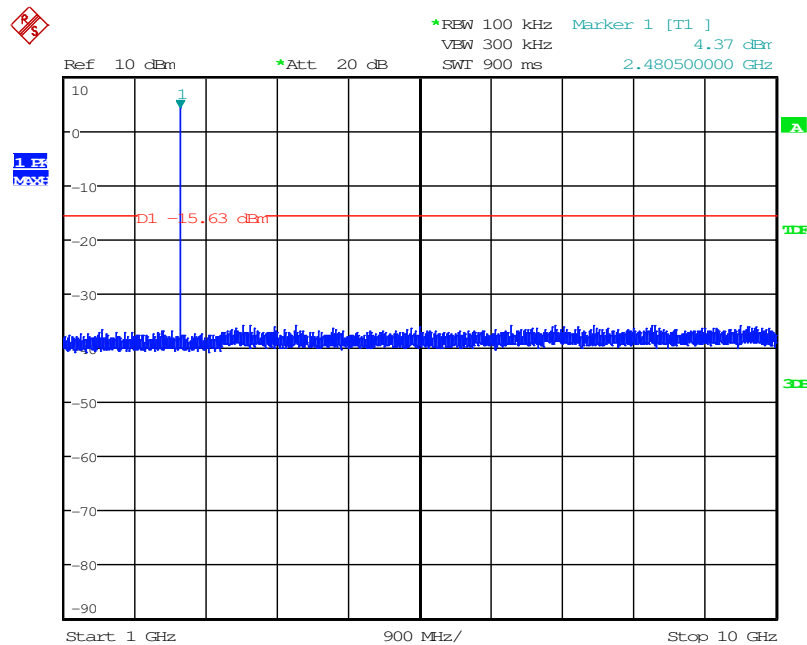
Figure 7.5.2.2-21: 30 MHz – 1 GHz – High Channel ($\pi/4$ DQPSK)

Date: 28.MAR.2016 16:00:20

Figure 7.5.2.2-22: 1 GHz –10 GHz –High Channel ($\pi/4$ DQPSK)

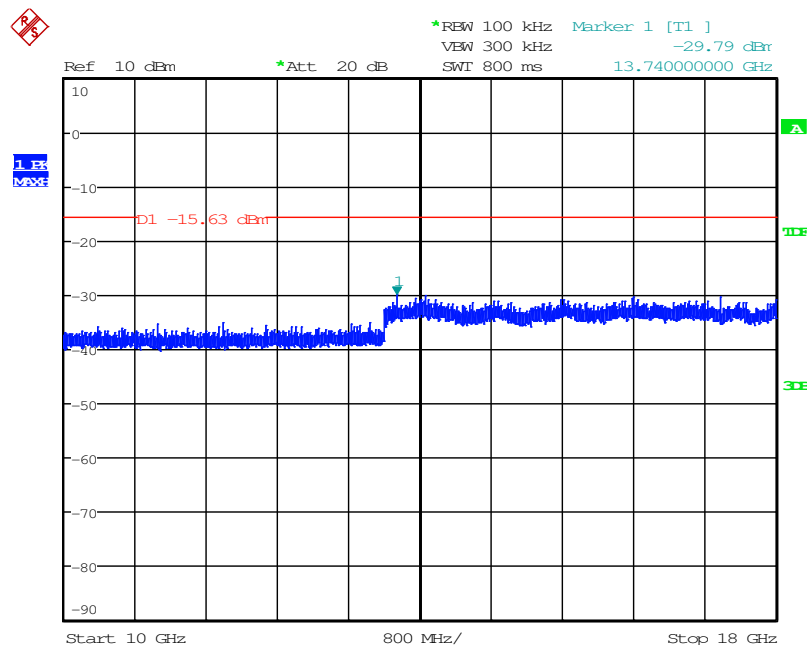


Date: 28.MAR.2016 16:09:07

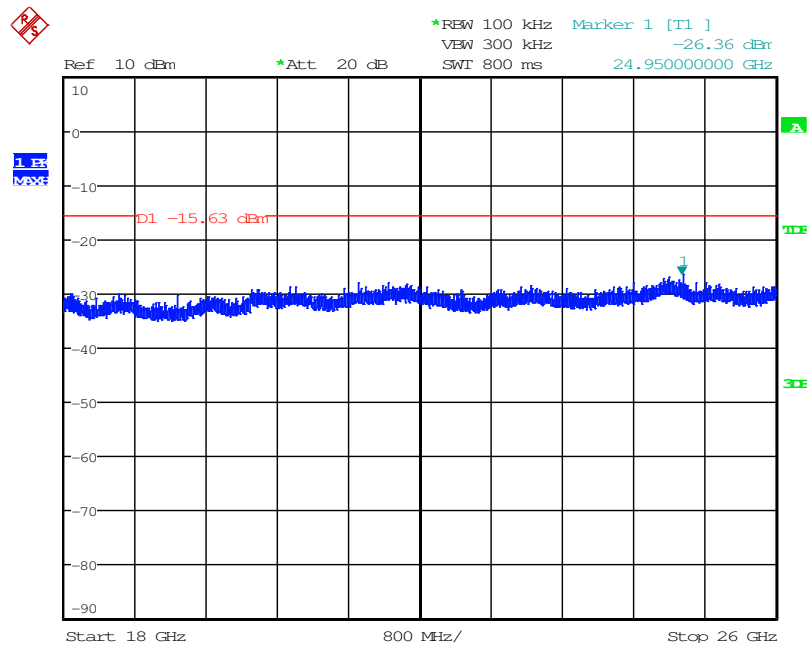Figure 7.5.2.2-23: 10 GHz –18 GHz – High Channel ($\pi/4$ DQPSK)


Date: 28.MAR.2016 16:12:12

Figure 7.5.2.2-24: 18 GHz –26 GHz – High Channel ($\pi/4$ DQPSK)

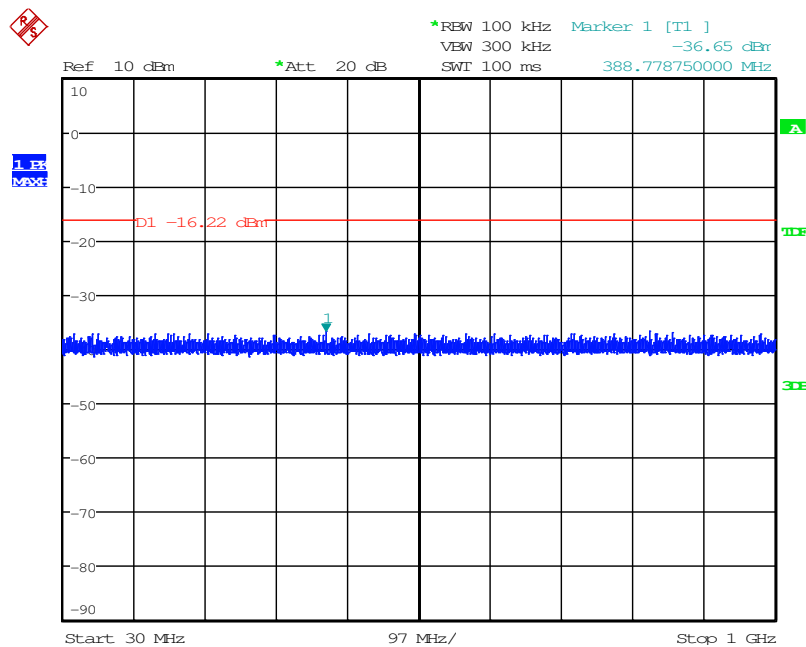


Date: 28.MAR.2016 16:35:47

Figure 7.5.2.2-25: 30 MHz – 1 GHz – Low Channel (8DPSK)

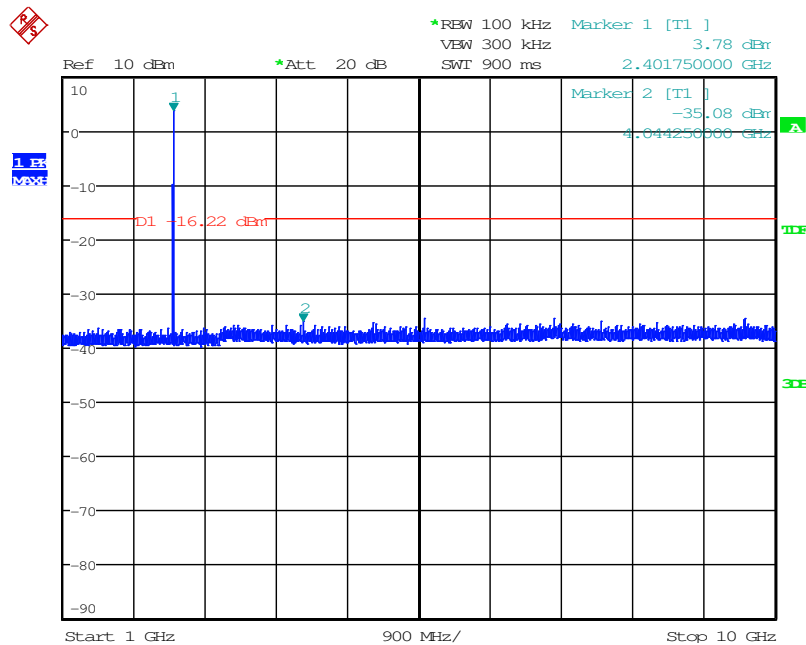


Date: 28.MAR.2016 16:32:50

Figure 7.5.2.2-26: 1 GHz – 10 GHz – Low Channel (8DPSK)

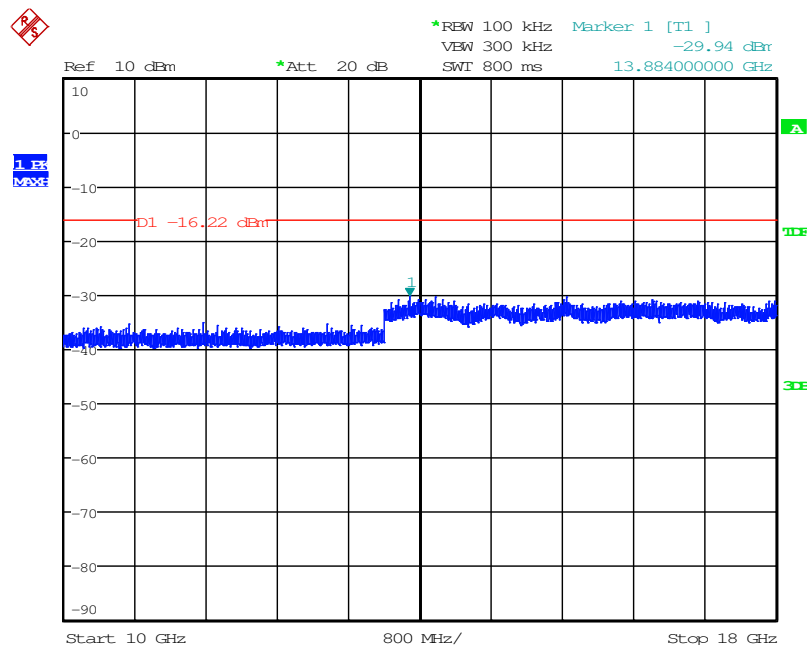


Date: 28.MAR.2016 16:38:31

Figure 7.5.2.2-27: 10 GHz –18 GHz – Low Channel (8DPSK)

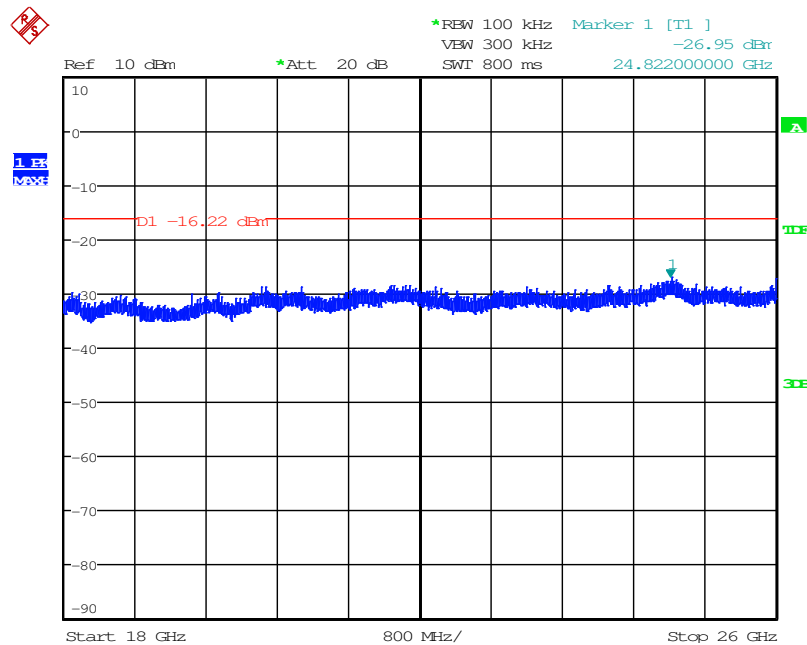


Date: 28.MAR.2016 16:40:45

Figure 7.5.2.2-28: 18 GHz –26 GHz – Low Channel (8DPSK)

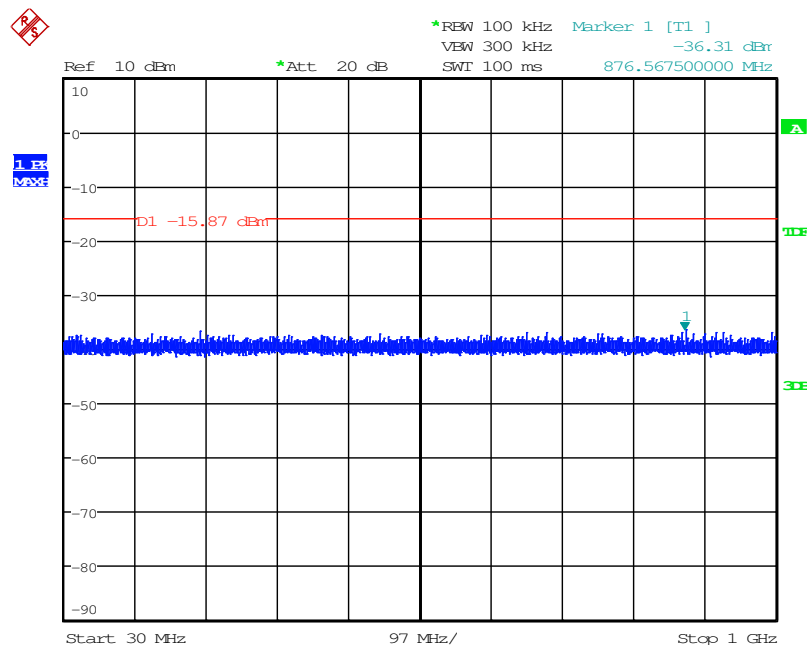


Date: 28.MAR.2016 21:13:15

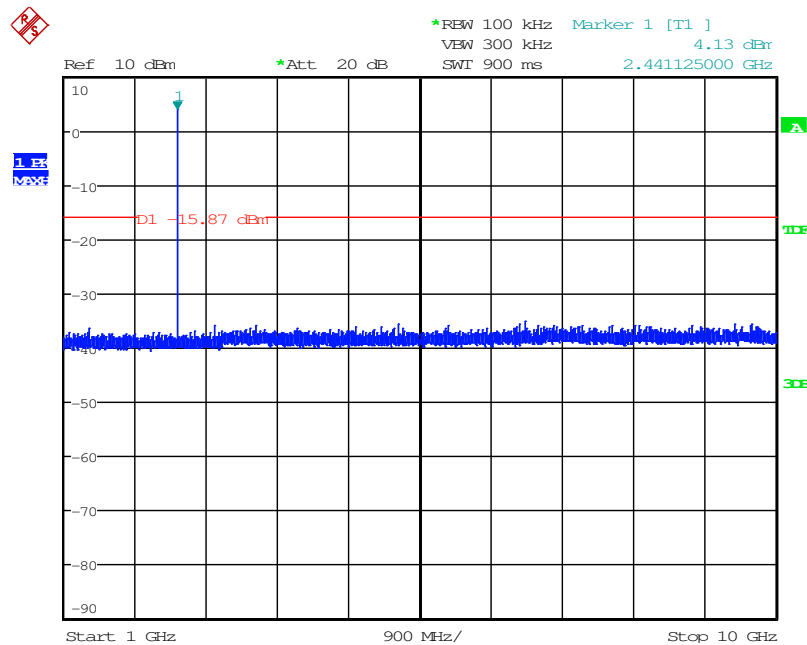
Figure 7.5.2.2-29: 30 MHz – 1 GHz –Middle Channel (8DPSK)

Date: 28.MAR.2016 21:10:30

Figure 7.5.2.2-30: 1 GHz –10 GHz – Middle Channel (8DPSK)

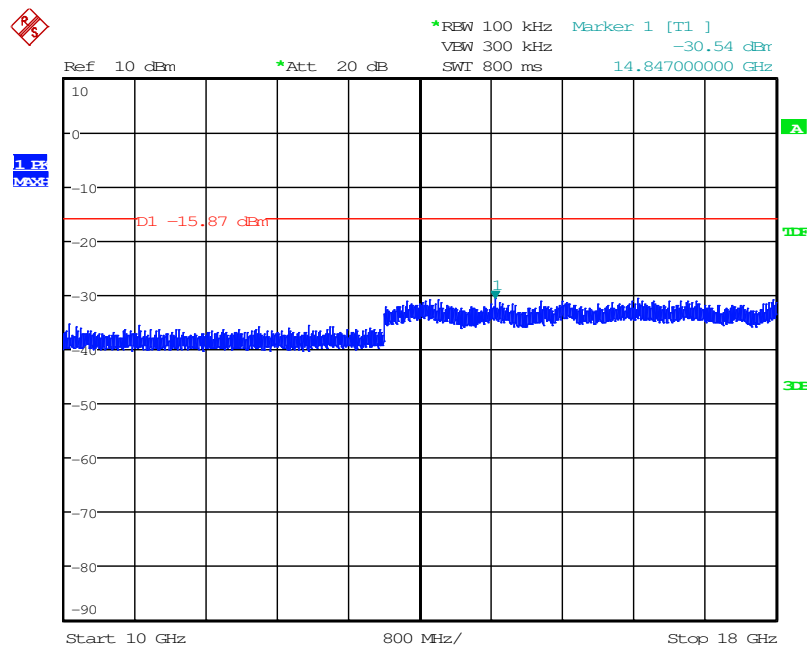


Date: 28.MAR.2016 21:14:41

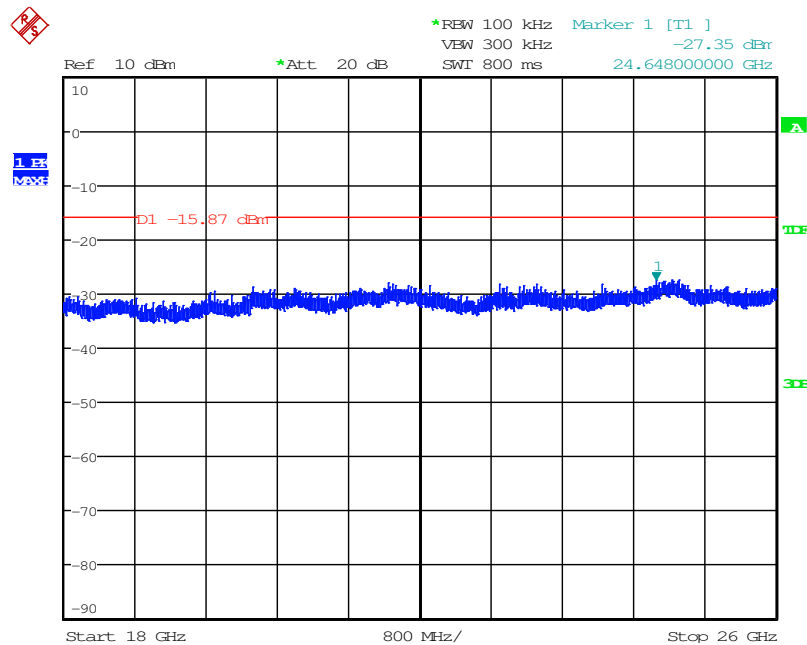Figure 7.5.2.2-31: 10 GHz –18 GHz – Middle Channel (8DPSK)


Date: 28.MAR.2016 21:16:42

Figure 7.5.2.2-32: 18 GHz –26 GHz – Middle Channel (8DPSK)

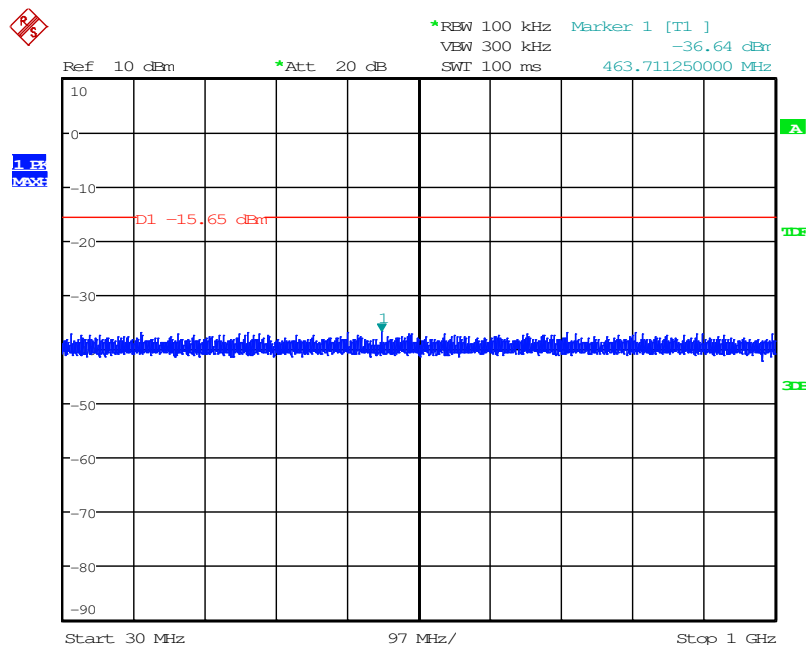


Date: 28.MAR.2016 21:28:51

Figure 7.5.2.2-33: 30 MHz – 1 GHz – High Channel (8DPSK)

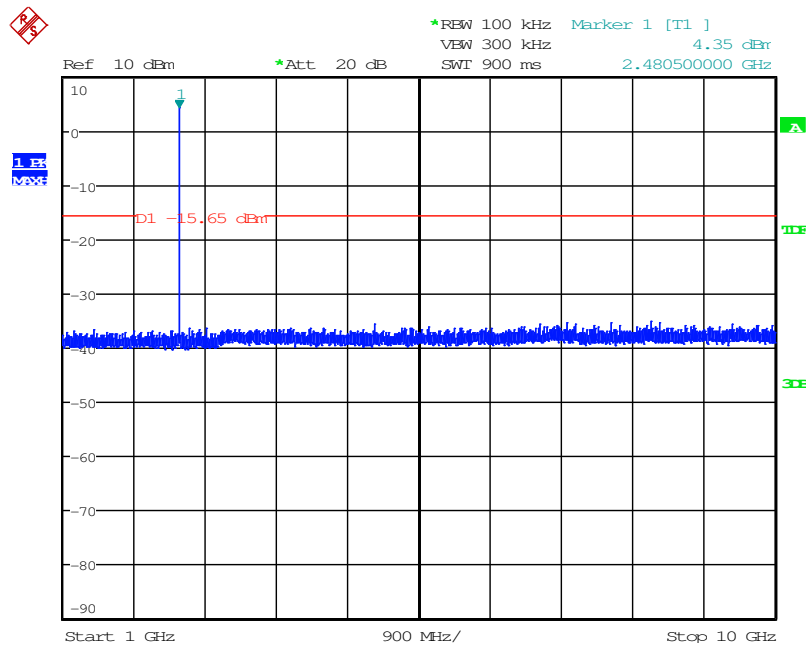


Date: 28.MAR.2016 21:26:25

Figure 7.5.2.2-34: 1 GHz –10 GHz –High Channel (8DPSK)

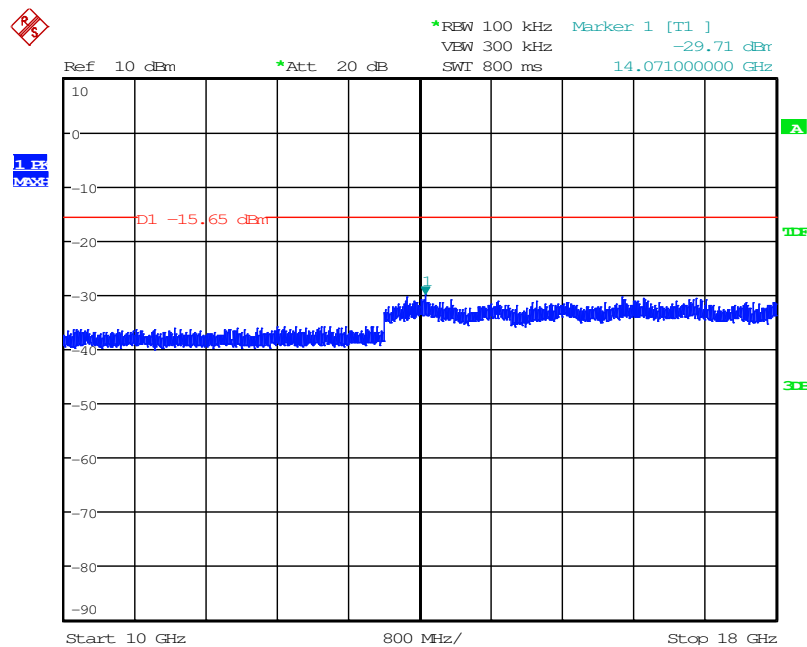

Date: 28.MAR.2016 21:31:22

Figure 7.5.2.2-35: 10 GHz –18 GHz – High Channel (8DPSK)

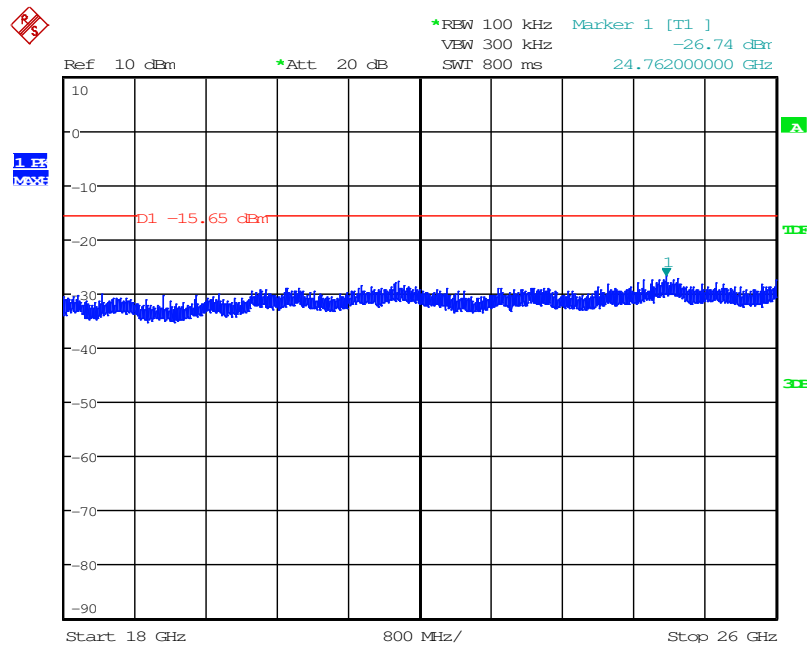

Date: 28.MAR.2016 21:34:44

Figure 7.5.2.2-36: 18 GHz –26 GHz – High Channel (8DPSK)

**7.5.3 Radiated Spurious Emissions within the Restricted Bands - FCC Sections 15.205, 15.209;
IC: RSS-Gen 8.9, 8.10****7.5.3.1 Measurement Procedure**

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

For measurements above 30 MHz, the EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements made with RBW and VBW of 1 MHz and 3 MHz respectively. Average measurements were collected in the linear amplitude scale with VBW of 30 Hz.

The EUT was caused to generate a continuous carrier signal on the hopping channel. The average levels were further corrected using a duty cycle correction factor calculated using the transmit channel dwell time over 100 ms. The calculation for the factor is provided in Section 7.5.3.3.

7.5.3.2 Measurement Results

Band-edge and radiated spurious emissions found in the restricted bands of 9 kHz to 26 GHz are reported in the tables below.

Table 7.5.3.2-1: Radiated Spurious Emissions Tabulated Data - GFSK

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel = 2402 MHz										
2390	58.17	47.18	H	-5.60	52.57	10.89	74.0	54.0	21.4	43.1
12010	41.26	30.17	H	16.59	57.85	16.07	83.5	63.5	25.7	47.4
Middle Channel = 2441 MHz										
7323	48.35	41.42	H	8.85	57.20	19.58	74.0	54.0	16.8	34.4
7323	45.75	36.54	V	8.85	54.60	14.70	74.0	54.0	19.4	39.3
High Channel = 2480 MHz										
2483.5	64.61	60.74	H	-5.15	59.46	24.89	74.0	54.0	14.5	29.1
2483.5	57.24	48.51	V	-5.15	52.09	12.66	74.0	54.0	21.9	41.3
7440	45.55	36.12	H	9.37	54.92	14.80	74.0	54.0	19.1	39.2
7440	43.73	33.14	V	9.37	53.10	11.82	74.0	54.0	20.9	42.2

Notes:

- The average levels were further corrected using a duty cycle correction factor consisting of the logarithm of the dwell time over 100 ms.
- The emissions above 10 GHz were measured at a test distance of 1m. The limits are corrected accordingly using a distance factor of $20 \cdot \log(10/3)$ dB = 9.5 dB.
- All emissions above 12.4 GHz were attenuated below the limits and the noise floor of the measurement equipment.

Table 7.5.3.2-2: Radiated Spurious Emissions Tabulated Data – ($\pi/4$) DQPSK

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel = 2402 MHz										
2390	57.72	46.31	H	-5.60	52.12	10.02	74.0	54.0	21.9	44.0
12010	41.77	30.78	H	16.59	58.36	16.68	83.5	63.5	25.1	46.8
Middle Channel = 2441 MHz										
7323	48.33	40.33	H	8.85	57.18	18.49	74.0	54.0	16.8	35.5
7323	45.83	35.94	V	8.85	54.68	14.10	74.0	54.0	19.3	39.9
High Channel = 2480 MHz										
2483.5	64.16	57.36	H	-5.15	59.01	21.51	74.0	54.0	15.0	32.5
2483.5	57.50	46.78	V	-5.15	52.35	10.93	74.0	54.0	21.7	43.1
7440	47.16	38.84	H	9.37	56.53	17.52	74.0	54.0	17.5	36.5
7440	45.40	35.23	V	9.37	54.77	13.91	74.0	54.0	19.2	40.1

Notes:

- The average levels were further corrected using a duty cycle correction factor consisting of the logarithm of the dwell time over 100 ms.
- The emissions above 10 GHz were measured at a test distance of 1m. The limits are corrected accordingly using a distance factor of $20 \cdot \log(10/3)$ dB = 9.5 dB.
- All emissions above 12.4 GHz were attenuated below the limits and the noise floor of the measurement equipment.

Table 7.5.3.2-3: Radiated Spurious Emissions Tabulated Data – 8DPSK

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel = 2402 MHz										
2390	60.08	46.49	H	-5.60	54.48	10.20	74.0	54.0	19.5	43.8
12010	41.72	30.92	H	16.59	58.31	16.82	83.5	63.5	25.2	46.7
Middle Channel = 2441 MHz										
7323	48.18	40.31	H	8.85	57.03	18.47	74.0	54.0	17.0	35.5
7323	45.90	35.98	V	8.85	54.75	14.14	74.0	54.0	19.2	39.9
High Channel = 2480 MHz										
2483.5	65.58	57.47	H	-5.15	60.43	21.62	74.0	54.0	13.6	32.4
2483.5	57.94	47.05	V	-5.15	52.79	11.20	74.0	54.0	21.2	42.8
7440	47.16	38.74	H	9.37	56.53	17.42	74.0	54.0	17.5	36.6
7440	44.94	35.36	V	9.37	54.31	14.04	74.0	54.0	19.7	40.0

Notes:

- The average levels were further corrected using a duty cycle correction factor consisting of the logarithm of the dwell time over 100 ms.
- The emissions above 10 GHz were measured at a test distance of 1m. The limits are corrected accordingly using a distance factor of $20 \cdot \log(10/3)$ dB = 9.5 dB.
- All emissions above 12.4 GHz were attenuated below the limits and the noise floor of the measurement equipment.

7.5.3.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_U	=	Uncorrected Reading
R_C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

$$DC = 20 \cdot \log(2.92/100) = -30.69 \text{ dB}$$

Example Calculation: Peak

$$\text{Corrected Level: } 58.17 + (-5.6) = 52.57 \text{ dB}\mu\text{V/m}$$

$$\text{Margin: } 74 \text{ dB}\mu\text{V/m} - 52.57 \text{ dB}\mu\text{V/m} = 21.4 \text{ dB}$$

Example Calculation: Average

$$\text{Corrected Level: } 47.18 + (-5.6) - 30.69 = 10.89 \text{ dB}\mu\text{V/m}$$

$$\text{Margin: } 54 \text{ dB}\mu\text{V/m} - 10.89 \text{ dB}\mu\text{V/m} = 43.1 \text{ dB}$$

8 CONCLUSION

In the opinion of ACS, Inc., the model H98SDH9PW7BN manufactured by Motorola Solutions Sdn Bhd meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-247 for the test procedures documented in the test report.

END REPORT