

| | |
|---|---|
|  MOTOROLA SOLUTIONS |     <p>CERTIFICATE 2518.08</p> <p>MS ISO/IEC 17025 TESTING SAMM NO. 0825</p> |
| MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia. | FCC / ISED TEST REPORT Report Revision : Rev.B |

| | |
|------------------------------------|--|
| Date/s Tested | : 08-January-2020 to 09-January-2020 |
| Report Issue Date | : 09-January-2020 |
| Manufacturer/Location | : Motorola Solution Malaysia Sdn Bhd |
| Requestor | : SZE KEAT NG |
| Product Type (PMN) | : Portable |
| Model Number (HVIN) | : H98SDH9PW7BN |
| Frequency Band | : 2.402 - 2.480 GHz |
| Rated / Max RF Output Power | : 8 mWatts / 10 mWatts |
| Applicant Name | : Motorola Solutions Inc |
| Applicant Address | : 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322. |
| FCC Registrations | : 461337 |
| IC Registrations | : MY0001 |
| Firmware Version (FVIN) | : D20.55.25 |

The equipment was tested accordance to the requirement listed below:

(2.4GHz BT)

PASS

FCC 47CFR Part 15C
ISED RSS 247 Issue 2,
February 2017

This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.

Prepared By:



Faris Abdullah
Test Personnel

Approved By:

Ho Sze Khian
Responsible Engineer

Table of Contents

| | |
|--|----|
| 1.0. General Information..... | 3 |
| 2.0. Summary of Test Results | 4 |
| 3.0. Measurement Uncertainty | 4 |
| 4.0. Equipment List..... | 5 |
| 5.0. Test Mode Applicability and Test Channel Detail | 6 |
| 6.0. Transmitter Test Parameters | 7 |
| 6.1. Radiated Emission within restricted Bands | 7 |
| 6.1.1. Test Setup..... | 7 |
| 6.1.2. Test Limits: | 8 |
| 6.1.3. Test Data: | 9 |
| 6.2. AC Powerline Conducted Emission..... | 14 |
| 6.2.1. Test Setup..... | 14 |
| 6.2.2. Test Limits: | 15 |
| 6.2.3. Test Result..... | 15 |

REVISION HISTORY

| Revision History | Description | Date | Originator |
|-------------------------|---|-----------------|-------------------|
| Rev. A | Initial Report | 09-January-2020 | Faris Abdullah |
| Rev. B | Update Front Page on Applicant Name & Address | 26-March-2020 | Faris Abdullah |

1.0. General Information

EUT Description:

| | |
|--------------------|---------------------------------------|
| Technologies | 2.4GHz BT |
| TX Frequency range | 2402MHz – 2480MHz |
| Modulation Type | GFSK |
| Input/Output | RF port |
| Connector type | PROGRAMMING, TEST & ALIGNMENT CABLE |
| Antenna type | INTERNAL BT/WLAN ANTENNA (RADIO ONLY) |

The EUT contains following accessory devices and data cable:

| Item | Brand | Model or P/N |
|--|----------|--------------|
| BATT IMP STD DELTA T RUGGED LIION 5000T | MOTOROLA | PMNN4494A |
| UHF R2 PLUS GPS STUBBY ANT 450-520MHZ, 1575MHZ | MOTOROLA | FAF5260A |

Channel number and frequency information:

79 channels are provided to this EUT:

| Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0 | 2402 | 20 | 2422 | 40 | 2442 | 60 | 2462 |
| 1 | 2403 | 21 | 2423 | 41 | 2443 | 61 | 2463 |
| 2 | 2404 | 22 | 2424 | 42 | 2444 | 62 | 2464 |
| 3 | 2405 | 23 | 2425 | 43 | 2445 | 63 | 2465 |
| 4 | 2406 | 24 | 2426 | 44 | 2446 | 64 | 2466 |
| 5 | 2407 | 25 | 2427 | 45 | 2447 | 65 | 2467 |
| 6 | 2408 | 26 | 2428 | 46 | 2448 | 66 | 2468 |
| 7 | 2409 | 27 | 2429 | 47 | 2449 | 67 | 2469 |
| 8 | 2410 | 28 | 2430 | 48 | 2450 | 68 | 2470 |
| 9 | 2411 | 29 | 2431 | 49 | 2451 | 69 | 2471 |
| 10 | 2412 | 30 | 2432 | 50 | 2452 | 70 | 2472 |
| 11 | 2413 | 31 | 2433 | 51 | 2453 | 71 | 2473 |
| 12 | 2414 | 32 | 2434 | 52 | 2454 | 72 | 2474 |
| 13 | 2415 | 33 | 2435 | 53 | 2455 | 73 | 2475 |
| 14 | 2416 | 34 | 2436 | 54 | 2456 | 74 | 2476 |
| 15 | 2417 | 35 | 2437 | 55 | 2457 | 75 | 2477 |
| 16 | 2418 | 36 | 2438 | 56 | 2458 | 76 | 2478 |
| 17 | 2419 | 37 | 2439 | 57 | 2459 | 77 | 2479 |
| 18 | 2420 | 38 | 2440 | 58 | 2460 | 78 | 2480 |
| 19 | 2421 | 39 | 2441 | 59 | 2461 | | |

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

A pigtail was soldered out of the Bluetooth/WiFi subsection to allow for conducted tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

2.0. Summary of Test Results

| FCC Clause | ISED Clause | Test Item | Result | Remark | Serial number tested |
|----------------------------|-------------|---|--------|--|----------------------|
| 15.205, 15.209, 15.247 (d) | RSS-247 5.5 | Radiated Emission within Restricted Bands | Pass | Evaluate on worst case channel from SR05882-EMC-00064 | 756TVZ0040 |
| 15.207 | RSS-Gen 8.8 | AC Powerline Conducted Emission | NA | Testing is not required, radio shall turn off during charging mode | Not Applicable |
| 15.203 | - | Antenna Requirement | NA | Internal antenna is not accessible to the end-user | Not Applicable |

3.0. Measurement Uncertainty

| Measurement | Frequency | Expended Uncertainty (k=1.96) (±dB) |
|---|------------------|--|
| AC Power Line Conducted Spurious Emission | 150KHz ~ 30MHz | 3.43 |
| Radiated Emissions up to 1 GHz | 30MHz ~ 200MHz | 5.01 |
| | 200MHz ~ 1000MHz | 5.01 |
| Radiated Emissions above 1 GHz | 1GHz ~ 18GHz | 5.01 |
| | 18GHz ~ 25GHz | 5.01 |

4.0. Equipment List

Radiated Emission Station (SW Version: EMC FCC RE v1.6.0)

| DESCRIPTION | MODEL | SERIAL NUMBER | CALIBRATION DATE | CALIBRATION DUE DATE |
|----------------------------|------------------------------|---------------|------------------|----------------------|
| EMI TEST RECEIVER | ESIB40 | 100264 | 17-Jul-19 | 17-Jul-20 |
| 3m Semi-anechoic Chamber | NA | 888032 | No Cal. Req'd | No Cal. Req'd |
| TURNTABLE FLUSH MOUNT 2M | T-200-S | N/A | No Cal. Req'd | No Cal. Req'd |
| Bore sight Antenna mast | MBS-500 | N/A | No Cal. Req'd | No Cal. Req'd |
| PROGRAMMING CONTROLLER | 3000 | MF780208272 | No Cal. Req'd | No Cal. Req'd |
| POWER SUPPLY (0-60V/0-35A) | 6674A | 3126A00133 | 11-Nov-19 | 11-Nov-21 |
| SIGNAL ANALYZER | FSV40 | 101432 | 27-Jul-19 | 27-Jul-20 |
| DATA LOGGER | SDL500 | A.016776 | 05-Apr-19 | 05-Apr-20 |
| BILOG ANTENNA | CBL6112D | 30991 | 05-Aug-2019 | 5-Aug-20 |
| DRG HORN FREQ. | SAS-571 | 1027 | 22-Apr-19 | 22-Apr-21 |
| PREAMPLIFIER | PAM-0118 | 270 | 24-May-19 | 24-May-22 |
| MICROWAVE GENERATOR | SMP04 | 100127 | 21-Mar-19 | 21-Mar-20 |
| DRG HORN FREQ. | SAS-571 | 1143 | 14-Feb-19 | 14-Feb-21 |
| BILOG ANTENNA | CBL6112B | 2964 | 16-Feb-18 | 16-Feb-20 |
| LOOP ANTENNA | 6502 | 00208416 | 5-Sep-19 | 5-Sep-20 |
| Test Software | EMC_FCC_IC_Bluetooth_RE_Test | | | |
| Version | EMC_FCC_RE_v1.6.1 | | | |

5.0. Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Environmental Conditions |
|--------------------|-------------------|----------------|-----------------------|-----------------|--------------------------|
| Test Mode | 0 to 78 | 39 | FHSS | GFSK | 22.8°C, 69.9%RH |

Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Environmental Conditions |
|--------------------|-------------------|----------------|-----------------------|-----------------|--------------------------|
| Test Mode | 0 to 78 | 39 | FHSS | GFSK | 22.8°C, 69.9%RH |

Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Environmental Conditions |
|--------------------|-------------------|----------------|-----------------------|-----------------|--------------------------|
| Application Mode | 0 to 78 | AUTO | FHSS | AUTO | Not Applicable |

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Technology | Modulation Type | Environmental Conditions |
|--------------------|-------------------|----------------|-----------------------|------------------------|--------------------------|
| Test Mode | 0 to 78 | 0,39,78 | FHSS | GFSK, Pi/4 DQPSK,8DPSK | Not Applicable |

6.0. Transmitter Test Parameters

6.1. Radiated Emission within restricted Bands

6.1.1. Test Setup

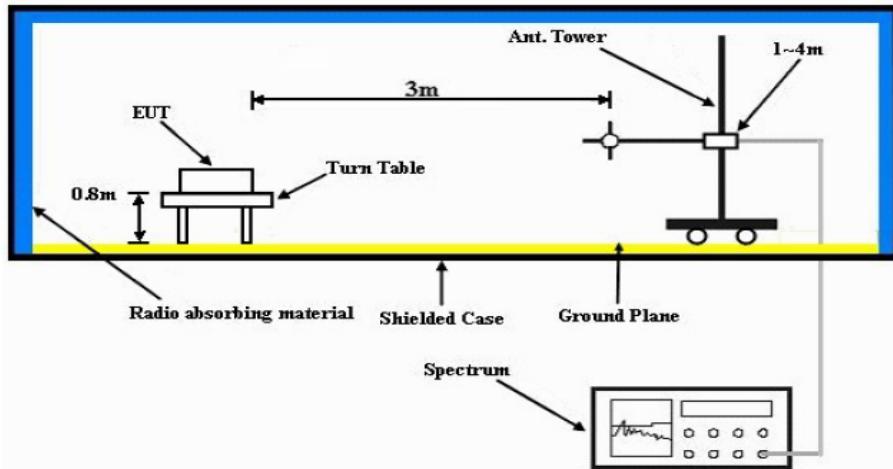

- a. The EUT is placed on the top of a rotating table 0.8m above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- c. The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- c. All modes of operation were investigated and the worst-case emissions are reported.

6.1.2. Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |

NOTE:

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.1.3. Test Data:

Motorola Solutions.

FCC ID: AZ489FT7085, IC ID: NA

Test: Bluetooth SAC Transmitter Radiated Emission
Model#: H98SDH9PW7BN **S/N: 756TVZ0040** **EMC SR ID#: 03878-EMC-00063**
Battery: PMNN4494A **Accessory: FAF5260A**
Test Channel: Mid **Test Frequency: 2441.0000 MHz** **Test Standard: ANSI C63.10-2013**
Worst Case Plane: X-Plane (GFSK)

Radiated Emission (Mid Channel) tabular data

| Remarks: | Marginal Result | Fail Result |
|-------------|-----------------|-------------|
| Pass Result | | |

Temperature (degC): 22.8
Test Performed by: Azil, Faris & Aiman
System MU: 4.03dB


Humidity (%): 69.9
Test Date: Thu, Jan 09, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c),** emissions attenuated more than 20 dB below the permissible limit
are not reported.


Motorola Solutions.

FCC ID: AZ489FT7085, IC ID: NA

VERTICAL, QPK

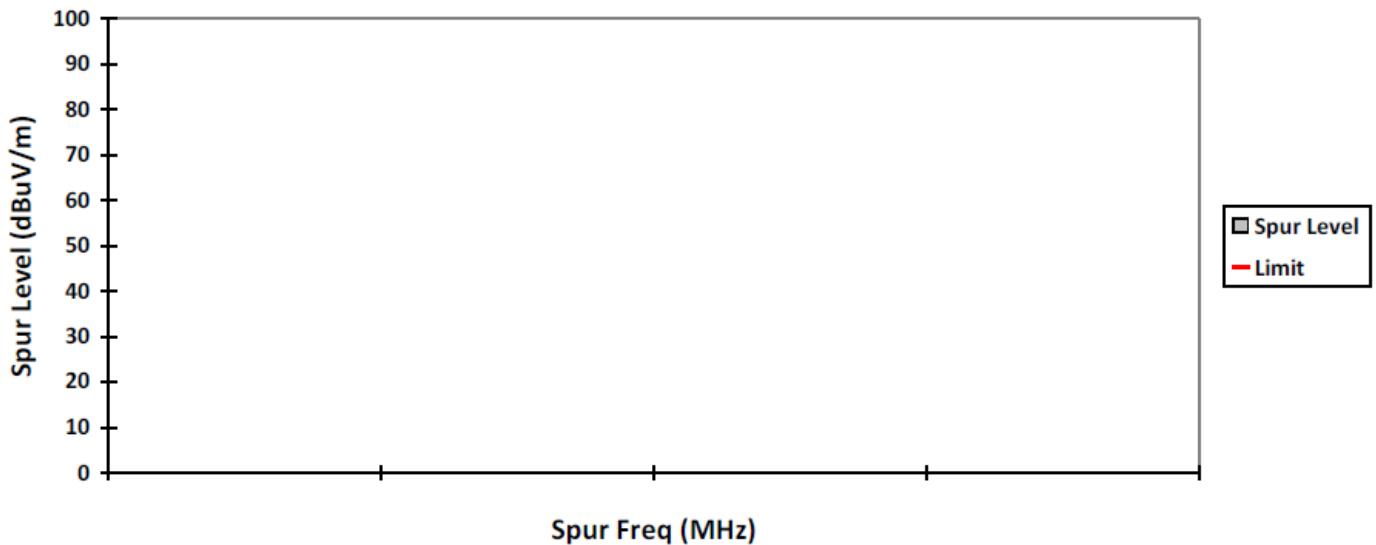

HORIZONTAL, QPK

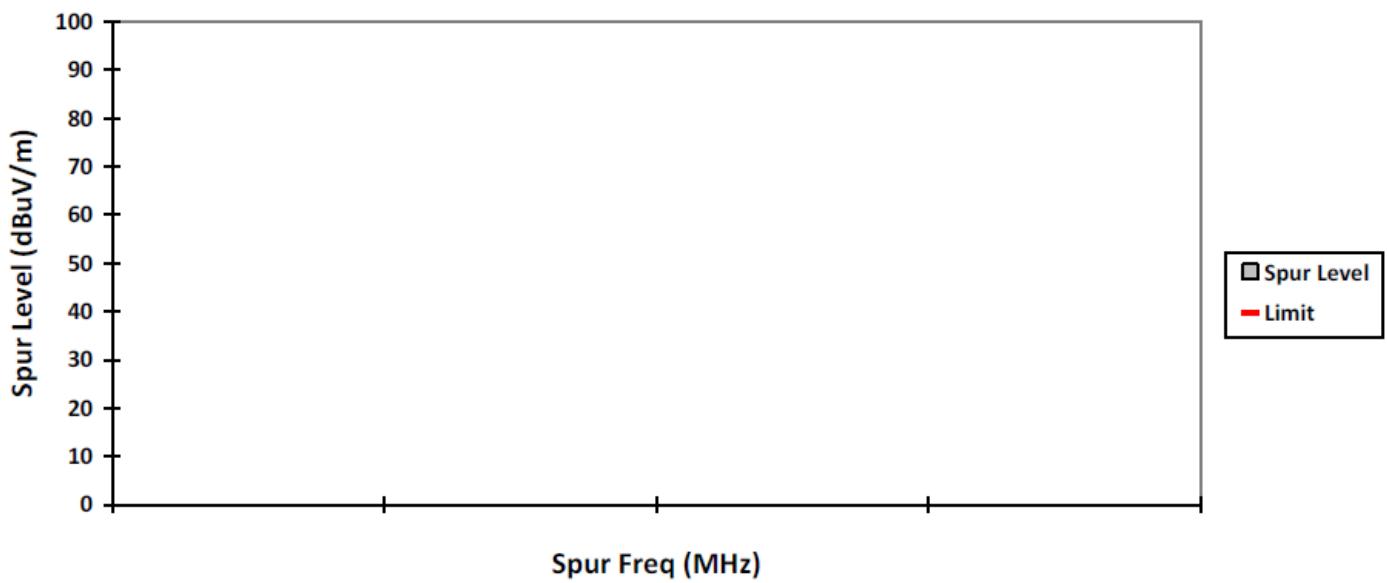


Motorola Solutions.

FCC ID: AZ489FT7085, IC ID: NA

VERTICAL, PK




HORIZONTAL, PK

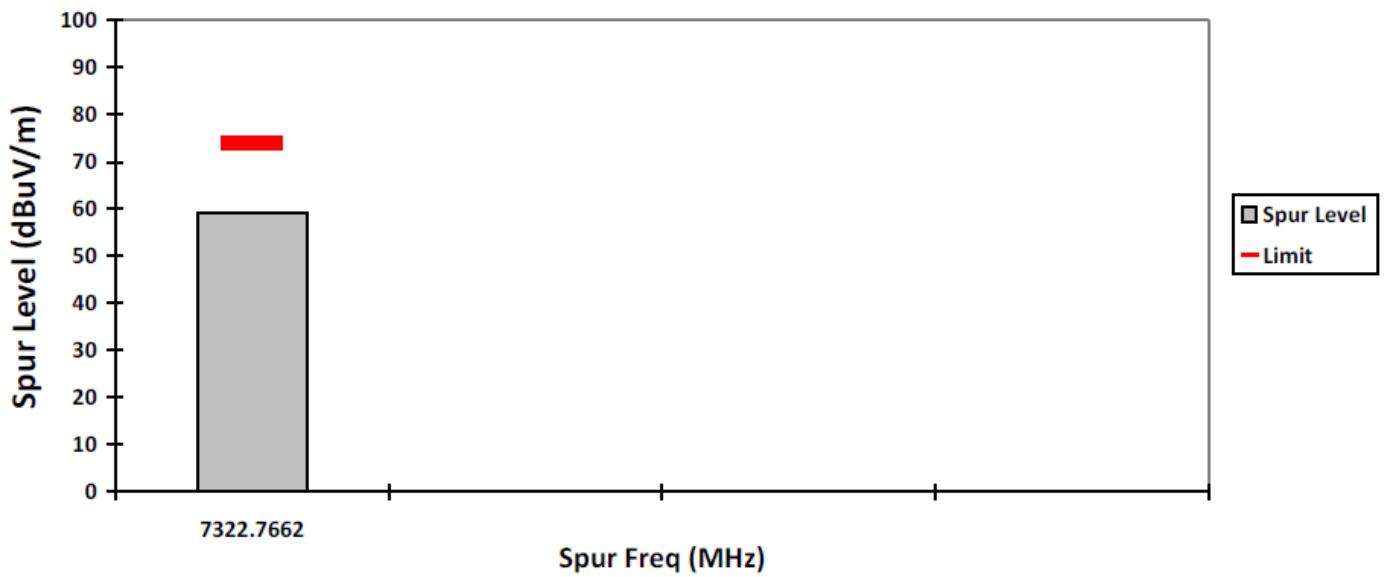


Motorola Solutions.

FCC ID: AZ489FT7085, IC ID: NA

VERTICAL, AV

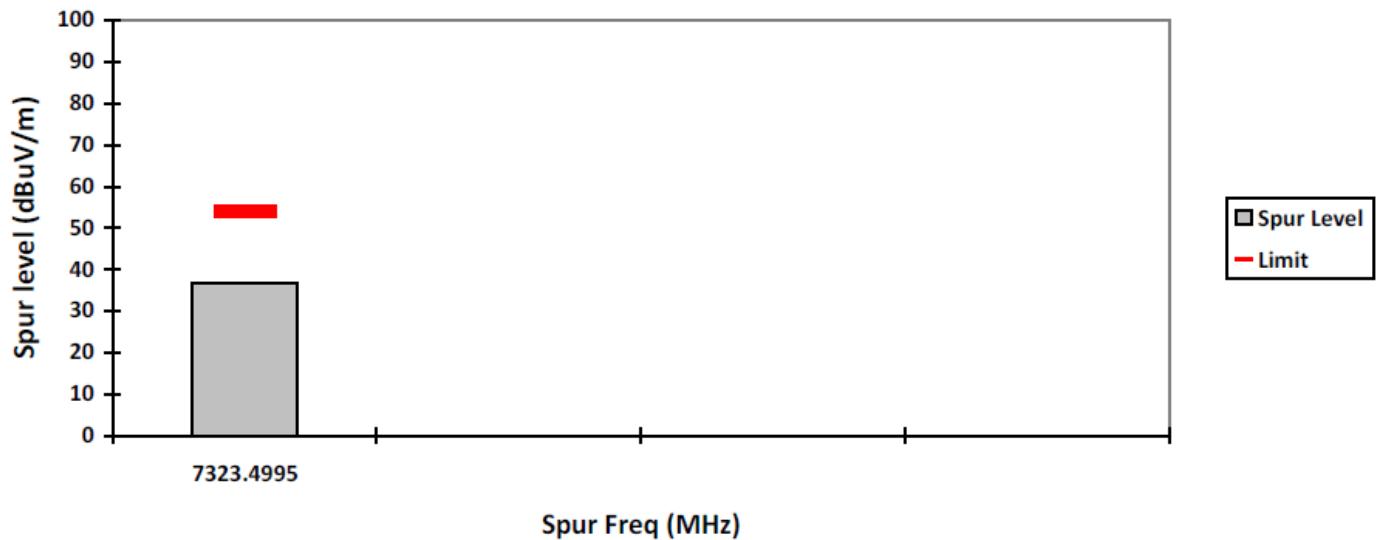

HORIZONTAL, AV

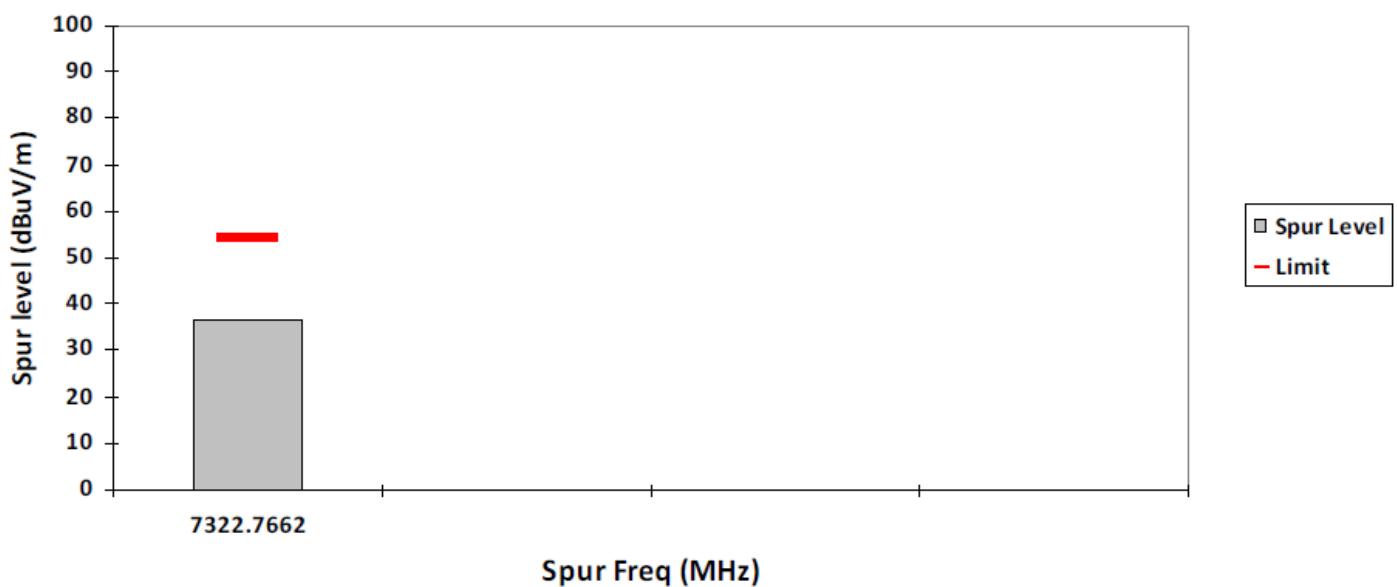

NOTE:

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)

Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop = $1 / 133.33$ hops/second = 7.5 ms

Time to cycle through all channels = 7.5×20 channels = 150 ms


Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)

Worst case dwell time = 7.5 ms

Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

6.2. AC Powerline Conducted Emission

6.2.1. Test Setup

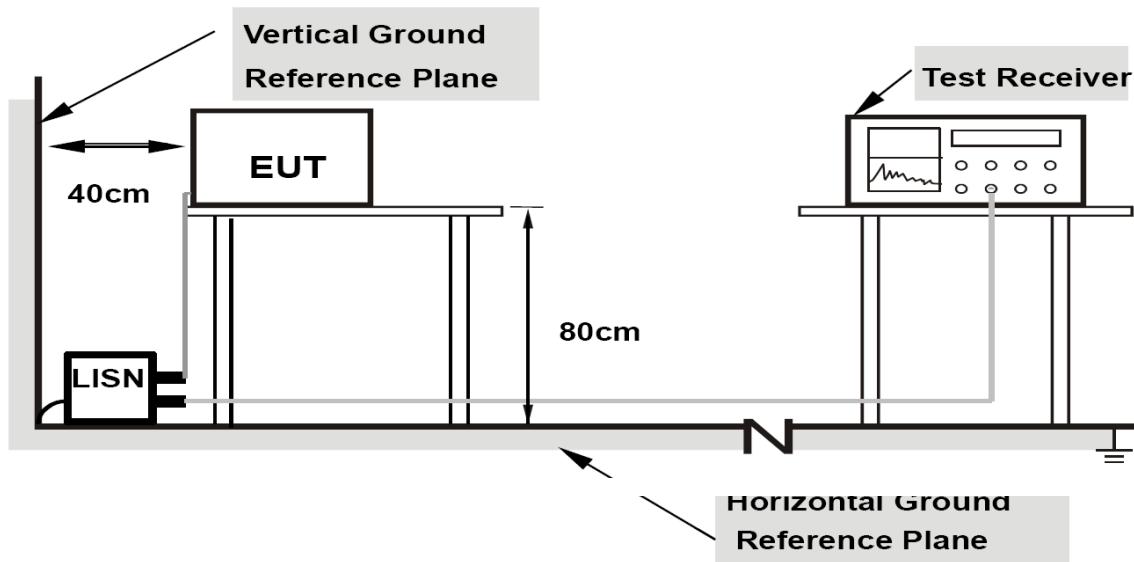

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.2.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

| Limits for conducted disturbance at the mains ports of class A ITE | | |
|--|------------------|---------|
| Frequency range MHz | Limits dB(µV) | |
| | Quasi-peak | Average |
| 0,15 to 0,50 | 79 | 66 |
| 0,50 to 30 | 73 | 60 |

NOTE The lower limit shall apply at the transition frequency.

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

| Limits for conducted disturbance at the mains ports of class B ITE | | |
|--|------------------|----------|
| Frequency range MHz | Limits dB(µV) | |
| | Quasi-peak | Average |
| 0,15 to 0,50 | 66 to 56 | 56 to 46 |
| 0,50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

NOTE 1 The lower limit shall apply at the transition frequencies.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.2.3. Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode

END OF TEST REPORT