

**MOTOROLA SOLUTIONS****DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 2 of 2****Motorola Solutions Inc.****EME Test Laboratory**

Motorola Solutions Malaysia Sdn Bhd (Innoplex)
 Plot 2A, Medan Bayan Lepas
 Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.

Date of Report: 06/22/2017**Report Revision: B**

Responsible Engineer: Veeramani Veerapan
Report Author: Veeramani Veerapan
Date/s Tested: 5/19/2017 – 6/5/2017; ; 6/19/2017-6/20/2017
Manufacturer: Motorola Solutions Inc.
DUT Description: Handheld Portable – 136-174MHz, 3W, Limited Keypad, BT/ WiFi
Test TX mode(s): CW (PTT), Bluetooth, WLAN 802.11 b/g/n
Max. Power output: 2.4 W (LMR CW 136-174MHz band), 3.3 W (LMR TDMA 136-174MHz band), 9.2 mW (Bluetooth), 9.2 mW (Bluetooth LE), 25.1 mW (WLAN 802.11 b), 9.2 mW (WLAN 802.11g), 9.2 mW (WLAN 802.11n)
Nominal Power: 2.0 W (LMR CW 136-174MHz band), 3.0 W (LMR TDMA 136-174MHz band), 6.3 mW (Bluetooth), 6.3 mW (Bluetooth LE), 17.8 mW (WLAN 802.11 b), 6.3 mW (WLAN 802.11g), 6.3 mW (WLAN 802.11n)
Tx Frequency Bands: LMR 136-174MHz; Bluetooth 2.402-2.480 GHz; WLAN 802.11 b/g/n 2.412-2.462 GHz
Signaling type: FM (LMR), FHSS (Bluetooth), 802.11 b/g/n (WLAN)
Model(s) Tested: PMUD3422A (AAH88JCD9SA2AN)
Model(s) Certified: PMUD3422A (AAH88JCD9SA2AN)
Serial Number(s): 130TTK0285, 130TTK0272
Classification: Occupational/Controlled
FCC ID: AZ489FT7107; LMR 150.8-173.4 MHz, Bluetooth 2.402-2.480 GHz, WLAN 802.11 b/g/n 2.412-2.462 GHz
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.
IC: 109U-89FT7107; This report contains results that are immaterial for IC equipment approval, which are clearly identified.
ISED Test Site Registration: 109AK

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of OET Bulletin 65. The 10 grams result is not applicable to FCC filing. The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz), Health Physics 74, 494-522 RF Exposure limits of 10 W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Tiong Nguk Ing
Deputy Technical Manager
Approval Date: 6/22/2017

Appendix C

Dipole Calibration Certificates

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Motorola EME**

Certificate No: **CLA150-4005_Jul15**

CALIBRATION CERTIFICATE

Object **CLA150 - SN: 4005**

Calibration procedure(s) **QA CAL-15.v8**
 Calibration procedure for system validation sources below 700 MHz

Calibration date: **July 08, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe EX3DV4	SN: 3877	09-Jan-15 (No. EX3-3877_Jan15)	Jan-16
DAE4	SN: 654	22-Jun-15 (No. DAE4-654_Jun15)	Jun-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8548C	US3642U01700	04-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: July 15, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CLA150-4005_Jul15

Page 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
EUT Positioning	Touch Position	
Zoom Scan Resolution	$dx, dy = 4.0$ mm, $dz = 1.4$ mm	Graded Ratio = 1.4 (Z direction)
Frequency	150 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	52.3	0.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	50.2 ± 6 %	0.77 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	1 W input power	3.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	3.83 W/kg ± 18.4 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	1 W input power	2.57 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	2.53 W/kg ± 18.0 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	61.9	0.80 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	60.1 ± 6 %	0.84 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	1 W input power	4.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	3.88 W/kg ± 18.4 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	1 W input power	2.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	2.57 W/kg ± 18.0 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL at 149.5 MHz**

Impedance, transformed to feed point	35.3 Ω - 5.4 j Ω
Return Loss	- 14.8 dB

Antenna Parameters with Head TSL at 150.0 MHz

Impedance, transformed to feed point	41.6 Ω - 2.1 j Ω
Return Loss	- 20.5 dB

Antenna Parameters with Head TSL at 150.5 MHz

Impedance, transformed to feed point	49.8 Ω + 0.8 j Ω
Return Loss	- 33.7 dB

Antenna Parameters with Body TSL at 149.5 MHz

Impedance, transformed to feed point	36.8 Ω - 7.0 j Ω
Return Loss	- 15.3 dB

Antenna Parameters with Body TSL at 150.0 MHz

Impedance, transformed to feed point	43.3 Ω - 4.2 j Ω
Return Loss	- 21.4 dB

Antenna Parameters with Body TSL at 150.5 MHz

Impedance, transformed to feed point	51.3 Ω - 2.0 j Ω
Return Loss	- 32.5 dB

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 23, 2013

DASY5 Validation Report for Head TSL

Date: 08.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: CLA150; Type: CLA150; Serial: CLA150 - SN: 4005

Communication System: UID 0 - CW; Frequency: 150 MHz

Medium parameters used: $f = 150$ MHz; $\sigma = 0.768$ S/m; $\epsilon_r = 50.203$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(12, 12, 12); Calibrated: 09.01.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 22.06.2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

CLA Calibration for HSL-LF Tissue/CLA150, touch configuration, Pin=1W/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.53 W/kg

CLA Calibration for HSL-LF Tissue/CLA150, touch configuration, Pin=1W/Zoom Scan, dist=1.4mm (8x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 77.52 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 7.54 W/kg

SAR(1 g) = 3.9 W/kg; SAR(10 g) = 2.57 W/kg

Maximum value of SAR (measured) = 5.48 W/kg



Impedance Measurement Plot for Head TSL

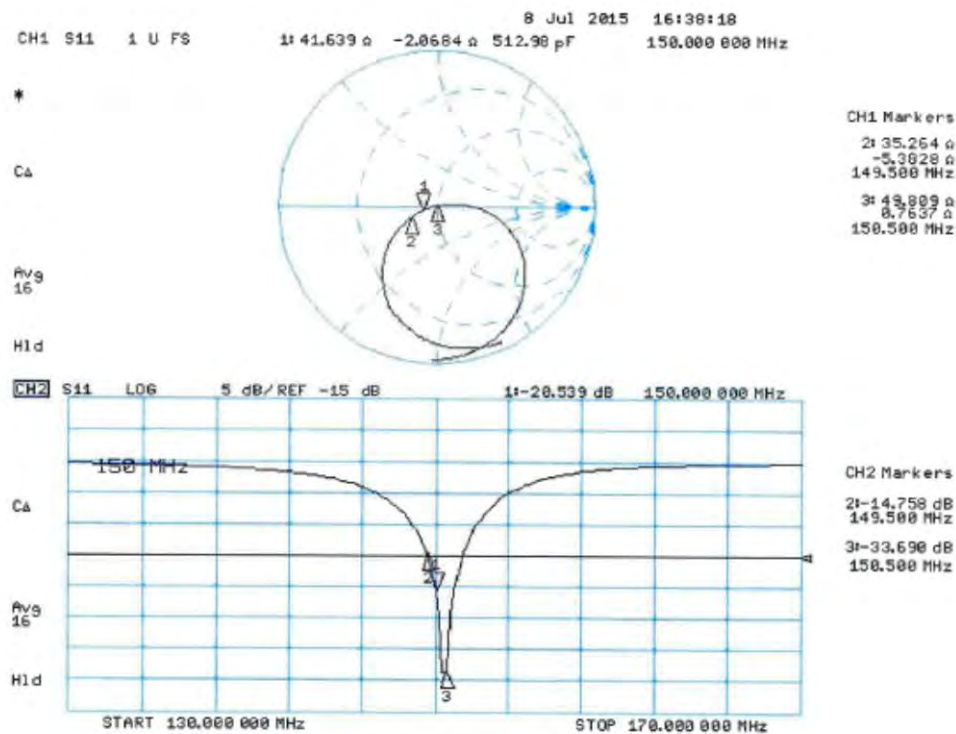

DASY5 Validation Report for Body TSL

Date: 08.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: CLA150; Type: CLA150; Serial: CLA150 - SN: 4005

Communication System: UID 0 - CW; Frequency: 150 MHz

Medium parameters used: $f = 150$ MHz; $\sigma = 0.84$ S/m; $\epsilon_r = 60.08$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(11.42, 11.42, 11.42); Calibrated: 09.01.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 22.06.2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

CLA Calibration for MSL-LF Tissue/CLA150, touch configuration, Pin=1W/Area Scan**(81x81x1):** Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 5.10 W/kg


CLA Calibration for MSL-LF Tissue/CLA150, touch configuration, Pin=1W/Zoom Scan,**dist=1.4mm (8x9x7)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 77.99 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 7.76 W/kg

SAR(1 g) = 4.06 W/kg; SAR(10 g) = 2.68 W/kg

Maximum value of SAR (measured) = 5.73 W/kg

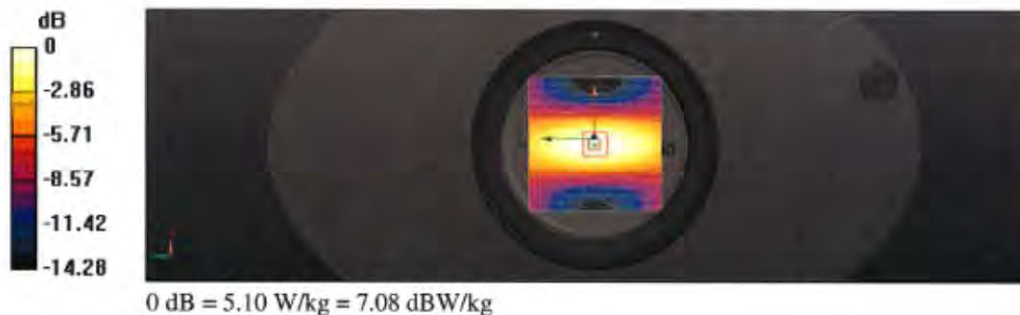

Impedance Measurement Plot for Body TSL

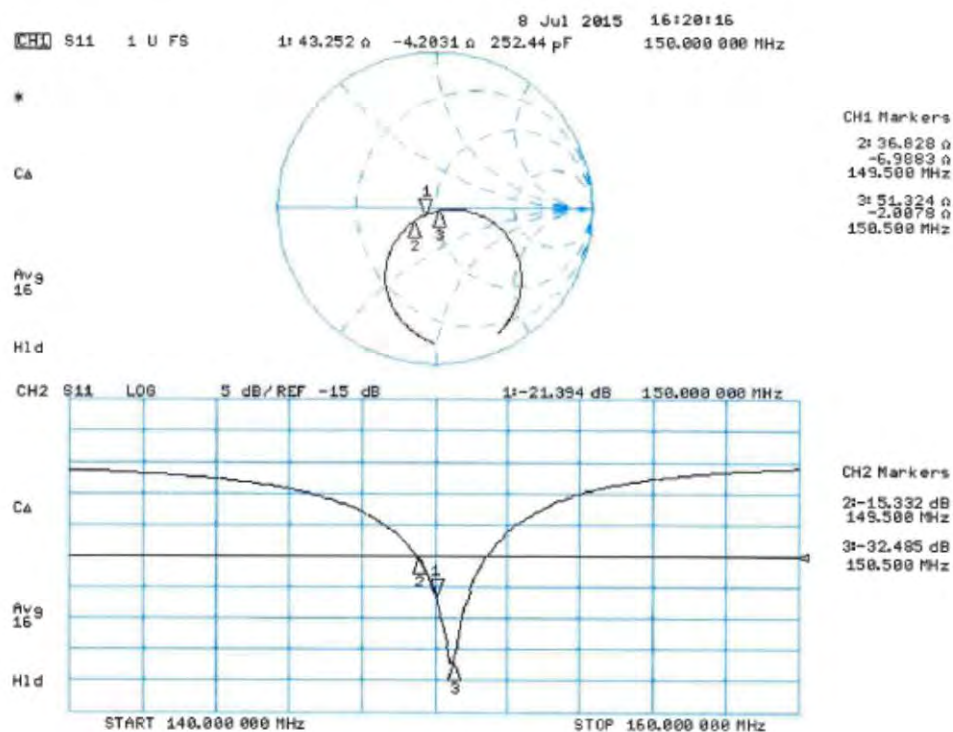

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Motorola Solutions MY**

Certificate No: **D2450V2-782_Feb17**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:782**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **February 15, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
DAE4	SN: 601	04-Jan-17 (No. DAE4-601_Jan17)	Jan-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

	Name	Function	Signature
Calibrated by:	Johannes Kurikka	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.5 $\pm$ 6 %	1.87 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.7 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.3 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.6 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.94 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.5 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.9 Ω + 4.0 j Ω
Return Loss	- 27.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.3 Ω + 5.7 j Ω
Return Loss	- 24.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.151 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 06, 2005

DASY5 Validation Report for Head TSL

Date: 15.02.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:782

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.0 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 28.4 W/kg


SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.3 W/kg

Maximum value of SAR (measured) = 22.8 W/kg

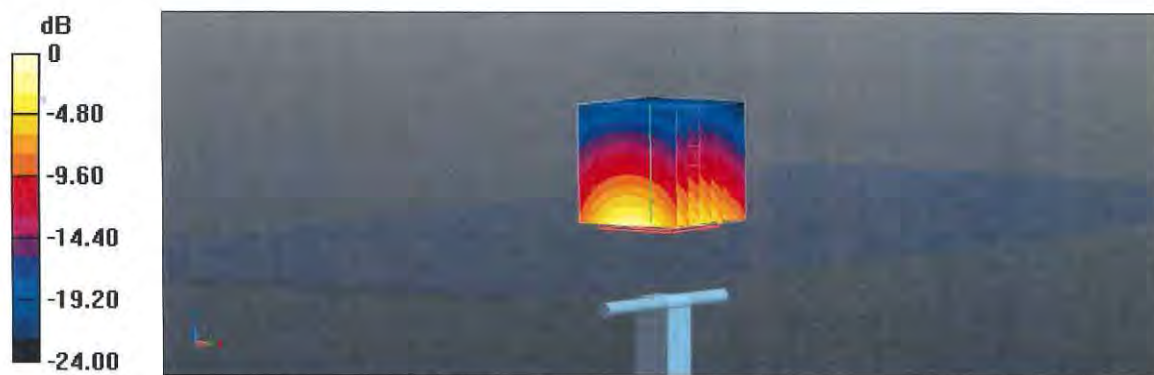

0 dB = 22.8 W/kg = 13.58 dBW/kg

Impedance Measurement Plot for Head TSL

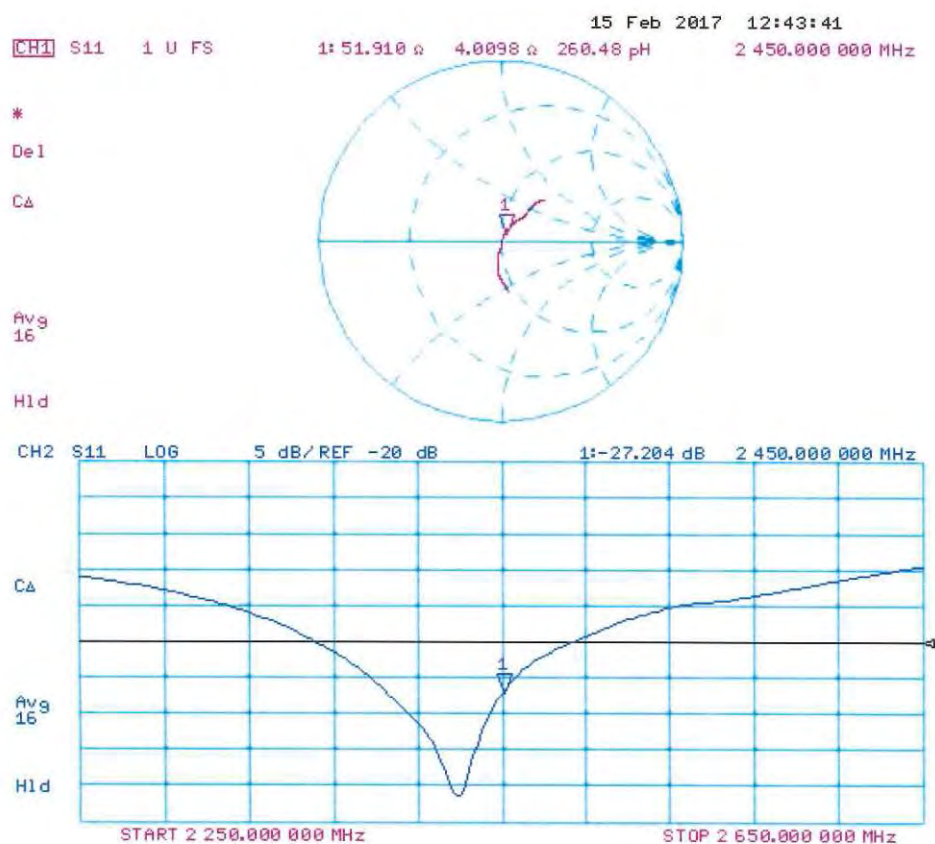

DASY5 Validation Report for Body TSL

Date: 15.02.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:782

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 26.6 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.94 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

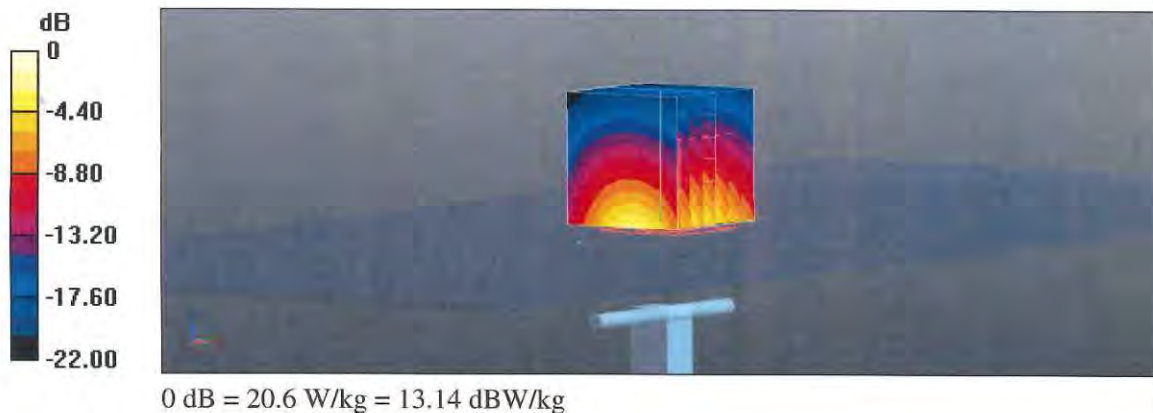

Impedance Measurement Plot for Body TSL

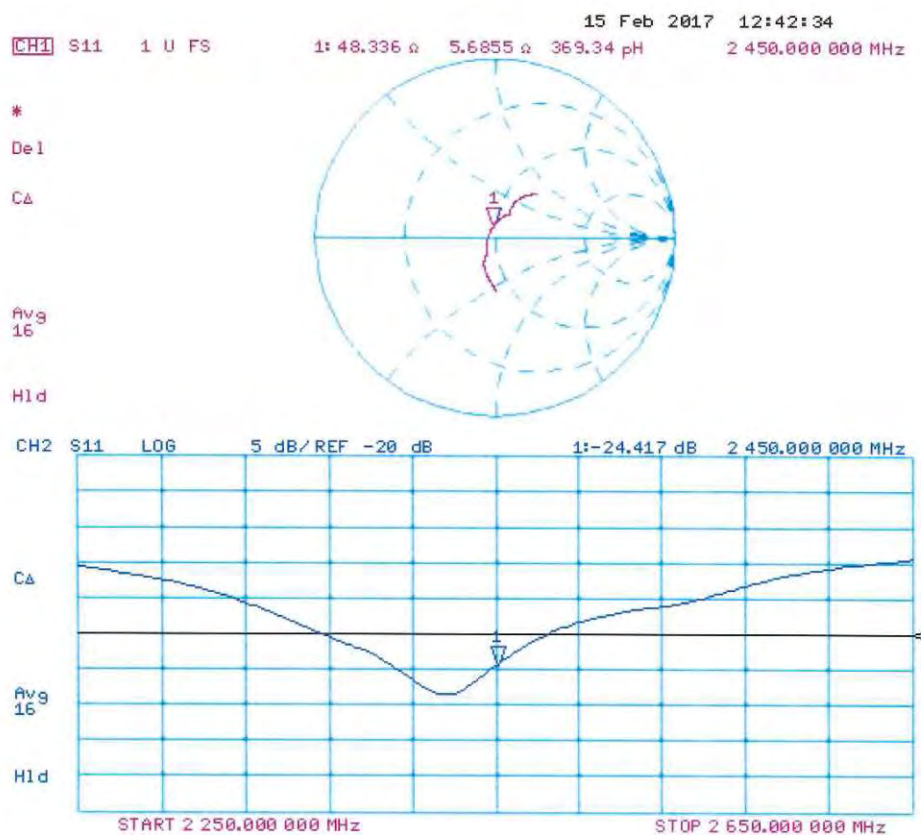

Dipole Data

As stated in KDB 865664, for dipole CLA150 (serial number 4005) exceed annual calibration, the test laboratory must ensure that the required supporting information and documentation are included in report to qualify for extended calibration interval.

The table below includes dipoles impedance and return loss measurement data measured by Motorola Solutions' EME lab. The results meet requirements stated in KDB 865664.

Dipole CLA150 (SN 4005)	Head			Body		
	Impedance		Return Loss	Impedance		Return Loss
Date Measured	real Ω	imag $j\Omega$	dB	real Ω	imag $j\Omega$	dB
07/28/2015	42.92	-2.52	-21.84	44.09	-4.76	-21.89
06/28/2016	44.10	-2.80	-20.95	45.21	-2.97	-21.40

Appendix D

System Verification Check Scans

Motorola Solutions, Inc. EME Laboratory

Date/Time: 5/20/2017 6:48:11 AM

Robot#: DASY5-PG-1 | Run#: FD-SYSP-150B-170520-01
Dipole Model#: CLA-150
Phantom#: ELI4 1011
Tissue Temp: 20.9 (C)
Serial#: 4005
Test Freq: 150.0000 (MHz)
Start Power: 1000 (mW)
Rotation (1D): 0.160 dB
Adjusted SAR (1W): 4.03 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 150$ MHz; $\sigma = 0.79$ S/m; $\epsilon_r = 59.3$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN3735, Frequency: 150 MHz, ConvF(11.23, 11.23, 11.23); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (81x81x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 84.50 V/m; Power Drift = 0.01 dB

Fast SAR: SAR(1 g) = 4.71 W/kg; SAR(10 g) = 3.35 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 5.70 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 84.50 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 6.85 W/kg

SAR(1 g) = 4.03 W/kg; SAR(10 g) = 2.69 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.67 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm

Maximum value of SAR (measured) = 5.63 W/kg

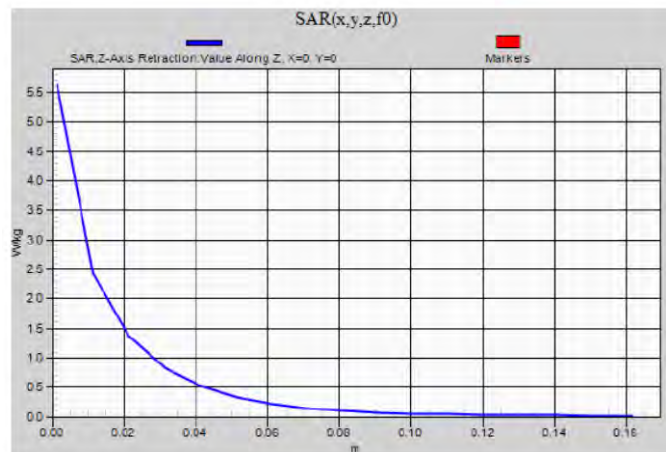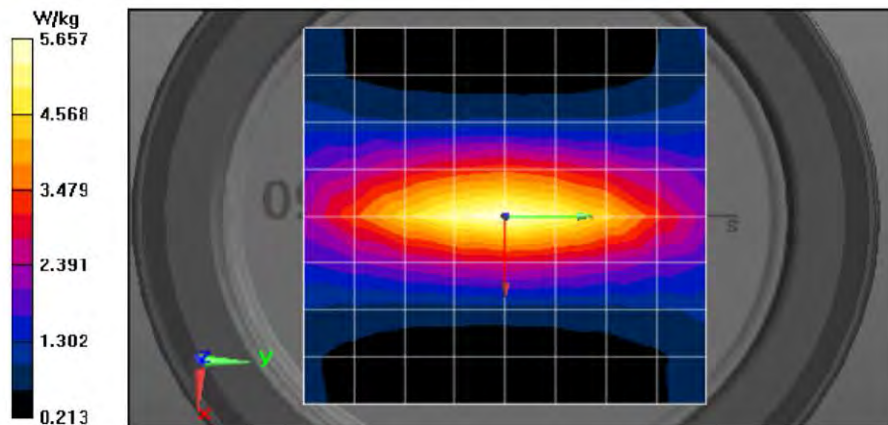

Motorola Solutions, Inc. EME Laboratory

Date/Time: 5/21/2017 7:46:31 AM

Robot#: DASY5-PG-1 | Run#: FD-SYSP-150B-170521-03
 Dipole Model#: CLA-150
 Phantom#: ELI4 1011
 Tissue Temp: 20.7 (C)
 Serial#: 4005
 Test Freq: 150.0000 (MHz)
 Start Power: 1000 (mW)
 Rotation (1D): 0.160 dB
 Adjusted SAR (1W): 4.09 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 150$ MHz; $\sigma = 0.77$ S/m; $\epsilon_r = 59.7$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN3735, Frequency: 150 MHz, ConvF(11.23, 11.23, 11.23); Calibrated: 3/10/2017
 Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (81x81x1):



Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Reference Value = 84.79 V/m; Power Drift = -0.01 dB
 Fast SAR: SAR(1 g) = 4.77 W/kg; SAR(10 g) = 3.39 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 5.65 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 84.79 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 6.76 W/kg
 SAR(1 g) = 4.09 W/kg; SAR(10 g) = 2.73 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 5.61 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 5.57 W/kg

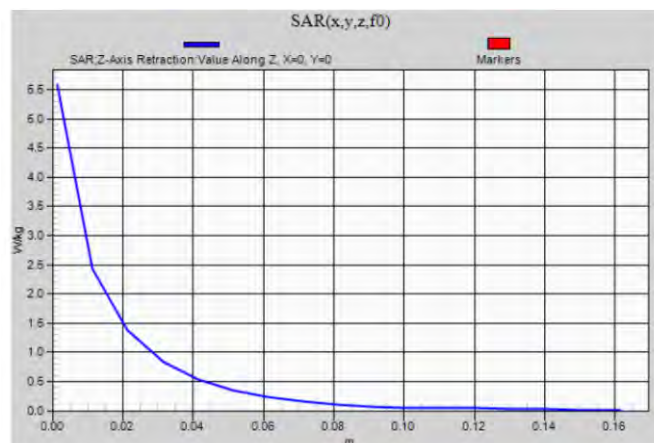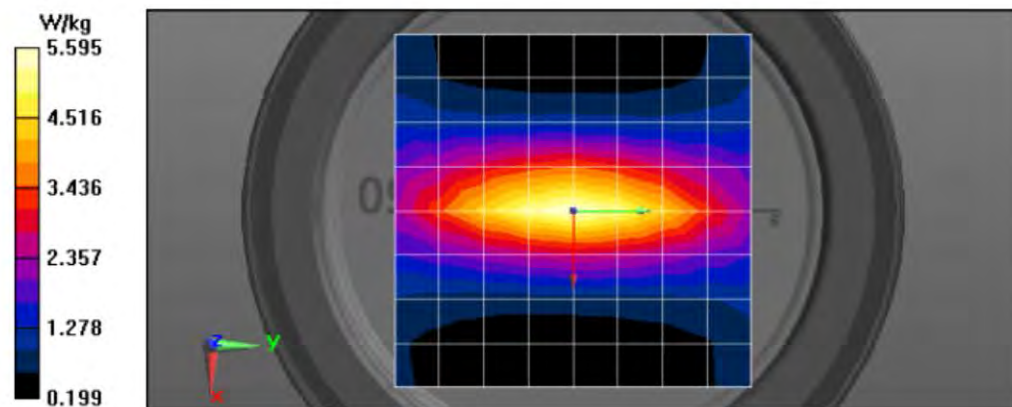

Motorola Solutions, Inc. EME Laboratory

Date/Time: 5/25/2017 3:04:58 PM

Robot#: DASY5-PG-1 | Run#: FD-SYSP-150B-170525-07
Dipole Model#: CLA-150
Phantom#: ELI4 1050
Tissue Temp: 20.1 (C)
Serial#: 4005
Test Freq: 150.0000 (MHz)
Start Power: 1000 (mW)
Rotation (1D): 0.150 dB
Adjusted SAR (1W): 4.16 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 150$ MHz; $\sigma = 0.84$ S/m; $\epsilon_r = 58.9$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN3735, , Frequency: 150 MHz, ConvF(11.23, 11.23, 11.23); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (81x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 85.17 V/m; Power Drift = -0.01 dB

Fast SAR: SAR(1 g) = 4.87 W/kg; SAR(10 g) = 3.47 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 6.17 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 85.17 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 7.42 W/kg



SAR(1 g) = 4.16 W/kg; SAR(10 g) = 2.77 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.12 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 6.11 W/kg

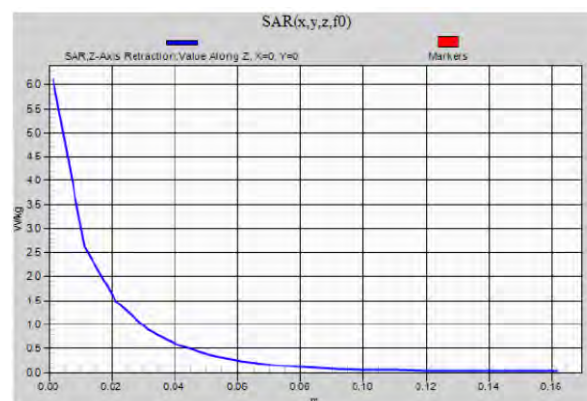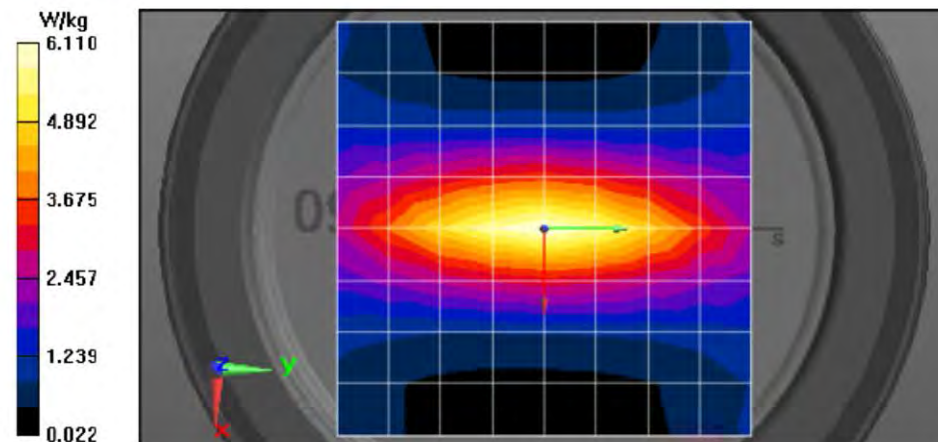

Motorola Solutions, Inc. EME Laboratory

Date/Time: 5/21/2017 12:13:07 PM

Robot#: DASY5-PG-1 | Run#: FD-SYSP-150H-170521-10
Dipole Model#: CLA-150
Phantom#: ELI4 1050
Tissue Temp: 21.5 (C)
Serial#: 4005
Test Freq: 150.0000 (MHz)
Start Power: 1000 (mW)
Rotation (1D): 0.150 dB
Adjusted SAR (1W): 4.06 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 150$ MHz; $\sigma = 0.73$ S/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN3735, , Frequency: 150 MHz, ConvF(11.79, 11.79, 11.79); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (81x81x1):



Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Reference Value = 86.37 V/m; Power Drift = -0.00 dB
Fast SAR: SAR(1 g) = 4.72 W/kg; SAR(10 g) = 3.37 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 5.51 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 86.37 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 6.70 W/kg
SAR(1 g) = 4.06 W/kg; SAR(10 g) = 2.69 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 5.50 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm

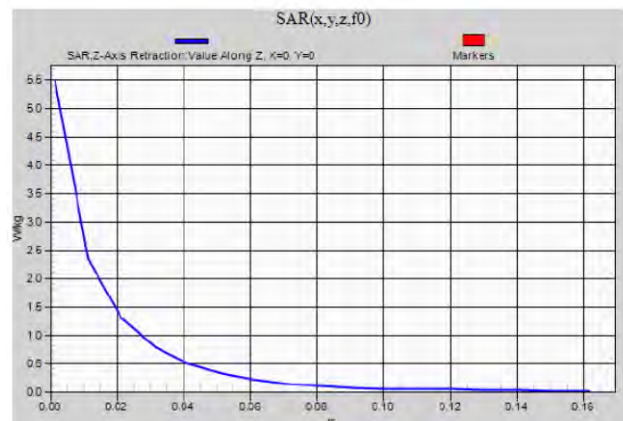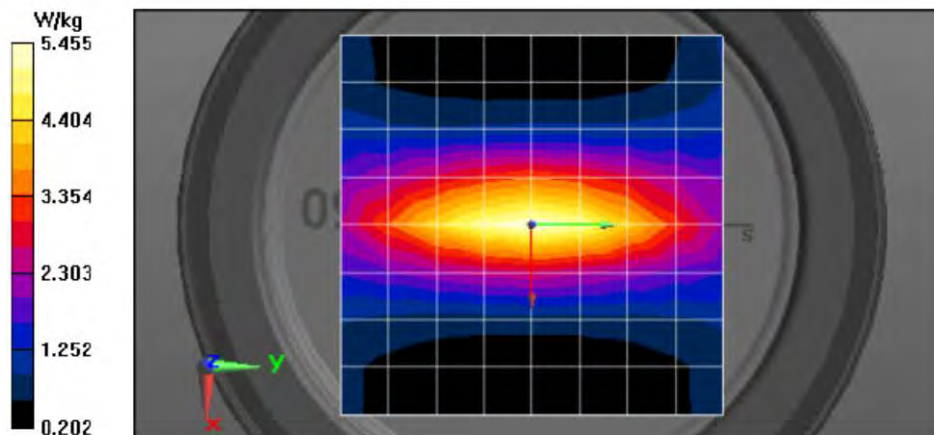

Motorola Solutions, Inc. EME Laboratory

Date/Time: 5/22/2017 9:19:32 AM

Robot#: DASY5-PG-1 | Run#: FD-SYSP-150H-170522-01
Dipole Model#: CLA-150
Phantom#: ELI4 1050
Tissue Temp: 20.9 (C)
Serial#: 4005
Test Freq: 150.0000 (MHz)
Start Power: 1000 (mW)
Rotation (1D): 0.150 dB
Adjusted SAR (1W): 4.11 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 150$ MHz; $\sigma = 0.73$ S/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN3735, , Frequency: 150 MHz, ConvF(11.79, 11.79); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (81x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 87.33 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 4.79 W/kg; SAR(10 g) = 3.43 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 5.60 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 87.33 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 6.76 W/kg



SAR(1 g) = 4.11 W/kg; SAR(10 g) = 2.74 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.60 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 5.58 W/kg

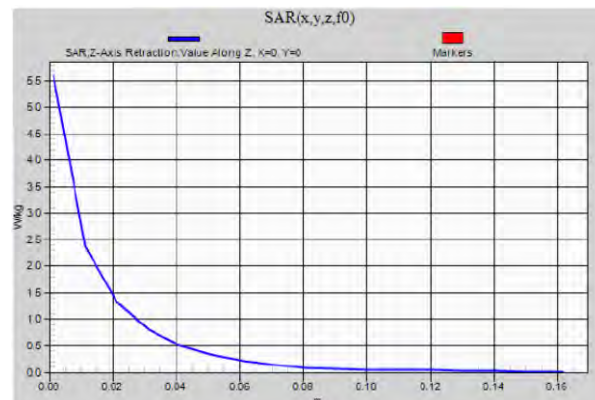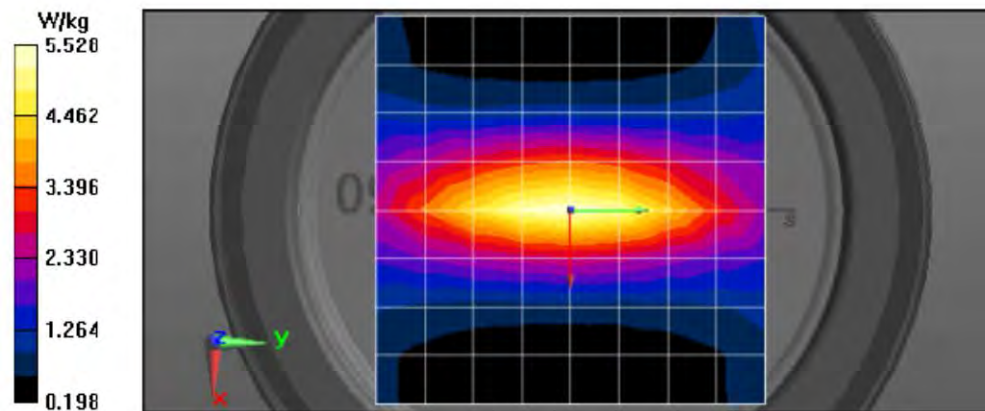

Motorola Solutions, Inc. EME Laboratory

Date/Time: 6/19/2017 1:07:01 PM

Robot#: DASY5-PG-4 | Run#: FD(AM)-SYSP-150B-170619-07
Dipole Model#: CLA150
Phantom#: ELI4 1011
Tissue Temp: 20.7 (C)
Serial#: 4005
Test Freq: 150 (MHz)
Start Power: 1000 (mW)
Rotation (1D): 0.032 dB
Adjusted SAR (1W): 4.04 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 150$ MHz; $\sigma = 0.78$ S/m; $\epsilon_r = 59$; $\rho = 1000$ kg/m³
Probe: ES3DV3 - SN3196, Frequency: 150 MHz, ConvF(7.06, 7.06, 7.06); Calibrated: 5/17/2017
Electronics: DAE4 Sn684, Calibrated: 5/12/2017

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (81x81x1):



Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Reference Value = 77.94 V/m; Power Drift = 0.00 dB
Fast SAR: SAR(1 g) = 4.24 W/kg; SAR(10 g) = 3.04 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 4.71 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 77.94 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 6.78 W/kg
SAR(1 g) = 4.04 W/kg; SAR(10 g) = 2.66 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 4.69 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm
Maximum value of SAR (measured) = 4.70 W/kg

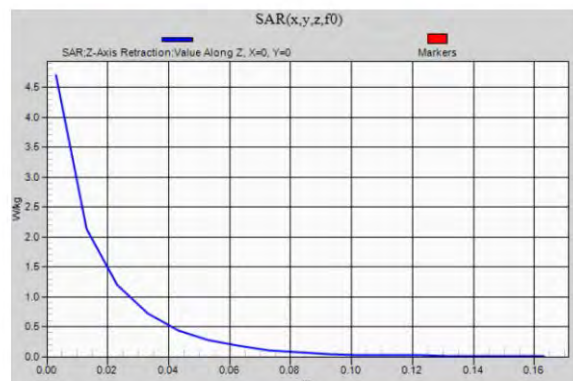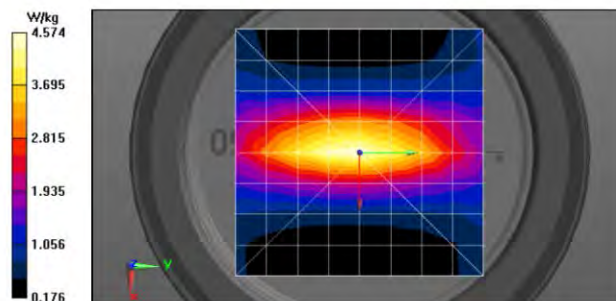

Motorola Solutions, Inc. EME Laboratory

Date/Time: 6/19/2017 5:39:10 PM

Robot#: DASY5-PG-4 | Run#: FD(AM)-SYSP-150H-170619-11
Dipole Model#: CLA150
Phantom#: ELI4 1011
Tissue Temp: 20.5 (C)
Serial#: 4005
Test Freq: 150 (MHz)
Start Power: 1000 (mW)
Rotation (1D): 0.035 dB
Adjusted SAR (1W): 3.96 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 150$ MHz; $\sigma = 0.73$ S/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
Probe: ES3DV3 - SN3196, Frequency: 150 MHz, ConvF(7.46, 7.46, 7.46); Calibrated: 5/17/2017
Electronics: DAE4 Sn684, Calibrated: 5/12/2017

Below 2 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (81x81x1):



Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Reference Value = 78.98 V/m; Power Drift = -0.01 dB
Fast SAR: SAR(1 g) = 4.14 W/kg; SAR(10 g) = 2.97 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 4.52 W/kg

Below 2 GHz-Rev.2/System Performance Check/0-Degree Cube (5x5x7)/Cube 0:

Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 78.98 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 6.59 W/kg
SAR(1 g) = 3.96 W/kg; SAR(10 g) = 2.57 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 4.52 W/kg

Below 2 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: $dx=20$ mm, $dy=20$ mm, $dz=10$ mm
Maximum value of SAR (measured) = 4.54 W/kg

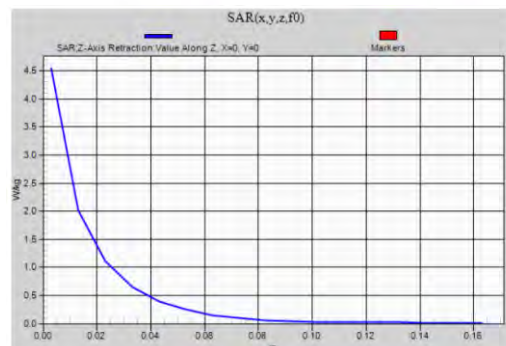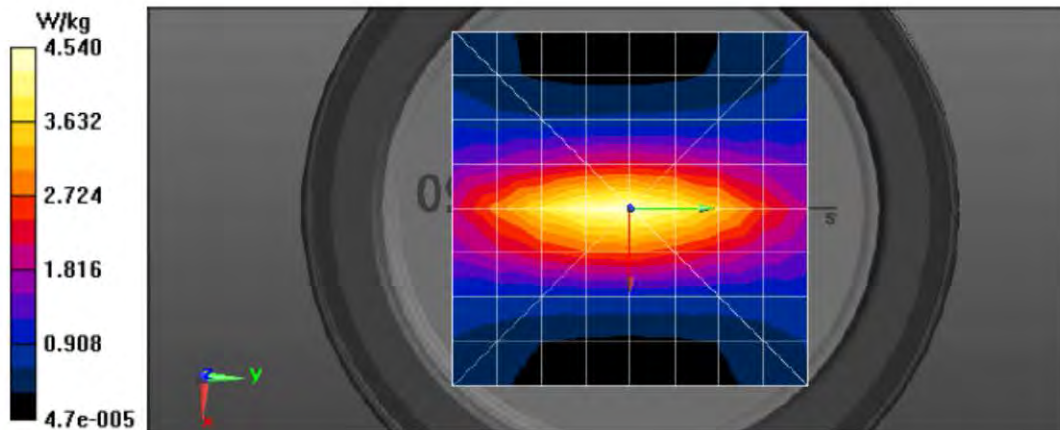

Motorola Solutions, Inc. EME Laboratory

Date/Time: 6/5/2017 10:30:00 AM

Robot#: DASY5-PG-1 | Run#: FD-SYSP-2450B-170605-03
Dipole Model#: D2450V2
Phantom#: TP 1168-3
Tissue Temp: 19.9 (C)
Serial#: 782
Test Freq: 2450.000 (MHz)
Start Power: 250 (mW)
Rotation (1D): 0.140 dB
Adjusted SAR (1W): 46.00 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN3735, , Frequency: 2450 MHz, ConvF(7.24, 7.24, 7.24); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x101x1): Interpolated

grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 95.81 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.42 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 18.5 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.81 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 23.4 W/kg



SAR(1 g) = 11.5 W/kg; SAR(10 g) = 5.48 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 17.8 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 17.9 W/kg

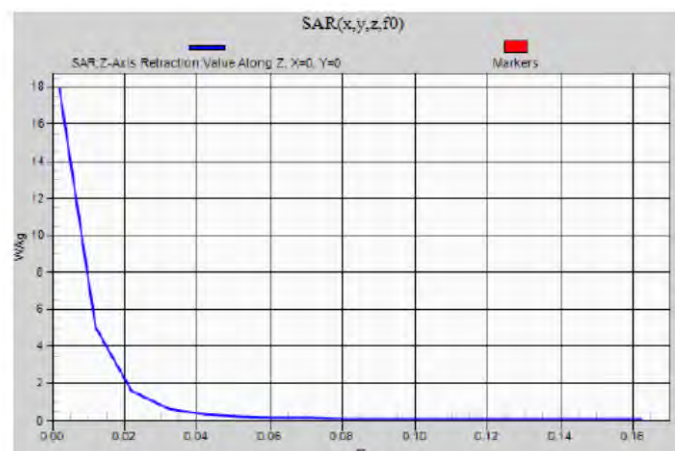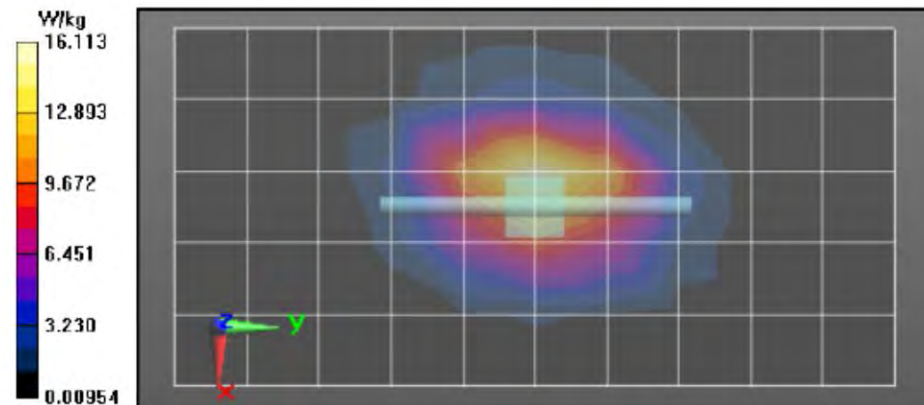

Motorola Solutions, Inc. EME Laboratory
Date/Time: 6/5/2017 7:40:00 AM

Robot#: DASY5-PG-1 | Run#: FD-SYSP-2450H-170605-01
 Dipole Model#: D2450V2
 Phantom#: TP1168-2
 Tissue Temp: 20.0 (C)
 Serial#: 782
 Test Freq: 2450.000 (MHz)
 Start Power: 250 (mW)
 Rotation (1D): 0.120 dB
 Adjusted SAR (1W): 51.20 mW/g (1g)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN3735, , Frequency: 2450 MHz, ConvF(7.08, 7.08, 7.08); Calibrated: 3/10/2017
 Electronics: DAE4 Sn729, Calibrated: 10/12/2016

2-3 GHz-Rev.2/System Performance Check/Dipole Area Scan 2 (51x101x1): Interpolated

grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 106.4 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.21 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 20.2 W/kg

2-3 GHz-Rev.2/System Performance Check/0-Degree Cube (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.4 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 25.9 W/kg



SAR(1 g) = 12.8 W/kg; SAR(10 g) = 6.07 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 19.5 W/kg

2-3 GHz-Rev.2/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 19.6 W/kg

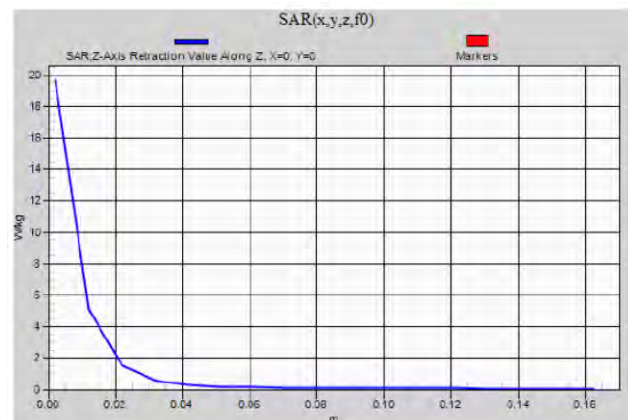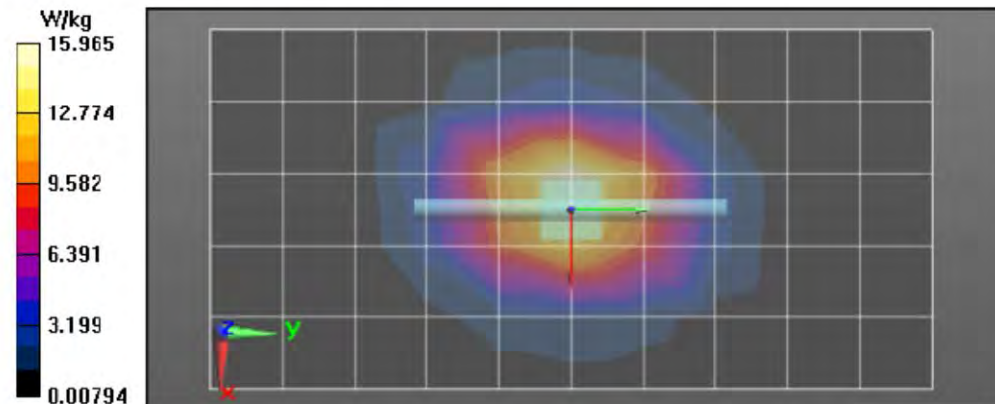

Appendix E

DUT Scans

Assessments at the Body with Body Worn PMLN7128A

Table 19

Motorola Solutions, Inc. EME Laboratory
Date/Time: 6/19/2017 2:38:04 PM

Robot#: DASY5-PG-4 | Run#: FD(AM)-AB-170619-08
Model#: PMUD3422A
Phantom#: ELI4 1011
Tissue Temp: 20.9 (C)
Serial#: 130TTK0285
Antenna: PMAD4145B
Test Freq: 150.8000 (MHz)
Battery: PMNN4468A
Carry Acc: PMLN7128A
Audio Acc: PMLN7156A
Start Power: 2.40 (W)


Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 151 \text{ MHz}$; $\sigma = 0.78 \text{ S/m}$; $\epsilon_r = 59$; $\rho = 1000 \text{ kg/m}^3$
Probe: ES3DV3 - SN3196, Frequency: 150.8 MHz, ConvF(7.06, 7.06, 7.06); Calibrated: 5/17/2017
Electronics: DAE4 Sn684, Calibrated: 5/12/2017

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (71x151x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Reference Value = 21.72 V/m; Power Drift = -0.00 dB
Fast SAR: SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.362 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 0.550 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.72 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.959 W/kg
SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.300 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.559 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$
Maximum value of SAR (measured) = 0.557 W/kg

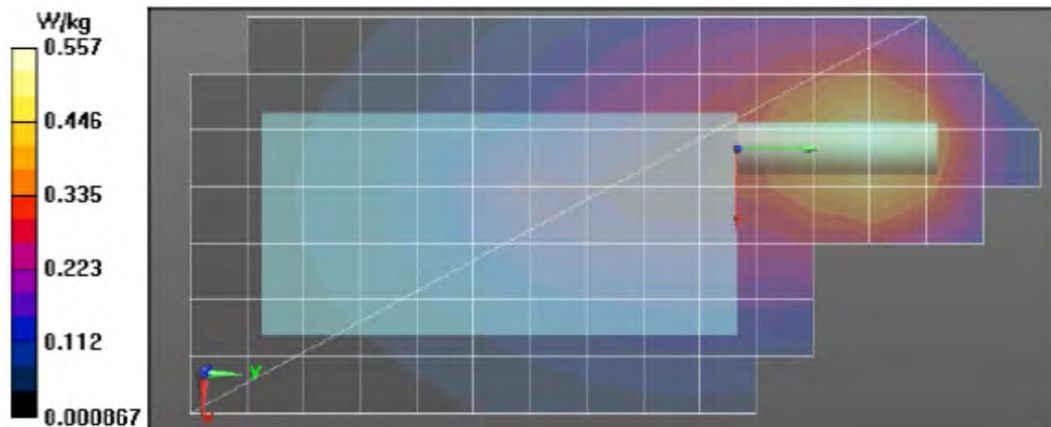

Assessments at the Body with Body Worn PMLN7190A

Table 20

Motorola Solutions, Inc. EME Laboratory
Date/Time: 5/20/2017 11:46:19 AM

Robot#: DASY5-PG-1 | Run#: FD-AB-170520-08
Model#: PMUD3422A
Phantom#: ELI4 1011
Tissue Temp: 20.1 (C)
Serial#: 130TTK0285
Antenna: PMAD4156A
Test Freq: 173.4000 (MHz)
Battery: PMNN4468A
Carry Acc: PMLN7190A
Audio Acc: PMLN7156A
Start Power: 2.30 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 173 \text{ MHz}$; $\sigma = 0.8 \text{ S/m}$; $\epsilon_r = 58.8$; $\rho = 1000 \text{ kg/m}^3$
Probe: EX3DV4 - SN3735, , Frequency: 173.4 MHz, ConvF(11.23, 11.23, 11.23); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (61x171x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$


Reference Value = 36.29 V/m; Power Drift = 0.17 dB
Fast SAR: SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.755 W/kg (SAR corrected for target medium)
Maximum value of SAR (interpolated) = 1.21 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5 \text{ mm}$, $dy=7.5 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 36.29 V/m; Power Drift = -0.21 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.664 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 1.34 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20 \text{ mm}$, $dy=20 \text{ mm}$, $dz=10 \text{ mm}$

Maximum value of SAR (measured) = 1.26 W/kg

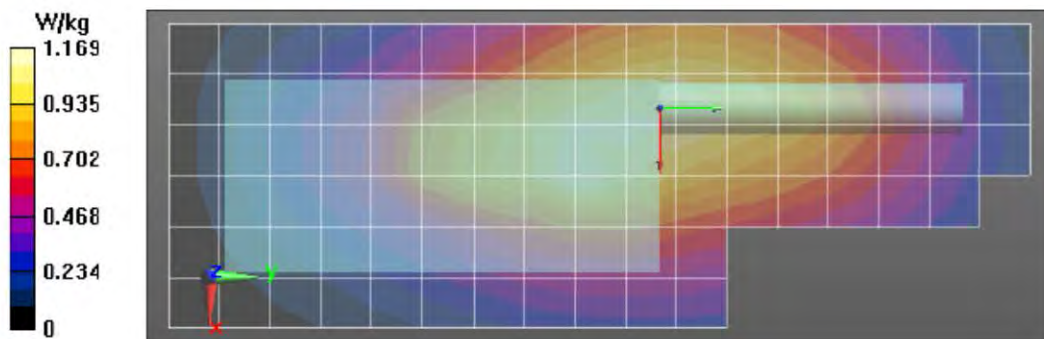

Assessment of wireless BT configuration Table 21

Motorola Solutions, Inc. EME Laboratory

Date/Time: 5/20/2017 1:16:18 PM

Robot#: DASY5-PG-1 | Run#: FD-AB-170520-09
Model#: PMUD3422A
Phantom#: ELI4 1011
Tissue Temp: 20.3 (C)
Serial#: 130TTK0285
Antenna: PMAD4156A
Test Freq: 173.4000 (MHz)
Battery: PMNN4468A
Carry Acc: PMLN7190A
Audio Acc: BT(None)
Start Power: 2.29 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 173 \text{ MHz}$; $\sigma = 0.8 \text{ S/m}$; $\epsilon_r = 58.8$; $\rho = 1000 \text{ kg/m}^3$
Probe: EX3DV4 - SN3735, , Frequency: 173.4 MHz, ConvF(11.23, 11.23, 11.23); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (61x171x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 46.56 V/m; Power Drift = 0.20 dB

Fast SAR: SAR(1 g) = 1.63 W/kg; SAR(10 g) = 1.23 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.95 W/kg

Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 46.56 V/m; Power Drift = 0.30 dB


Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.58 W/kg; SAR(10 g) = 1.15 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.26 W/kg

Below 2 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 2.27 W/kg

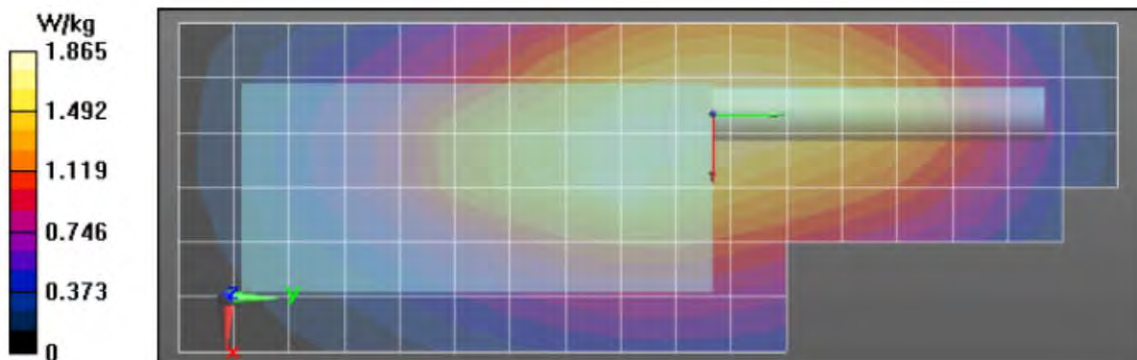

Assessment at the Body for WLAN 802.11 b/g/n
Table 23

Motorola Solutions, Inc. EME Laboratory

Date/Time: 6/5/2017 12:29:24 PM

Robot#: DASY5-PG-01 | Run#: FD-AB-170605-05
Model#: PMUD3422A
Phantom#: TP1168-3
Tissue Temp: 20.3 (C)
Serial#: 130TTK0272
Antenna: PMLN7569A WiFi Ant
Test Freq: 2412.0000 (MHz)
Battery: PMNN4468A
Carry Acc: PMLN7190A
Audio Acc: None
Start Power: 0.0220 (W)

Comments:

Duty Cycle: 1:1.42561, Medium parameters used: $f = 2412$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³
Probe: EX3DV4 - SN3735, , Frequency: 2412 MHz, ConvF(7.24, 7.24, 7.24); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

2-3 GHz-Rev.2/Ab Scan/1-Area Scan (91x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 3.294 V/m; Power Drift = -0.08 dB

Fast SAR: SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.030 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.0751 W/kg

2-3 GHz-Rev.2/Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.294 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.029 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0680 W/kg

2-3 GHz-Rev.2/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.0670 W/kg

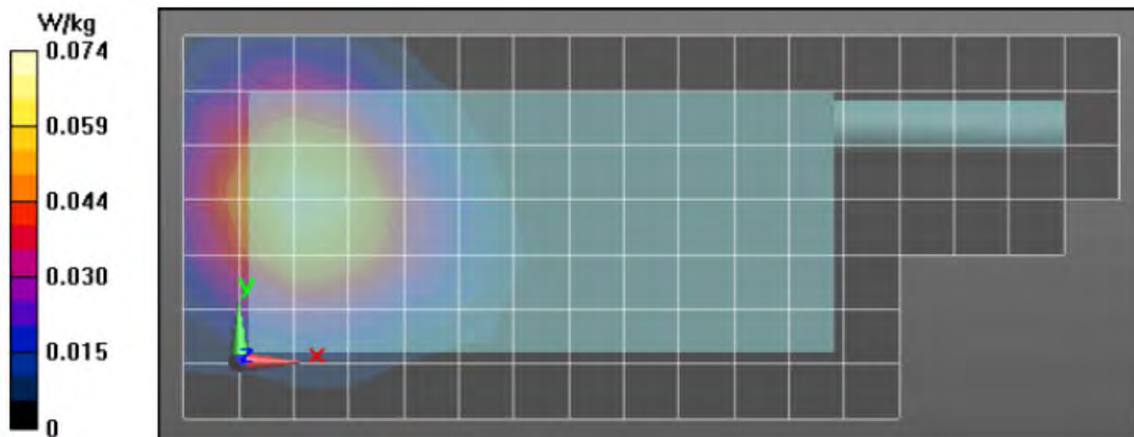

Assessment at the Face (Front of DUT)

Table 25

Motorola Solutions, Inc. EME Laboratory

Date/Time: 5/21/2017 3:26:44 PM

Robot#: DASY5-PG-1 | Run#: ZR-FACE-170521-13
Model#: PMUD3422A
Phantom#: ELI4 1050
Tissue Temp: 21.2 (C)
Serial#: 130TTK0285
Antenna: PMAD4146B
Test Freq: 173.4000 (MHz)
Battery: PMNN4468A
Carry Acc: @ front
Audio Acc: N/A
Start Power: 2.33 (W)

Comments:

Duty Cycle: 1:1, Medium parameters used: $f = 173 \text{ MHz}$; $\sigma = 0.75 \text{ S/m}$; $\epsilon_r = 50.5$; $\rho = 1000 \text{ kg/m}^3$
Probe: EX3DV4 - SN3735, , Frequency: 173.4 MHz, ConvF(11.79, 11.79, 11.79); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/Face Scan/1-Area Scan (61x141x1): Interpolated grid: $dx=1.500 \text{ mm}$,
 $dy=1.500 \text{ mm}$

Reference Value = 42.52 V/m; Power Drift = -0.32 dB

Fast SAR: SAR(1 g) = 1.53 W/kg; SAR(10 g) = 1.13 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.80 W/kg

Below 2 GHz-Rev.2/Face Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5 \text{ mm}$,
 $dy=7.5 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 42.52 V/m; Power Drift = -0.48 dB


Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.866 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.72 W/kg

Below 2 GHz-Rev.2/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20 \text{ mm}$,
 $dy=20 \text{ mm}$, $dz=10 \text{ mm}$

Maximum value of SAR (measured) = 1.66 W/kg

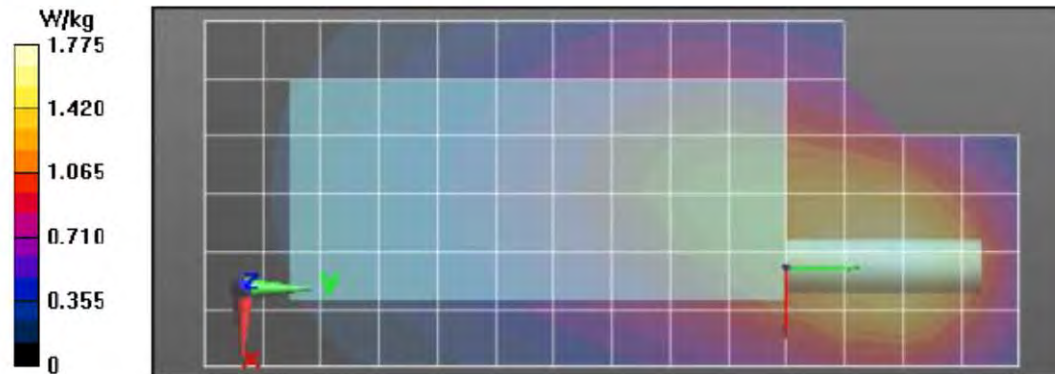

Assessment at the Face for WLAN 802.11 b/g/n

Table 27

Motorola Solutions, Inc. EME Laboratory

Date/Time: 6/5/2017 9:04:51 AM

Robot#: DASY5-PG-01 | Run#: FD-FACE-170605-02

Model#: PMUD3422A

Phantom#: TP1162-2

Tissue Temp: 20.2 (C)

Serial#: 130TTK0272

Antenna: PMLN7569AWiFi Ant

Test Freq: 2412.0000 (MHz)

Battery: PMNN4468A

Carry Acc: 2.5cm @ Front

Audio Acc: None

Start Power: 0.0220 (W)

Comments:

Duty Cycle: 1:1.42561, Medium parameters used: $f = 2450$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN3735, , Frequency: 2412 MHz, ConvF(7.08, 7.08, 7.08); Calibrated: 3/10/2017

Electronics: DAE4 Sn729, Calibrated: 10/12/2016

2-3 GHz-Rev.2/FACE/1-Area Scan (91x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.425 V/m; Power Drift = 0.35 dB

Fast SAR: SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00871 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.0576 W/kg

2-3 GHz-Rev.2/FACE/3-Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.425 V/m; Power Drift = 0.24 dB


Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00586 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0163 W/kg

2-3 GHz-Rev.2/FACE/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.00750 W/kg

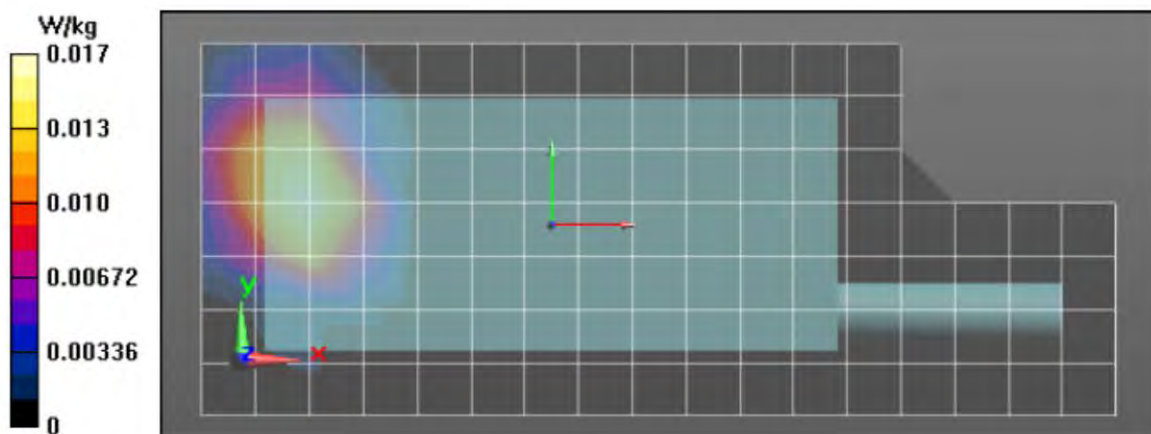

Appendix F

Shortened Scan of Highest SAR configuration

Table 31

Motorola Solutions, Inc. EME Laboratory
Date/Time: 5/21/2017 1:43:38 PM

Robot#: DASY5-PG-1 | Run#: FD-AB-170521-11
Model#: PMUD3422A
Phantom#: ELI4 1011
Tissue Temp: 20.5 (C)
Serial#: 130TTK0285
Antenna: PMAD4156A
Test Freq: 173.4000 (MHz)
Battery: PMNN4468A
Carry Acc: PMLN7190A
Audio Acc: BT(None)
Start Power: 2.31 (W)

Comments: Shorten Scan

Duty Cycle: 1:1, Medium parameters used: $f = 173 \text{ MHz}$; $\sigma = 0.78 \text{ S/m}$; $\epsilon_r = 58.9$; $\rho = 1000 \text{ kg/m}^3$
Probe: EX3DV4 - SN3735, , Frequency: 173.4 MHz, ConvF(11.23, 11.23, 11.23); Calibrated: 3/10/2017
Electronics: DAE4 Sn729, Calibrated: 10/12/2016

Below 2 GHz-Rev.2/Ab Scan/1-Area Scan (61x171x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Reference Value = 42.23 V/m; Power Drift = -0.10 dB

Fast SAR: SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.990 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 1.57 W/kg


Below 2 GHz-Rev.2/Ab Scan/3-Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 44.04 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.921 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.73 W/kg

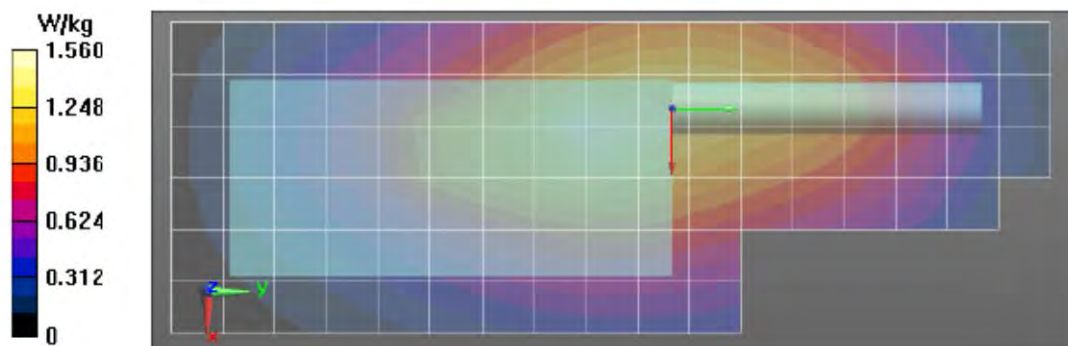

Shortened scan reflects highest SAR producing configuration and is compared to the full scan.

Scan Description	Referenced Table	Test Time (min.)	SAR 1g (W/kg)	SAR 10g (W/kg)
Shorten scan (zoom)	31	7	0.67	0.49
Full scan (area & zoom)	21	25	0.83	0.60

Appendix G

DUT Test Position Photos

Photos available in Exhibit 7B

Appendix H

DUT, Body worn and audio accessories Photos

Photos available in Exhibit 7B