

<p><b>MOTOROLA PENANG ADV. COMM. LABORATORY</b> Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p><b>FCC / ISED TEST REPORT</b> Report Revision : Rev.B</p>
<p><b>Date/s Tested</b> : 16-Dec-2023 - 12-Mar-2024 <b>Report Issue Date</b> : 04-April-2024 <b>Manufacturer/Location</b> : MOTOROLA SOLUTIONS INC. (SCHAUMBURG) 1301 E. ALGONQUIN ROAD, BLDG IL02 ROOM 3035, SCHAUMBURG, IL 60196 <b>Requestor</b> : ROLANDO HERNANDEZ <b>Product Type</b> : Hand-held <b>Product Version (PMN)</b> : APX NEXT (Radiated) &amp; APX NEXT XE (Conducted ) <b>Model Number (HVIN)</b> : H55TGT9PW8AN <b>Frequency Band</b> : 2.402 - 2.480 GHz <b>Max RF Output Power</b> : 11.5 mWatts <b>Applicant Name</b> : Motorola Solutions Inc <b>Applicant Address</b> : Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia <b>FCC Registrations</b> : 461337 <b>ISED Registrations</b> : MY0001 <b>Firmware Version (FVIN)</b> : D05.75.53 (Conducted) &amp; D05.75.54 (Radiated)</p> <p><b>The equipment was tested accordance to the requirement listed below:</b></p> <p><b>(2.4GHz BT LE )</b> <span style="float: right;"><b>PASS</b></span> <b>47 CFR Part 15C</b> <b>ISED RSS 247 Issue 2</b> <b>February 2017</b></p>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:  _____ Siti Nurhidayati Binti Abdul Halim Test Personnel</p>	<p>Approved Signatory: _____ Maheshvaran A/L Rajagopal Responsible Engineer</p>

## Table of Contents

1.0 General Information .....	3
2.0 Summary of Test Results.....	4
3.0. Measurement Uncertainty .....	4
4.0 Equipment List .....	5
5.0 Test Mode Applicability and Test Channel Detail .....	6
6.0 Transmitter Test Parameters .....	7
6.1 6dB Channel Bandwidth.....	7
6.1.1 Test Setup.....	7
6.1.2 Test Limits: .....	7
6.1.3 Test Data: .....	7
6.2 Conducted RF Output Power.....	11
6.2.1 Test Setup.....	11
6.2.2 Test Limits: .....	11
6.2.3 Test Data: .....	12
6.3 Maximum Peak Power Spectral Density .....	14
6.3.1 Test Setup.....	14
6.3.2 Test Limits: .....	14
6.3.3 Test Result .....	14
6.4 Conducted Spurious Emission.....	15
6.4.1 Test Setup.....	15
6.4.2 Test Limits: .....	15
6.4.3 Test Result .....	15
6.5 Band edge Conducted Spurious Emission.....	16
6.5.1 Test Setup.....	16
6.5.2 Test Limits: .....	16
6.5.3 Test Result .....	16
6.6 Radiated Emission within Restricted Bands.....	17
6.6.1 Test Setup.....	17
6.6.2 Test Limits: .....	18
6.6.3 Test Results:.....	19
6.7 AC Powerline Conducted Emission .....	24
6.7.1 Test Setup.....	24
6.7.2 Test Limits: .....	24
6.7.3 Test Result .....	25

### REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	13-March-2024	Siti Nurhidayati
Rev. B	Update Antenna Type at EUT Description	04-April-2024	Maheshvaran A/L Rajagopal

## 1.0 General Information

### EUT Description:

<b>Technologies</b>	2.4GHz BT LE
<b>TX Frequency range</b>	2402MHz – 2480MHz
<b>Modulation Type</b>	GFSK
<b>Connector type</b>	PROGRAMMING, TEST & ALIGNMENT CABLE
<b>Antenna type</b>	Stamped Metal

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
760 - 870 MHz	MOTOROLA	AN000296A01
HI-CAP BATT, IMPRES GEN2, LIION, IP68, 5650T	MOTOROLA	NNTN9089B
STANDARD BATT, IMPRES GEN2, LIION, IP68, 3800T	MOTOROLA	NNTN9087A
CHARGER, MULTI-UNIT, IMPRES G2, 6-DISP, BASE w/INSERTS; w/US Line Cord	MOTOROLA	NNTN9115A
US Line Cord	MOTOROLA	3087791G01

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

**FCC 47 CFR Part 15 Subpart C**  
**KDB 558074 D01 15.247 Meas Guidance v05**  
**ANSI C63.10-2013**

### Deviation from standard

Not applicable as no deviation from standard test method

### Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

## 2.0 Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (a)(2)	RSS 247 5.2 (a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: BT 4.0 - 1.057 MHz (1M06F1D) BT 5.0 – 2.077MHz (2M08F1D)	437TZP0921	Hidayati
15.247 (b)(3)	RSS 247 5.4 (d)	Conducted RF Output Power (Average)	Pass	Highest output power: 9.866 dBm (9.93 mW) BT 4.0 – 9.969 dBm (mW) BT 5.0 – 10.063 dBm (10.15 mW)	437TZP0921	Hidayati
15.247(e)	RSS 247 5.2 (b)	Maximum Peak Power Spectral Density	NA	NA	NA	SEE NOTE 1
15.247 (d)	RSS-247 5.5	Band-Edge Conducted Spurious Emission	NA	NA	NA	SEE NOTE 1
15.247 (b)	RSS-247 5.5	Conducted Spurious Emission	NA	NA	NA	SEE NOTE 1
15.205, 15.209, 15.247 (d)	RSS247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: RSE: 26.2318 dBuV/m. (Margin: 13.7682 dB) RBE: 41.1982 dBuV/m. (Margin: 12.8018 dB)	437TZP0815 437TZP0835 437TZP0845	Nazrin & Rezza
15.207	RSS-Gen 8.8	AC Power Line Conducted Spurious Emission	NA	Meet the limit requirement.	437TZP0815 437TZP0835 437TZP0845	Shidee
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA	NA

NA → Not Applicable

**NOTE 1: Selection of test parameters, the report contain a limited number of parameters deemed to be influenced by the relevant design changes, as agreed with the applicant.**

## 3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
	1GHz ~ 18GHz	5.84
Radiated Emissions above 1 GHz	18GHz ~ 40GHz	6.02
	9kHz ~ 12.75GHz	2.82

#### 4.0 Equipment List

##### Bluetooth ATE # 1 (SW Version: Ate Main\_3.1.12)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92003820	18-Jul-23	18-Jul-24
POWER SUPPLY	6652A	3541A02371	18-Jul-23	18-Jul-24
SPECTRUM ANALYZER	E4440A	MY48250517	8-Nov-23	8-Nov-24

##### Radiated Emission Station (SW Version: EMC FCC RE v1.6.5)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	1143	08-Mar-23	08-Mar-25
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
DC Power Supply	6033A	3211A06649	12-Jun-22	12-Jun-24
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101731	11-Aug-23	11-Aug-24
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112D	30991	5-Jan-23	5-Jan-24
BILOG ANTENNA	CBL6112D	2964	25-Sep-23	25-Sep-24
DATA LOGGER THERMOHYGROMETER	SDL500	A.016800	21-Jun-23	21-Jun-24
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	22-Feb-23	22-Feb-24
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	002	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118P	269	28-Mar-23	28-Mar-24
LOOP ANTENNA	6502	00203479	16-Feb-23	16-Feb-24

##### AC Power Line Conducted Spurious Emission (SW Version: EMC32 Ver. 10.60.10)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DATA LOGGER	DSB	16344143	21-Jun-2023	21-Jun-2024
V-NETWORK 2-LINE	ENV216	101268	15-Feb-23	15-Feb-24
EMI TEST RECEIVER	ESCI	100225	9-Feb-2023	9-Feb-2024
PROGRAMMABLE AC SOURCE	61604	ABR000000926	25-Jul-2023	25-Jul-2024

## 5.0 Test Mode Applicability and Test Channel Detail

### Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	22.8°C, 70.1%RH

### Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	22.8°C, 70.1%RH

### Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	NA

### Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	25°C, 54.8%RH

## 6.0 Transmitter Test Parameters

### 6.1 6dB Channel Bandwidth

#### 6.1.1 Test Setup

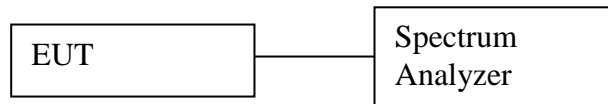

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max hold
  - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.


#### 6.1.2 Test Limits:

<b>Normal Condition (25 ° C)</b>
<b>≥500 kHz</b>


#### 6.1.3 Test Data:

##### BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	0.673	1.057	Pass
Bluetooth L.E	GFSK	2440	0.665	1.056	Pass
Bluetooth L.E	GFSK	2480	0.666	1.056	Pass

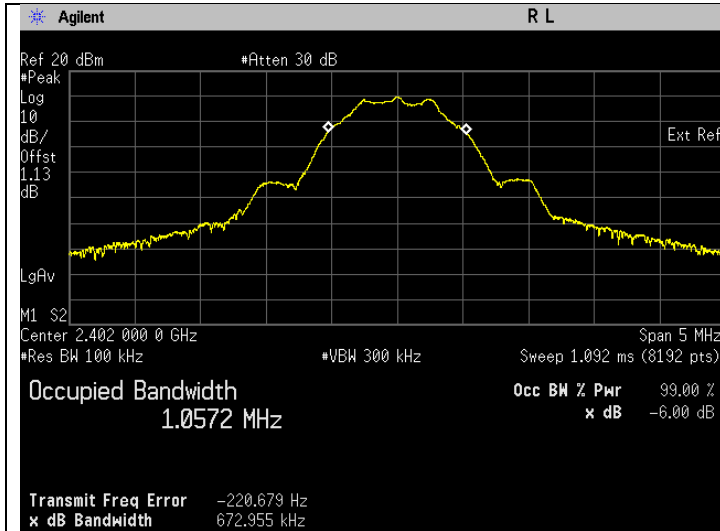


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

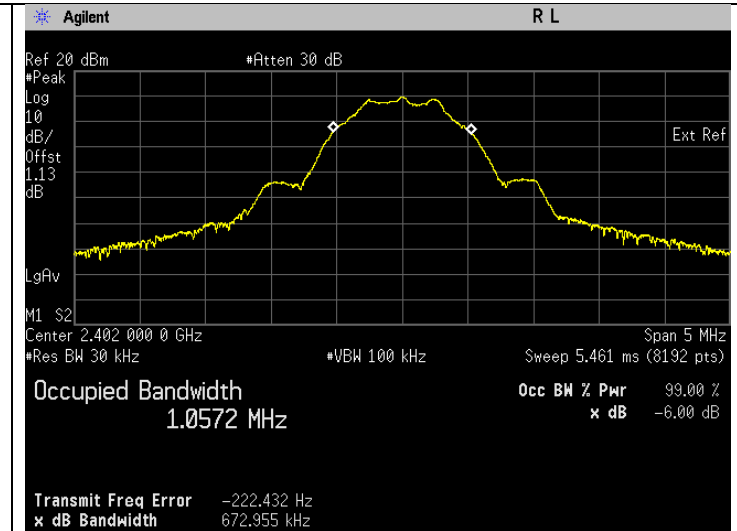


99% Bandwidth. Bluetooth LE Frequency 2402 MHz

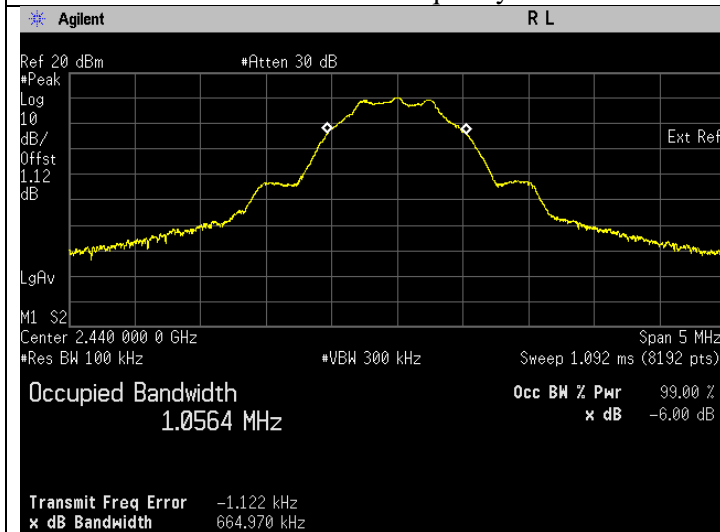


6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

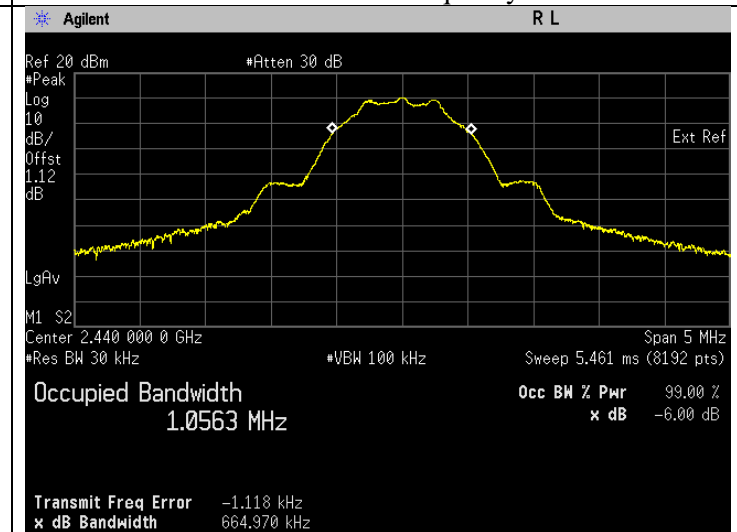

99% Bandwidth. Bluetooth LE Frequency 2440 MHz

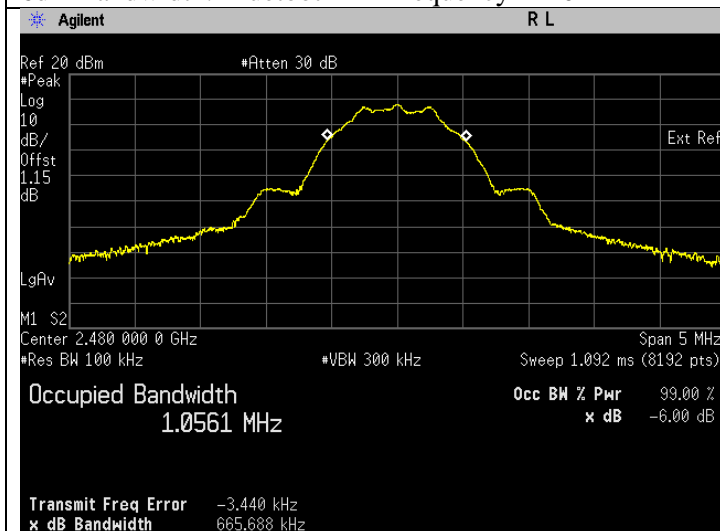

6dB Bandwidth. Bluetooth LE Frequency 2480 MHz

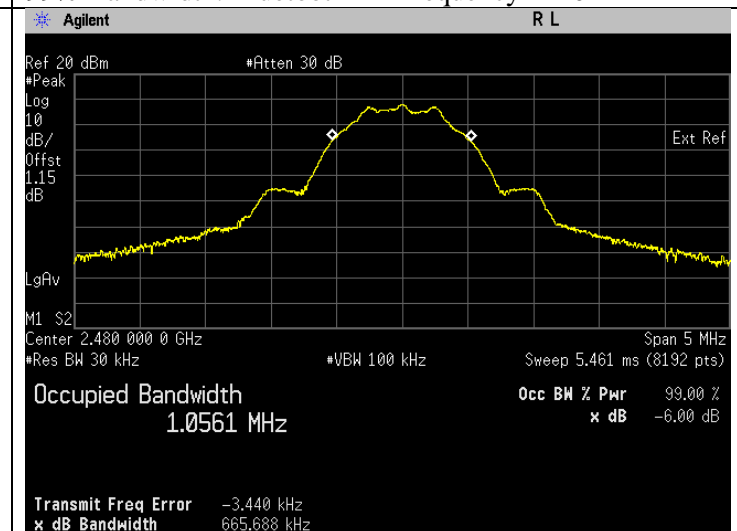


99% Bandwidth. Bluetooth LE Frequency 2480 MHz




**BTLE 2M**


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	1.139	2.073	Pass
Bluetooth L.E	GFSK	2440	1.137	2.077	Pass
Bluetooth L.E	GFSK	2480	1.140	2.073	Pass

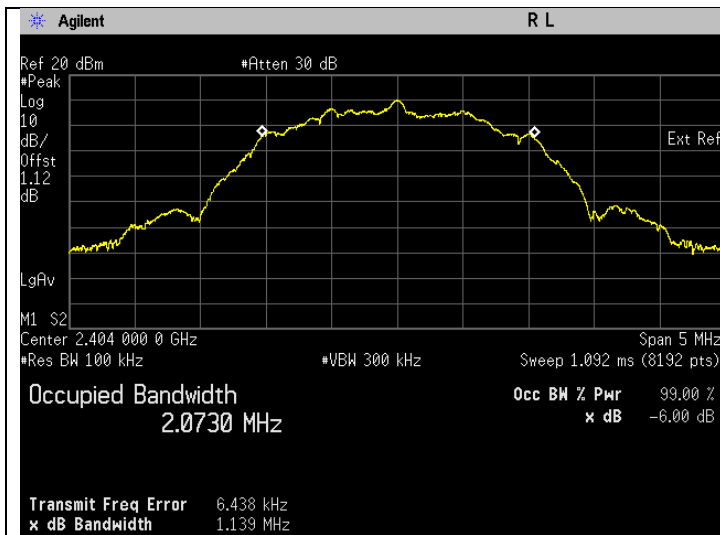


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

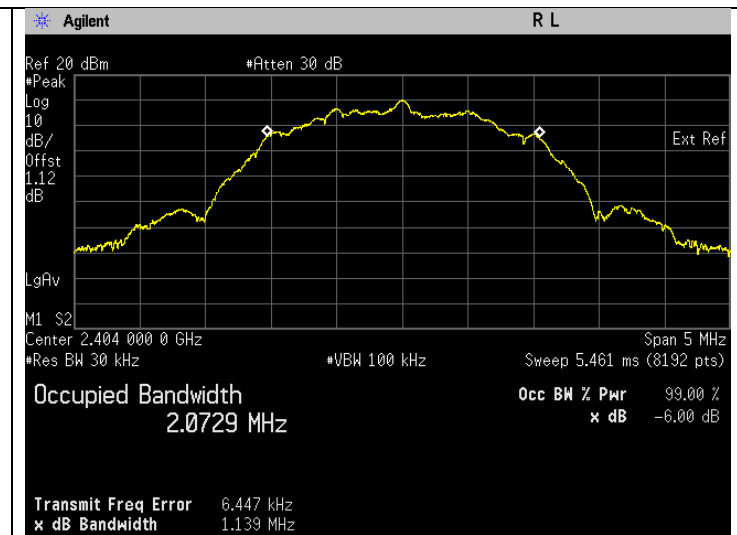



99% Bandwidth. Bluetooth LE Frequency 2402 MHz

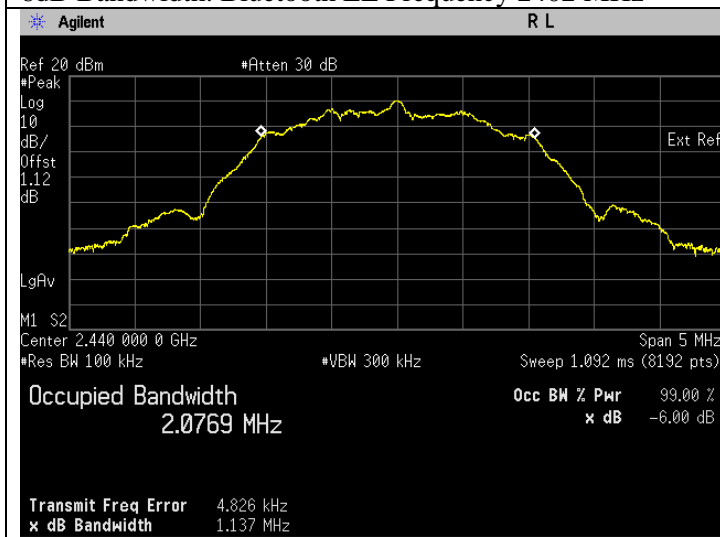

6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

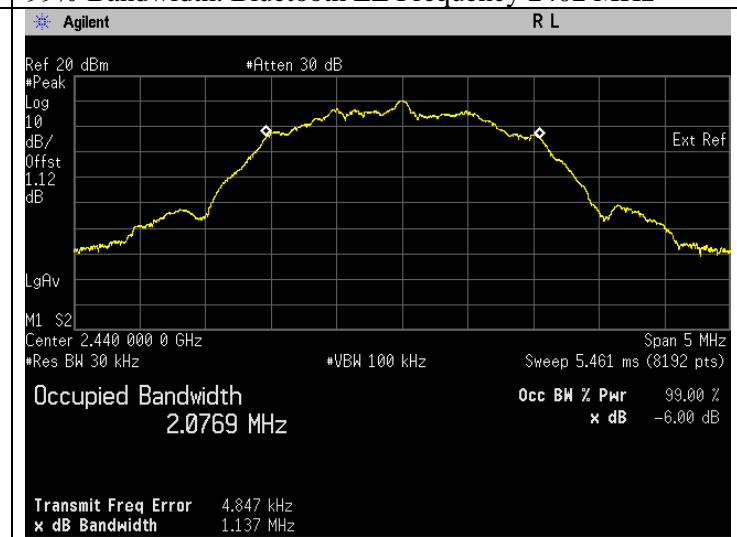


99% Bandwidth. Bluetooth LE Frequency 2440 MHz

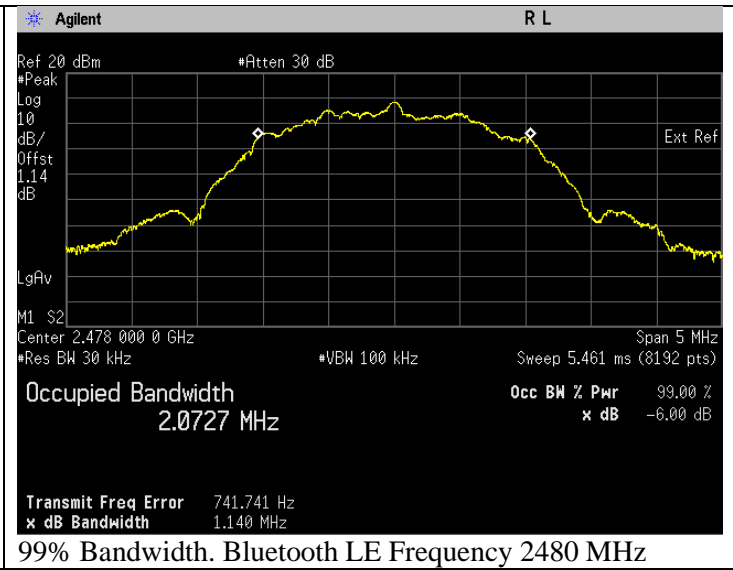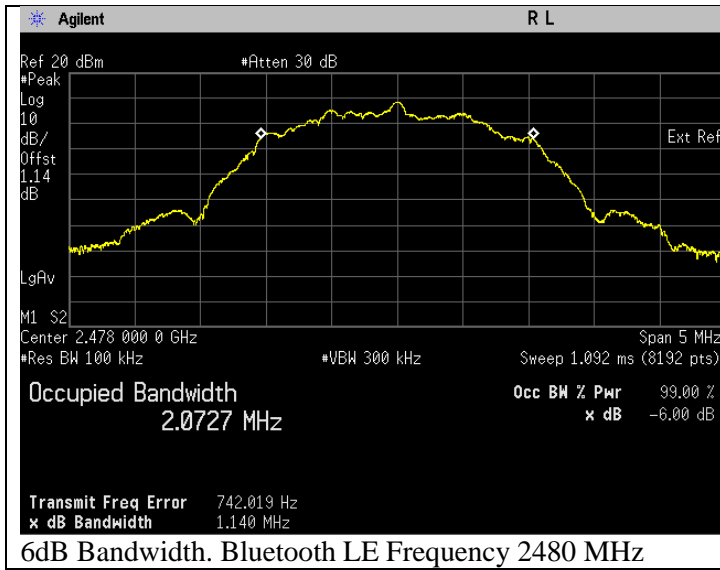

## 6.2 Conducted RF Output Power

### 6.2.1 Test Setup

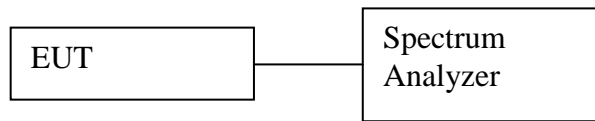

#### Average

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
  - a. Set the RBW = 30 kHz.
  - b. Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - c. Set the span  $\geq [1.5 \times \text{OBW bandwidth}]$ .
  - d. Detector = average.
  - e. Sweep time = auto couple.
  - f. Trace mode = free run.
  - g. Allow trace to fully stabilize.
- 5) Add in duty cycle correction into final test result.
- 6) Duty cycle correction is calculated as below:  
$$10 \log (1/x)$$

#### Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
  - a. Set the RBW = 3 MHz.
  - b. Set the VBW = 50 MHz.
  - c. Set the span  $\geq [1.5 \times \text{OBW bandwidth}]$ .
  - d. Detector = Peak
  - e. Sweep time = auto couple.
  - f. Trace mode = max hold.
  - g. Allow trace to fully stabilize.

### 6.2.2 Test Limits:

Normal Condition (25 ° C)
$\leq 1 \text{ Watt}(30 \text{ dBm})$

### 6.2.3 Test Data:


Test was conducted with average power.

#### BTLE 1M


$$\text{Output power} = \text{Band Power} + \text{Duty Cycle factor}$$

$$= \text{Band Power} + 2.031\text{dBm}$$


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	9.492	Pass
Bluetooth L.E	GFSK	2440	9.969	Pass
Bluetooth L.E	GFSK	2480	7.641	Pass

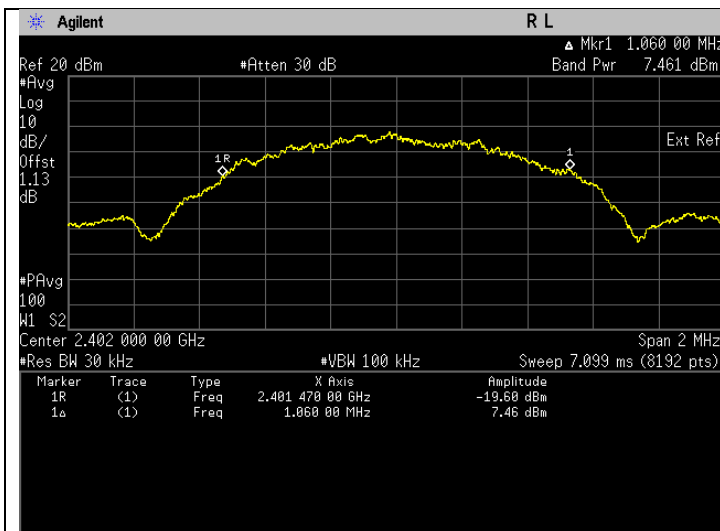


Frequency 2402 MHz

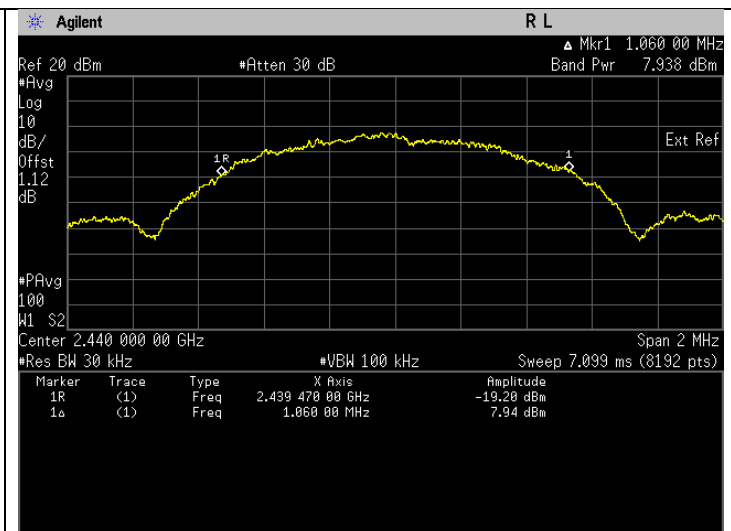

Frequency 2440 MHz

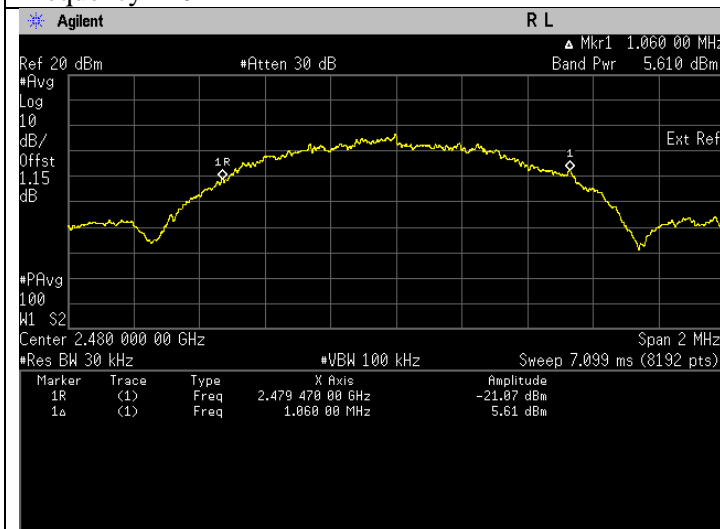

Frequency 2480 MHz

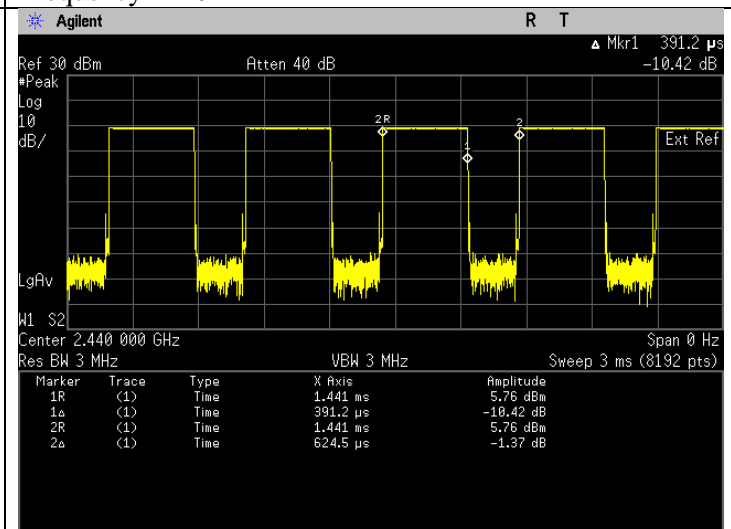


Duty Cycle


**BTLE 2M**

Output power = Band Power + Duty Cycle factor  
 =Band Power + 4.807dBm


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	9.785	Pass
Bluetooth L.E	GFSK	2440	10.063	Pass
Bluetooth L.E	GFSK	2480	8.272	Pass

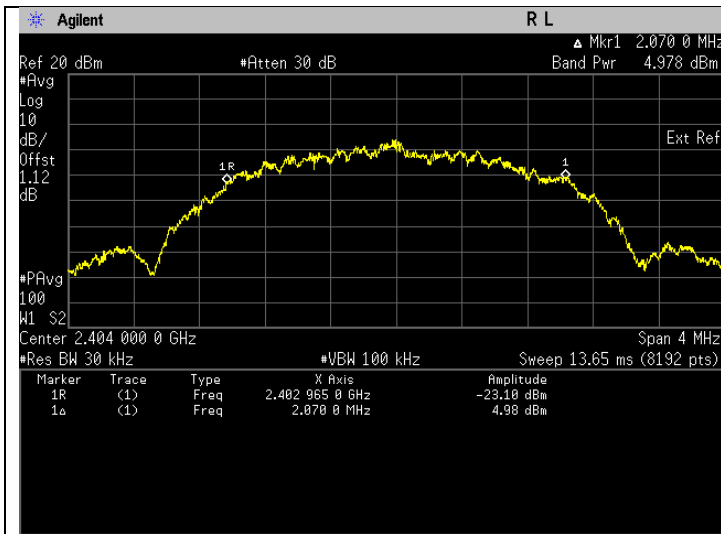


Frequency 2402 MHz

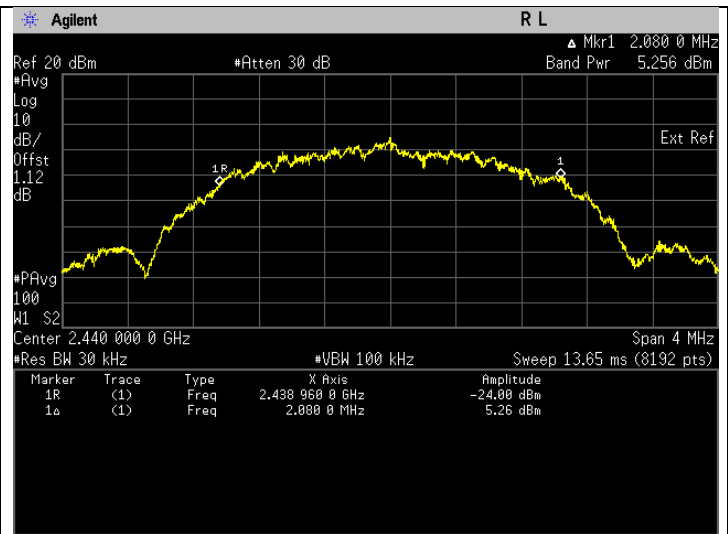

Frequency 2440 MHz

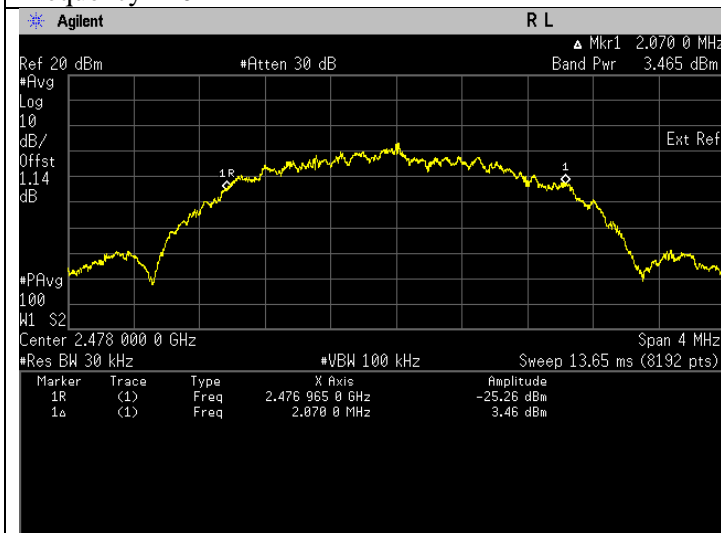


Frequency 2480 MHz

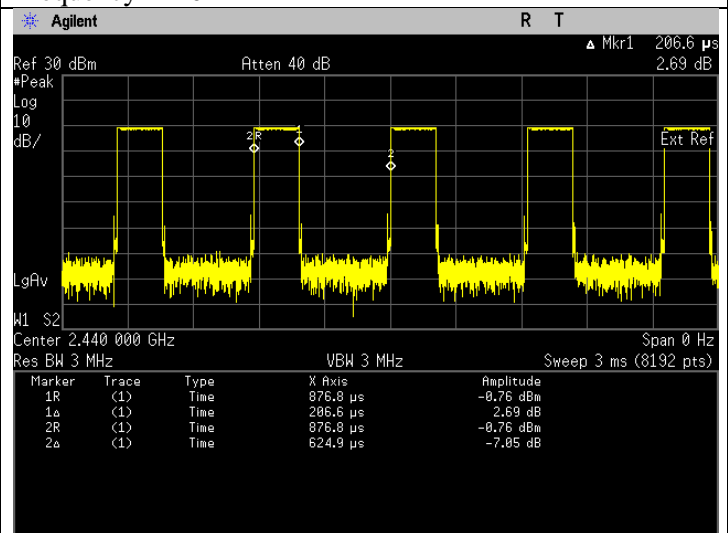

Duty Cycle

## 6.3 Maximum Peak Power Spectral Density

### 6.3.1 Test Setup

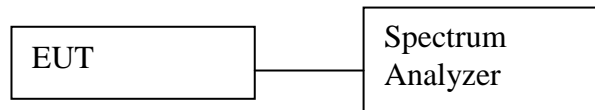

#### Maximum Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. Set analyzer center frequency to DTS channel center frequency.
  - b. Set the span to 1.5 times the DTS bandwidth.
  - c. Set the RBW to 3 kHz.
  - d. Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e. Detector = peak.
  - f. Sweep time = auto couple.
  - g. Trace mode = max hold.
  - h. Allow trace to fully stabilize.
  - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 6.3.2 Test Limits:


<b>Normal Condition (25 ° C)</b>
<b><math>\leq 8 \text{ dBm/3kHz}</math></b>

### 6.3.3 Test Result

Not Applicable

## 6.4 Conducted Spurious Emission

### 6.4.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- 5) Use the peak marker function to measure highest emission and scan up to 10<sup>th</sup> harmonic.

### 6.4.2 Test Limits:


<b>Normal Condition (25 ° C)</b>
<b>Shall be at least 20 dB below max power. (Peak detector)</b>
<b>Shall be at least 30 dB below max power. (Average detector)</b>

### 6.4.3 Test Result

Not Applicable

## 6.5 Band edge Conducted Spurious Emission

### 6.5.1 Test Setup

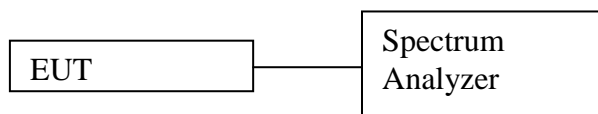

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.

### 6.5.2 Test Limits:

<b>Normal Condition (25 ° C)</b>
<b>Shall be at least 20 dB below max power. (Peak detector)</b>
<b>Shall be at least 30 dB below max power. (Average detector)</b>


### 6.5.3 Test Result

Not Applicable



## 6.6 Radiated Emission within Restricted Bands

### 6.6.1 Test Setup

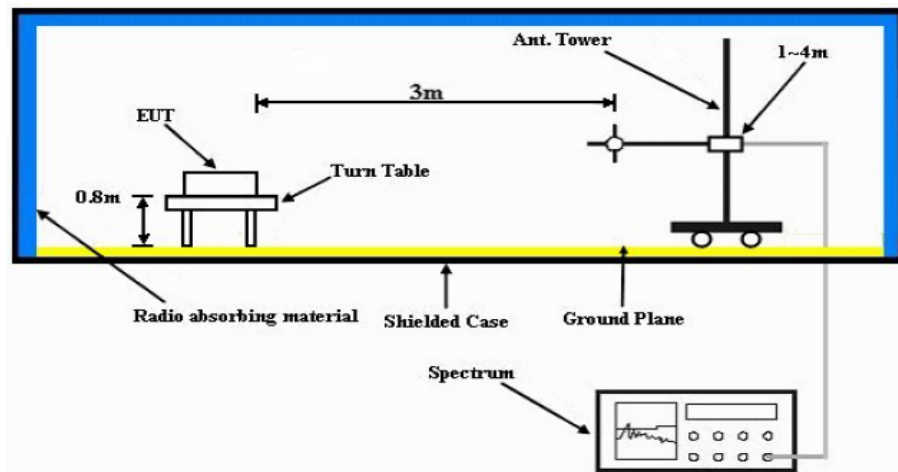

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

#### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

### 6.6.2 Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**NOTE:**

- 1) The lower limit shall apply at the transition frequencies.
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**6.6.3 Test Results:**

**Test: Bluetooth SAC Restricted Band Edge**  
**Model Number: H55TGT9PW8AN S/N: 437TZP0815 EMC SR ID#: 12464-EMC-00261**  
**Battery: NNTN9089B Accessory: AN000296A01**  
**Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013**  
**Worst Case Plane: X-Plane (BTLE)**

**Restricted Band Edge (High Channel) tabular data**


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
2483.5000	-	50.6904	40.8895	-	74.0000	54.0000	-	23.3096	13.1105	-
Horizontal Radiated Emission Result										
2483.5000	-	56.2427	41.1982	-	74.0000	54.0000	-	17.7573	12.8018	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


**Temperature (degC): 23.4**  
**Test Performed by: Nazrin & Rezza**  
**System MU: 5.84dB**

**Humidity (%): 72.3**  
**Test Date: Sun, 24 Dec, 2023**


**Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot**

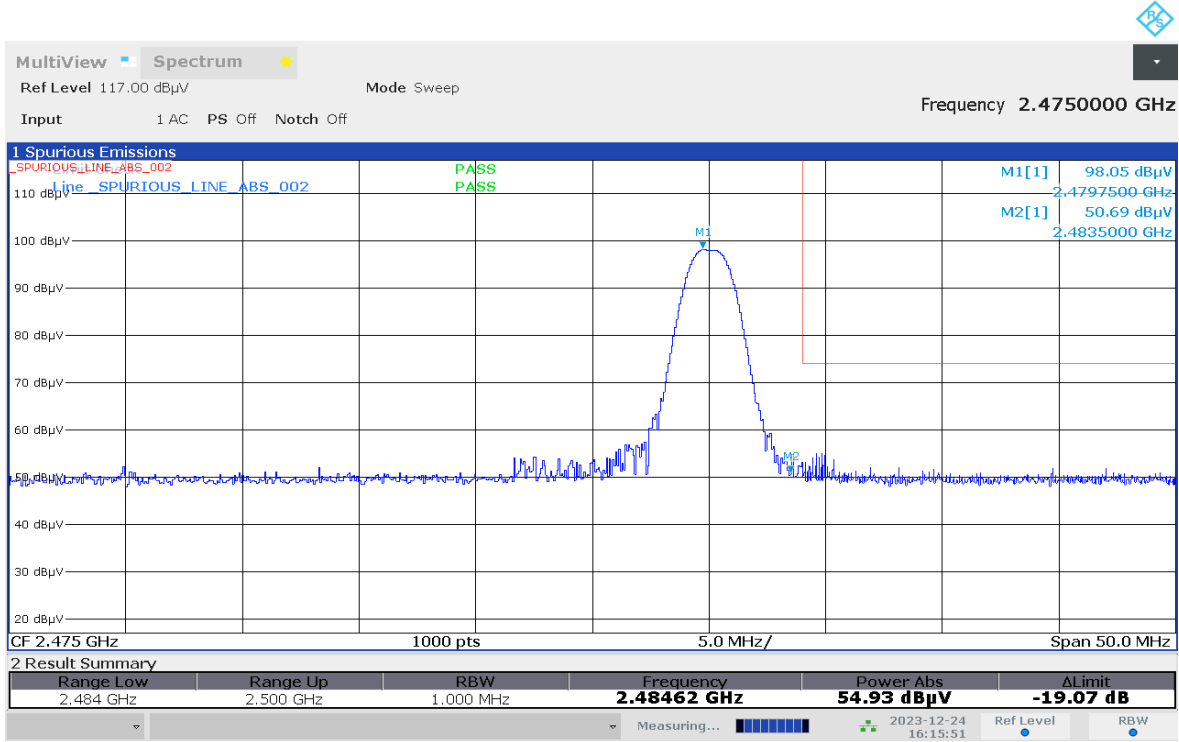

**Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot**

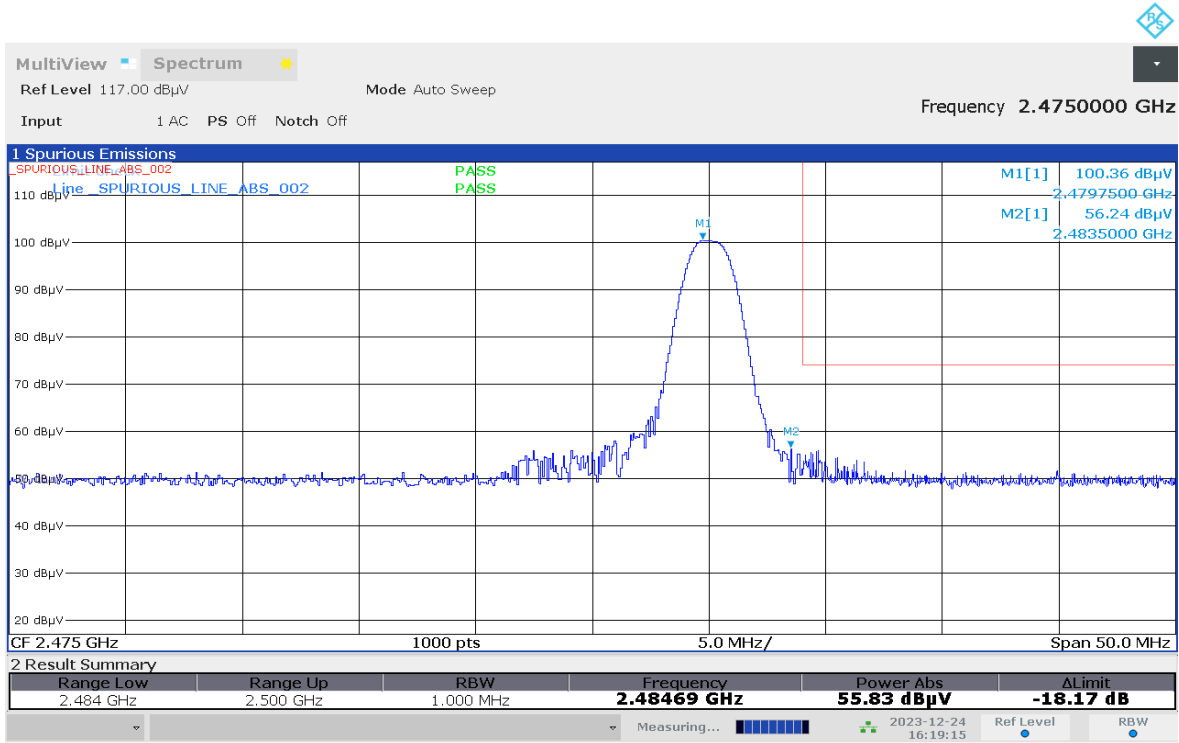


### Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

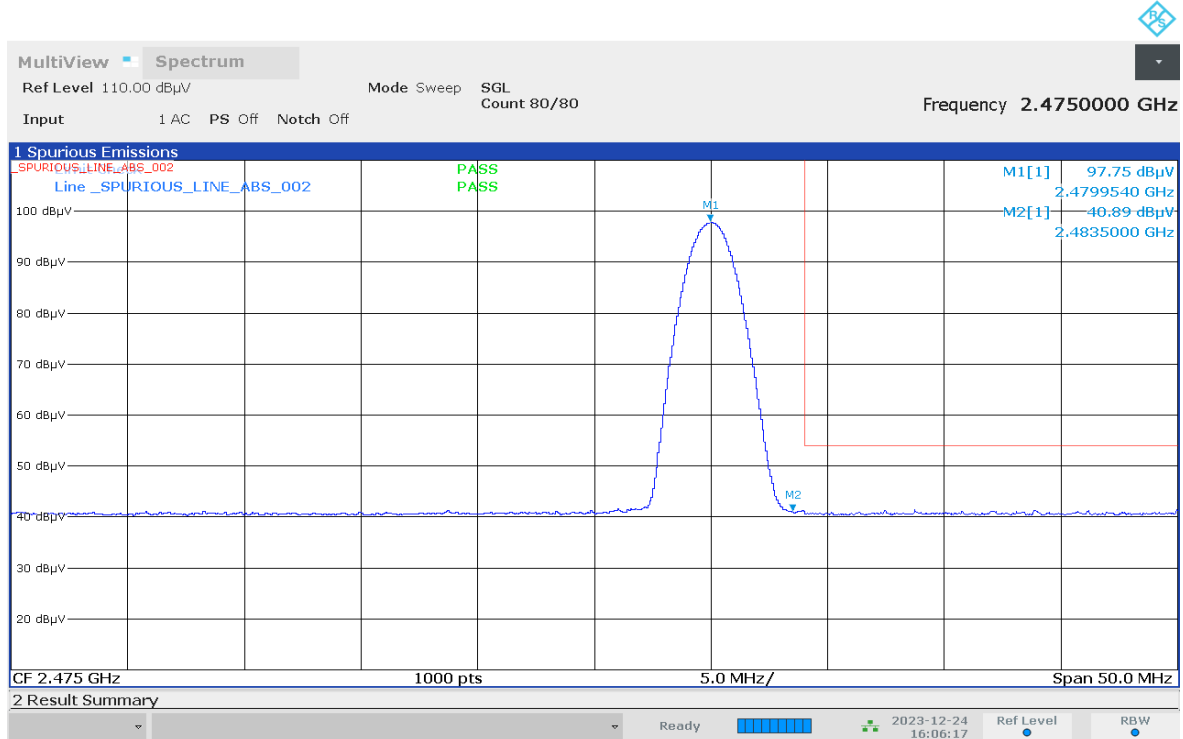

04:06:18 PM 12/24/2023


### Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

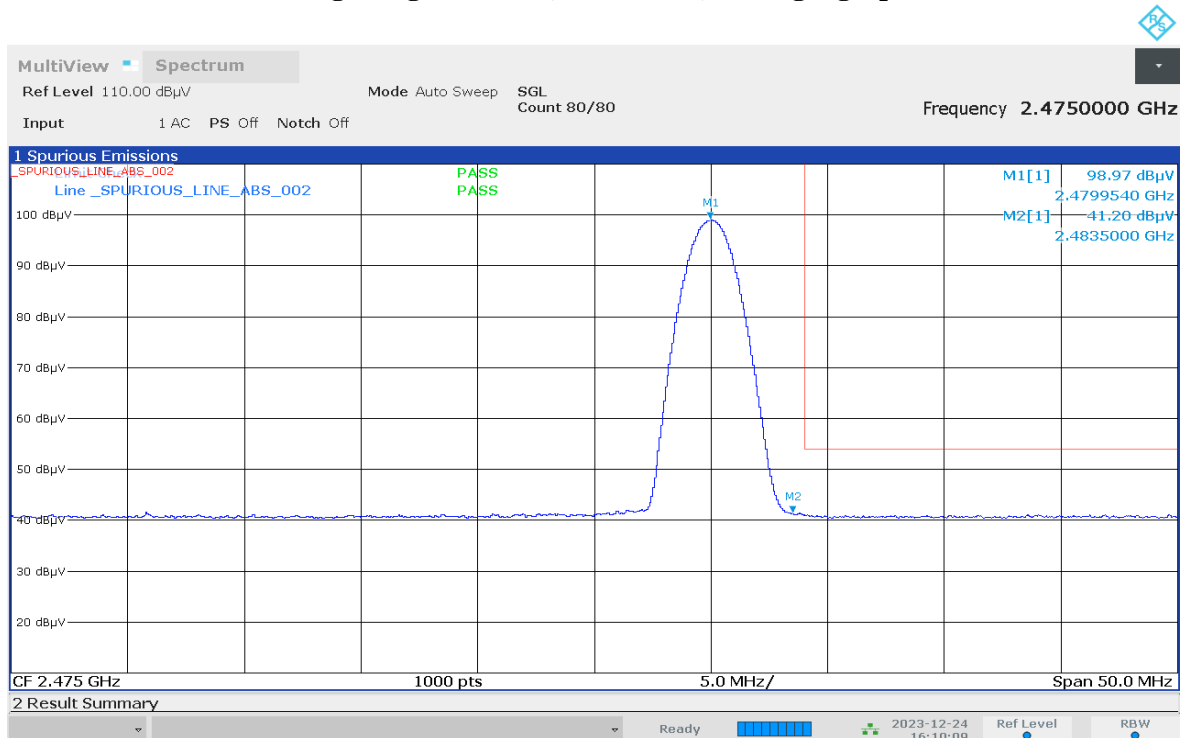


04:10:09 PM 12/24/2023



### VERTICAL, QPK

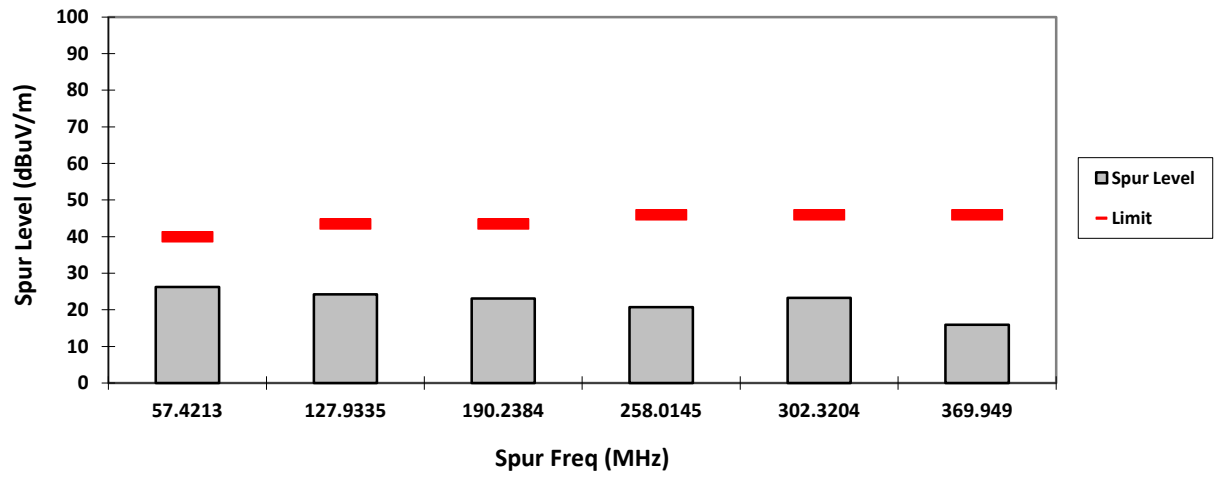


### HORIZONTAL, QPK

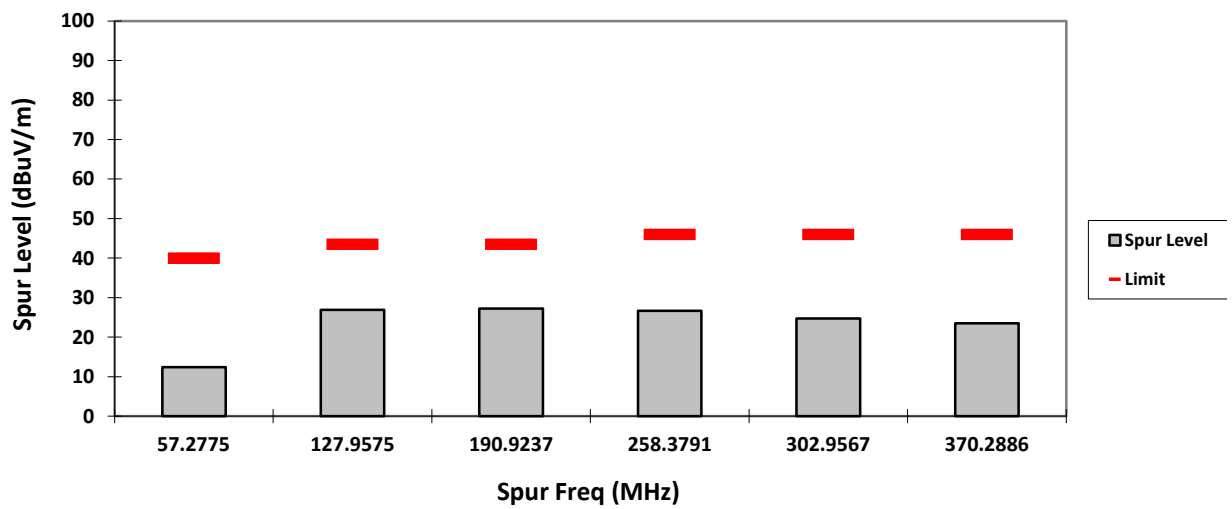

## 6.7 AC Powerline Conducted Emission

### 6.7.1 Test Setup

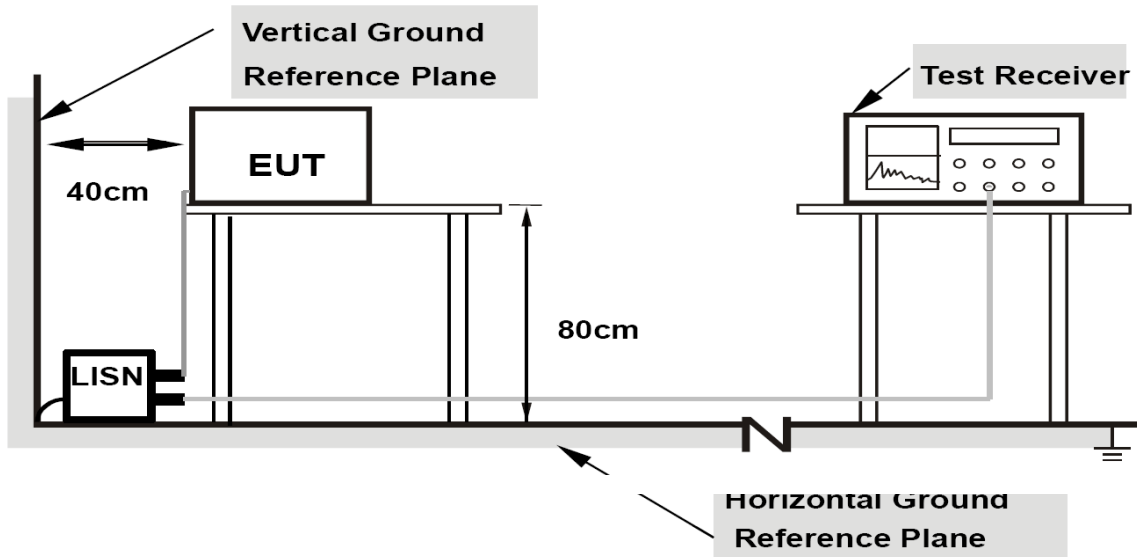

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

### 6.7.2 Test Limits:

**For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.**

**Limits for conducted disturbance at the mains ports of class A ITE**

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

**Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.**



**Limits for conducted disturbance at the mains ports  
of class B ITE**

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.


**Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE**

### 6.7.3 Test Result

Report ID.:	: 12464-EMC-00261
Ambient Temperature:	: 20.7 °C
Humidity:	: 59.4 %RH
Tester:	: Shidee
Date of test:	: 27 December 2023

1) Ambient


Full Spectrum

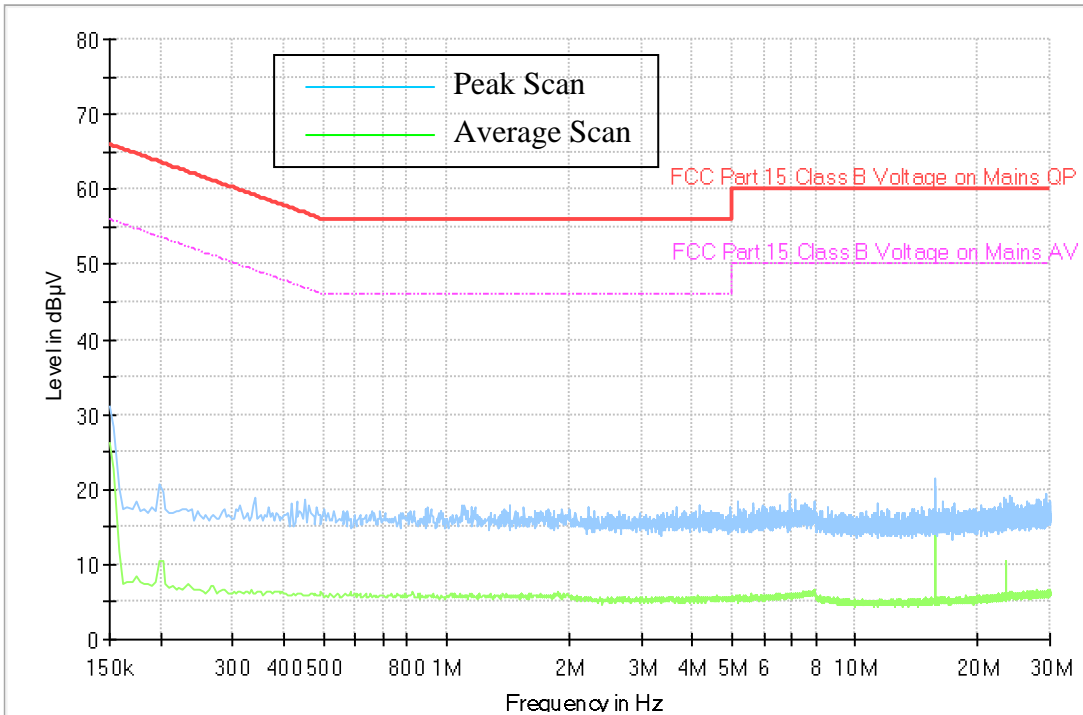

### 120 Vac, 60Hz


#### 1) Charger Alone

Full Spectrum

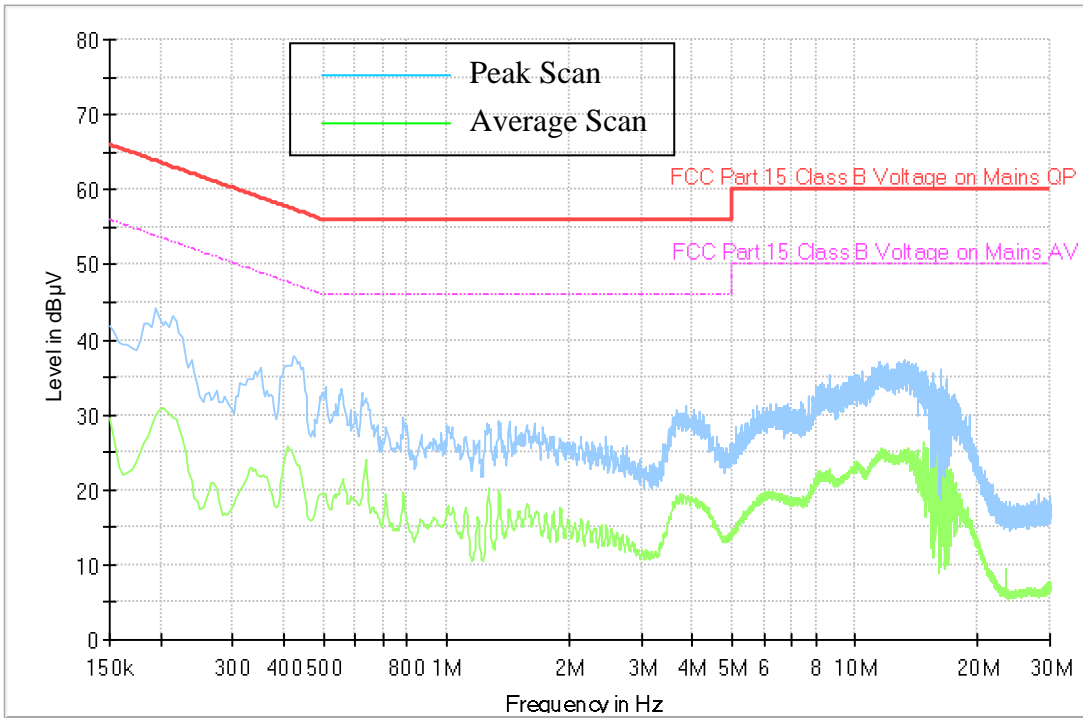

2) Charger + Radio Off

Full Spectrum

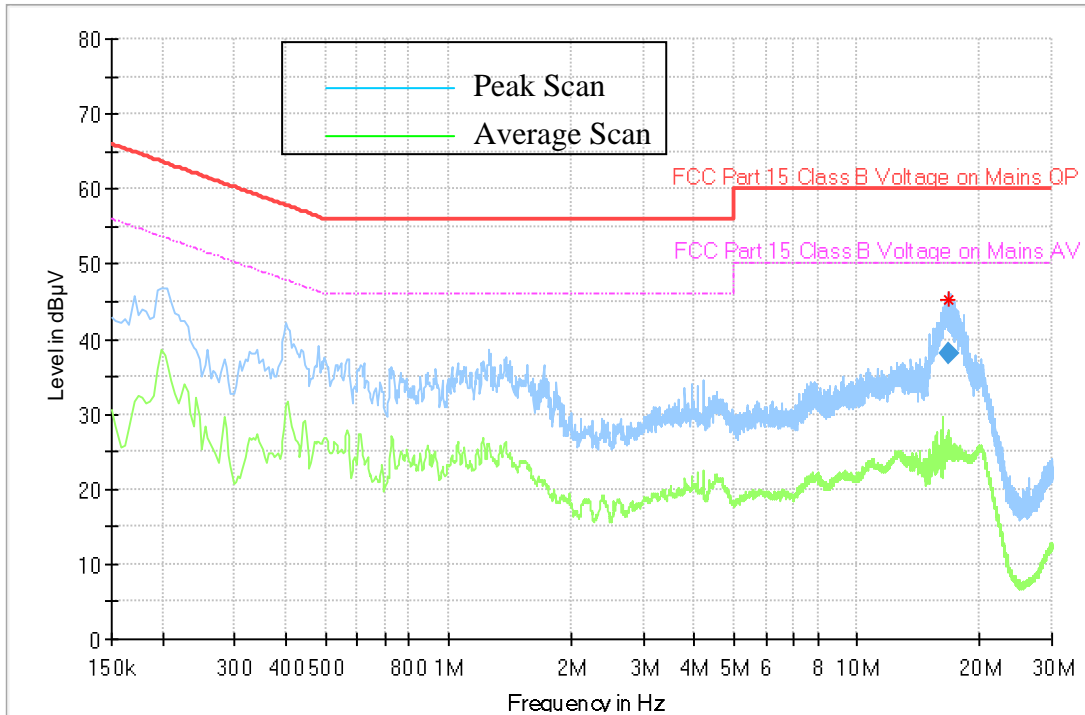


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
16.678000	38.01	---	60.00	21.99	1000.0	9.000	L1	ON	10.3	Pass

\* Expanded Uncertainty (U) = +/- 3.48dB

3) Charger + Radio Standby

Full Spectrum

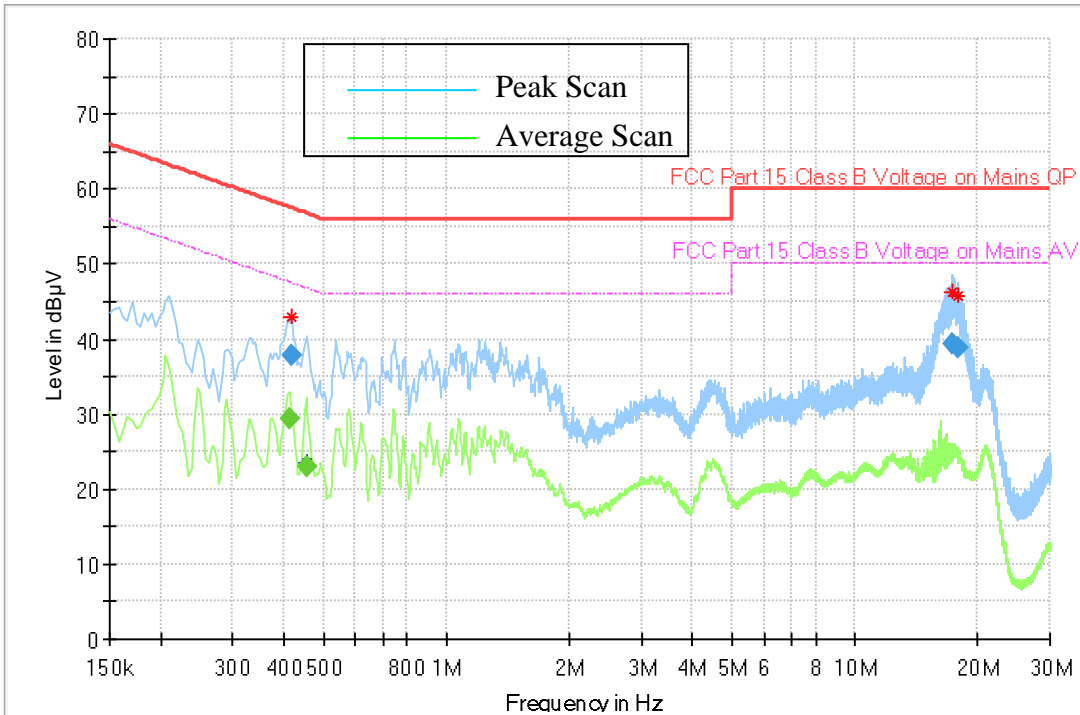


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.414000	---	29.41	47.57	18.16	1000.0	9.000	N	ON	10.3	Pass
0.418000	37.73	---	57.49	19.76	1000.0	9.000	N	ON	10.3	Pass
0.454000	---	22.99	46.80	23.81	1000.0	9.000	N	ON	10.3	Pass
17.378000	39.39	---	60.00	20.61	1000.0	9.000	L1	ON	10.4	Pass
17.878000	38.96	---	60.00	21.04	1000.0	9.000	L1	ON	10.4	Pass

\* Expanded Uncertainty (U) = +/- 3.48dB

4) Charger + Radio Standby with BT LE 5.0

Full Spectrum

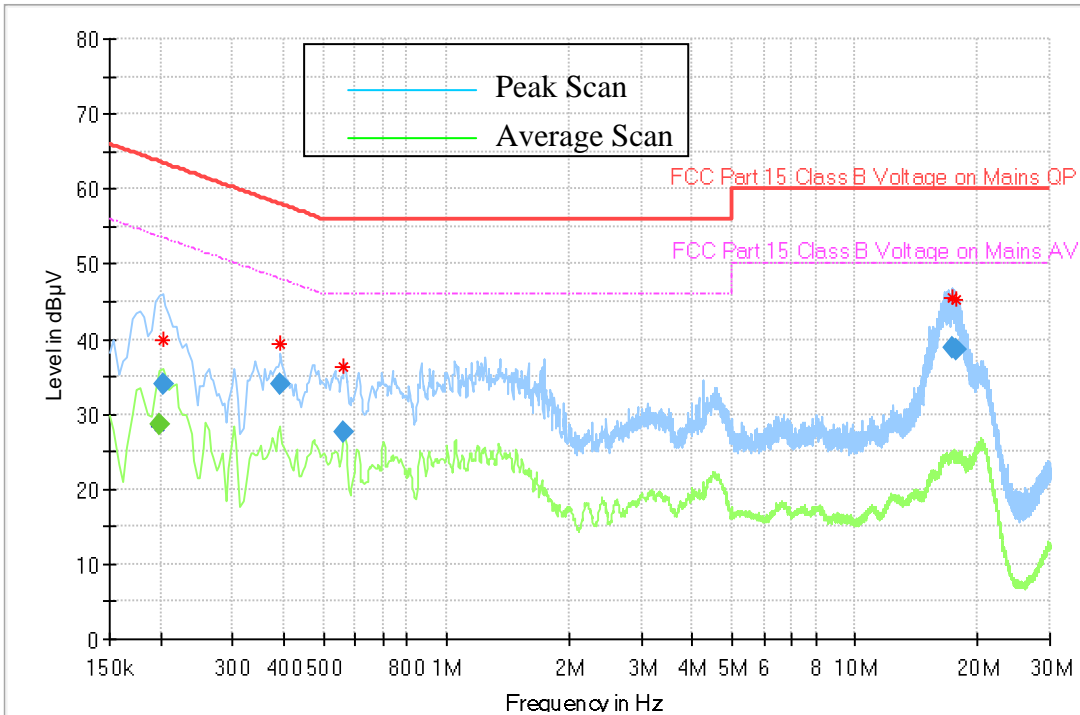

Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.198000	---	28.51	53.69	25.19	1000.0	9.000	N	ON	10.4	Pass
0.202000	34.03	---	63.53	29.50	1000.0	9.000	L1	ON	10.4	Pass
0.394000	33.90	---	57.98	24.08	1000.0	9.000	N	ON	10.3	Pass
0.562000	27.52	---	56.00	28.48	1000.0	9.000	N	ON	10.3	Pass
17.238000	38.86	---	60.00	21.14	1000.0	9.000	L1	ON	10.4	Pass
17.702000	38.62	---	60.00	21.38	1000.0	9.000	L1	ON	10.4	Pass

\* Expanded Uncertainty (U) = +/- 3.48dB

**END OF TEST REPORT**