



 <p>CERTIFICATE 2518.08</p> <p>MS ISO/IEC 17025          TF 53163          SAMMNC. 0225</p>																																						
<p><b>MOTOROLA PENANG ADV. COMM. LABORATORY</b>  <b>Motorola Solutions Malaysia Sdn. Bhd.</b>  <b>Plot 2A Medan Bayan Lepas,</b>  <b>Mukim 12, S.W.D. 11900 Bayan Lepas,</b>  <b>Penang, Malaysia.</b></p>	<p><b>FCC / ISED TEST REPORT</b>  <b>Report Revision : Rev.B</b></p>																																						
<table border="0"> <tr> <td><b>Date/s Tested</b></td> <td>: 04-Feb-2020 - 09-Feb-2020</td> <td rowspan="10" style="text-align: center; vertical-align: middle;">  </td> </tr> <tr> <td><b>Report Issue Date</b></td> <td>: 18-Feb-2020</td> </tr> <tr> <td><b>Manufacturer/Location</b></td> <td>: Motorola Solutions Malaysia Sdn Bhd                  Plot 2A, Medan Bayan Lepas, Mukim 12 SWD,                  11900, Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td><b>Requestor</b></td> <td>: SOH LEY KOON</td> </tr> <tr> <td><b>Product Type</b></td> <td>: Portable</td> </tr> <tr> <td><b>Product Version (PMN)</b></td> <td>: XPR 7550e</td> </tr> <tr> <td><b>Model Number (HVIN)</b></td> <td>: AAH56RDN9RA1AN (PMUE3675DBCNA)</td> </tr> <tr> <td><b>Frequency Band</b></td> <td>: 2.412-2.462 GHz</td> </tr> <tr> <td><b>Max RF Output Power</b></td> <td>: 802.11b - 22.4 mWatts                  802.11g - 8.3 mWatts                  802.11n - 12.6 mWatts</td> </tr> <tr> <td><b>Applicant Name</b></td> <td>: Motorola Solutions Inc</td> </tr> <tr> <td><b>Applicant Address</b></td> <td>: 8000 West Sunrise Boulevard,                  Fort Lauderdale, Florida 33322</td> </tr> <tr> <td><b>FCC Registrations</b></td> <td>: 461337</td> <td></td> </tr> <tr> <td><b>ISED Registrations</b></td> <td>: MY0001</td> <td></td> </tr> <tr> <td><b>Firmware Version (FVIN)</b></td> <td>: D02.20.02.0092</td> <td></td> </tr> </table> <p><b>The equipment was tested accordance to the requirement listed below:</b></p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;"><b>(2.4GHz Wifi)</b></td> <td style="text-align: right;"><b>PASS</b></td> </tr> <tr> <td><b>FCC 47CFR Part 15C</b></td> <td></td> </tr> <tr> <td><b>ISED RSS 247 Issue 2</b></td> <td></td> </tr> </table>		<b>Date/s Tested</b>	: 04-Feb-2020 - 09-Feb-2020		<b>Report Issue Date</b>	: 18-Feb-2020	<b>Manufacturer/Location</b>	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia	<b>Requestor</b>	: SOH LEY KOON	<b>Product Type</b>	: Portable	<b>Product Version (PMN)</b>	: XPR 7550e	<b>Model Number (HVIN)</b>	: AAH56RDN9RA1AN (PMUE3675DBCNA)	<b>Frequency Band</b>	: 2.412-2.462 GHz	<b>Max RF Output Power</b>	: 802.11b - 22.4 mWatts 802.11g - 8.3 mWatts 802.11n - 12.6 mWatts	<b>Applicant Name</b>	: Motorola Solutions Inc	<b>Applicant Address</b>	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	<b>FCC Registrations</b>	: 461337		<b>ISED Registrations</b>	: MY0001		<b>Firmware Version (FVIN)</b>	: D02.20.02.0092		<b>(2.4GHz Wifi)</b>	<b>PASS</b>	<b>FCC 47CFR Part 15C</b>		<b>ISED RSS 247 Issue 2</b>	
<b>Date/s Tested</b>	: 04-Feb-2020 - 09-Feb-2020																																						
<b>Report Issue Date</b>	: 18-Feb-2020																																						
<b>Manufacturer/Location</b>	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia																																						
<b>Requestor</b>	: SOH LEY KOON																																						
<b>Product Type</b>	: Portable																																						
<b>Product Version (PMN)</b>	: XPR 7550e																																						
<b>Model Number (HVIN)</b>	: AAH56RDN9RA1AN (PMUE3675DBCNA)																																						
<b>Frequency Band</b>	: 2.412-2.462 GHz																																						
<b>Max RF Output Power</b>	: 802.11b - 22.4 mWatts 802.11g - 8.3 mWatts 802.11n - 12.6 mWatts																																						
<b>Applicant Name</b>	: Motorola Solutions Inc																																						
<b>Applicant Address</b>	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																						
<b>FCC Registrations</b>	: 461337																																						
<b>ISED Registrations</b>	: MY0001																																						
<b>Firmware Version (FVIN)</b>	: D02.20.02.0092																																						
<b>(2.4GHz Wifi)</b>	<b>PASS</b>																																						
<b>FCC 47CFR Part 15C</b>																																							
<b>ISED RSS 247 Issue 2</b>																																							
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																																							
<p>Prepared By:</p>  <hr style="width: 200px; margin-left: 0;"/> <p><b>GAN BOON TEONG</b>  <b>Test Personnel</b></p>	<p>Approved Signatory:</p> <hr style="width: 200px; margin-left: 0;"/> <p><b>VINCENT FOONG CHUEN KIT</b>  <b>Deputy Technical Manager</b></p>																																						

## Table of Contents

1.0. General Information.....	3
1.1. Channel number and frequency information: .....	3
2.0. Summary of Test Results .....	4
3.0. Measurement Uncertainty .....	4
4.0. Equipment List.....	5
5.0. Test Mode Applicability and Test Channel Detail .....	6
6.0. Transmitter Test Parameters.....	9
6.1. 6dB Channel Bandwidth.....	9
6.1.1. Test Setup .....	9
6.1.2. Test Limits:.....	9
6.1.3. Test Data:.....	10
6.2. Conducted RF Output Power.....	16
6.2.1. Test Setup .....	16
6.2.2. Test Limits:.....	16
6.2.3. Test Data:.....	17
6.3. Duty Cycle of the test signal.....	20
6.3.1. Test Setup .....	20
6.3.2. Test Data.....	21
6.4. Maximum Peak Power Spectral Density .....	24
6.4.1. Test Setup .....	24
6.4.2. Test Limits .....	24
6.4.3. Test Result .....	25
6.5. Conducted Spurious Emission .....	28
6.5.1. Test Setup .....	28
6.5.2. Test Limits:.....	28
6.5.3. Test Result .....	28
6.6. Band edge Conducted Spurious Emission .....	43
6.6.1. Test Setup .....	43
6.6.2. Test Limits:.....	43
6.6.3. Test Result .....	43
6.7. Radiated Emission within restricted Bands .....	47
6.7.1. Test Setup .....	47
6.7.2. Test Limits:.....	48
6.7.3. Test Data:.....	49
6.8. AC Powerline Conducted Emission.....	103
6.8.1. Test Setup .....	103
6.8.2. Test Limits:.....	103
6.8.3. Test Result .....	104

### REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	18-Feb-2020	Gan Boon Teong
Rev.B	Amend sales model	30-June-2020	Vincent Foong

## 1.0. General Information

### EUT Description:

<b>Technologies</b>	2.4GHz Wi-Fi
<b>TX Frequency range</b>	2412MHz – 2462MHz
<b>Modulation Type</b>	DSSS, OFDM
<b>Connector type</b>	PROGRAMMING, TEST & ALIGNMENT CABLE
<b>Antenna type</b>	IFA BLUETOOTH/WIFI ANTENNA

### 1.1. Channel number and frequency information:

There are two bandwidth systems.

For 20MHz Bandwidth systems (802.11b, 802.11g, 802.11n), use channel 1 ~ channel 11

For 40MHz Bandwidth systems (802.11n), use channel 3 ~ channel 9

Channel	Frequency	Channel	Frequency
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BELIZE TIA4950 IMPRES HIGH CAP LI ION BATTERY 2850M2900T	MOTOROLA	PMNN4489A
Programming, Test & Alignment Cable	MOTOROLA	PMKN4013C

### General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

**FCC 47 CFR Part 15 Subpart C**  
**KDB 558074 D01 15.247 Meas Guidance v05**  
**ANSI C63.10-2013**

### Deviation from standard

Not applicable as no deviation from standard test method

## 2.0. Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark	Serial number tested
15.247 (a)(2)	RSS-247 5.2(a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: 802.11b: 13.499 MHz(13M5G1D) 802.11g: 16.813 MHz(16M8D1D) 802.11n: 17.930 MHz(17M9D1D)	871TWB3876
15.247 (b)(3)	RSS-247 5.4(d)	Conducted RF Output Power (Average)	Pass	Highest output power: 802.11b: 12.909 dBm 802.11g: 8.772 dBm 802.11n: 10.704 dBm	871TWB3876
15.247(e)	RSS-247 5.2(b)	Maximum Power Spectral Density	Pass	Meet the limit requirement.	871TWB3876
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	Pass	Worst case emission: 802.11b: -39.69 dBm 802.11g: -38.86 dBm 802.11n: -38.80 dBm	871TWB3876
15.247 (d)	RSS-247 5.5	Band edge Conducted Spurious Emission	Pass	Worst case emission: 802.11b: -42.44 dBm 802.11g: -45.52 dBm 802.11n: -42.41 dBm	871TWB3876
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: 802.11b: No spur detect (Noise Floor) 802.11g: No spur detect (Noise Floor) 802.11n: No spur detect (Noise Floor)	871TWB3893
15.207	RSS-Gen 8.8	AC Power Line Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode	NA
15.203		Antenna requirement	NA	Internal antenna is not accessible to the enduser	NA

NA → Not Available

## 3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

#### 4.0. Equipment List

##### Bluetooth ATE # 1 (SW Version: Ate Main\_3.1.10\_R2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SPECTRUM ANALYZER	FSEK30	838495/014	19-Jul-19	19-Jul-20
SPECTRUM ANALYZER	E4443A	MY46181974	9-Aug-18	9-Aug-20
POWER SUPPLY	6033A	3004A05137	24-Jul-18	24-Jul-20
CHAMBER	SH-641	92003821	26-Sep-19	26-Sep-20
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

##### Radiated Emission Station (SW Version: EMC FCC RE v1.6.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY ( 0-60V / 0-50A, 1000W )	6032A	MY41001736	25-May-19	25-May-20
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Jul-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Jul-20
5m Semi-anechoic Chamber	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112D	30991	5-Aug-19	5-Aug-20
BILOG ANTENNA	CBL6112B	2964	16-Feb-18	16-Feb-20
DATA LOGGER	SDL500	A.016800	19-Mar-19	18-Mar-20
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	23-Jun-19	23-Jun-20
18 - 40GHz PREAMPLIFIER	Miteq Hi Gain Sucoflex	001	Not Required	Not Required
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-20
LOOP ANTENNA	6502	00208416	5-Sep-19	5-Sep-20

## 5.0. Test Mode Applicability and Test Channel Detail

The device employs MIMO technology. Below are the possible configurations.

WLAN Configurations		Mode					
		SISO		Spatial Diversity Multiplexing (MIMO)		Cyclic Delay Diversity (MIMO)	
2.4GHz	Antenna	Primary	Secondary	Primary	Secondary	Primary	Secondary
	802.11b	√	√	x	x	x	x
	802.11g	√	√	x	x	x	x
	802.11n (HT20)	√	√	x	x	x	x
802.11n (HT40)	x	x	x	x	x	x	

√ = Support;  
 x = NOT Support

**Note:** This Device supports simultaneous transmission operation, which allows for two SISO or two MIMO channels to operate independent of one another in the 2.4GHz band on each antenna. 802.11n mode is capable of transmitting simultaneously on two antennas using Cyclic Delay Diversity and Spatial Diversity Multiplexing (2x2 MIMO).

The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report.

**Radiated Emission Test (Above 1GHz)**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Date Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2	SISO	22.8°C, 70.1%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	22.8°C, 70.1%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD (MIMO)	22.8°C, 70.1%RH
Test Mode	802.11n (HT40)	3 to 9	3,6,9	OFDM	BPSK	6.5	SISO CDD (MIMO)	NA

**Radiated Emission Test (Below 1GHz)**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Date Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2	SISO	22.8°C, 70.1%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	22.8°C, 70.1%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD (MIMO)	22.8°C, 70.1%RH
Test Mode	802.11n (HT40)	3 to 9	3,6,9	OFDM	BPSK	6.5	SISO CDD (MIMO)	NA

**Power Line Conducted Emission Test**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Data Rate (Mbps)	Environmental Conditions
Application Mode	802.11bgn mixed	1 to 11	AUTO	DSSS, OFDM	AUTO	AUTO	NA

**Antenna Port Conducted Measurement:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Data Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2	SISO	25°C, 54.8%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	25°C, 54.8%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD (MIMO)	25°C, 54.8%RH
Test Mode	802.11n (HT40)	1 to 11	3,6,9	OFDM	BPSK	6.5	SISO CDD (MIMO)	NA

**Duty Cycle of Test Signal**


802.11b, 802.11g and 802.11n : Duty cycle of test signal is  $\geq 98\%$ . (Refer to Clause 6.3 for duty cycle test signal)



## 6.0. Transmitter Test Parameters

### 6.1. 6dB Channel Bandwidth

#### 6.1.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max hold
  - e. Sweep = auto
- e) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.
- f) Measure every antenna port by repeat the step above for MIMO measurement.


#### 6.1.2. Test Limits:


<b>Normal Condition (25 ° C)</b>
<b>≥500 kHz</b>

6.1.3. Test Data:

**802.11 b**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11b	DSSS	QPSK	2	2412	9.753	13.482	Pass
802.11b	DSSS	QPSK	2	2437	9.769	13.499	Pass
802.11b	DSSS	QPSK	2	2462	9.768	13.484	Pass

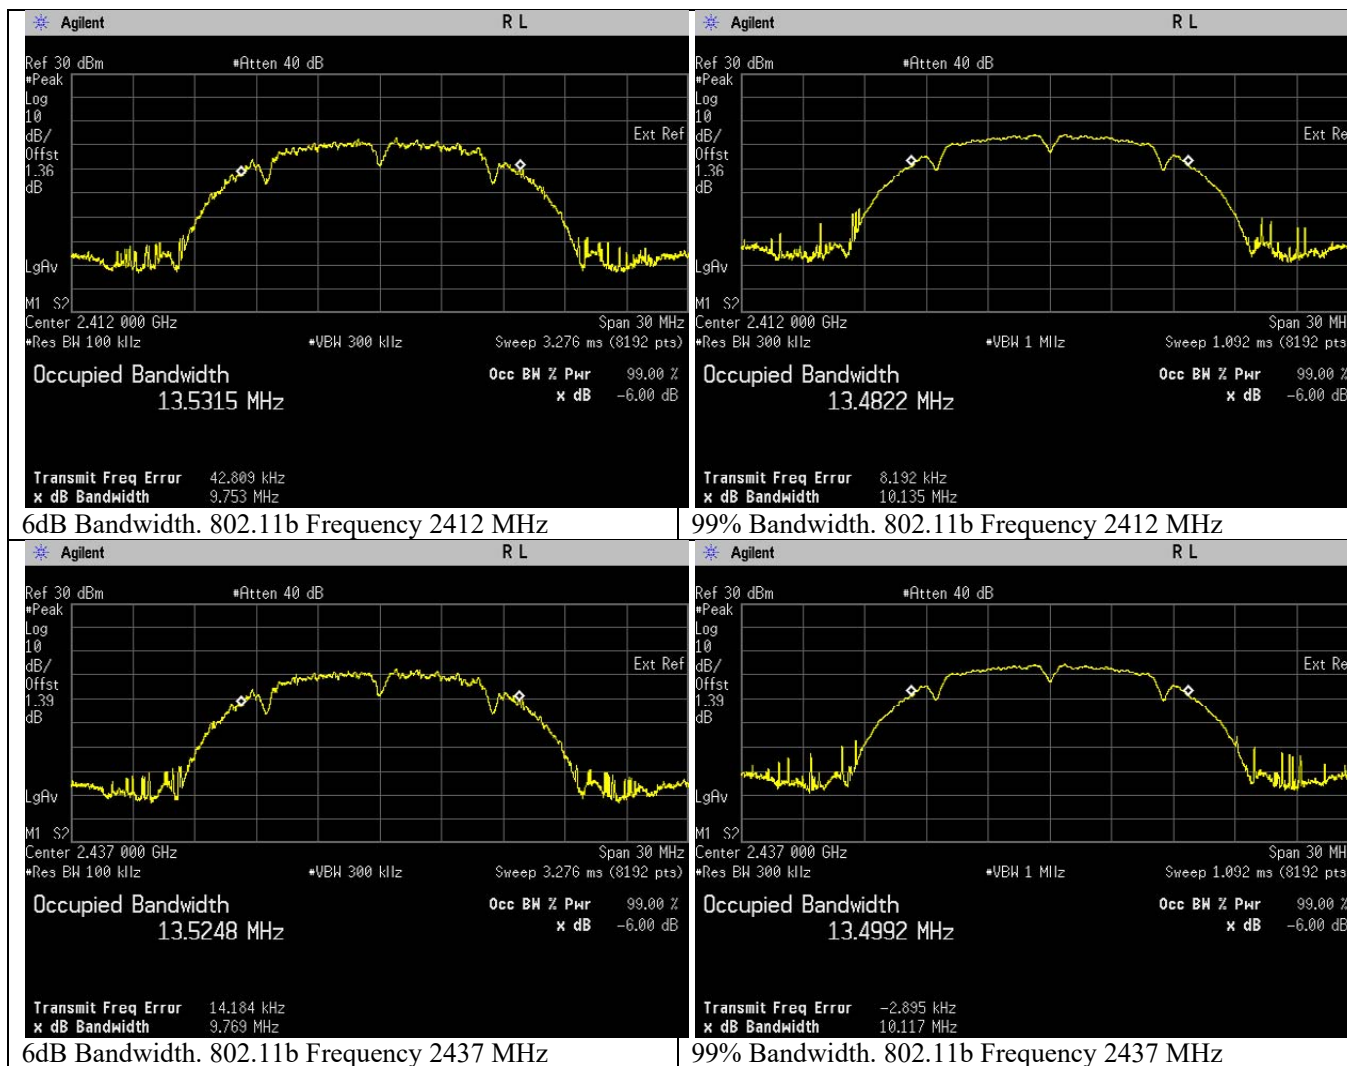


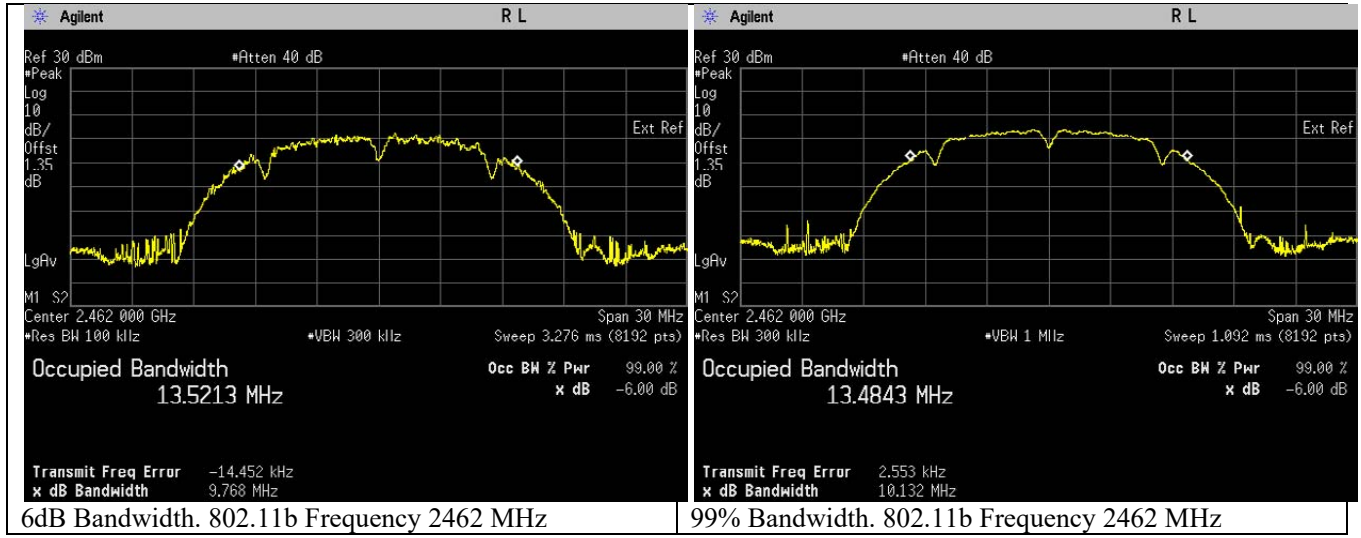

**802.11 g**



Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11g	OFDM	BPSK	6	2412	16.365	16.784	Pass
802.11g	OFDM	BPSK	6	2437	16.362	16.813	Pass
802.11g	OFDM	BPSK	6	2462	16.359	16.781	Pass

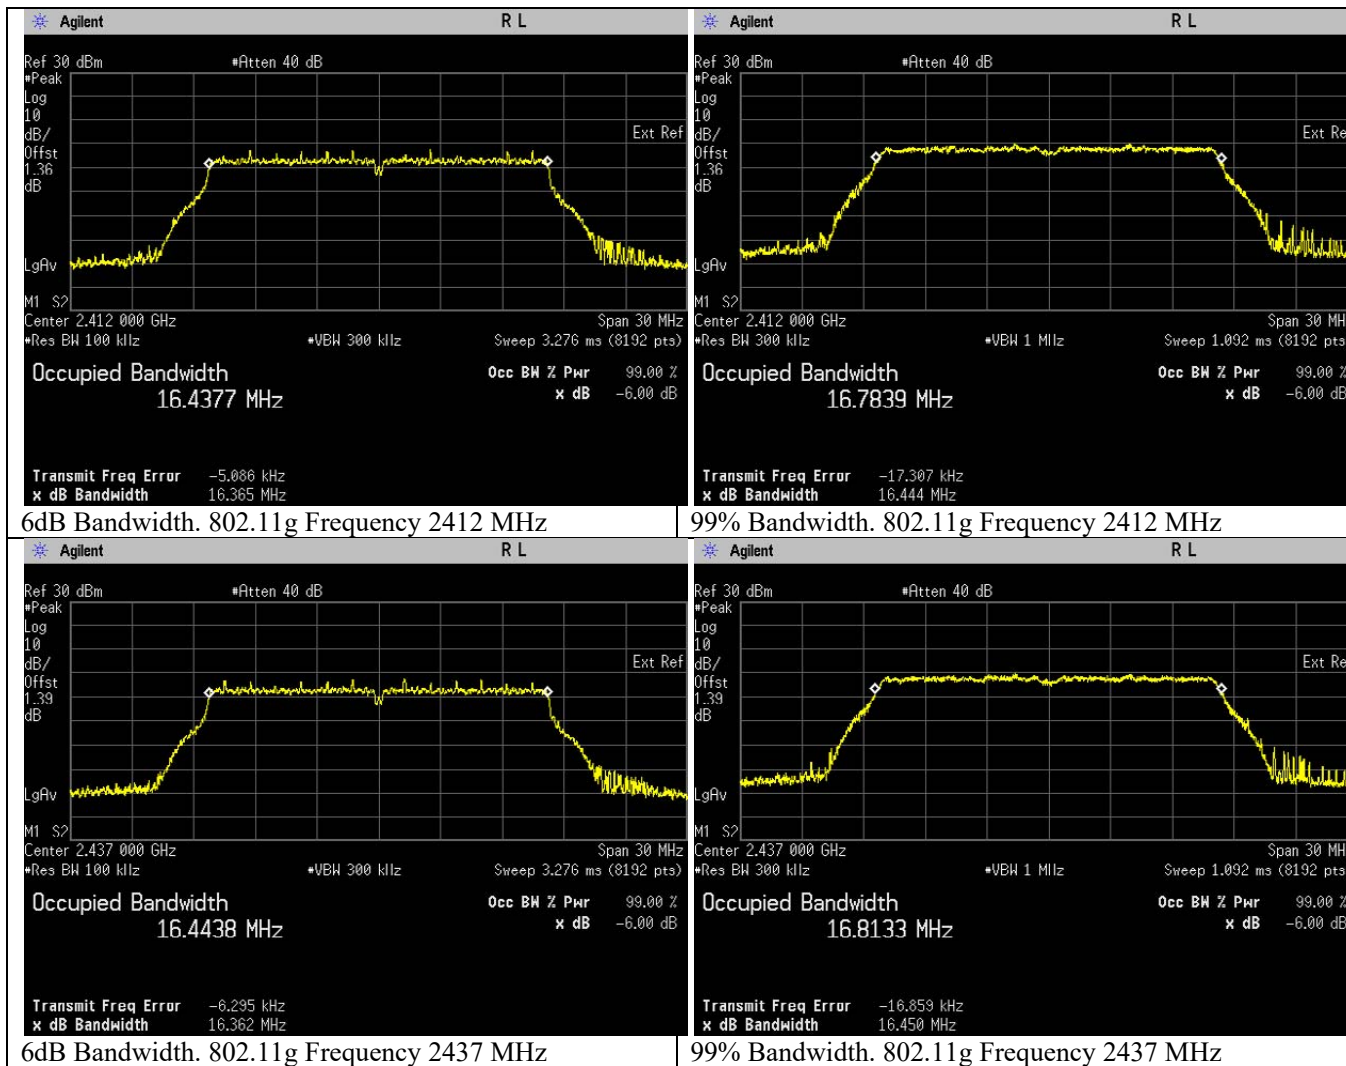

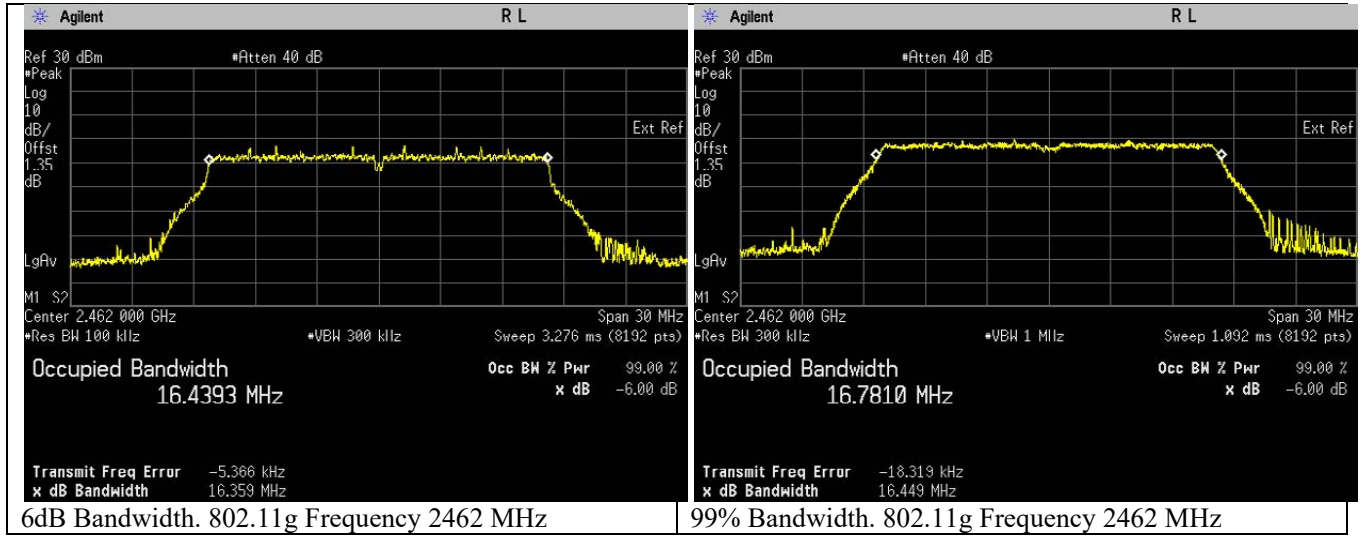



**802.11n (HT20)**

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11n	OFDM	DBPSK	6.5	2412	17.602	17.901	Pass
802.11n	OFDM	DBPSK	6.5	2437	17.592	17.930	Pass
802.11n	OFDM	DBPSK	6.5	2462	17.608	17.921	Pass

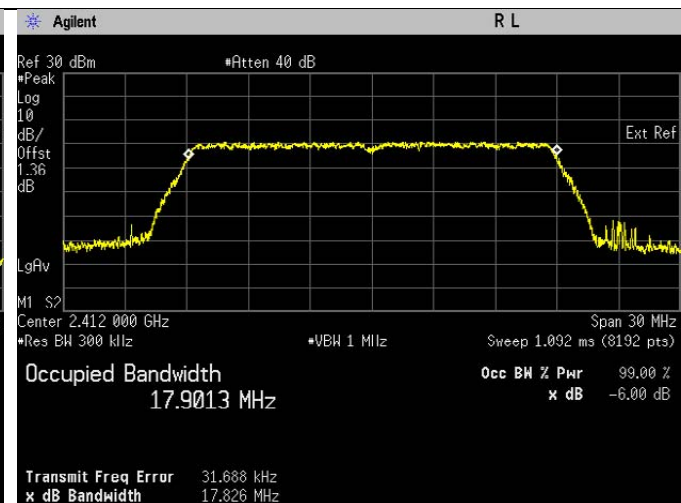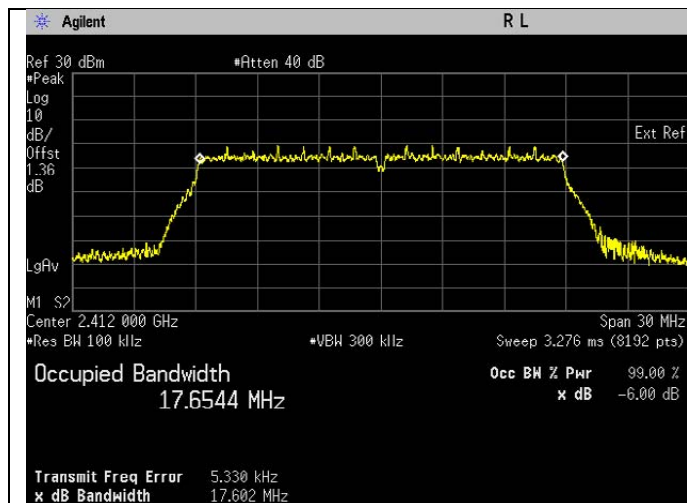


6dB Bandwidth. 802.11n Frequency 2412 MHz

99% Bandwidth. 802.11n Frequency 2412 MHz

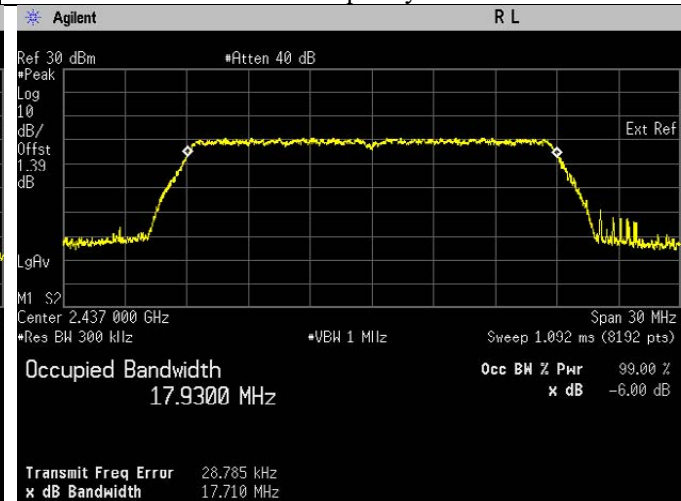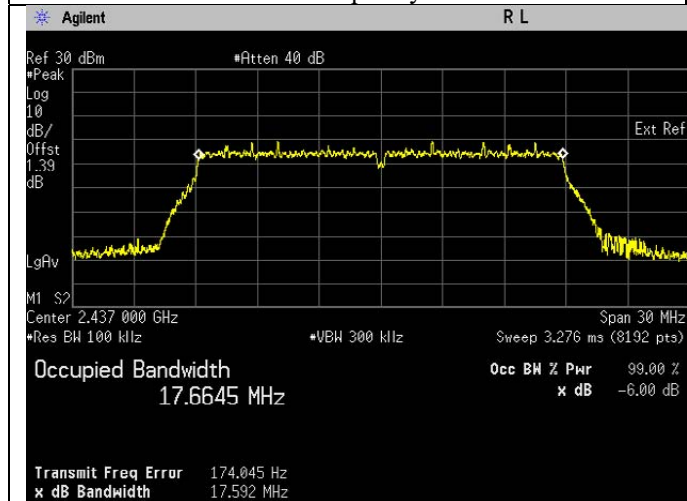


6dB Bandwidth. 802.11n Frequency 2437 MHz

99% Bandwidth. 802.11n Frequency 2437 MHz

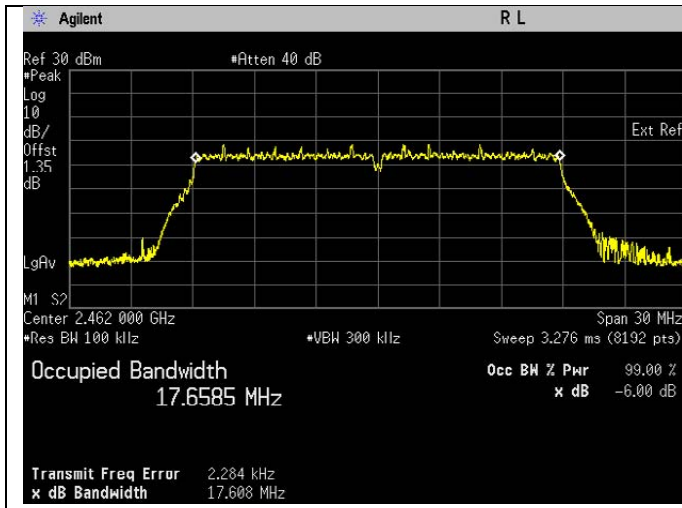


6dB Bandwidth. 802.1 In Frequency 2462 MHz

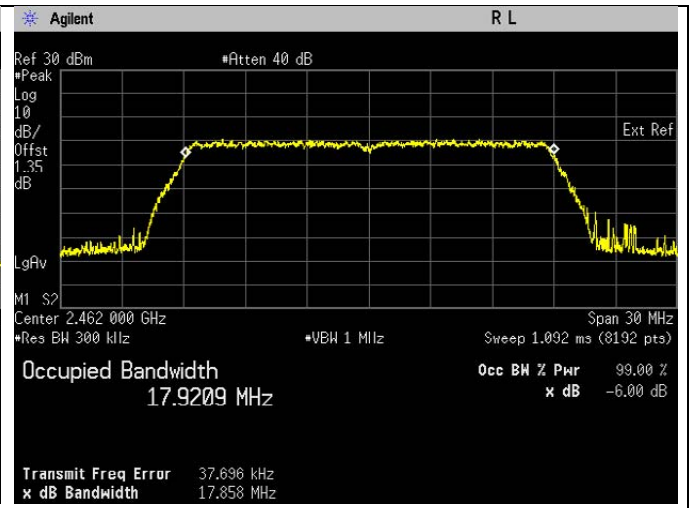

99% Bandwidth. 802.1 In Frequency 2462 MHz

## 6.2. Conducted RF Output Power

### 6.2.1. Test Setup

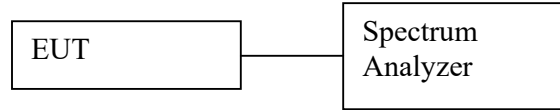

#### Average

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Measure the duty cycle of transmitter output signal.
- d) Setting of Spectrum analyzer :
  - a. Set the RBW = 300 kHz.
  - b. Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - c. Set the span  $\geq [1.5 \times \text{OBW bandwidth}]$ .
  - d. Detector = average.
  - e. Sweep time = auto couple.
  - f. Trace mode = free run.
  - g. Allow trace to fully stabilize.
- e) Add in duty cycle correction into final test result.
- f) Duty cycle correction is calculated as below:  
 $10 \log (1/x)$
- g) Measure every antenna port by repeat the step above for MIMO measurement.

### 6.2.2. Test Limits:

<b>Normal Condition (25 ° C)</b>
<b><math>\leq 1 \text{ Watt}(30 \text{ dBm})</math></b>




6.2.3. Test Data:


**802.11b**

Output Power = Band Power + Duty Cycle Factor  
 = Band Power + 0.005dBm


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11b	DSSS	QPSK	2	2412	12.897	Pass
802.11b	DSSS	QPSK	2	2437	12.909	Pass
802.11b	DSSS	QPSK	2	2462	12.583	Pass

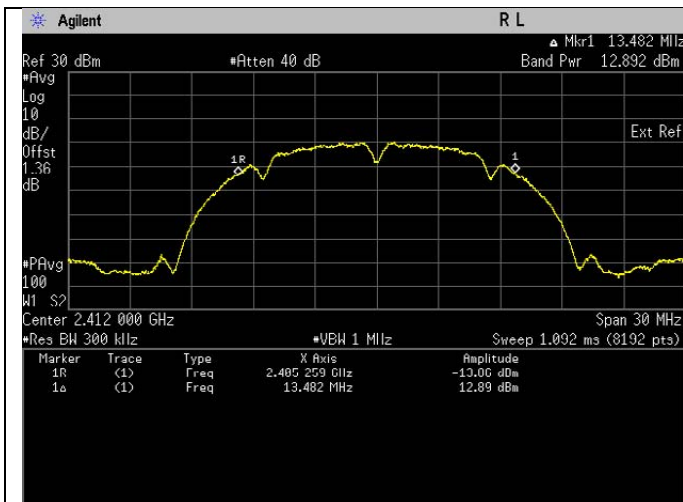


Frequency 802.11b MHz

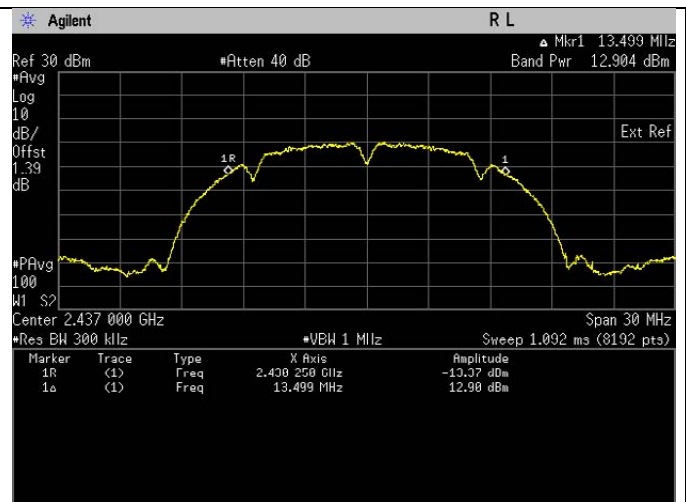

Frequency 802.11b MHz

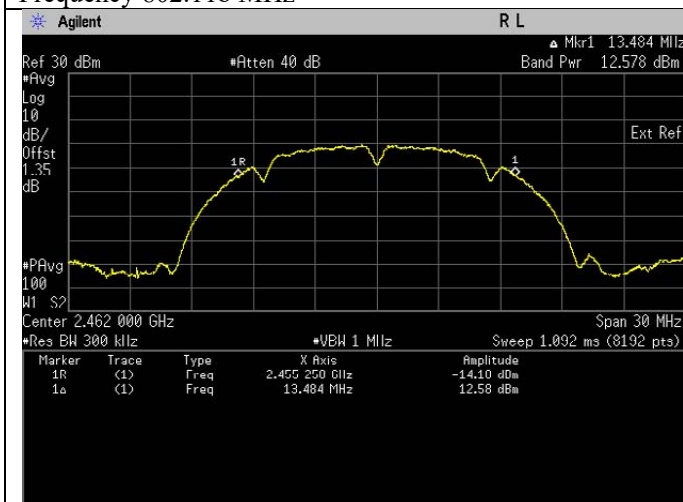

Frequency 802.11b MHz

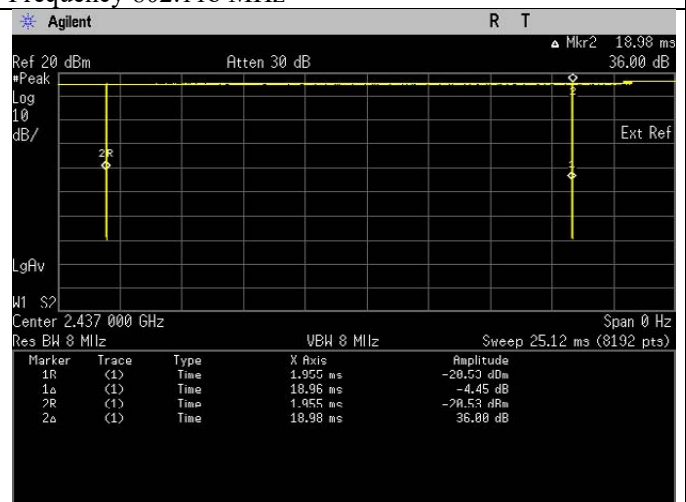


Duty Cycle


**802.11g**

Output Power = Band Power + Duty Cycle Factor  
 = Band Power + 0.032dBm


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	8.748	Pass
802.11g	OFDM	BPSK	6	2437	8.772	Pass
802.11g	OFDM	BPSK	6	2462	8.457	Pass

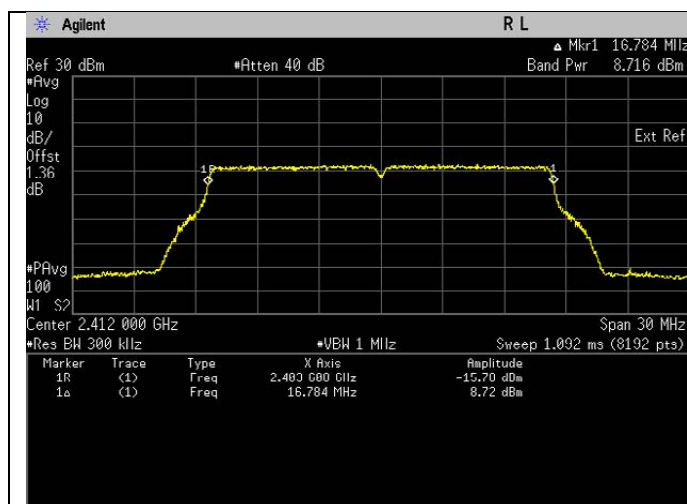


Frequency 802.11g MHz

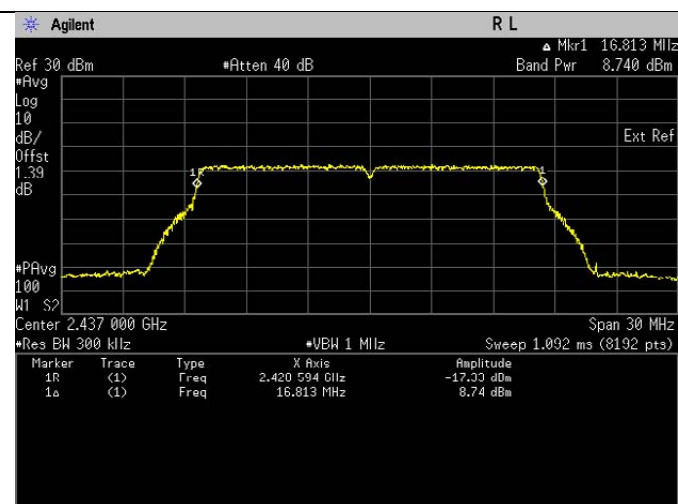

Frequency 802.11g MHz

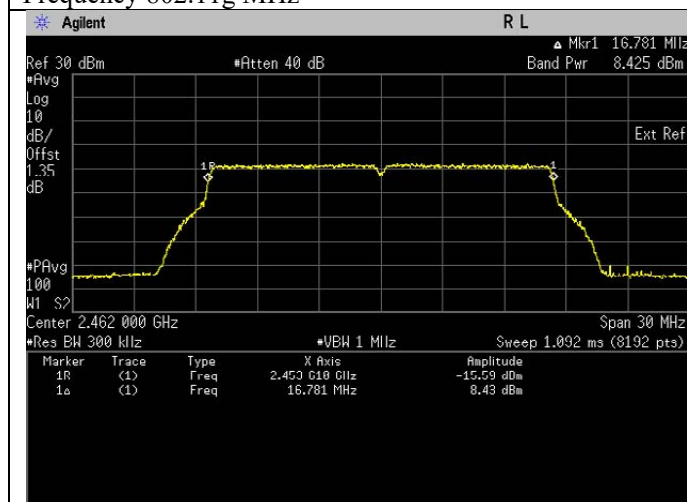

Frequency 802.11g MHz

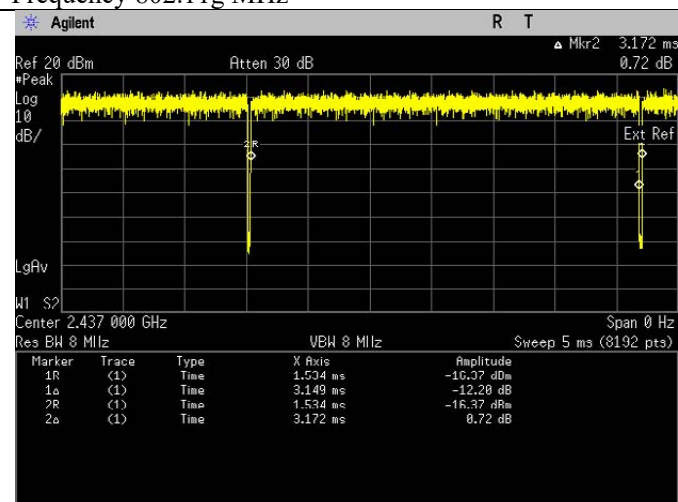


Duty Cycle

**802.11n (HT20)**


$$\text{Output Power} = \text{Band Power} + \text{Duty Cycle Factor}$$

$$= \text{Band Power} + 0.034\text{dBm}$$


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11n	OFDM	DBPSK	6.5	2412	10.704	Pass
802.11n	OFDM	DBPSK	6.5	2437	10.603	Pass
802.11n	OFDM	DBPSK	6.5	2462	10.163	Pass

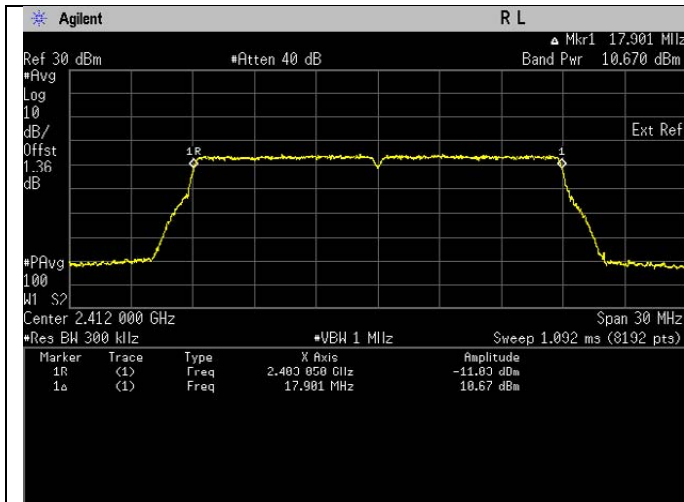


Frequency 802.11n MHz

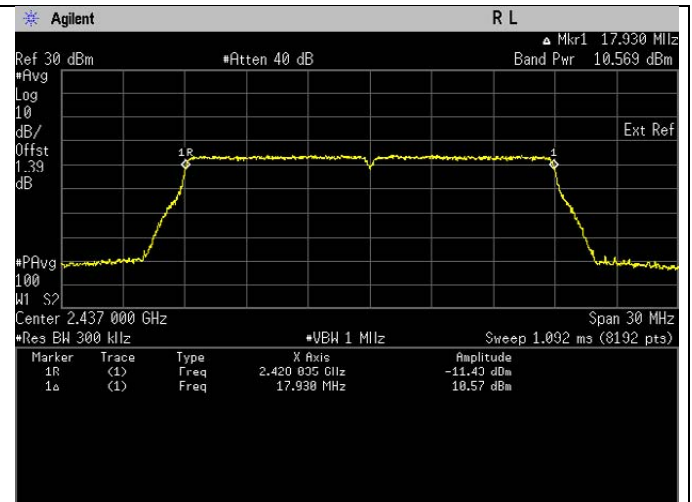

Frequency 802.11n MHz

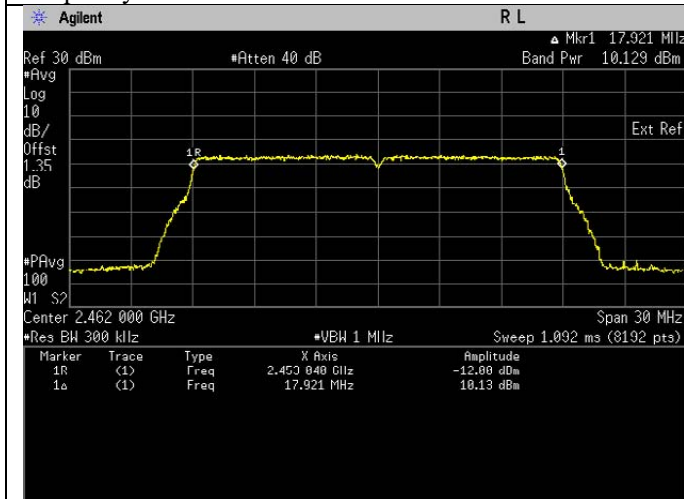


Frequency 802.11n MHz

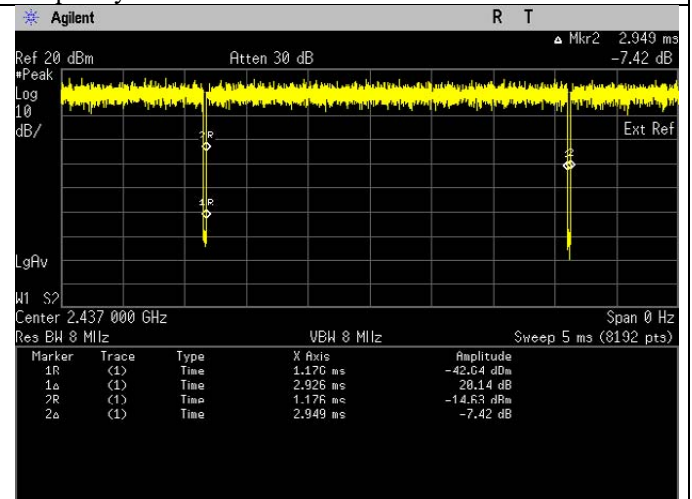

Duty Cycle

### 6.3.Duty Cycle of the test signal


#### 6.3.1. Test Setup

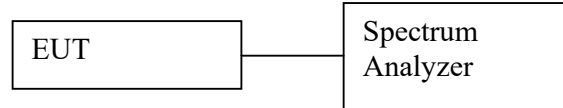

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. Set the RBW = 10 MHz or the highest RBW available on spectrum analyzer.
  - b. Set the VBW  $\geq$  RBW.
  - c. Set the span  $\geq$  [1.5  $\times$  DTS bandwidth].
  - d. Detector = Peak.
  - e. Sweep time = 10ms or others that allow to measure accurate duty cycle.
  - f. Trace mode = max hold.
  - g. Allow trace to fully stabilize.
- 5) Record the duty cycle as X and save the plot.
- 6) Measure every antenna port by repeat the step above for MIMO measurement.

### 6.3.2. Test Data

#### 802.11b

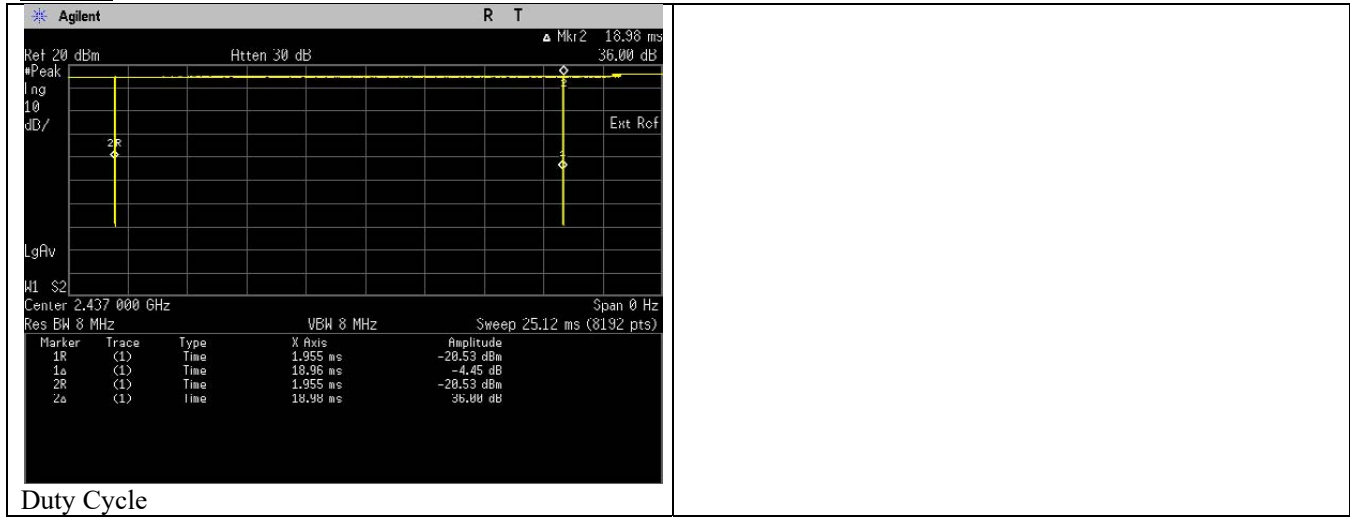


On time (ms)	18.96
On + Off Time (ms)	18.98
Duty cycle	0.9989
Duty Cycle factor	0.005

\*Duty cycle = On time/ On +off time

\*Duty Cycle factor = 10\*log(1/Duty Cycle)

**802.11g**

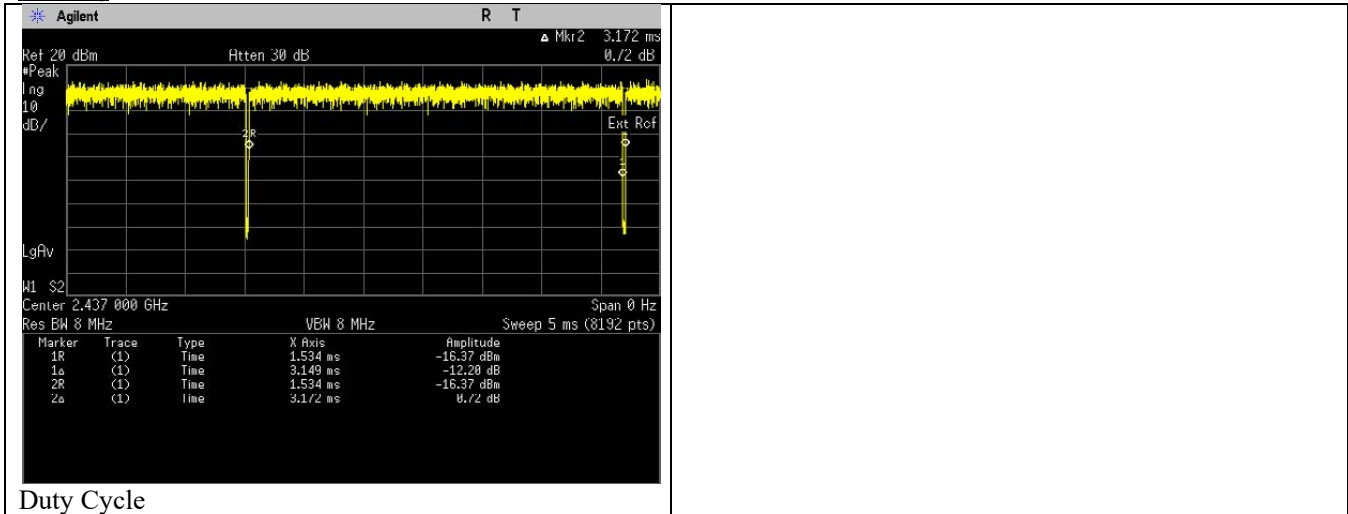


Duty Cycle

On time (ms)	3.149
On + Off Time (ms)	3.172
Duty cycle	0.9927
Duty Cycle factor	0.032

\*Duty cycle = On time/ On +off time

\*Duty Cycle factor =  $10 \cdot \log(1/\text{Duty Cycle})$

**802.11n (HT20)**

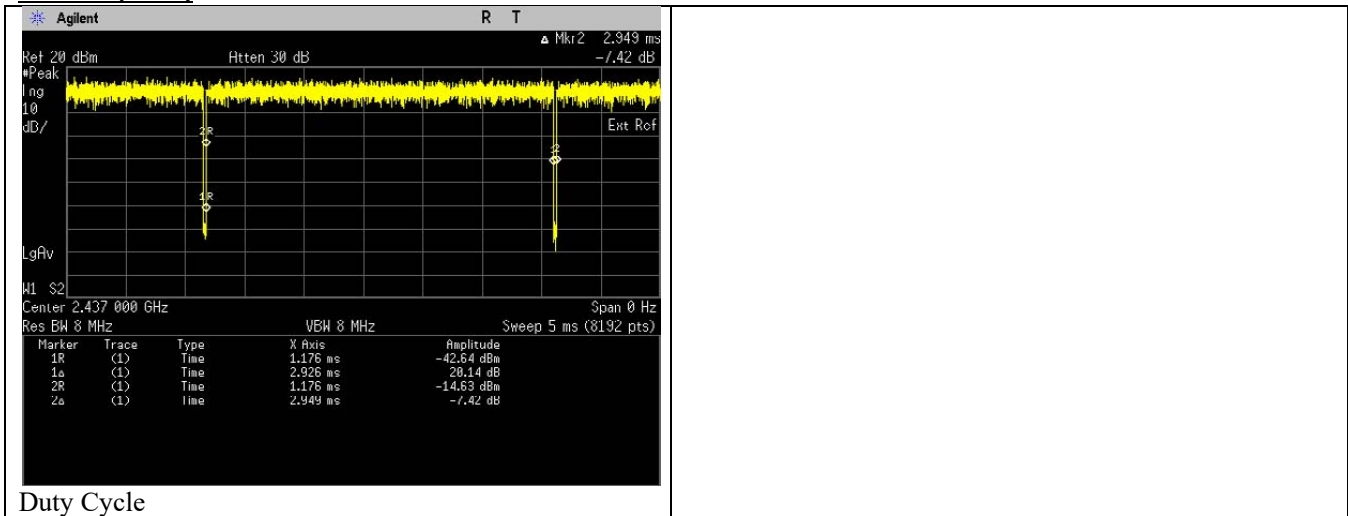


On time (ms)	2.926
On + Off Time (ms)	2.949
Duty cycle	0.9922
Duty Cycle factor	0.034

\*Duty cycle = On time/ On +off time

\*Duty Cycle factor =  $10 \cdot \log(1/\text{Duty Cycle})$

## 6.4. Maximum Peak Power Spectral Density

### 6.4.1. Test Setup



#### Maximum Peak

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. Set analyzer center frequency to DTS channel center frequency.
  - b. Set the span to 1.5 times the DTS bandwidth.
  - c. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - d. Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e. Detector = peak.
  - f. Sweep time = auto couple.
  - g. Trace mode = max hold.
  - h. Allow trace to fully stabilize.
  - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- e) Measure every antenna port by repeat the step above for MIMO measurement.

### 6.4.2. Test Limits


<b>Normal Condition (25 ° C)</b>
<b><math>\leq 8 \text{ dBm/3kHz}</math></b>



### 6.4.3. Test Result


#### 802.11b

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/3kHz)	Status
802.11b	DSSS	QPSK	2	2412	-8.95	Pass
802.11b	DSSS	QPSK	2	2437	-9.33	Pass
802.11b	DSSS	QPSK	2	2462	-9.64	Pass

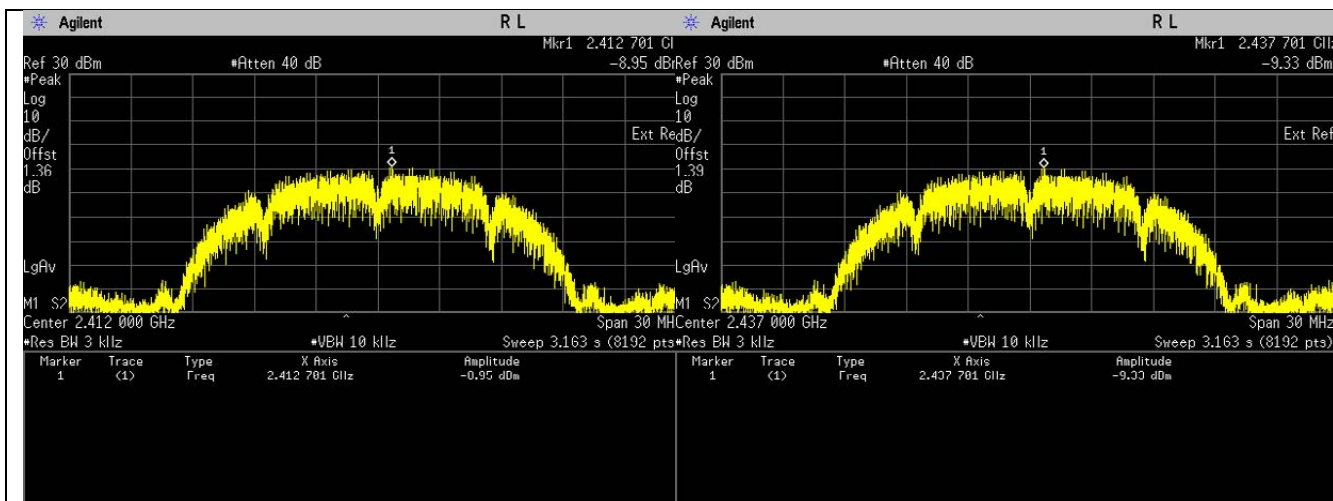

Maximum Power Spectral Density. 802.11b Frequency 2412 MHz


Maximum Power Spectral Density. 802.11b Frequency 2437 MHz

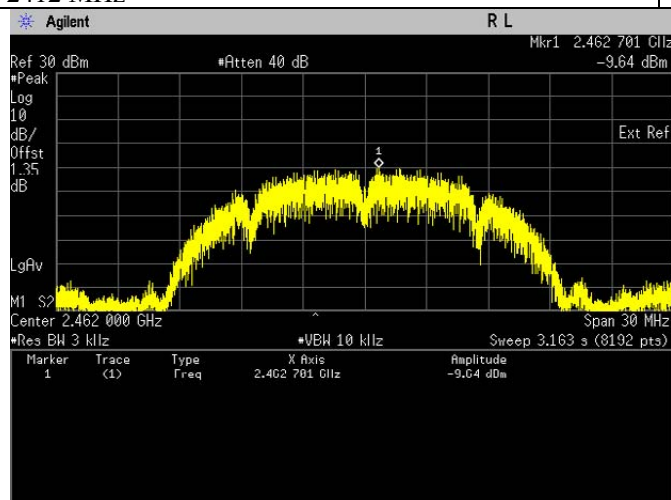


Maximum Power Spectral Density. 802.11b Frequency 2462 MHz

**802.11g**


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/3kHz)	Status
802.11g	OFDM	BPSK	6	2412	-15.55	Pass
802.11g	OFDM	BPSK	6	2437	-15.63	Pass
802.11g	OFDM	BPSK	6	2462	-15.84	Pass

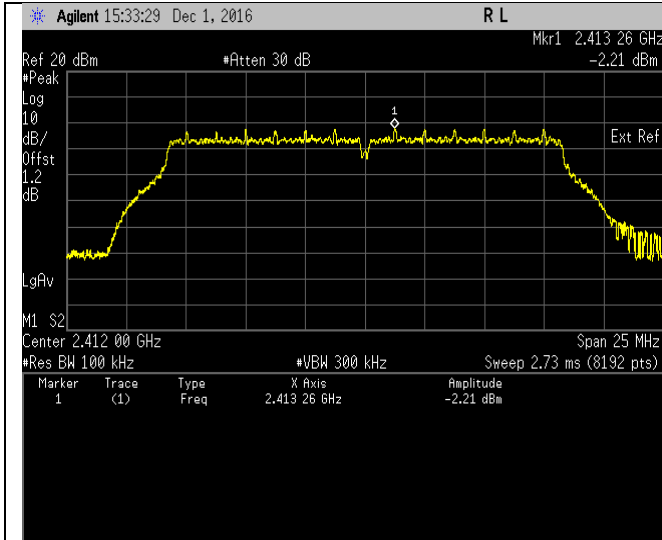

Frequency 2412 MHz, Antenna 1

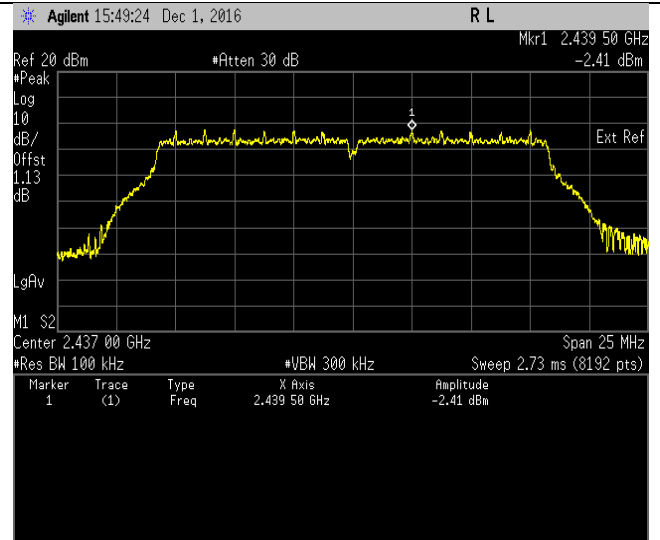


Frequency 2437 MHz, Antenna 1

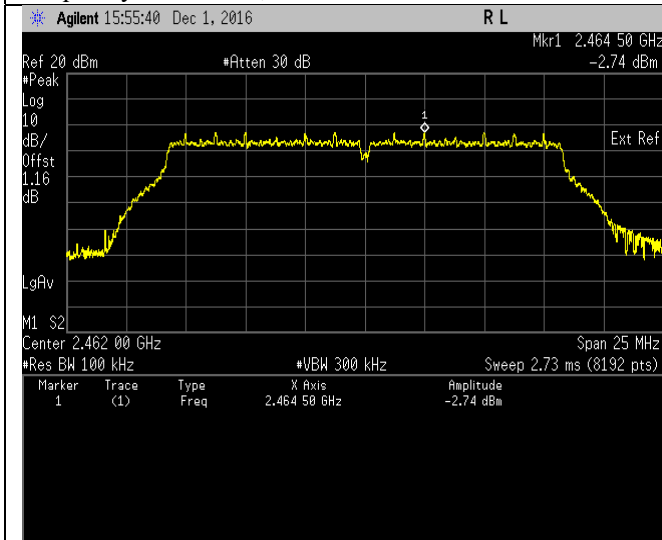


Frequency 2462 MHz, Antenna 1

**802.11n (HT20)**


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/3kHz)	Status
802.11n	OFDM	DBPSK	6.5	2412	-14.47	Pass
802.11n	OFDM	DBPSK	6.5	2437	-14.45	Pass
802.11n	OFDM	DBPSK	6.5	2462	-14.43	Pass

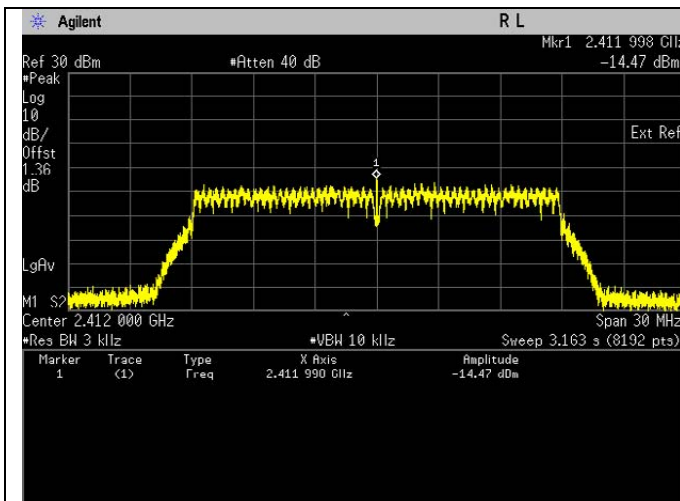

Maximum Power Spectral Density. 802.11n Frequency 2412 MHz

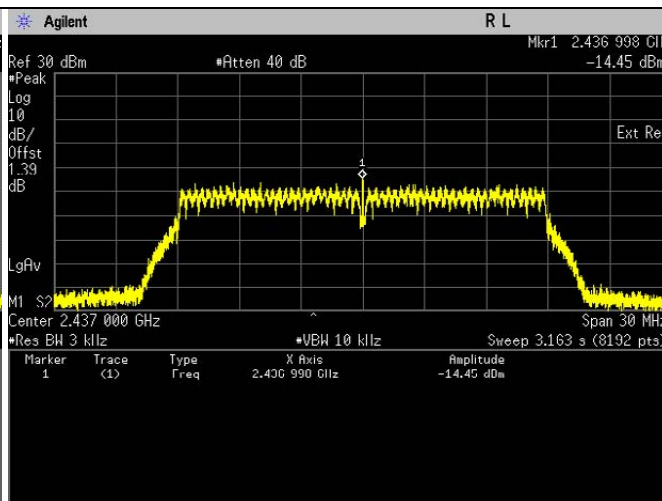


Maximum Power Spectral Density. 802.11n Frequency 2437 MHz

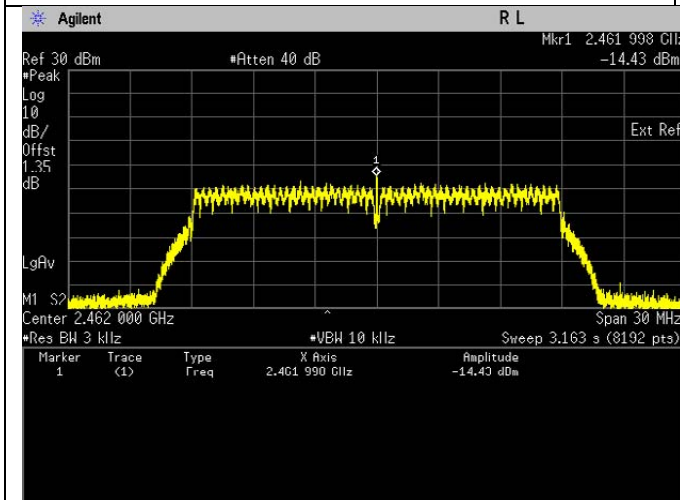

Maximum Power Spectral Density. 802.11n Frequency 2462 MHz

## 6.5. Conducted Spurious Emission

### 6.5.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- e) Use the peak marker function to measure highest emission and scan up to 10<sup>th</sup> harmonic.
- f) Measure every antenna port by repeat the step above for MIMO measurement.

### 6.5.2. Test Limits:


<b>Normal Condition (25 ° C)</b>
<b>Shall be at least 30 dB below peak (max) power.</b>

### 6.5.3. Test Result


#### 802.11b

##### **Antenna 1:**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11b	DSSS	QPSK	2	2412	6973.95	-39.73	Pass
					14188.38	-39.92	Pass
					6763.53	-40.23	Pass
802.11b	DSSS	QPSK	2	2437	6983.97	-39.69	Pass
					14188.38	-39.83	Pass
					6663.33	-40.05	Pass
802.11b	DSSS	QPSK	2	2462	14188.38	-39.75	Pass
					6993.99	-39.89	Pass
					6713.43	-40.20	Pass

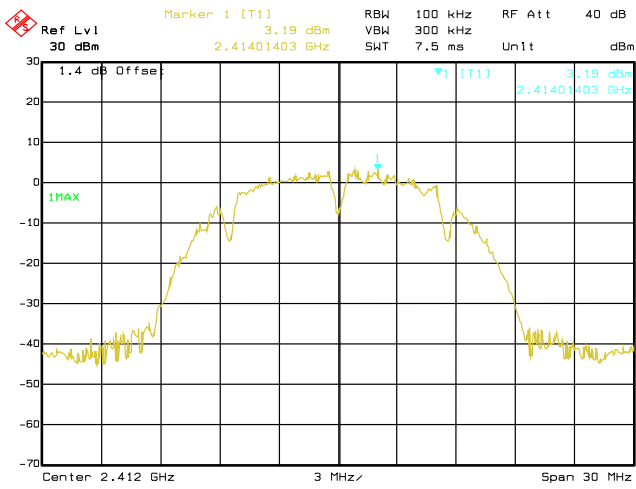


Date: 05.FEB.2020 08:09:48  
**Conducted Emissions. 802.11b, Frequency 2412 MHz Reference Level**

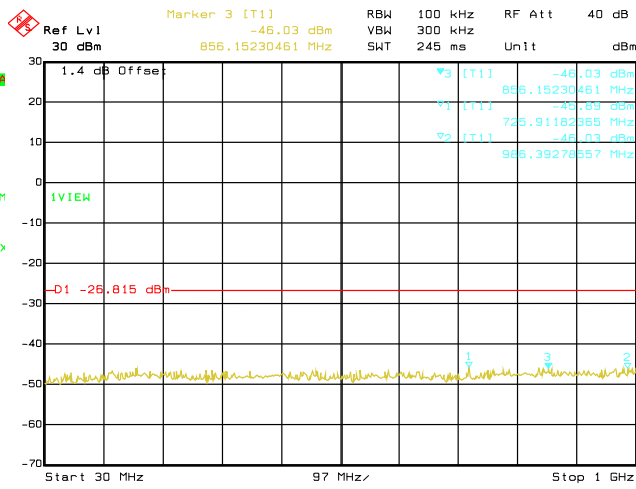


Date: 05.FEB.2020 08:10:42  
**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz**

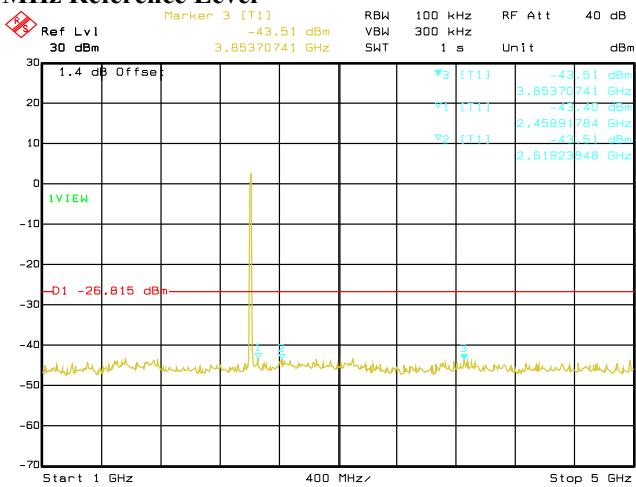


Date: 05.FEB.2020 08:11:36  
**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz**

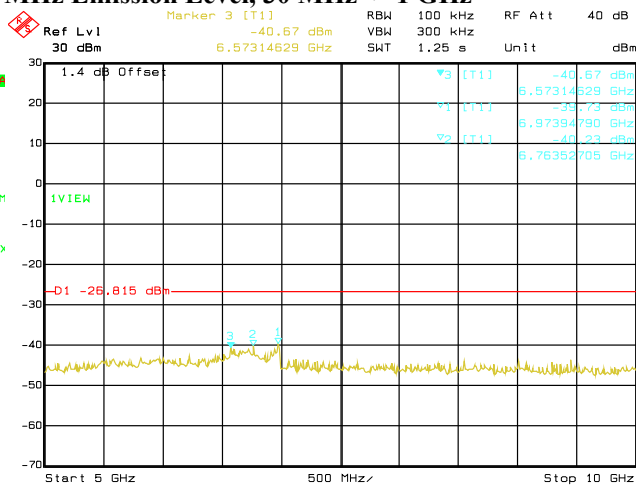


Date: 05.FEB.2020 08:12:30  
**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz**

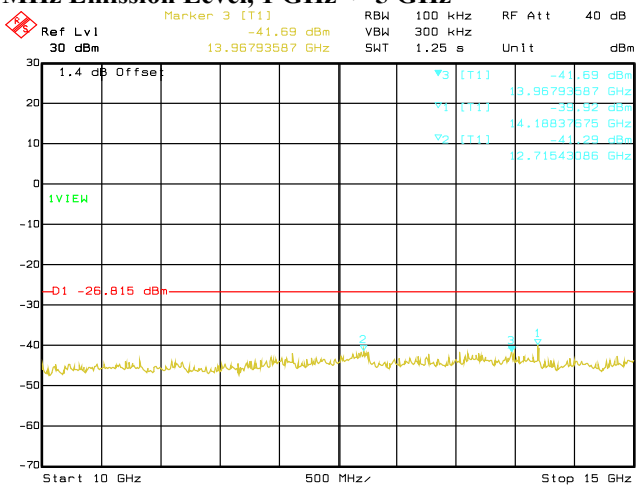

Date: 05.FEB.2020 08:13:23  
**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz**

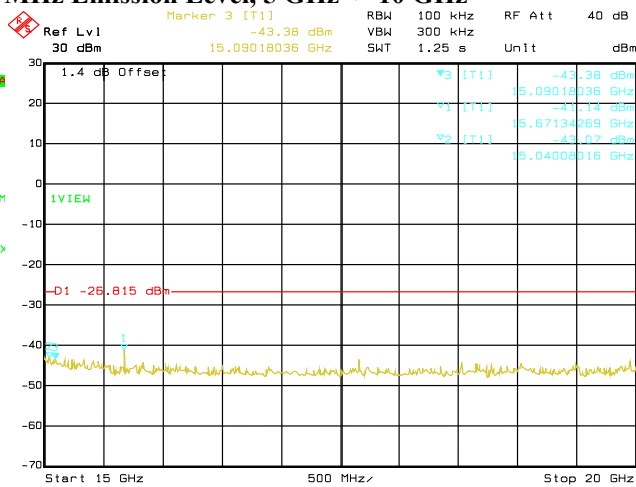


Date: 05.FEB.2020 08:14:16  
**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz**

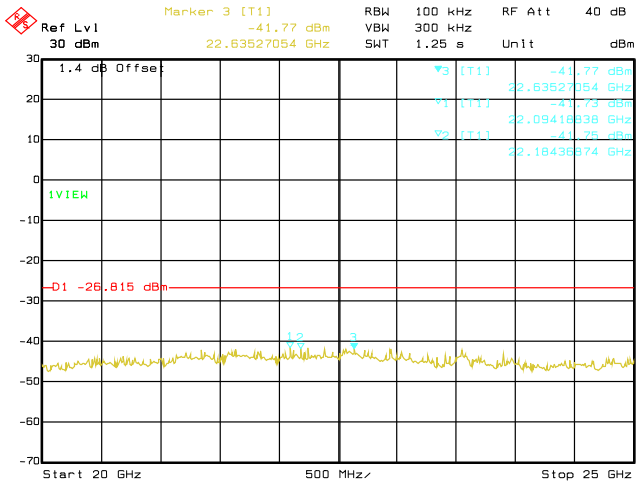


Date: 05.FEB.2020 08:15:09

**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz**

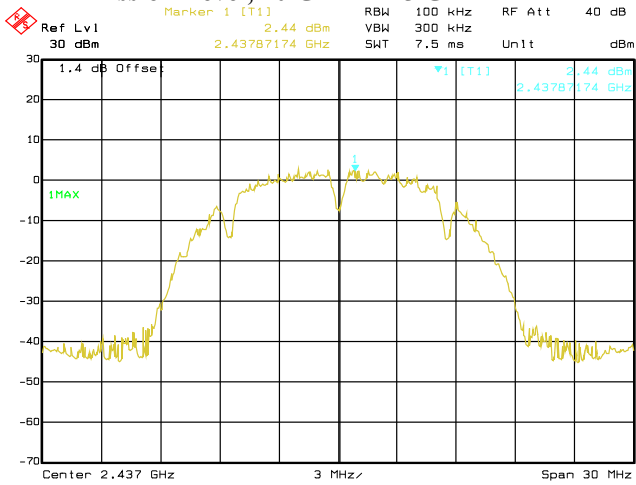


Date: 05.FEB.2020 08:19:57

**Conducted Emissions. 802.11b, Frequency 2437 MHz Reference Level**

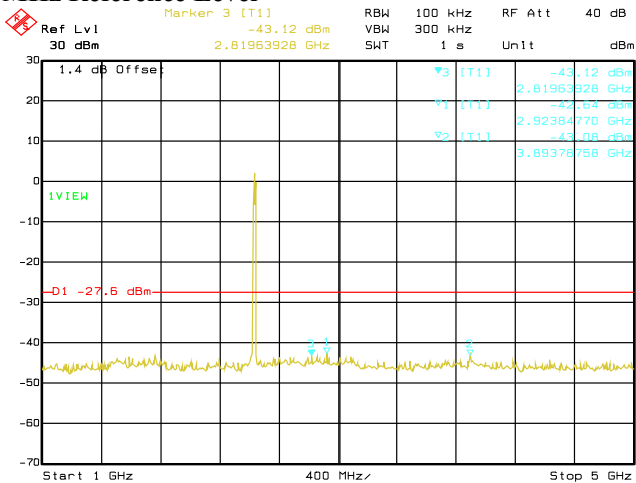


Date: 05.FEB.2020 08:21:45

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz**

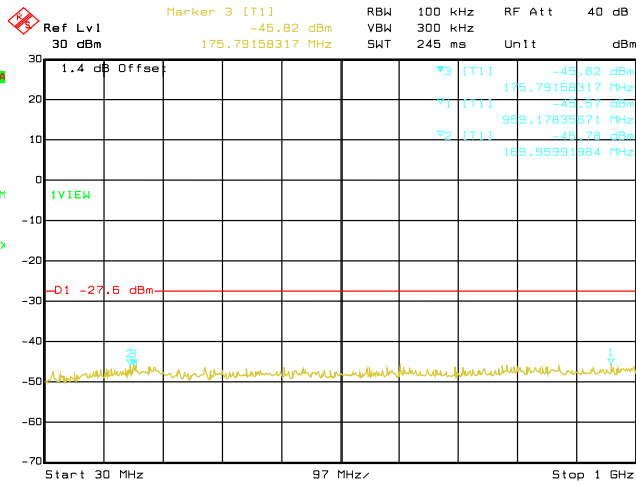


Date: 05.FEB.2020 08:20:51

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz**

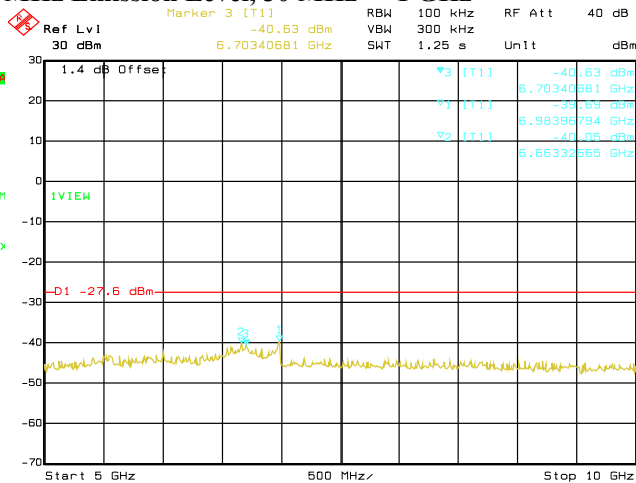


Date: 05.FEB.2020 08:22:38

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz**

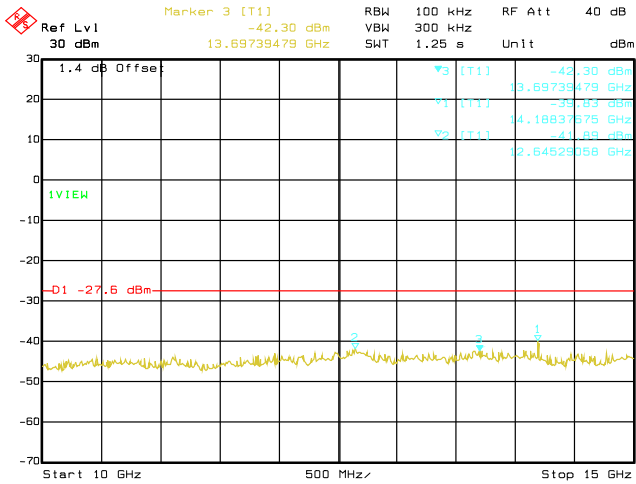


Date: 05.FEB.2020 08:23:32

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz**

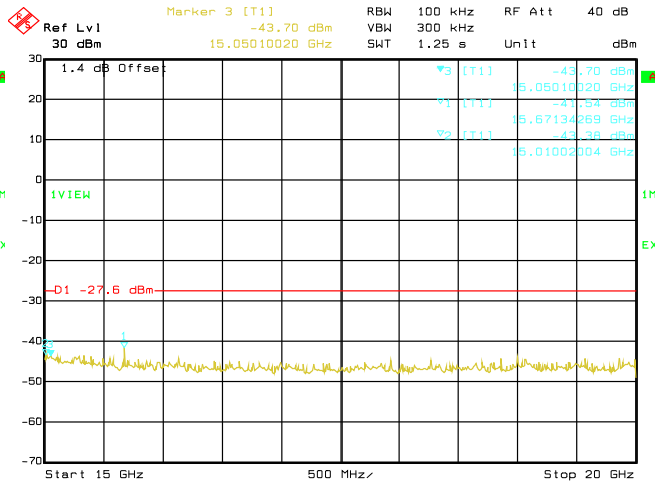


Date: 05.FEB.2020 08:24:25

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz**

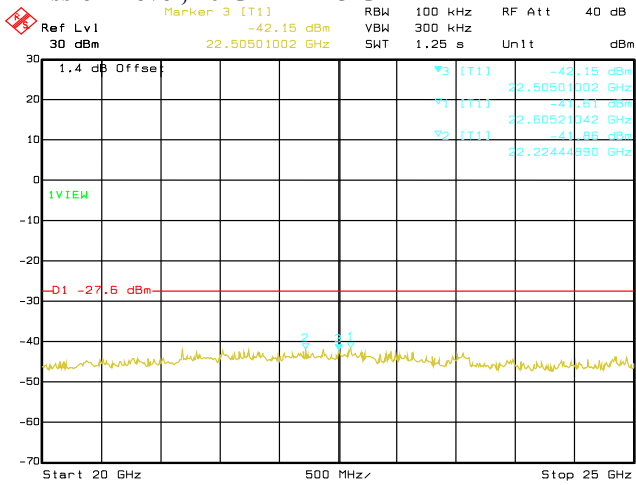


Date: 05.FEB.2020 08:25:18

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz**

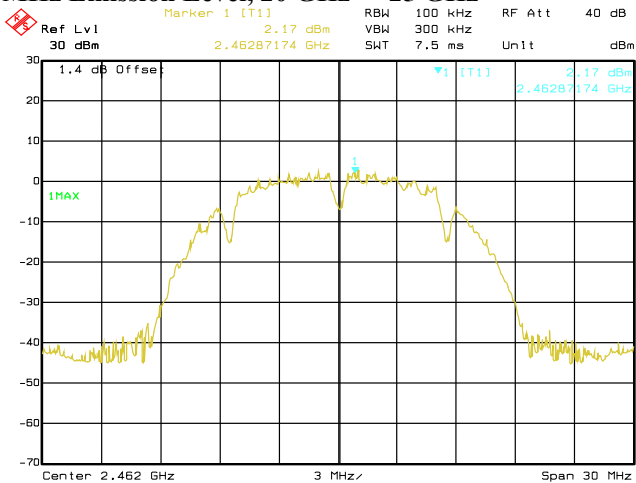


Date: 05.FEB.2020 08:31:42

**Conducted Emissions. 802.11b, Frequency 2462 MHz Reference Level**

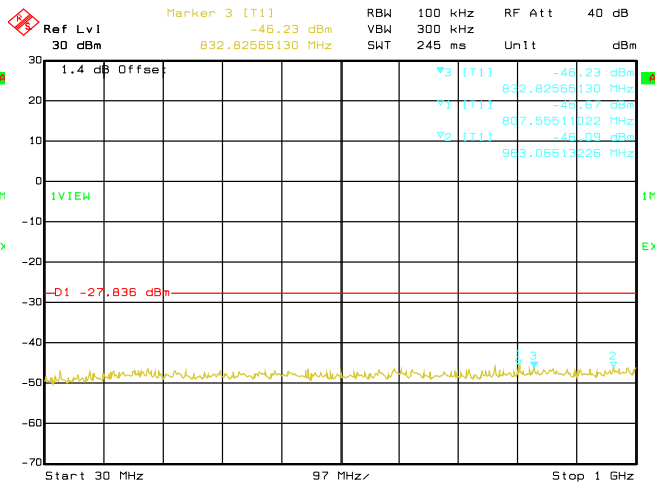


Date: 05.FEB.2020 08:32:36


**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz**

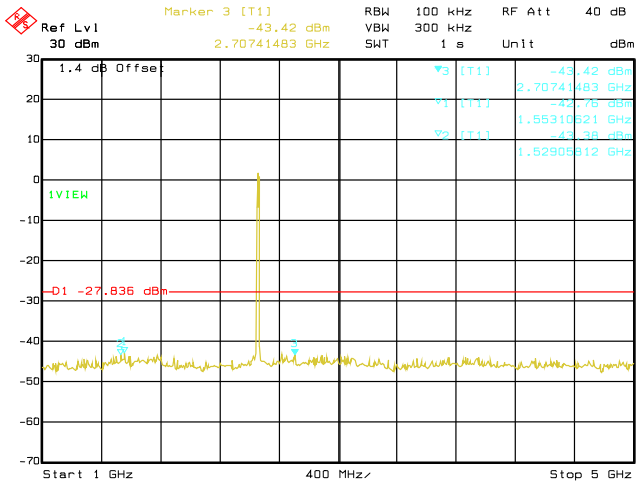


Date: 05.FEB.2020 08:33:30  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz**

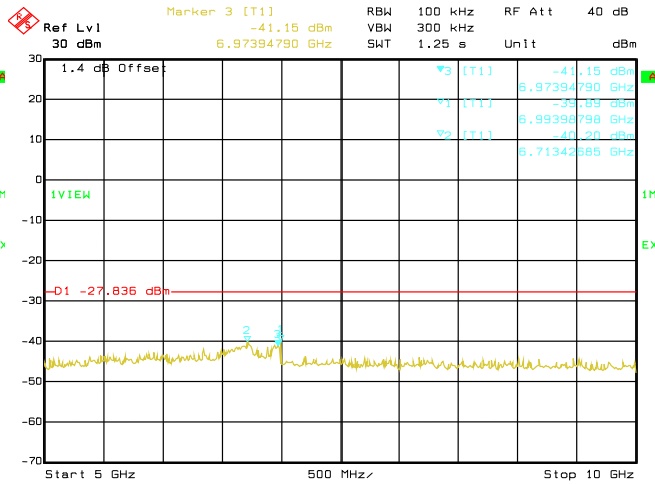


Date: 05.FEB.2020 08:34:23  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz**

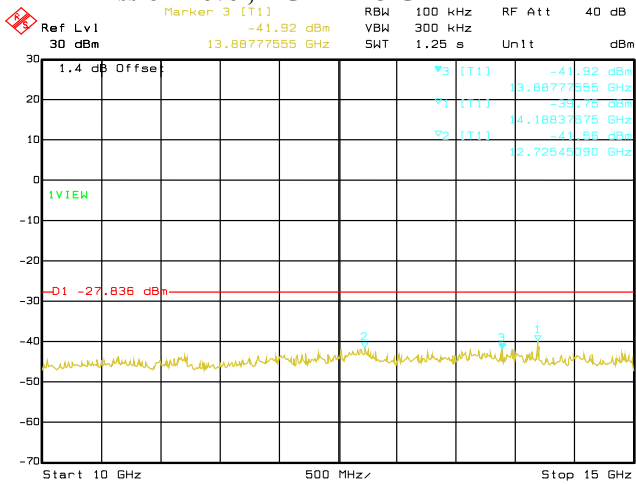

Date: 05.FEB.2020 08:35:17  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz**

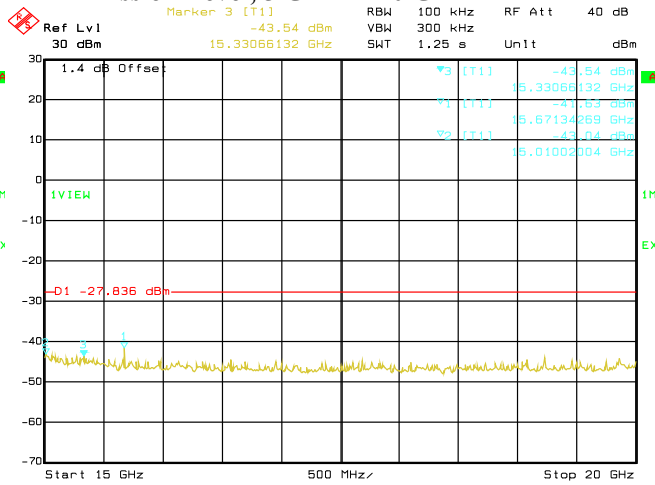

Date: 05.FEB.2020 08:36:10  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz**

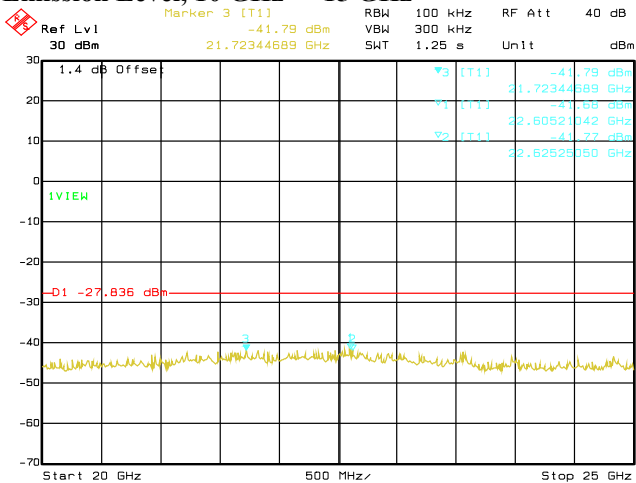


Date: 05.FEB.2020 08:37:04  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz**




**802.11g**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11g	OFDM	BPSK	6	2412	14188.38	-39.01	Pass
					6633.27	-40.26	Pass
					6673.35	-40.42	Pass
802.11g	OFDM	BPSK	6	2437	6983.97	-38.86	Pass
					14188.38	-39.89	Pass
					6713.43	-39.99	Pass
802.11g	OFDM	BPSK	6	2462	14188.38	-39.83	Pass
					6693.39	-40.07	Pass
					6673.35	-40.51	Pass

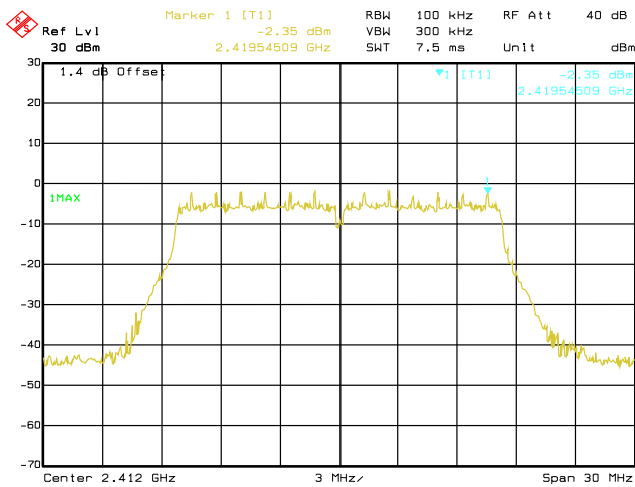


Date: 05.FEB.2020 08:41:45  
**Conducted Emissions. 802.11g, Frequency 2412 MHz Reference Level**

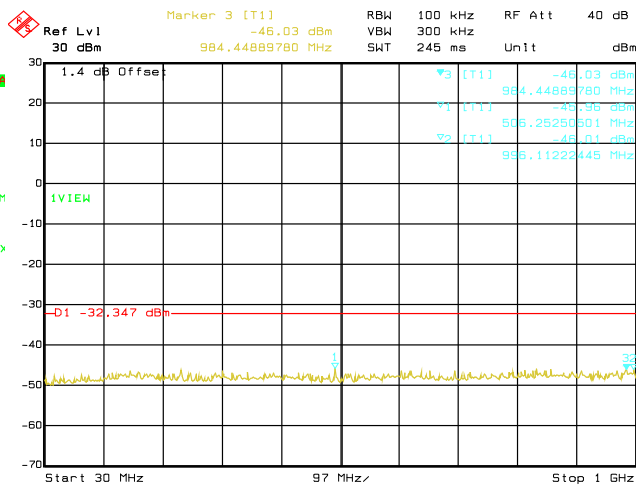


Date: 05.FEB.2020 08:42:39  
**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz**

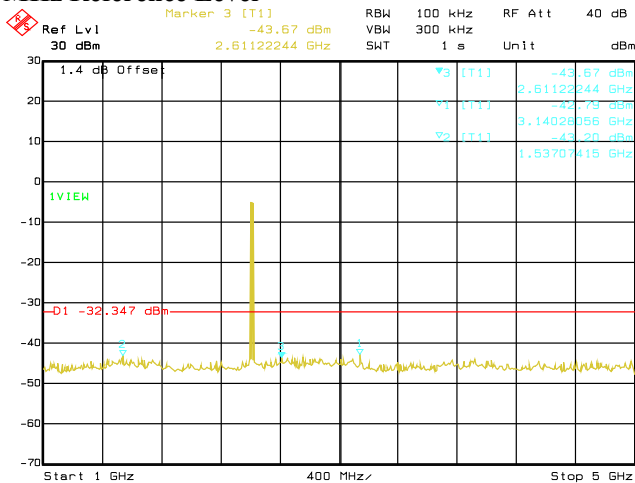

Date: 05.FEB.2020 08:43:33  
**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz**

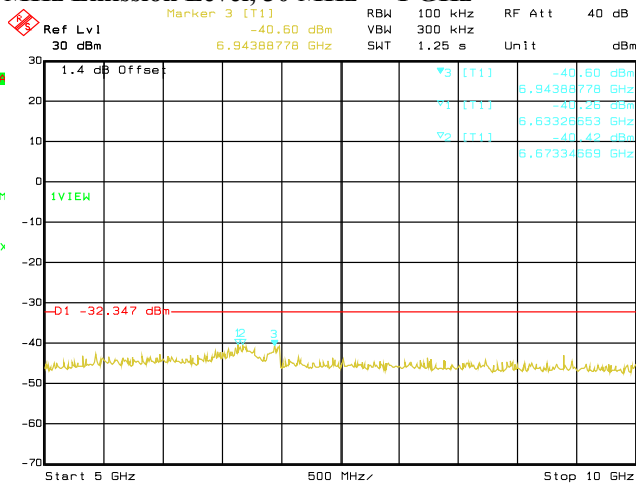


Date: 05.FEB.2020 08:44:26  
**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz**

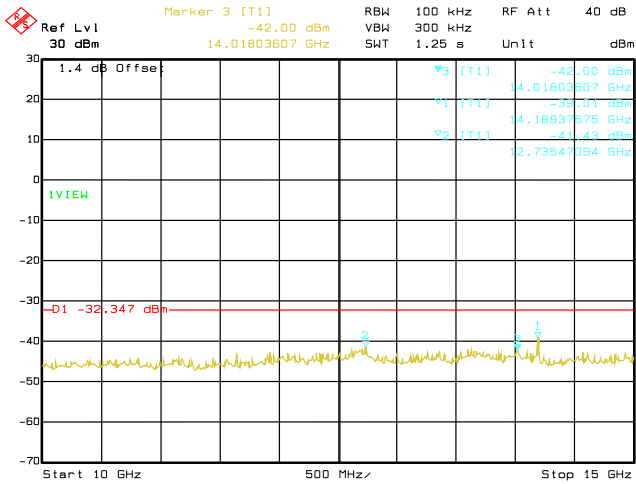


Date: 05.FEB.2020 08:45:19

**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz**

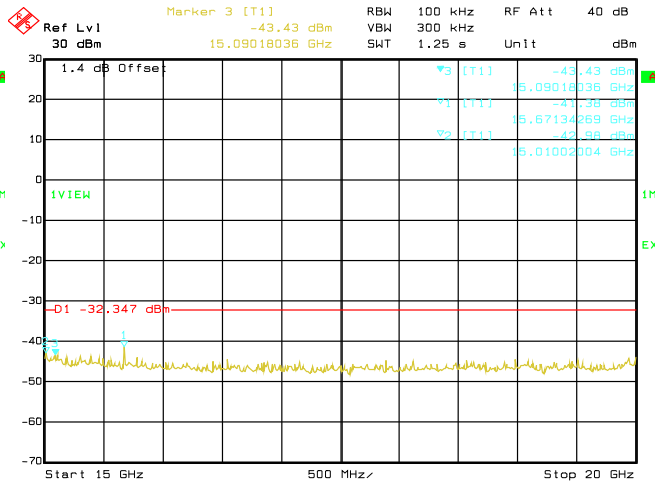


Date: 05.FEB.2020 08:46:13

**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz**

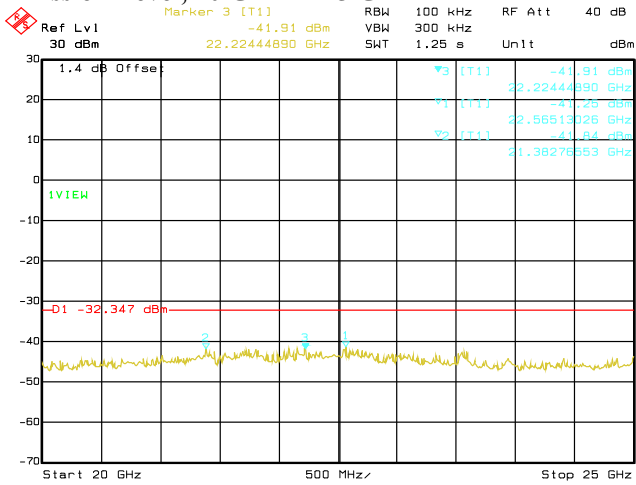


Date: 05.FEB.2020 08:47:06

**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz**

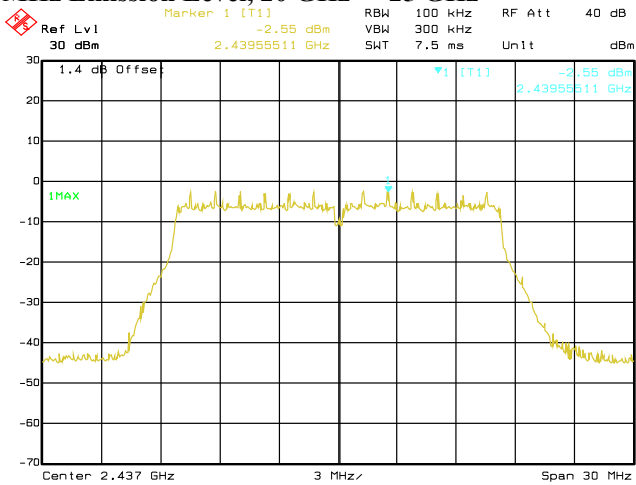


Date: 05.FEB.2020 08:49:59

**Conducted Emissions. 802.11g, Frequency 2437 MHz Reference Level**

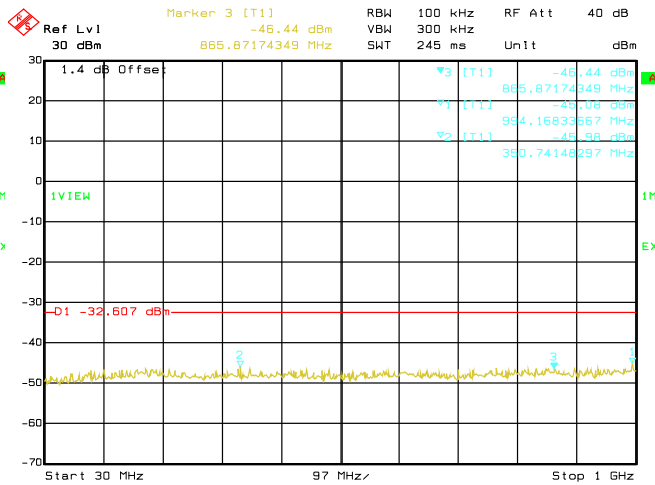


Date: 05.FEB.2020 08:50:53


**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz**

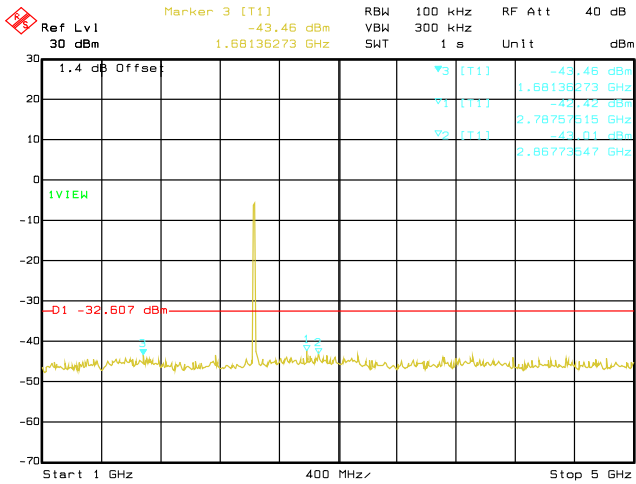


Date: 05.FEB.2020 08:51:47  
**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz**

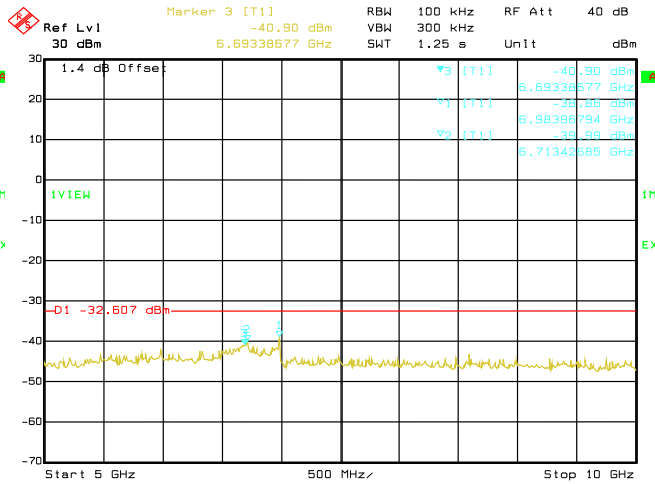


Date: 05.FEB.2020 08:52:40  
**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz**

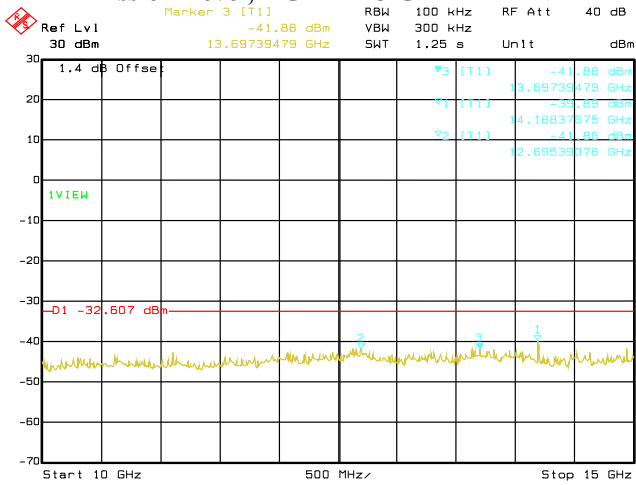


Date: 05.FEB.2020 08:53:33  
**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz**

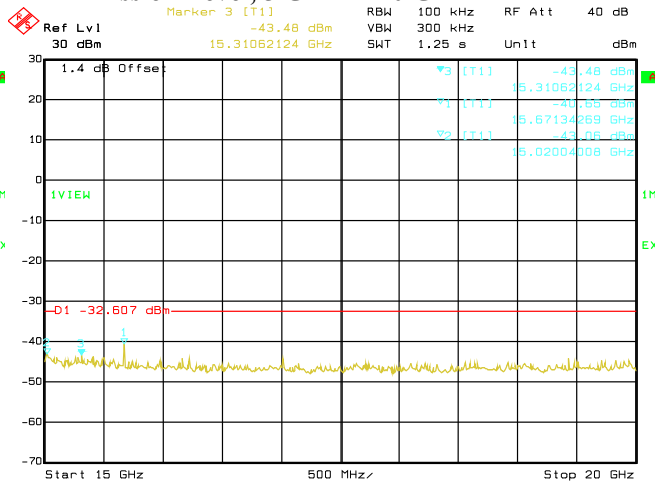

Date: 05.FEB.2020 08:54:27  
**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz**

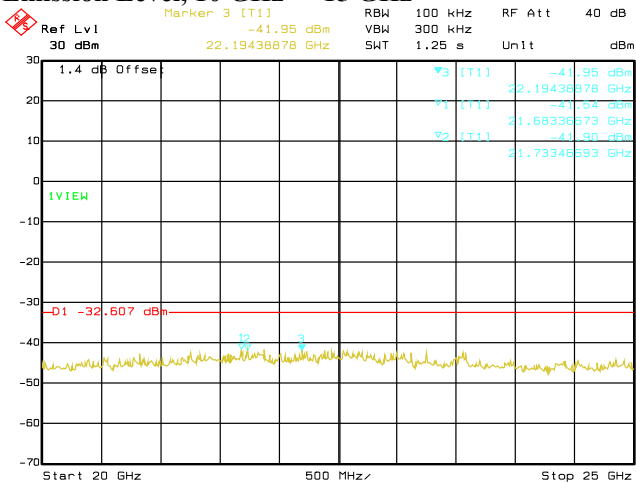


Date: 05.FEB.2020 08:55:20  
**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz**

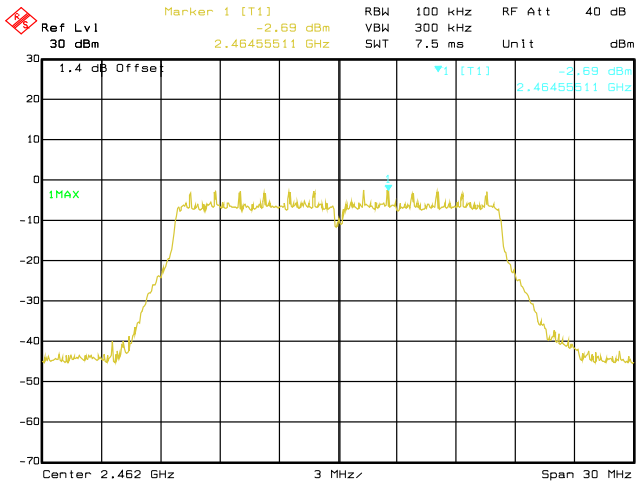


Date: 05.FEB.2020 08:57:31

**Conducted Emissions. 802.11g, Frequency 2462 MHz Reference Level**

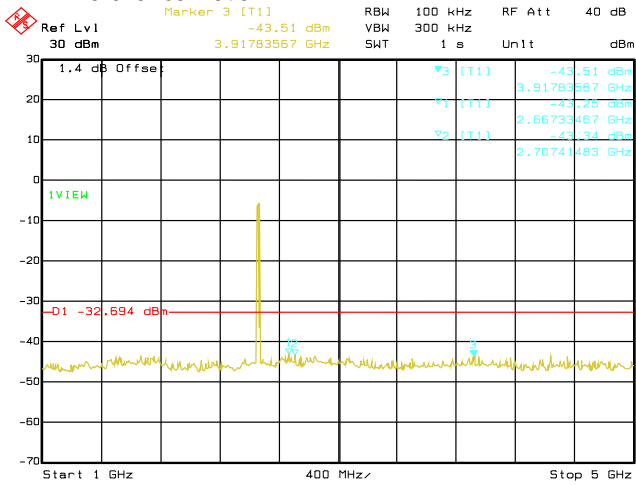


Date: 05.FEB.2020 08:59:19

**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz**

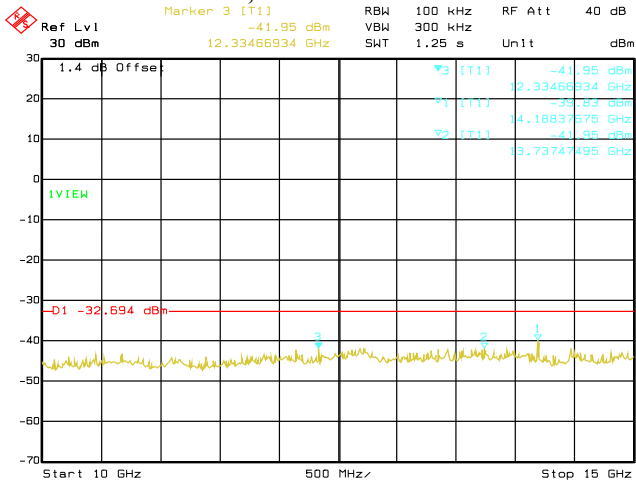


Date: 05.FEB.2020 09:01:05

**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz**

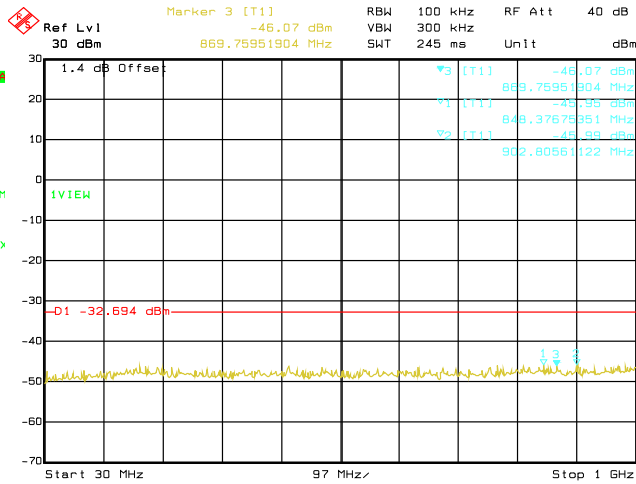


Date: 05.FEB.2020 08:58:25

**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz**

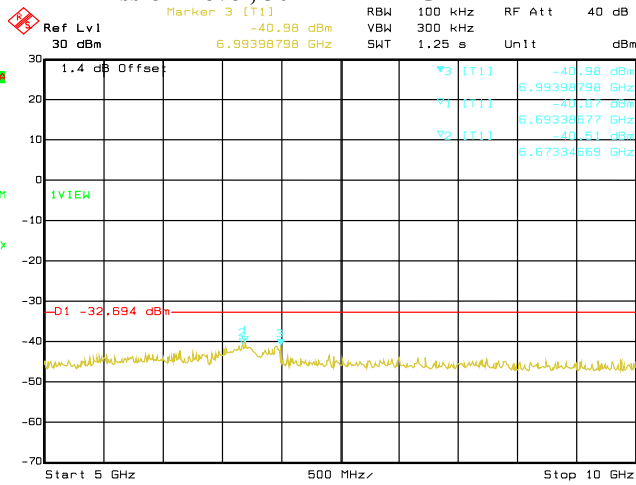


Date: 05.FEB.2020 09:00:12

**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz**

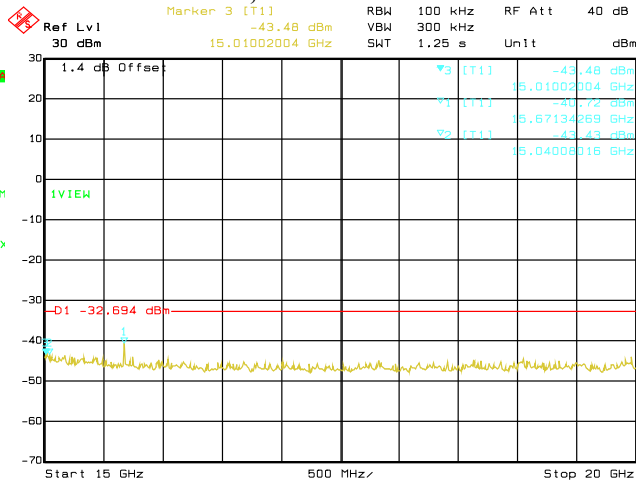

Date: 05.FEB.2020 09:01:59


**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz**

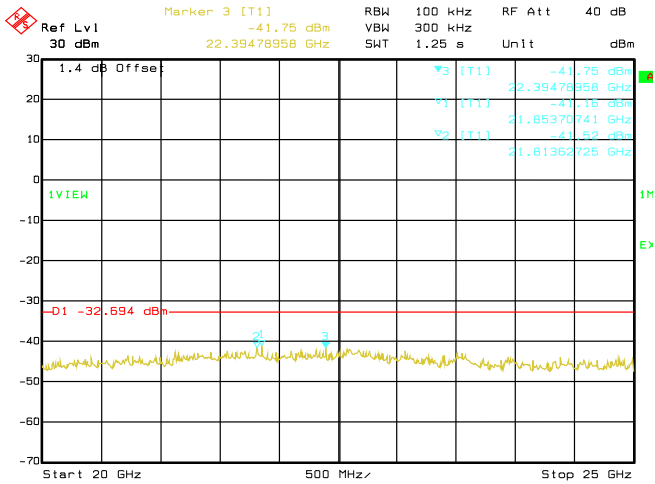


**Conducted Emissions. 802.11g, Frequency 2462  
MHz Emission Level, 20 GHz -> 25 GHz**

**802.11n (HT20)**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11n	OFDM	DBPSK	6.5	2412	6993.99	-39.96	Pass
					6933.87	-40.29	Pass
					6683.37	-40.34	Pass
802.11n	OFDM	DBPSK	6.5	2437	14188.38	-38.96	Pass
					6993.99	-40.18	Pass
					6723.45	-40.97	Pass
802.11n	OFDM	DBPSK	6.5	2462	6713.43	-38.80	Pass
					14188.38	-39.51	Pass
					6653.31	-40.08	Pass

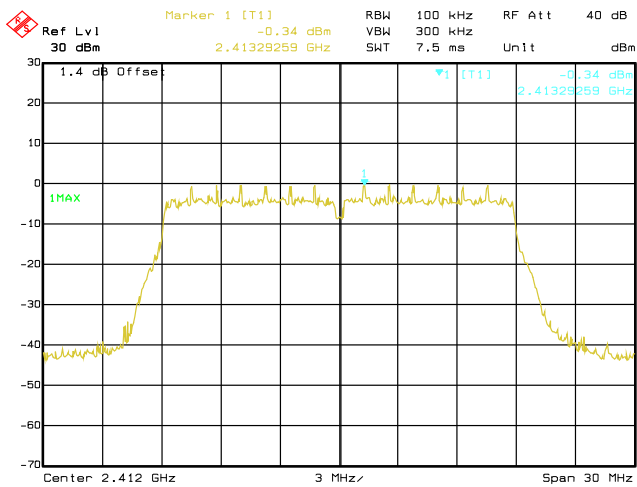


Date: 04.FEB.2020 03:31:58  
**Conducted Emissions. 802.11n, Frequency 2412 MHz Reference Level**

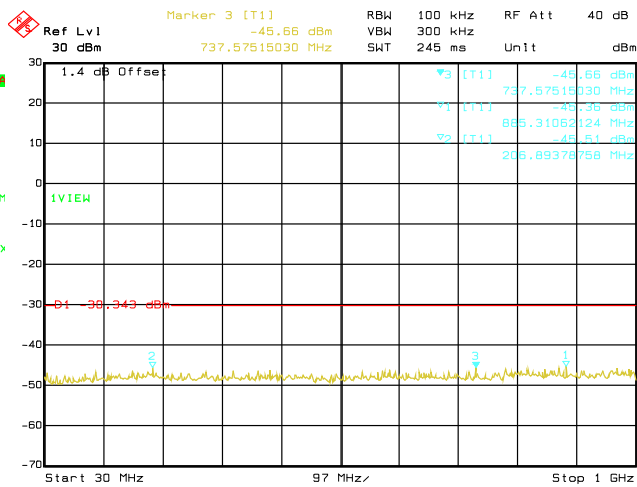


Date: 04.FEB.2020 03:32:51  
**Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz**

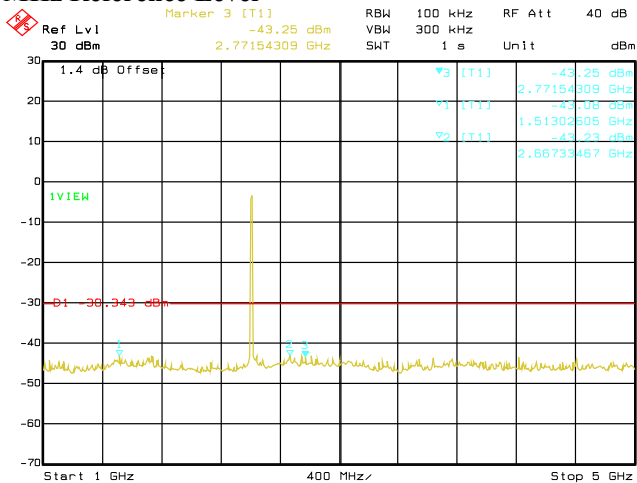


Date: 04.FEB.2020 03:33:46  
**Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz**

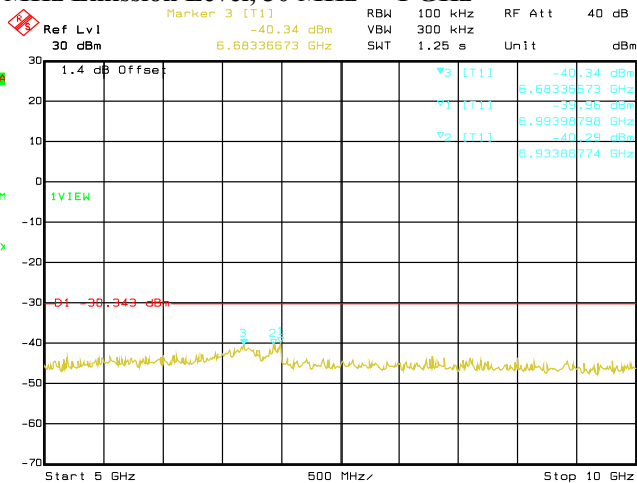


Date: 04.FEB.2020 03:34:39  
**Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz**

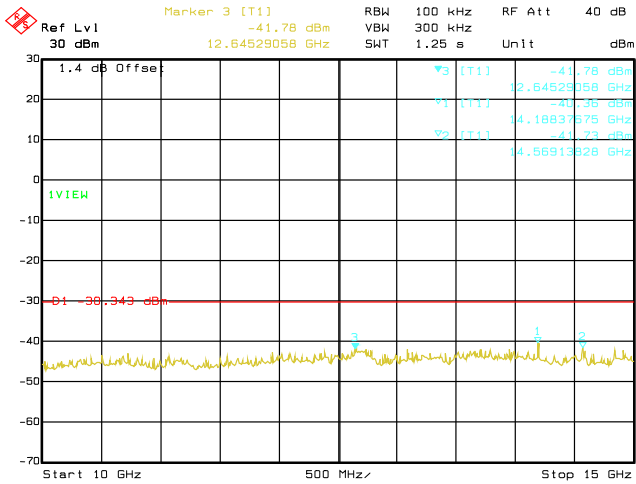


Date: 04.FEB.2020 03:35:32  
**Conducted Emissions. 802.11n, Frequency 2412  
 Emission Level, 10 GHz -> 15 GHz**

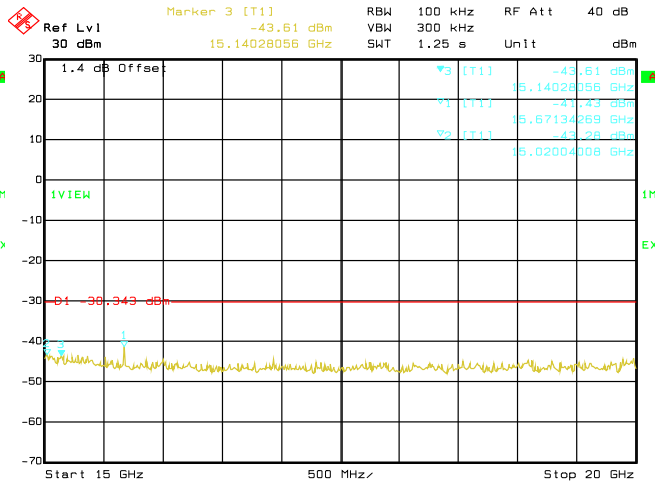


Date: 04.FEB.2020 03:36:25  
**Conducted Emissions. 802.11n, Frequency 2412  
 MHz Emission Level, 15 GHz -> 20 GHz**

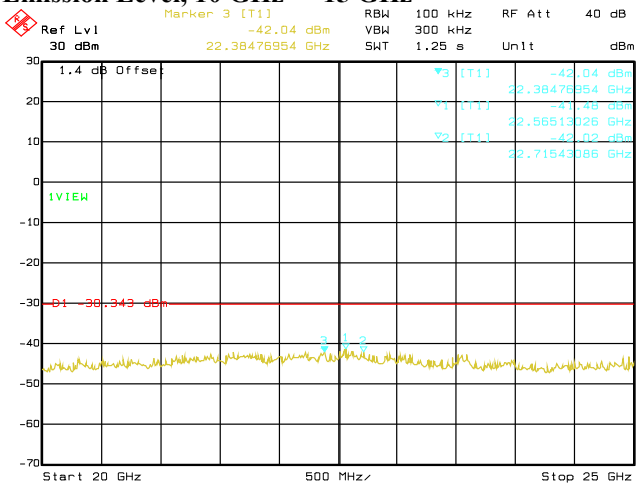


Date: 04.FEB.2020 03:37:19  
**Conducted Emissions. 802.11n, Frequency 2412  
 MHz Emission Level, 20 GHz -> 25 GHz**

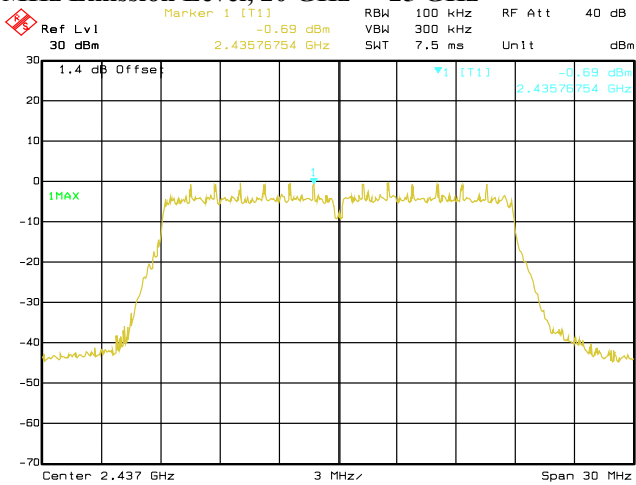

Date: 04.FEB.2020 03:38:41  
**Conducted Emissions. 802.11n, Frequency 2437  
 MHz Reference Level**

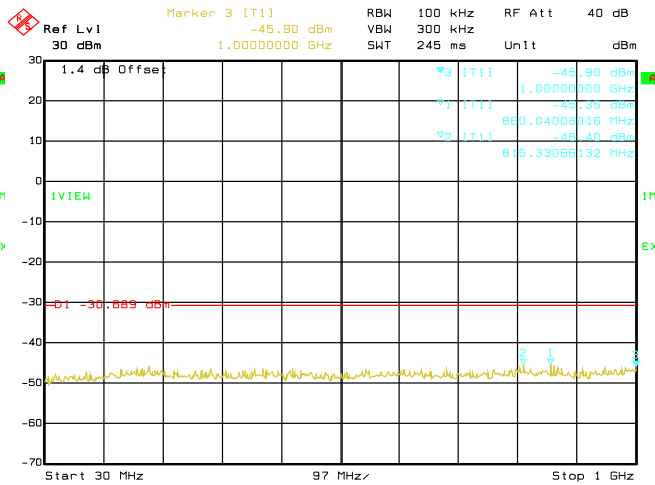


Date: 04.FEB.2020 03:39:35  
**Conducted Emissions. 802.11n, Frequency 2437  
 MHz Emission Level, 30 MHz -> 1 GHz**

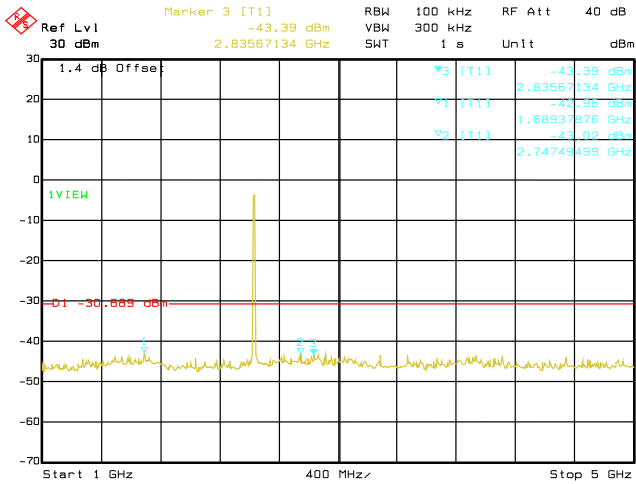


Date: 04.FEB.2020 03:40:29

**Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz**

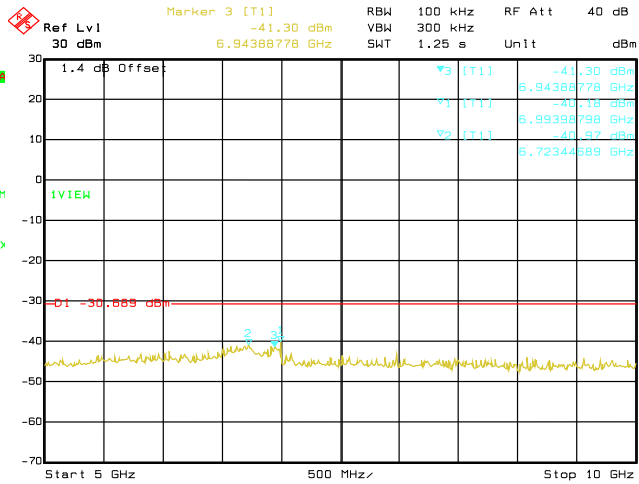


Date: 04.FEB.2020 03:41:22

**Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz**

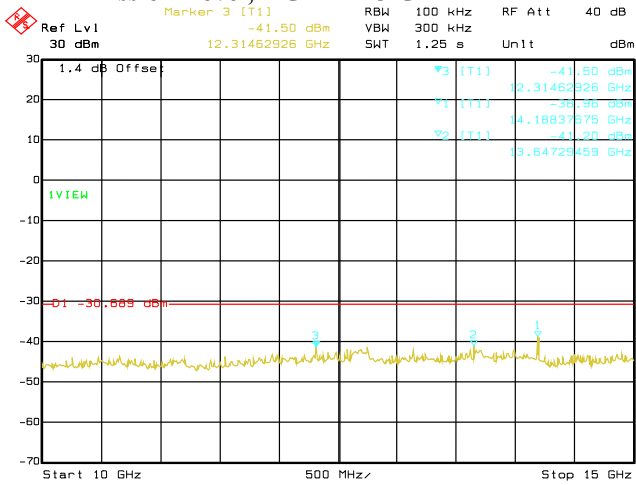


Date: 04.FEB.2020 03:42:16

**Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz**

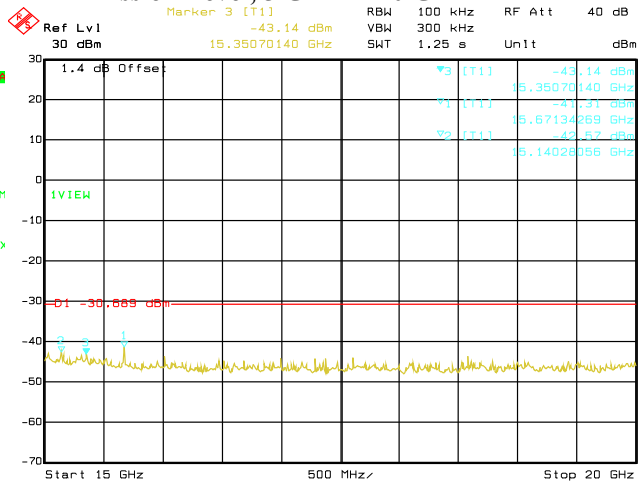

Date: 04.FEB.2020 03:43:10


**Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz**

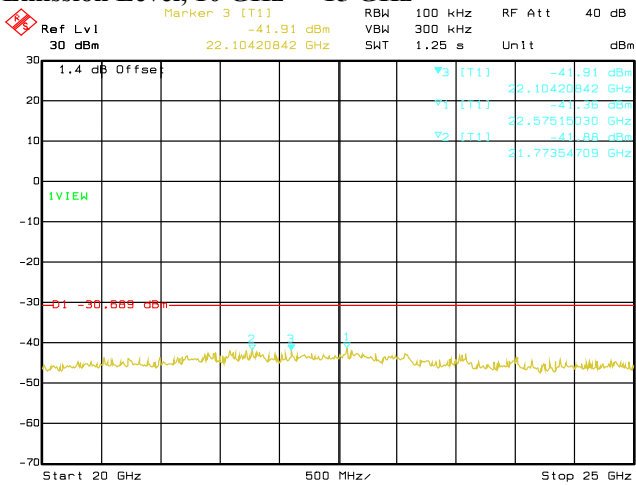


Date: 04.FEB.2020 03:44:03

**Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz**




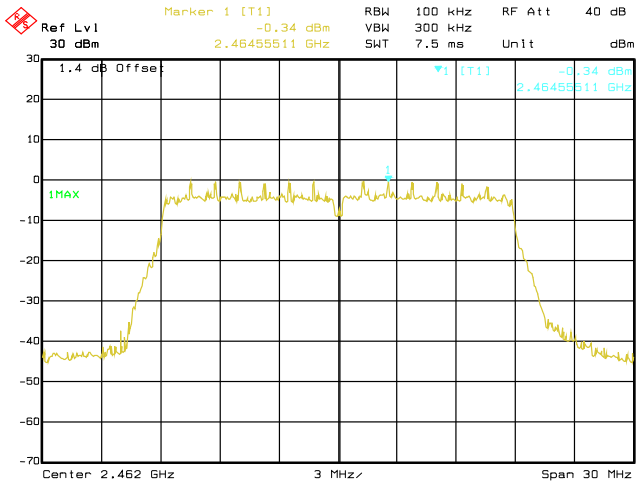


**Conducted Emissions. 802.11n, Frequency 2462 MHz Reference Level**

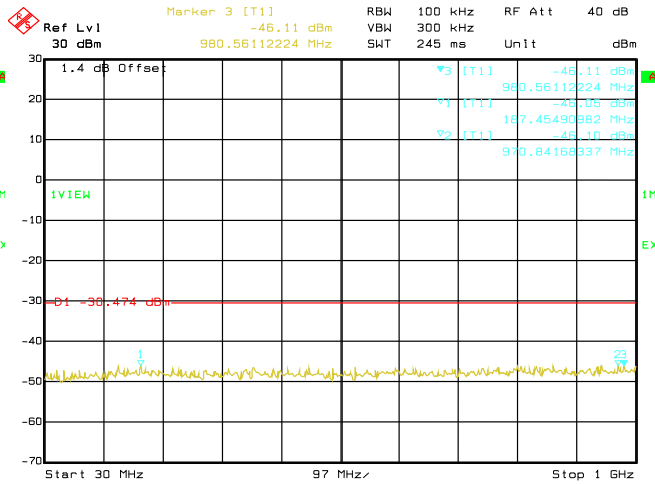


**Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz**

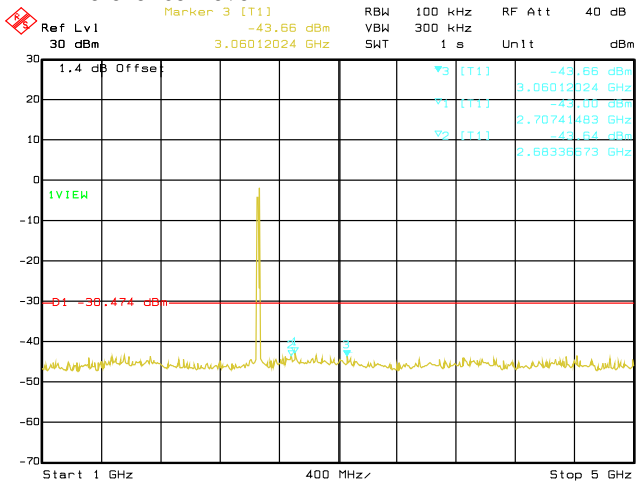


**Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz**

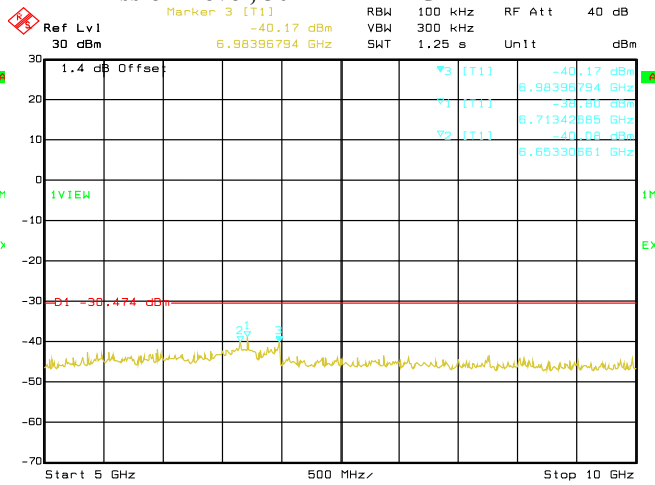


**Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz**

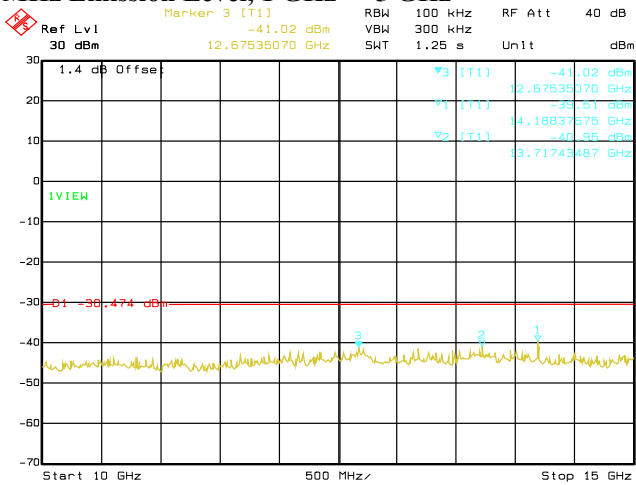

**Conducted Emissions. 802.11n, Frequency 2462 Emission Level, 10 GHz -> 15 GHz**

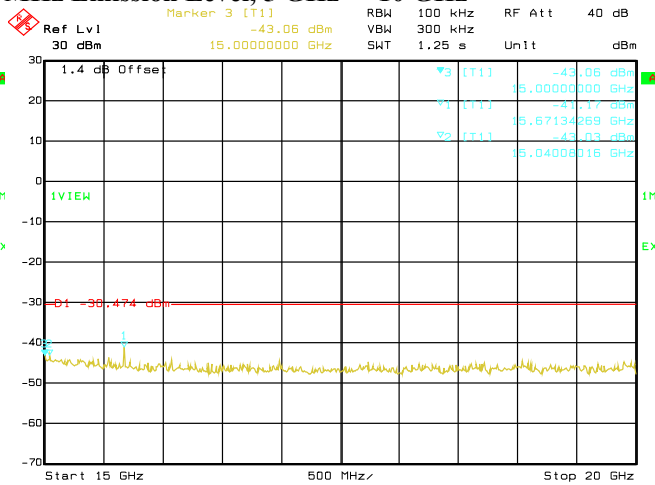

**Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz**

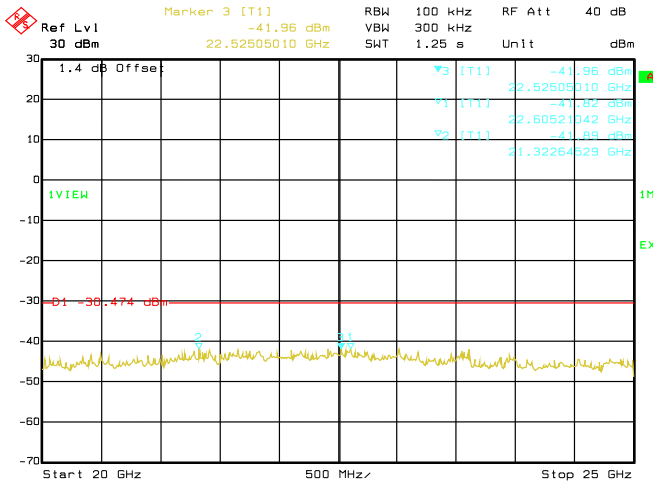


Date: 04.FEB.2020 03:50:57

**Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz**

## 6.6. Band edge Conducted Spurious Emission

### 6.6.1. Test Setup

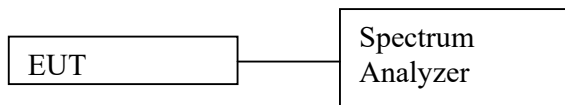

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.
- f) Measure every antenna port by repeat the step above for MIMO measurement.

### 6.6.2. Test Limits:


<b>Normal Condition (25 ° C)</b>
<b>Shall be at least 30 dB below peak (max) power.</b>

### 6.6.3. Test Result


#### 802.11b

##### **Antenna 1:**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11b	DSSS	QPSK	2	2412	2399.91	-42.44	Pass
802.11b	DSSS	QPSK	2	2462	2483.50	-50.31	Pass

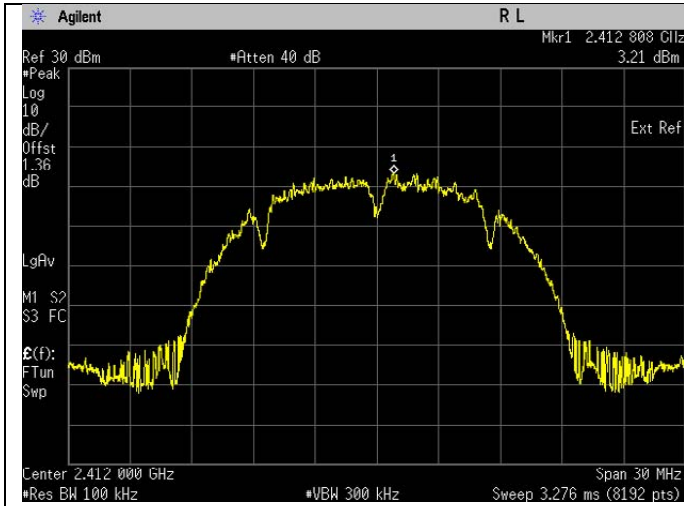


Band Edge. 802.11b Frequency 2412 MHz Reference Level

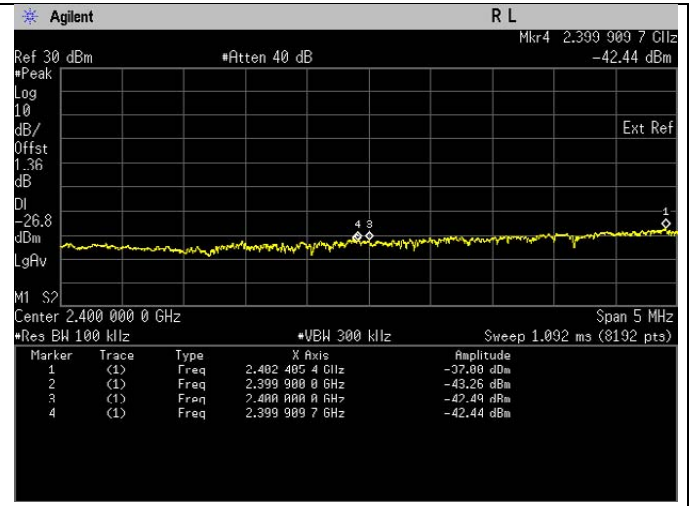

Band Edge. 802.11b Frequency 2412 MHz Band Edge

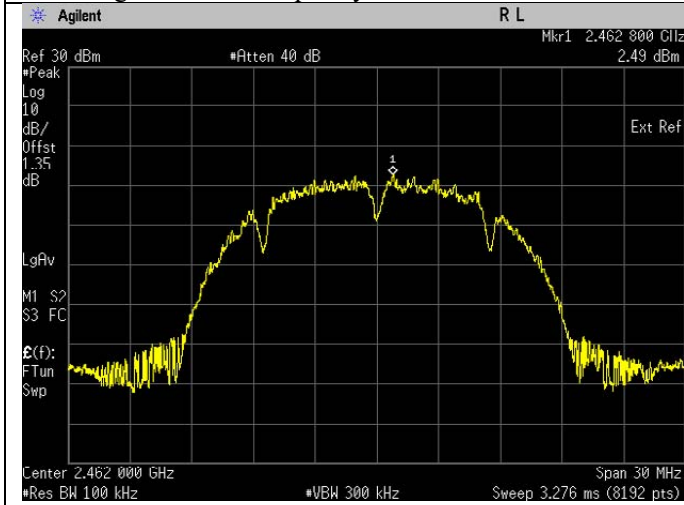


Band Edge. 802.11b Frequency 2462 MHz Reference Level

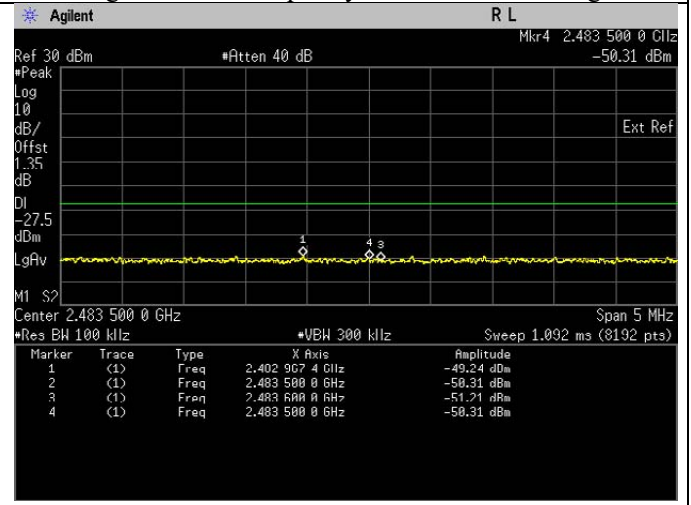


Band Edge. 802.11b Frequency 2462 MHz Band Edge

**802.11g**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	2399.91	-45.52	Pass
802.11g	OFDM	BPSK	6	2462	2483.60	-50.09	Pass

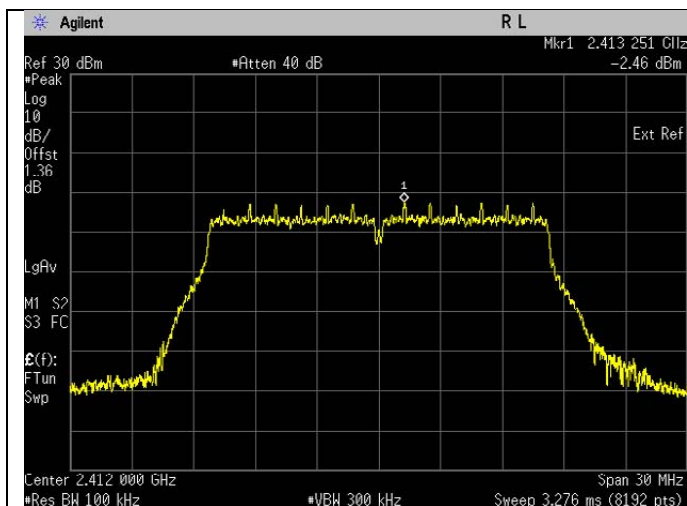


Band Edge. 802.11g Frequency 2412 MHz Reference Level

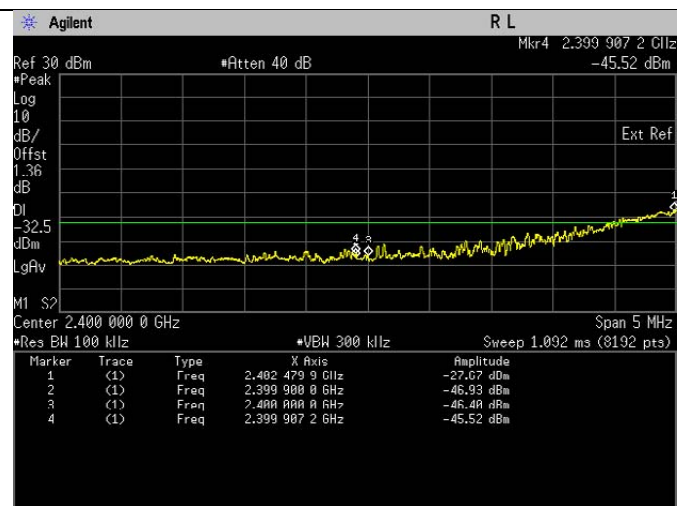

Band Edge. 802.11g Frequency 2412 MHz Band Edge

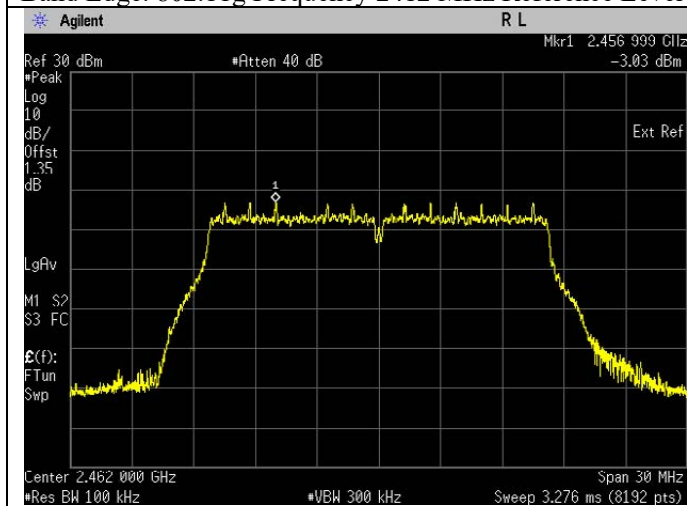


Band Edge. 802.11g Frequency 2462 MHz Reference Level

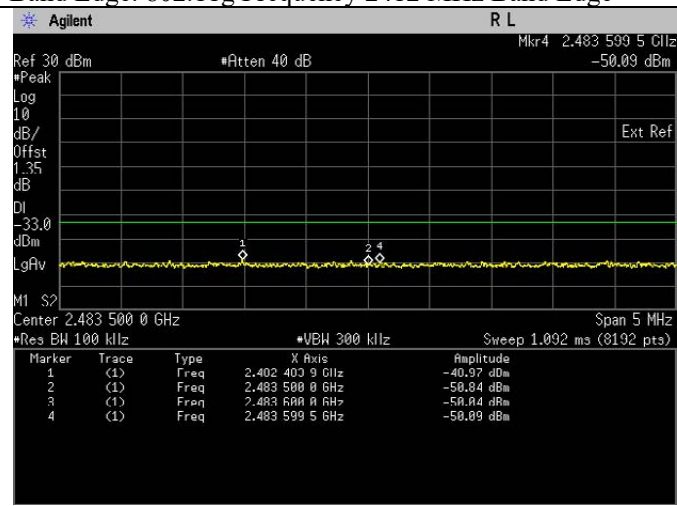


Band Edge. 802.11g Frequency 2462 MHz Band Edge

**802.11n (HT20)**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11n	OFDM	DBPSK	6.5	2412	2399.90	-42.41	Pass
802.11n	OFDM	DBPSK	6.5	2462	2483.58	-50.17	Pass

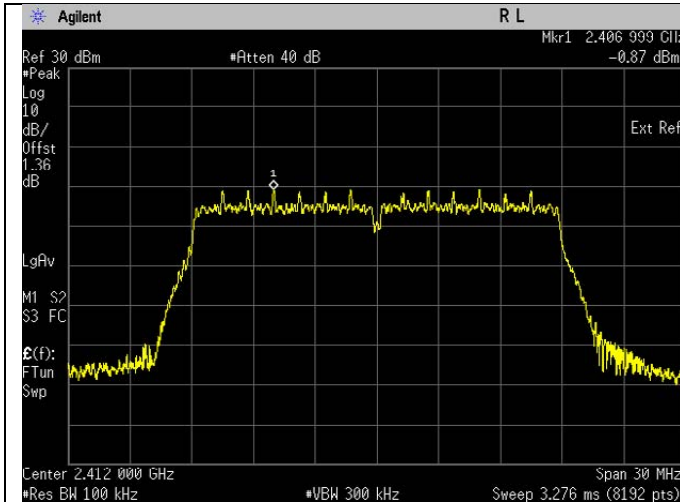


Band Edge. 802.11n Frequency 2412 MHz Reference Level

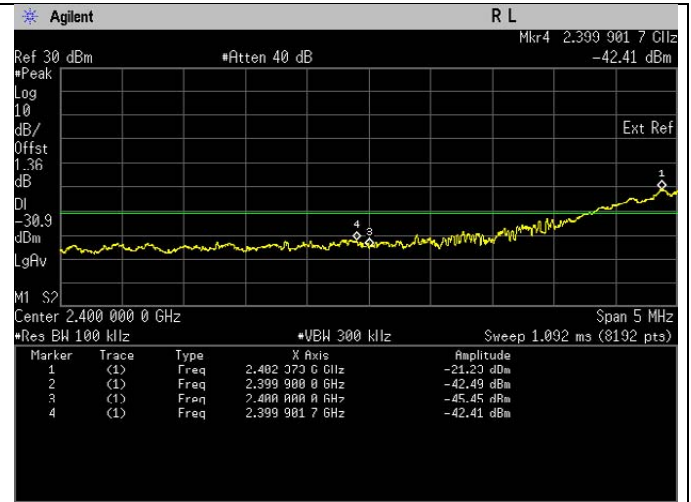

Band Edge. 802.11n Frequency 2412 MHz Band Edge

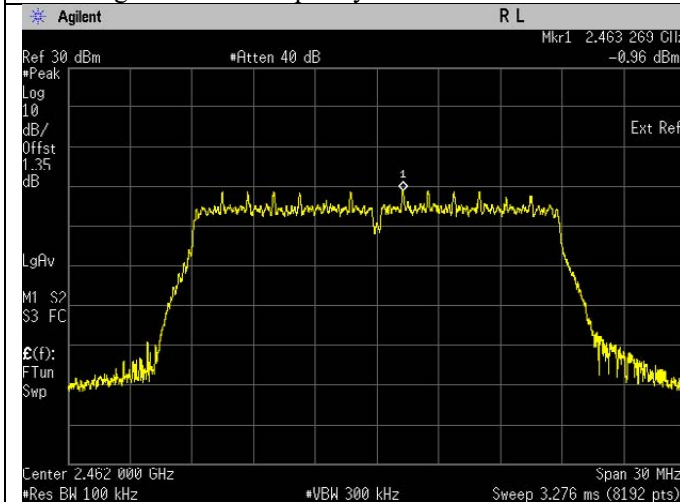


Band Edge. 802.11n Frequency 2462 MHz Reference Level

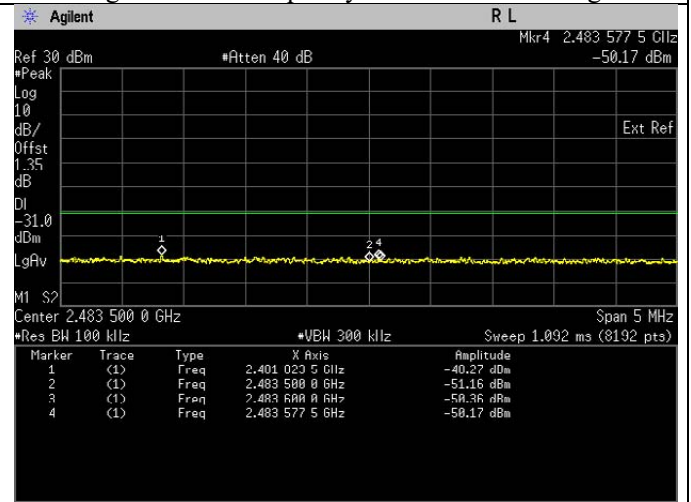

Band Edge. 802.11n Frequency 2462 MHz Band Edge

## 6.7. Radiated Emission within restricted Bands

### 6.7.1. Test Setup

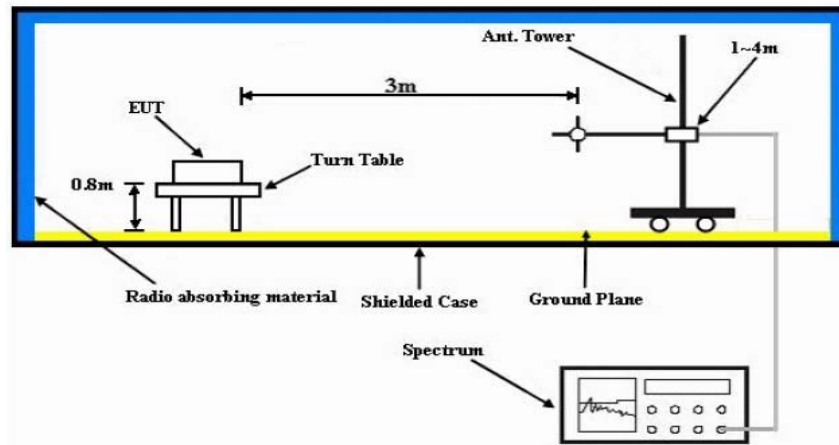

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

#### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

**6.7.2. Test Limits:**

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


**NOTE:**

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.






### Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

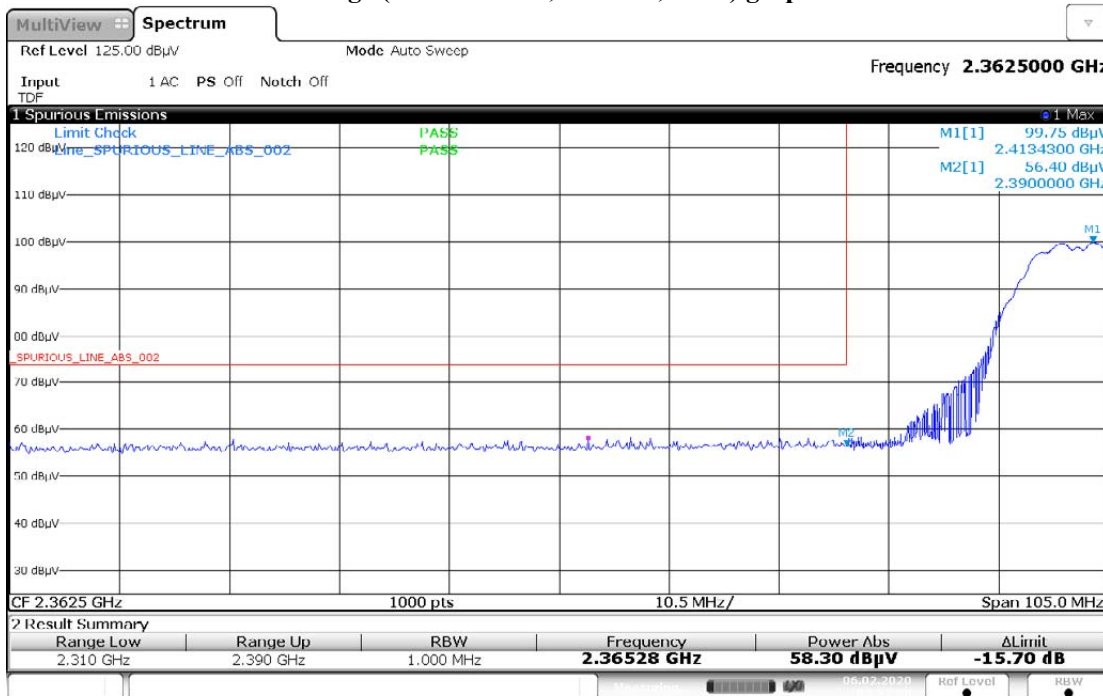


05:57:01 06.02.2020

### Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

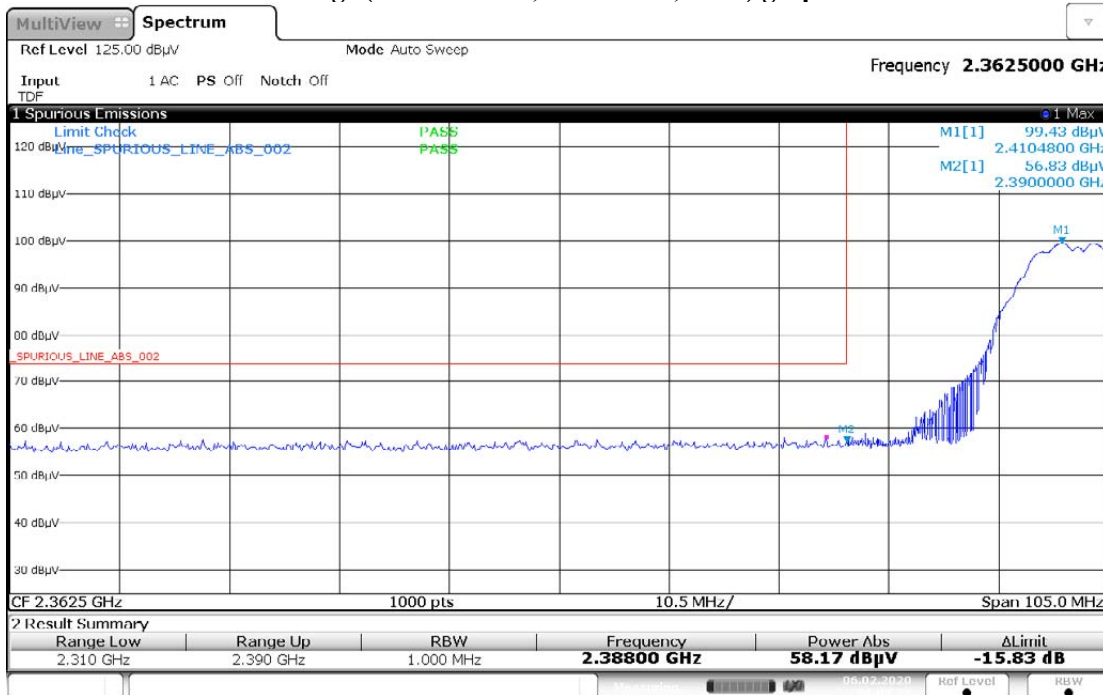


06:00:26 06.02.2020

### Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

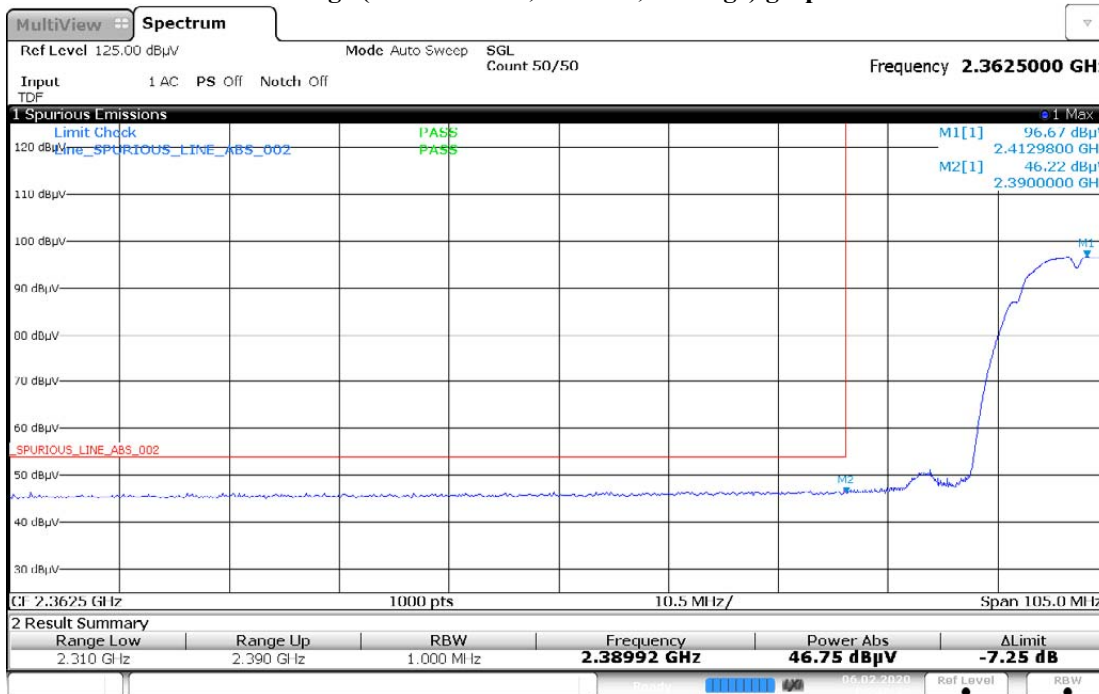

05:48:46 06.02.2020


### Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

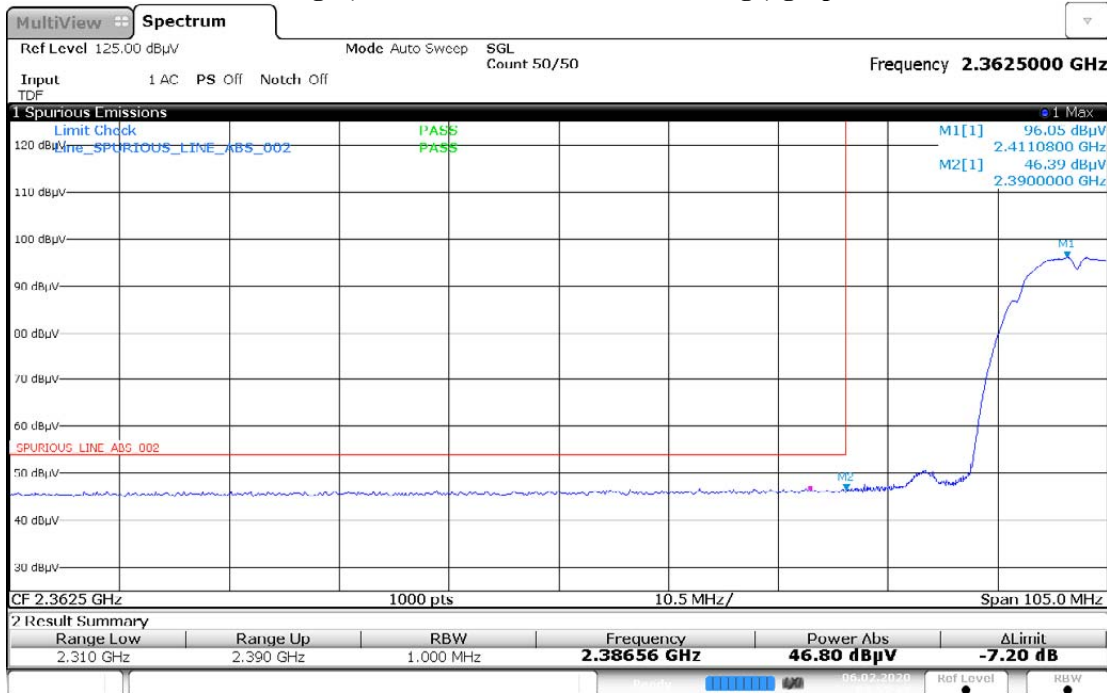

05:52:41 06.02.2020




**Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot**

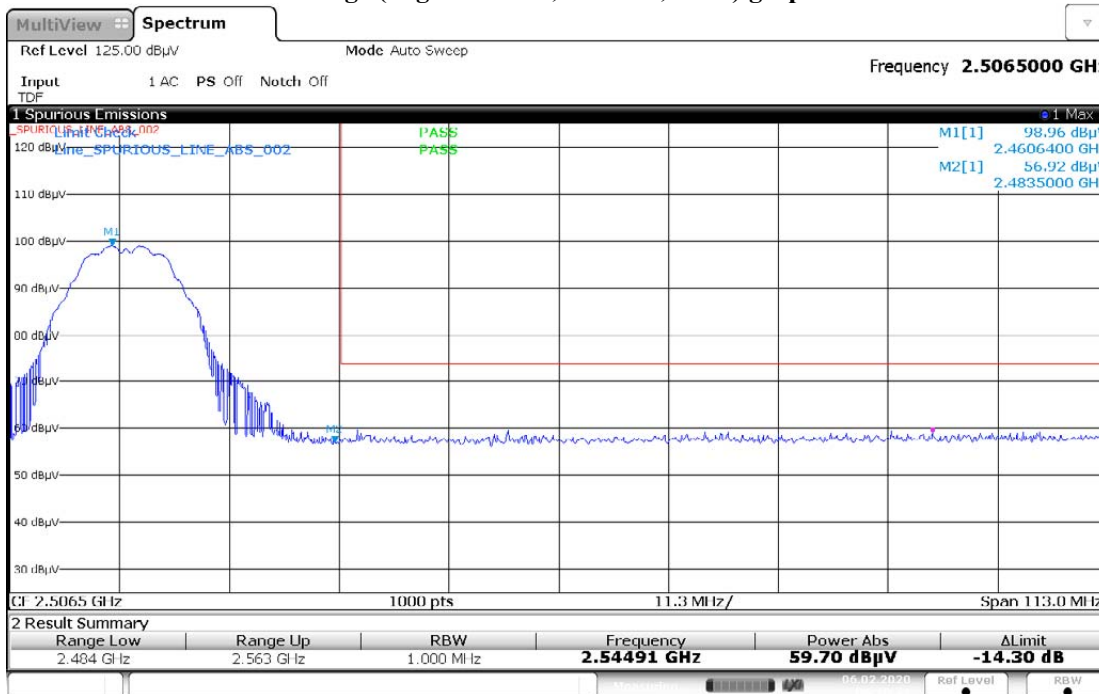


06:10:41 06.02.2020

**Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot**

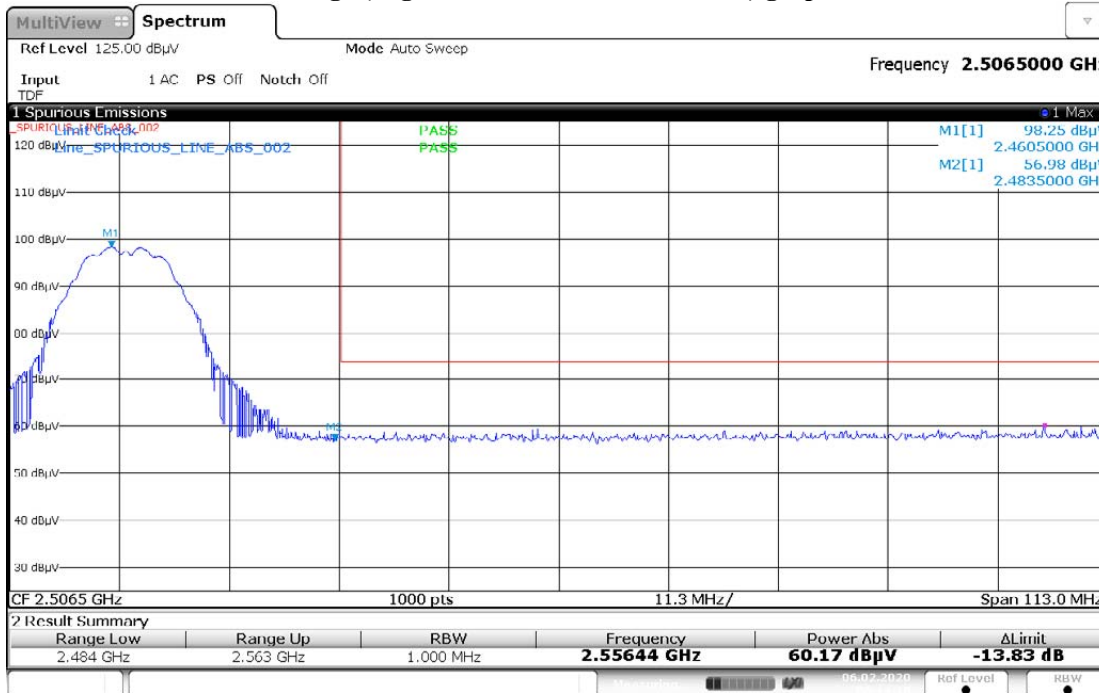


06:14:19 06.02.2020

**Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot**

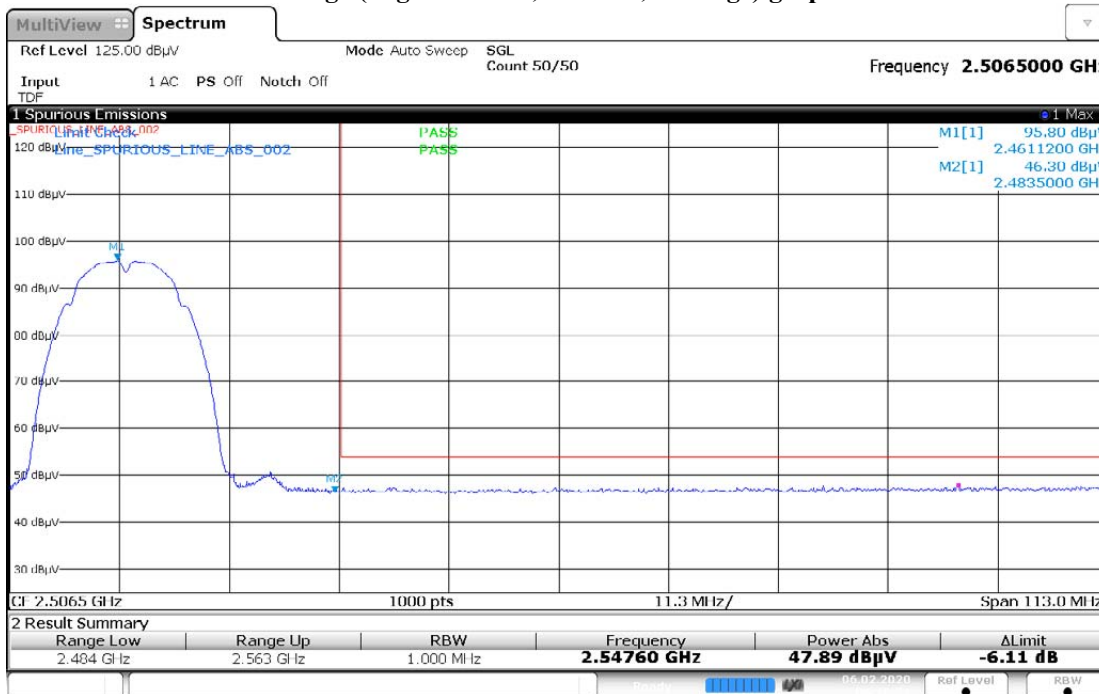

06:18:51 06.02.2020


**Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot**

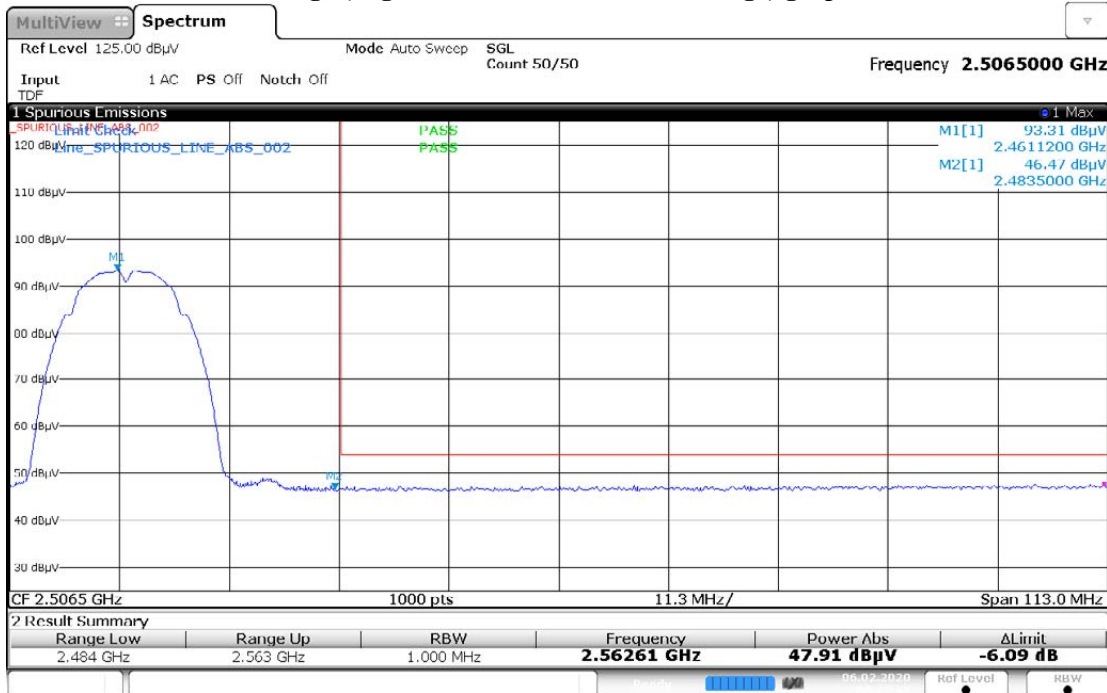

06:22:46 06.02.2020




### Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

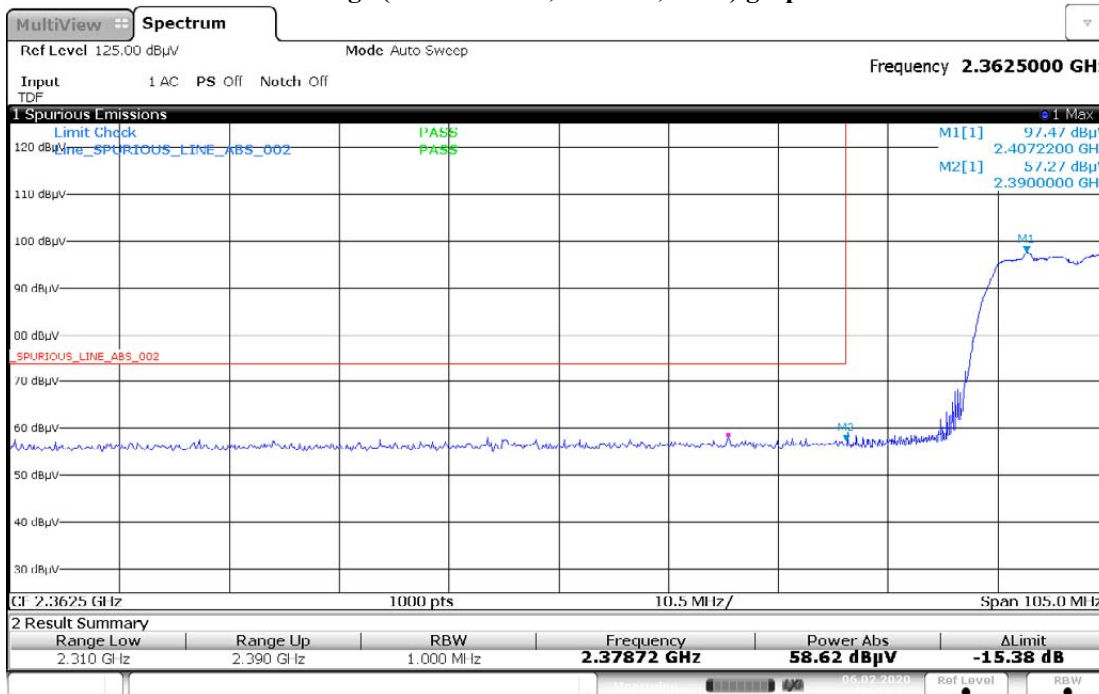

06:51:46 06.02.2020


### Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

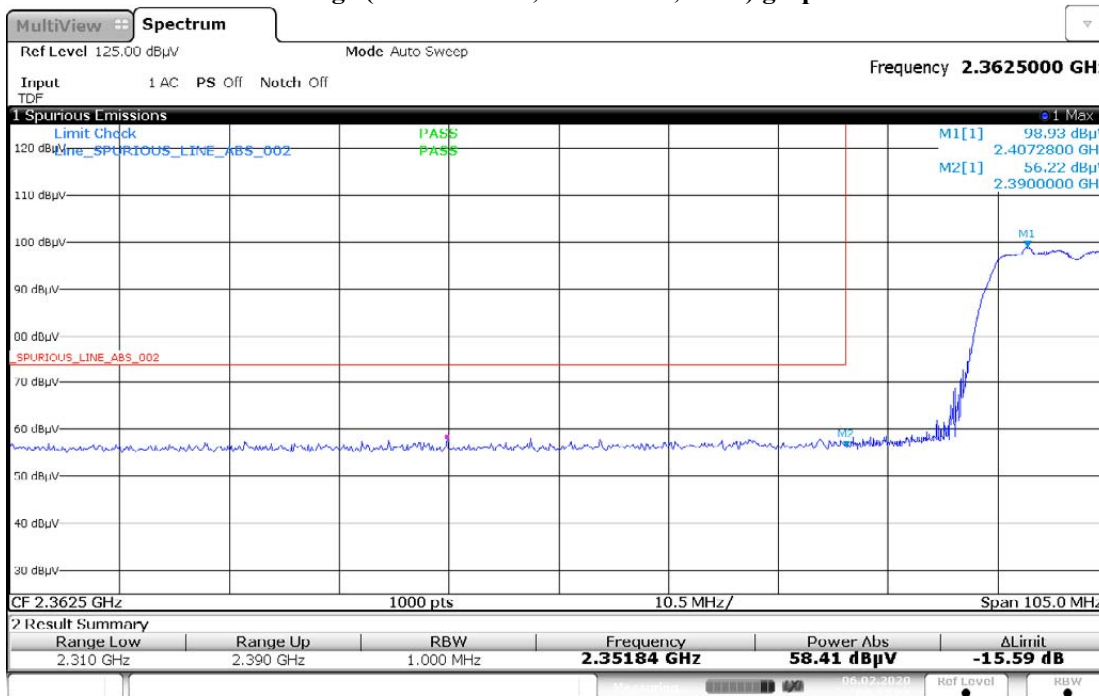

06:55:06 06.02.2020




### Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

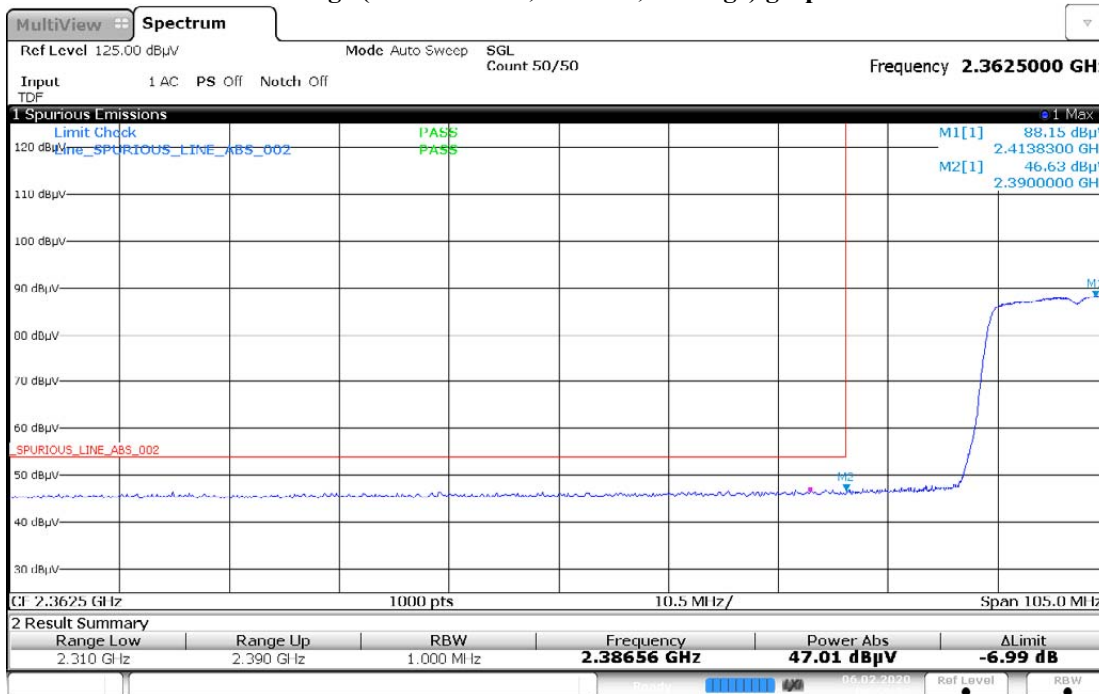

06:59:34 06.02.2020


### Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

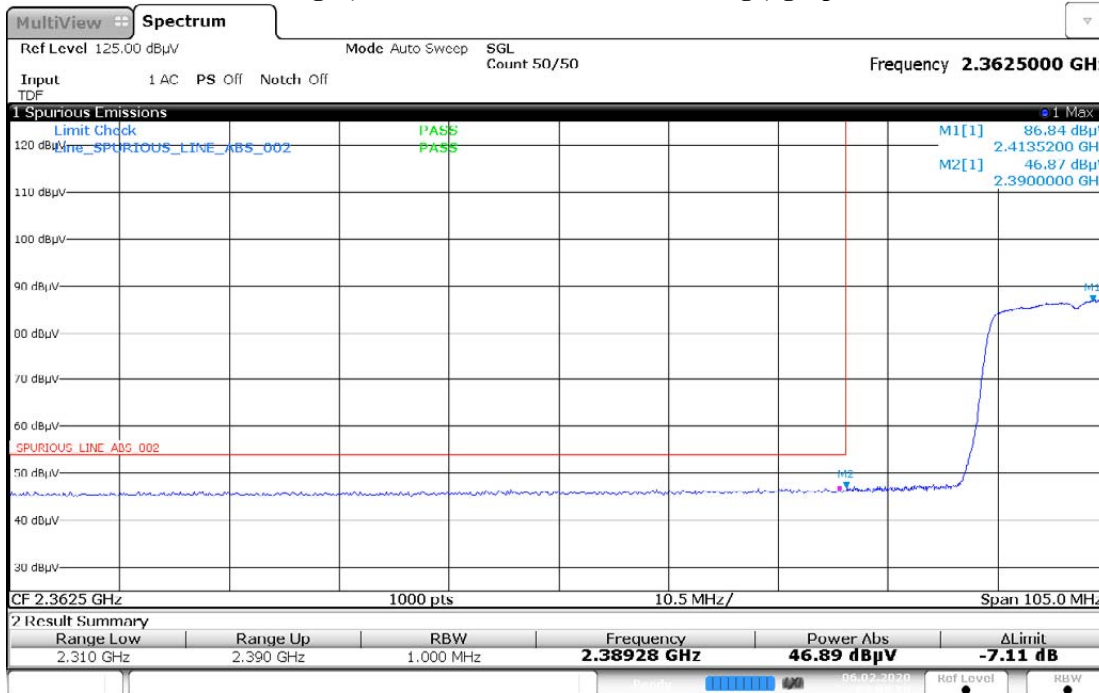

07:03:51 06.02.2020




### Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

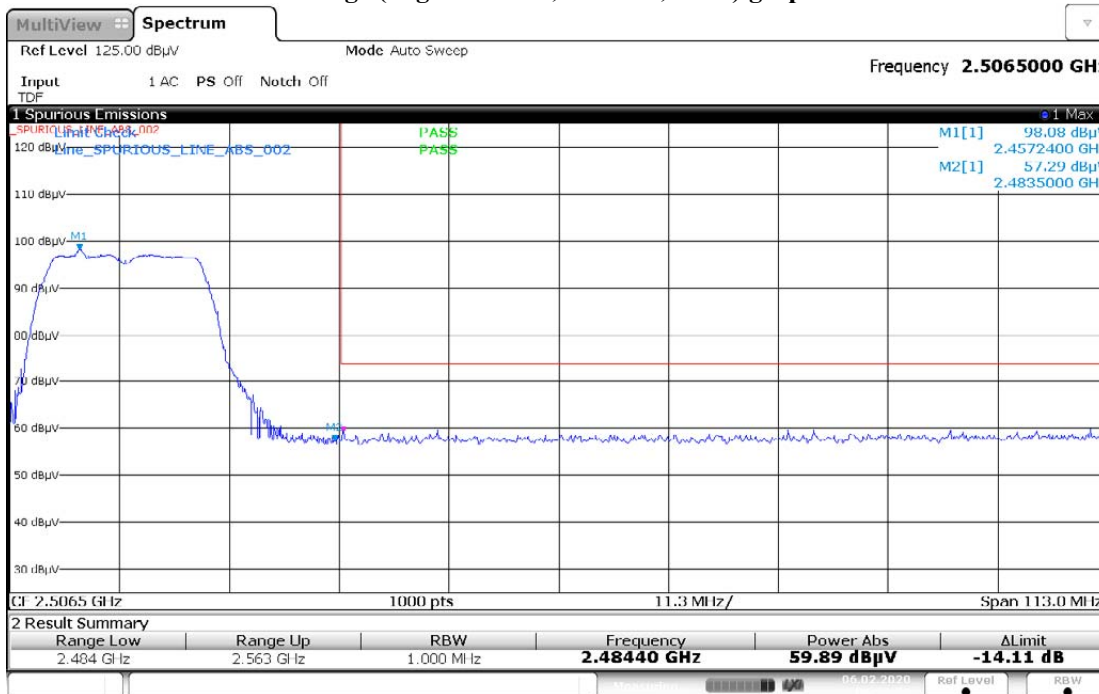


06:39:59 06.02.2020

### Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

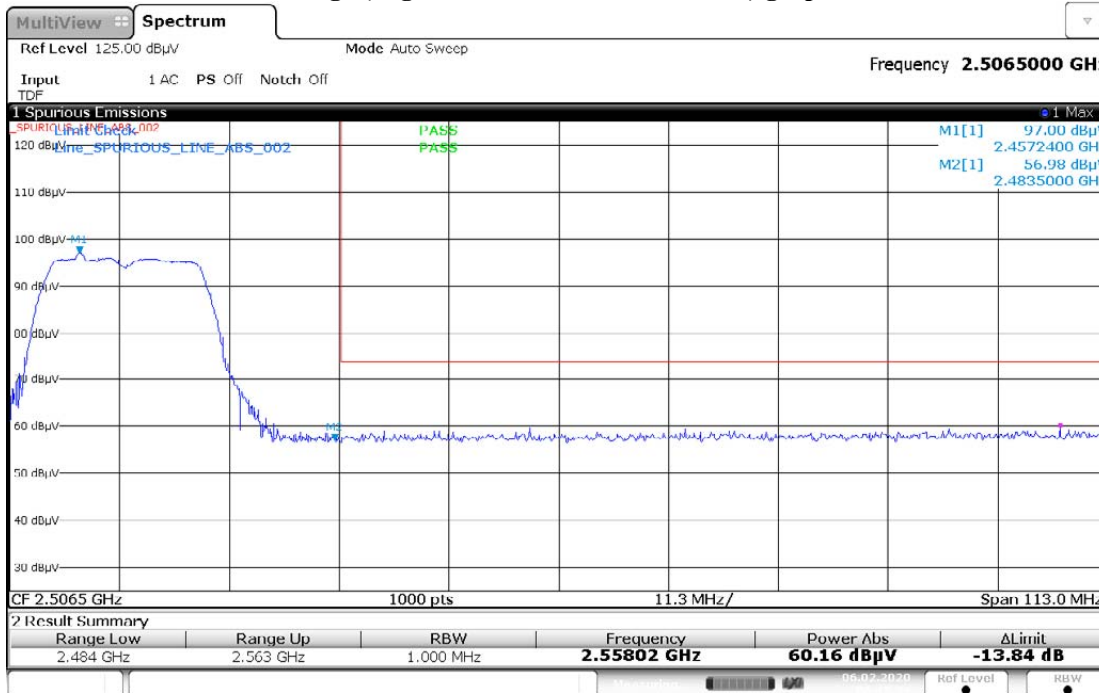


06:43:39 06.02.2020

### Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

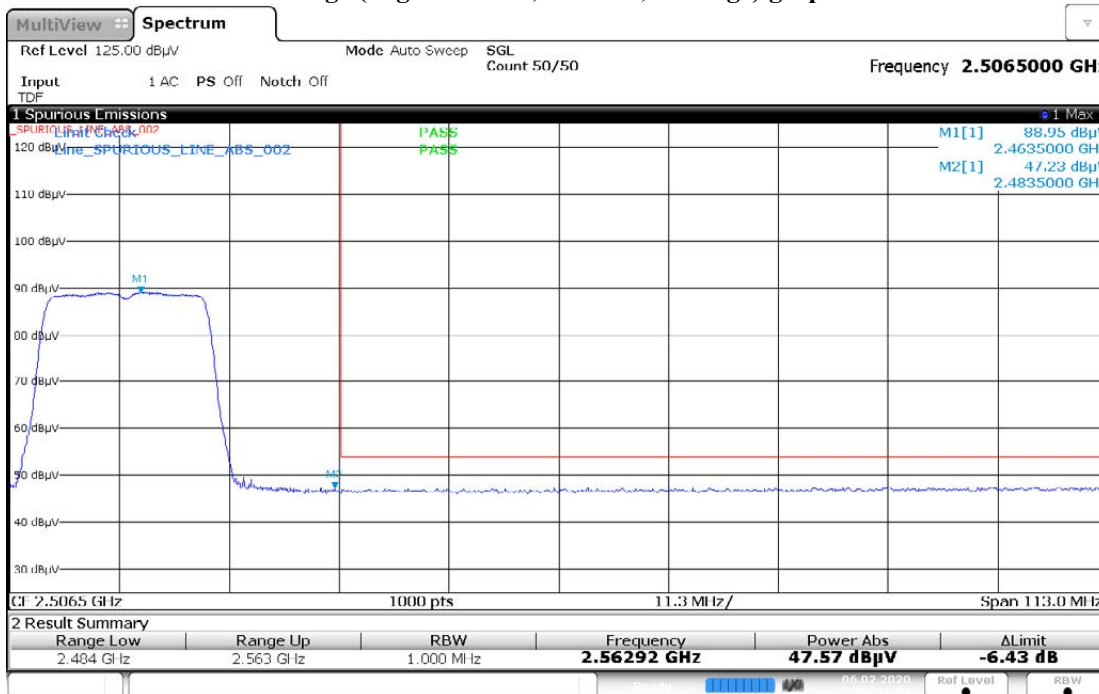

06:31:51 06.02.2020


### Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

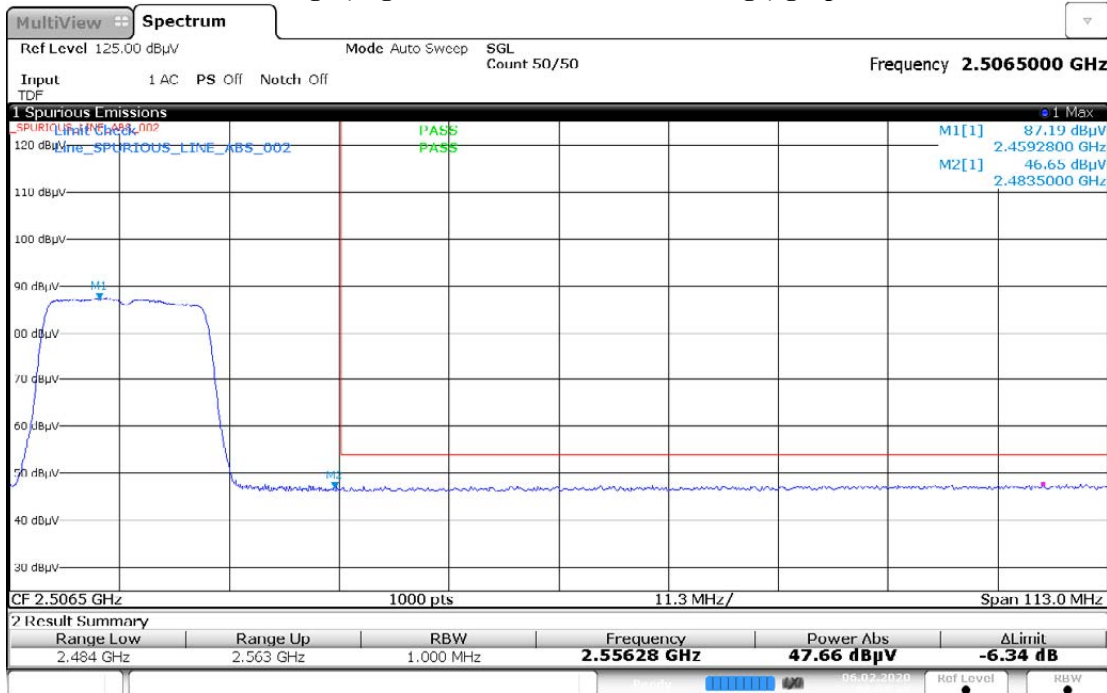

06:35:41 06.02.2020




### Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

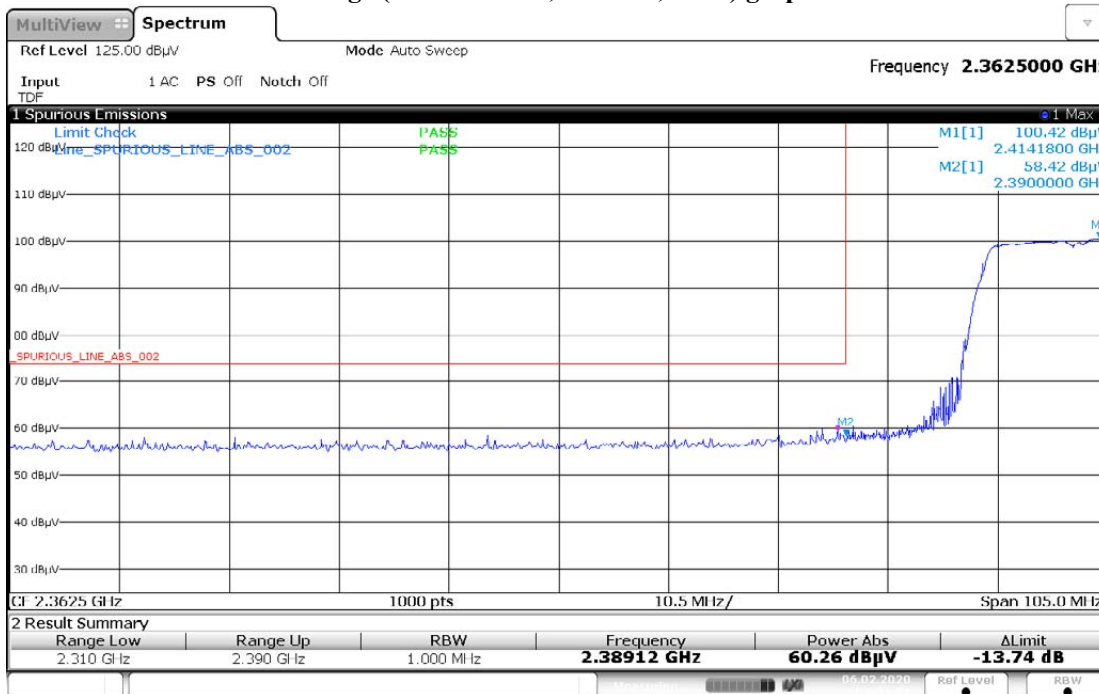


07:34:51 06.02.2020

### Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

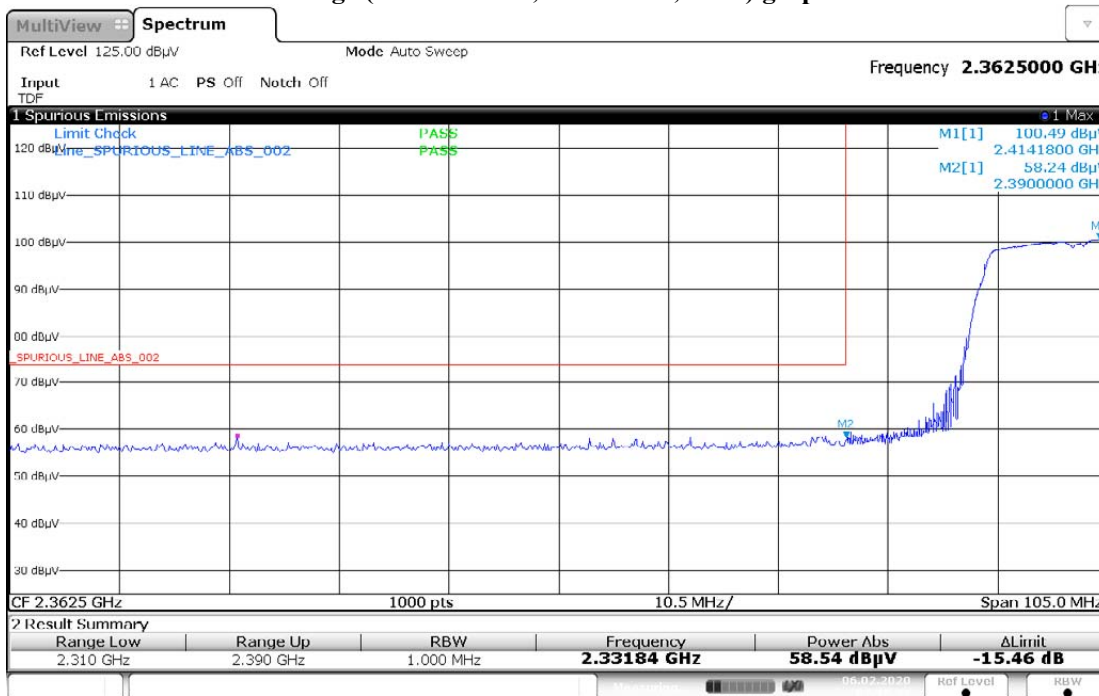


07:38:31 06.02.2020

**Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot**

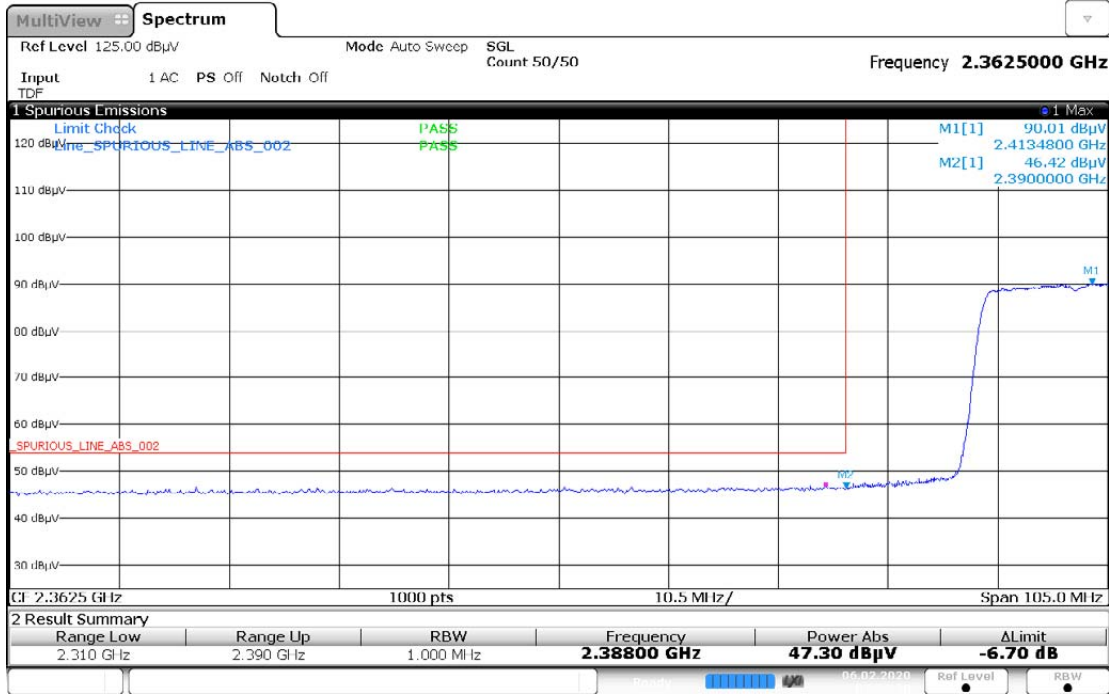

07:25:39 06.02.2020

**Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot**

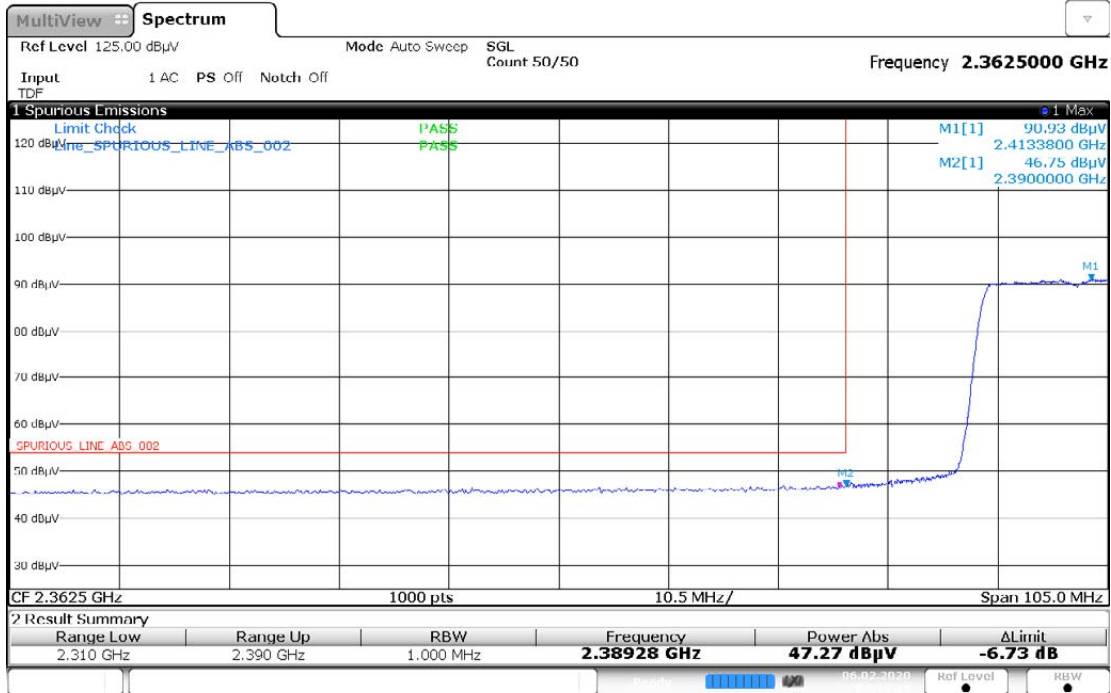


07:29:11 06.02.2020






**Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot**

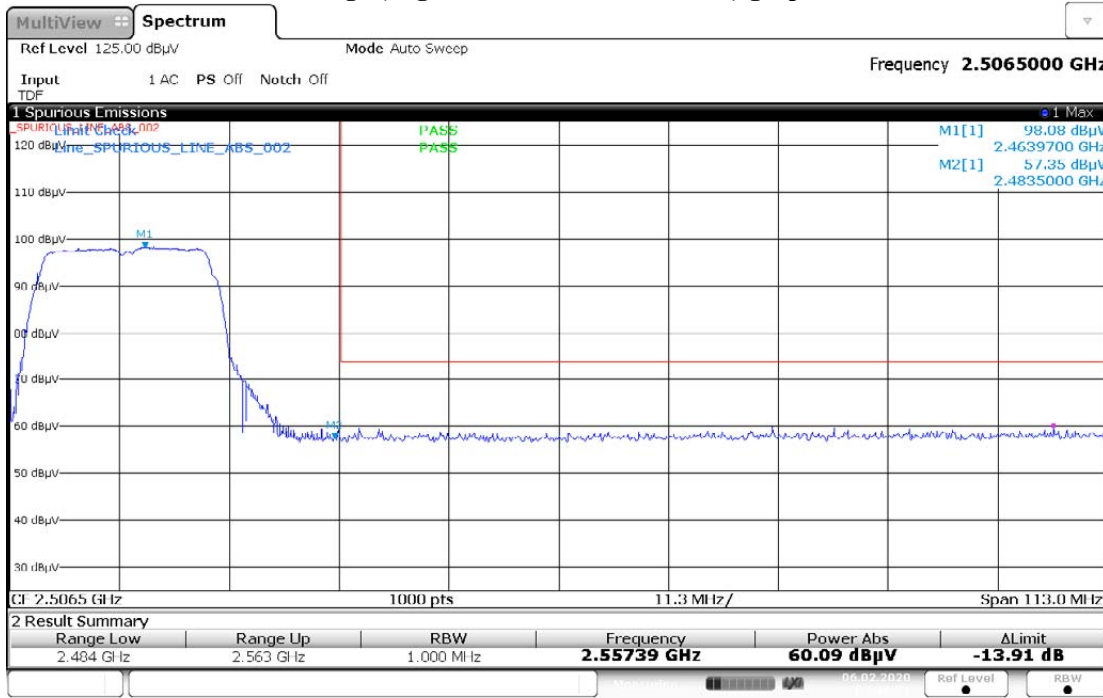


07:46:51 06.02.2020

**Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot**

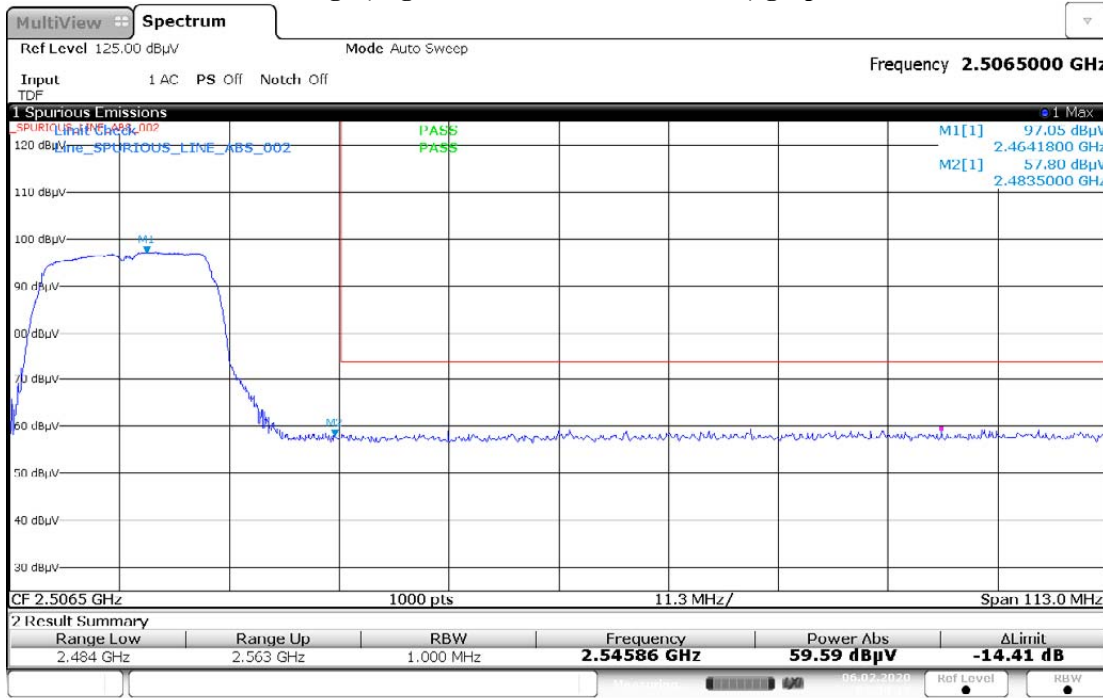


07:50:14 06.02.2020

### Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

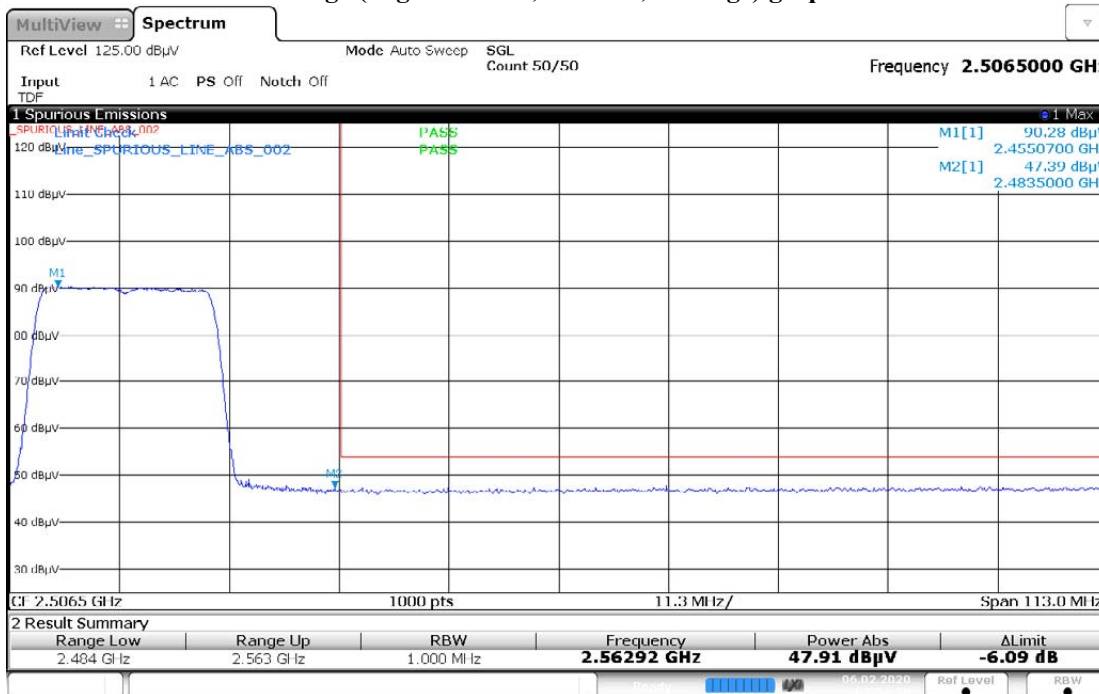

07:54:39 06.02.2020


### Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

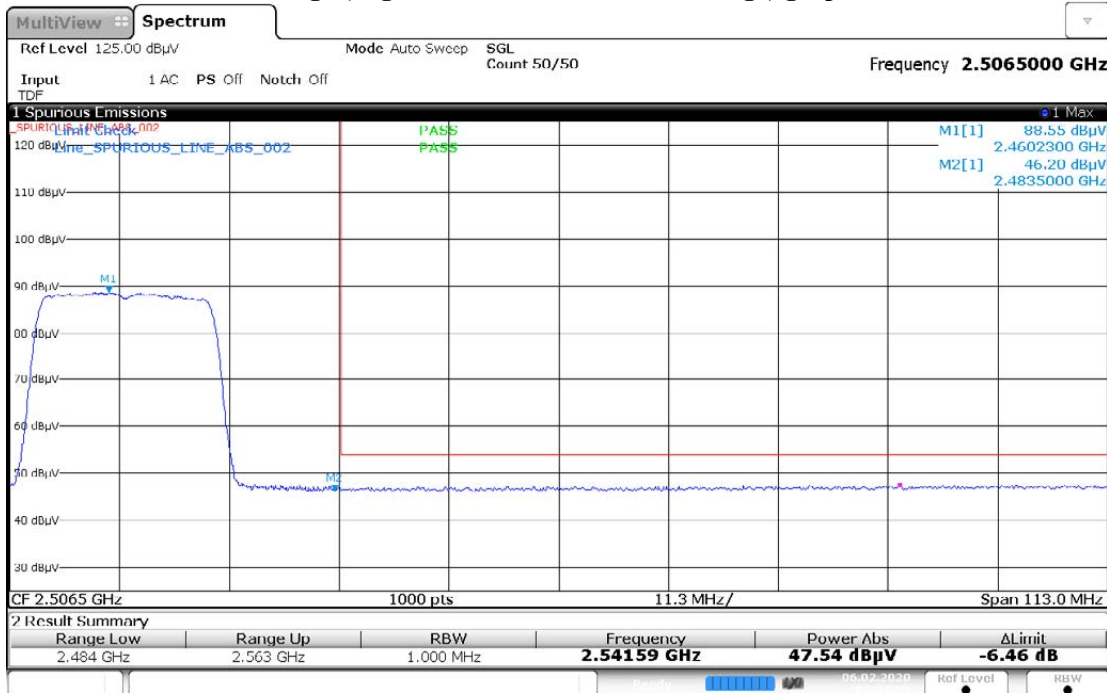


07:58:31 06.02.2020




**VERTICAL, QPK**

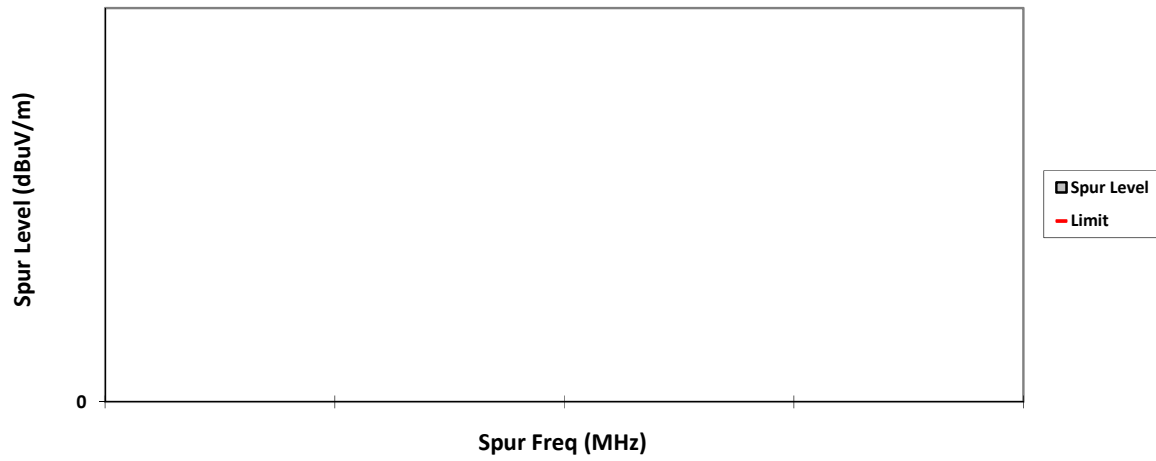


**HORIZONTAL, QPK**

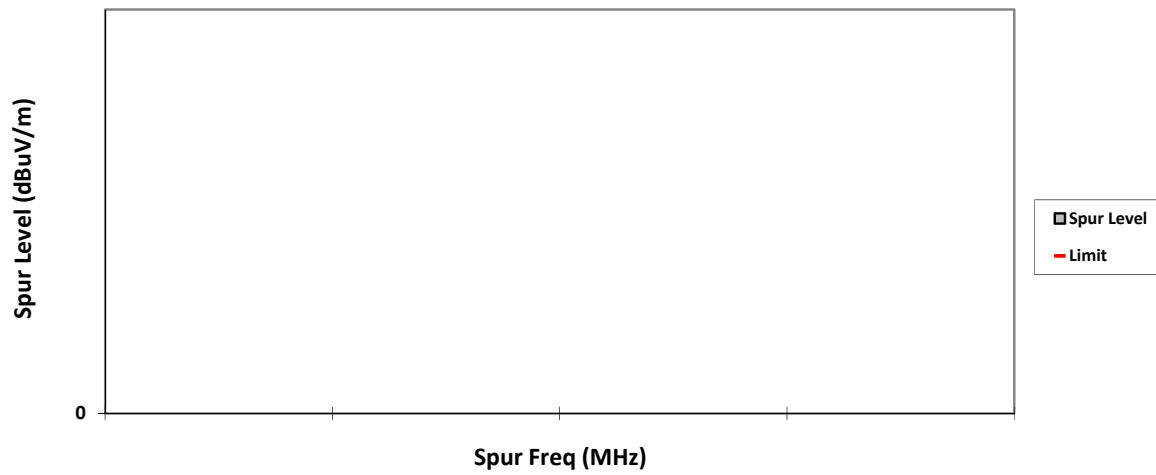


### VERTICAL, PK

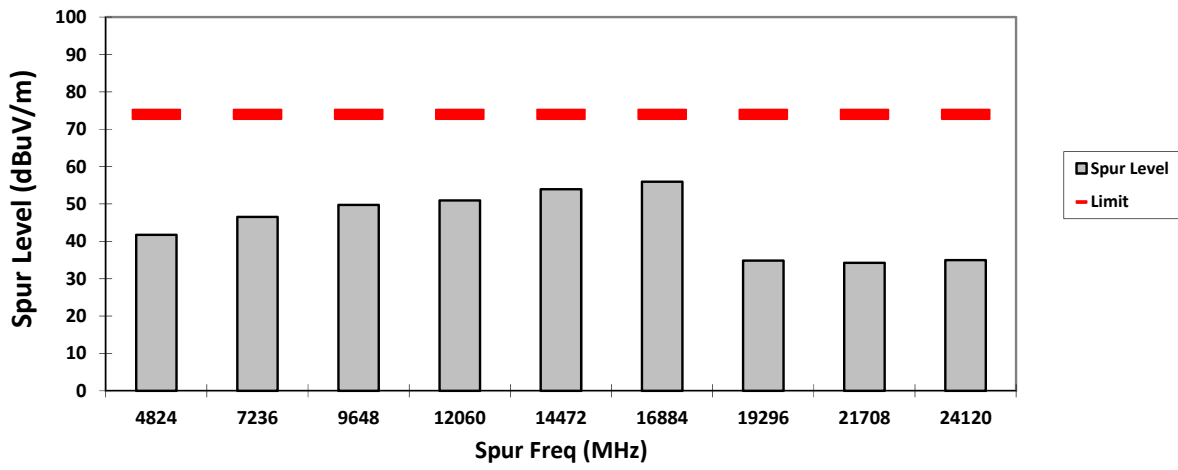


### HORIZONTAL, PK

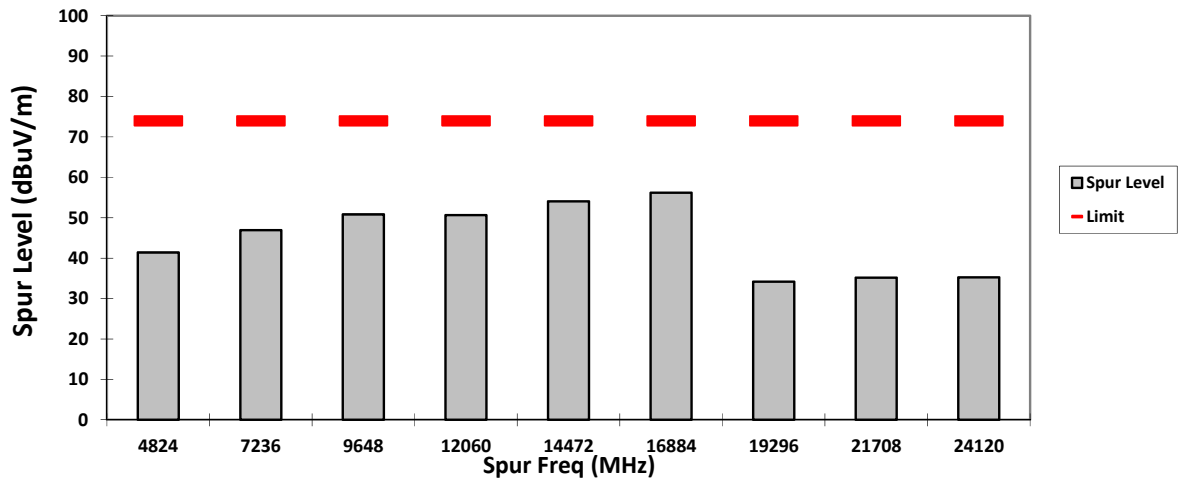

### VERTICAL, AV

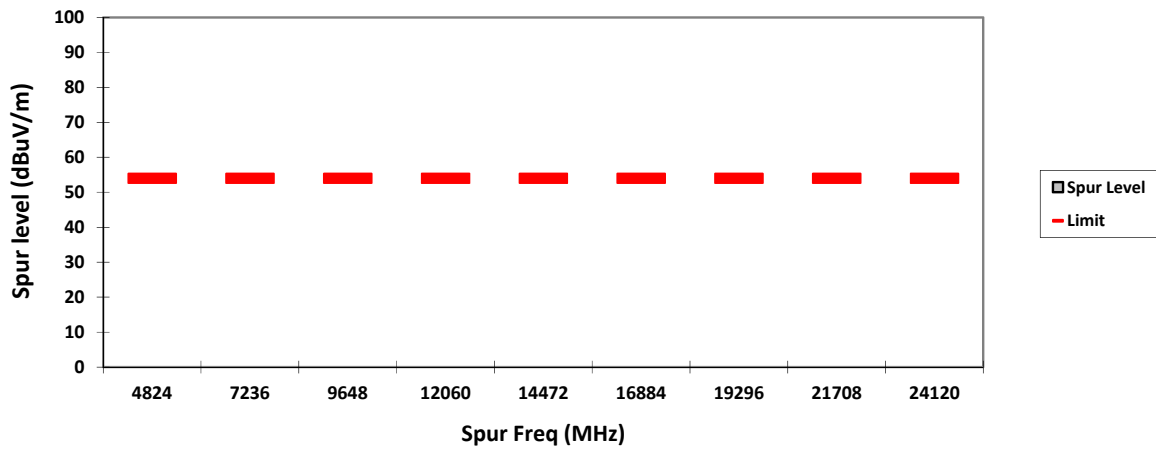


### HORIZONTAL, AV

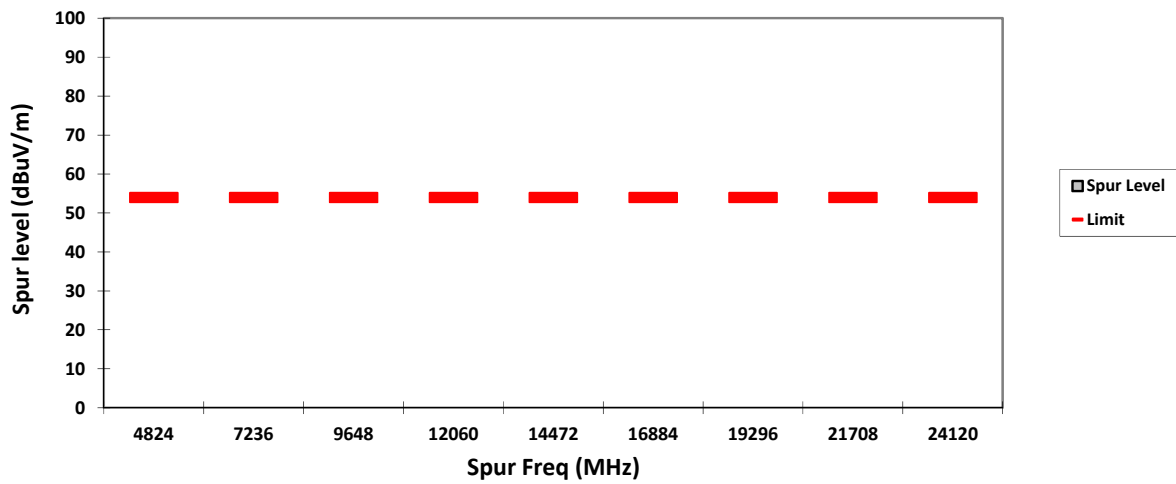




**VERTICAL, QPK**

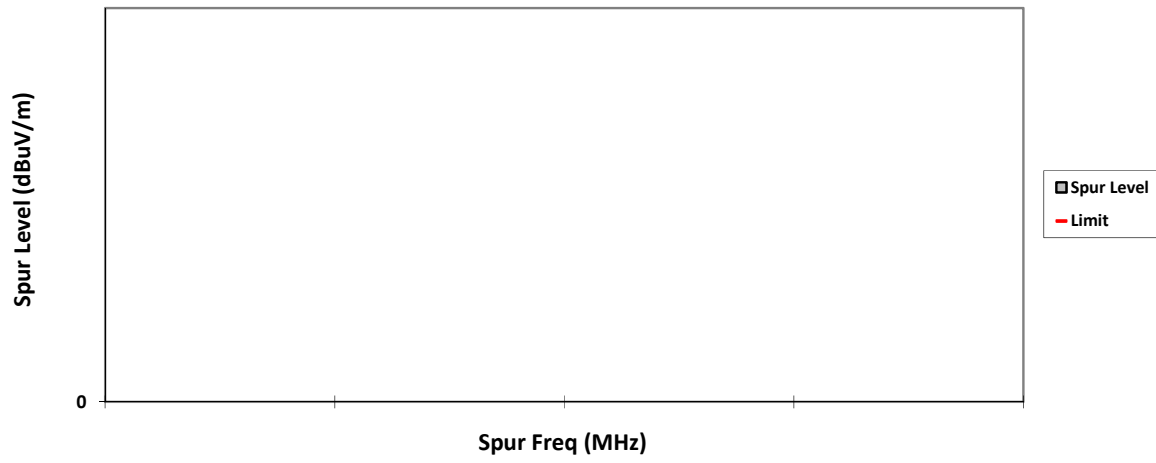


**HORIZONTAL, QPK**

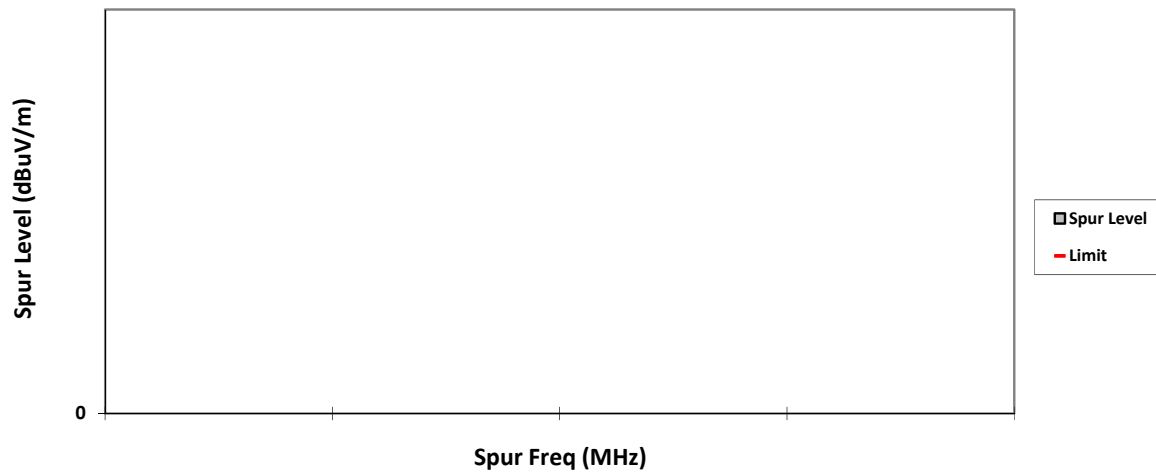





### VERTICAL, PK

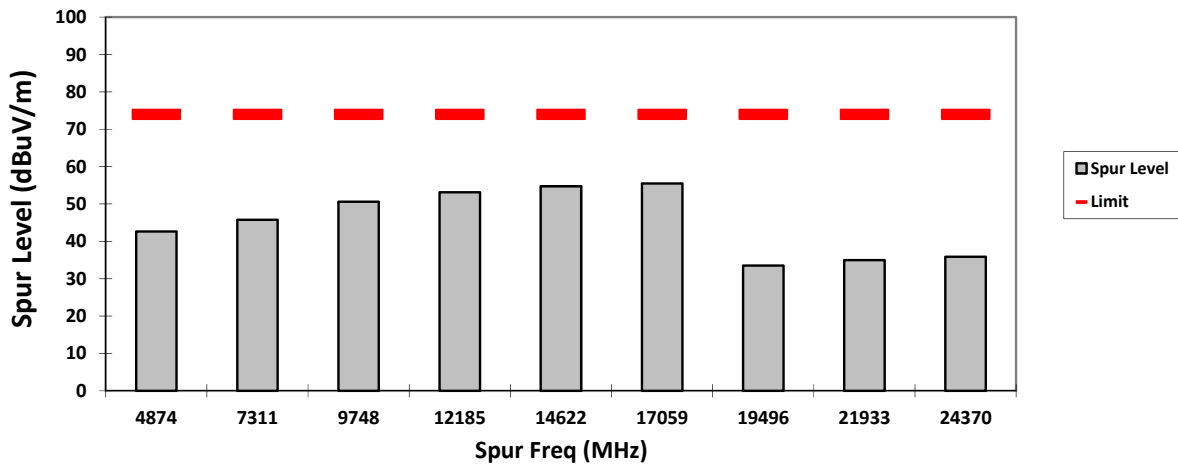


### HORIZONTAL, PK

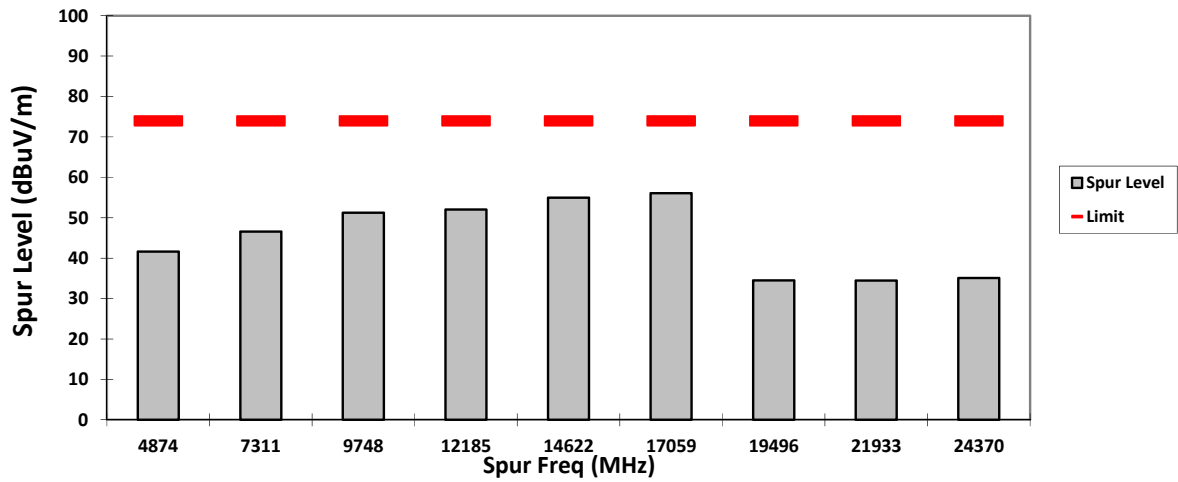

### VERTICAL, AV

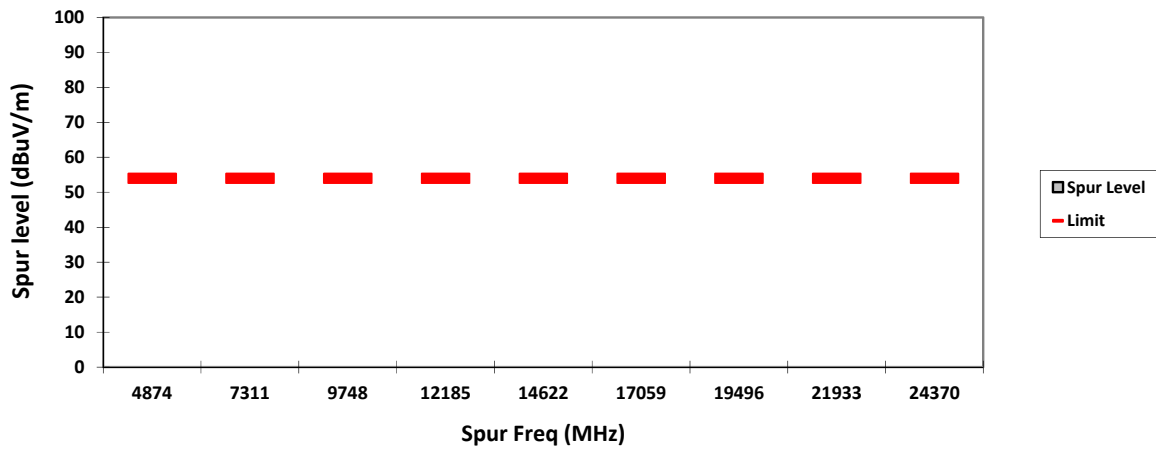


### HORIZONTAL, AV

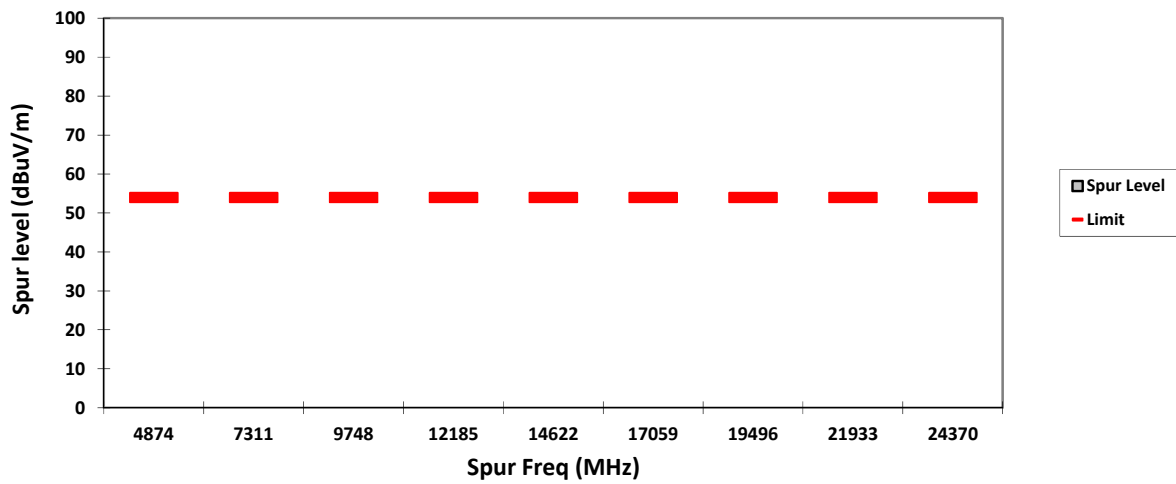





**VERTICAL, QPK**

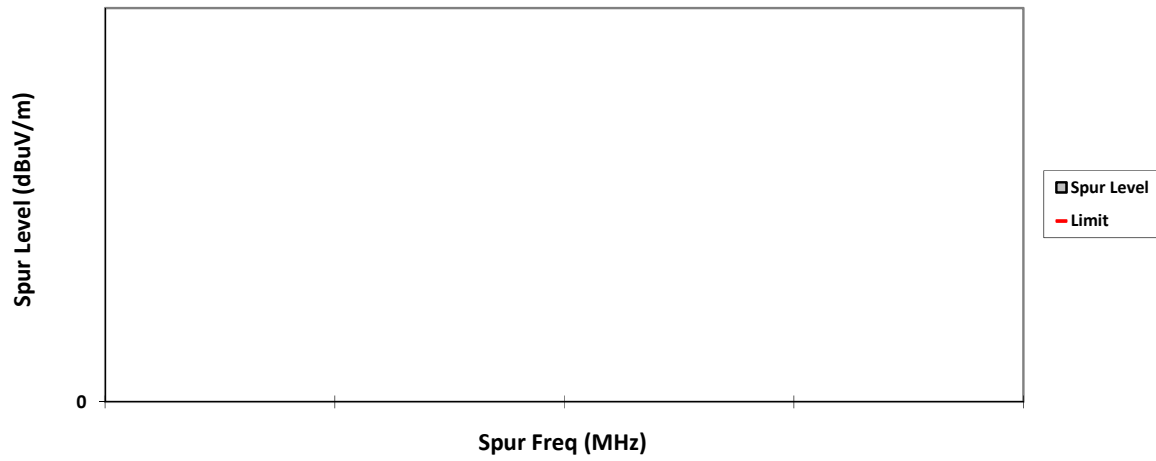


**HORIZONTAL, QPK**

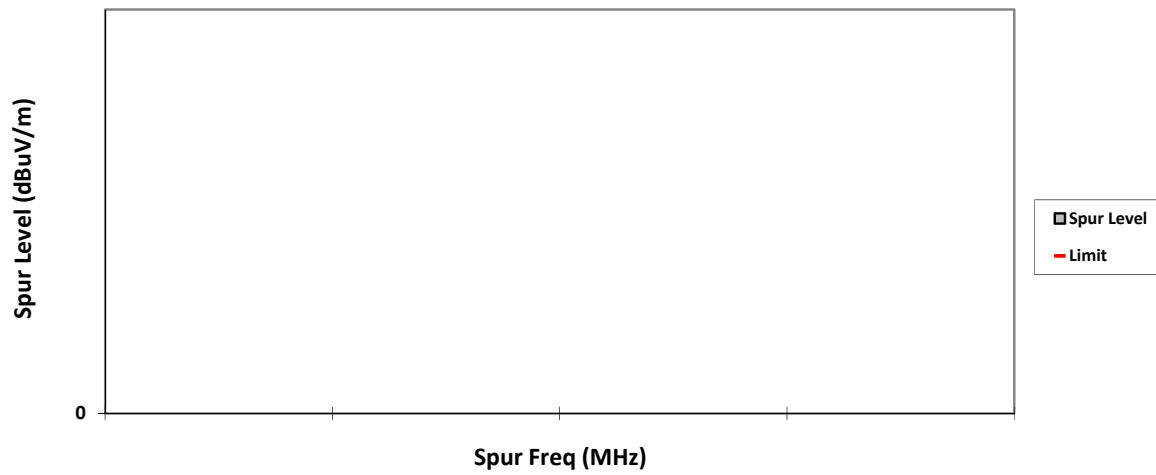


### VERTICAL, PK

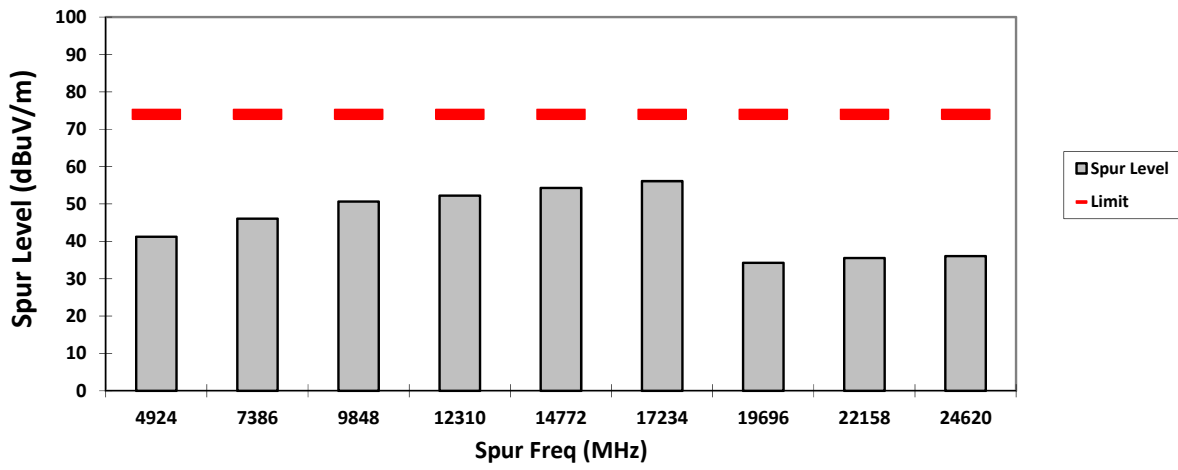


### HORIZONTAL, PK

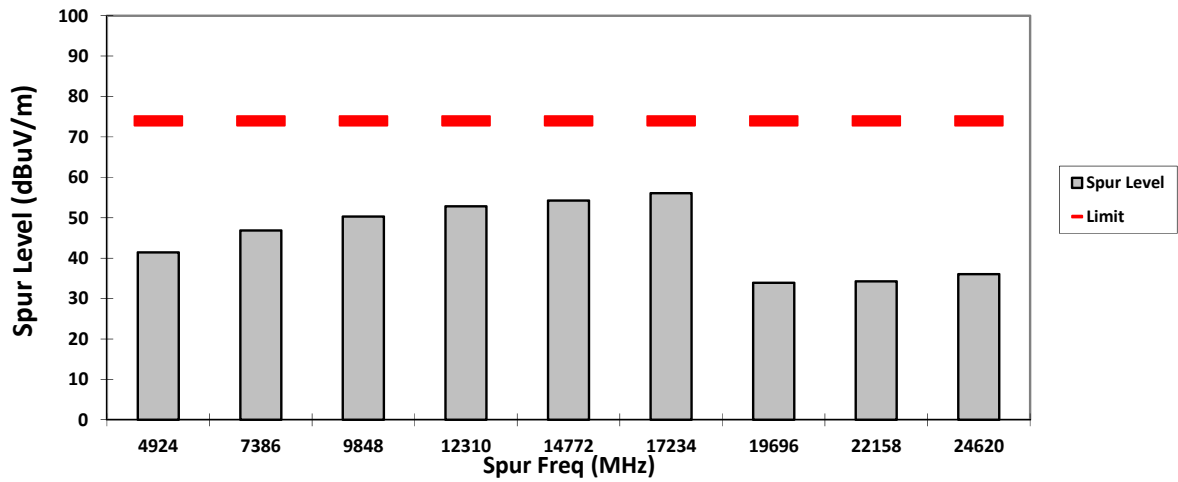

### VERTICAL, AV

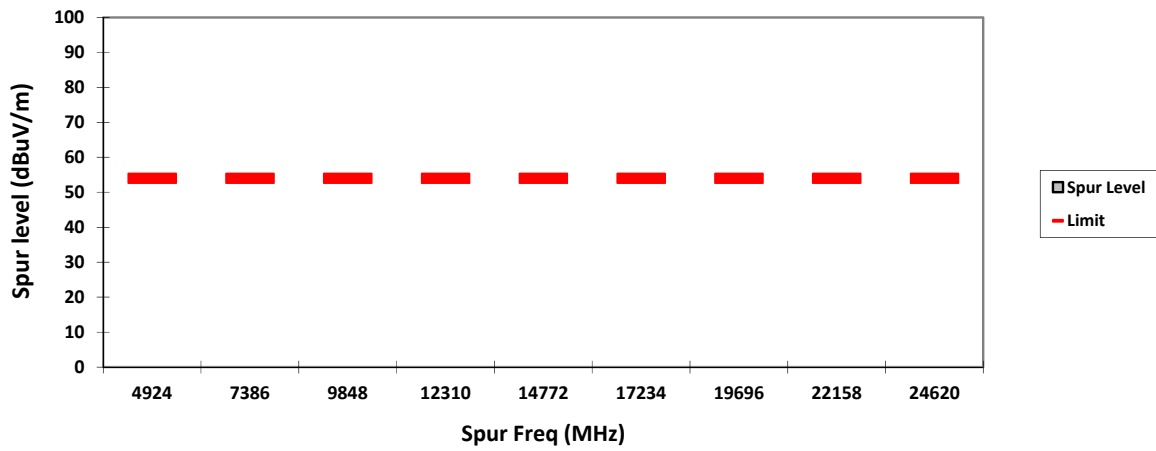


### HORIZONTAL, AV

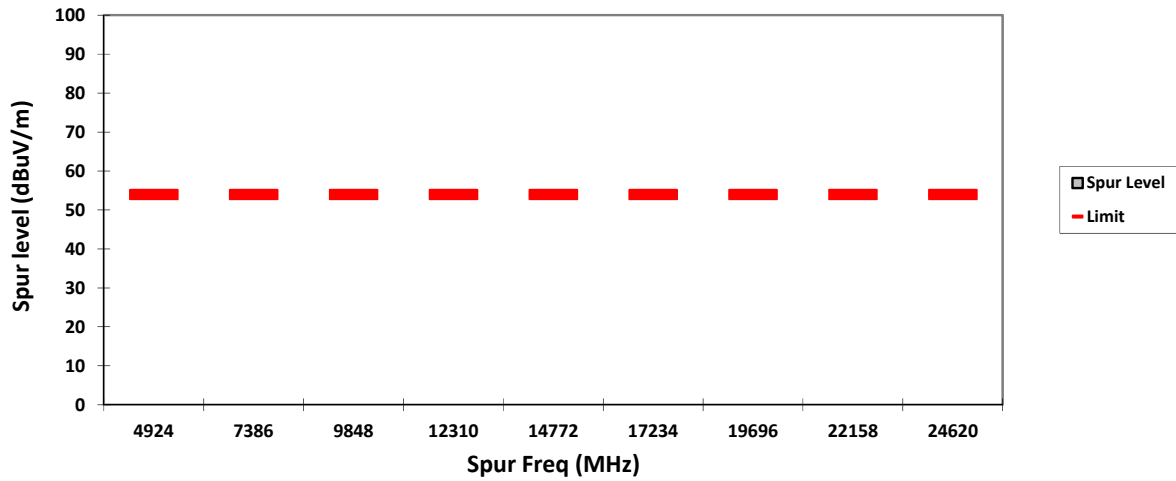




**VERTICAL, QPK**

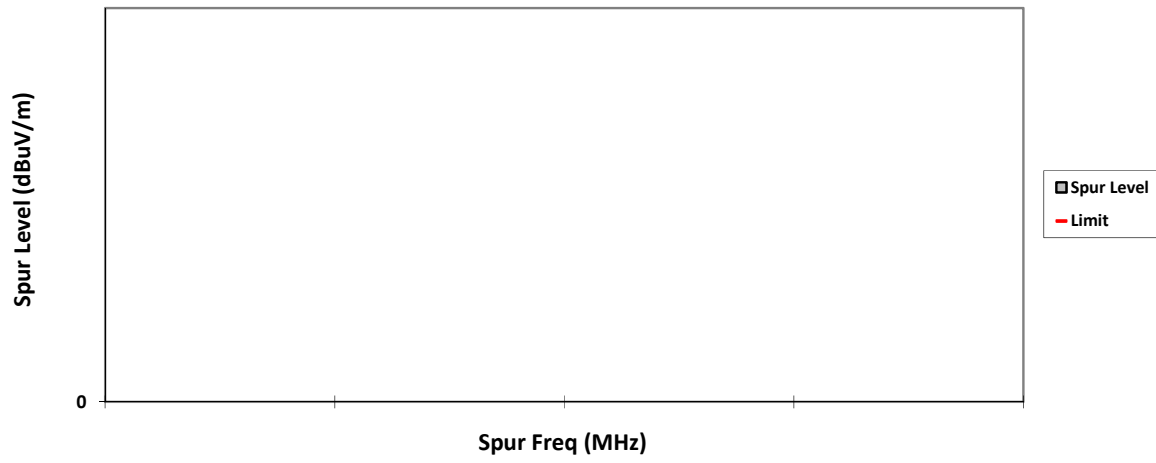


**HORIZONTAL, QPK**

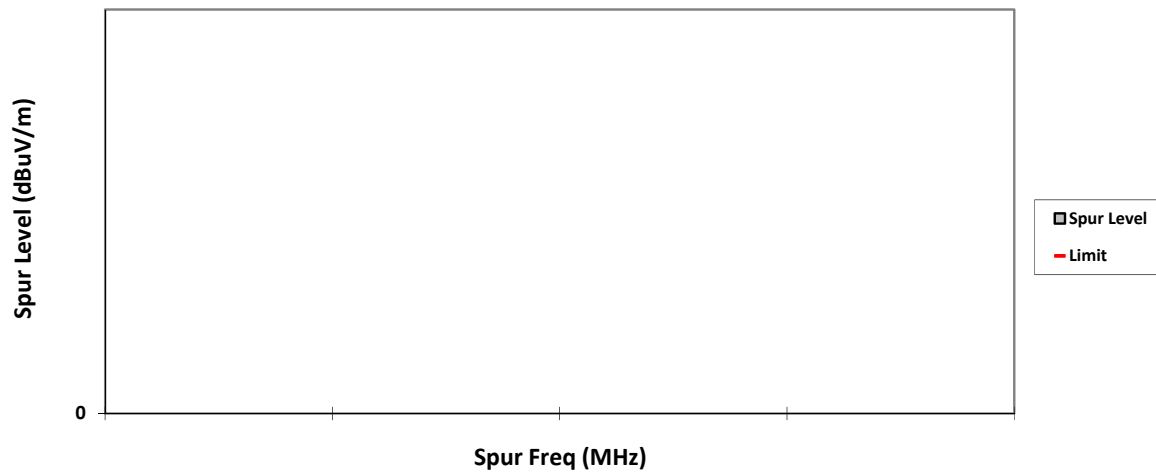





### VERTICAL, PK

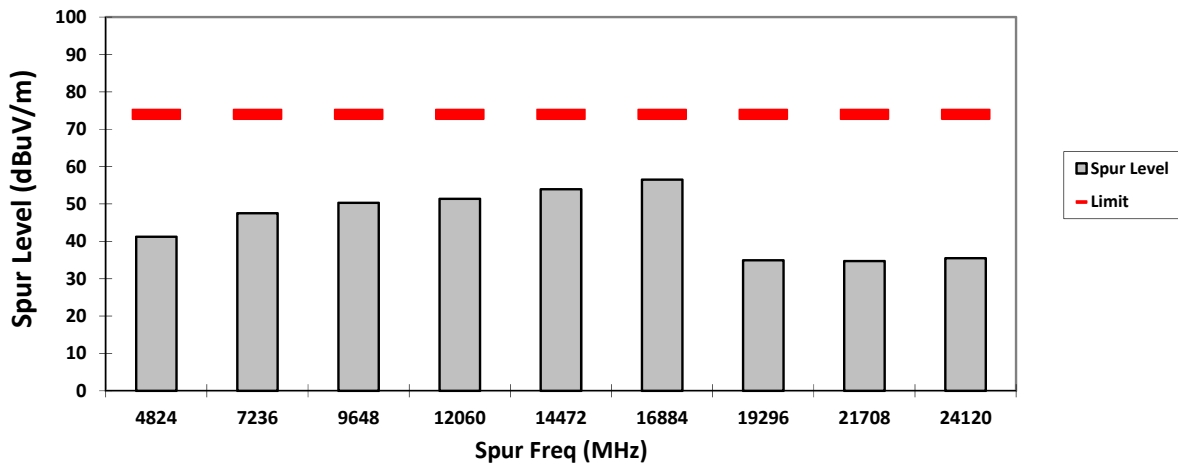


### HORIZONTAL, PK

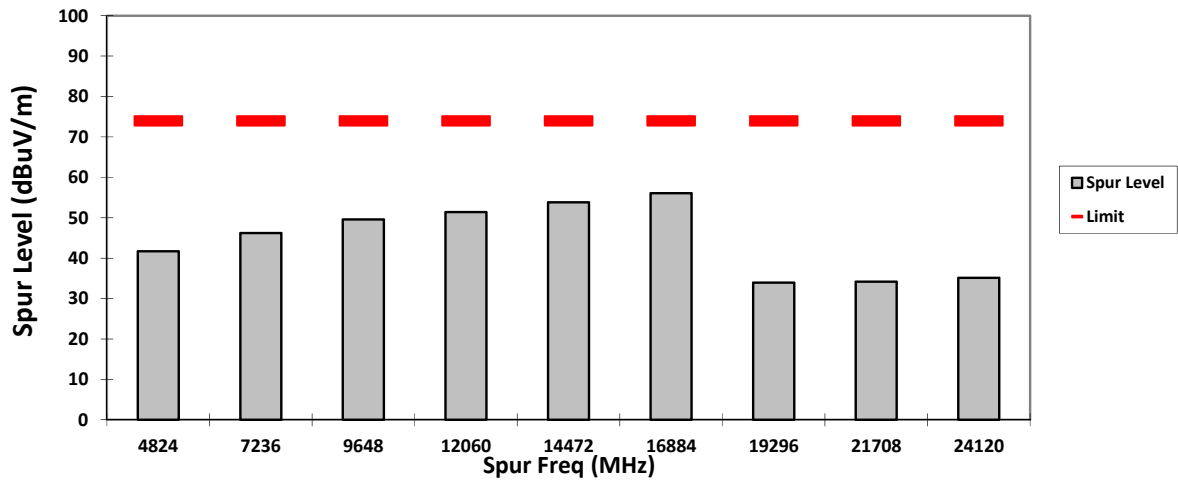

### VERTICAL, AV

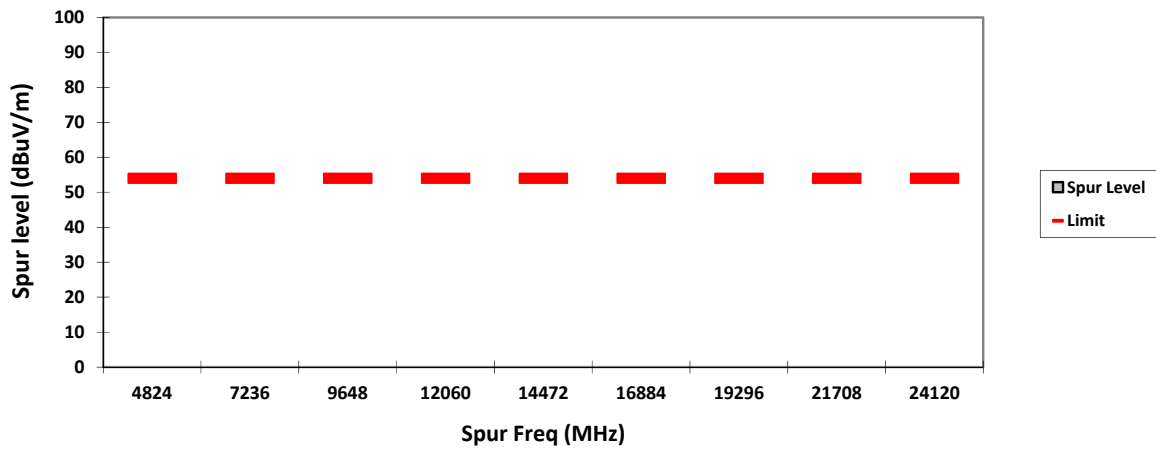


### HORIZONTAL, AV

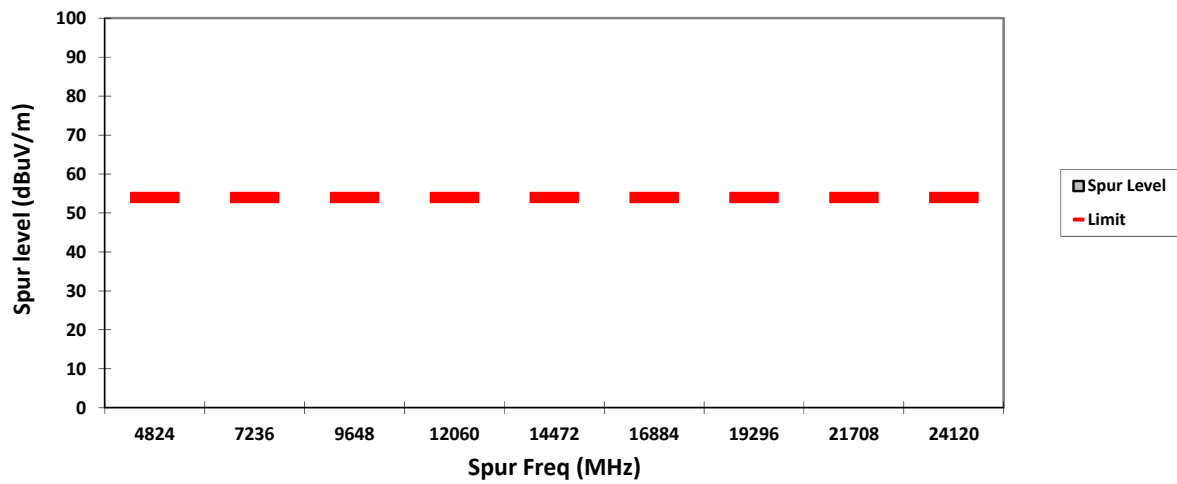





**VERTICAL, QPK**

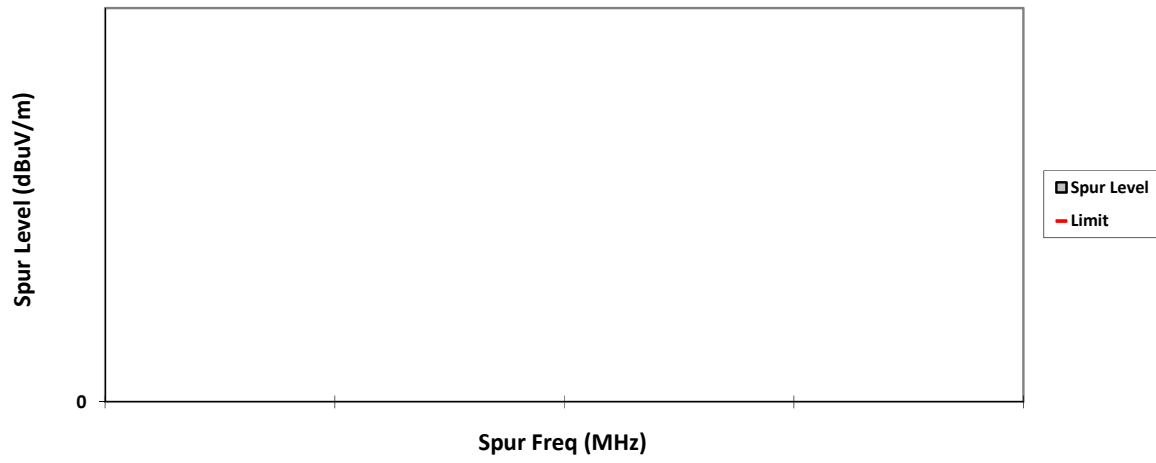


**HORIZONTAL, QPK**

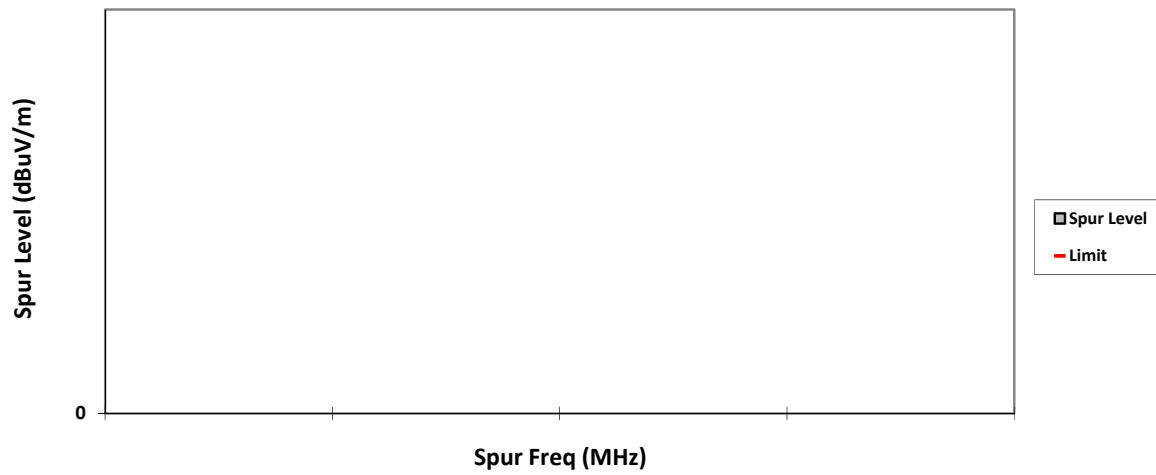


### VERTICAL, PK

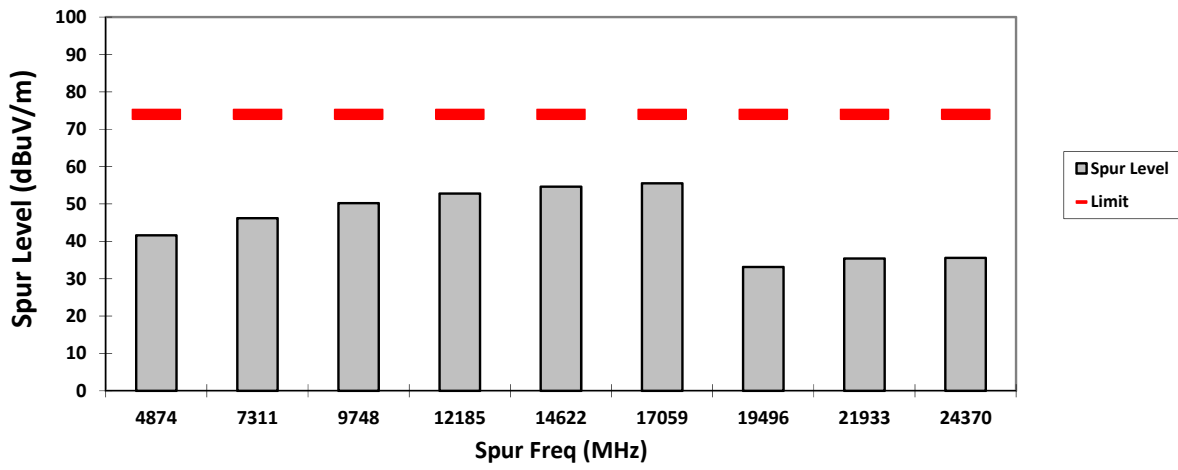


### HORIZONTAL, PK

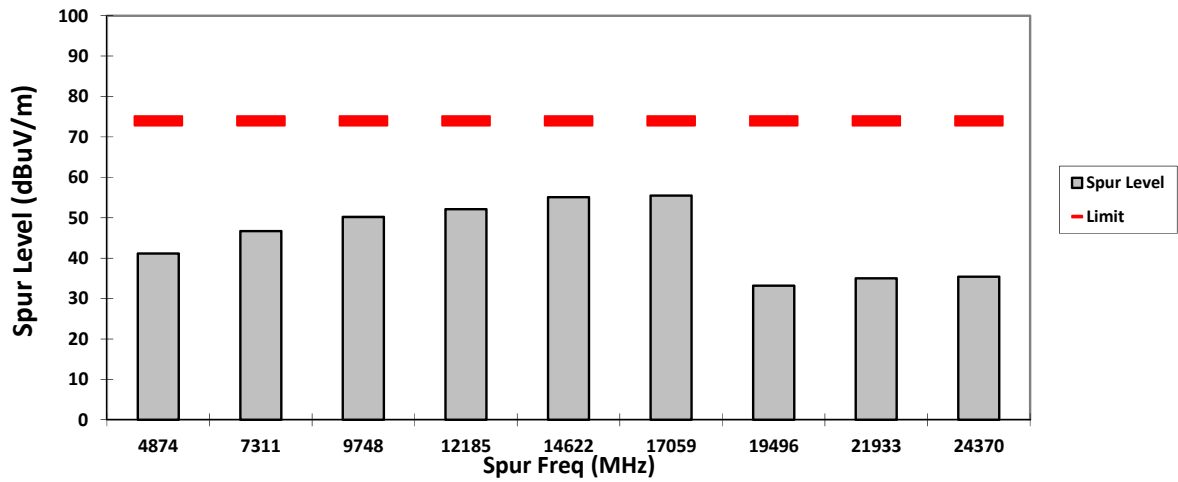

### VERTICAL, AV

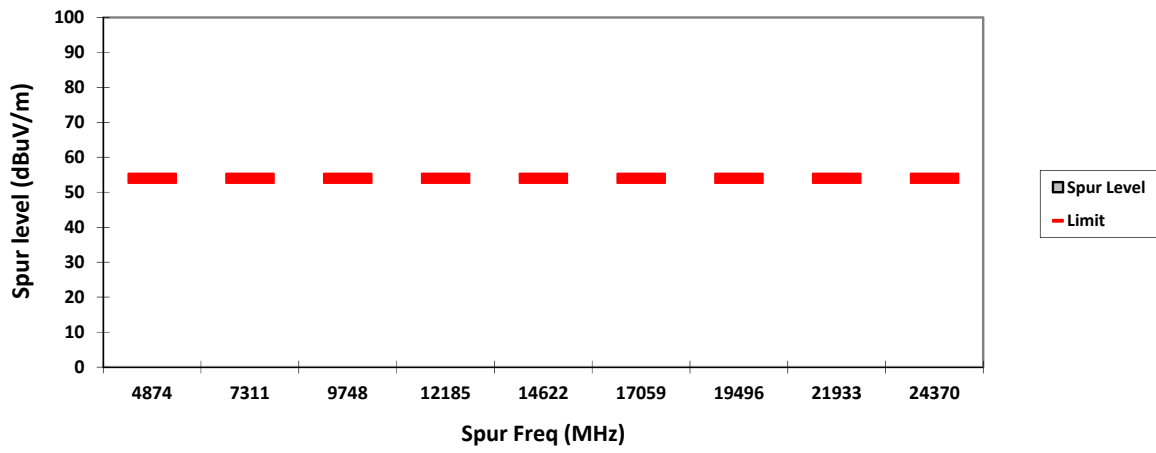


### HORIZONTAL, AV

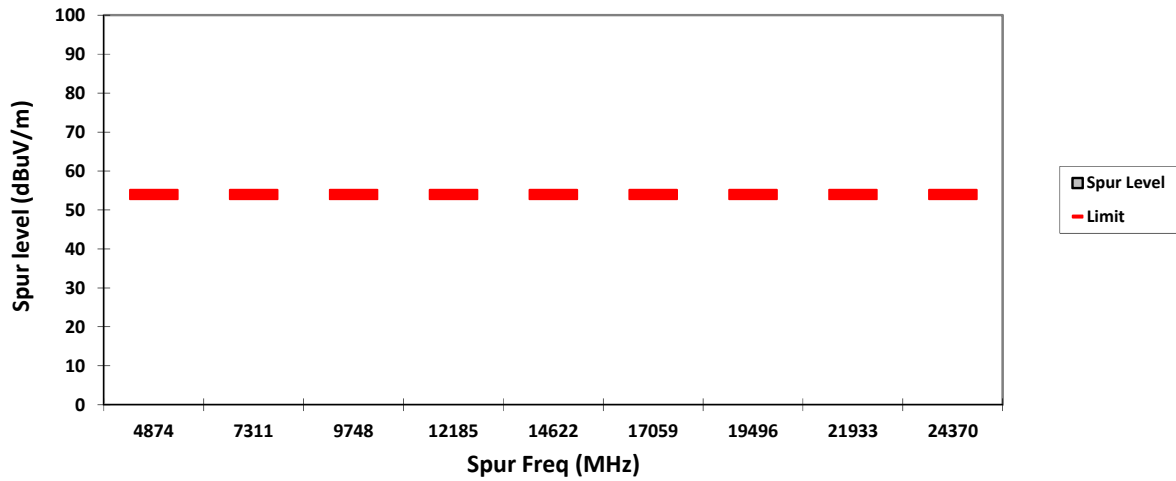




**VERTICAL, QPK**

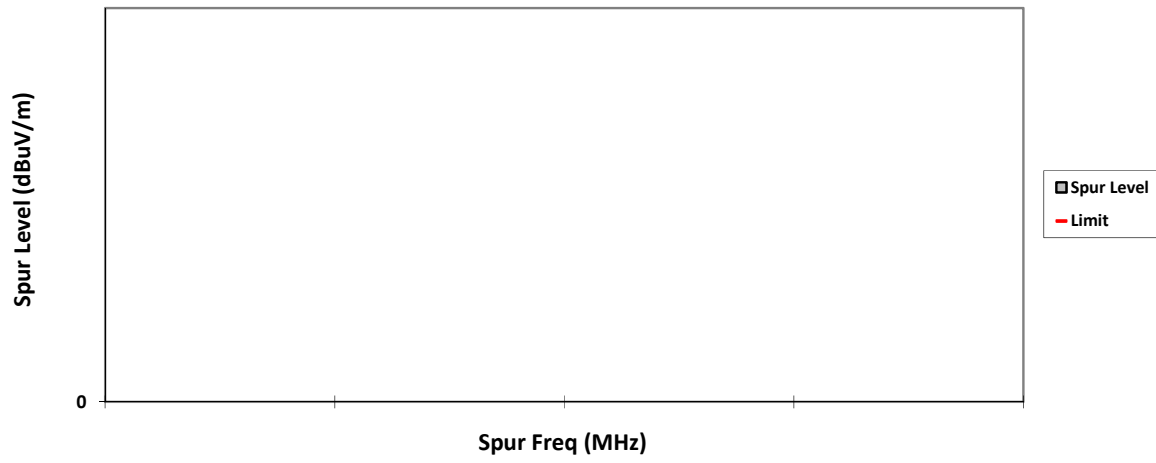


**HORIZONTAL, QPK**

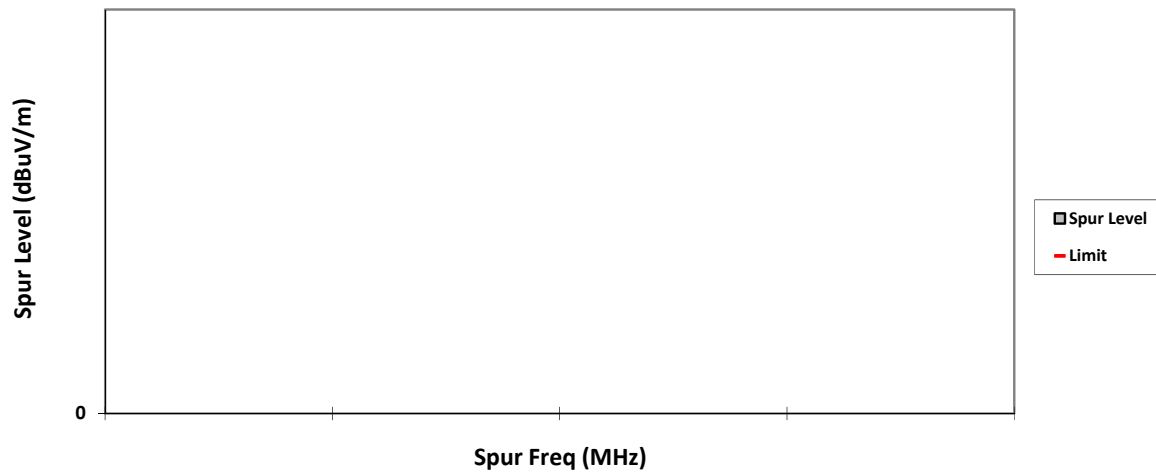





**VERTICAL, PK**

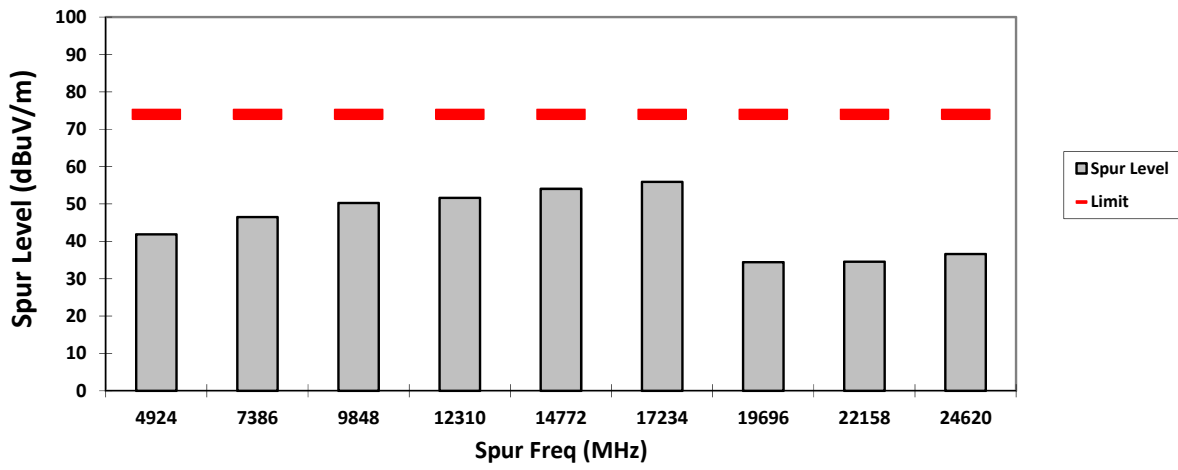


**HORIZONTAL, PK**

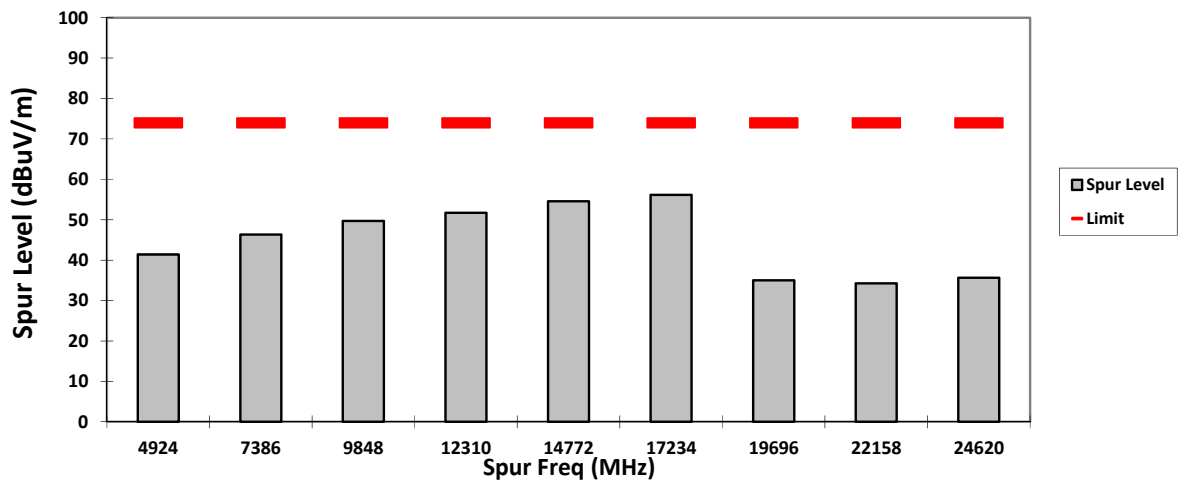

### VERTICAL, AV

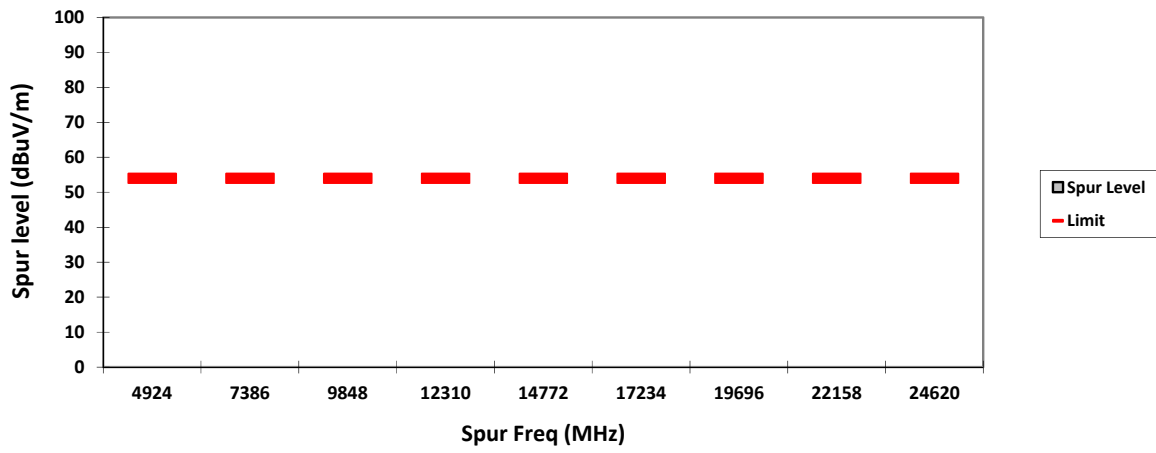


### HORIZONTAL, AV

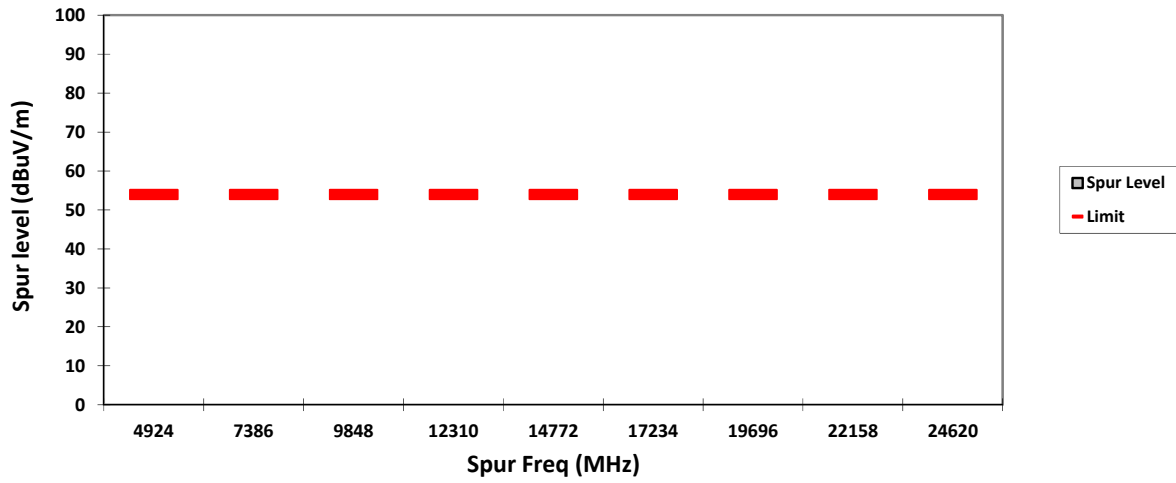





**VERTICAL, QPK**

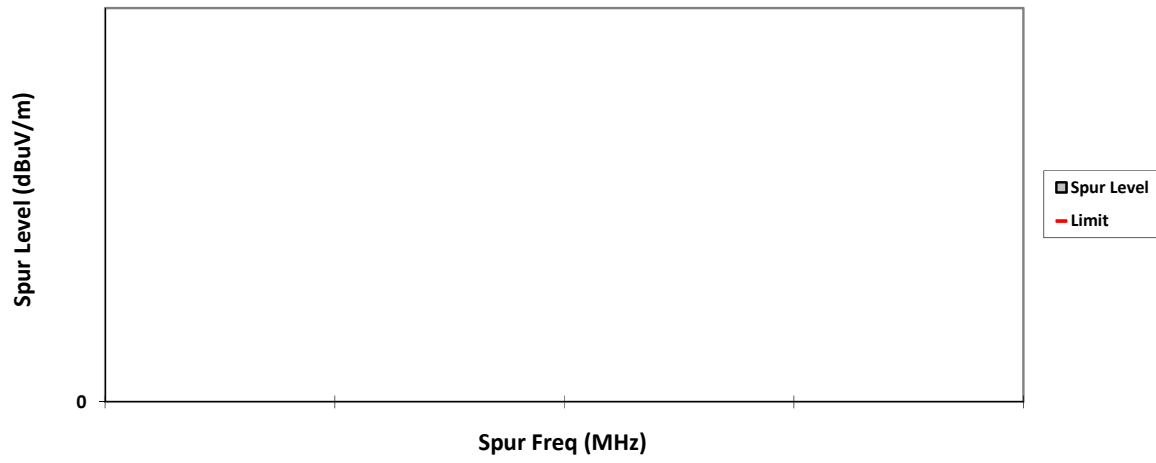


**HORIZONTAL, QPK**

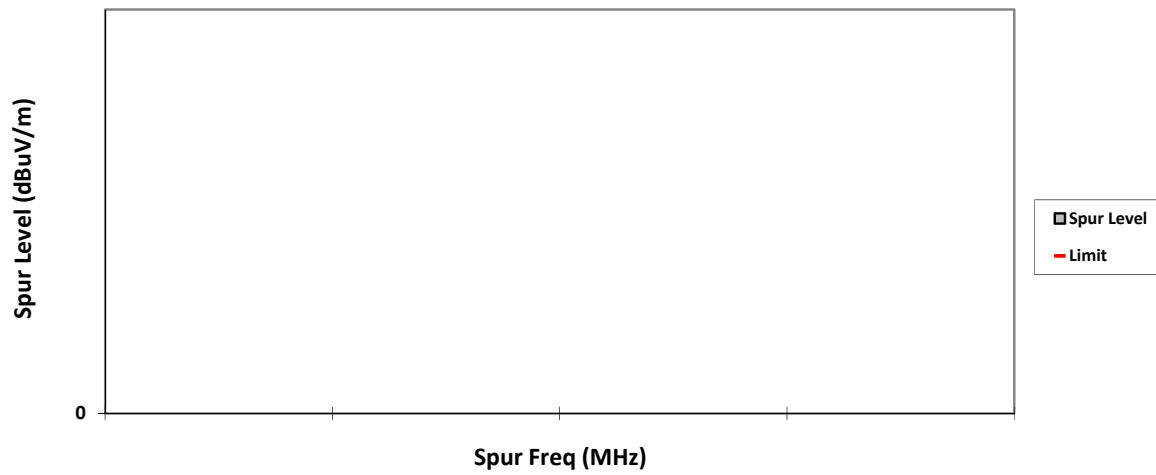


### VERTICAL, PK

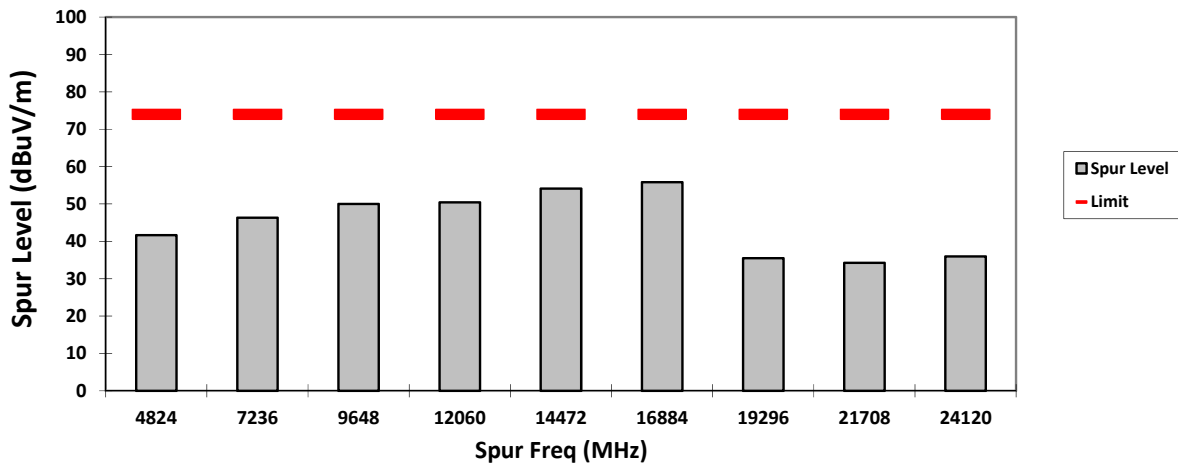


### HORIZONTAL, PK

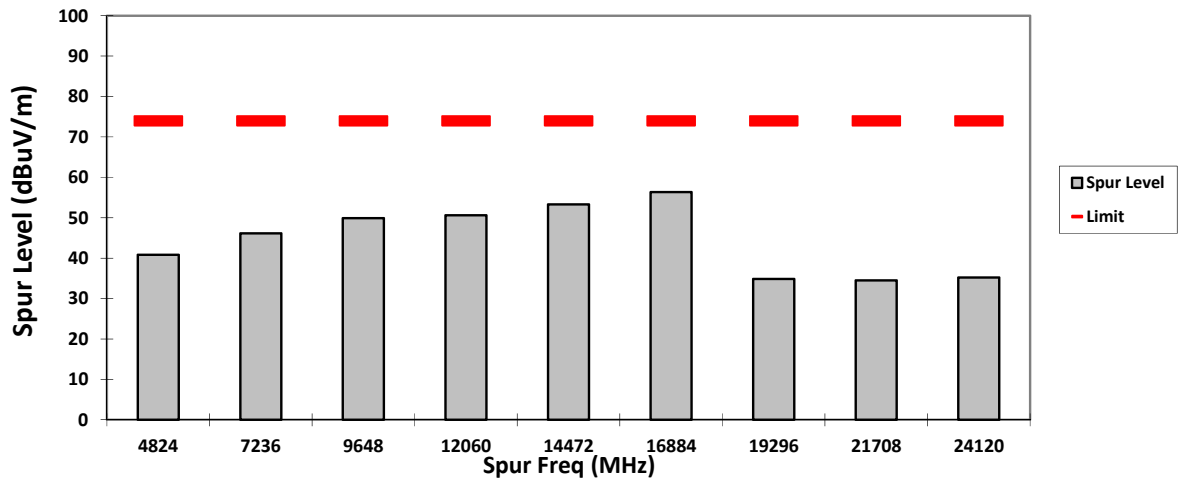

**VERTICAL, AV**

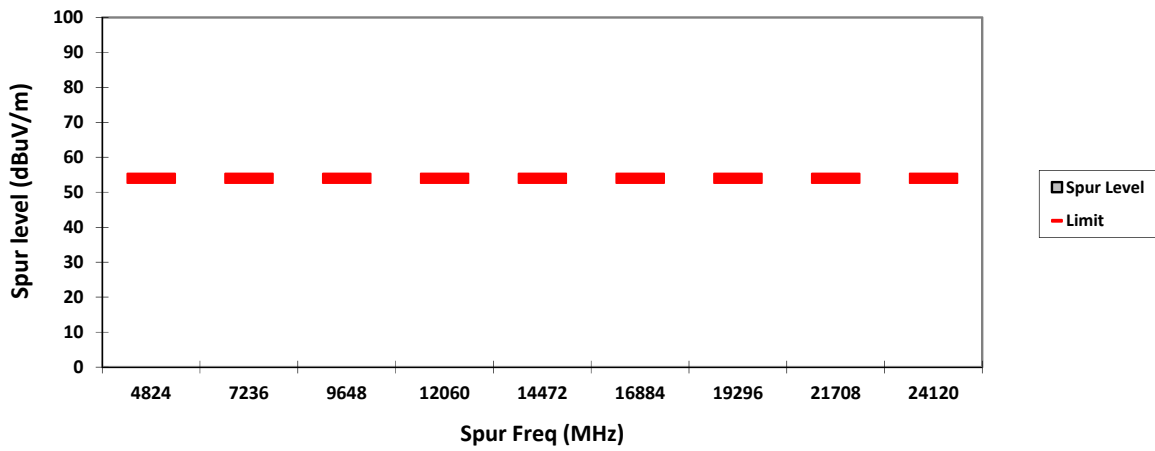


**HORIZONTAL, AV**

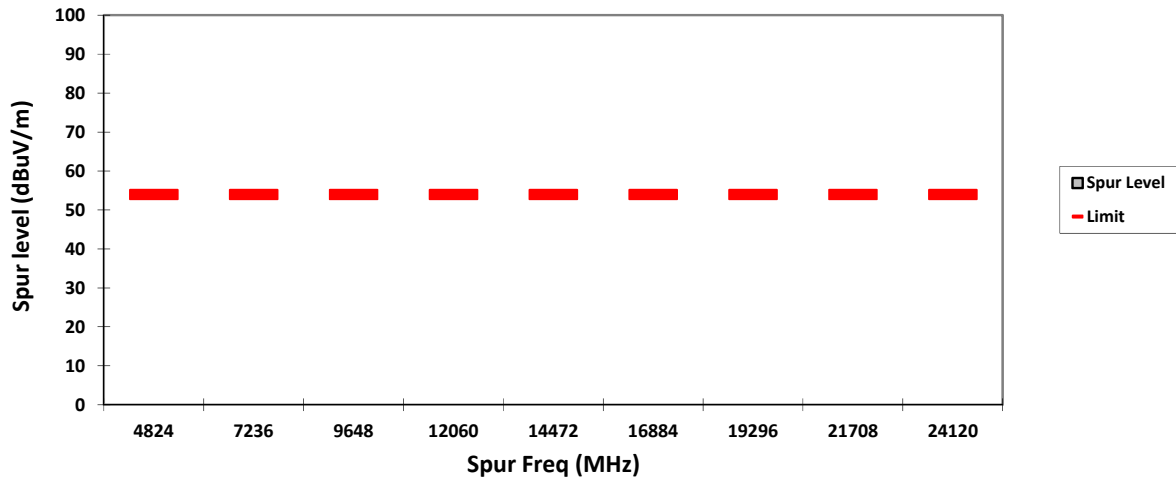




**VERTICAL, QPK**

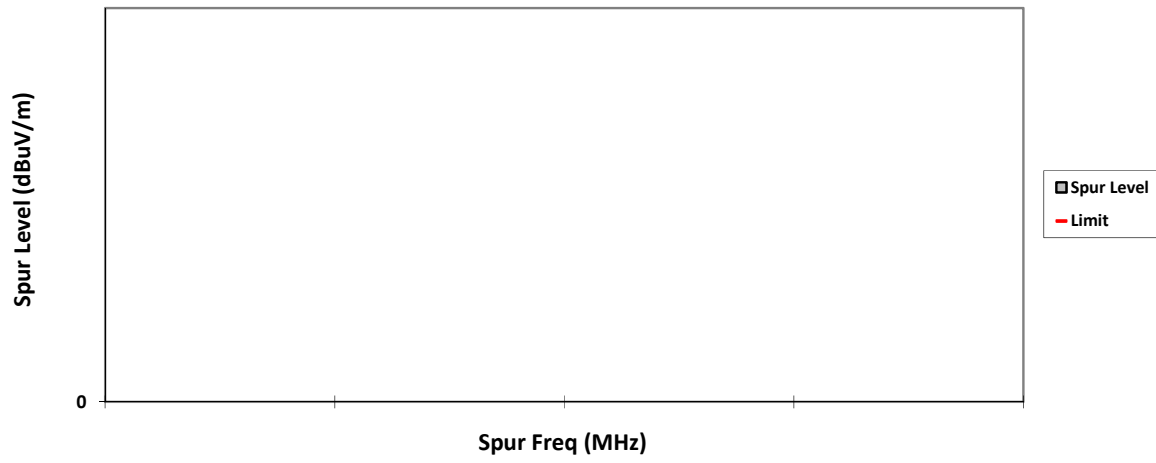


**HORIZONTAL, QPK**

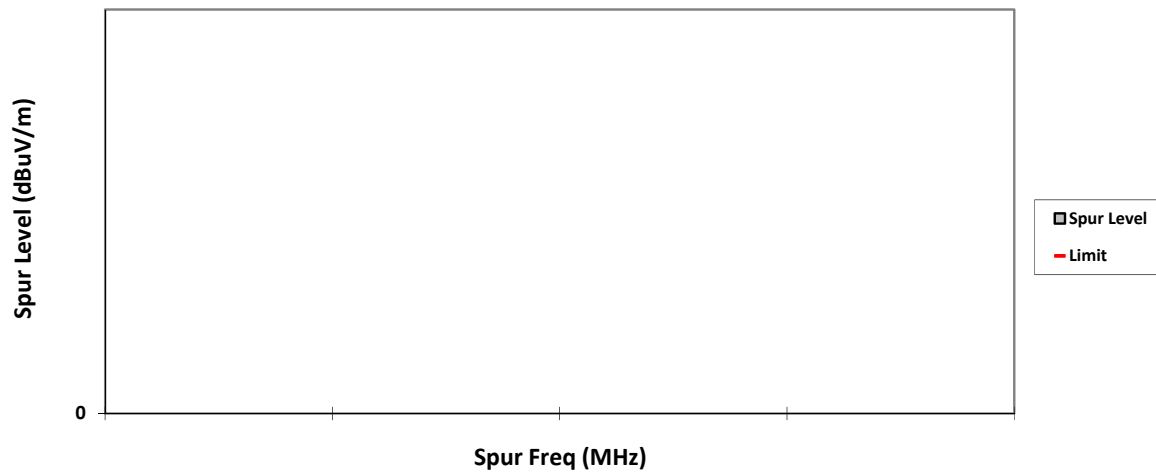





### VERTICAL, PK

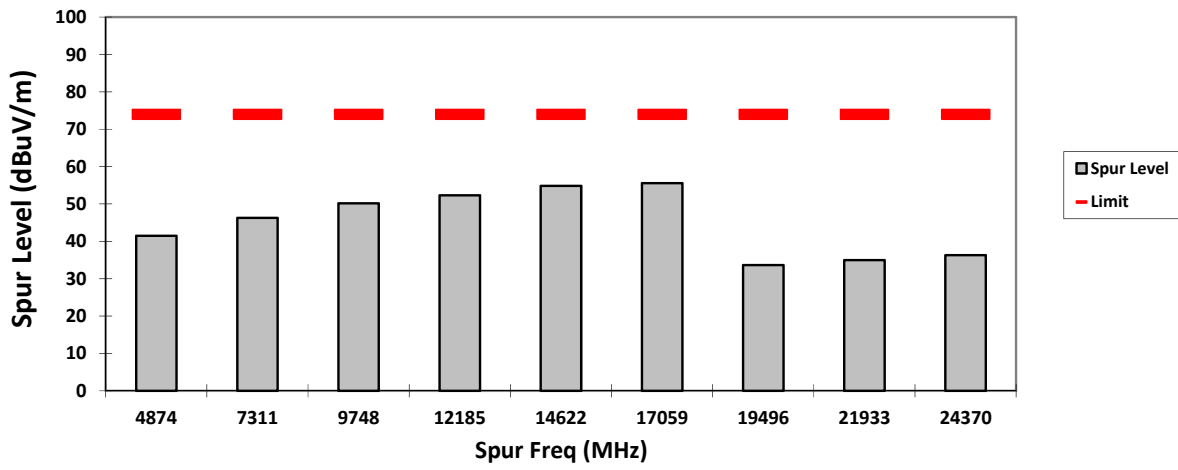


### HORIZONTAL, PK

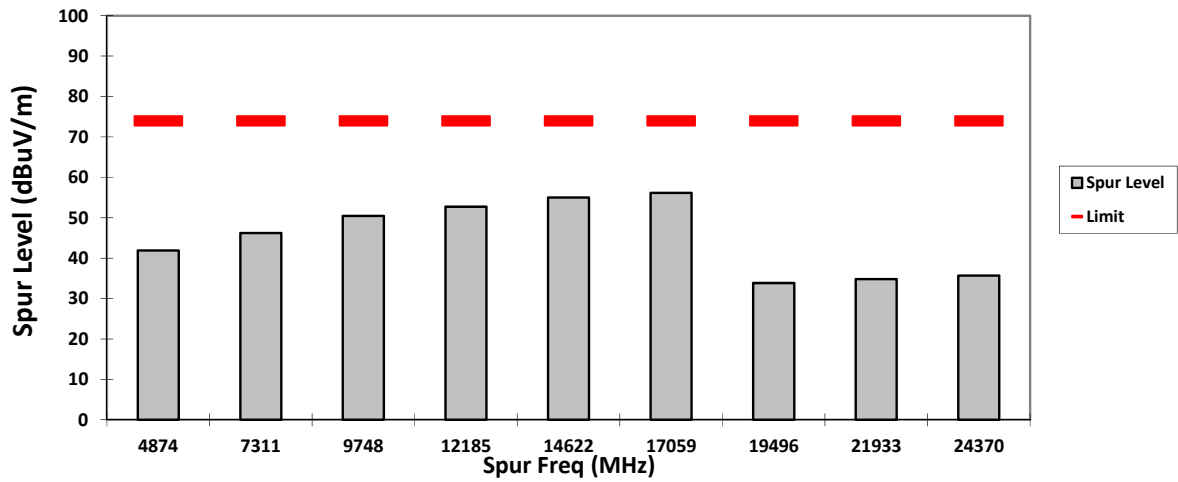

### VERTICAL, AV

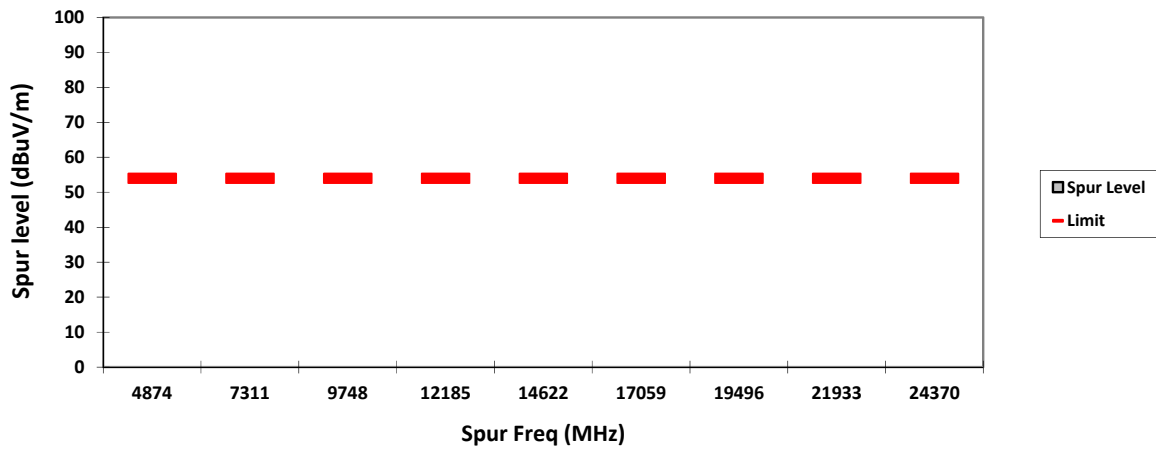


### HORIZONTAL, AV

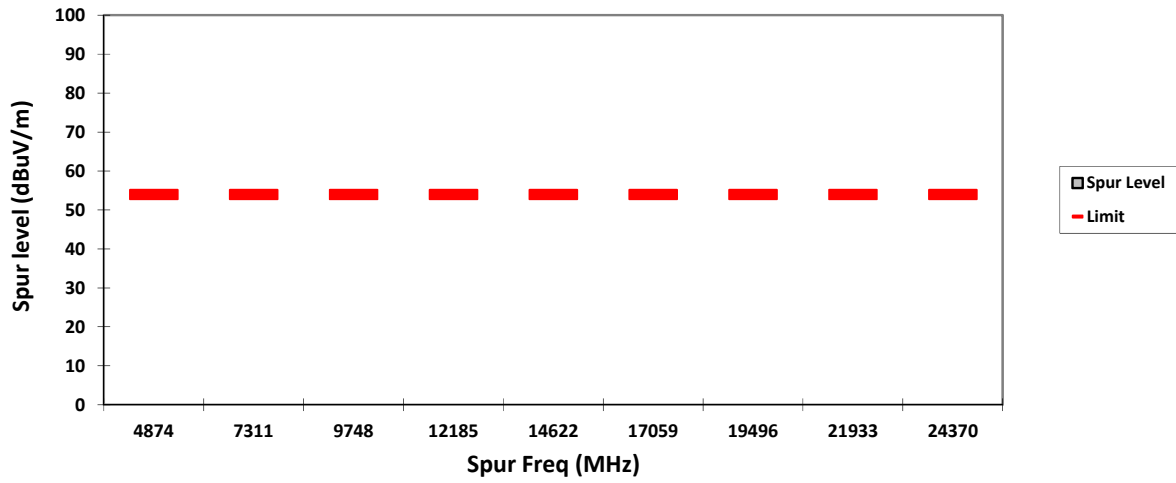





**VERTICAL, QPK**

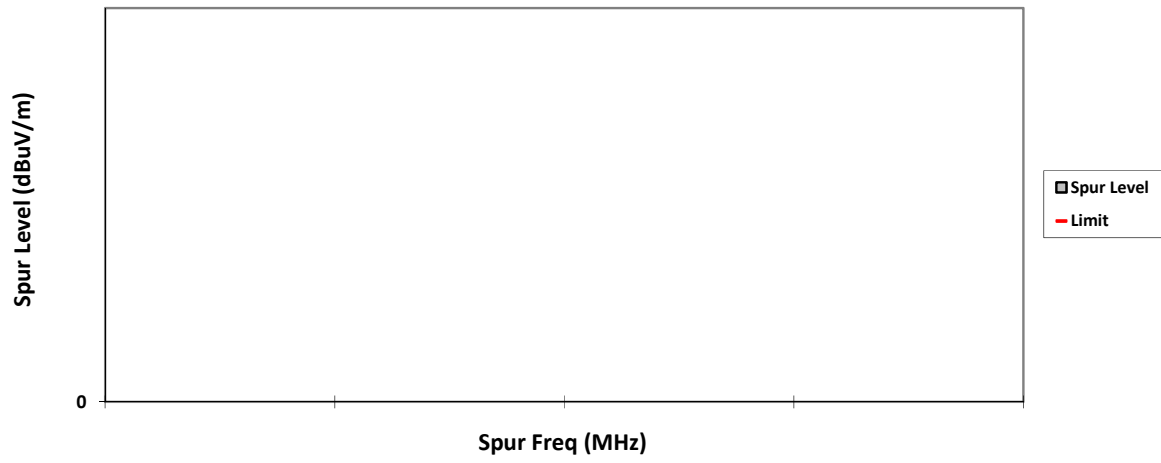


**HORIZONTAL, QPK**

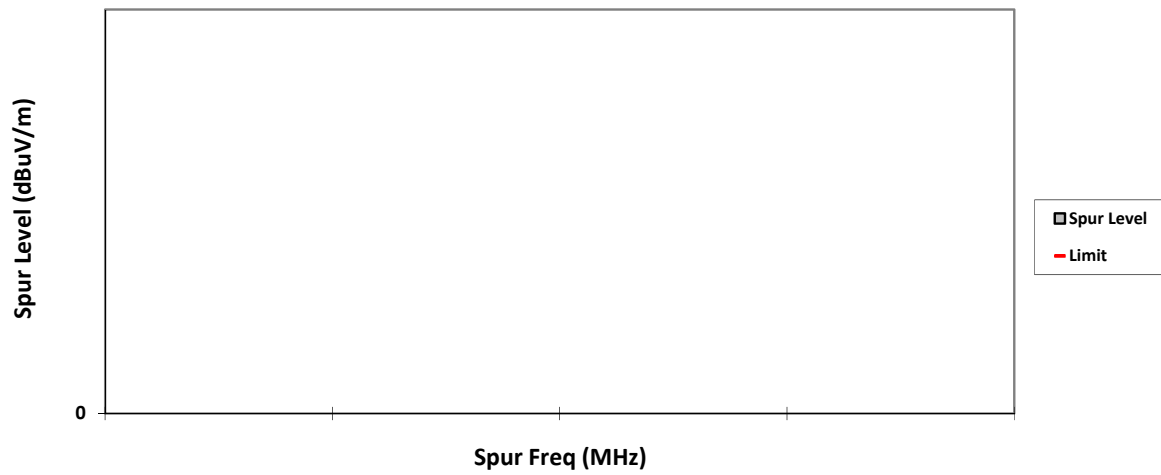


VERTICAL, PK

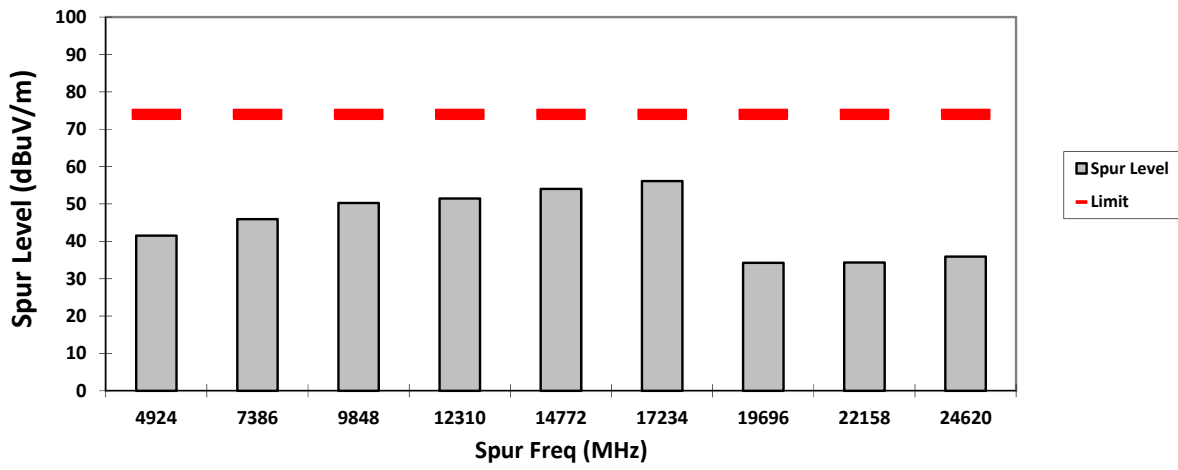


HORIZONTAL, PK

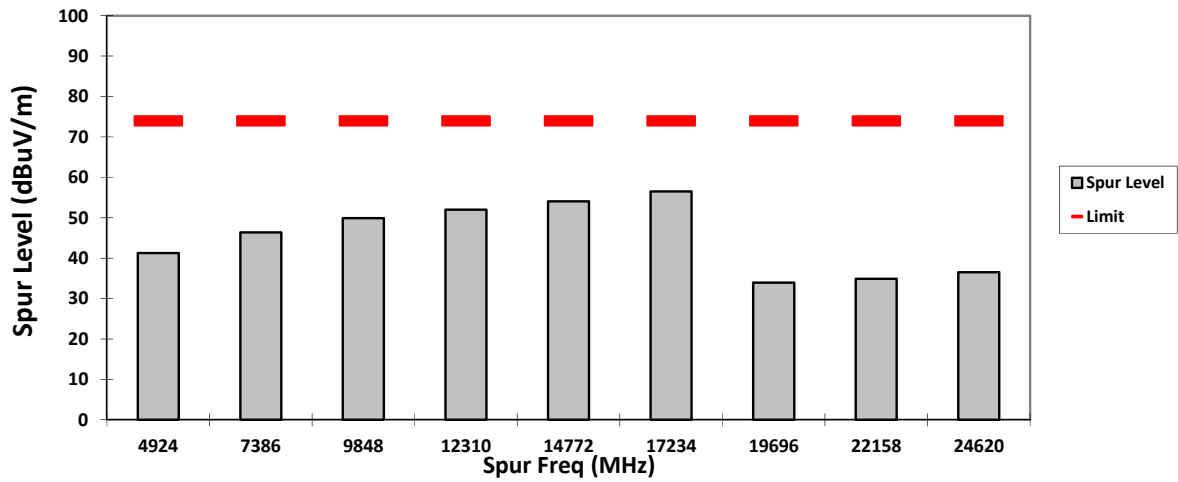

### VERTICAL, AV

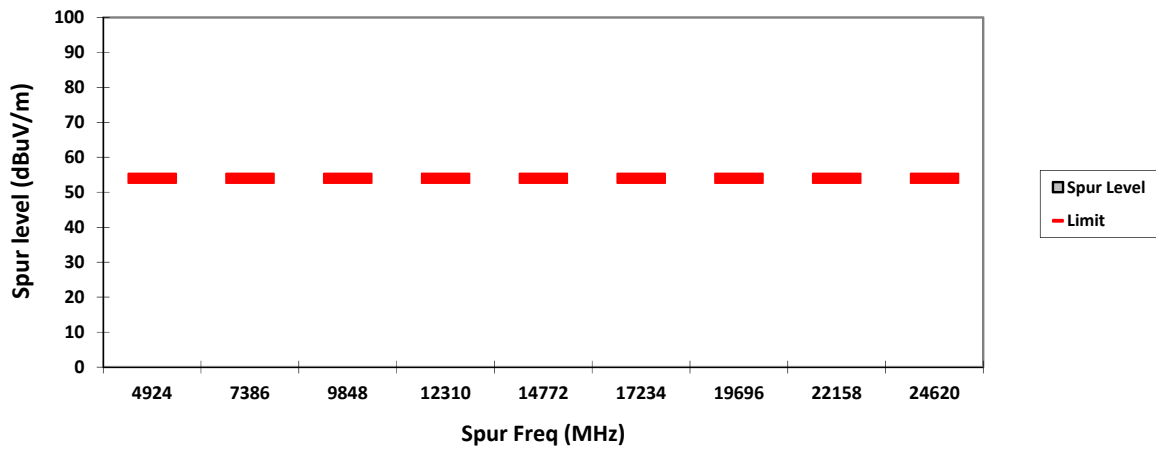


### HORIZONTAL, AV

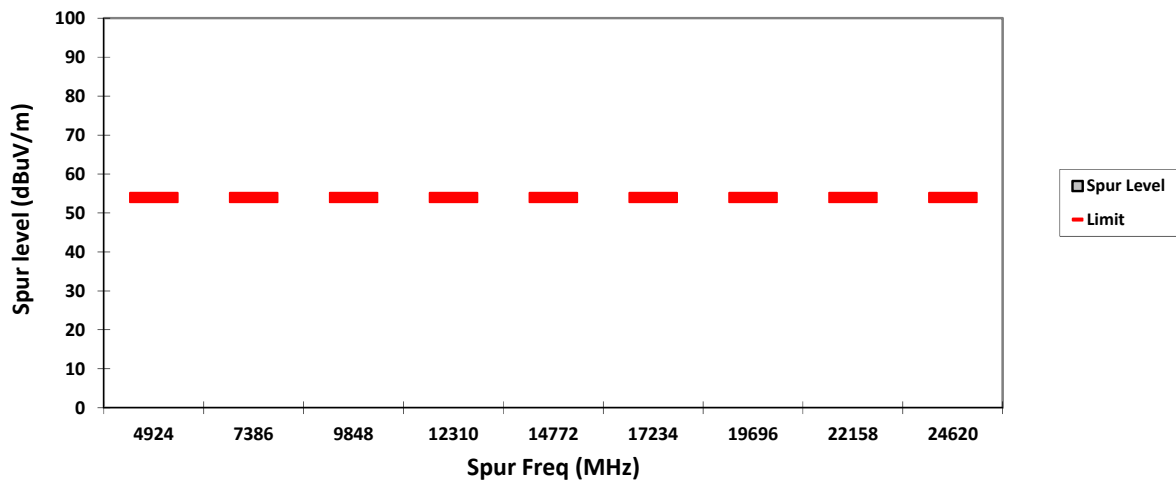

## 6.8. AC Powerline Conducted Emission

### 6.8.1. Test Setup

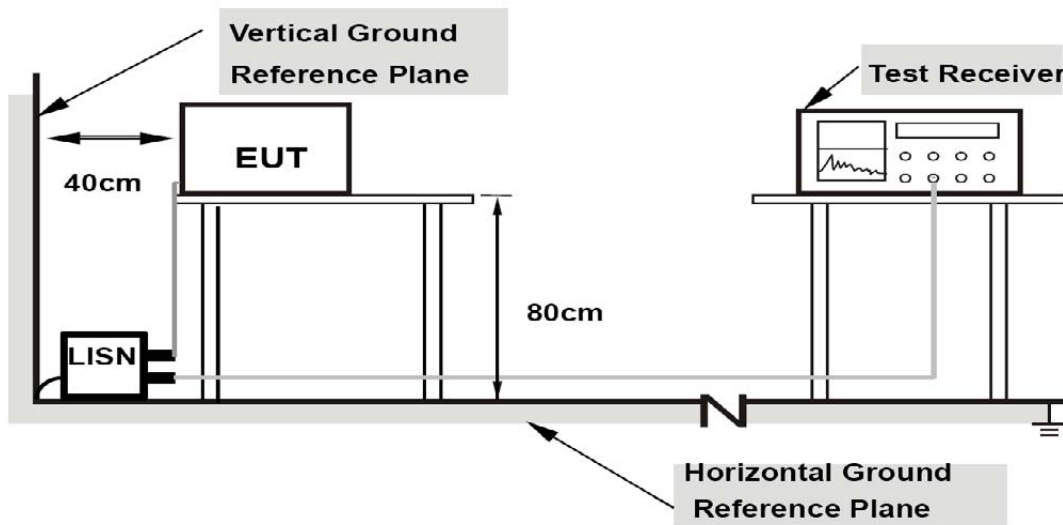

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

### 6.8.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports  
of class A ITE

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

**Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.**

**Limits for conducted disturbance at the mains ports  
of class B ITE**

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE**

**6.8.3. Test Result**

**Not Applicable. Testing is not required, radio shall turn off during charging mode.**

**END OF TEST REPORT**