


6.7. Radiated Emission within restricted Bands

6.7.1. Test Setup

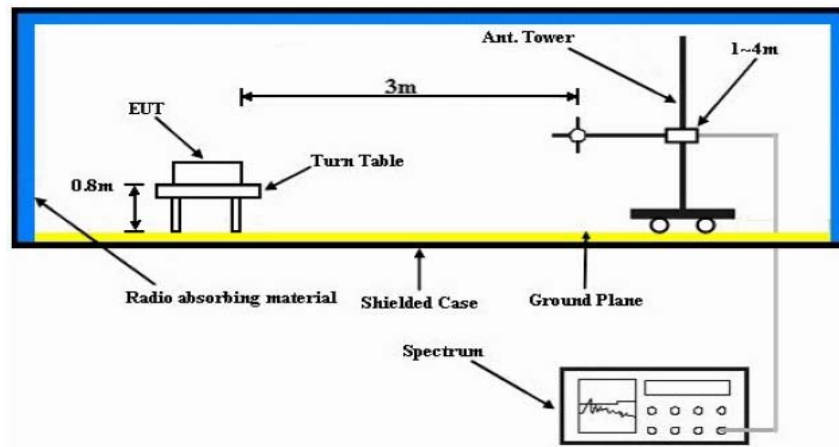

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.7.2. Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.7.3. Test Data:

Test: WIFI SAC Restricted Band Edge

Model Number: AAH56RDN9RA1AN **S/N:** 871TXVC351 **EMC SR ID#:** 20392-EMC-00108

Battery: PMNN4489B **Accessory:** PMAE4079A

Test Channel: Low **Test Frequency:** 2412.0000 MHz **Test Standard:** ANSI C63.10-2013 Worst Case Plane:
 Y-Plane (802.11b)

Restricted Band Edge (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
2390.0000	-	54.2017	43.4498	-	74.0000	54.0000	-	-19.7983	-10.5502	-
Horizontal Radiated Emission Result										
2390.0000	-	54.6278	43.6174	-	74.0000	54.0000	-	-19.3722	-10.3826	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3
Test Performed by: Nazrin&Qawiman
System MU: 5.84 dB


Humidity (%): 70.6
Test Date: Sat, 13 Nov, 2021

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

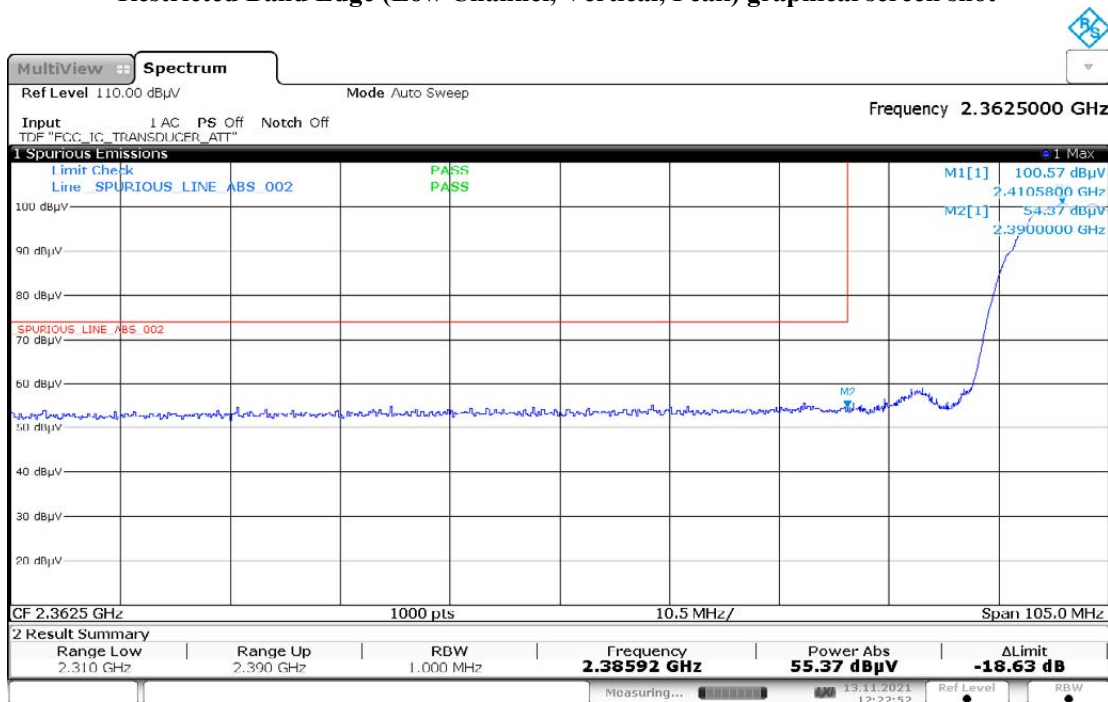


12:22:53 13.11.2021

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

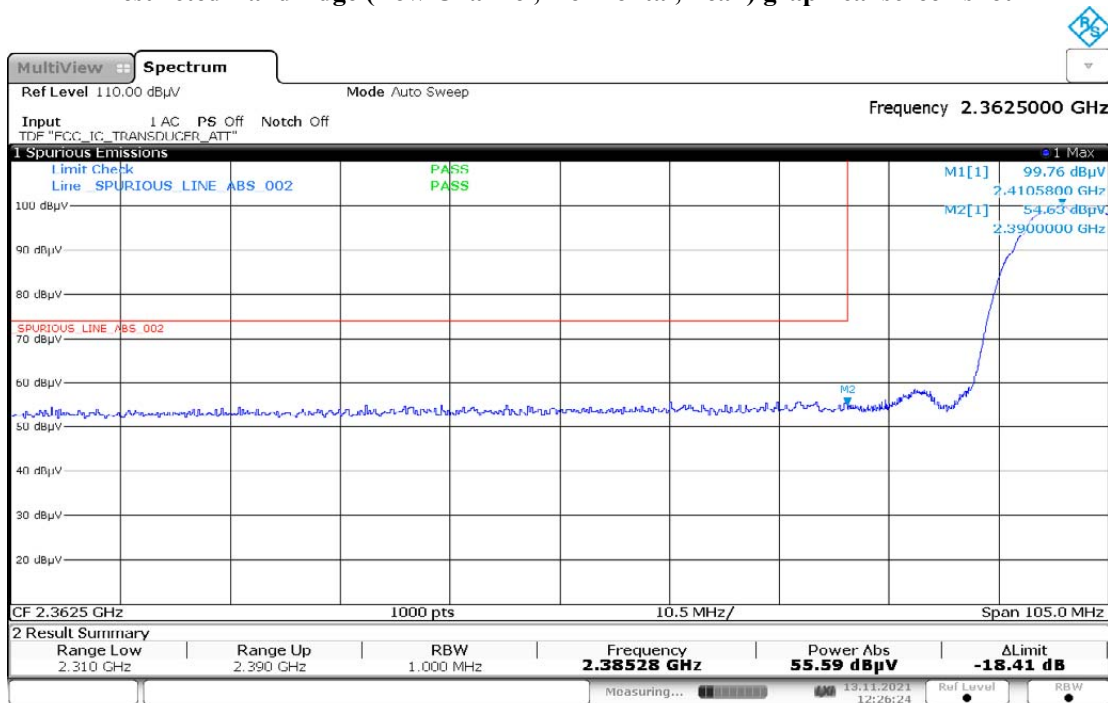


12:26:25 13.11.2021


Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

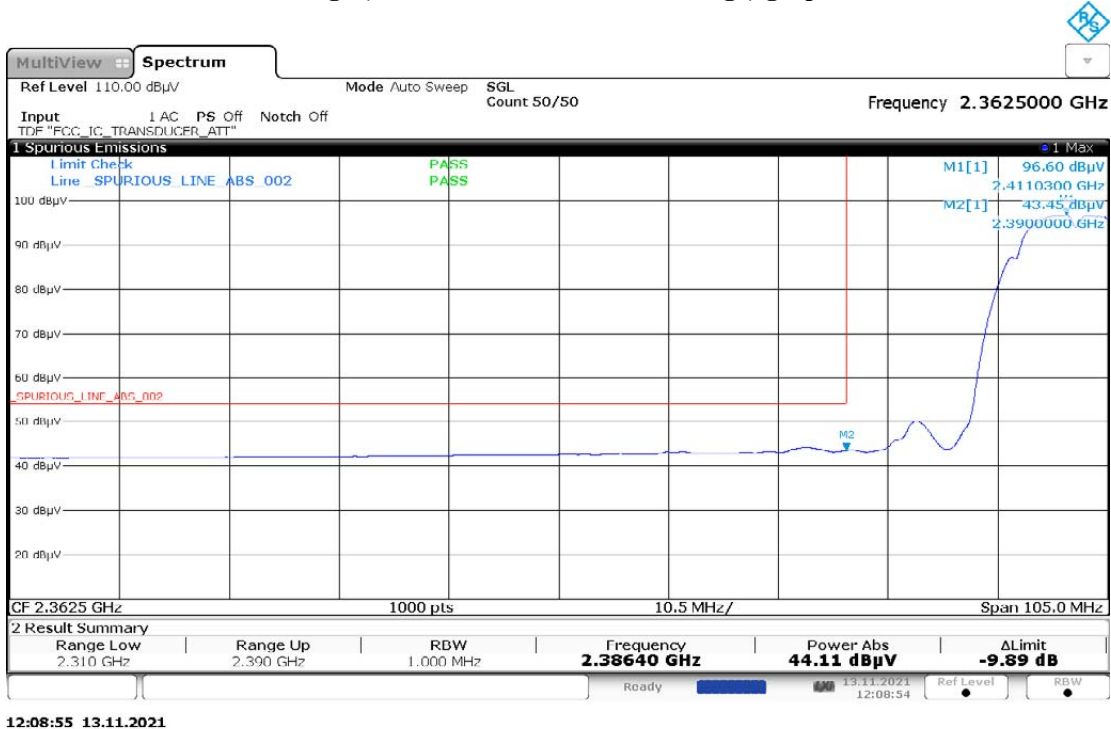

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

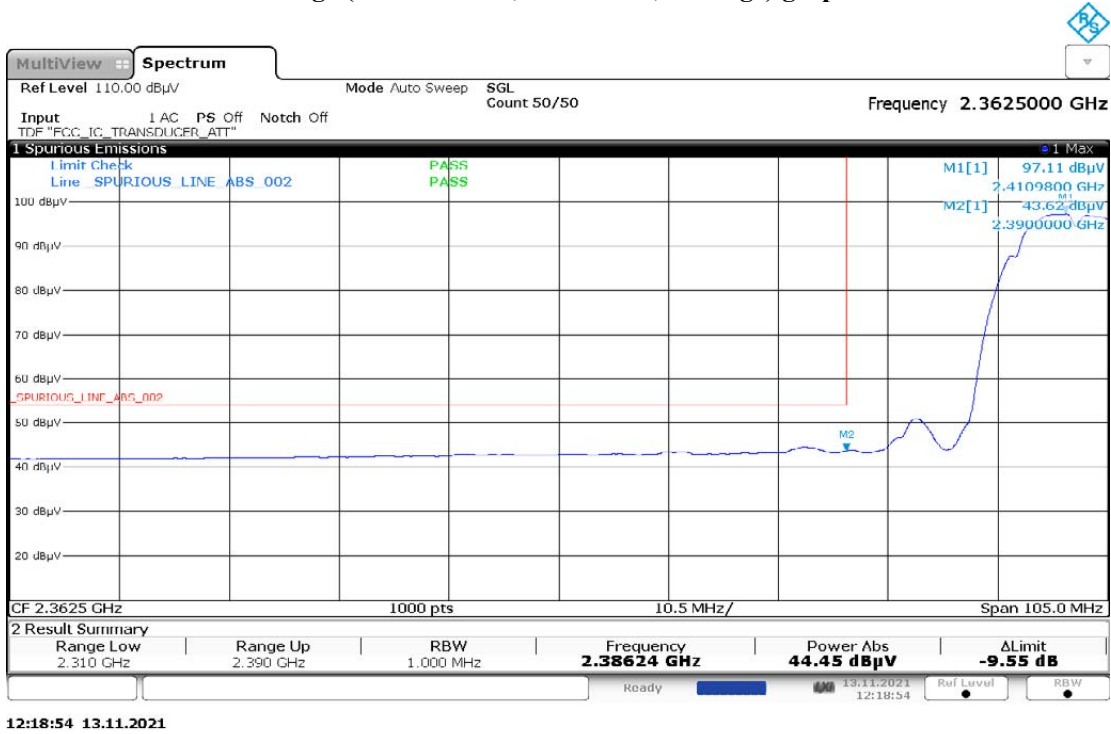


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

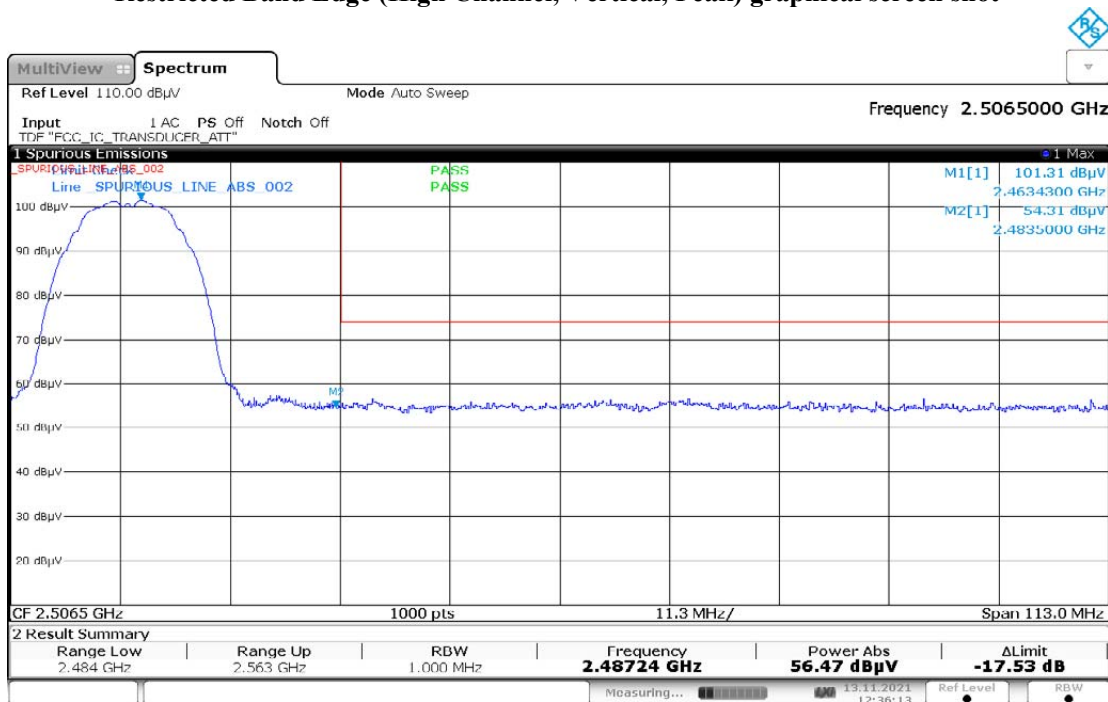


12:36:14 13.11.2021

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

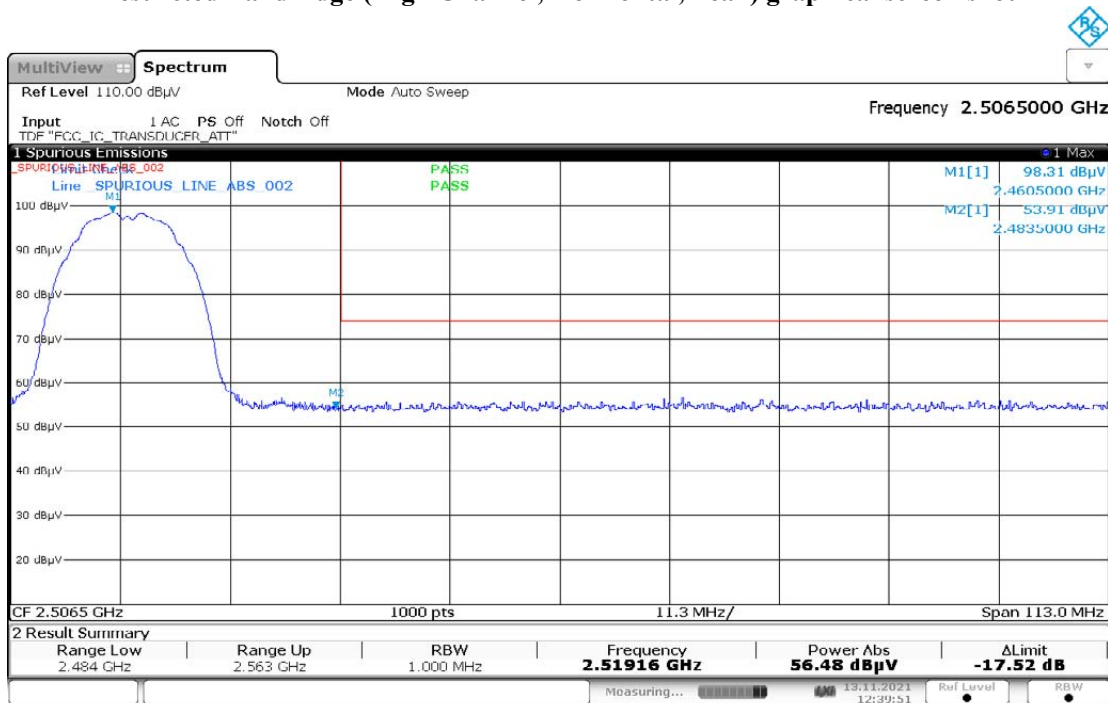


12:39:51 13.11.2021

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

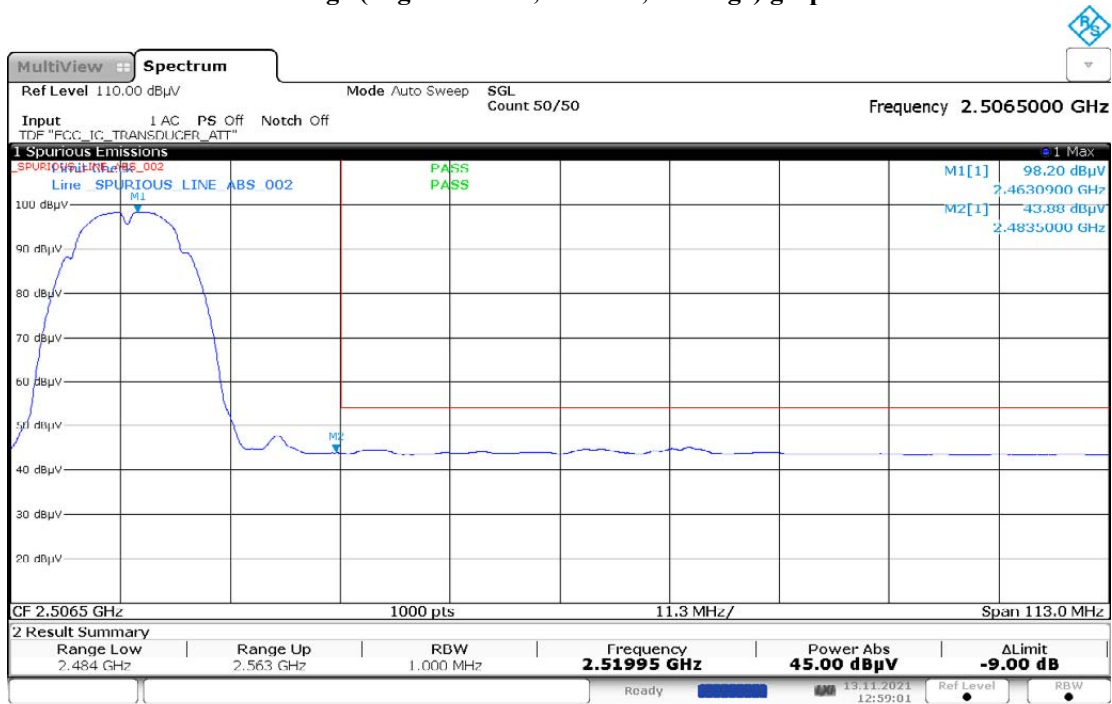

12:59:01 13.11.2021

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

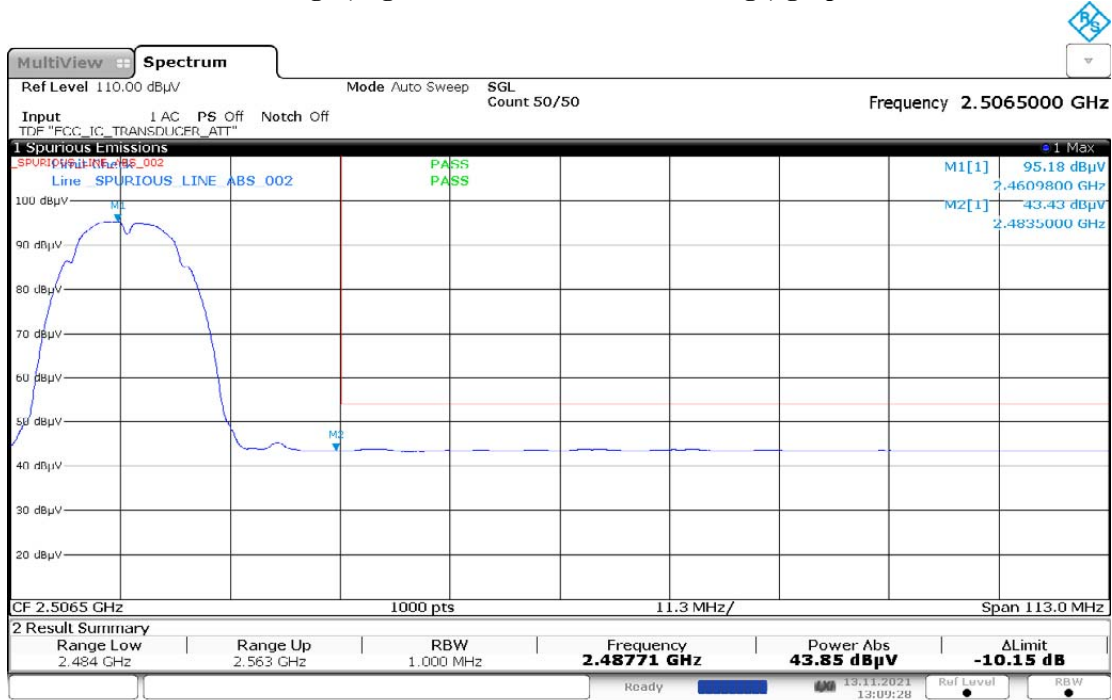

13:09:28 13.11.2021

Test: WIFI SAC Restricted Band Edge

Model Number: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108

Battery: PMNN4489B Accessory: PMAE4079A

Test Channel: Low Test Frequency: 2412.0000 MHz Test Standard: ANSI C63.10-2013 Worst Case Plane: Y-Plane (802.11g)

Restricted Band Edge (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
2390.0000	-	58.7375	43.7818	-	74.0000	54.0000	-	-15.2625	-10.2182	-
Horizontal Radiated Emission Result										
2390.0000	-	63.6873	43.9963	-	74.0000	54.0000	-	-10.3127	-10.0037	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3
Test Performed by: Nazrin&Qawiman
System MU: 5.84 dB


Humidity (%): 70.6
Test Date: Sat, 13 Nov, 2021

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

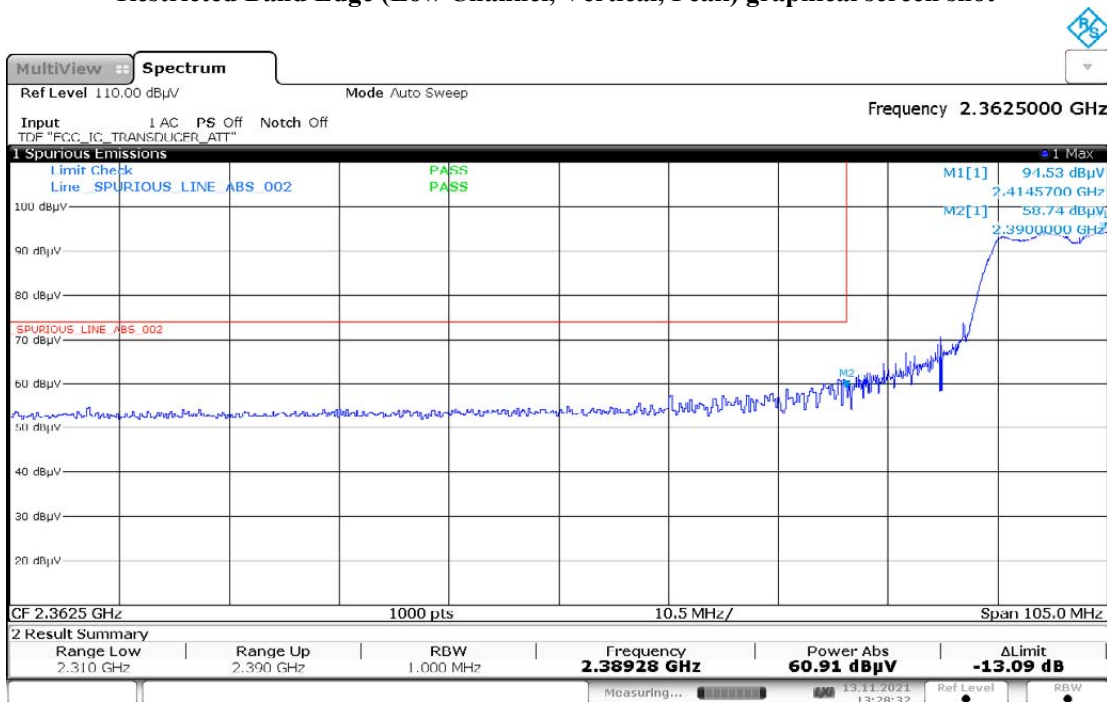


13:28:33 13.11.2021

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

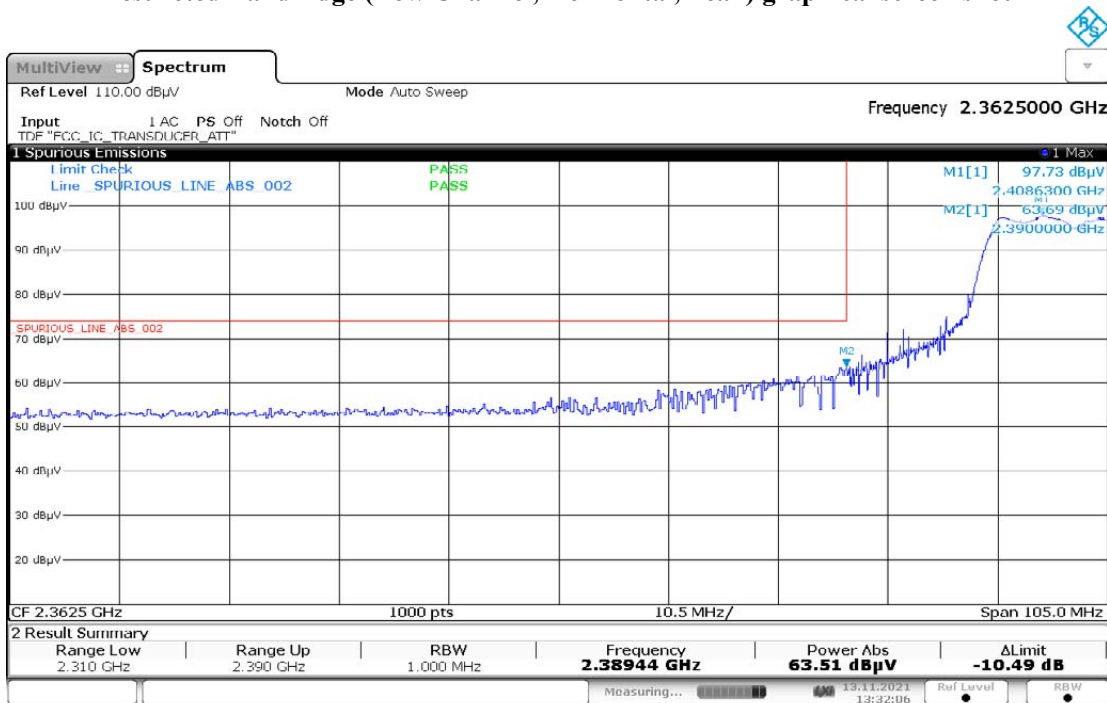


13:32:07 13.11.2021

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

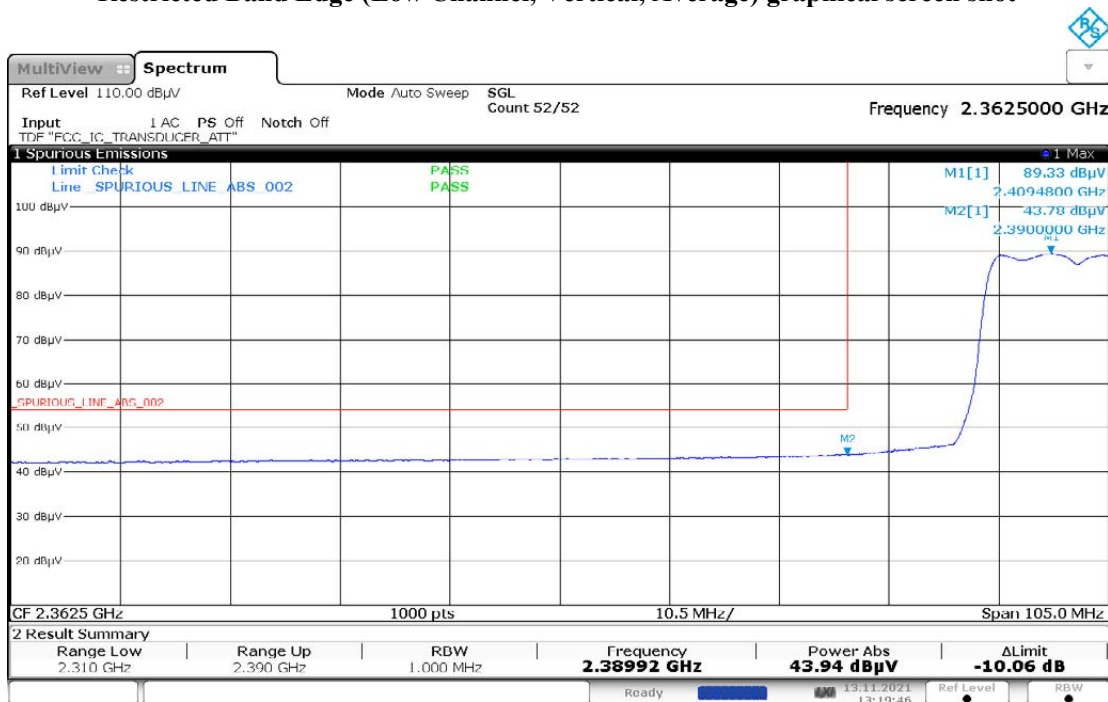

13:19:47 13.11.2021

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

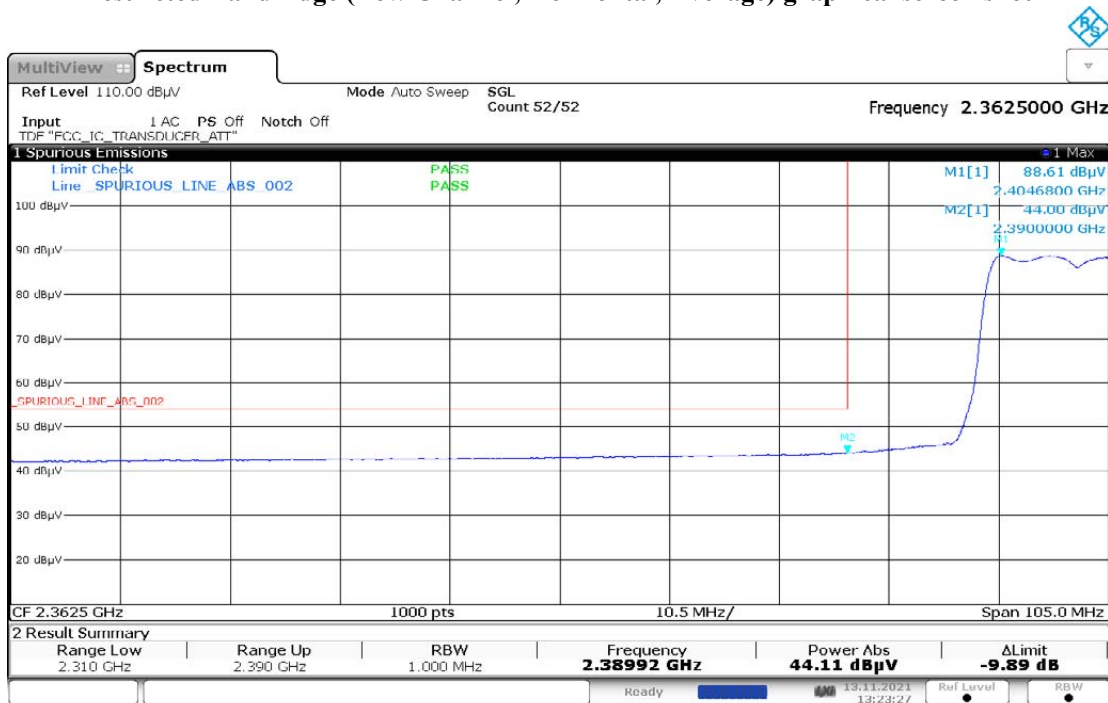

13:23:28 13.11.2021

Test: WIFI SAC Restricted Band Edge

Model Number: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108

Battery: PMNN4489B Accessory: PMAE4079A

Test Channel: High Test Frequency: 2462.0000 MHz Test Standard: ANSI C63.10-2013 Worst Case Plane: Y-Plane (802.11g)

Restricted Band Edge (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
2483.5000	-	57.9627	45.1746	-	74.0000	54.0000	-	-16.0373	-8.8254	-
Horizontal Radiated Emission Result										
2483.5000	-	57.5906	44.2549	-	74.0000	54.0000	-	-16.4094	-9.7451	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3
Test Performed by: Nazrin&Qawiman
System MU: 5.84 dB


Humidity (%): 70.6
Test Date: Sat, 13 Nov, 2021

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

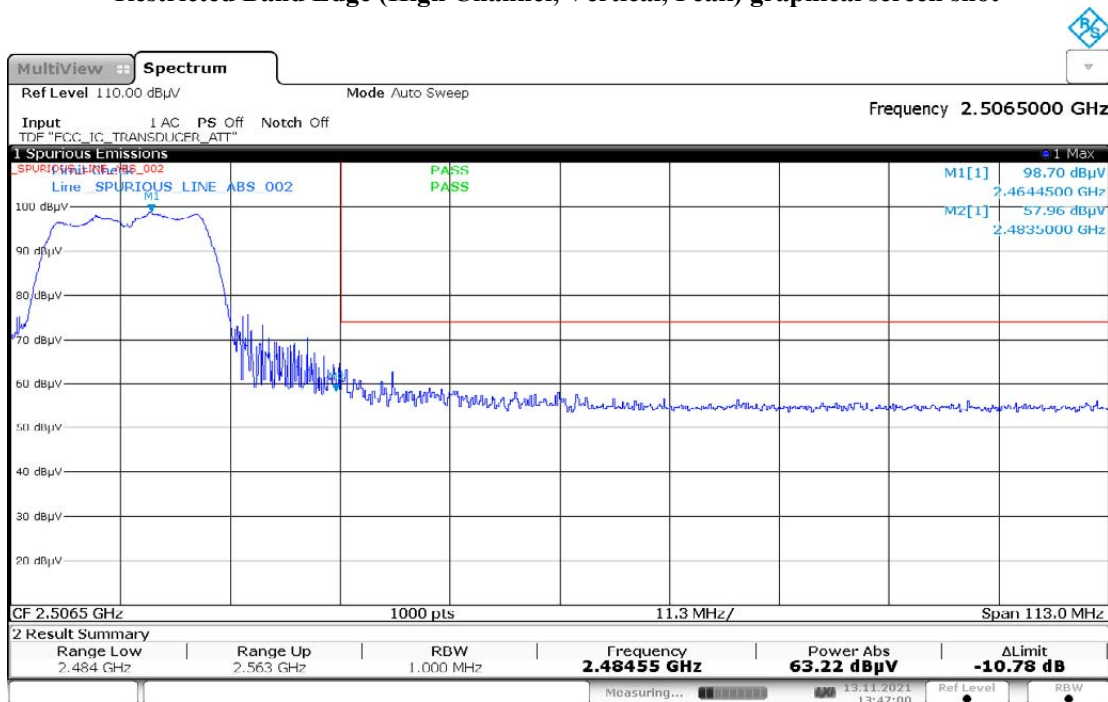


13:47:00 13.11.2021

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

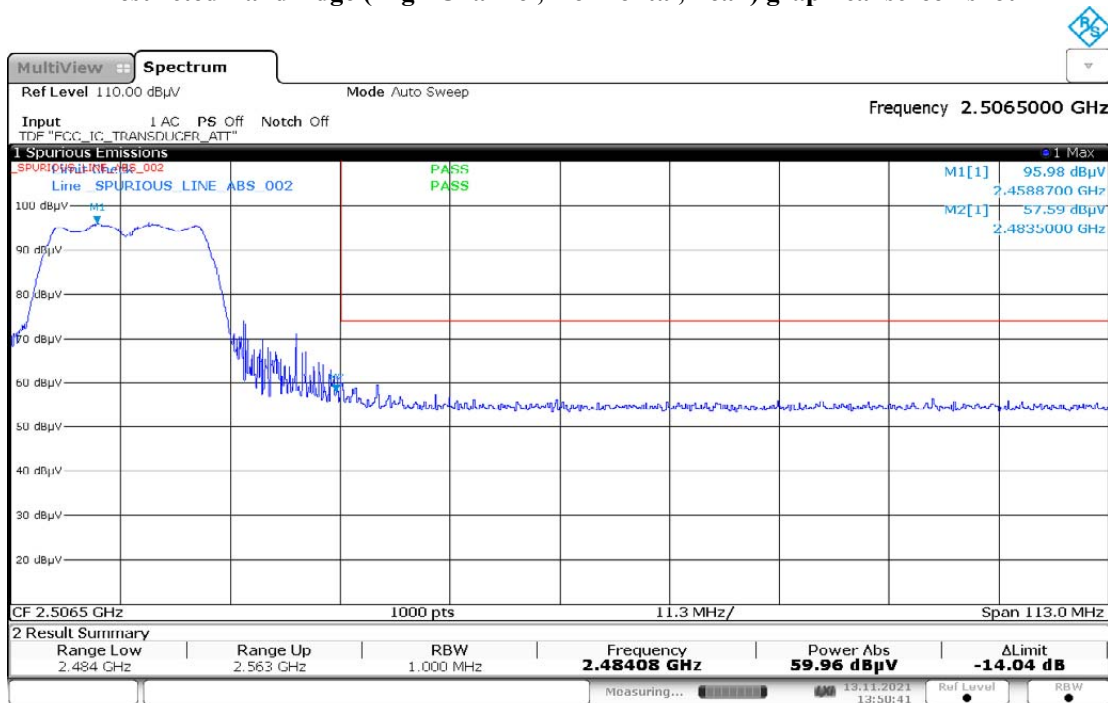


13:50:41 13.11.2021

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

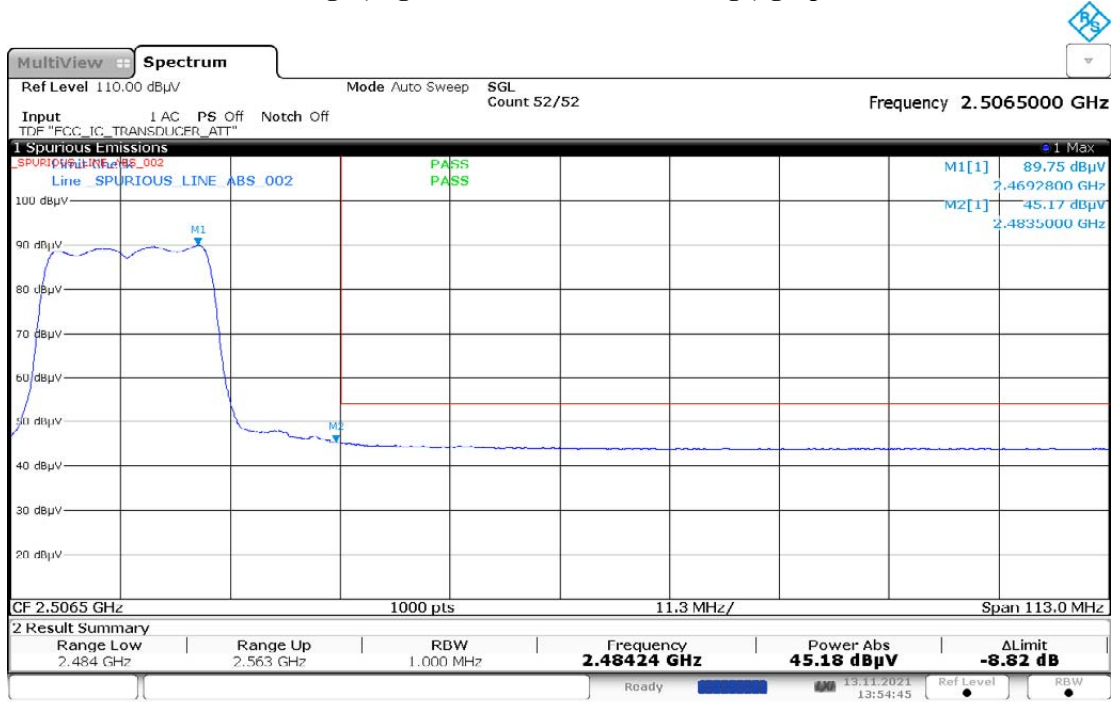

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

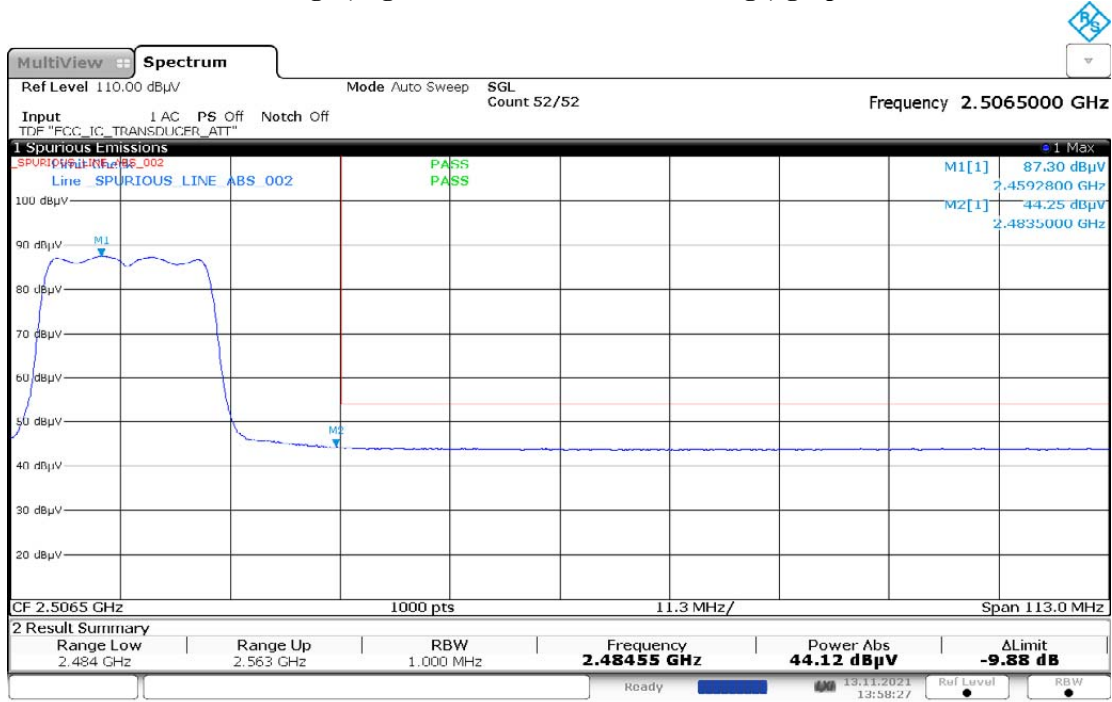

Test: WIFI SAC Restricted Band Edge

Model Number: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108

Battery: PMNN4489B Accessory: PMAE4079A

Test Channel: Low Test Frequency: 2412.0000 MHz Test Standard: ANSI C63.10-2013 Worst Case Plane: Y-Plane (802.11n)

Restricted Band Edge (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
2390.0000	-	61.8930	45.2286	-	74.0000	54.0000	-	-12.1070	-8.7714	-
Horizontal Radiated Emission Result										
2390.0000	-	66.0011	45.4106	-	74.0000	54.0000	-	-7.9989	-8.5894	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3
Test Performed by: Nazrin&Qawiman
System MU: 5.84 dB


Humidity (%): 70.6
Test Date: Sat, 13 Nov, 2021

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

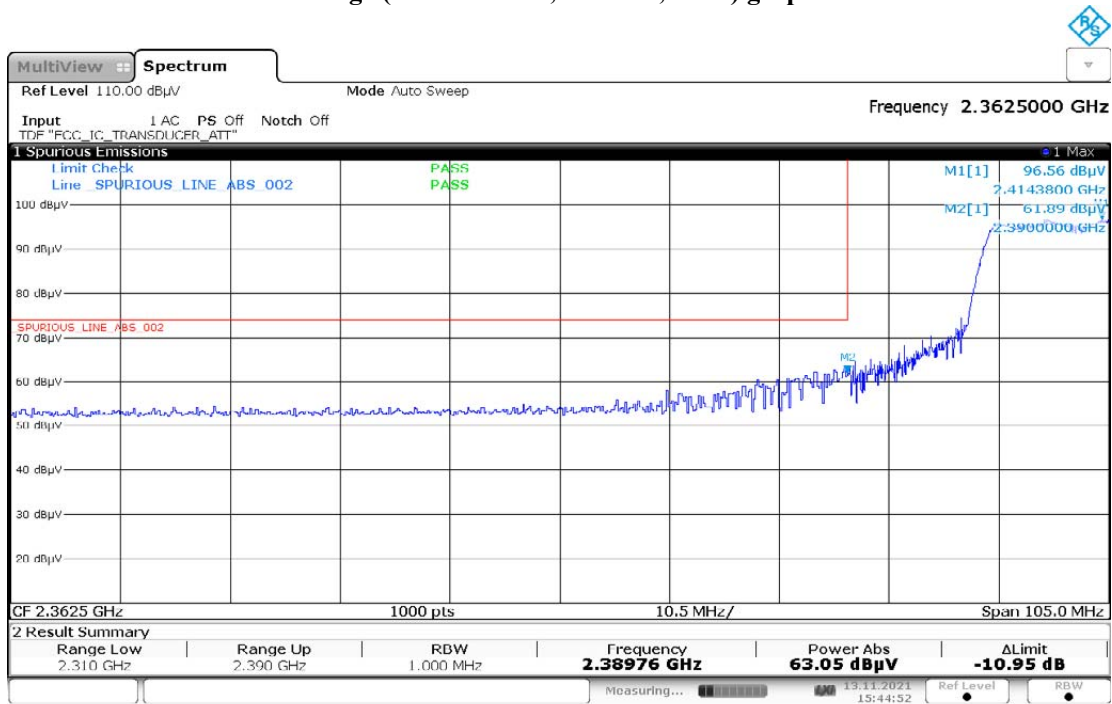


15:44:53 13.11.2021

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

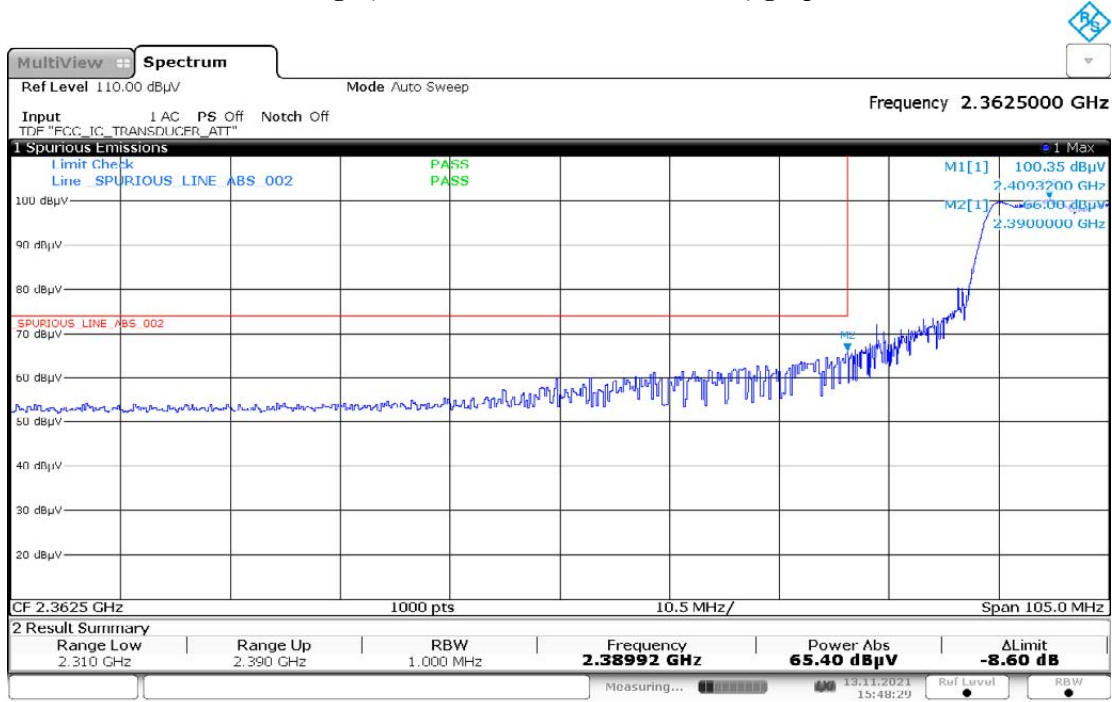


15:48:30 13.11.2021

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

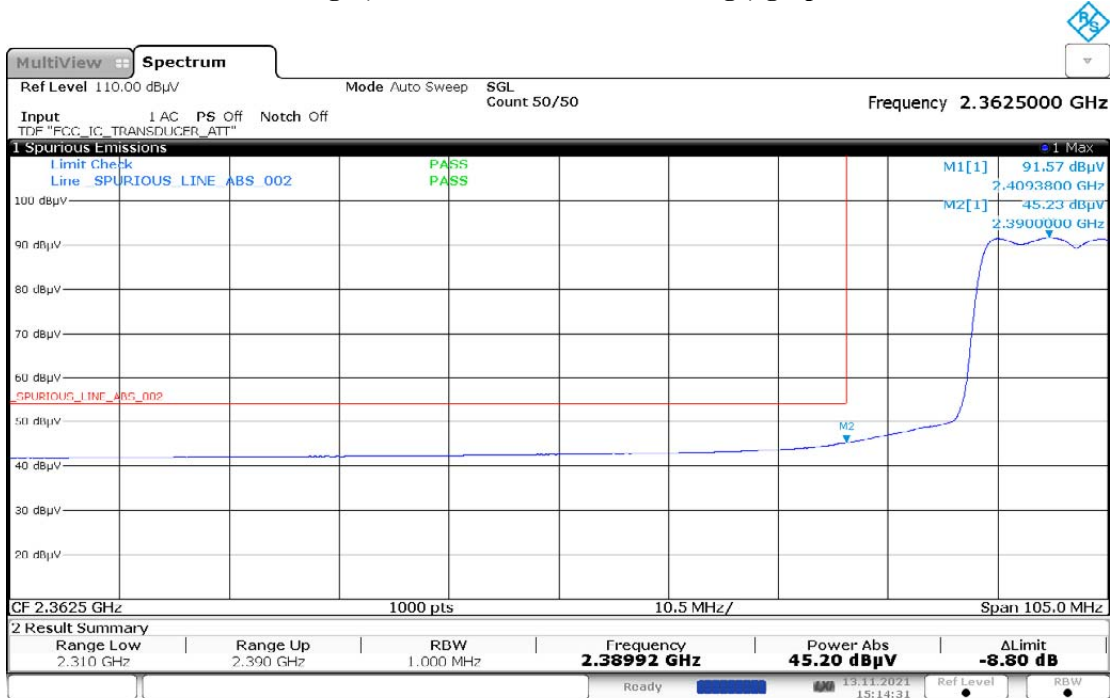


15:14:32 13.11.2021

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

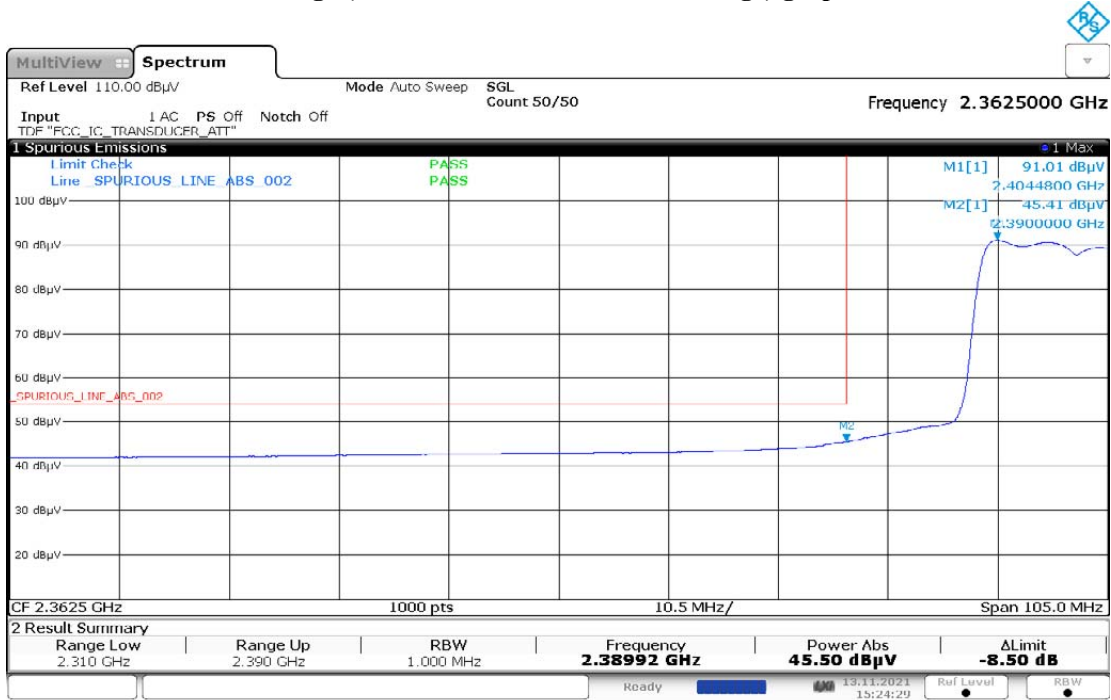


15:24:29 13.11.2021

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

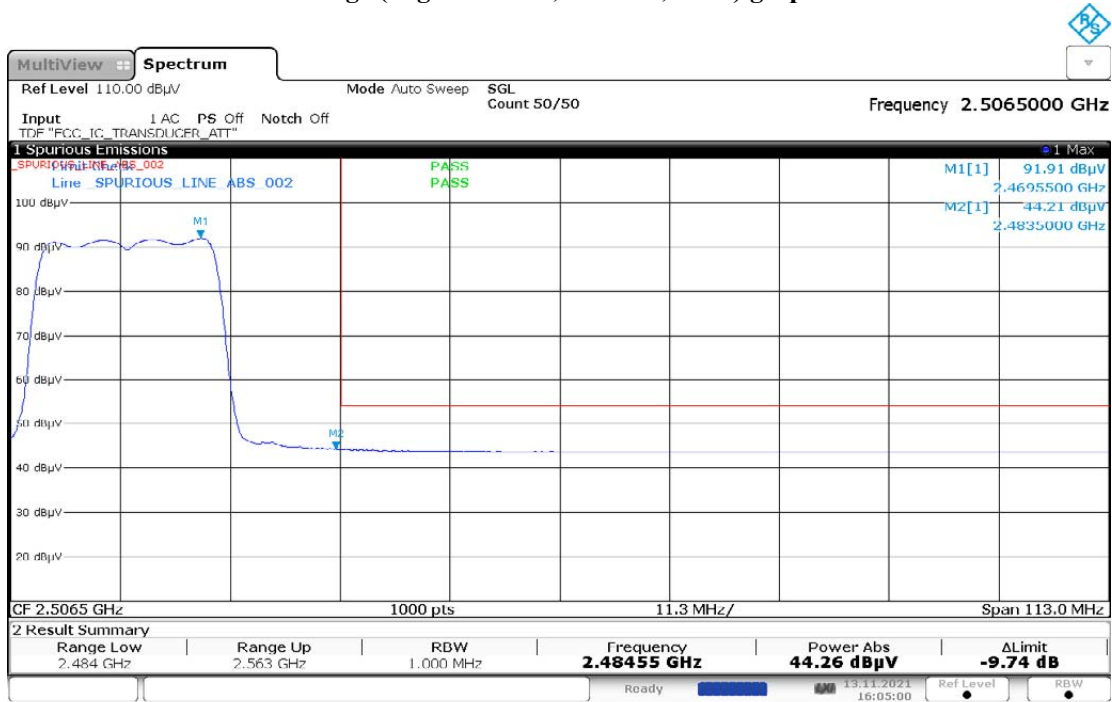


16:05:01 13.11.2021

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

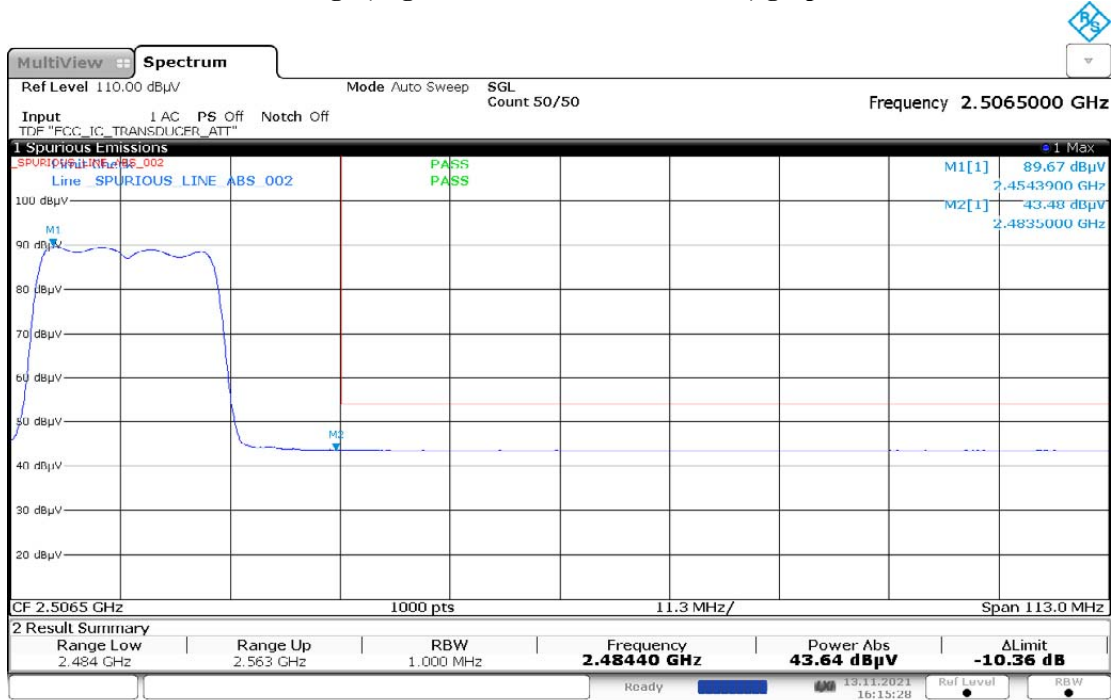


16:15:29 13.11.2021

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

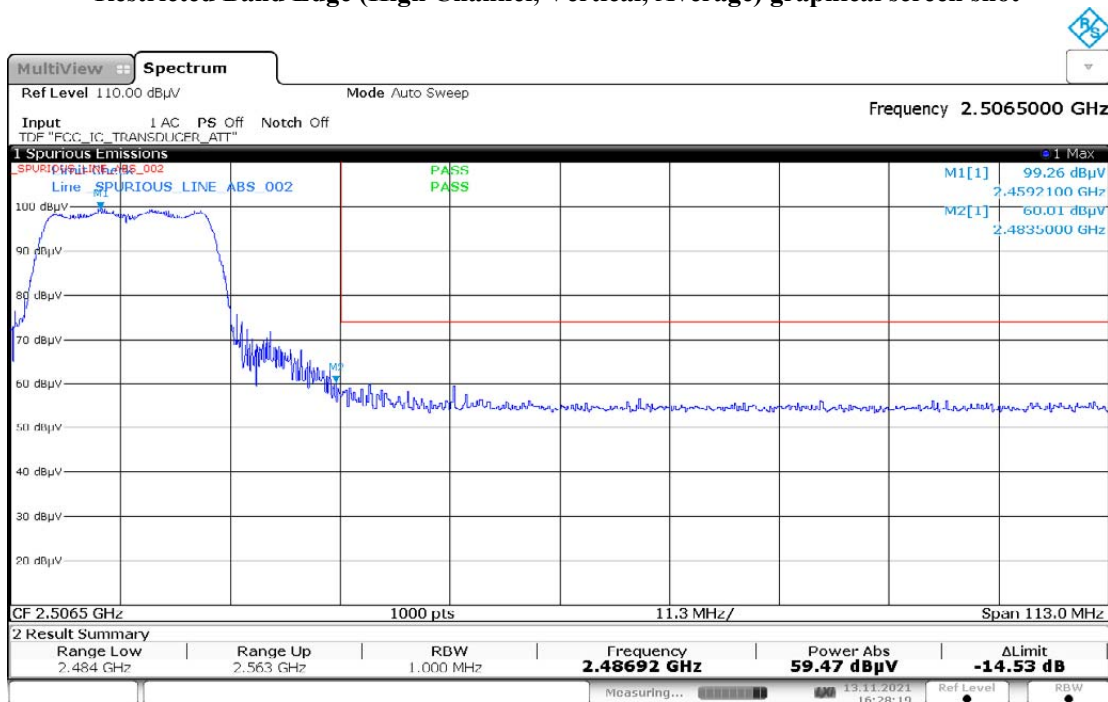

16:28:19 13.11.2021

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

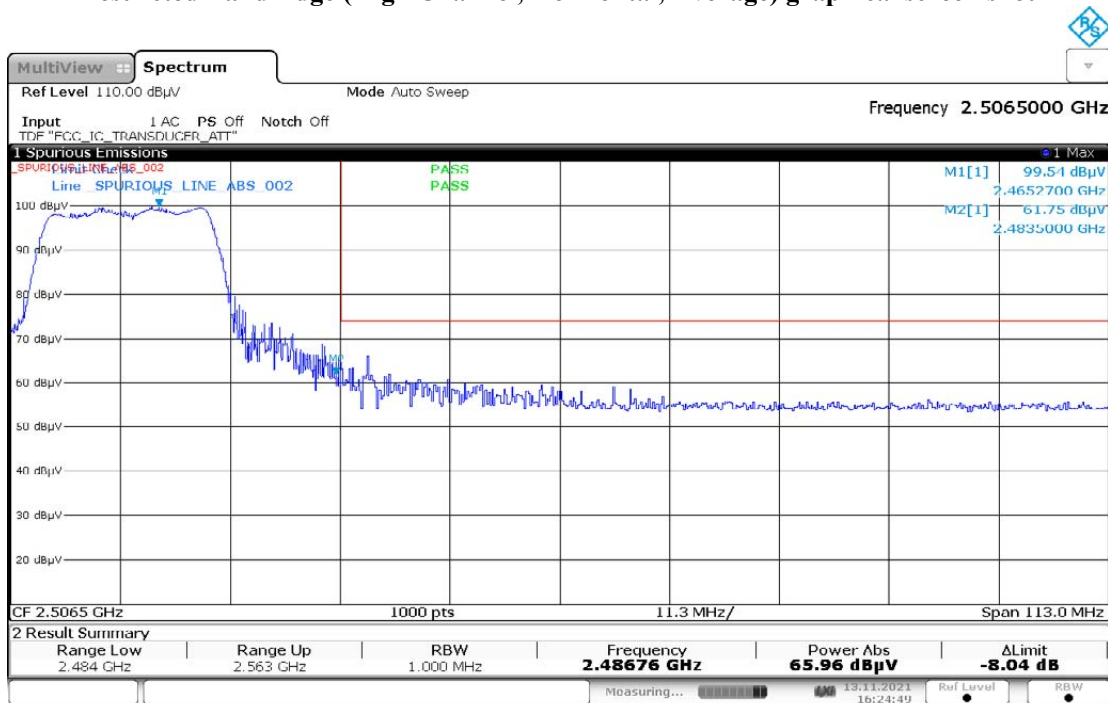

16:24:49 13.11.2021

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108

Battery: PMNN4489B Accessory: PMAE4079A

**Test Channel: Low Test Frequency: 2412.0000 MHz Test Standard: ANSI C63.10-2013 Worst Case Plane:
 Y-Plane (802.11b)**

Radiated Emission (Low Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4824	-	49.0766**	-	-	74.0	-	-	24.9234	-	-
7236	-	53.9155**	-	-	74.0	-	-	20.0845	-	95.5403
9648	-	55.6311**	-	-	74.0	-	-	18.3689	-	95.5403
12060	-	59.8877**	49.1224**	-	74.0	54.0	-	14.1123	4.8776	-
14472	-	62.5595**	50.9889**	-	74.0	54.0	-	11.4405	3.0111	-
16884	-	63.3282**	-	-	74.0	-	-	10.6718	-	95.5403
19296	-	35.4607**	-	-	74.0	-	-	38.5393	-	-
21708	-	35.4070**	-	-	74.0	-	-	38.5930	-	95.5403
24120	-	37.2308**	-	-	74.0	-	-	36.7692	-	95.5403
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4824	-	49.7569**	-	-	74.0	-	-	24.2431	-	-
7236	-	53.1046**	-	-	74.0	-	-	20.8954	-	95.5403
9648	-	55.7566**	-	-	74.0	-	-	18.2434	-	95.5403
12060	-	60.6858**	49.1268**	-	74.0	54.0	-	13.3142	4.8732	-
14472	-	62.4547**	50.9917**	-	74.0	54.0	-	11.5453	3.0083	-
16884	-	61.5762**	-	-	74.0	-	-	12.4238	-	95.5403
19296	-	33.4004**	-	-	74.0	-	-	40.5996	-	-
21708	-	35.9653**	-	-	74.0	-	-	38.0347	-	95.5403
24120	-	36.0881**	-	-	74.0	-	-	37.9119	-	95.5403


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3 Humidity (%): 70.6
Test Performed by: Nazrin&Qawiman Test Date: Sun, 14 Nov, 2021
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.

Attenuation below the general limits specified in §15.209(a) is not required.


VERTICAL, QPK

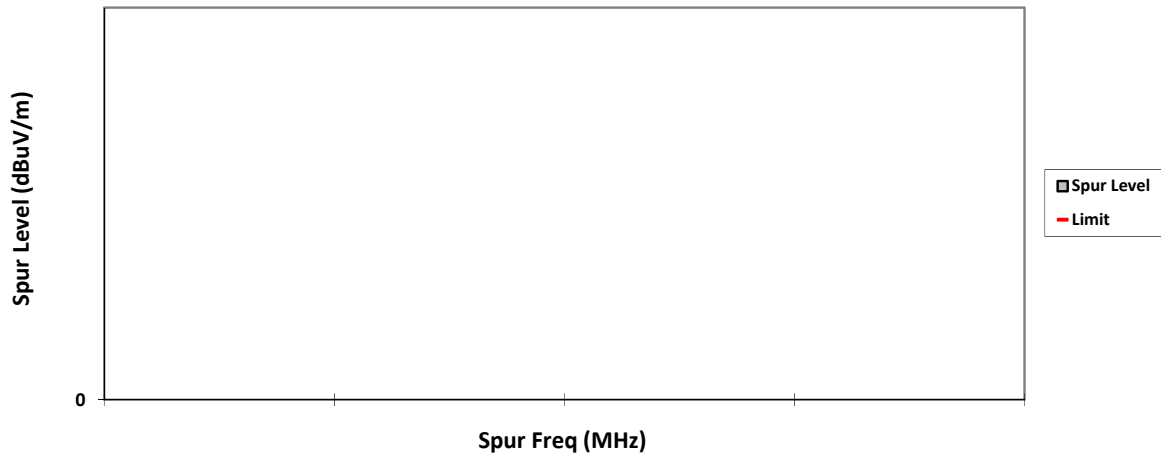


HORIZONTAL, QPK

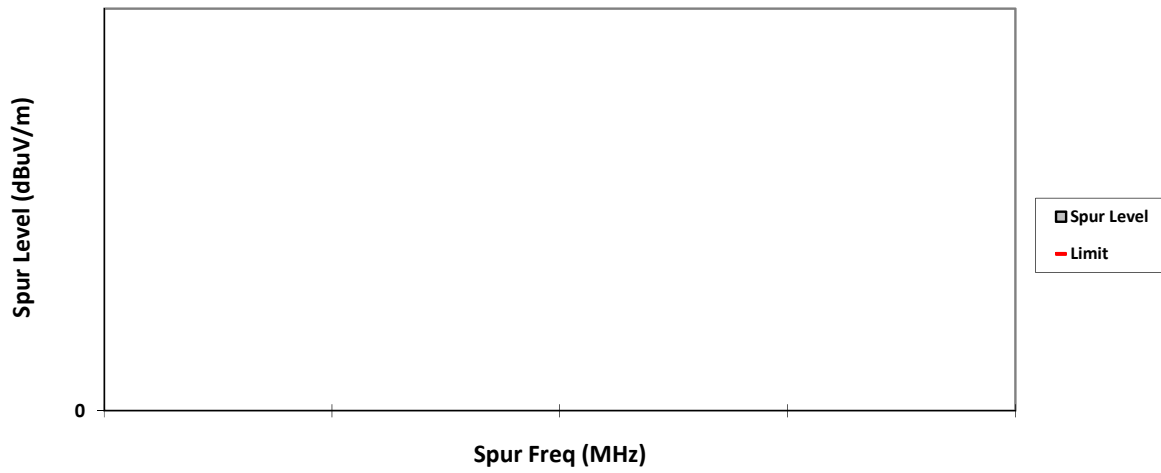


VERTICAL, PK

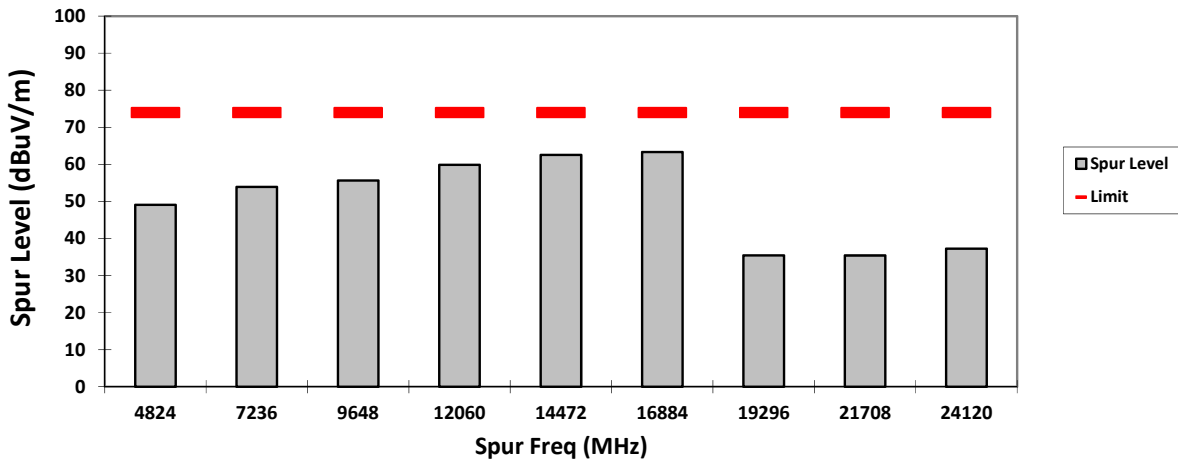


HORIZONTAL, PK

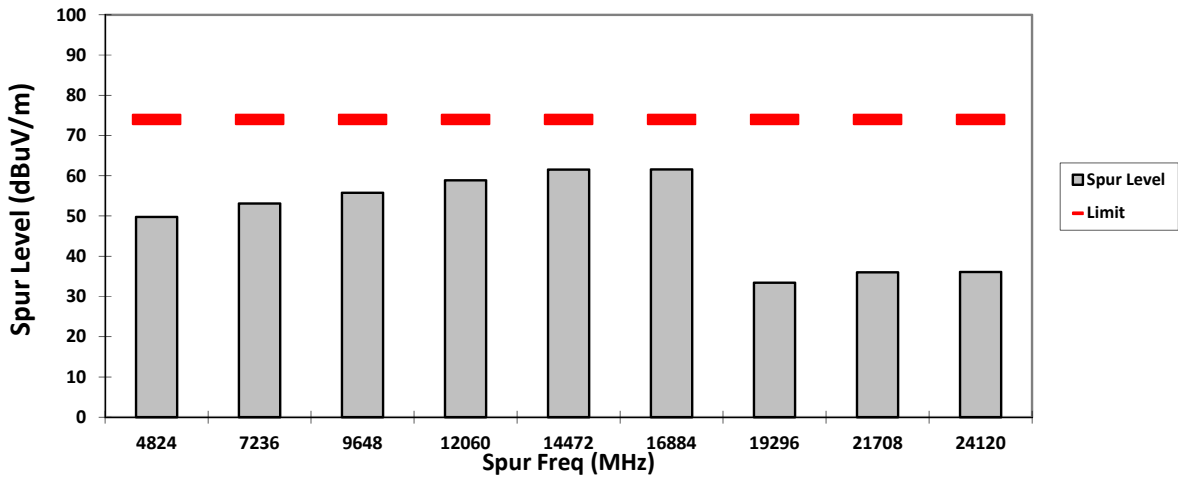


VERTICAL, AV

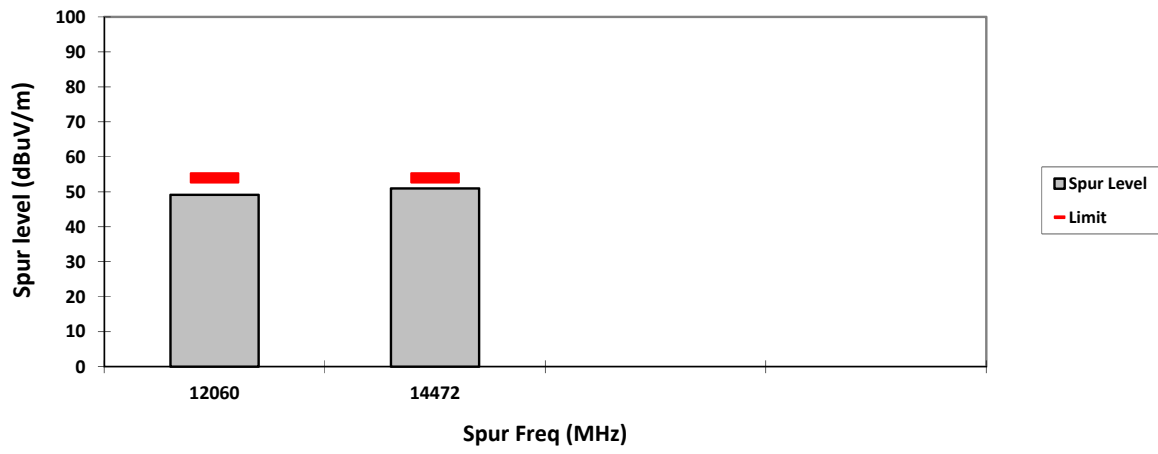


HORIZONTAL, AV

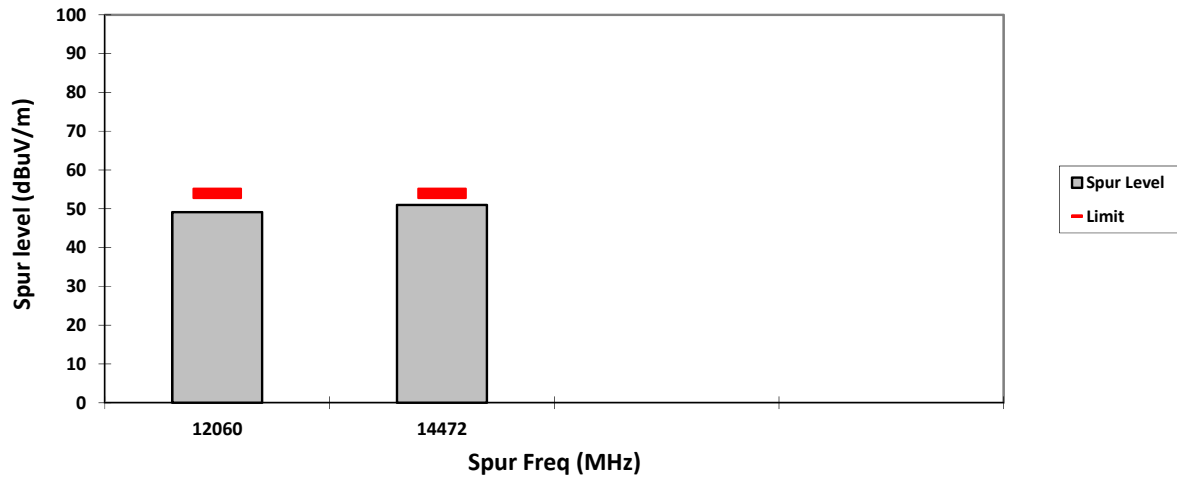


VERTICAL, QPK

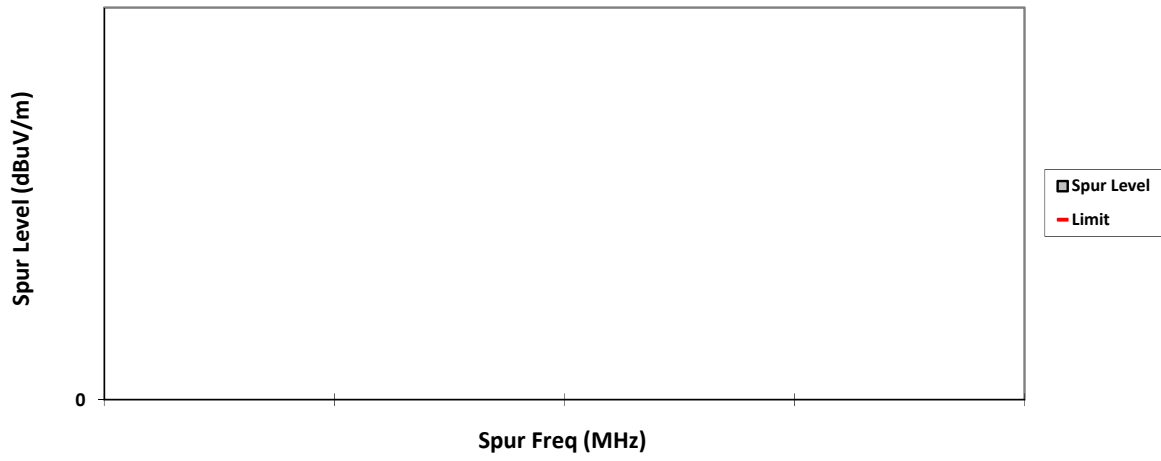


HORIZONTAL, QPK

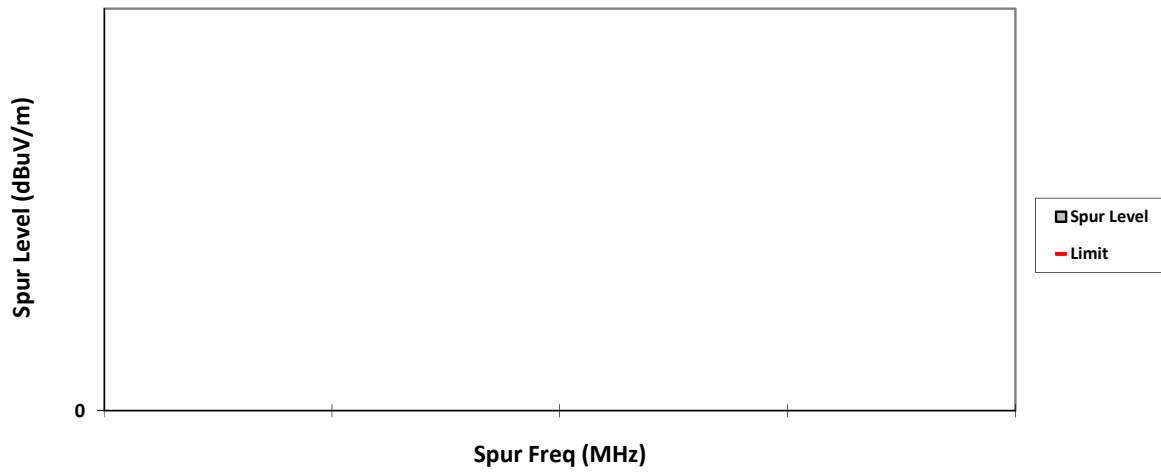


VERTICAL, PK

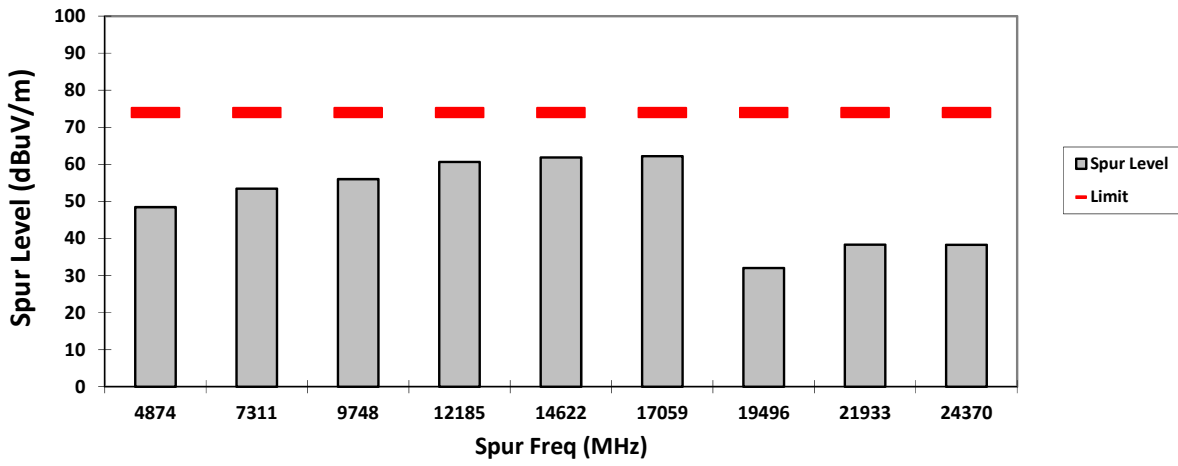


HORIZONTAL, PK

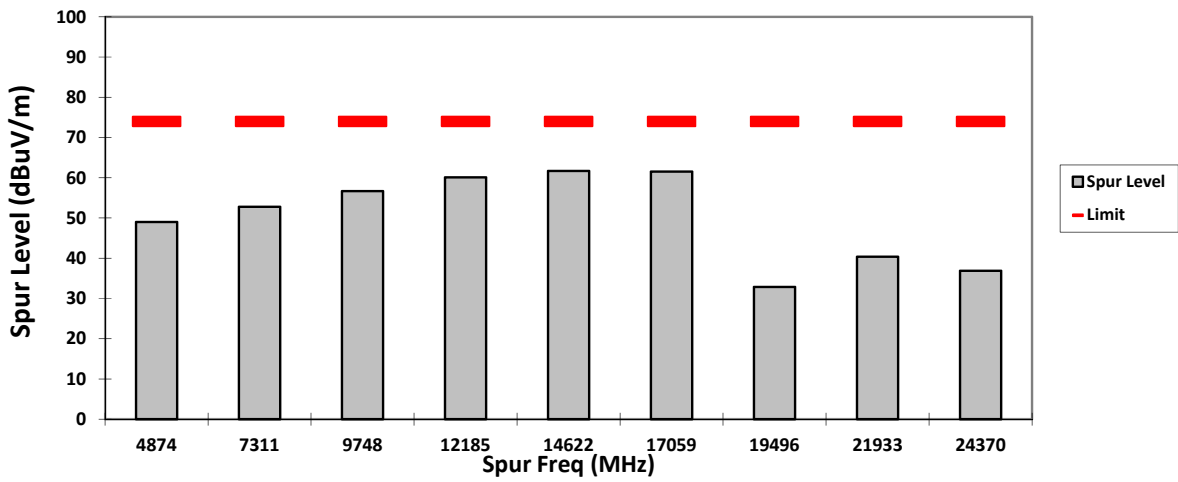

VERTICAL, AV

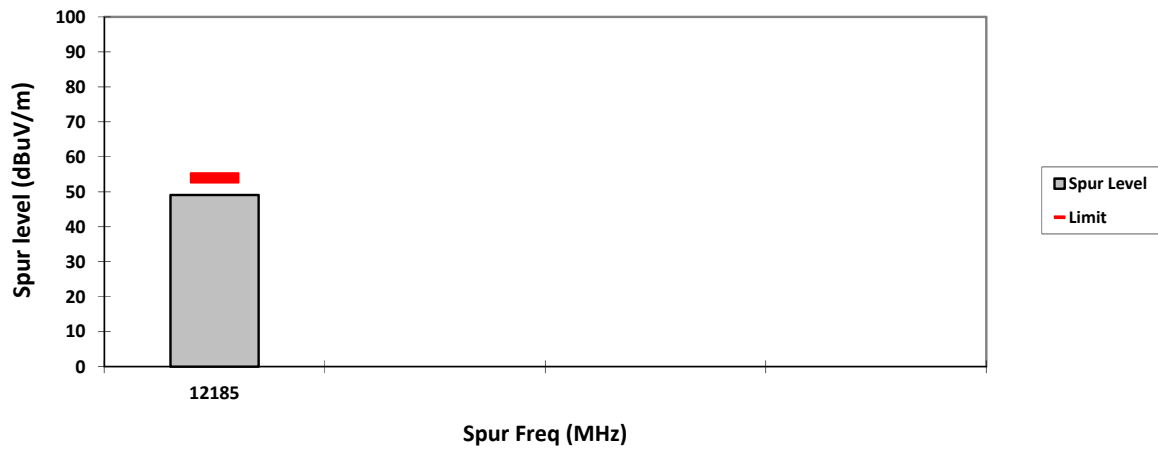

HORIZONTAL, AV

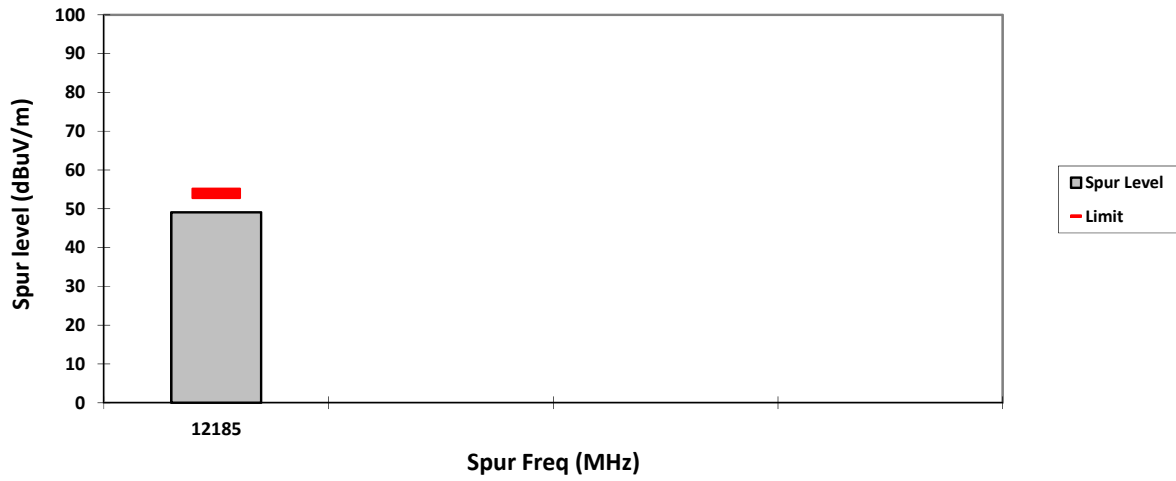

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108

Battery: PMNN4489B Accessory: PMAE4079A

Test Channel: High Test Frequency: 2462.0000 MHz Test Standard: ANSI C63.10-2013 Worst Case Plane: Y-Plane (802.11b)

Radiated Emission (High Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4924	-	48.6254**	-	-	74.0	-	-	25.3746	-	-
7386	-	52.6774**	-	-	74.0	-	-	21.3226	-	-
9848	-	56.8080**	-	-	74.0	-	-	17.1920	-	95.5403
12310	-	60.8926**	49.0007**	-	74.0	54.0	-	13.1074	4.9993	-
14772	-	60.9523**	-	-	74.0	-	-	13.0477	-	95.5403
17234	-	62.6757**	-	-	74.0	-	-	11.3243	-	95.5403
19696	-	33.0132**	-	-	74.0	-	-	40.9868	-	-
22158	-	38.7273**	-	-	74.0	-	-	35.2727	-	-
24620	-	40.1783**	-	-	74.0	-	-	33.8217	-	95.5403
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4924	-	49.9977**	-	-	74.0	-	-	24.0023	-	-
7386	-	53.3512**	-	-	74.0	-	-	20.6488	-	-
9848	-	55.9846**	-	-	74.0	-	-	18.0154	-	95.5403
12310	-	59.9803**	49.0008**	-	74.0	54.0	-	14.0197	4.9992	-
14772	-	61.1698**	-	-	74.0	-	-	12.8302	-	95.5403
17234	-	63.1294**	-	-	74.0	-	-	10.8706	-	95.5403
19696	-	33.7535**	-	-	74.0	-	-	40.2465	-	-
22158	-	37.7643**	-	-	74.0	-	-	36.2357	-	-
24620	-	39.1731**	-	-	74.0	-	-	34.8269	-	95.5403


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3 Humidity (%): 70.6
Test Performed by: Nazrin&Qawiman Test Date: Sun, 14 Nov, 2021
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.

Attenuation below the general limits specified in §15.209(a) is not required.


VERTICAL, QPK

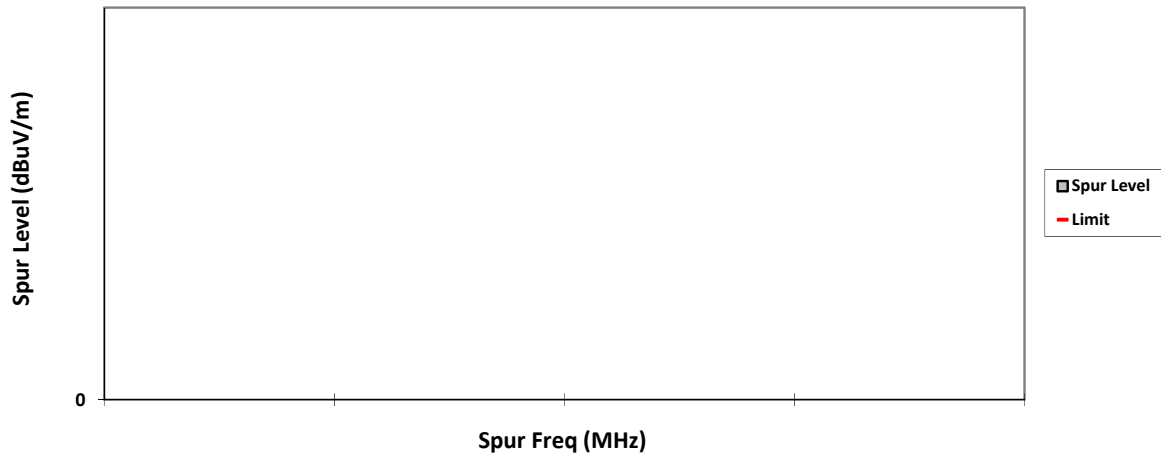


HORIZONTAL, QPK

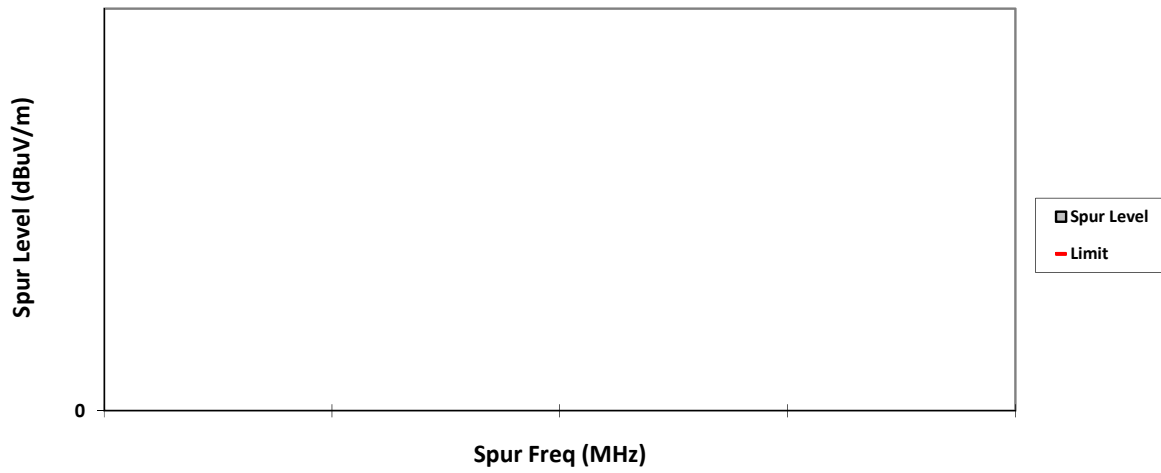


VERTICAL, PK

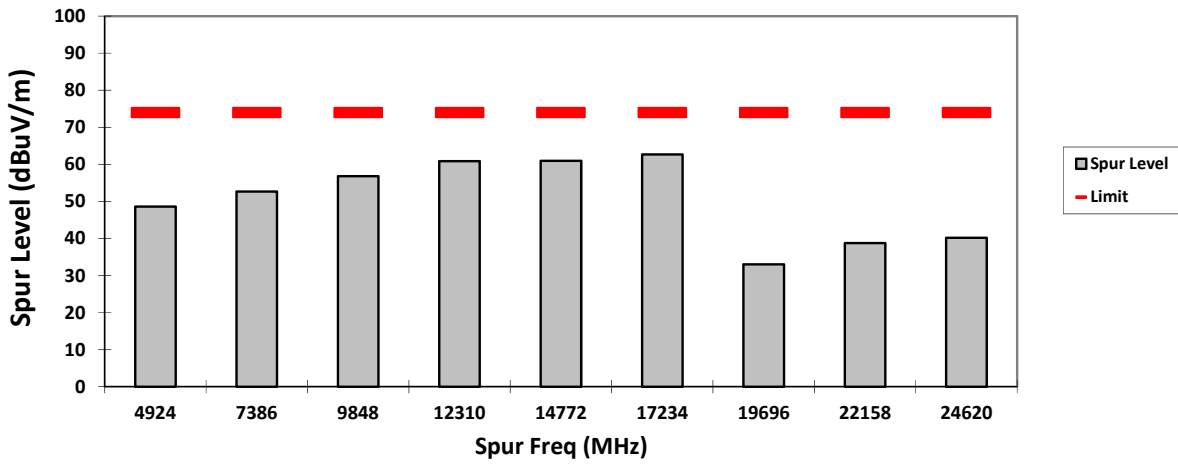


HORIZONTAL, PK

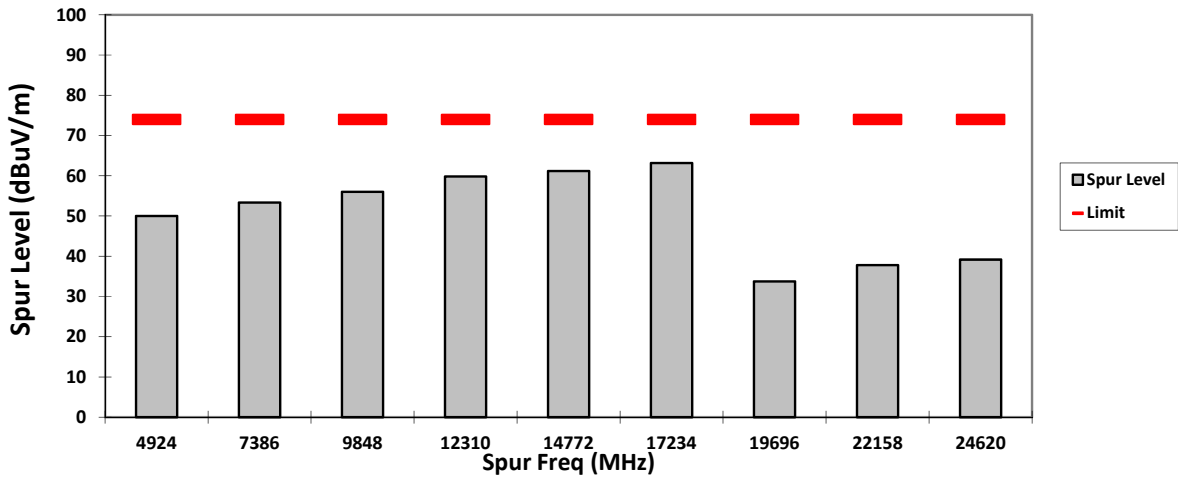


VERTICAL, AV

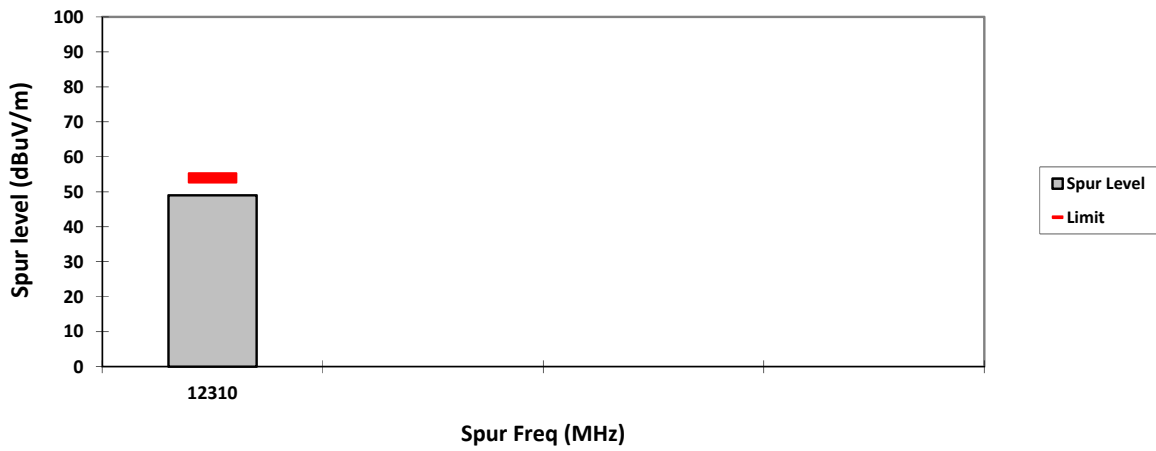


HORIZONTAL, AV

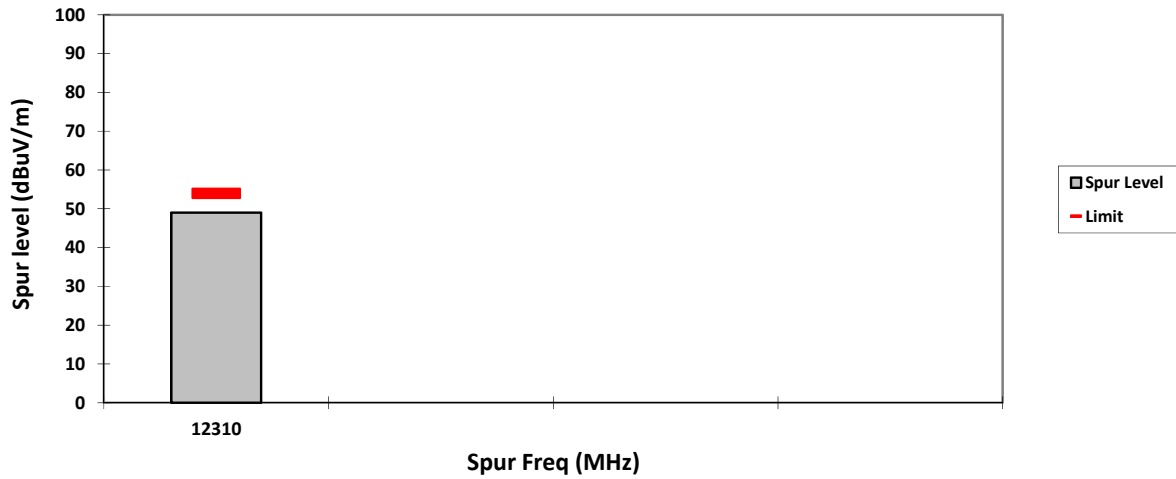


VERTICAL, QPK

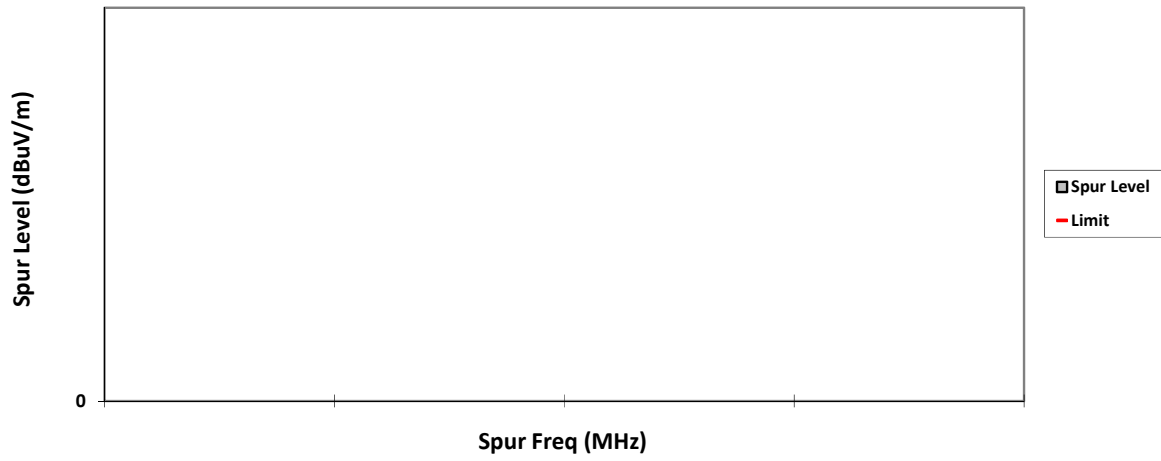


HORIZONTAL, QPK

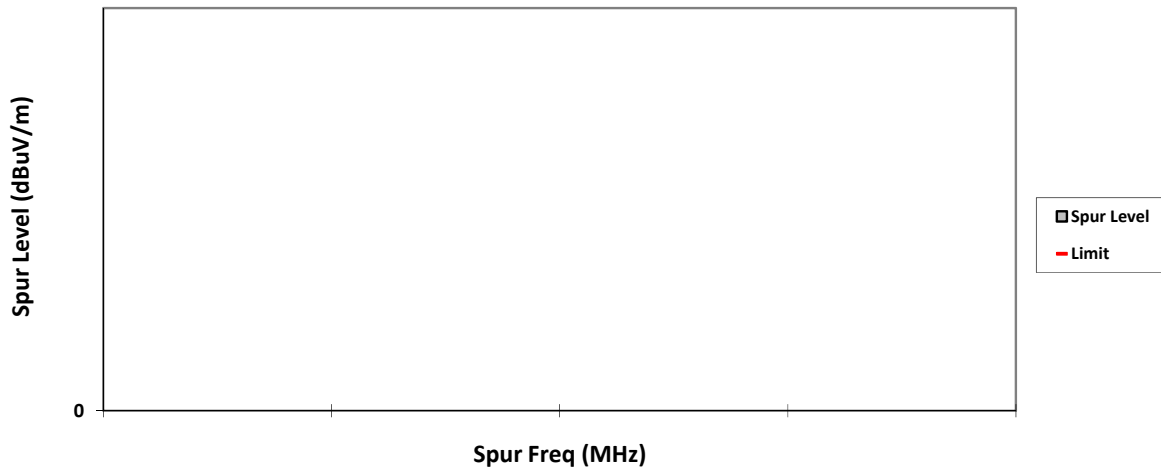


VERTICAL, PK

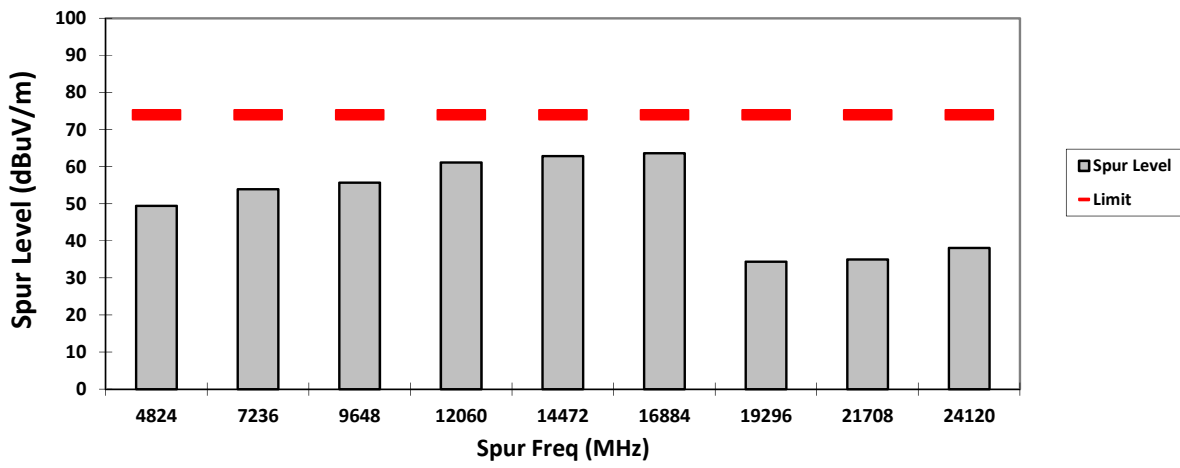


HORIZONTAL, PK

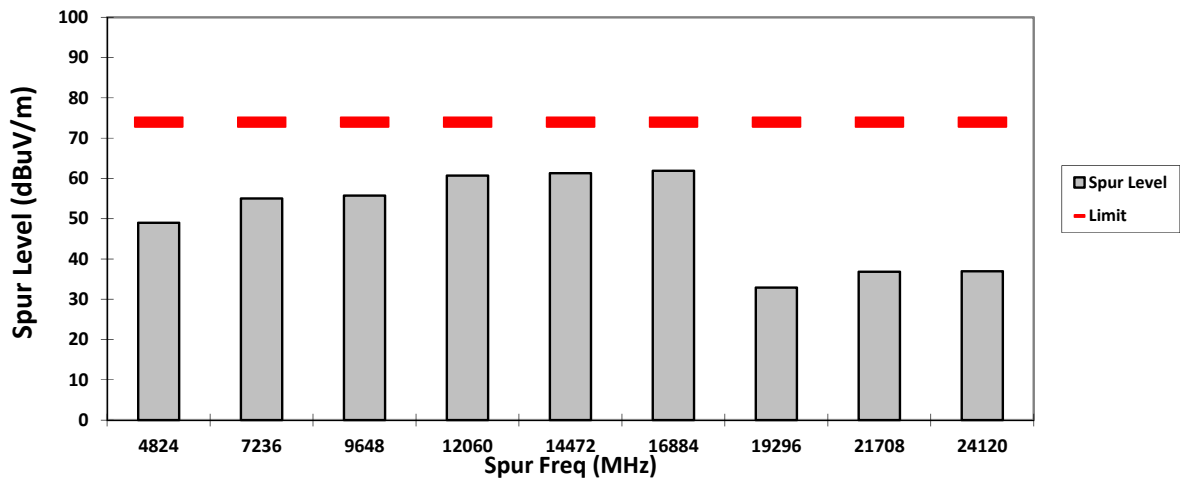

VERTICAL, AV

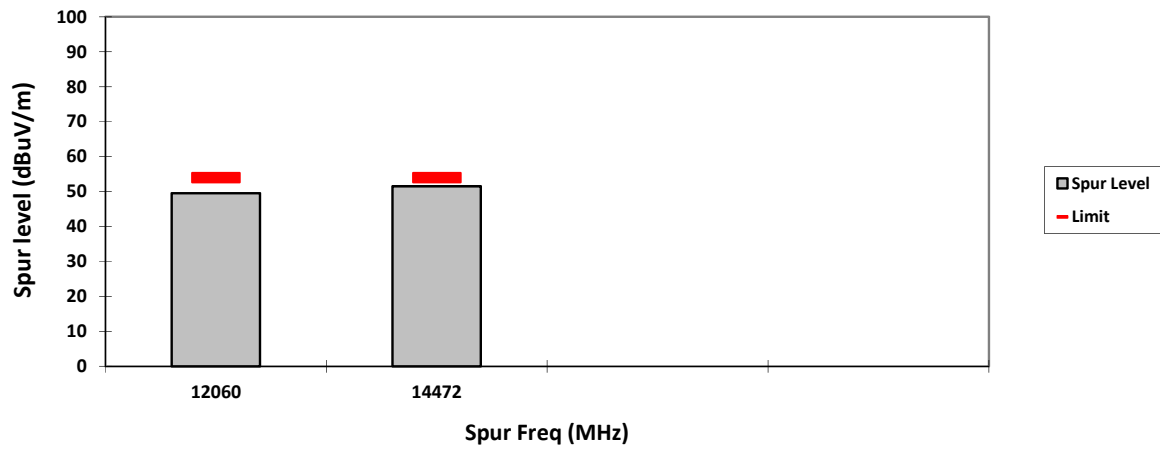

HORIZONTAL, AV

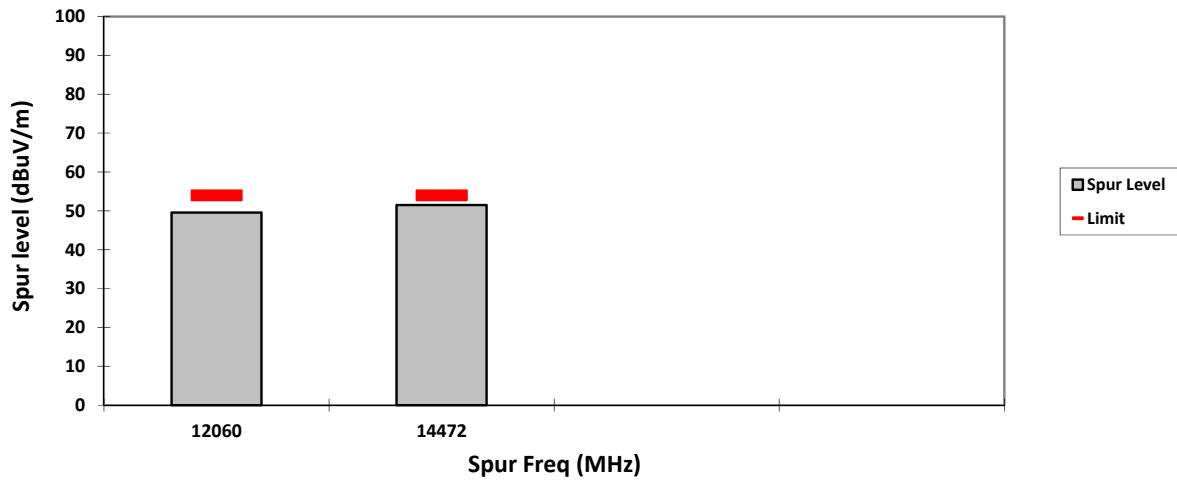

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108
Battery: PMNN4489B Accessory: PMAE4079A

**Test Channel: Mid Test Frequency: 2437.0000 MHz Test Standard: ANSI C63.10-2013 Worst Case Plane:
 Y-Plane (802.11g)**

Radiated Emission (Mid Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dB μ V/m)	Spur level PK (dB μ V/m)	Spur level AV (dB μ V/m)	Limit QPK (dB μ V/m)	Limit PK (dB μ V/m)	Limit AV (dB μ V/m)	Margin QPK (dB μ V/m)	Margin PK (dB μ V/m)	Margin AV (dB μ V/m)	Carrier PK Power (dB μ V/m)
4874	-	49.4586**	-	-	74.0	-	-	24.5414	-	-
7311	-	53.4801**	-	-	74.0	-	-	20.5199	-	-
9748	-	55.2814**	-	-	74.0	-	-	18.7186	-	95.5403
12185	-	60.5654**	49.4901**	-	74.0	54.0	-	13.4346	4.5099	-
14622	-	62.8480**	-	-	74.0	-	-	11.152	-	95.5403
17059	-	63.6837**	-	-	74.0	-	-	10.3163	-	95.5403
19496	-	32.1262**	-	-	74.0	-	-	41.8738	-	-
21933	-	39.4173**	-	-	74.0	-	-	34.5827	-	95.5403
24370	-	38.0350**	-	-	74.0	-	-	35.9650	-	95.5403
Horizontal Radiated Emission Result										
4874	-	48.9068**	-	-	74.0	-	-	25.0932	-	-
7311	-	53.0808**	-	-	74.0	-	-	20.9192	-	-
9748	-	55.3953**	-	-	74.0	-	-	18.6047	-	95.5403
12185	-	59.8755**	49.4898**	-	74.0	54.0	-	14.1245	4.5102	-
14622	-	62.1501**	-	-	74.0	-	-	11.8499	-	95.5403
17059	-	63.8661**	-	-	74.0	-	-	10.1339	-	95.5403
19496	-	31.9647**	-	-	74.0	-	-	42.0353	-	-
21933	-	38.2335**	-	-	74.0	-	-	35.7665	-	95.5403
24370	-	38.7867**	-	-	74.0	-	-	35.2133	-	95.5403


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3 Humidity (%): 70.6
Test Performed by: Nazrin&Qawiman Test Date: Sun, 14 Nov, 2021
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

Attenuation below the general limits specified in §15.209(a) is not required.


VERTICAL, QPK

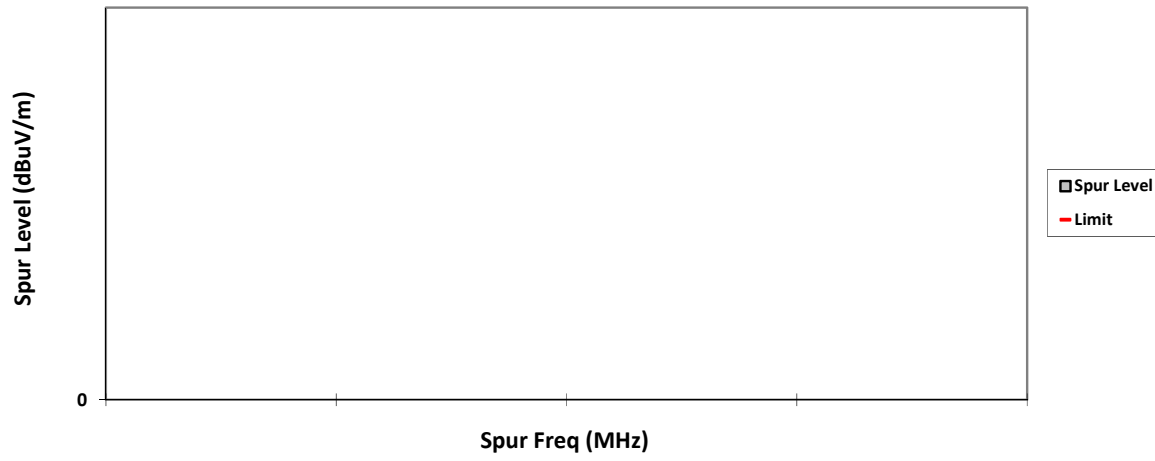


HORIZONTAL, QPK

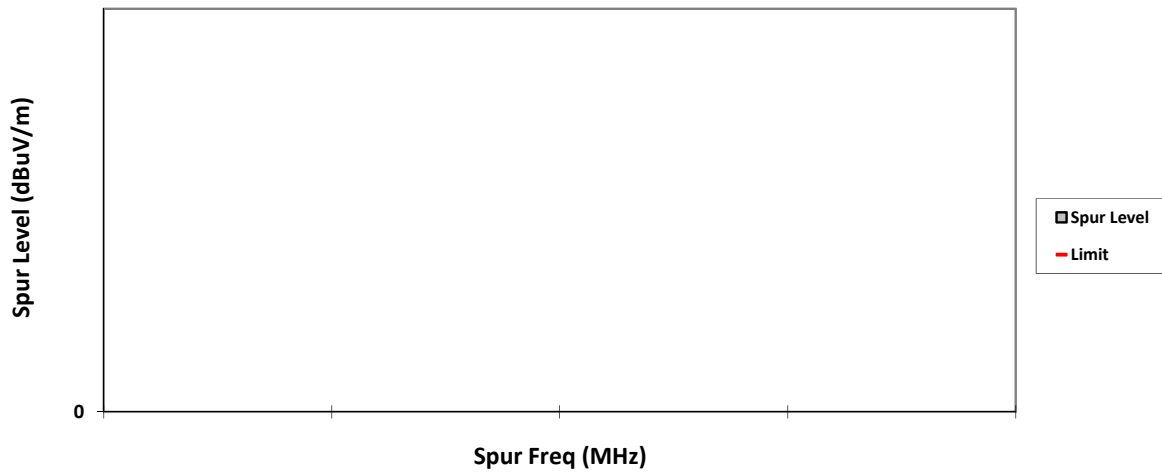


VERTICAL, PK

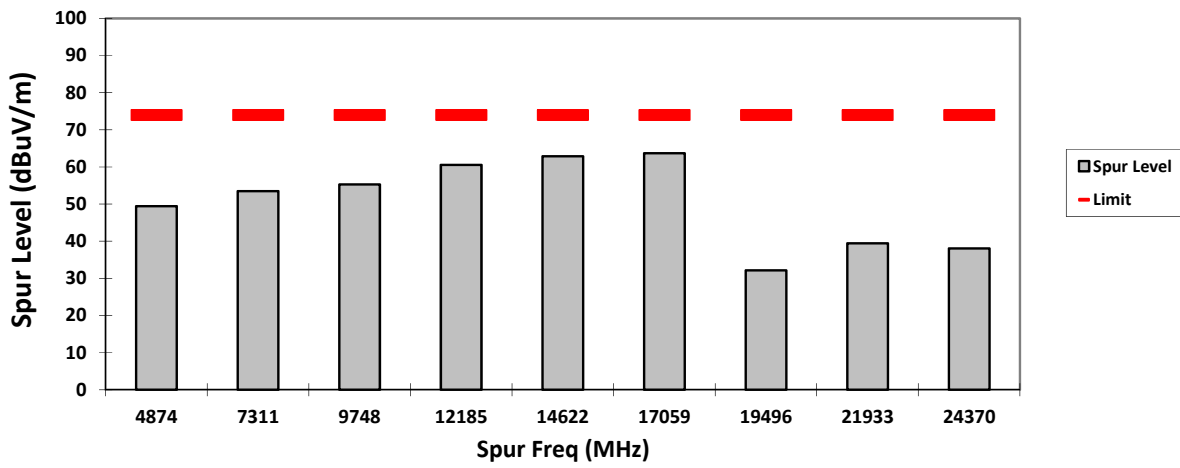


HORIZONTAL, PK

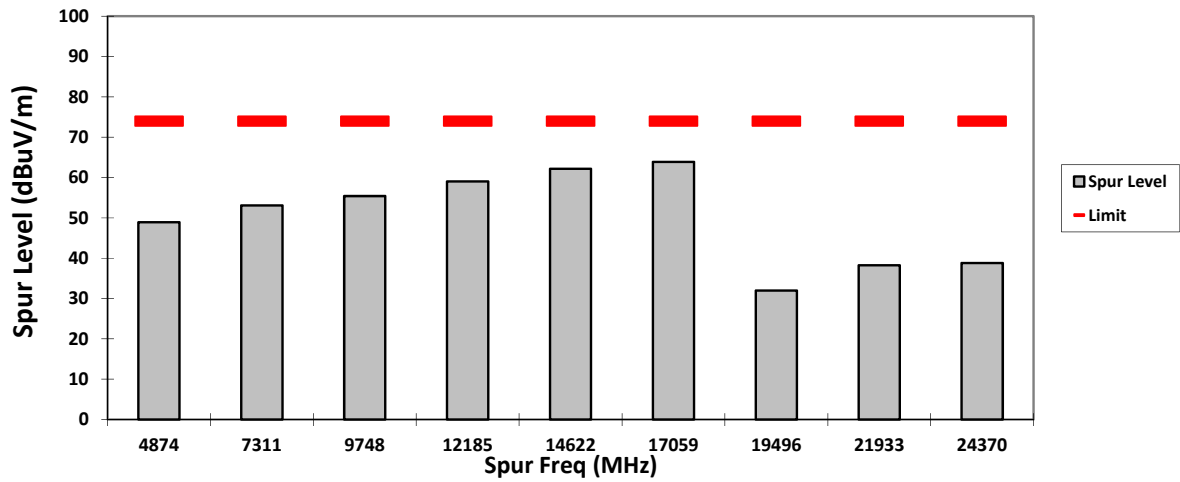

VERTICAL, AV

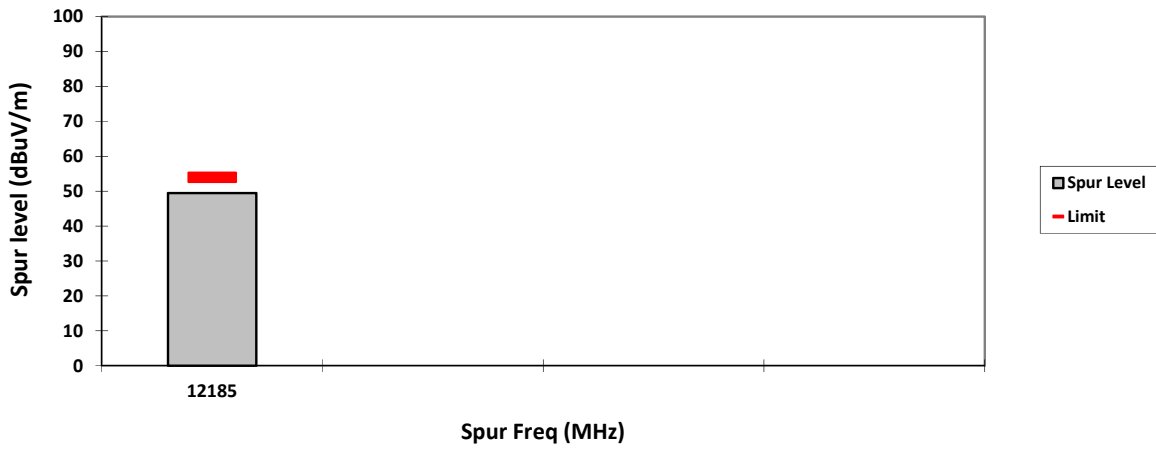

HORIZONTAL, AV

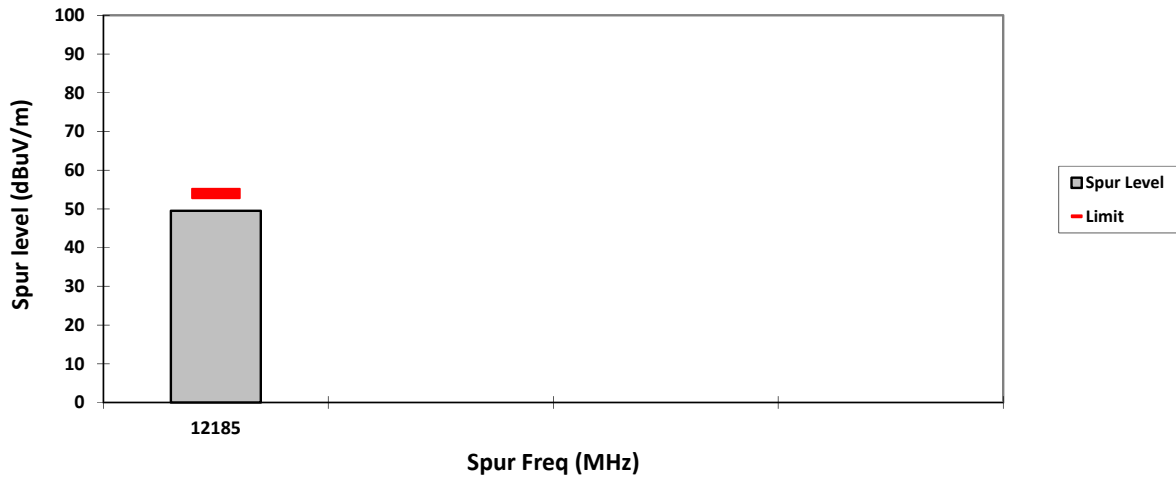

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108
Battery: PMNN4489B Accessory: PMAE4079A
Test Channel: High Test Frequency: 2462.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Y-Plane (802.11g)

Radiated Emission (High Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4924	-	48.9679**	-	-	74.0	-	-	25.0321	-	-
7386	-	53.9535**	-	-	74.0	-	-	20.0465	-	-
9848	-	56.4200**	-	-	74.0	-	-	17.7600	-	95.5403
12310	-	61.3487**	49.6952**	-	74.0	54.0	-	12.6513	4.3048	-
14772	-	61.0873**	-	-	74.0	-	-	12.9127	-	95.5403
17234	-	64.7559**	-	-	74.0	-	-	9.2441	-	95.5403
19696	-	33.1259**	-	-	74.0	-	-	40.8741	-	-
22158	-	38.5195**	-	-	74.0	-	-	35.4805	-	-
24620	-	38.5901**	-	-	74.0	-	-	35.4099	-	95.5403
Horizontal Radiated Emission Result										
4924	-	48.4215**	-	-	74.0	-	-	25.5785	-	-
7386	-	53.3560**	-	-	74.0	-	-	20.6440	-	-
9848	-	55.7179**	-	-	74.0	-	-	18.2821	-	95.5403
12310	-	59.8808**	49.4696**	-	74.0	54.0	-	14.1192	4.5304	-
14772	-	60.4209**	-	-	74.0	-	-	13.5791	-	95.5403
17234	-	62.1830**	-	-	74.0	-	-	11.8170	-	95.5403
19696	-	32.5955**	-	-	74.0	-	-	41.4045	-	-
22158	-	38.1891**	-	-	74.0	-	-	35.8109	-	-
24620	-	39.3654**	-	-	74.0	-	-	35.6346	-	95.5403


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.3 Humidity (%): 70.6
Test Performed by: Nazrin&Qawiman Test Date: Sun, 14 Nov, 2021
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

Attenuation below the general limits specified in §15.209(a) is not required.


VERTICAL, QPK

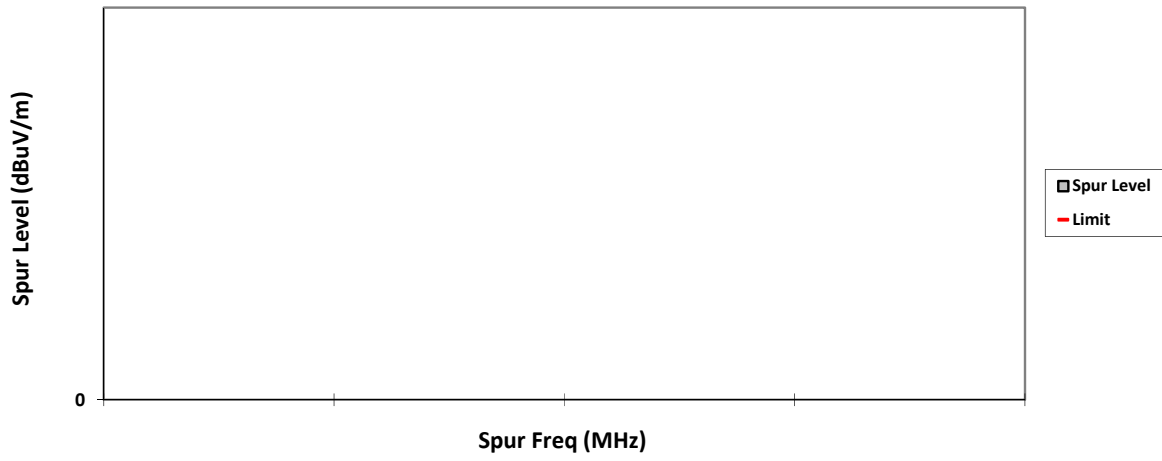


HORIZONTAL, QPK

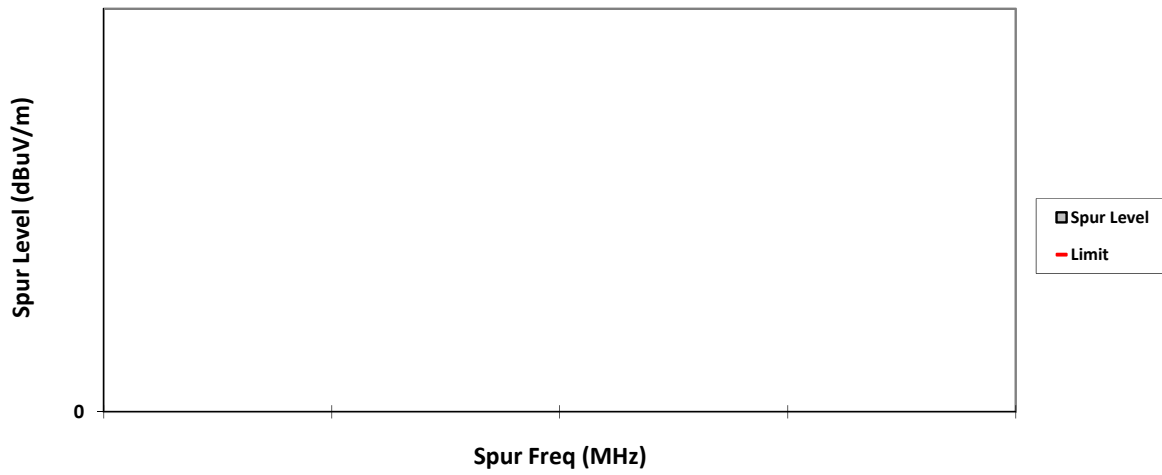


VERTICAL, PK

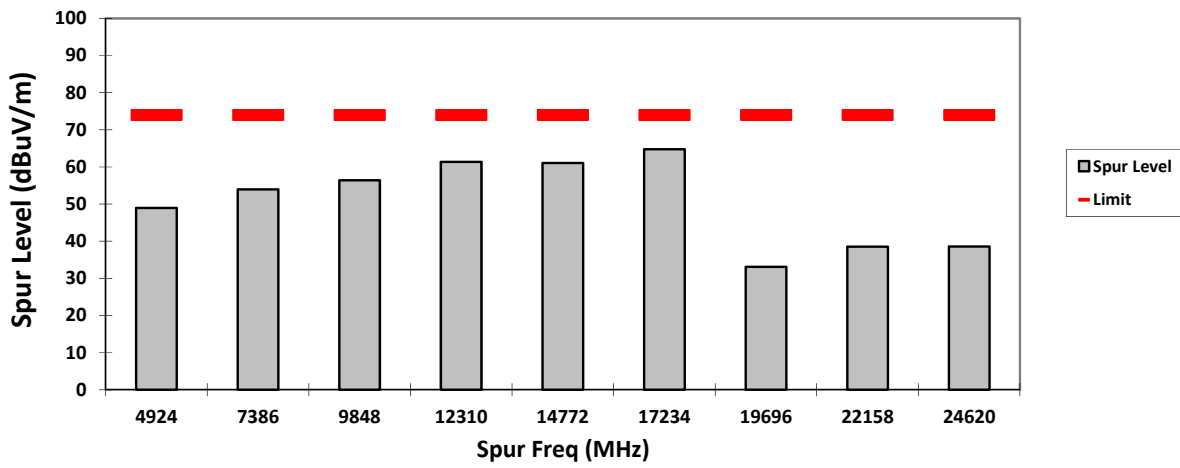


HORIZONTAL, PK

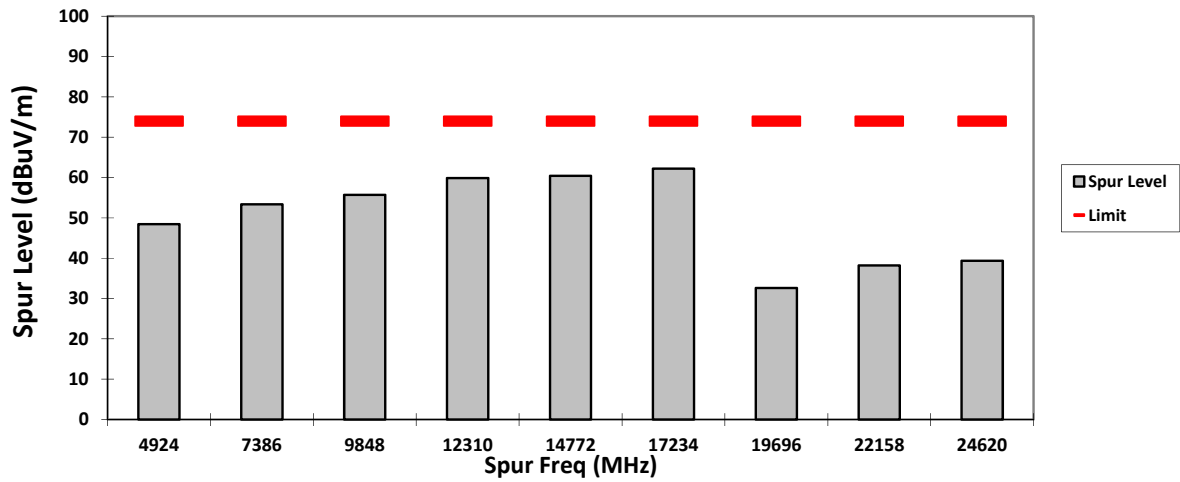


VERTICAL, AV

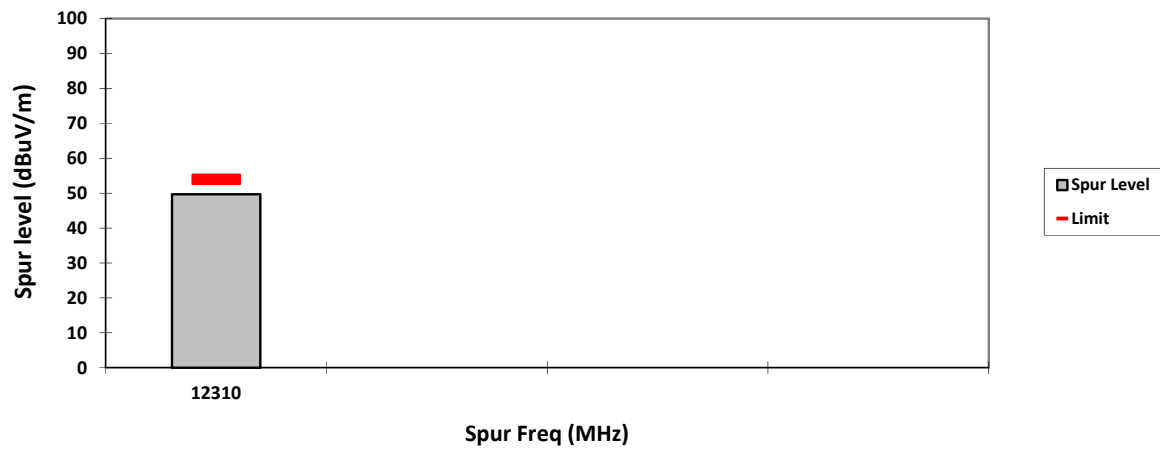


HORIZONTAL, AV

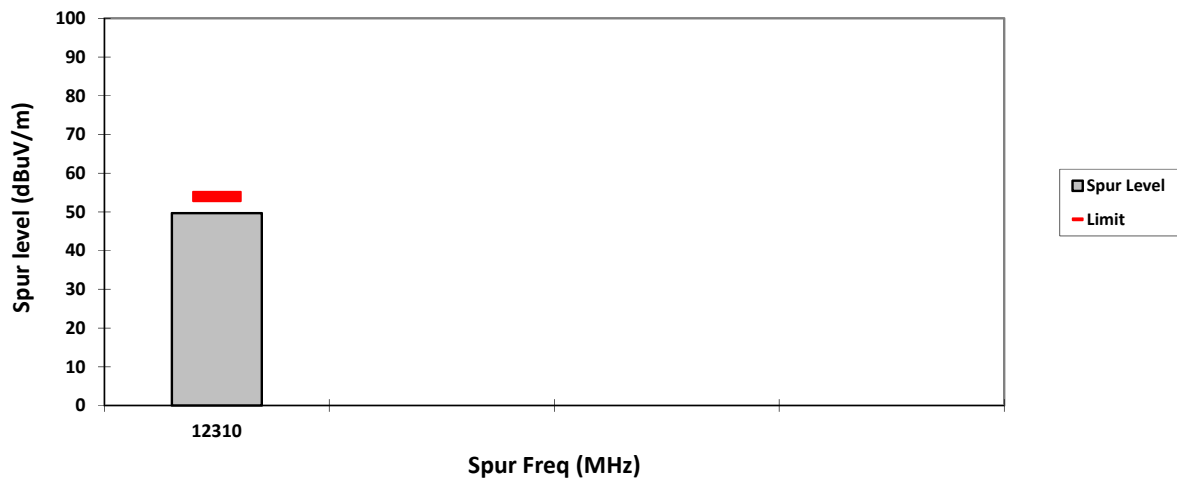


VERTICAL, QPK

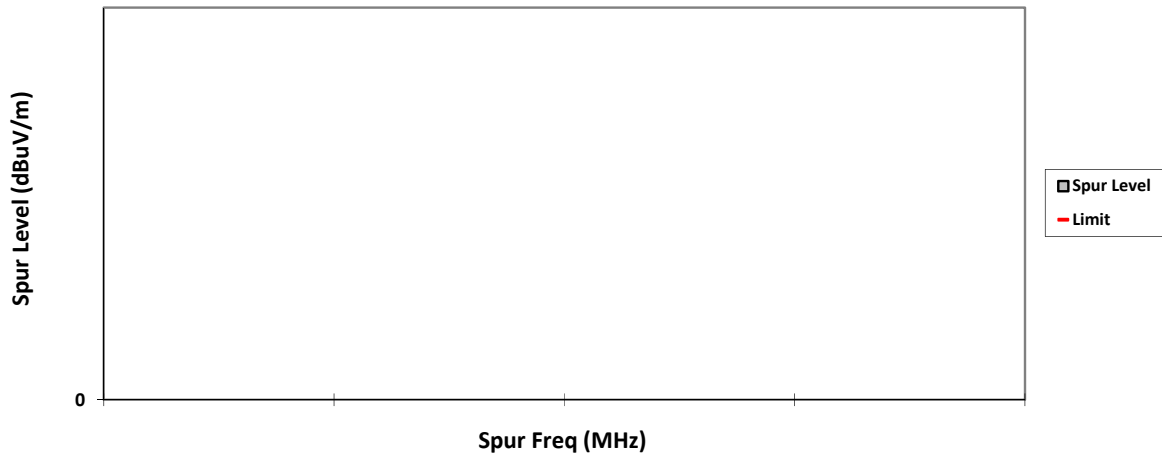


HORIZONTAL, QPK

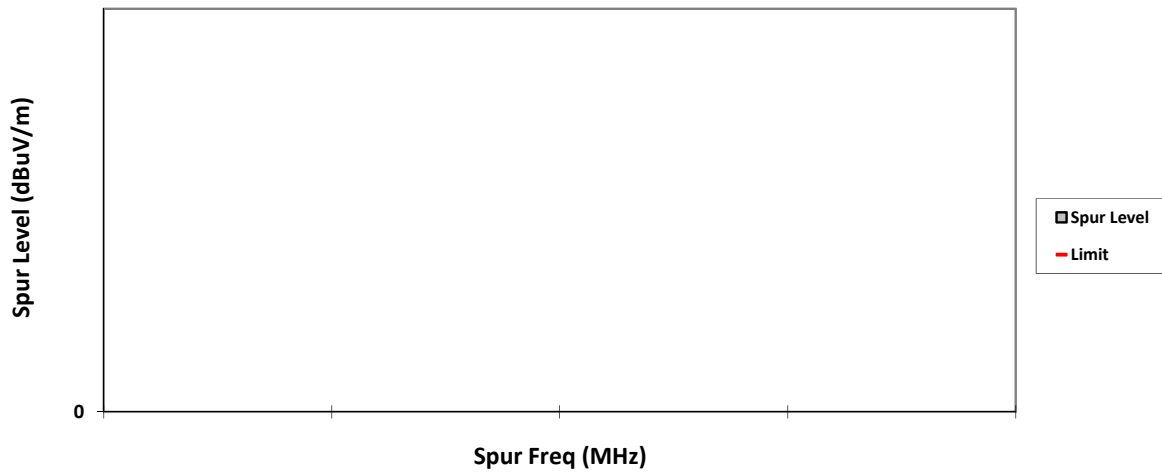


VERTICAL, PK

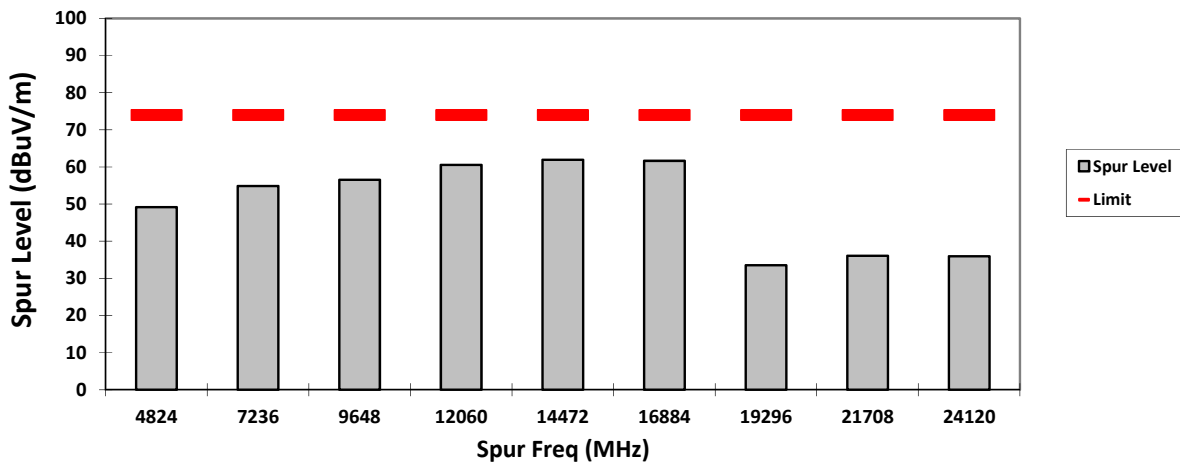


HORIZONTAL, PK

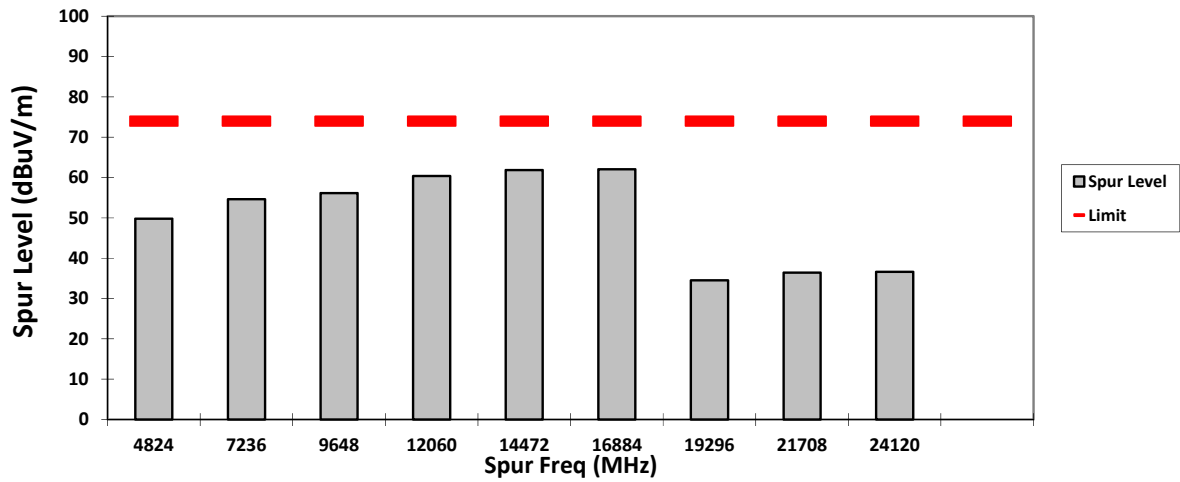

VERTICAL, AV

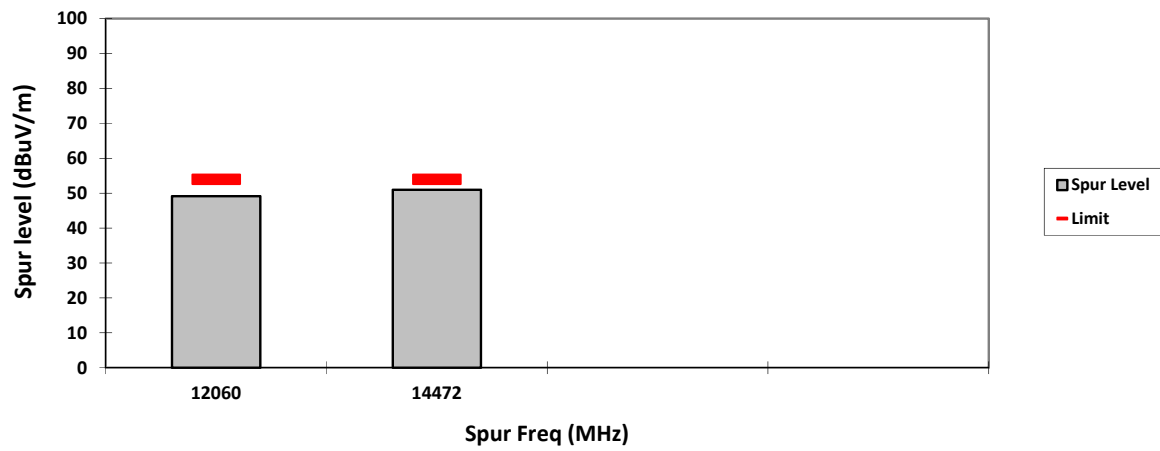

HORIZONTAL, AV

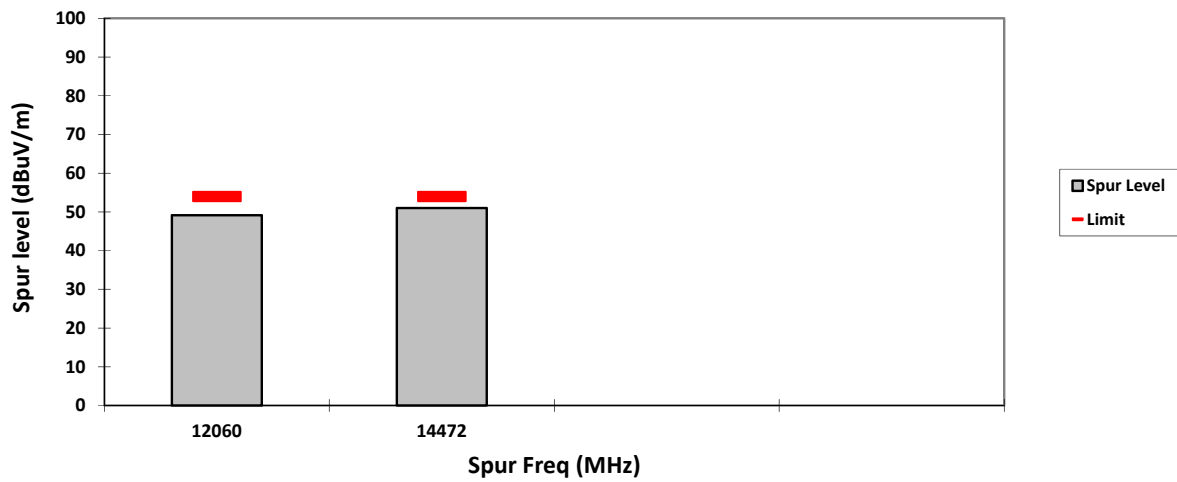

Test: WIFI SAC Transmitter Radiated Emission
Model#: AAH56RDN9RA1AN S/N: 871TXVC351 EMC SR ID#: 20392-EMC-00108
Battery: PMNN4489B Accessory: PMAE4079A
Test Channel: Mid Test Frequency: 2437.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Y-Plane (802.11n)

Radiated Emission (Mid Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4874	-	50.1010**	-	-	74.0	-	-	23.8990	-	-
7311	-	52.9828**	-	-	74.0	-	-	21.0172	-	-
9748	-	55.8167**	-	-	74.0	-	-	18.1833	-	95.5403
12185	-	59.4373**	49.0661**	-	74.0	54.0	-	14.5627	4.9339	-
14622	-	61.4846**	-	-	74.0	-	-	12.5154	-	95.5403
17059	-	63.0680**	-	-	74.0	-	-	10.9320	-	95.5403
19496	-	33.5235**	-	-	74.0	-	-	40.4765	-	-
21933	-	38.8610**	-	-	74.0	-	-	35.1390	-	95.5403
24370	-	37.3881**	-	-	74.0	-	-	36.6119	-	95.5403
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4874	-	49.7450**	-	-	74.0	-	-	24.2550	-	-
7311	-	53.4595**	-	-	74.0	-	-	20.5405	-	-
9748	-	55.7692**	-	-	74.0	-	-	18.2308	-	95.5403
12185	-	59.6311**	49.0664**	-	74.0	54.0	-	14.3689	4.9336	-
14622	-	61.2320**	-	-	74.0	-	-	12.7680	-	95.5403
17059	-	62.3098**	-	-	74.0	-	-	11.6902	-	95.5403
19496	-	33.3384**	-	-	74.0	-	-	40.6616	-	-
21933	-	39.1439**	-	-	74.0	-	-	34.8561	-	95.5403
24370	-	38.5098**	-	-	74.0	-	-	35.4902	-	95.5403


Remarks: Pass Result	Marginal Result			Fail Result			
-------------------------	-----------------	--	--	-------------	--	--	--

Temperature (degC): 23.3 Humidity (%): 70.6
Test Performed by: Nazrin&Qawiman Test Date: Sun, 14 Nov, 2021
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)


**Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

Attenuation below the general limits specified in §15.209(a) is not required.


VERTICAL, QPK

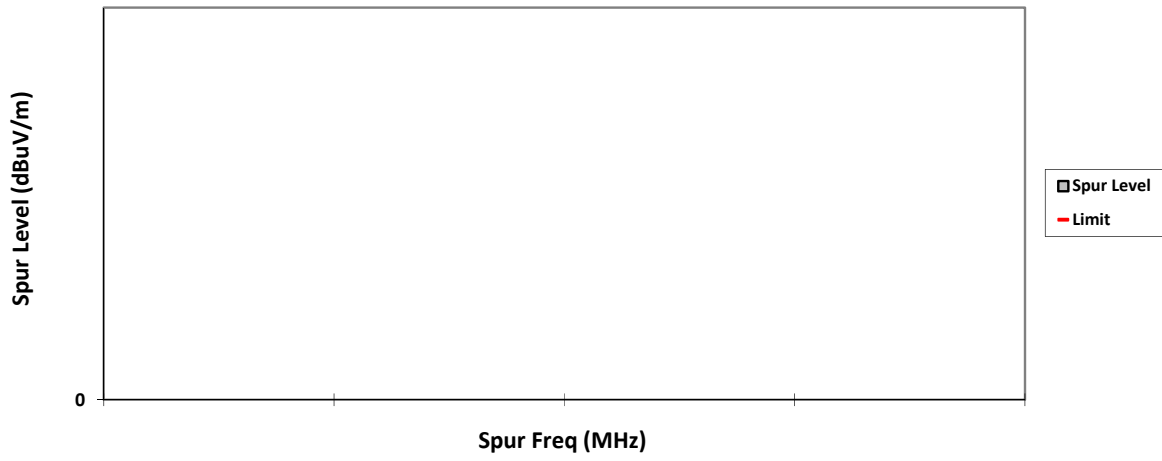


HORIZONTAL, QPK

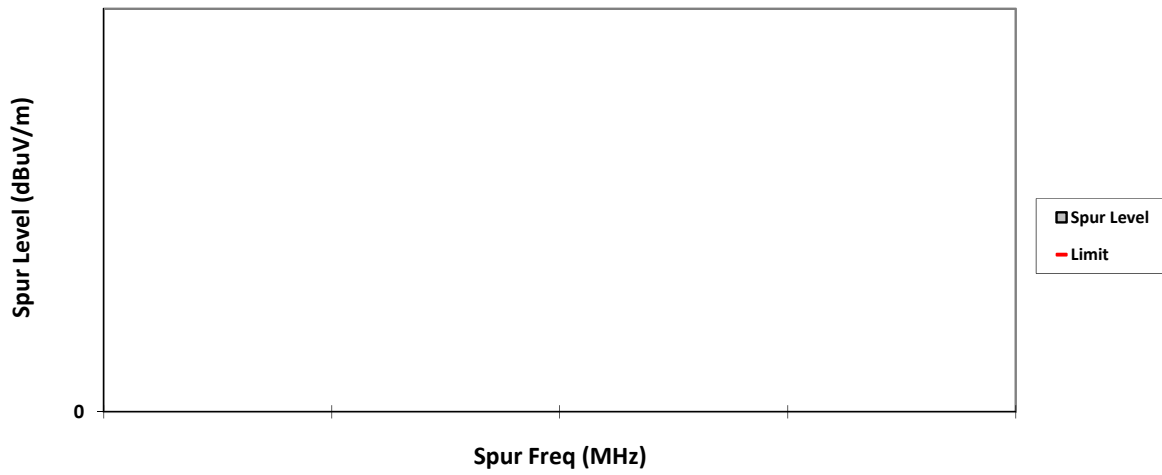


VERTICAL, PK

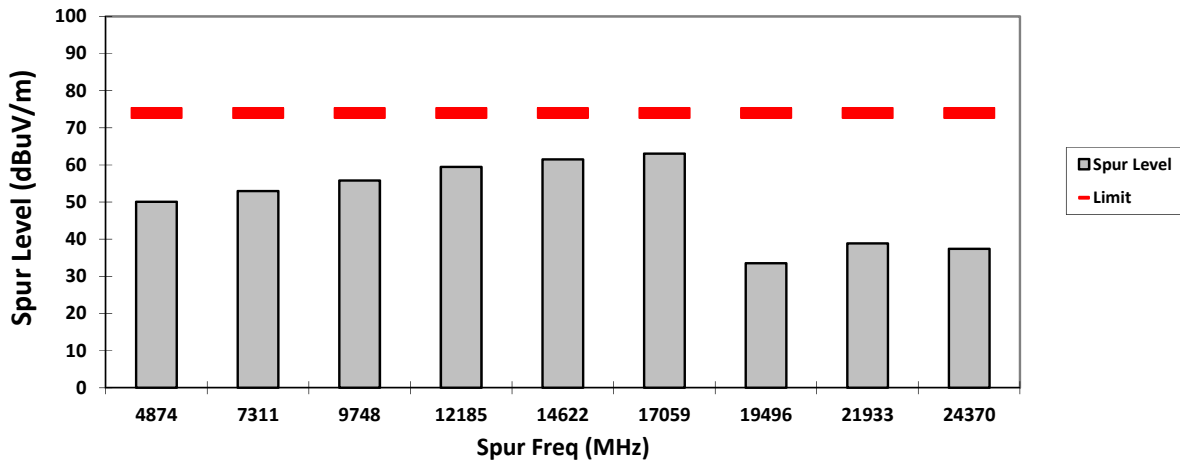


HORIZONTAL, PK

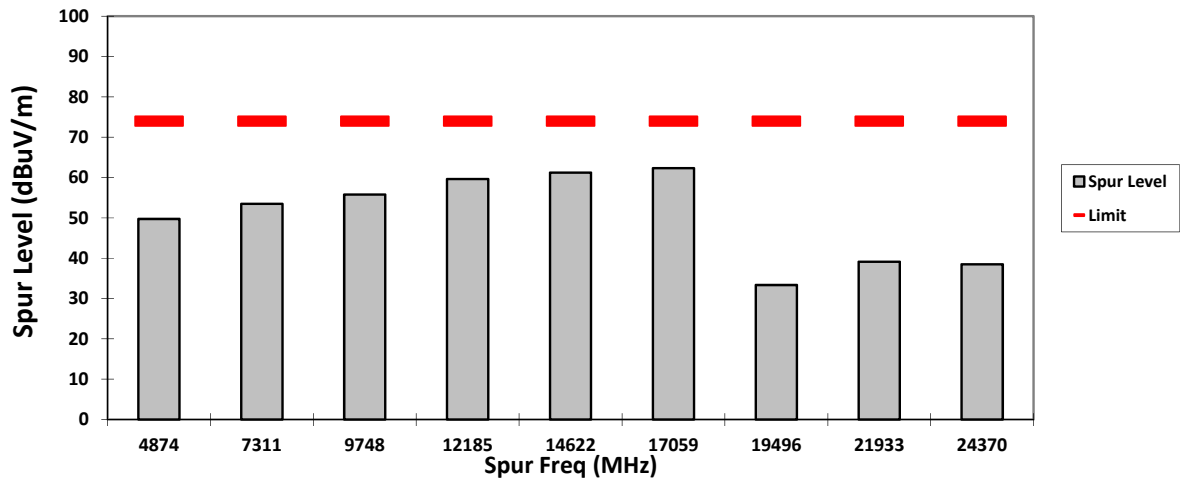


VERTICAL, AV

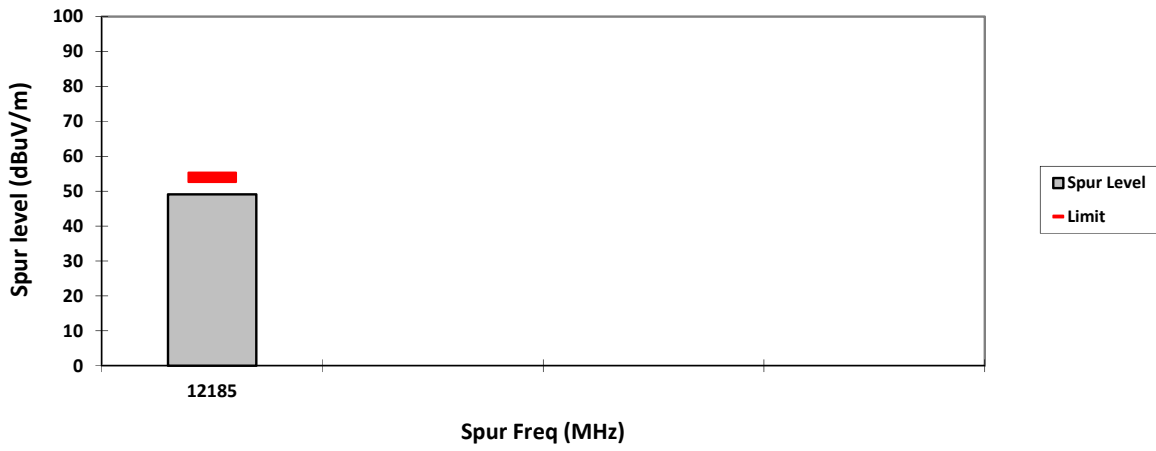


HORIZONTAL, AV

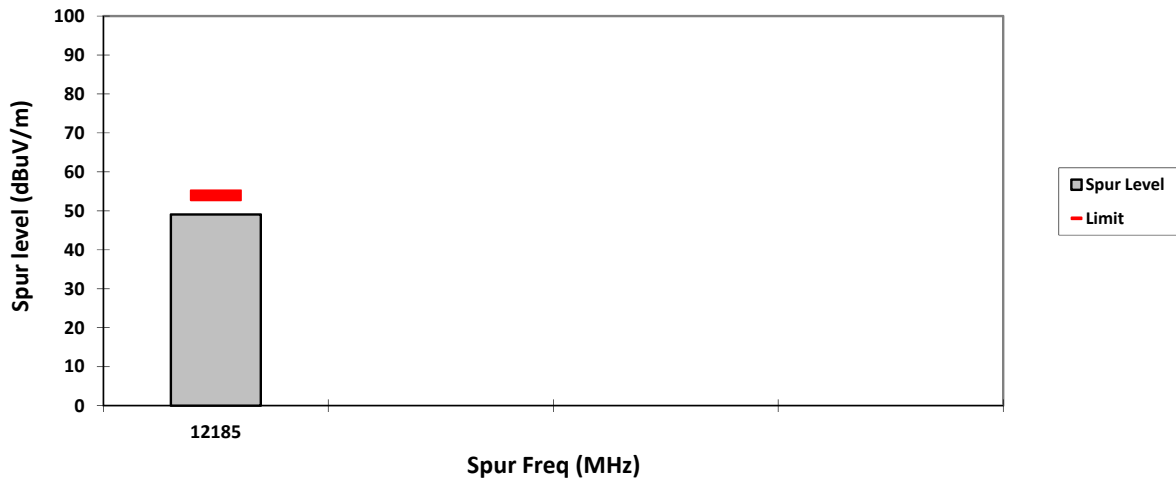


VERTICAL, QPK

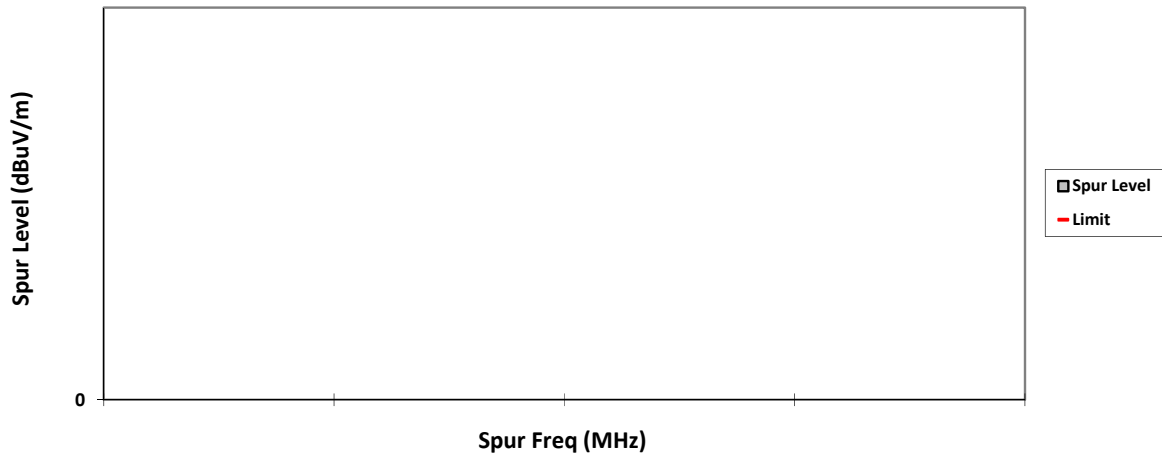


HORIZONTAL, QPK

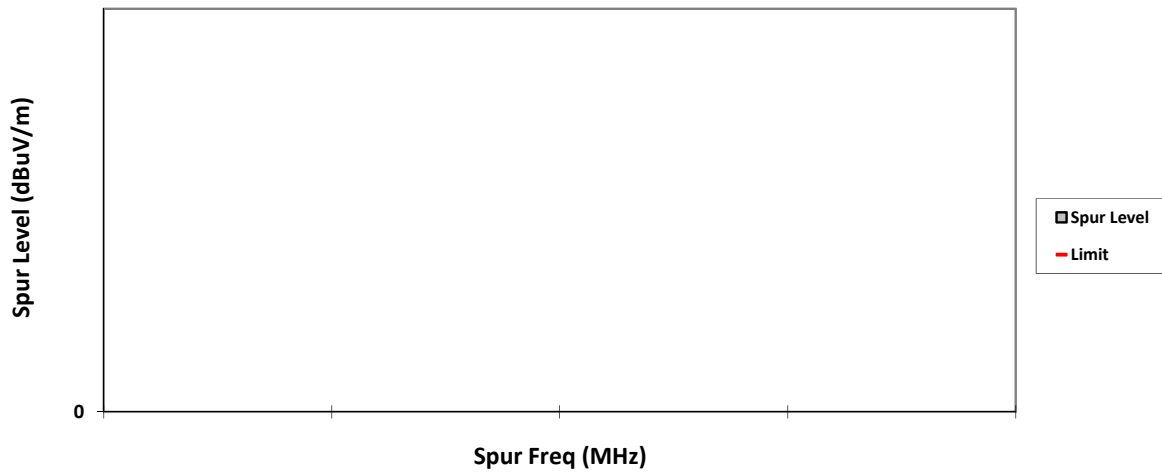


VERTICAL, PK

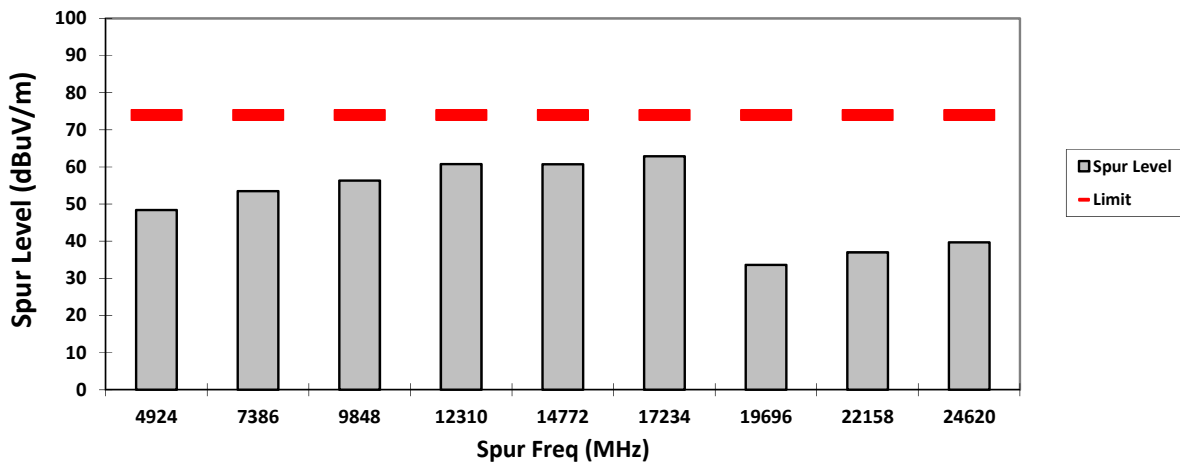


HORIZONTAL, PK

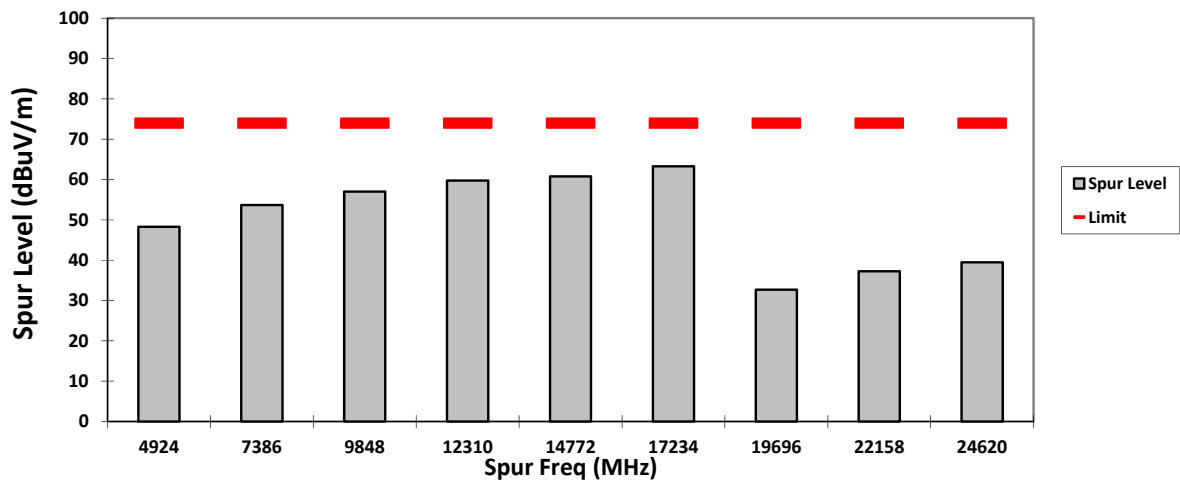

VERTICAL, AV

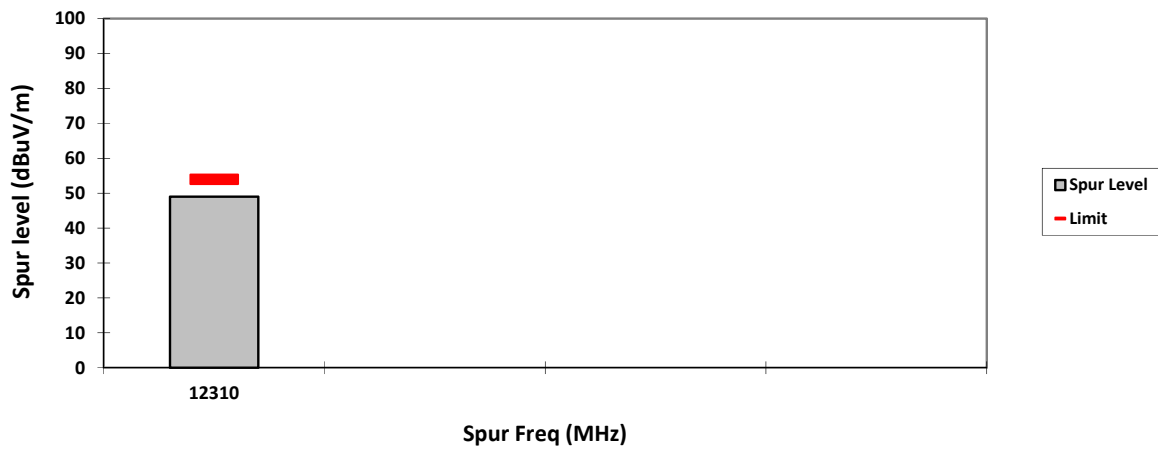


HORIZONTAL, AV

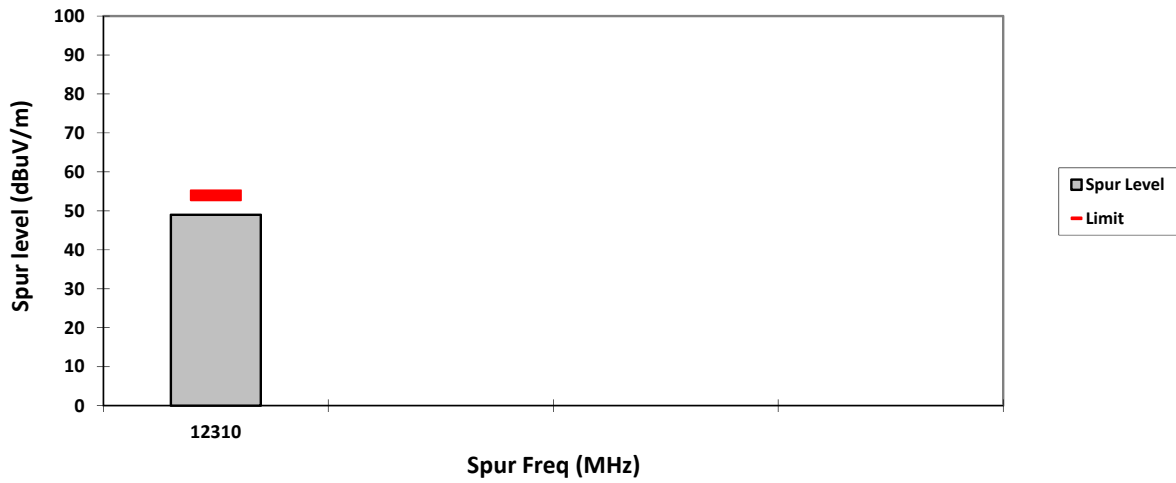

6.8. AC Powerline Conducted Emission

6.8.1. Test Setup

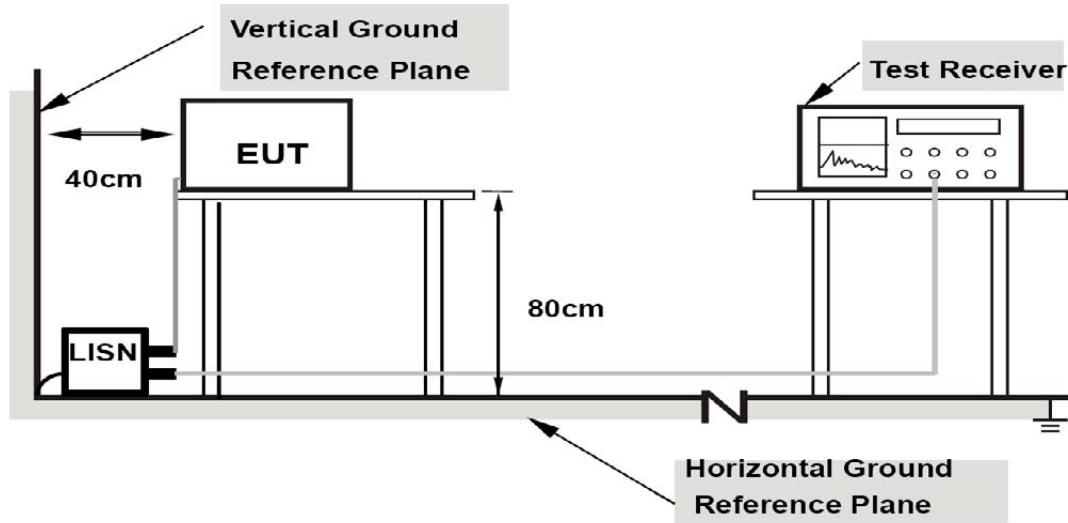

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.8.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.8.3. Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.

END OF TEST REPORT