

Appendix D. SAR Test Setup Photos

For Head

Non-IS Sku with 5800mAh Battery and Cover 1:



Right Cheek



Right Tilted




Left Cheek



Left Tilted


Non-IS Sku with 2900mAh Battery and Cover 2:

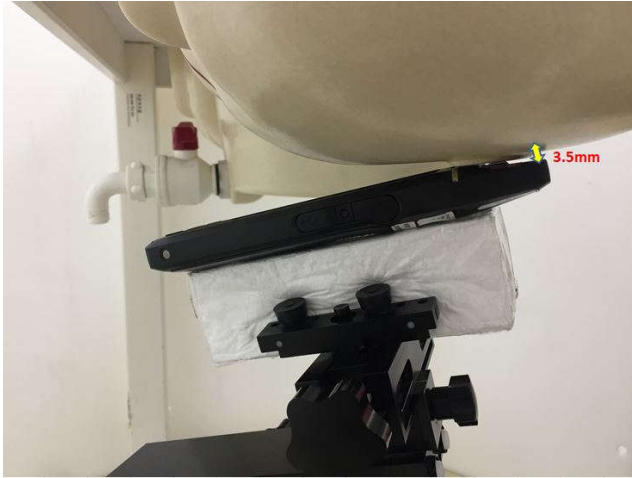

Left Tilted

For Hotspot

Non-IS Sku with 2900mAh Battery and Cover 2:

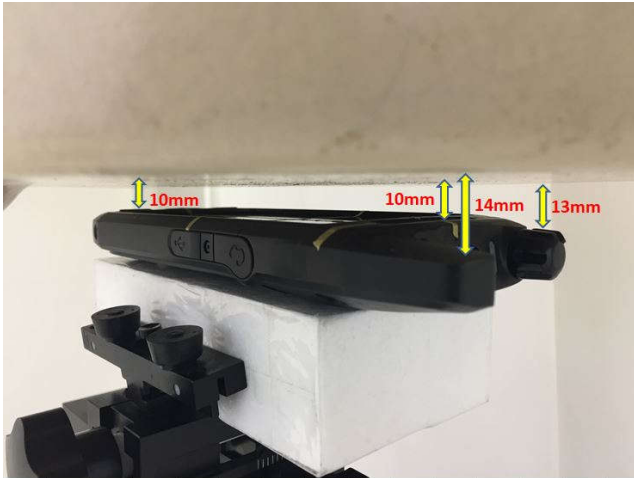

Front, Test Separation 10 mm



Back, Test Separation 10 mm




Top Side, Test Separation 10 mm



Right Side, Test Separation 10 mm


Non-IS Sku with 5800mAh Battery and Cover 1:

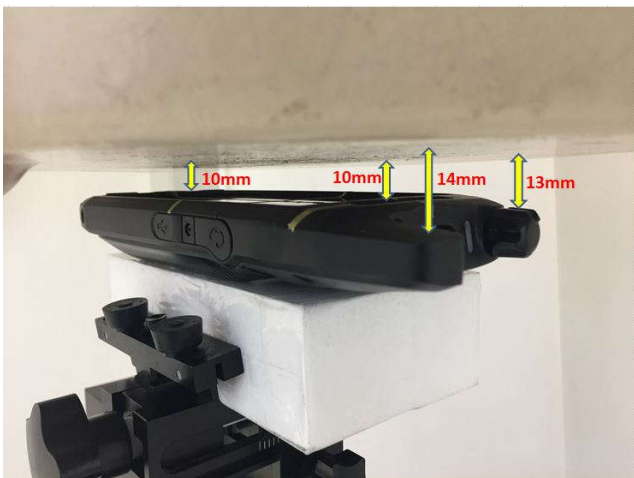

Front, Test Separation 10 mm


For Body-worn

Non-IS Sku with 2900mAh Battery and Belt Clip PMLN7965:

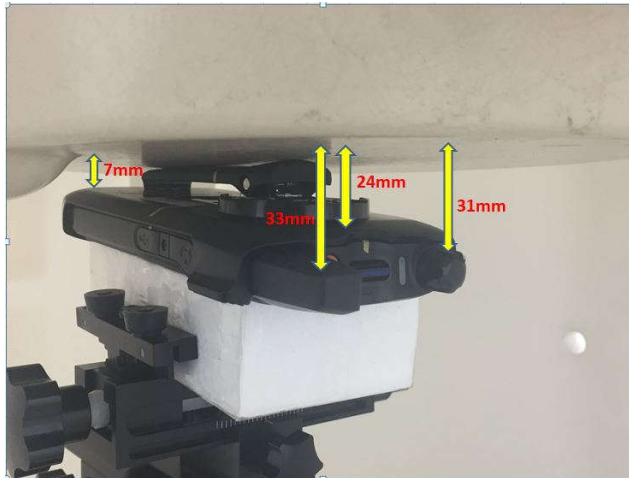


Front, Test Separation 0 mm

Non-IS Sku with 2900mAh Battery and Belt Clip NNTN8266:

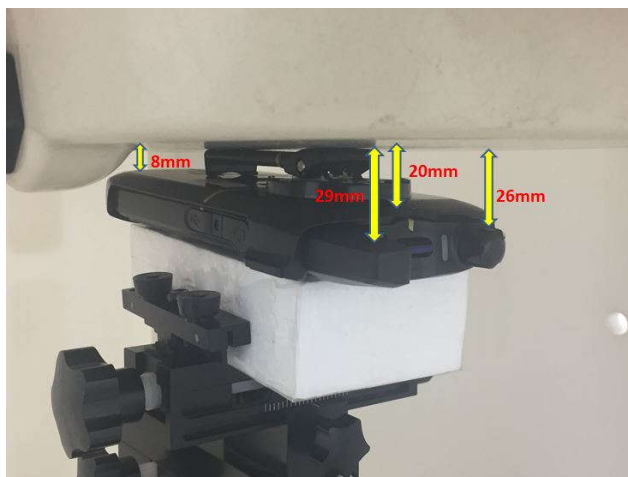

Front, Test Separation 0 mm

Non-IS Sku with 5800mAh Battery and Belt Clip PMLN7965:

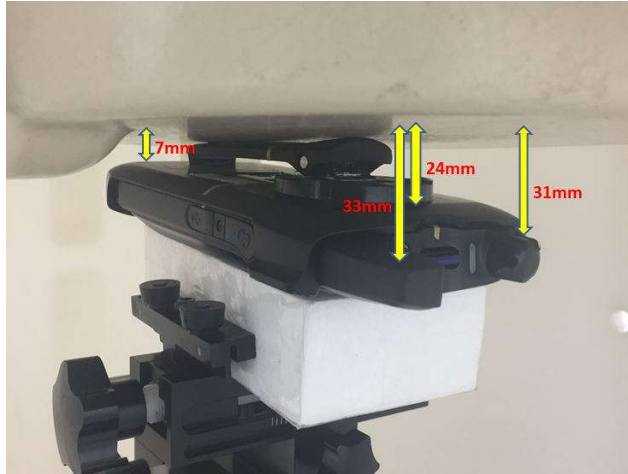

Front, Test Separation 0 mm