



FCC RF Test Report

APPLICANT : Motorola Solutions Inc
EQUIPMENT : WAVE TWO-WAY RADIO
BRAND NAME : Motorola Solutions
MODEL NAME : TLK 100i
MODEL NUMBER : HK2123A
FCC ID : AZ489FT7136
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was completed on Apr. 15, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test..... 5
1.4 Product Specification of Equipment Under Test..... 6
1.5 Modification of EUT 6
1.6 Testing Location 6
1.7 Test Software..... 6
1.8 Applicable Standards..... 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8
2.1 Carrier Frequency and Channel 8
2.2 Test Mode 9
2.3 Connection Diagram of Test System 10
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 11
2.6 Measurement Results Explanation Example..... 11
3 TEST RESULT 12
3.1 6dB and 99% Bandwidth Measurement 12
3.2 Output Power Measurement..... 14
3.3 Power Spectral Density Measurement 15
3.4 Conducted Band Edges and Spurious Emission Measurement 17
3.5 Radiated Band Edges and Spurious Emission Measurement 30
3.6 AC Conducted Emission Measurement..... 34
3.7 Antenna Requirements 36
4 LIST OF MEASURING EQUIPMENT 37
5 UNCERTAINTY OF EVALUATION 38
APPENDIX A. CONDUCTED TEST RESULTS
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT
APPENDIX C. RADIATED SPURIOUS EMISSION
APPENDIX D. DUTY CYCLE PLOTS
APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.76 dB at 4824.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.96 dB at 0.513 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Solutions Inc
8000 W. Sunrise Blvd. Ft. Lauderdale FL 33322 United States Of America

1.2 Manufacturer

Motorola Solutions Malaysia Sdn. Bhd.
No. 2A, Medan Bayan Lepas, Mukim 12, S.W.D., 11900 Bayan Lepas, Penang, Malaysia

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WAVE TWO-WAY RADIO
Brand Name	Motorola Solutions
Model Name	TLK 100i
Model Number	HK2123A
FCC ID	AZ489FT7136
EUT supports Radios application	WCDMA/LTE/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR / EDR/ LE
IMEI Code	Conducted: 354124100003656 Conduction: 354124100003615 Radiation: 354124100003359
HW Version	P2.0
SW Version	BLUE_BASE_ENG_R03.01.03_APPS_R03.01.03
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 21.61 dBm (0.1449 W) 802.11g : 21.52 dBm (0.1419 W) 802.11n HT20 : 20.75 dBm (0.1189 W) 802.11n HT40 : 18.14 dBm (0.0652 W)
99% Occupied Bandwidth	802.11b : 13.59MHz 802.11g : 16.78MHz 802.11n HT20 : 17.83MHz 802.11n HT40 : 36.16MHz
Antenna Type / Gain	Internal FPC Antenna with gain 0.29 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		




2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + GNSS Rx + Earphone 4 + Adaptor 3
Remark: For Radiated Test Cases, The tests were performance standalone.	

2.3 Connection Diagram of Test System

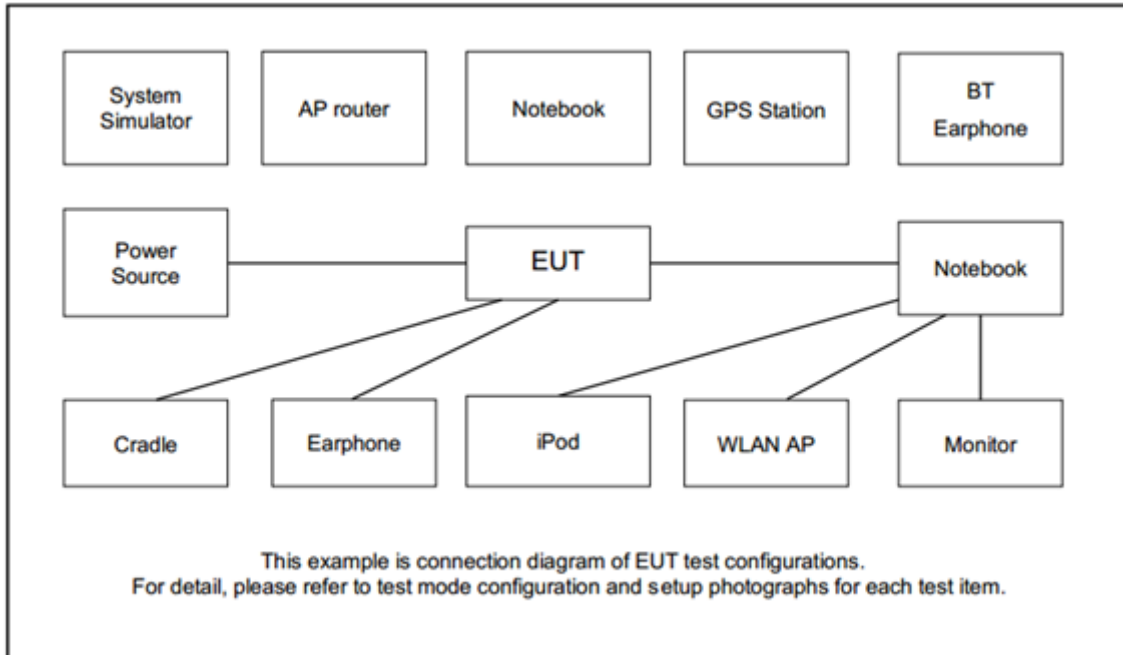

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

Offset(dB) = RF cable loss(dB).
= 5.5 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

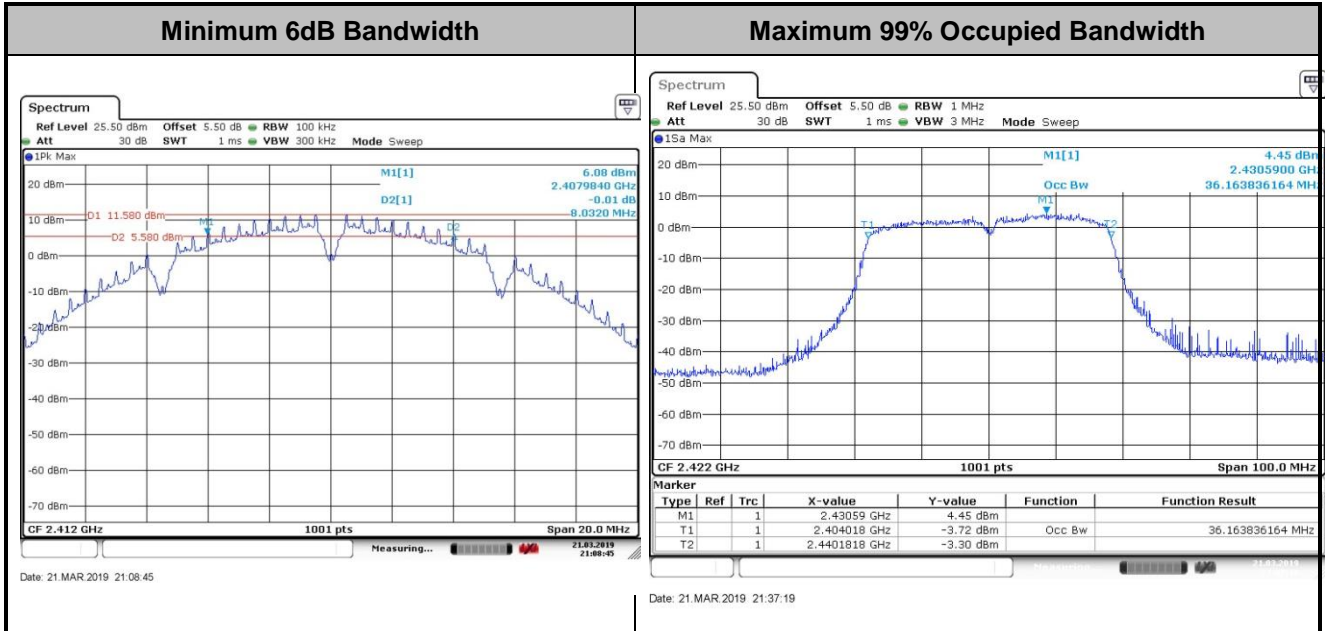

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

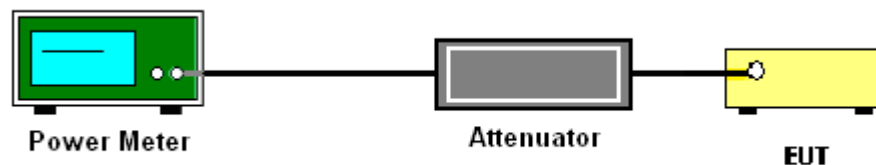

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

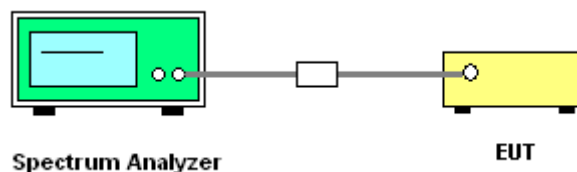



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

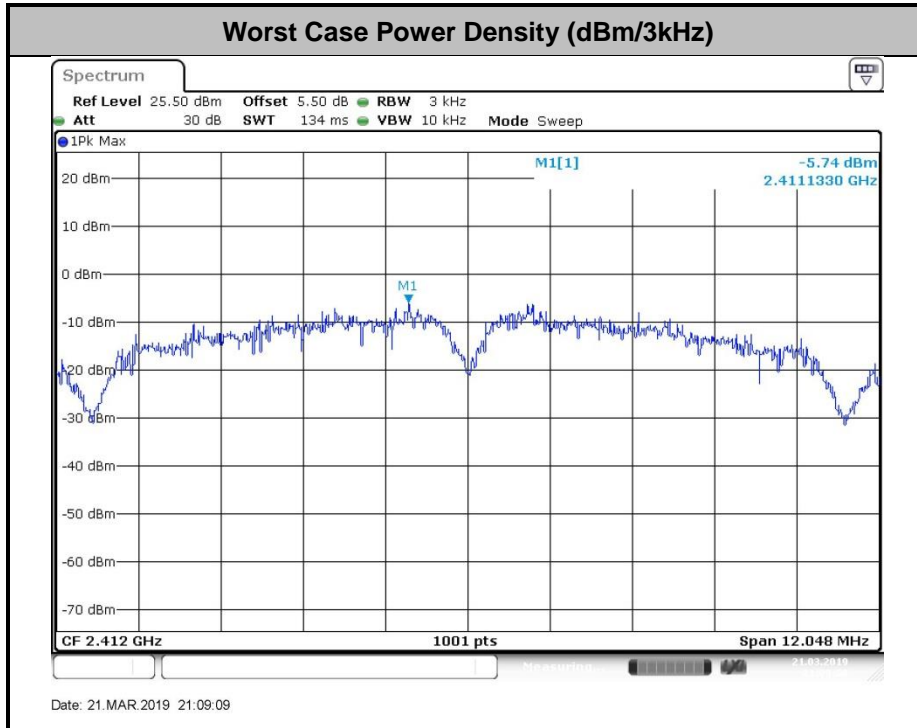

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup


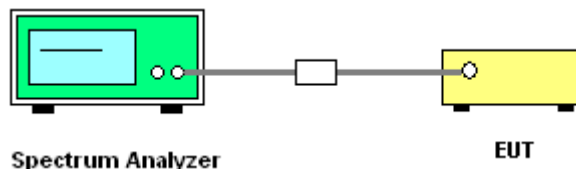




3.4.5 Test Result of Conducted Band Edges and Spurious Emission




Test Engineer : Lion Ran	Temperature :	21~25°C
	Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

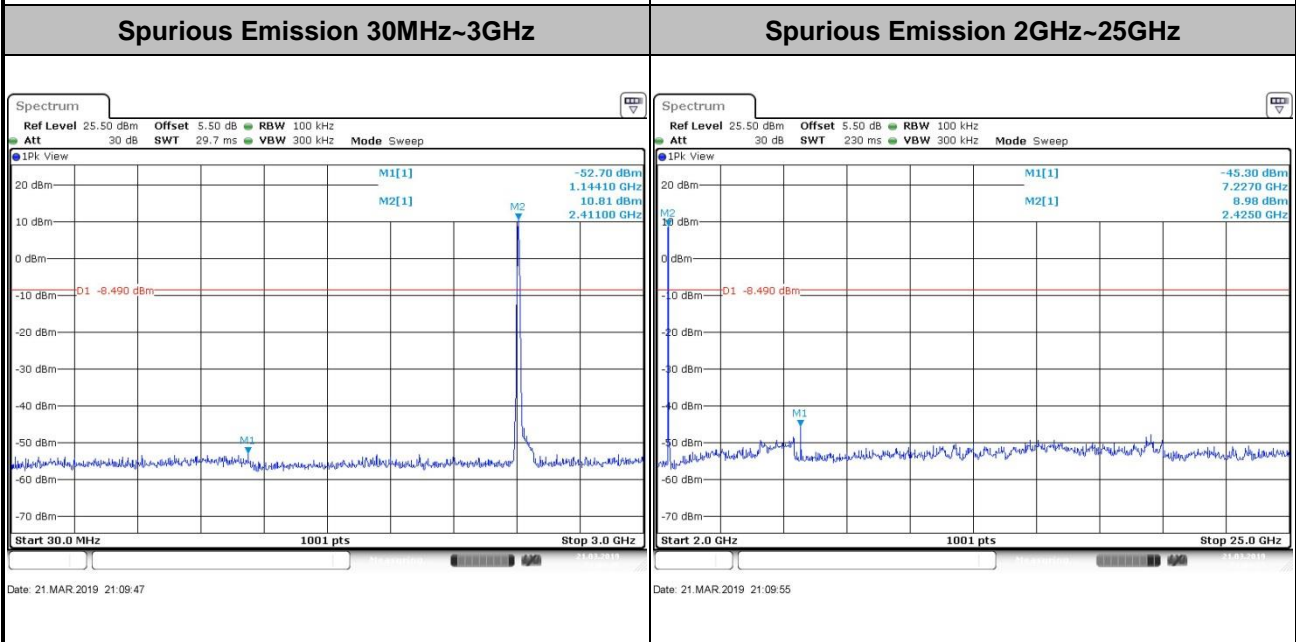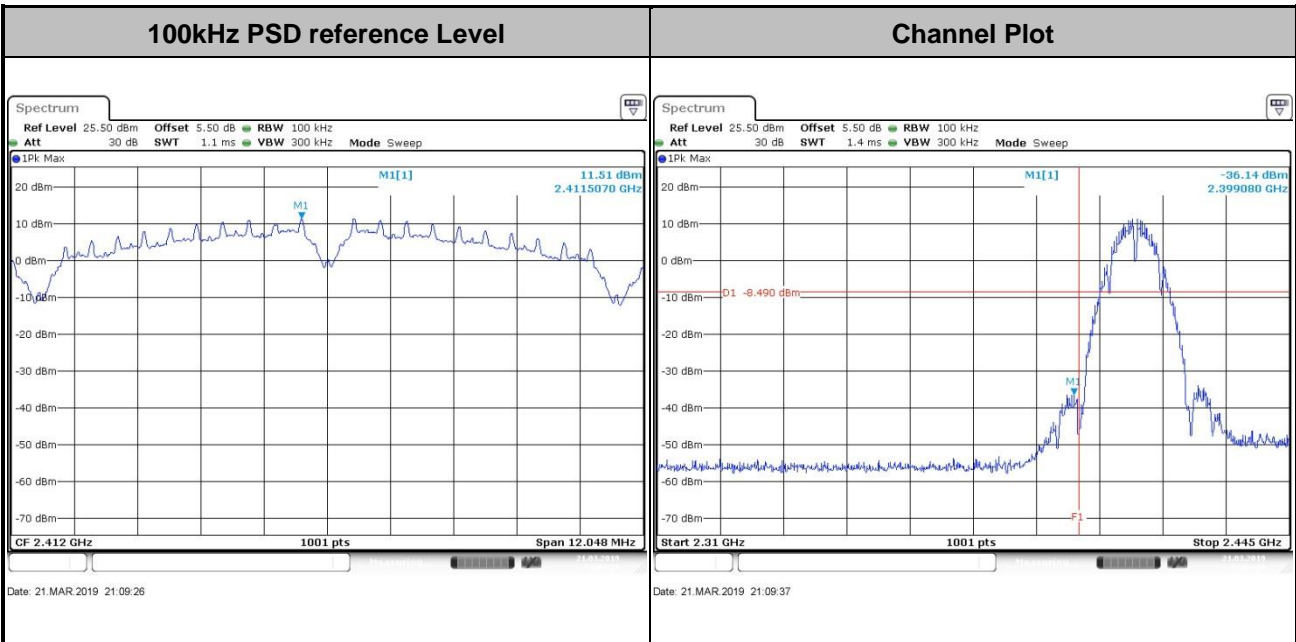





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

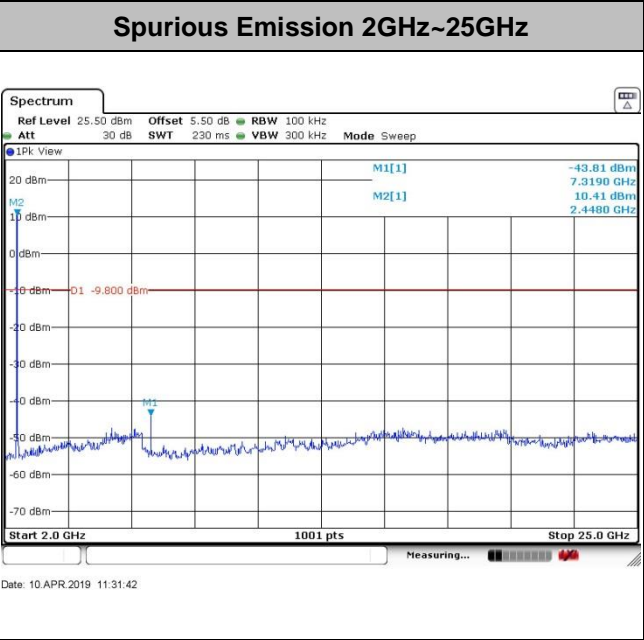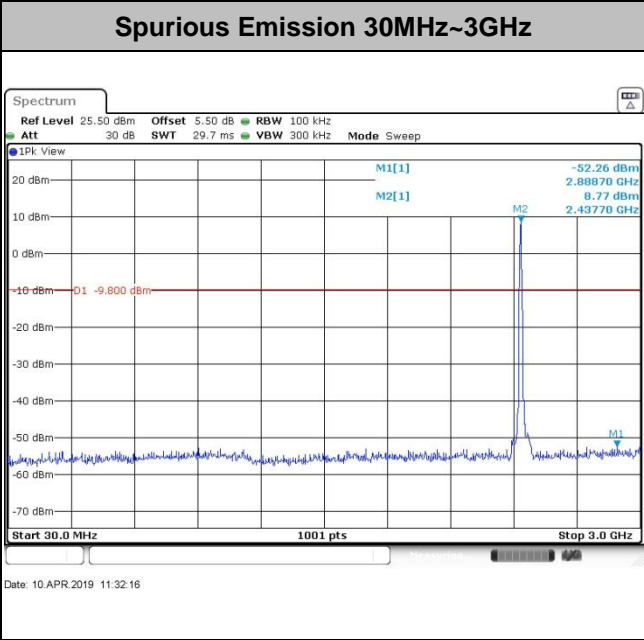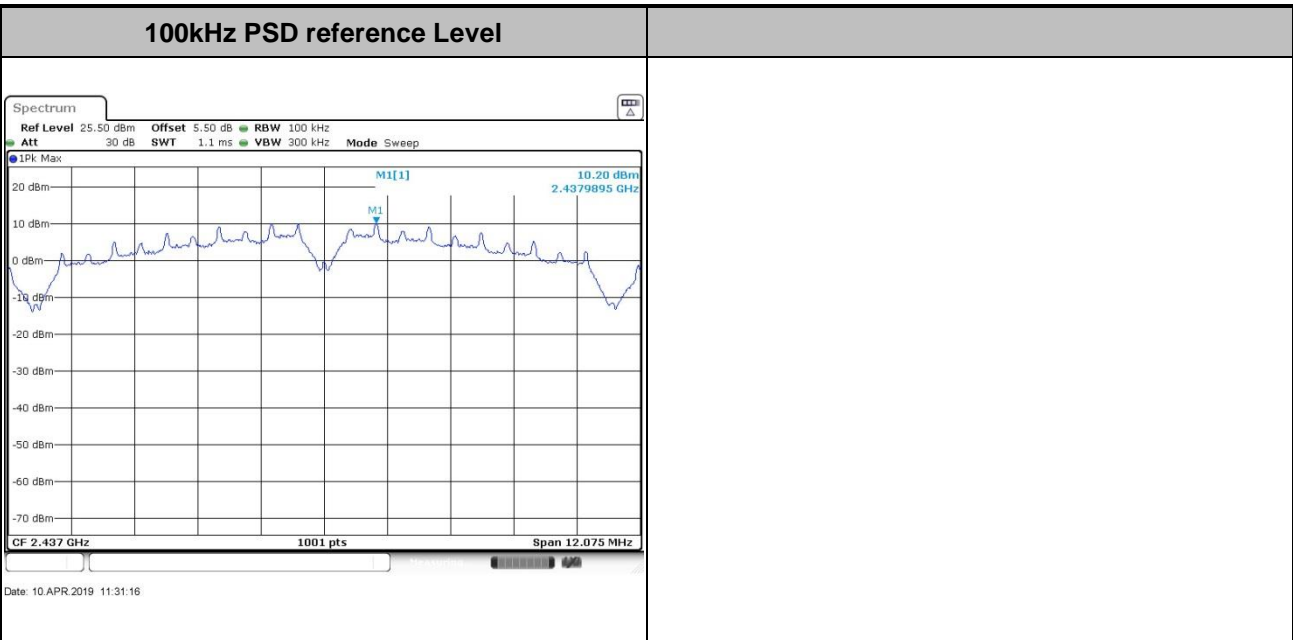





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

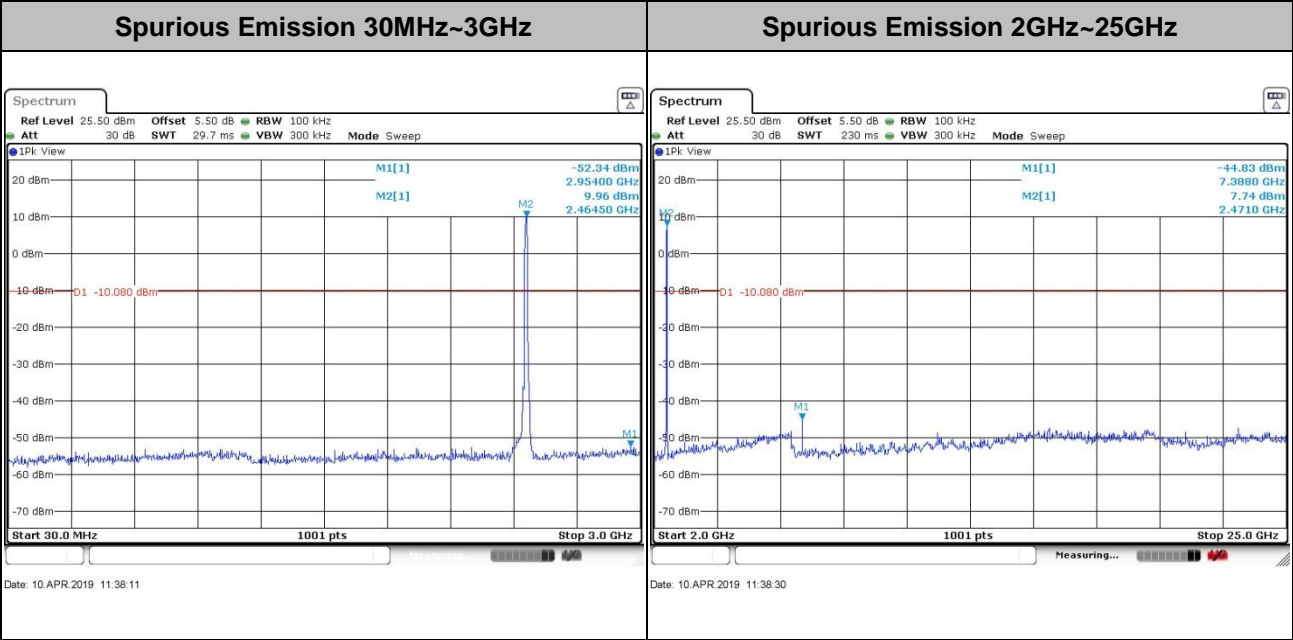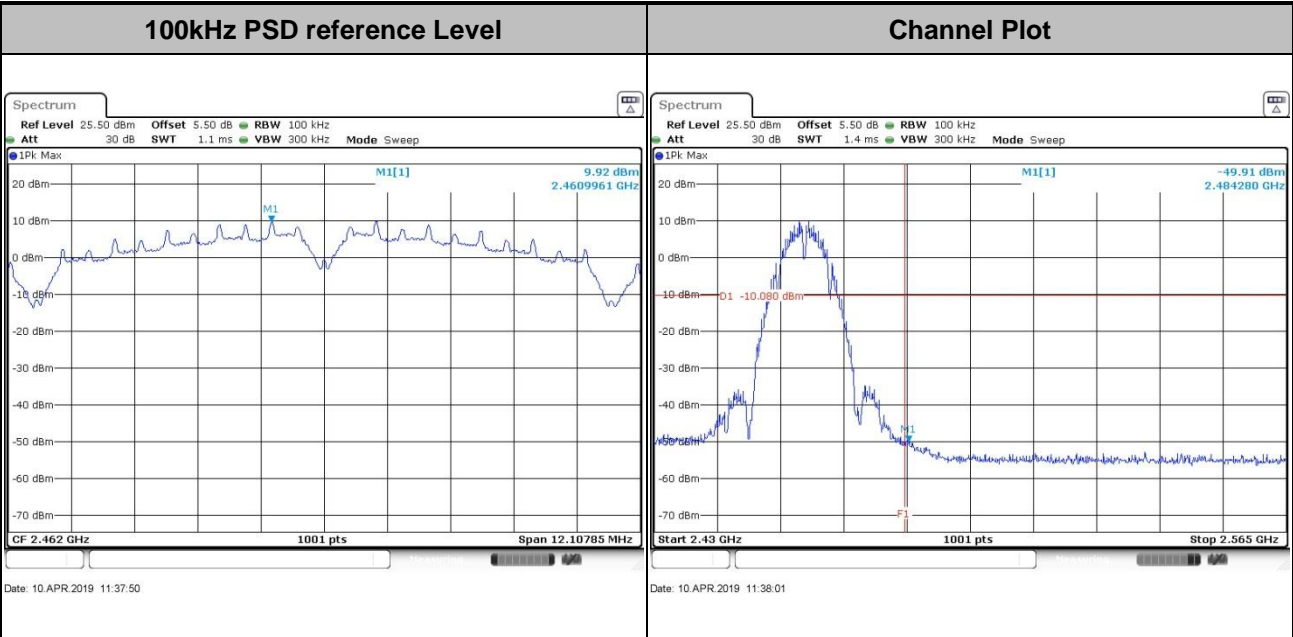






Test Mode : 802.11g Test Channel : 01

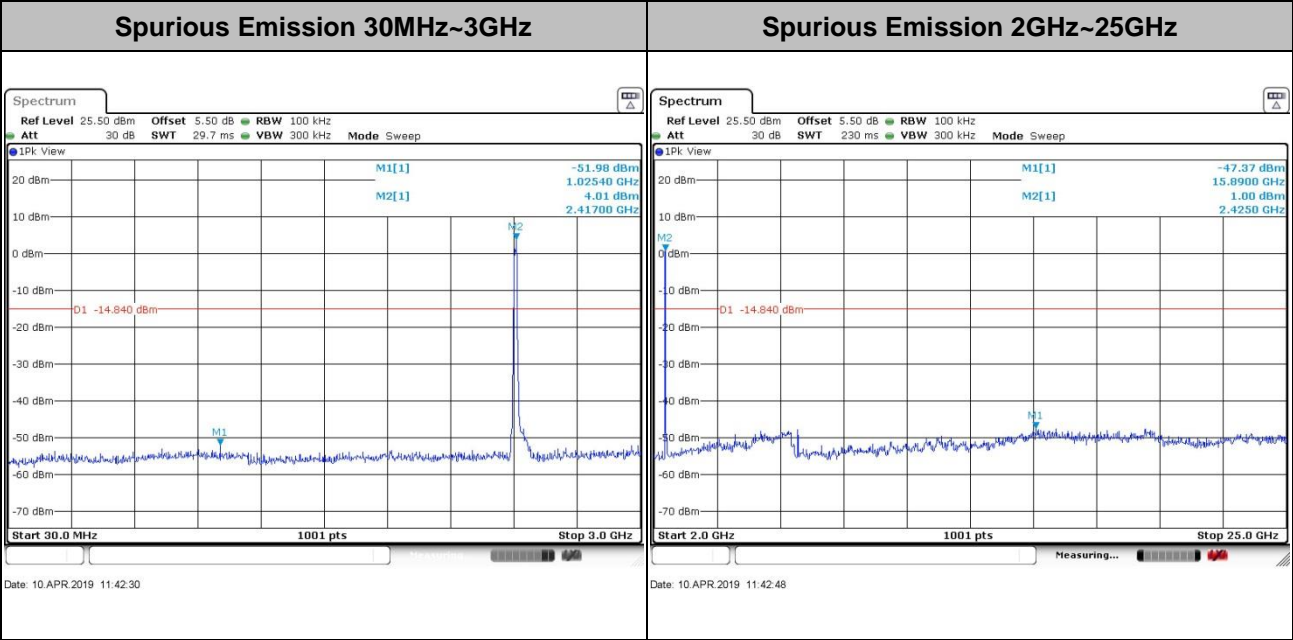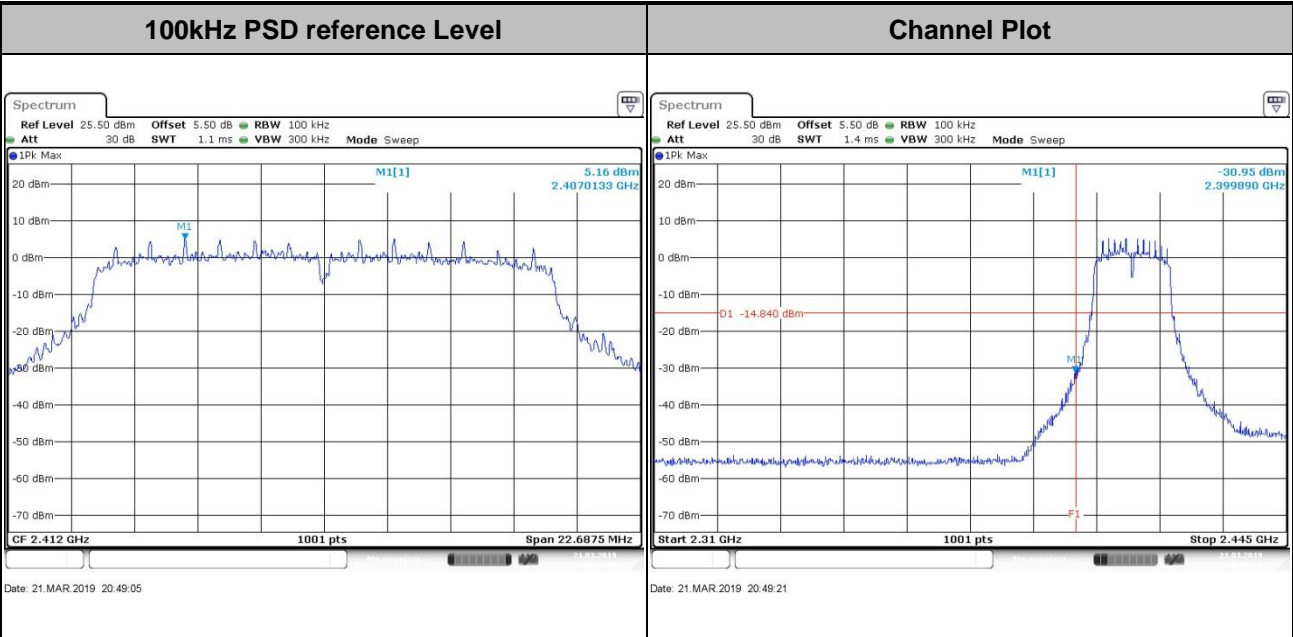





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

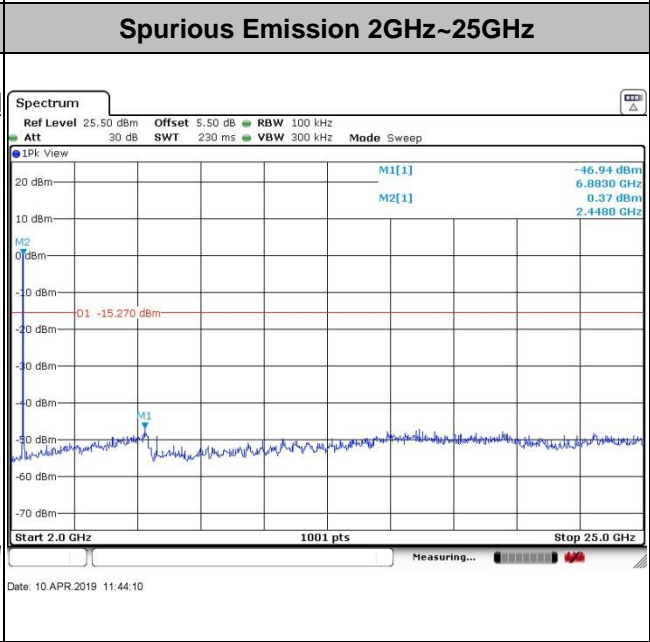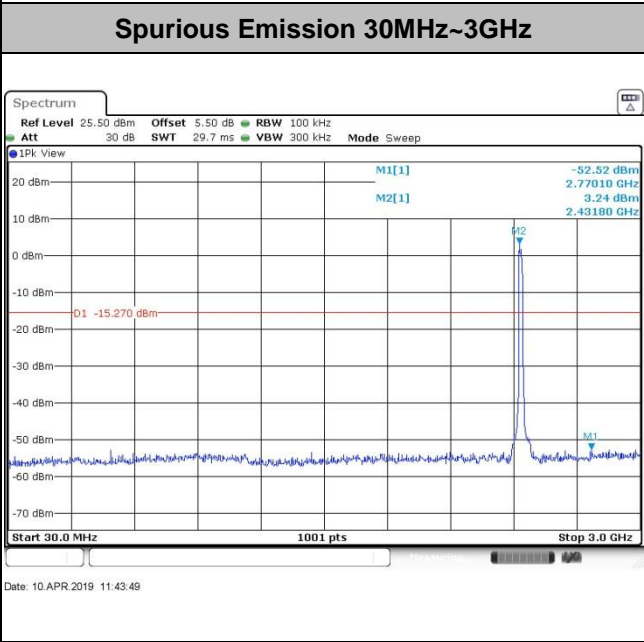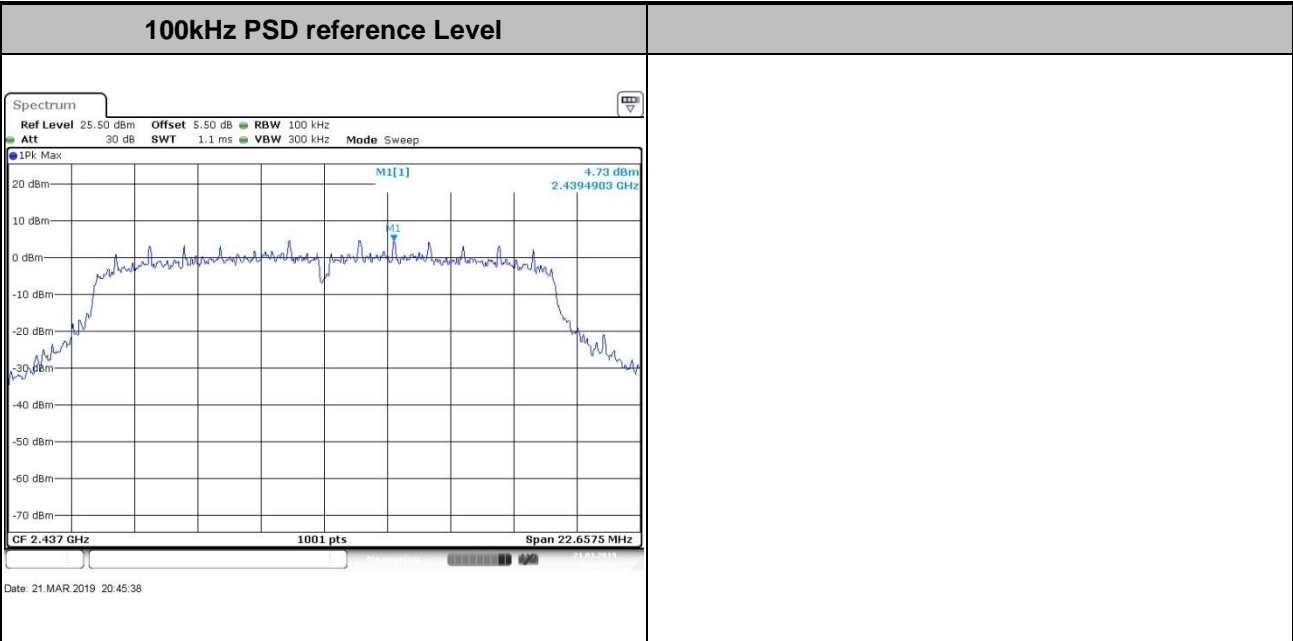





Test Mode : 802.11g Test Channel : 11

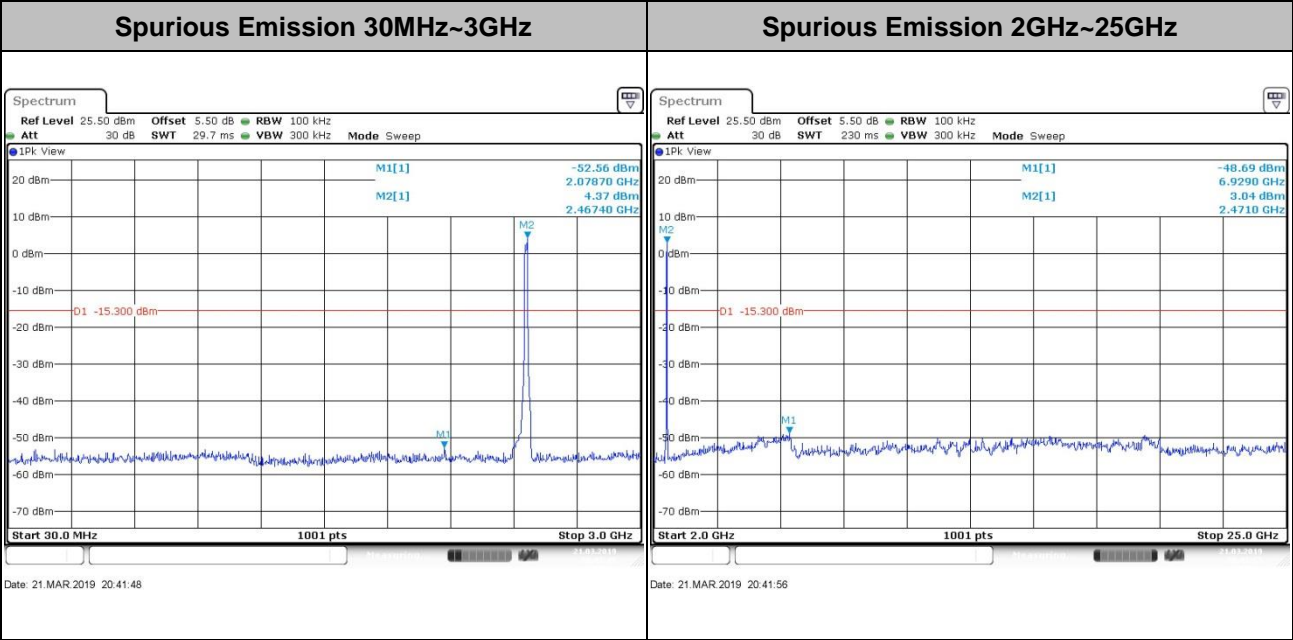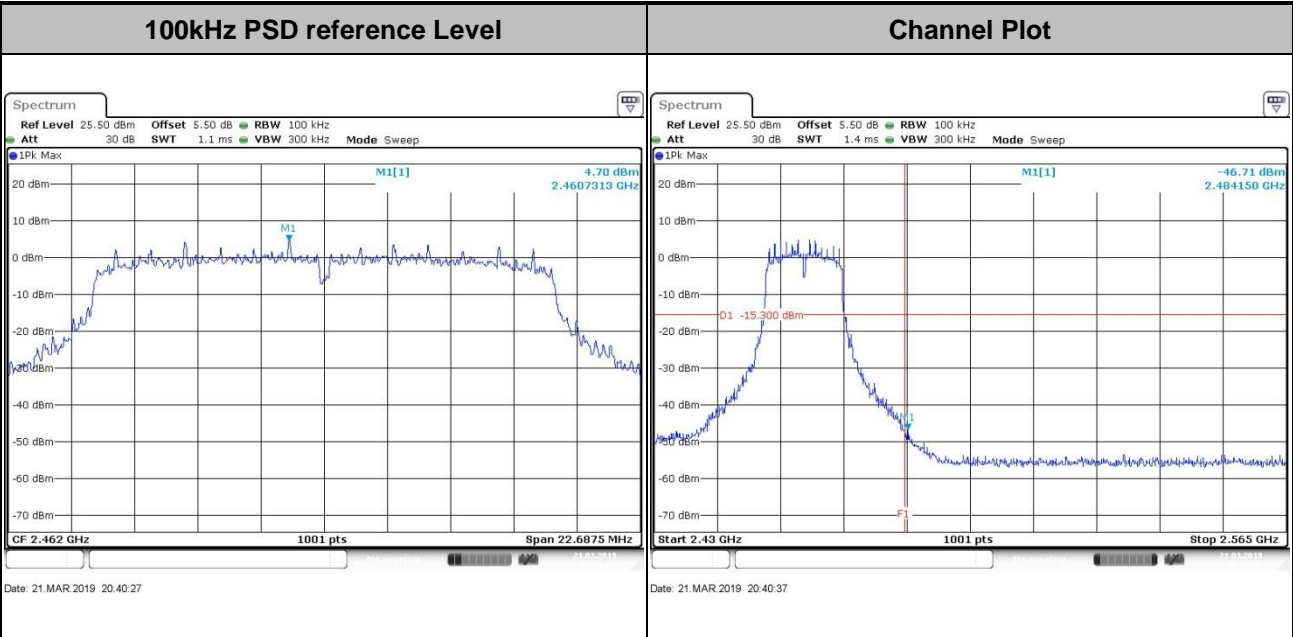






Test Mode : 802.11n HT20 Test Channel : 01

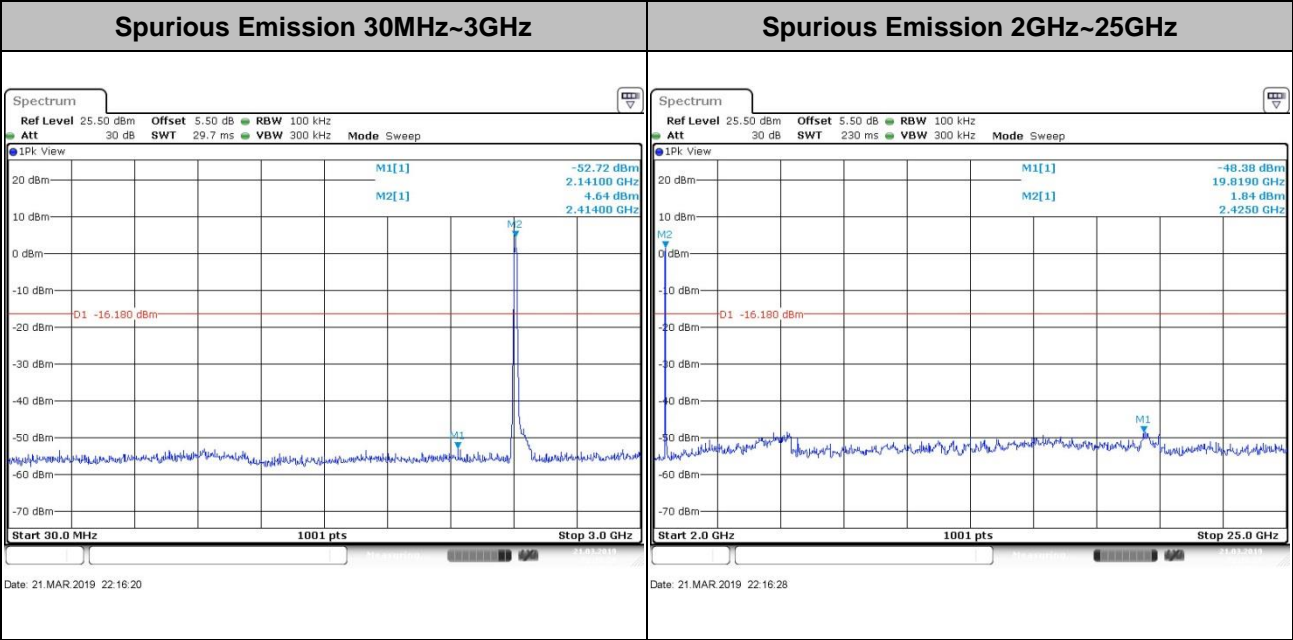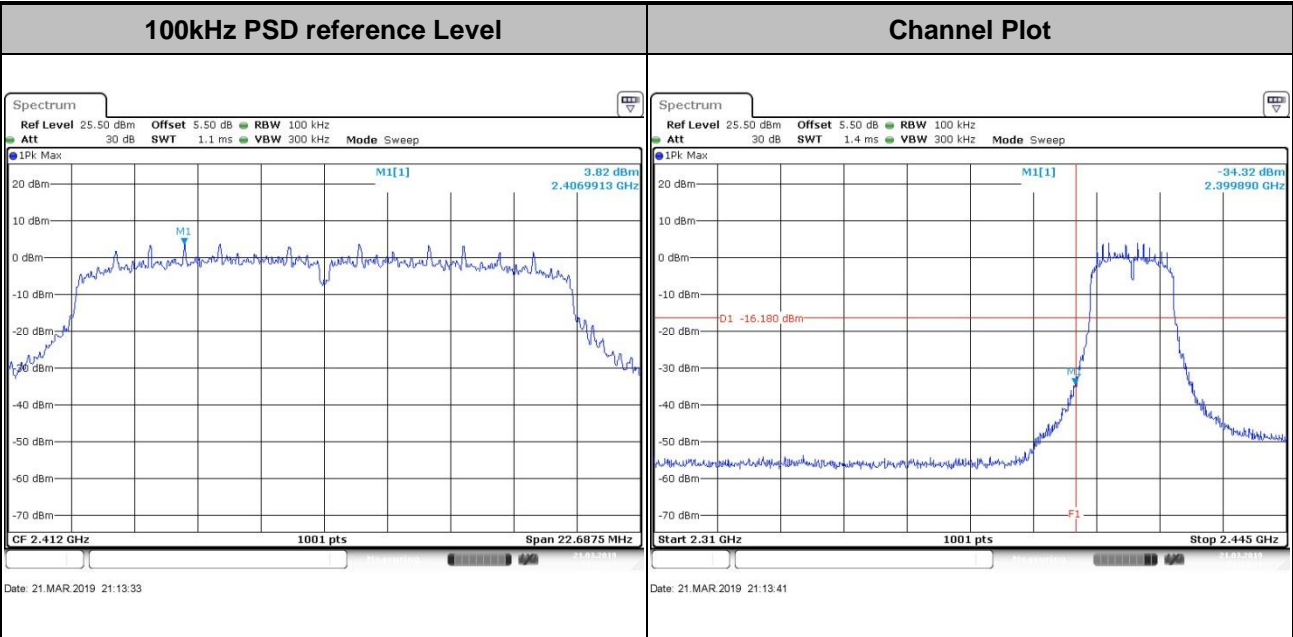





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

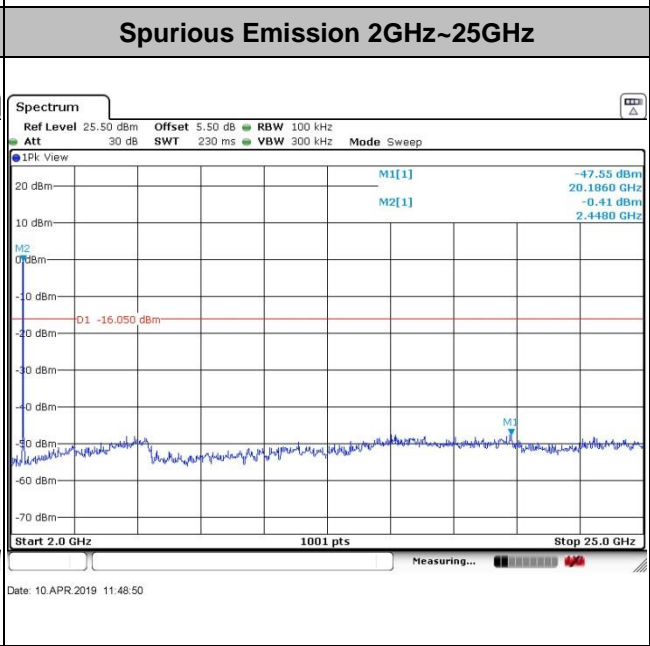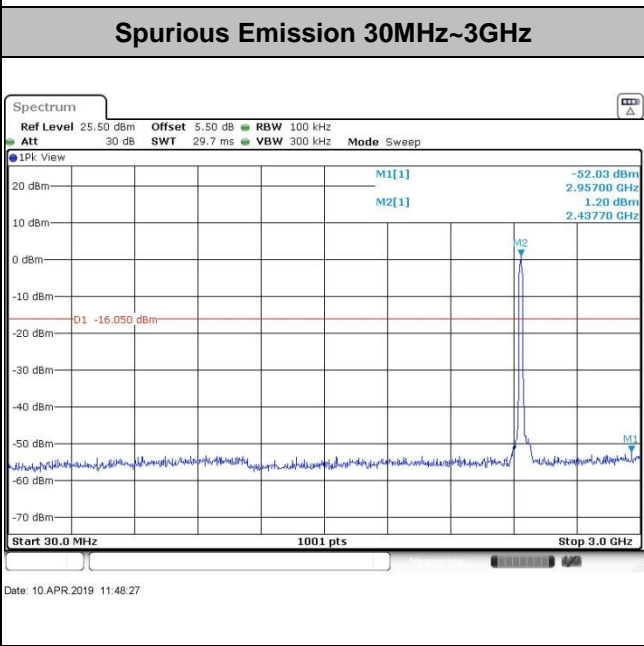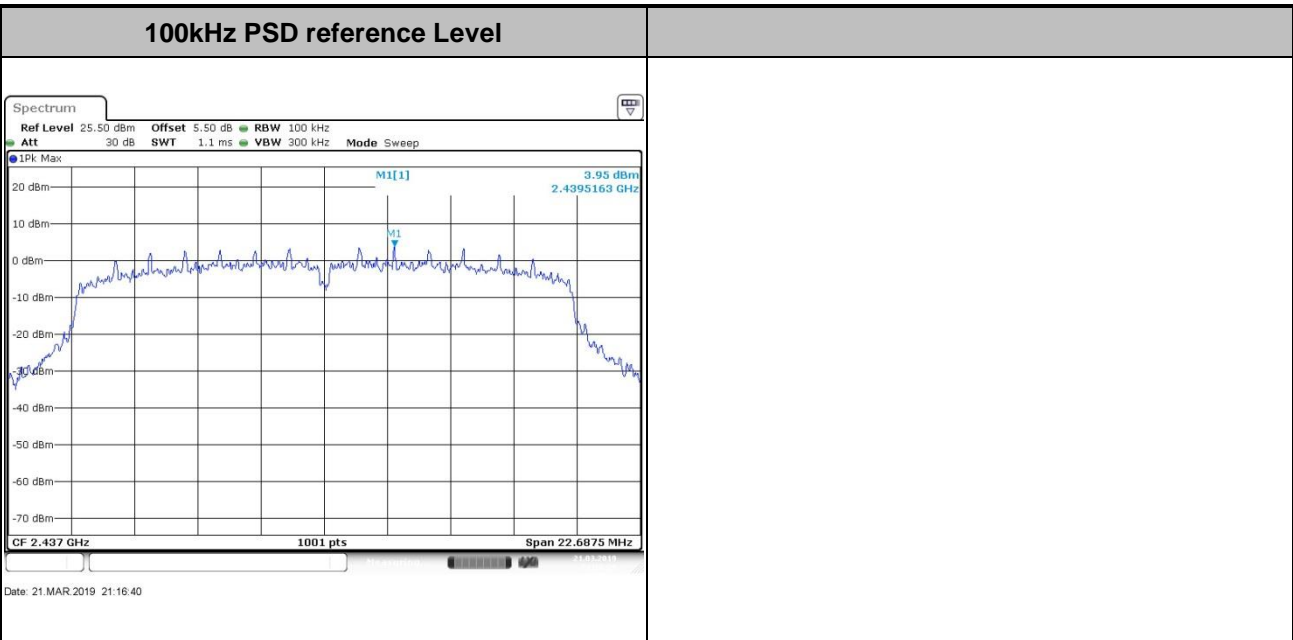





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

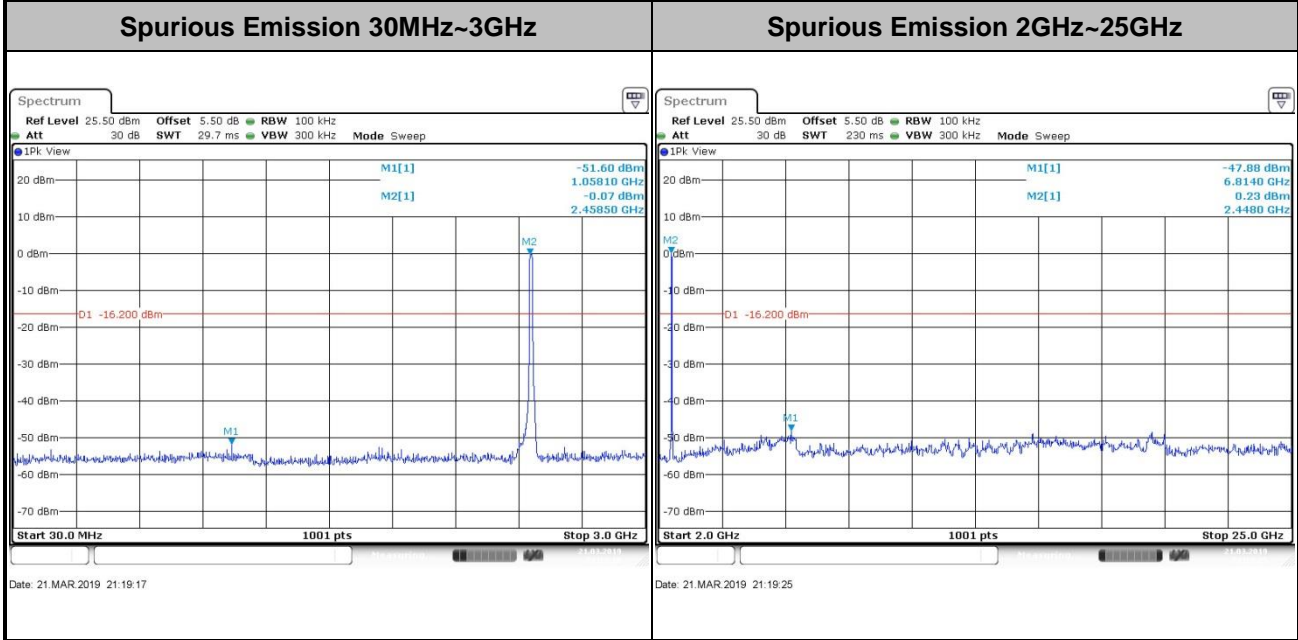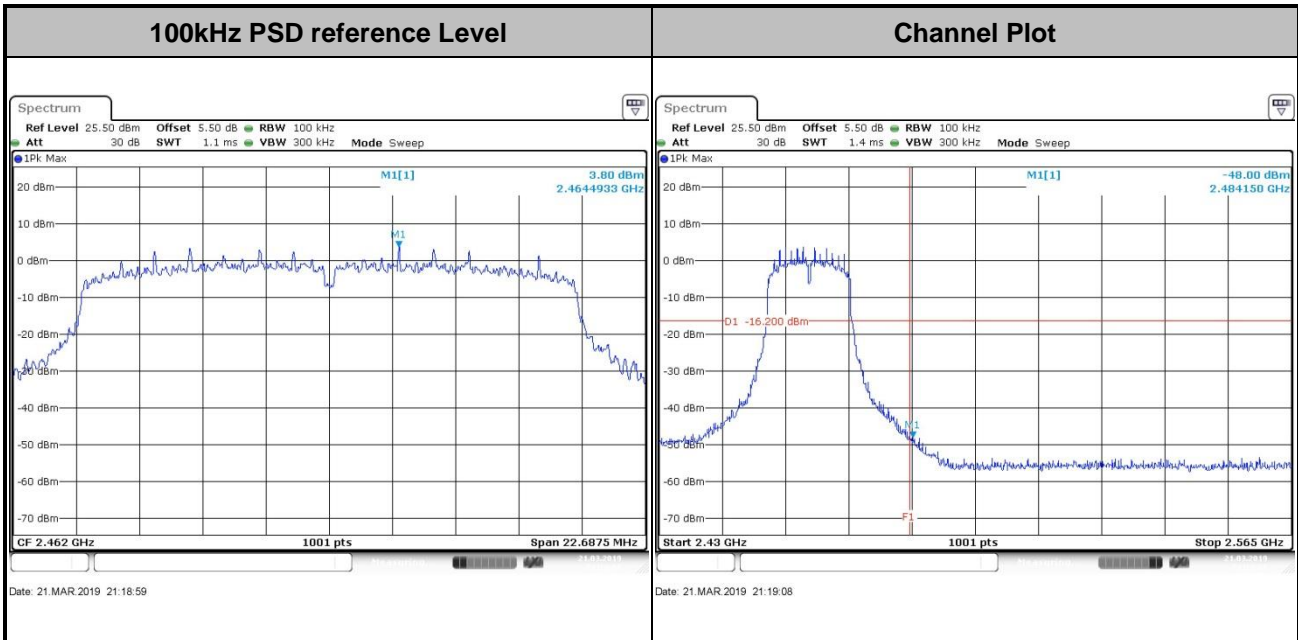






Test Mode : 802.11n HT40 Test Channel : 03

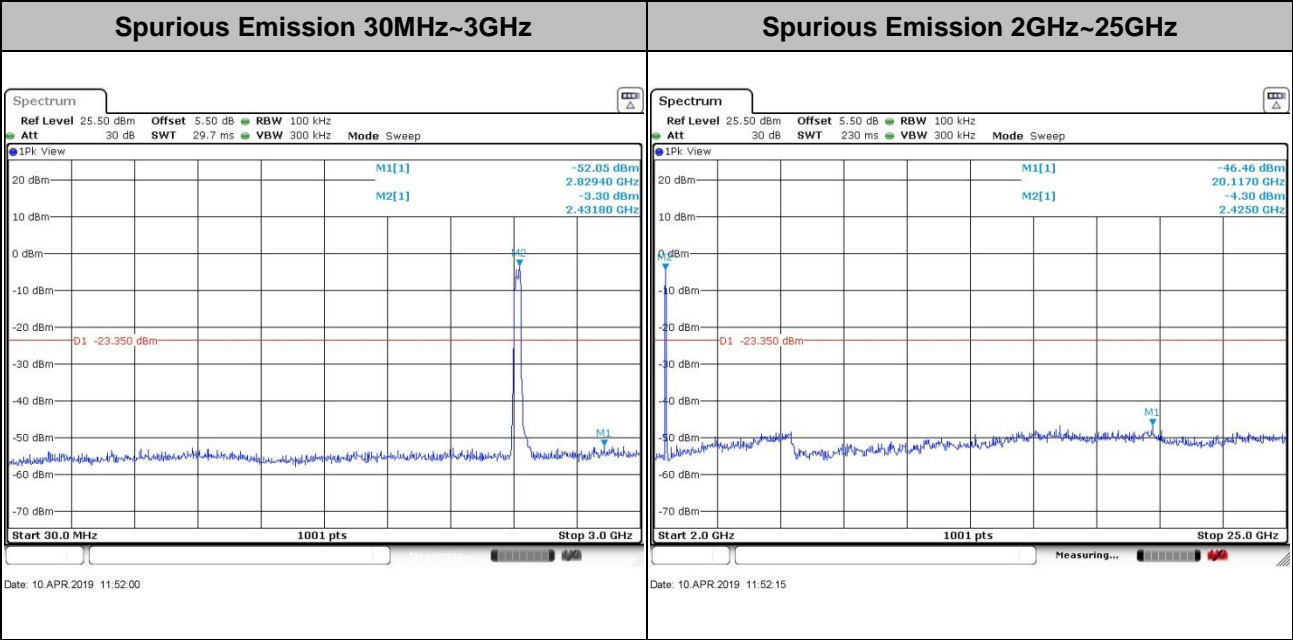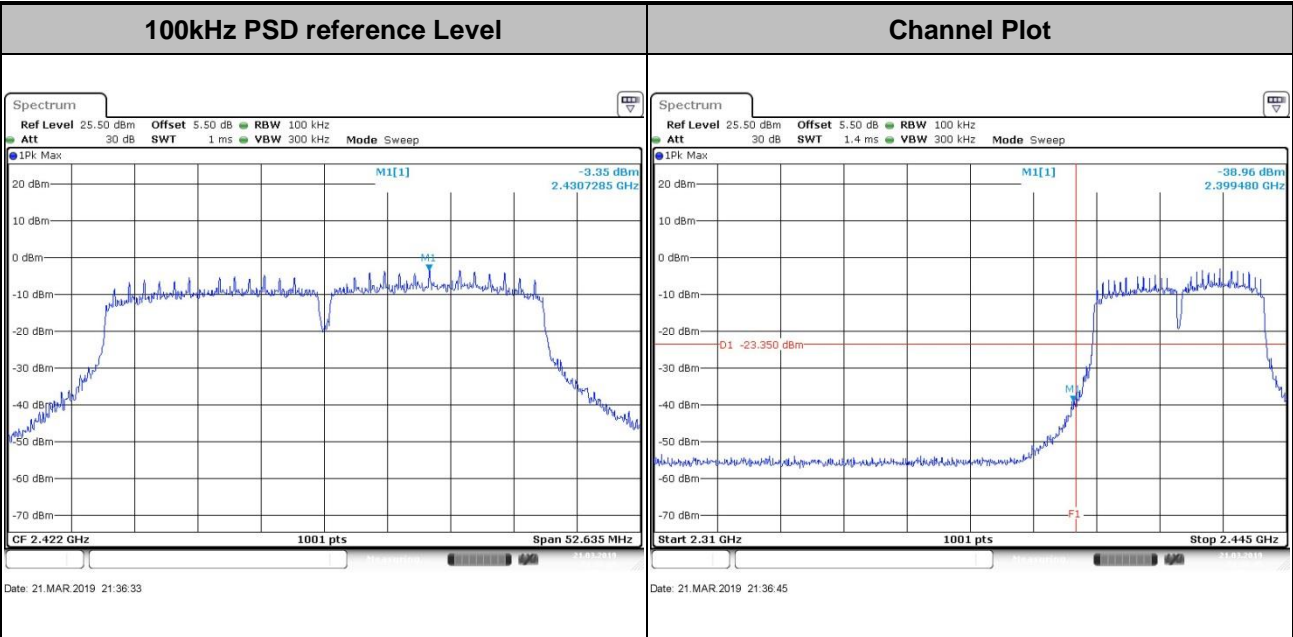





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

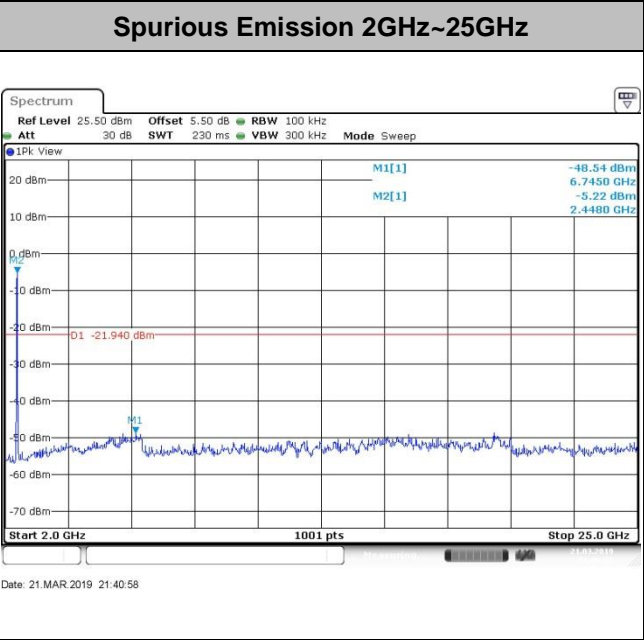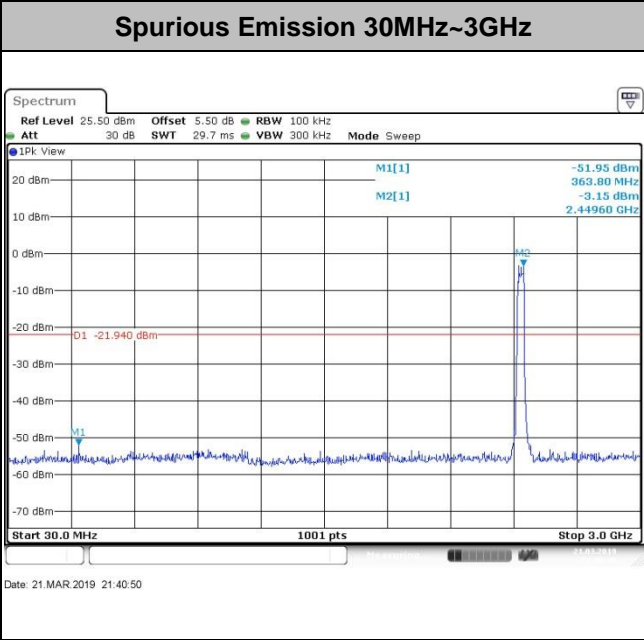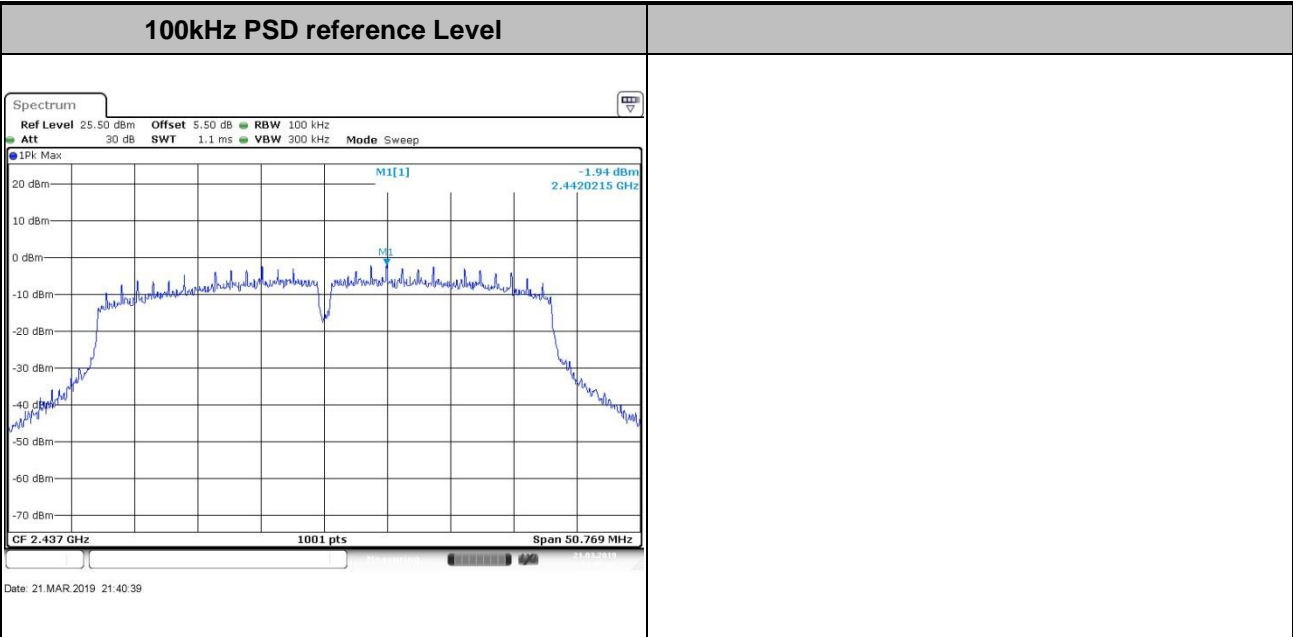



Test Mode : 802.11n HT40 Test Channel : 09

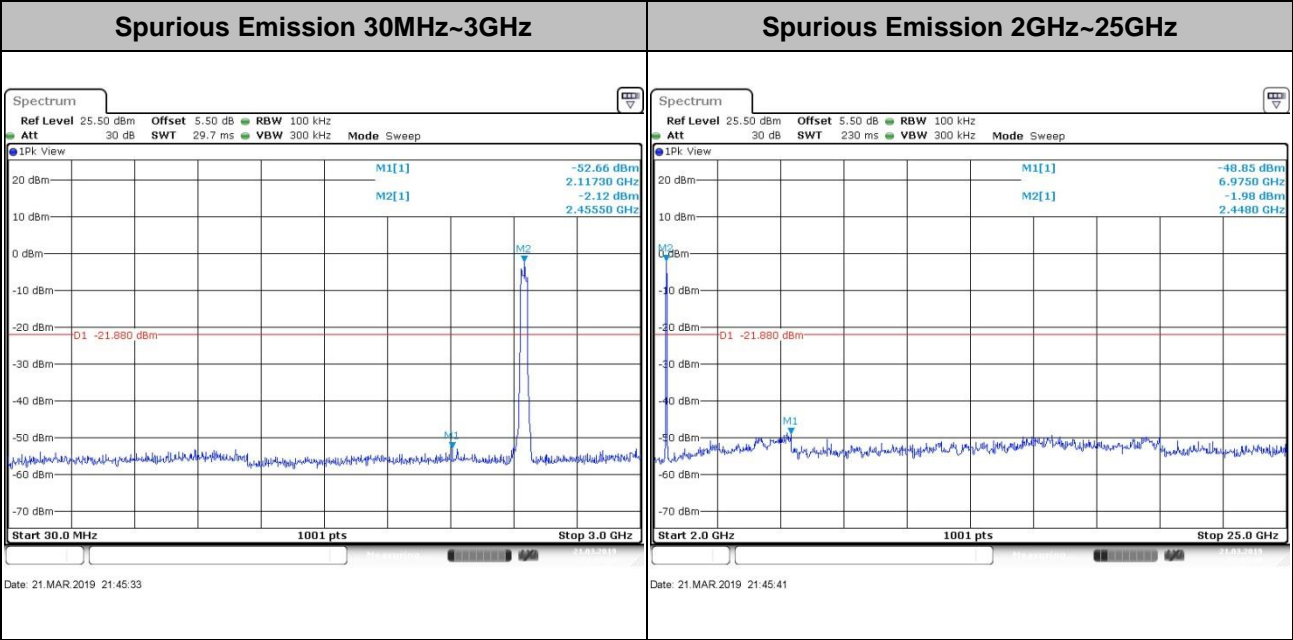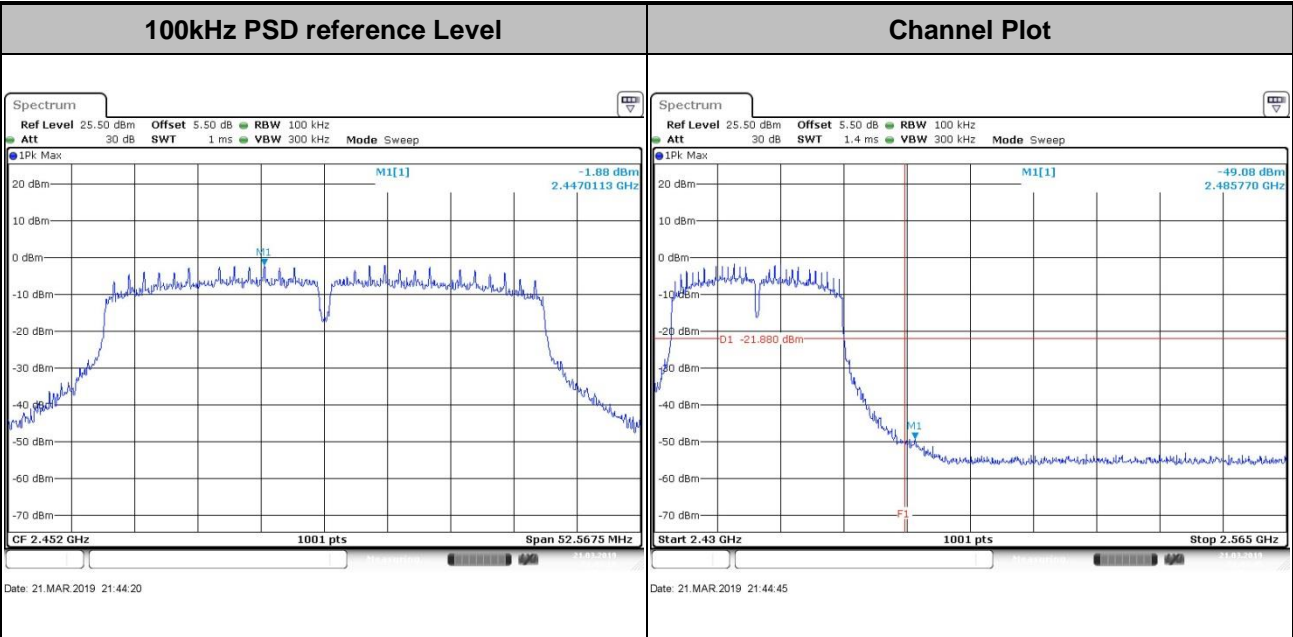



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

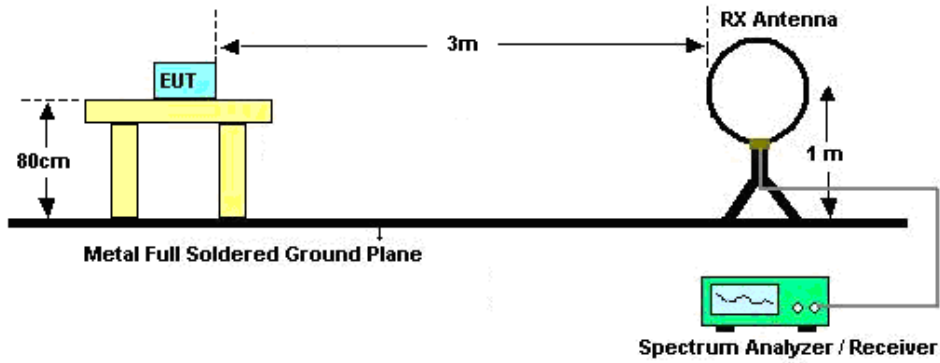

For radiated emissions from 30MHz to 1GHz

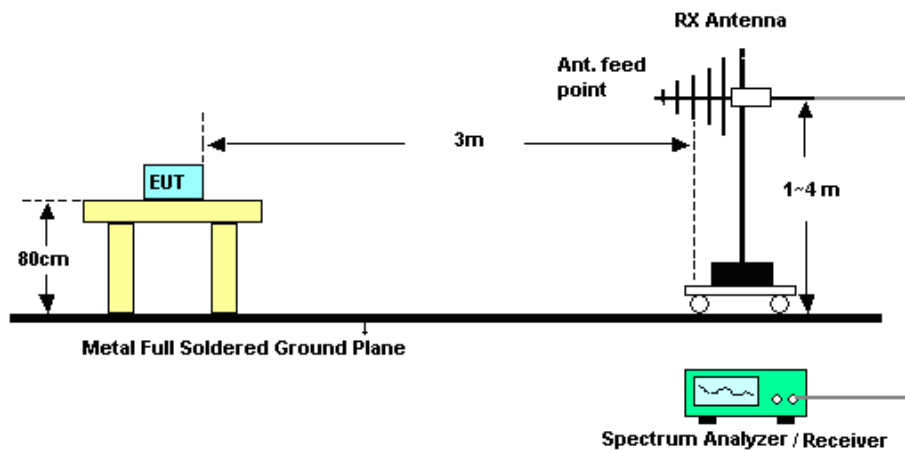

For radiated emissions above 1GHz

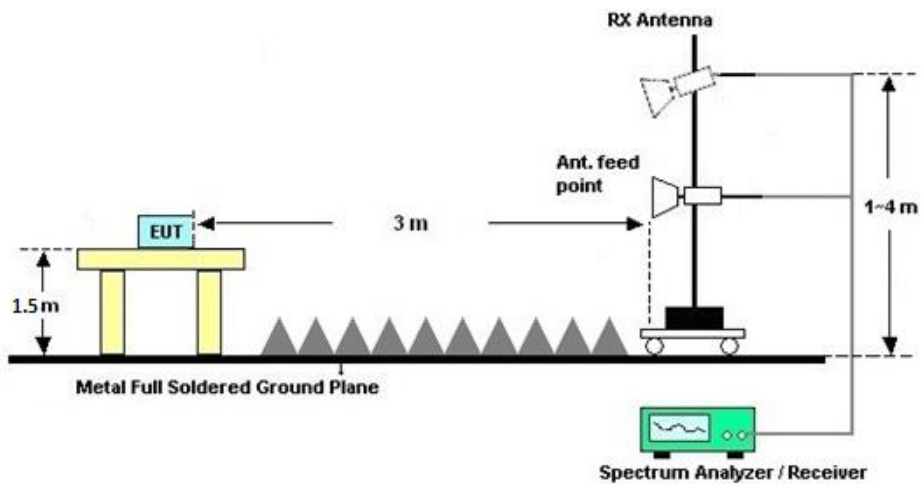



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Mar. 21, 2019~ Apr. 10, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Mar. 21, 2019~ Apr. 10, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Mar. 21, 2019~ Apr. 10, 2019	Jan. 13, 2020	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS001	30MHz~40GHz	Jun. 21, 2018	Mar. 21, 2019~ Apr. 10, 2019	Jun. 20, 2019	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS002	30MHz~40GHz	Jun. 21, 2018	Mar. 21, 2019~ Apr. 10, 2019	Jun. 20, 2019	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS003	30MHz~40GHz	Jun. 21, 2018	Mar. 21, 2019~ Apr. 10, 2019	Jun. 20, 2019	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jun. 25, 2018	Apr. 15, 2019	Jun. 24, 2019	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 17, 2018	Apr. 15, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Apr. 15, 2019	Oct. 18, 2019	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 12, 2018	Apr. 15, 2019	Jun. 11, 2019	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 27, 2019	Apr. 15, 2019	Jan. 26, 2020	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Apr. 15, 2019	Jan. 04, 2020	Radiation (03CH05-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 17, 2018	Apr. 15, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	Apr. 15, 2019	Jan. 13, 2020	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Apr. 15, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Apr. 18, 2018	Apr. 15, 2019	Apr. 17, 2019	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 15, 2019	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 15, 2019	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 15, 2019	NCR	Radiation (03CH05-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX1 26E	03CH06KS001	30Mhz-18Ghz	Jul. 10, 2018	Apr. 15, 2019	Jul. 09, 2019	Radiation (03CH05-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX1 26E	03CH06KS002	30Mhz-18Ghz	Jul. 10, 2018	Apr. 15, 2019	Jul. 09, 2019	Radiation (03CH05-KS)
Low Pass Filter	Wainwright Instruments GmbH	WLK4-1000-1 530-8000-40S S	2	1G Low Pass	Jun. 19, 2018	Apr. 15, 2019	Jun. 18, 2019	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 19, 2018	Apr. 02, 2019	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Apr. 02, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Apr. 02, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Apr. 02, 2019	Oct. 11, 2019	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q3N1	150kHz~30MHz	Aug. 24 2018	Apr. 02, 2019	Aug. 23, 2019	Conduction (CO01-KS)
Transient limiter	COM-POWER	LIT-153	531040	150kHz~30MHz	Aug. 24, 2018	Apr. 02, 2019	Aug. 23, 2019	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Lion Ran	Temperature:	21~25	°C
Test Date:	2019/3/21~2019/4/10	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.59	8.03	0.50	Pass
11b	1Mbps	1	6	2437	13.24	8.05	0.50	Pass
11b	1Mbps	1	11	2462	13.49	8.07	0.50	Pass
11g	6Mbps	1	1	2412	16.78	15.13	0.50	Pass
11g	6Mbps	1	6	2437	16.68	15.11	0.50	Pass
11g	6Mbps	1	11	2462	16.78	15.13	0.50	Pass
HT20	MCS0	1	1	2412	17.78	15.13	0.50	Pass
HT20	MCS0	1	6	2437	17.68	15.13	0.50	Pass
HT20	MCS0	1	11	2462	17.83	15.13	0.50	Pass
HT40	MCS0	1	3	2422	36.16	35.09	0.50	Pass
HT40	MCS0	1	6	2437	35.76	33.85	0.50	Pass
HT40	MCS0	1	9	2452	35.96	35.05	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	21.61	30.00	0.29	21.90	36.00	Pass
11b	1Mbps	1	6	2437	20.92	30.00	0.29	21.21	36.00	Pass
11b	1Mbps	1	11	2462	20.71	30.00	0.29	21.00	36.00	Pass
11g	6Mbps	1	1	2412	21.52	30.00	0.29	21.81	36.00	Pass
11g	6Mbps	1	6	2437	20.93	30.00	0.29	21.22	36.00	Pass
11g	6Mbps	1	11	2462	20.76	30.00	0.29	21.05	36.00	Pass
HT20	MCS0	1	1	2412	20.75	30.00	0.29	21.04	36.00	Pass
HT20	MCS0	1	6	2437	20.31	30.00	0.29	20.60	36.00	Pass
HT20	MCS0	1	11	2462	20.19	30.00	0.29	20.48	36.00	Pass
HT40	MCS0	1	3	2422	17.36	30.00	0.29	17.65	36.00	Pass
HT40	MCS0	1	6	2437	18.14	30.00	0.29	18.43	36.00	Pass
HT40	MCS0	1	9	2452	18.12	30.00	0.29	18.41	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	19.03
11b	1Mbps	1	6	2437	0.00	18.11
11b	1Mbps	1	11	2462	0.00	18.08
11g	6Mbps	1	1	2412	0.22	15.33
11g	6Mbps	1	6	2437	0.22	14.76
11g	6Mbps	1	11	2462	0.22	14.73
HT20	MCS0	1	1	2412	0.32	14.21
HT20	MCS0	1	6	2437	0.32	13.66
HT20	MCS0	1	11	2462	0.32	13.56
HT40	MCS0	1	3	2422	0.56	10.52
HT40	MCS0	1	6	2437	0.56	10.75
HT40	MCS0	1	9	2452	0.56	11.15


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-5.75	0.29	8.00	Pass
11b	1Mbps	1	6	2437	-5.87	0.29	8.00	Pass
11b	1Mbps	1	11	2462	-9.02	0.29	8.00	Pass
11g	6Mbps	1	1	2412	-8.85	0.29	8.00	Pass
11g	6Mbps	1	6	2437	-9.60	0.29	8.00	Pass
11g	6Mbps	1	11	2462	-9.56	0.29	8.00	Pass
HT20	MCS0	1	1	2412	-10.26	0.29	8.00	Pass
HT20	MCS0	1	6	2437	-11.56	0.29	8.00	Pass
HT20	MCS0	1	11	2462	-12.34	0.29	8.00	Pass
HT40	MCS0	1	3	2422	-19.07	0.29	8.00	Pass
HT40	MCS0	1	6	2437	-18.22	0.29	8.00	Pass
HT40	MCS0	1	9	2452	-18.29	0.29	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	23.6~24.2°C
		Relative Humidity :	31~33%
Test Voltage :	120Vac / 60Hz	Phase :	Line

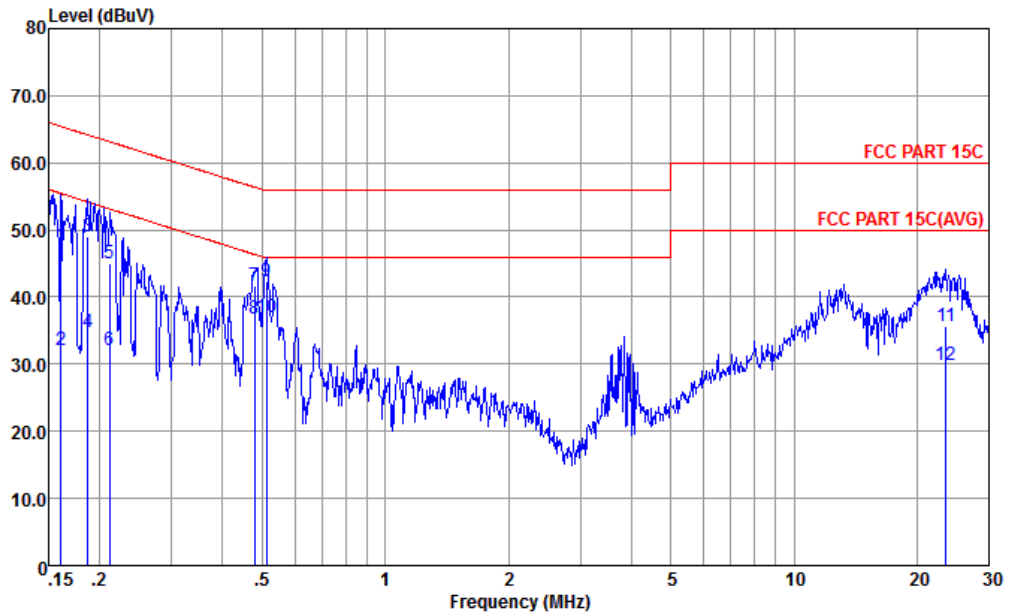


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-181119-060105 LINE
 mode : Mode 1
 : 354124100003615 #24

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.161	47.75	-17.68	65.43	37.20	0.10	10.45	QP
2	0.161	32.15	-23.28	55.43	21.60	0.10	10.45	Average
3	0.187	49.10	-15.05	64.15	38.60	0.11	10.39	QP
4	0.187	34.80	-19.35	54.15	24.30	0.11	10.39	Average
5	0.212	45.08	-18.06	63.14	34.60	0.12	10.36	QP
6	0.212	32.08	-21.06	53.14	21.60	0.12	10.36	Average
7	0.479	41.61	-14.75	56.36	31.20	0.17	10.24	QP
8	0.479	36.71	-9.65	46.36	26.30	0.17	10.24	Average
9	0.513	42.31	-13.69	56.00	31.90	0.17	10.24	QP
10 *	0.513	37.04	-8.96	46.00	26.63	0.17	10.24	Average
11	23.511	35.56	-24.44	60.00	24.20	0.81	10.55	QP
12	23.511	29.96	-20.04	50.00	18.60	0.81	10.55	Average



Test Engineer :	Amos Zhang	Temperature :	23.6~24.2°C
		Relative Humidity :	31~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

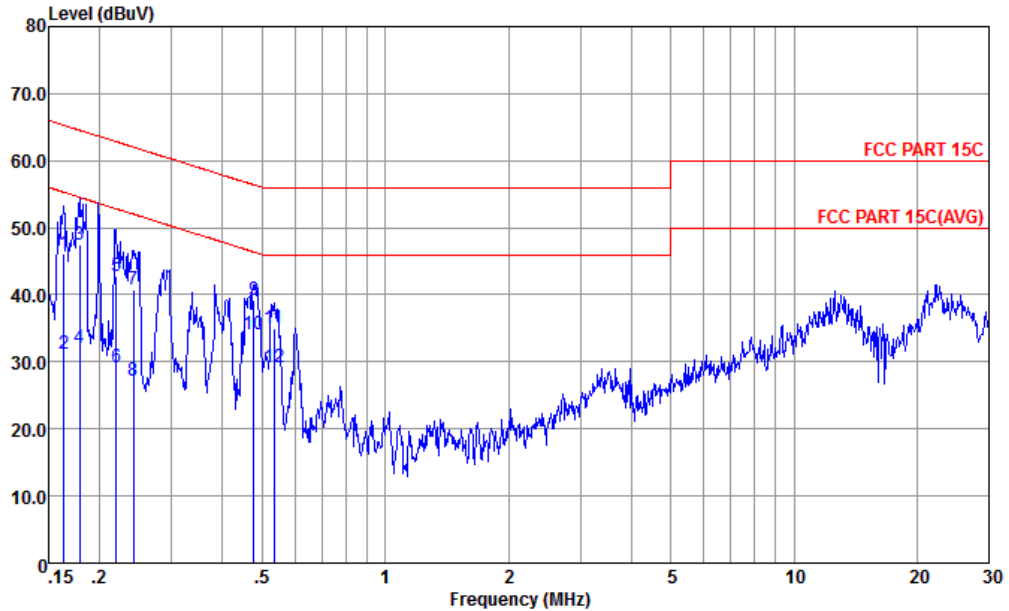

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-181119-060105 NEUTRAL

mode : Mode 1
 : 354124100003615 #24

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.163	46.12	-19.18	65.30	35.49	0.18	10.45	QP
2	0.163	31.22	-24.08	55.30	20.59	0.18	10.45	Average
3	0.179	47.39	-17.16	64.55	36.80	0.18	10.41	QP
4	0.179	32.19	-22.36	54.55	21.60	0.18	10.41	Average
5	0.220	42.72	-20.11	62.83	32.20	0.17	10.35	QP
6	0.220	29.12	-23.71	52.83	18.60	0.17	10.35	Average
7	0.242	40.80	-21.24	62.04	30.29	0.17	10.34	QP
8	0.242	27.10	-24.94	52.04	16.59	0.17	10.34	Average
9	0.476	39.29	-17.12	56.41	28.90	0.15	10.24	QP
10 *	0.476	33.99	-12.42	46.41	23.60	0.15	10.24	Average
11	0.535	34.88	-21.12	56.00	24.49	0.15	10.24	QP
12	0.535	29.28	-16.72	46.00	18.89	0.15	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.43	54.93	-19.07	74	51.99	32	5.48	34.54	374	162	P	H
		2389.95	44.41	-9.59	54	41.44	32	5.48	34.51	374	162	A	H
	*	2412	106.13	-	-	103.03	32.13	5.48	34.51	374	162	P	H
	*	2410	102.83	-	-	99.73	32.13	5.48	34.51	374	162	A	H
		2388	53.47	-20.53	74	50.53	32	5.48	34.54	384	286	P	V
		2389.69	43.55	-10.45	54	40.61	32	5.48	34.54	384	286	A	V
	*	2412	103.98	-	-	100.88	32.13	5.48	34.51	384	286	P	V
	*	2410	100.63	-	-	97.53	32.13	5.48	34.51	384	286	A	V
802.11b CH 11 2462MHz	*	2462	105.07	-	-	101.61	32.33	5.51	34.38	101	248	P	H
	*	2460	101.88	-	-	98.42	32.33	5.51	34.38	101	248	A	H
		2485.84	54.52	-19.48	74	51.02	32.27	5.55	34.32	101	248	P	H
		2490.82	43.93	-10.07	54	40.5	32.2	5.55	34.32	101	248	A	H
	*	2462	103.66	-	-	100.2	32.33	5.51	34.38	370	304	P	V
	*	2460	100.44	-	-	96.98	32.33	5.51	34.38	370	304	A	V
		2492.32	54.16	-19.84	74	50.66	32.2	5.55	34.25	370	304	P	V
		2490.4	43.09	-10.91	54	39.66	32.2	5.55	34.32	370	304	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	50.5	-23.5	74	70.32	34.2	8.1	62.12	100	360	P	H
	!	4824	49.2	-4.8	54	69.02	34.2	8.1	62.12	100	127	A	H
		4824	52.06	-21.94	74	71.88	34.2	8.1	62.12	100	115	P	V
	!	4824	50.24	-3.76	54	70.06	34.2	8.1	62.12	100	115	A	V
802.11b CH 06 2437MHz		4872	47.33	-26.67	74	67.22	34.13	8.09	62.11	100	360	P	H
		7308	43.43	-30.57	74	59.85	36.6	9.75	62.77	100	360	P	H
		4872	50.45	-23.55	74	70.34	34.13	8.09	62.11	150	0	P	V
	!	4872	49.19	-4.81	54	69.08	34.13	8.09	62.11	284	73	A	V
		7308	42.44	-31.56	74	58.86	36.6	9.75	62.77	100	360	P	V
802.11b CH 11 2462MHz		4926	45.46	-28.54	74	65.39	34.1	8.06	62.09	100	360	P	H
		7386	42.39	-31.61	74	58.86	36.5	9.81	62.78	100	360	P	H
		4926	50.88	-23.12	74	70.81	34.1	8.06	62.09	100	0	P	V
	!	4926	50.07	-3.93	54	70	34.1	8.06	62.09	333	72	A	V
		7386	43.65	-30.35	74	60.12	36.5	9.81	62.78	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.95	61.83	-12.17	74	61.31	32	5.48	36.96	336	338	P	H
	!	2389.95	49.91	-4.09	54	49.39	32	5.48	36.96	336	338	A	H
	*	2410	108.17	-	-	107.52	32.13	5.48	36.96	336	338	P	H
	*	2408	100.16	-	-	99.51	32.13	5.48	36.96	336	338	A	H
		2389.95	57.21	-16.79	74	54.24	32	5.48	34.51	384	286	P	V
		2389.95	46.42	-7.58	54	43.45	32	5.48	34.51	384	286	A	V
	*	2410	102.66	-	-	99.56	32.13	5.48	34.51	384	286	P	V
	*	2408	94.55	-	-	91.45	32.13	5.48	34.51	384	286	A	V
802.11g CH 11 2462MHz	*	2458	104.79	-	-	101.33	32.33	5.51	34.38	100	247	P	H
	*	2458	96.86	-	-	93.4	32.33	5.51	34.38	100	247	A	H
		2484.34	55.49	-18.51	74	51.99	32.27	5.55	34.32	100	247	P	H
		2483.51	44.9	-9.1	54	41.4	32.27	5.55	34.32	100	247	A	H
	*	2460	98.92	-	-	95.46	32.33	5.51	34.38	299	88	P	V
	*	2460	91.01	-	-	87.55	32.33	5.51	34.38	299	88	A	V
		2498.68	53.68	-20.32	74	50.18	32.2	5.55	34.25	299	88	P	V
		2483.74	43.46	-10.54	54	39.96	32.27	5.55	34.32	299	88	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	44.49	-29.51	74	64.31	34.2	8.1	62.12	100	360	P	H
		4824	42.74	-31.26	74	62.56	34.2	8.1	62.12	100	0	P	V
802.11g CH 06 2437MHz		4872	40.44	-33.56	74	60.33	34.13	8.09	62.11	100	360	P	H
		7308	43.14	-30.86	74	59.56	36.6	9.75	62.77	100	360	P	H
		4872	43.83	-30.17	74	63.72	34.13	8.09	62.11	100	0	P	V
		7308	42.14	-31.86	74	58.56	36.6	9.75	62.77	100	0	P	V
802.11g CH 11 2462MHz		4926	41.44	-32.56	74	61.37	34.1	8.06	62.09	100	0	P	H
		7386	41.41	-32.59	74	57.88	36.5	9.81	62.78	100	0	P	H
		4924	41.08	-32.92	74	61.01	34.1	8.06	62.09	100	0	P	V
		7386	41.25	-32.75	74	57.72	36.5	9.81	62.78	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.95	58.96	-15.04	74	55.99	32	5.48	34.51	381	162	P	H
	!	2389.95	48.72	-5.28	54	45.75	32	5.48	34.51	381	162	A	H
	*	2412	103.22	-	-	100.12	32.13	5.48	34.51	381	162	P	H
	*	2408	95.02	-	-	91.92	32.13	5.48	34.51	381	162	A	H
		2389.95	56.57	-17.43	74	53.6	32	5.48	34.51	382	284	P	V
		2389.95	46.09	-7.91	54	43.12	32	5.48	34.51	382	284	A	V
	*	2408	100.32	-	-	97.22	32.13	5.48	34.51	382	284	P	V
	*	2408	92.09	-	-	88.99	32.13	5.48	34.51	382	284	A	V
802.11n HT20 CH 11 2462MHz	*	2462	107.54	-	-	106.67	32.33	5.51	36.97	151	147	P	H
	*	2460	98.81	-	-	97.94	32.33	5.51	36.97	151	147	A	H
		2484.28	56.44	-17.56	74	55.59	32.27	5.55	36.97	151	147	P	H
		2483.74	45.99	-8.01	54	45.14	32.27	5.55	36.97	151	147	A	H
	*	2460	101.78	-	-	98.32	32.33	5.51	34.38	371	286	P	V
	*	2458	93.69	-	-	90.23	32.33	5.51	34.38	371	286	A	V
		2485.06	54.16	-19.84	74	50.66	32.27	5.55	34.32	371	286	P	V
	2483.62	44.27	-9.73	54	40.77	32.27	5.55	34.32	371	286	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	41.74	-32.26	74	61.56	34.2	8.1	62.12	100	360	P	H
		4824	42.92	-31.08	74	62.74	34.2	8.1	62.12	100	360	P	V
802.11n HT20 CH 06 2437MHz		4872	41.35	-32.65	74	61.24	34.13	8.09	62.11	100	360	P	H
		7308	42.84	-31.16	74	59.26	36.6	9.75	62.77	100	360	P	H
		4872	39.16	-34.84	74	59.05	34.13	8.09	62.11	100	360	P	V
		7308	42.2	-31.8	74	58.62	36.6	9.75	62.77	100	360	P	V
802.11n HT20 CH 11 2462MHz		4926	39.39	-34.61	74	59.32	34.1	8.06	62.09	100	360	P	H
		7386	41.94	-32.06	74	58.41	36.5	9.81	62.78	100	360	P	H
		4926	39.4	-34.6	74	59.33	34.1	8.06	62.09	100	360	P	V
		7386	42.04	-31.96	74	58.51	36.5	9.81	62.78	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2388.91	56.76	-17.24	74	56.24	32	5.48	36.96	100	117	P	H
		2389.95	44.67	-9.33	54	44.15	32	5.48	36.96	100	117	A	H
	*	2432	101.21	-	-	100.39	32.27	5.51	36.96	100	117	P	H
		2432	93.01	-	-	92.19	32.27	5.51	36.96	100	116	A	H
		2483.5	56.37	-17.63	74	55.52	32.27	5.55	36.97	100	117	P	H
		2483.86	42.57	-11.43	54	41.72	32.27	5.55	36.97	100	117	A	H
		2389.69	52.44	-21.56	74	51.92	32	5.48	36.96	333	43	P	V
		2389.95	42.39	-11.61	54	41.87	32	5.48	36.96	333	43	A	V
	*	2432	96.69	-	-	95.87	32.27	5.51	36.96	333	43	P	V
	*	2434	88.57	-	-	87.75	32.27	5.51	36.96	333	43	A	V
		2484.34	51.79	-22.21	74	50.94	32.27	5.55	36.97	333	43	P	V
		2484.88	41.66	-12.34	54	40.81	32.27	5.55	36.97	333	43	A	V
802.11n HT40 CH 09 2452MHz		2348.48	51.67	-22.33	74	51.08	32.1	5.43	36.94	119	256	P	H
		2358.88	41.32	-12.68	54	40.77	32.07	5.43	36.95	119	256	A	H
	*	2450	102.48	-	-	101.53	32.4	5.51	36.96	119	256	P	H
	*	2444	94.53	-	-	93.58	32.4	5.51	36.96	119	256	A	H
		2484.88	62.54	-11.46	74	61.69	32.27	5.55	36.97	119	256	P	H
		2484.1	45.8	-8.2	54	44.95	32.27	5.55	36.97	119	256	A	H
		2365.64	53.18	-20.82	74	50.22	32.07	5.43	34.54	300	98	P	V
		2360.18	42.82	-11.18	54	39.89	32.07	5.43	34.57	300	98	A	V
	*	2458	92.43	-	-	88.97	32.33	5.51	34.38	300	98	P	V
	*	2460	84.46	-	-	81	32.33	5.51	34.38	300	98	A	V
		2483.86	54.59	-19.41	74	51.09	32.27	5.55	34.32	300	98	P	V
		2486.8	43.76	-10.24	54	40.26	32.27	5.55	34.32	300	98	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4842	40.03	-33.97	74	59.86	34.2	8.09	62.12	100	360	P	H
HT40		7266	42.6	-31.4	74	59.12	36.53	9.72	62.77	100	360	P	H
CH 03		4842	39.09	-34.91	74	58.92	34.2	8.09	62.12	100	0	P	V
2422MHz		7266	42.06	-31.94	74	58.58	36.53	9.72	62.77	100	0	P	V
802.11n		4872	39.5	-34.5	74	59.39	34.13	8.09	62.11	100	360	P	H
HT40		7308	42.07	-31.93	74	58.49	36.6	9.75	62.77	100	360	P	H
CH 06		4872	39.18	-34.82	74	59.07	34.13	8.09	62.11	100	360	P	V
2437MHz		7308	42.95	-31.05	74	59.37	36.6	9.75	62.77	100	360	P	V
802.11n		4902	39.29	-34.71	74	59.21	34.1	8.07	62.09	100	360	P	H
HT40		7356	44.43	-29.57	74	60.83	36.6	9.78	62.78	100	360	P	H
CH 09		4902	40.2	-33.8	74	60.12	34.1	8.07	62.09	100	360	P	V
2452MHz		7356	43.1	-30.9	74	59.5	36.6	9.78	62.78	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		32.91	17.52	-22.48	40	27.14	21.66	0.69	31.97	-	-	P	H
		74.62	16.65	-23.35	40	35.44	12.1	1.01	31.9	-	-	P	H
		137.67	14.24	-29.26	43.5	28.39	16.5	1.29	31.94	-	-	P	H
		535.37	21.54	-24.46	46	26.75	24.5	2.61	32.32	-	-	P	H
		791.45	24.15	-21.85	46	27.06	25.98	3.25	32.14	-	-	P	H
		933.07	25.13	-20.87	46	25.69	27.07	3.52	31.15	100	0	P	H
		30	27.32	-12.68	40	35.86	22.8	0.64	31.98	100	21	P	V
		97.9	27.65	-15.85	43.5	42.04	16.4	1.14	31.93	-	-	P	V
		171.62	27.9	-15.6	43.5	42.37	15.93	1.52	31.92	-	-	P	V
		197.81	28.14	-15.36	43.5	43.07	15.34	1.63	31.9	-	-	P	V
		313.24	31.06	-14.94	46	41.57	19.5	2.01	32.02	-	-	P	V
	553.8	23.1	-22.9	46	27.84	24.97	2.64	32.35	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.04	-	-	10Hz
802.11g	95.00	2.065	0.484	0.51KHz
802.11n HT20	92.98	1.920	0.521	0.56KHz
802.11n HT40	87.92	0.949	1.053	1.1KHz

802.11b

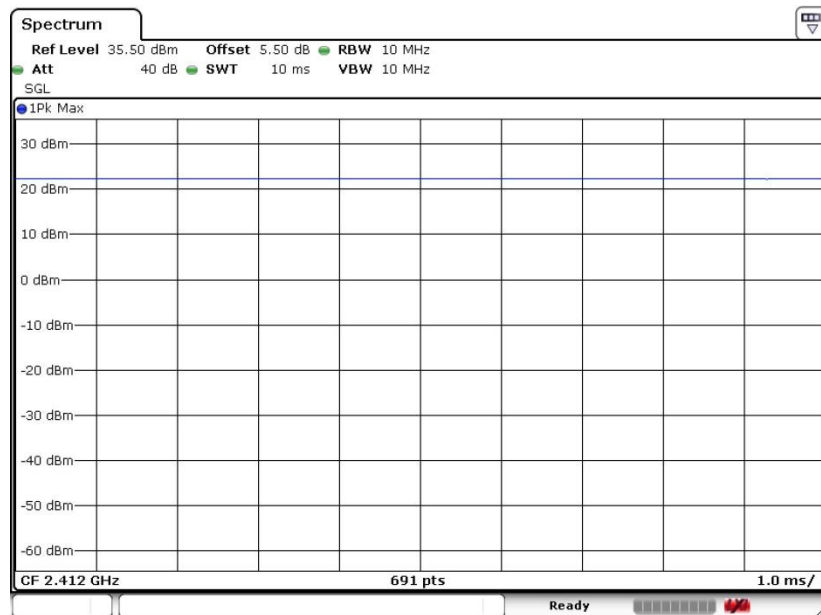




802.11g

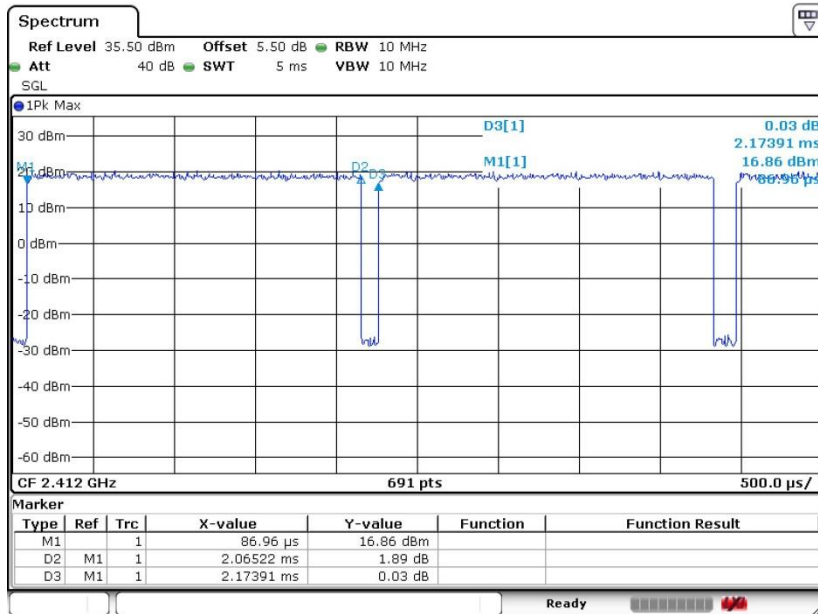

802.11n HT20

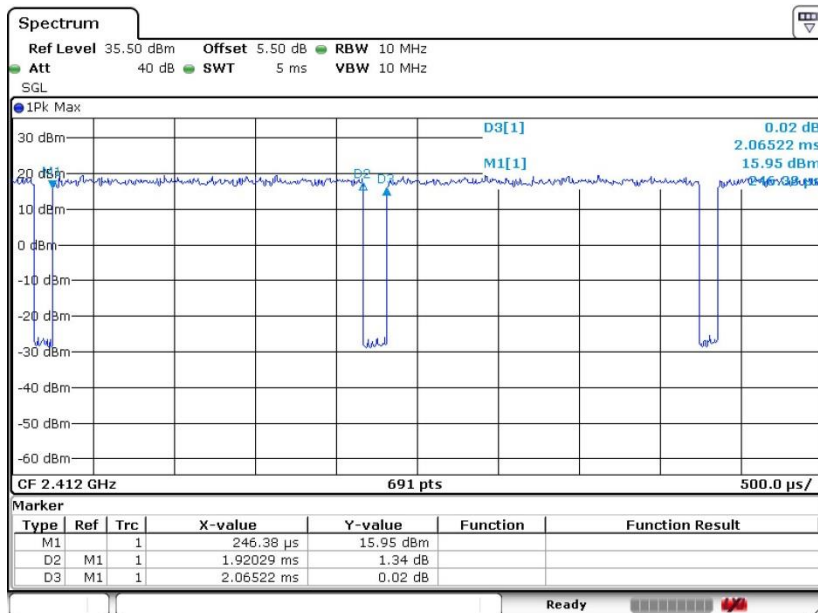



802.11n HT40

