



 <p>CERTIFICATE 2518.08</p> <p>MS ISO/IEC 17025 TESTING SAMM NO. 0825</p>																																												
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / ISED TEST REPORT Report Revision : Rev.B</p>																																												
<table border="0"> <tr> <td>Date/s Tested</td> <td>: 24-Aug-2021 - 5-Sep-2021</td> <td rowspan="10" style="text-align: center; vertical-align: middle;">  </td> </tr> <tr> <td>Report Issue Date</td> <td>: 20-Sep-2021</td> </tr> <tr> <td>Manufacturer/Location</td> <td>: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td>Requestor</td> <td>: KHOO TEIK KEAN</td> </tr> <tr> <td>Product Type</td> <td>: Hand-held</td> </tr> <tr> <td>Product Version (PMN)</td> <td>: R7</td> </tr> <tr> <td>Model Number (HVIN)</td> <td>: AAH06JDN9RA1AN (IC Model: PMUD3491ABB)</td> </tr> <tr> <td>Frequency Band</td> <td>: 2.402 - 2.480 GHz</td> </tr> <tr> <td>Max RF Output Power</td> <td>: 10 mWatts</td> </tr> <tr> <td>Applicant Name</td> <td>: Motorola Solutions Inc</td> </tr> <tr> <td>Applicant Address</td> <td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td> </tr> <tr> <td>FCC Registrations</td> <td>: 461337</td> <td></td> </tr> <tr> <td>ISED Registrations</td> <td>: MY0001</td> <td></td> </tr> <tr> <td>Firmware Version (FVIN)</td> <td>: D02.21.04.0065</td> <td></td> </tr> <tr> <td colspan="3">The equipment was tested accordance to the requirement listed below:</td> </tr> <tr> <td>(2.4GHz BT LE)</td> <td></td> <td>PASS</td> </tr> <tr> <td>47 CFR Part 15C</td> <td></td> <td></td> </tr> <tr> <td>ISED RSS 247 Issue 2</td> <td></td> <td></td> </tr> </table>		Date/s Tested	: 24-Aug-2021 - 5-Sep-2021		Report Issue Date	: 20-Sep-2021	Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: KHOO TEIK KEAN	Product Type	: Hand-held	Product Version (PMN)	: R7	Model Number (HVIN)	: AAH06JDN9RA1AN (IC Model: PMUD3491ABB)	Frequency Band	: 2.402 - 2.480 GHz	Max RF Output Power	: 10 mWatts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	FCC Registrations	: 461337		ISED Registrations	: MY0001		Firmware Version (FVIN)	: D02.21.04.0065		The equipment was tested accordance to the requirement listed below:			(2.4GHz BT LE)		PASS	47 CFR Part 15C			ISED RSS 247 Issue 2		
Date/s Tested	: 24-Aug-2021 - 5-Sep-2021																																												
Report Issue Date	: 20-Sep-2021																																												
Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																												
Requestor	: KHOO TEIK KEAN																																												
Product Type	: Hand-held																																												
Product Version (PMN)	: R7																																												
Model Number (HVIN)	: AAH06JDN9RA1AN (IC Model: PMUD3491ABB)																																												
Frequency Band	: 2.402 - 2.480 GHz																																												
Max RF Output Power	: 10 mWatts																																												
Applicant Name	: Motorola Solutions Inc																																												
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																												
FCC Registrations	: 461337																																												
ISED Registrations	: MY0001																																												
Firmware Version (FVIN)	: D02.21.04.0065																																												
The equipment was tested accordance to the requirement listed below:																																													
(2.4GHz BT LE)		PASS																																											
47 CFR Part 15C																																													
ISED RSS 247 Issue 2																																													
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																																													
<p>Prepared By:</p>  <hr/> <p>GAN BOON TEONG Test Personnel</p>	<p>Approved Signatory:</p> <hr/> <p>VINCENT FOONG CHUEN KIT Responsible Engineer</p>																																												

Table of Contents

1.0 General Information3
 2.0 Summary of Test Results.....3
 3.0. Measurement Uncertainty4
 4.0 Equipment List5
 5.0 Test Mode Applicability and Test Channel Detail6
 6.0 Transmitter Test Parameters7
 6.1 6dB Channel Bandwidth.....7
 6.1.1 Test Setup.....7
 6.1.2 Test Limits:7
 6.1.3 Test Data:7
 6.2 Maximum Peak Conducted RF Output Power11
 6.2.1 Test Setup.....11
 6.2.2 Test Limits:11
 6.2.3 Test Data:12
 6.3 Maximum Peak Power Spectral Density14
 6.3.1 Test Setup.....14
 6.3.2 Test Limits:14
 6.3.3 Test Result14
 6.4 Conducted Spurious Emission.....15
 6.4.1 Test Setup.....15
 6.4.2 Test Limits:15
 6.4.3 Test Result15
 6.5 Band edge Conducted Spurious Emission.....16
 6.5.1 Test Setup.....16
 6.5.2 Test Limits:16
 6.5.3 Test Result16
 6.6 Radiated Emission within Restricted Bands.....17
 6.6.1 Test Setup.....17
 6.6.2 Test Limits:18
 6.6.3 Test Results:19
 6.7 AC Powerline Conducted Emission33
 6.7.1 Test Setup.....33
 6.7.2 Test Limits:33
 6.7.3 Test Result35

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	20-Sep-2021	Gan Boon Teong
Rev. B	Added charger info, AV data	18-Oct-2021	Vincent Foong

1.0 General Information

EUT Description:

Technologies	2.4GHz BT LE
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	Internal PCB

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BATTERY PACK,BATT IMPRES LIION TIA4950 IP68 3200T	MOTOROLA	PMNN4810A
VHF WHIP ANTENNA (136-174 MHZ) 136 - 174 MHz	MOTOROLA	PMAD4147A
CABLE,PORTABLE PROGRAMMING CABLE	MOTOROLA	PMKN4230A
POWER SUPPLY ADAPTOR,IMPRES SUC LEVEL V SMPS NA CORD	MOTOROLA	WPLN4253B

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

Selection of test modes

Some reports may contain a limited number of test points/modes, in which case all channels and modulations were evaluated and the worst case performance is presented in the report

Test configuration of EUT

All relevant configurations involving radio models and accessories (including chargers, batteries, antennas) were assessed. Only worst case configurations will be included in this report.

2.0 Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (a)(2)	RSS 247 5.2 (a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: BT 1M - 1.051 MHz (1M05F1D) BT 2M - 2.066 MHz (2M07F1D)	865TXP0468	Gan
15.247 (b)(3)	RSS 247 5.4 (d)	Conducted RF Output Power (Peak)	Pass	Highest output power: BT 1M - 8.827 dBm (7.63 mW) BT 2M - 8.819 dBm (7.62 mW)	865TXP0468	Gan
15.247(e)	RSS 247 5.2 (b)	Maximum Peak Power Spectral Density	Pass	References data from AZ489FT7143 / ISED 109U-89FT7143	NA	NA
15.247 (d)	RSS-247 5.5	Band-Edge Conducted Spurious Emission	Pass	References data from AZ489FT7143 / ISED 109U-89FT7143	NA	NA
15.247 (b)	RSS-247 5.5	Conducted Spurious Emission	Pass	References data from AZ489FT7143 / ISED 109U-89FT7143	NA	NA
15.205, 15.209, 15.247 (d)	RSS247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: 47.6999 dBuV/m with margin of 6.3001 dB.	865TXP0473	Amaluddin&Azil
15.207	RSS-Gen 8.8	AC Power Line Conducted Spurious Emission	NA	Meet the limit requirement.	865TXP0473	Alif&Iskandar
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA	NA

***NOTE: The BT chipset is identical to FCC ID AZ489FT7143 / ISED 109U-89FT7143. The rest of conducted measurements are by similarity. Only worst case configuration of radiated emission based on AZ489FT7143 / ISED 109U-89FT7143 is tested. As per KDB 484596 D01v01, the applicant takes full responsibility that data referenced represents compliance to the relevant rules for this current FCC ID.**

3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150kHz ~ 30MHz	3.48 dB
Radiated Emissions up to 1 GHz (Field Strength)	30MHz ~ 1000MHz	5.88 dB
Radiated Emissions above 1 GHz (Field Strength)	1GHz ~ 18GHz	5.84 dB
	18GHz ~ 40GHz	6.02 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.11)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92002639	8-Dec-20	8-Dec-21
POWER SUPPLY (0-20V / 0-25A)	6652A	3640A02941	22-Jan-21	22-Jan-22
ANALYZER SPECTRUM (PSA 3Hz-26.5GHz)	E4440A	US45303111	14-Jul-21	14-Jul-22
CHAMBER	SH-641	92002639	8-Dec-20	8-Dec-21
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

Radiated Emission Station (SW Version: EMC FCC RE v1.6.2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	720	06-Apr-21	06-Apr-23
DRG HORN FREQ.	SAS-571	566	22-Oct-19	22-Oct-21
POWER SUPPLY	N7976A	MY53410110	24-May-21	24-May-22
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	15-Jan-21	15-Jan-22
EMI TEST RECEIVER	ESIB26	827769/009	11-Mar-21	11-Mar-22
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112D	55546	06-Jun-21	06-Jun-22
BILOG ANTENNA	CBL6112B	2964	4-May-21	4-May-22
HYGRO-THERMOMETER	SDL500	A.016800	18-May-21	18-May-22
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	4-Feb-21	4-Feb-22
AMPLIFIER	JS44-18004000-33-8P	2034566	12-June-19	12-June-22
PREAMPLIFIER	PAM-0118P	361	11-Sep-20	11-Sep-23
LOOP ANTENNA	6502	00208416	15-Sep-20	15-Sep-21

Power Line Conducted Emission (SW Version: EMC 32 v10.60.10)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
TEMPERATURE & HUMIDITY LOGGER	TM320	11203258	11-Dec-20	11-Dec-21
V-NETWORK 2-LINE	ENV216V	101039	20-July-19	20-Sep-21
EMI TEST RECEIVER	ESIB40	100307	8-Jan-21	8-Jan-22
PROGRAMMABLE AC SOURCE	61604	616040003502	4-Dec-2020	4-Dec-2021

5.0 Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	22.3°C, 70.1%RH

Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	22.3°C, 70.1%RH

Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	21.2°C, 63.9%RH

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	25°C, 54.8%RH

6.0 Transmitter Test Parameters

6.1 6dB Channel Bandwidth

6.1.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT’s antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.


6.1.2 Test Limits:

Normal Condition (25 ° C)
≥500 kHz


6.1.3 Test Data:

BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	0.710	1.045	Pass
Bluetooth L.E	GFSK	2440	0.710	1.051	Pass
Bluetooth L.E	GFSK	2480	0.707	1.050	Pass

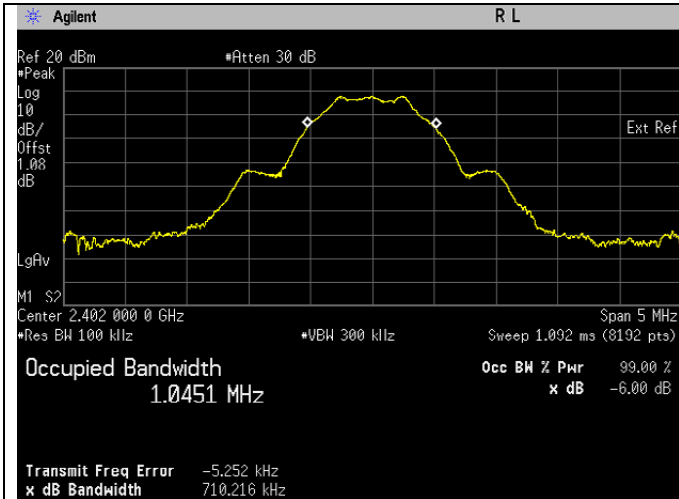


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

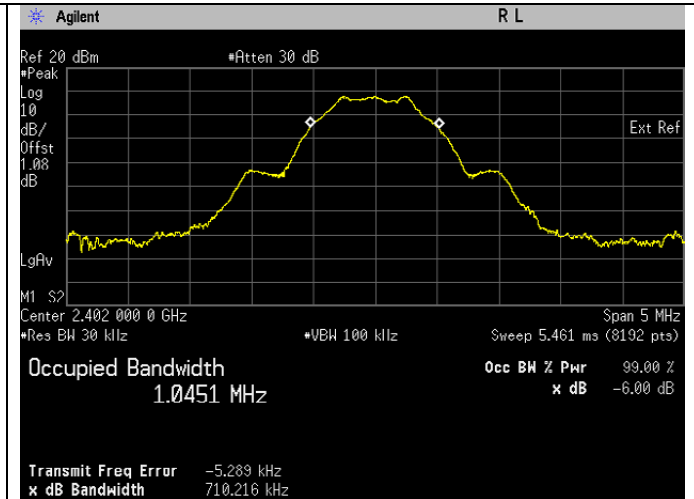


99% Bandwidth. Bluetooth LE Frequency 2402 MHz

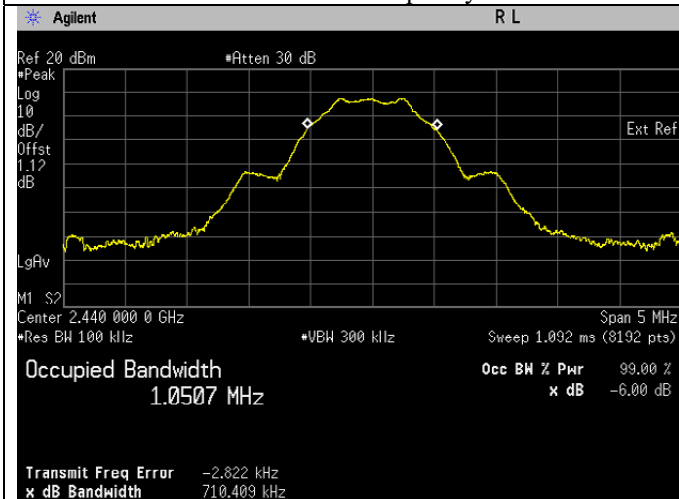


6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

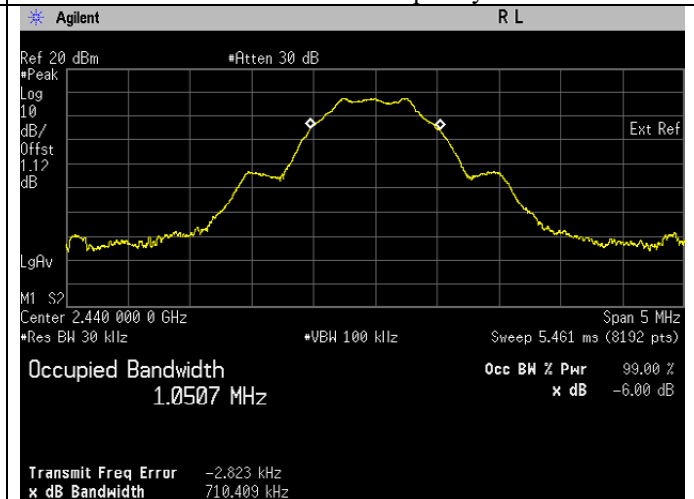

99% Bandwidth. Bluetooth LE Frequency 2440 MHz

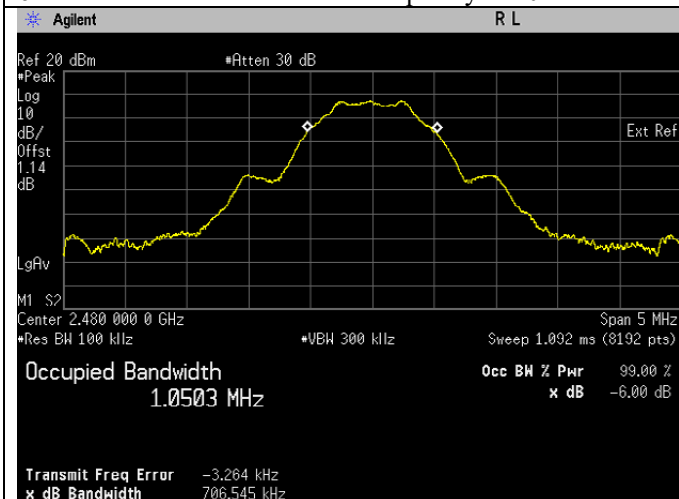


6dB Bandwidth. Bluetooth LE Frequency 2480 MHz

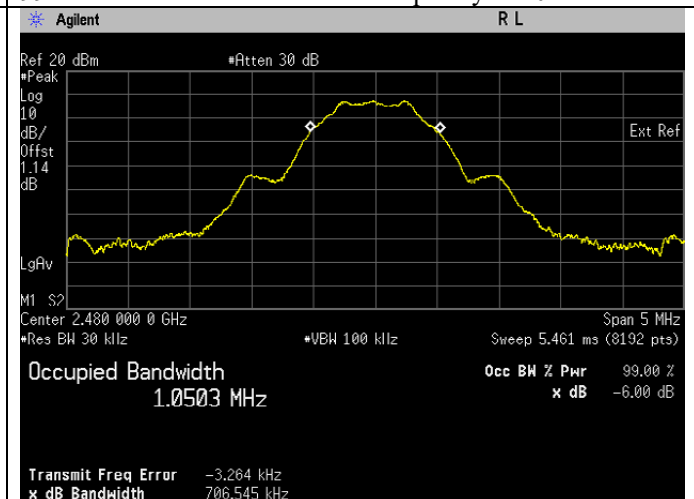


99% Bandwidth. Bluetooth LE Frequency 2480 MHz

BTLE 2M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	1.181	2.066	Pass
Bluetooth L.E	GFSK	2440	1.170	2.060	Pass
Bluetooth L.E	GFSK	2480	1.168	2.060	Pass

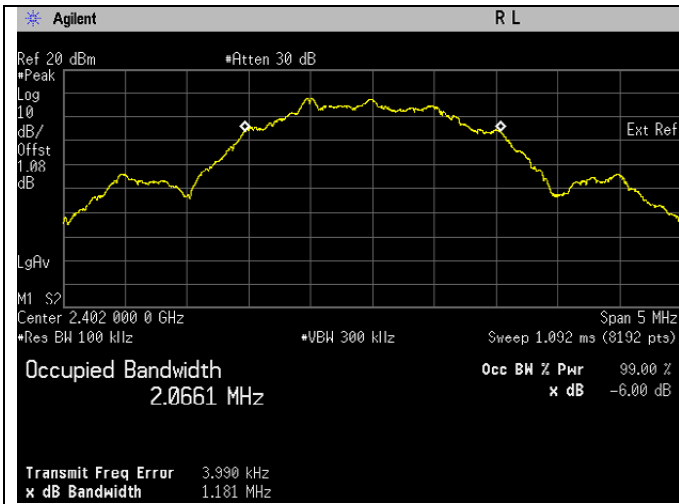


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

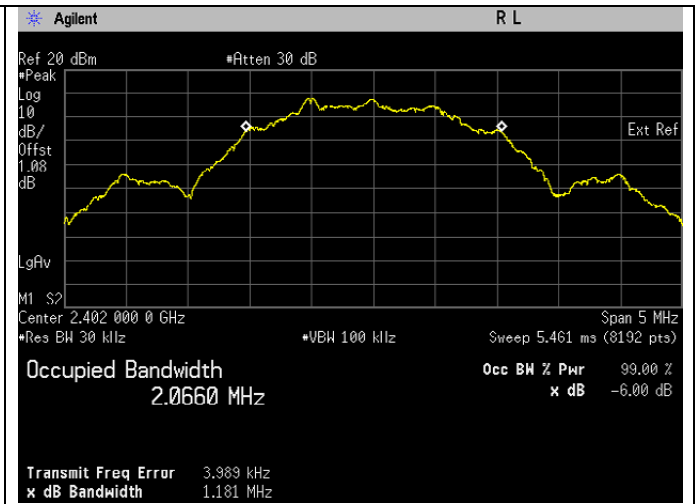



99% Bandwidth. Bluetooth LE Frequency 2402 MHz

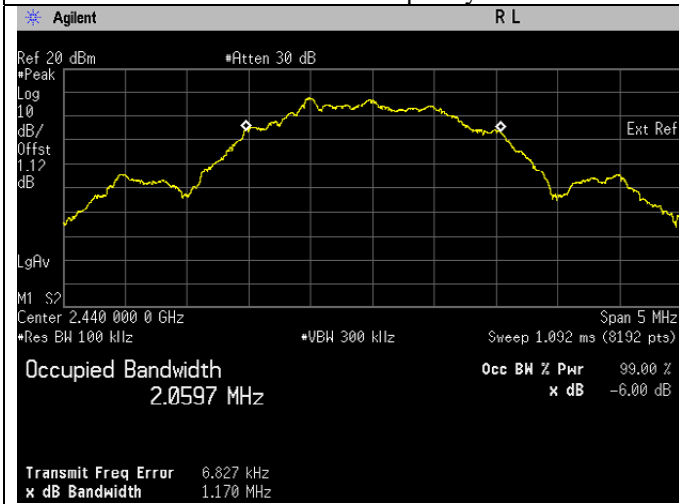

6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

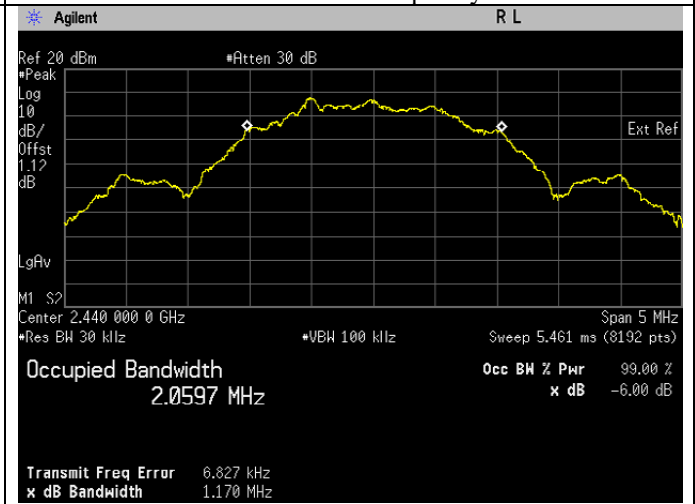


99% Bandwidth. Bluetooth LE Frequency 2440 MHz

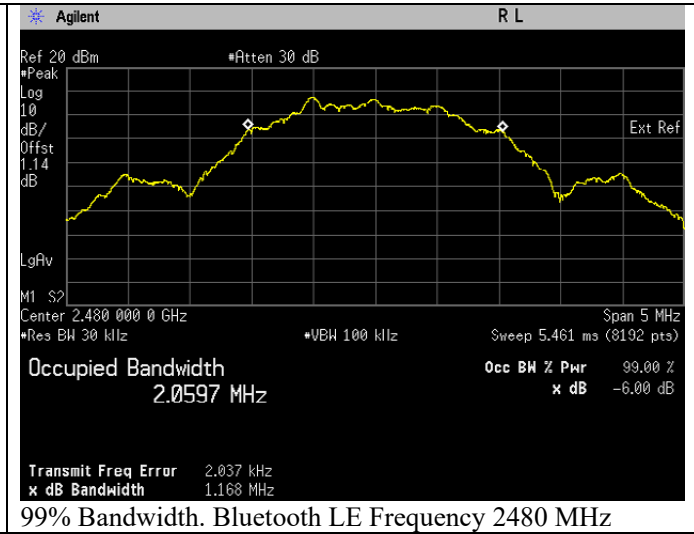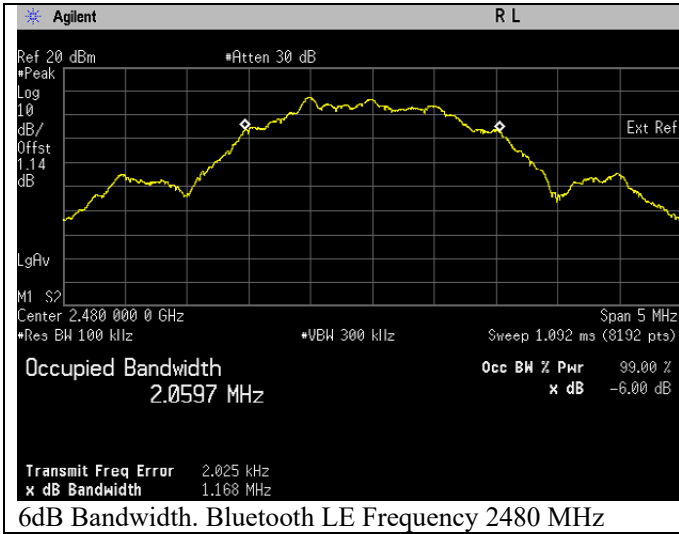

6.2 Conducted RF Output Power

6.2.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW \geq OBW
 - b. Set the VBW \geq $[3 \times \text{RBW}]$.
 - c. Set the span \geq $[1.5 \times \text{OBW bandwidth}]$.
 - d. Detector = Peak
 - e. Sweep time = auto couple.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.


6.2.2 Test Limits:

Normal Condition (25 ° C)
≤ 1 Watt(30 dBm)


6.2.3 Test Data:

BTLE 1M


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	8.827	Pass
Bluetooth L.E	GFSK	2440	8.504	Pass
Bluetooth L.E	GFSK	2480	8.170	Pass

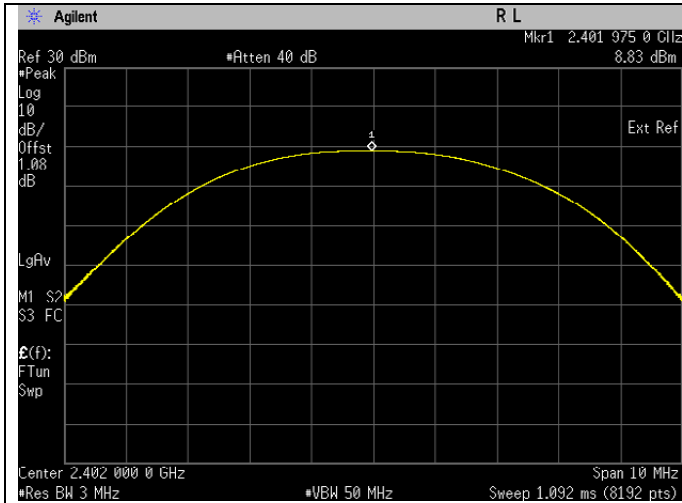

Frequency 2402 MHz

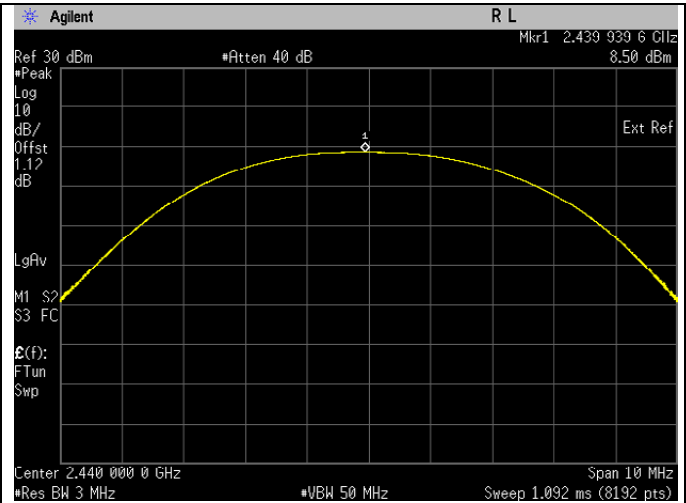




Frequency 2440 MHz

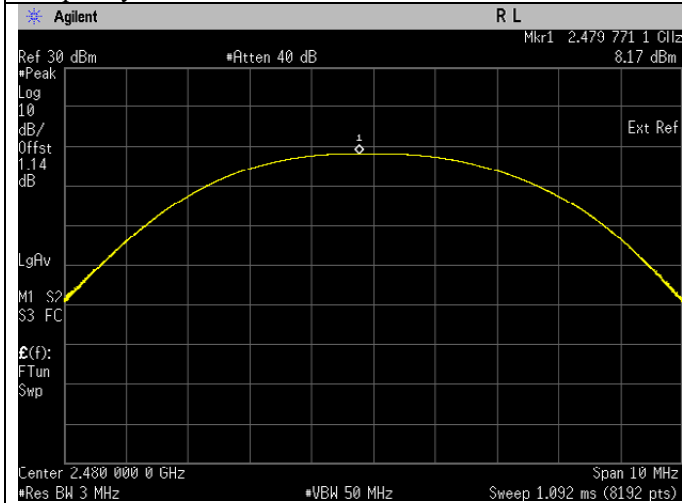

Frequency 2480 MHz


BTLE 2M

Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	8.819	Pass
Bluetooth L.E	GFSK	2440	8.493	Pass
Bluetooth L.E	GFSK	2480	8.154	Pass

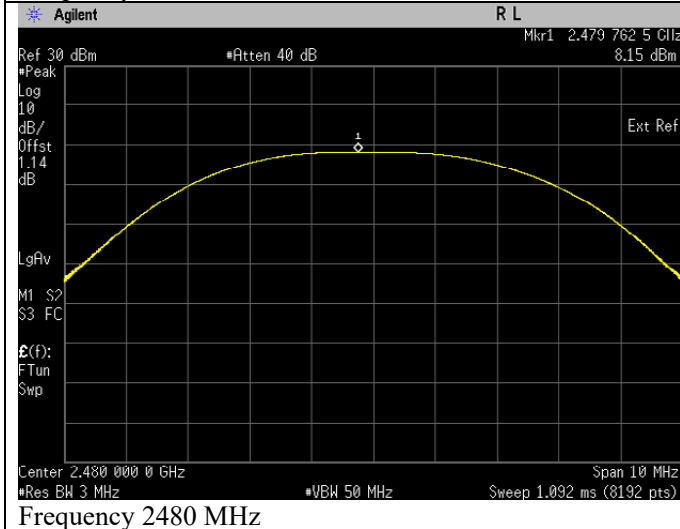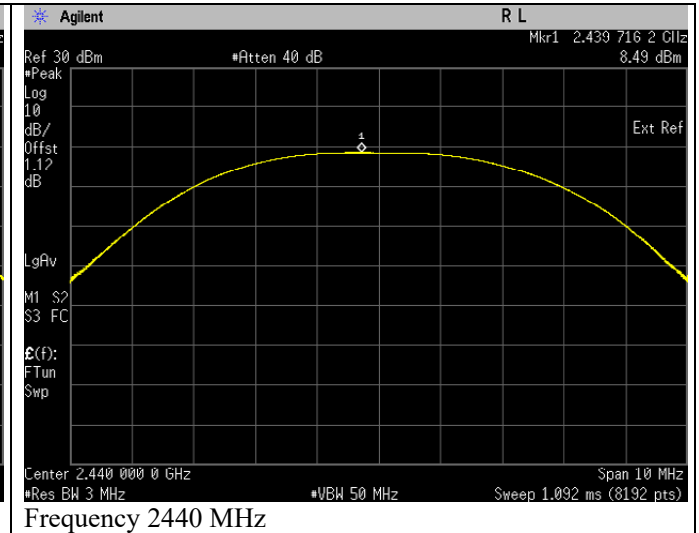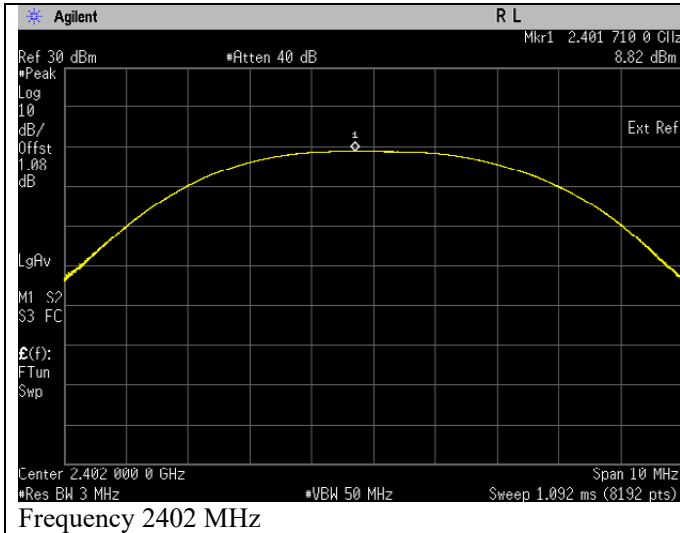

6.3 Maximum Peak Power Spectral Density

6.3.1 Test Setup



Maximum Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to 3 kHz.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

6.3.2 Test Limits:


Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$

6.3.3 Test Result

Not Applicable

6.4 Conducted Spurious Emission

6.4.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- 5) Use the peak marker function to measure highest emission and scan up to 10th harmonic.

6.4.2 Test Limits:

Normal Condition (25 ° C)


Shall be at least 30 dB below peak (max) power.
--

6.4.3 Test Result

Not Applicable

6.5 Band edge Conducted Spurious Emission

6.5.1 Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.

6.5.2 Test Limits:


Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.

6.5.3 Test Result

Not Applicable

6.6 Radiated Emission within Restricted Bands

6.6.1 Test Setup

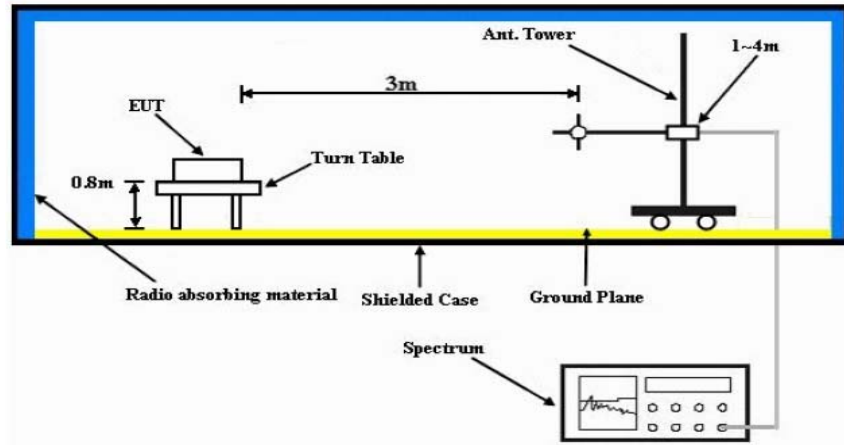

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.6.2 Test Limits:


Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:


- 1) The lower limit shall apply at the transition frequencies.
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

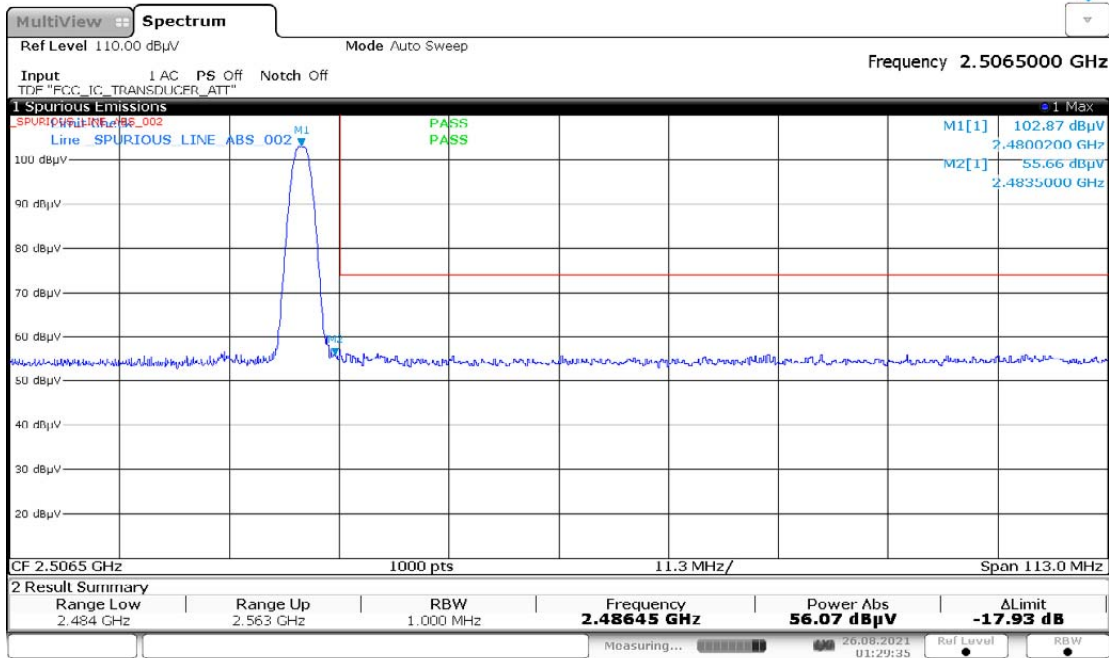


01:29:35 26.08.2021

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

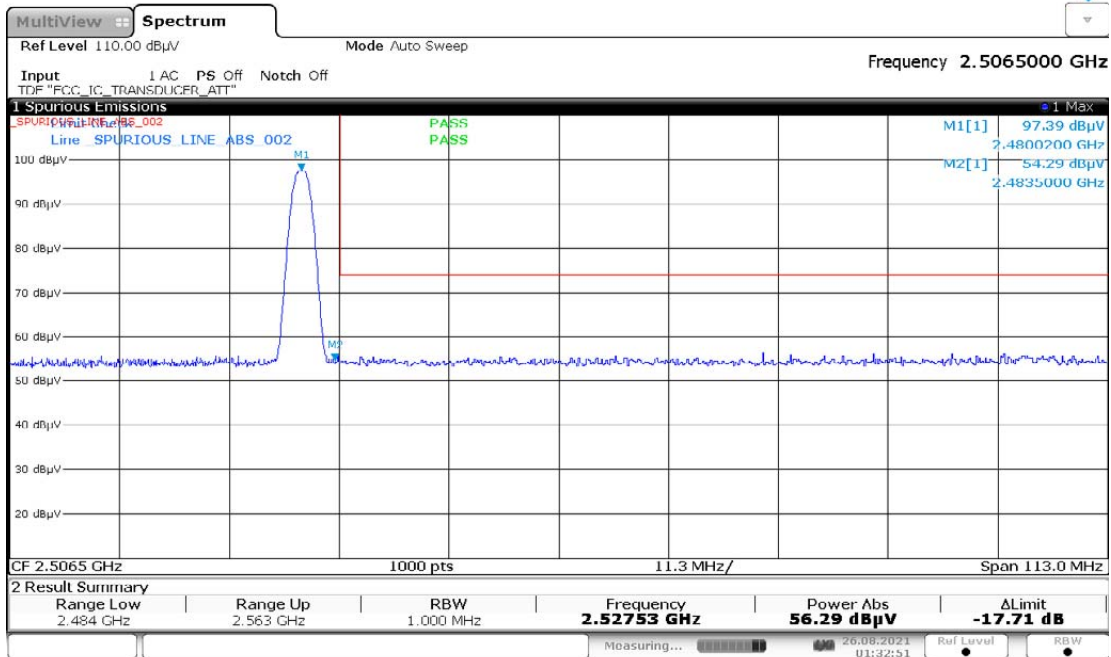


01:32:52 26.08.2021

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

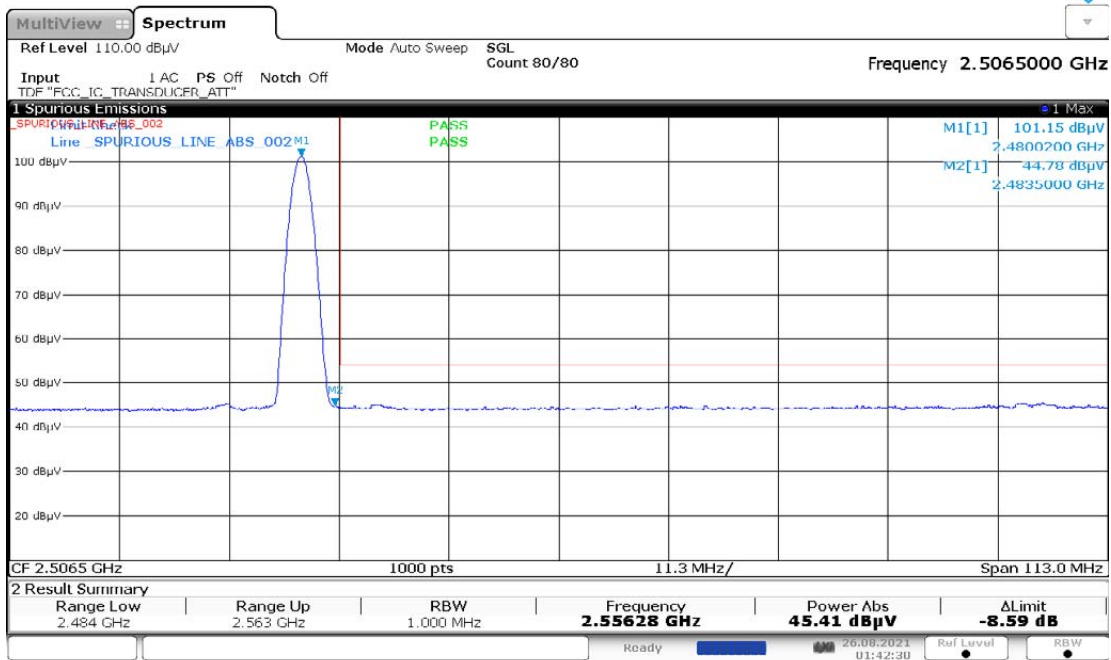


01:42:31 26.08.2021

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

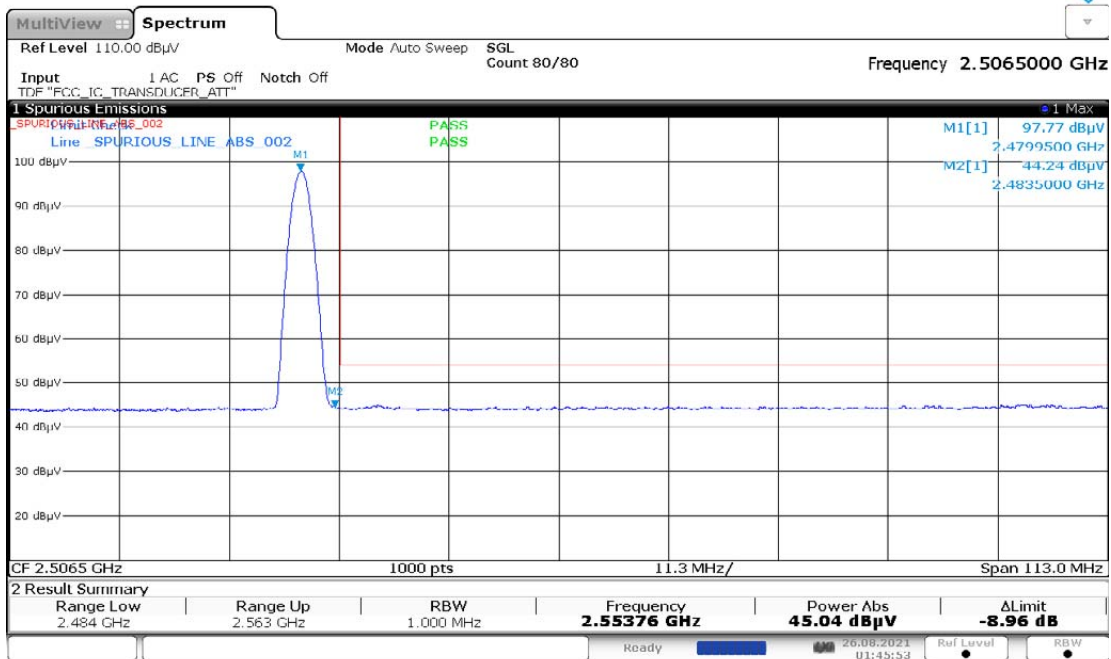


01:45:54 26.08.2021

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

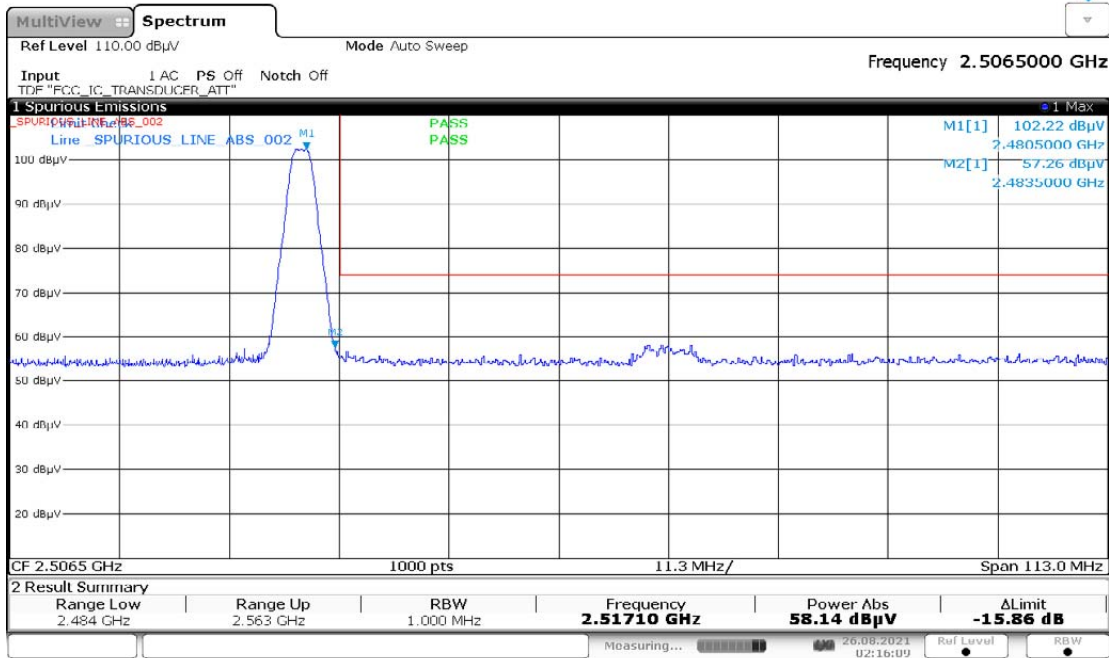


02:16:10 26.08.2021

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

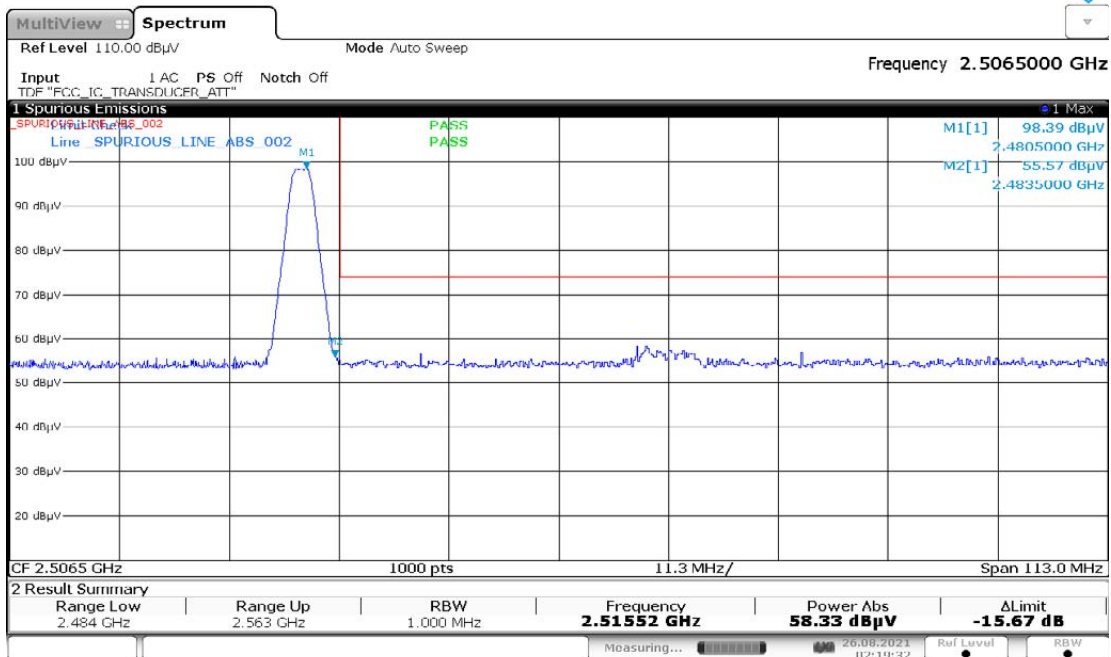


02:19:33 26.08.2021

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

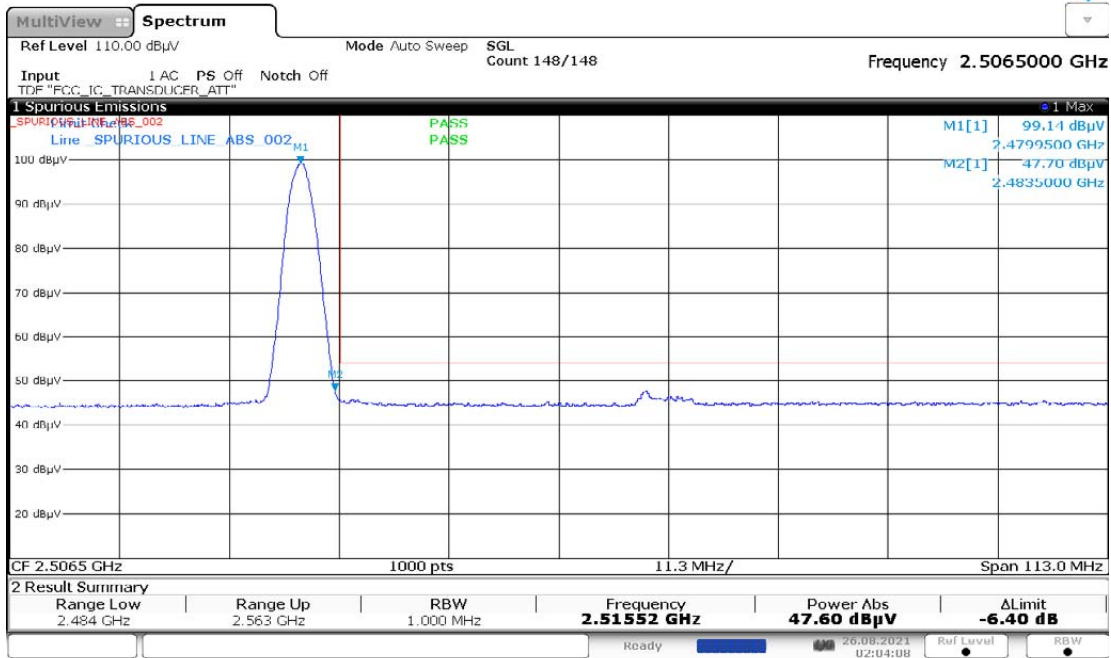


02:04:09 26.08.2021

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

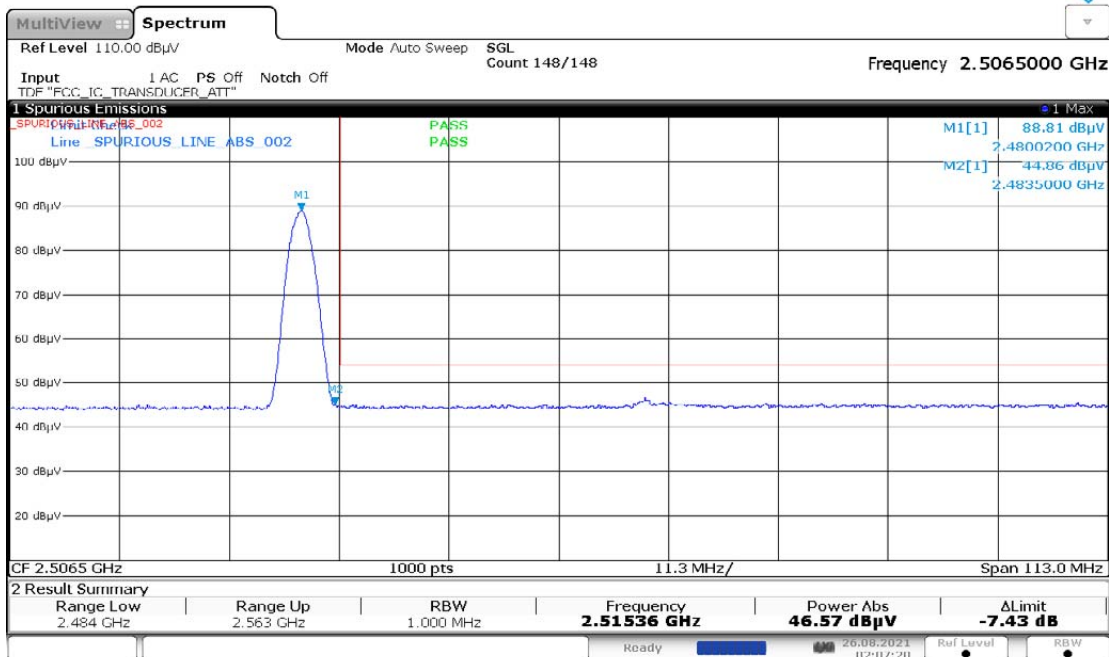


02:07:20 26.08.2021


VERTICAL, QPK

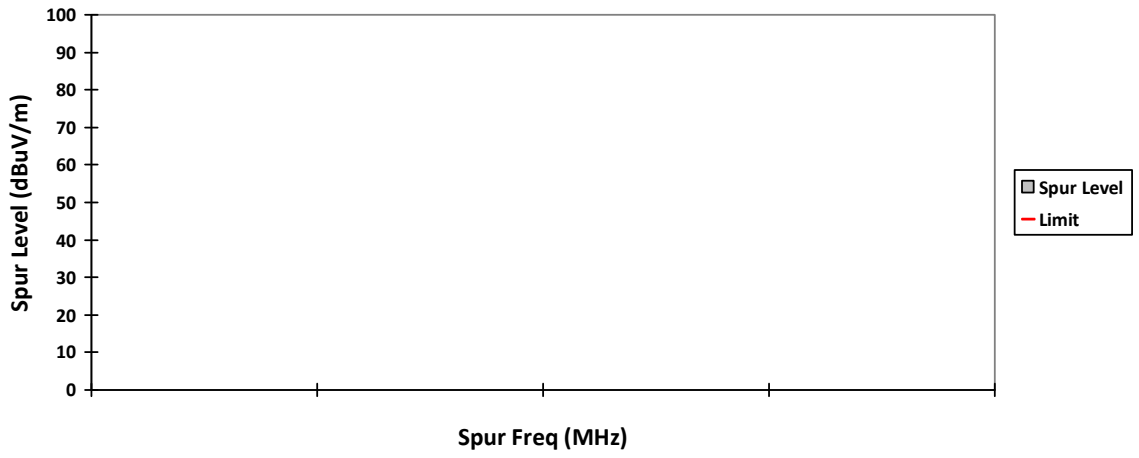


HORIZONTAL, QPK

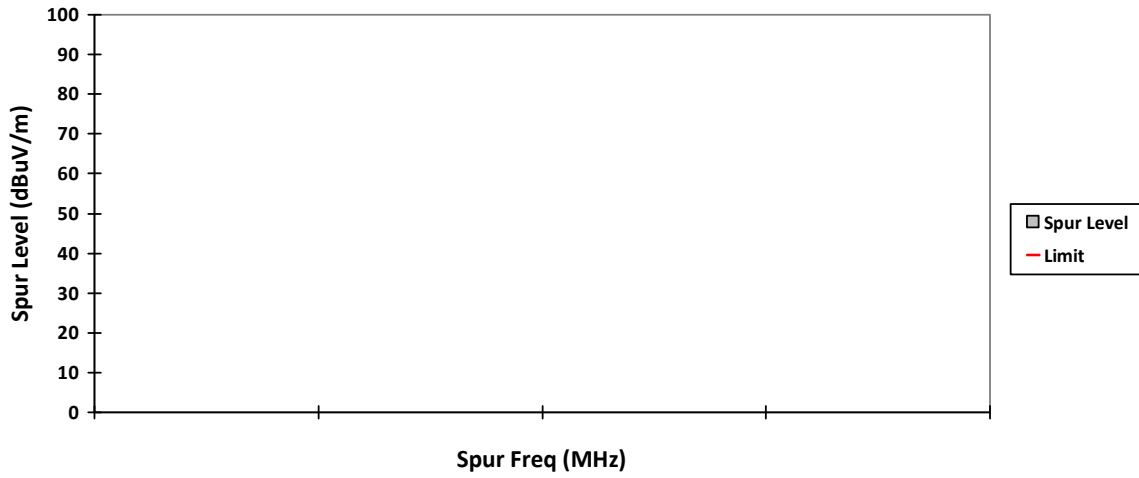


VERTICAL, PK

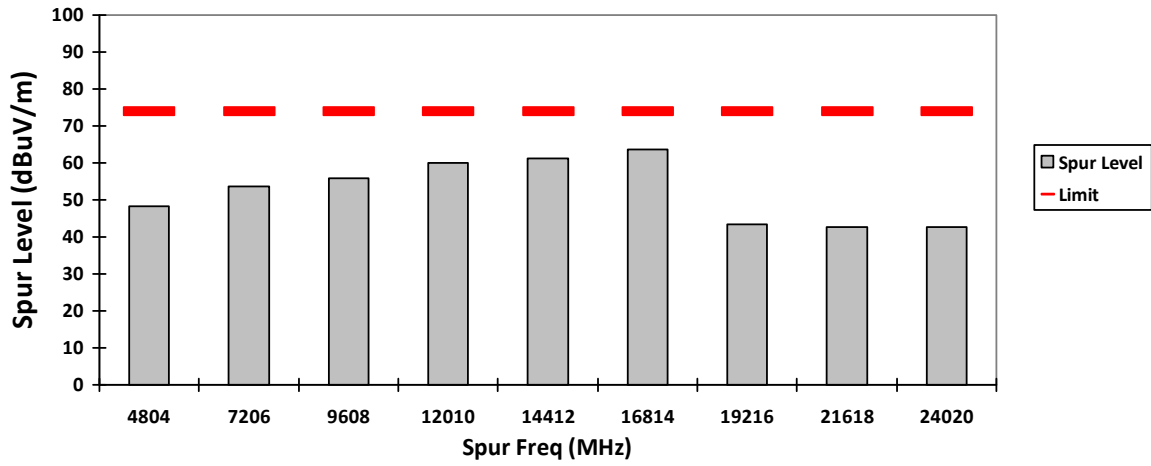


HORIZONTAL, PK

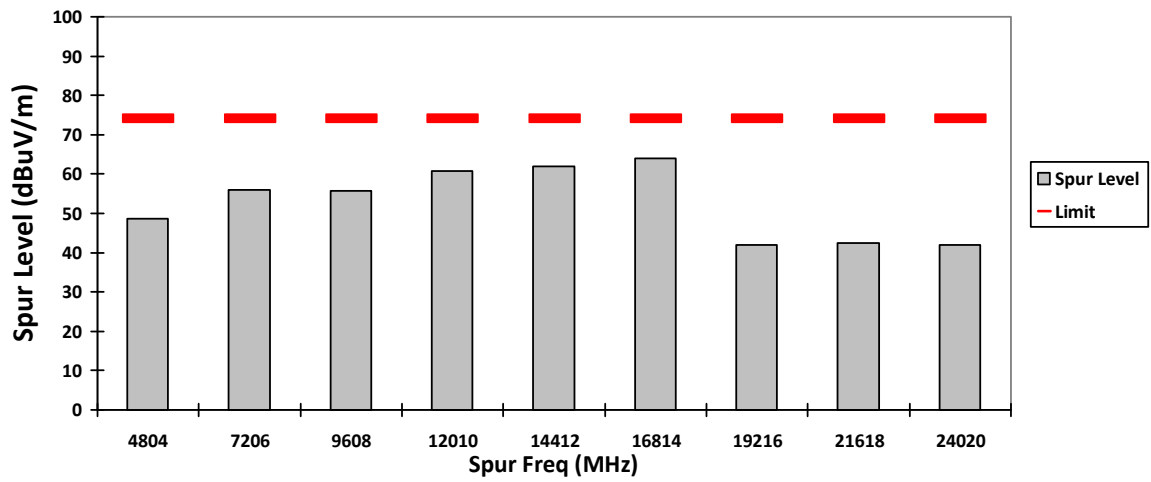


VERTICAL, AV

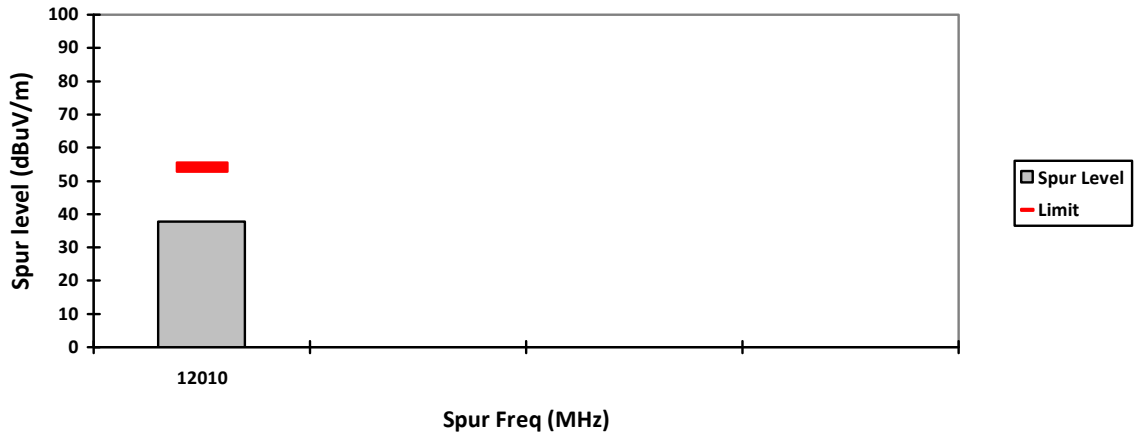


HORIZONTAL, AV

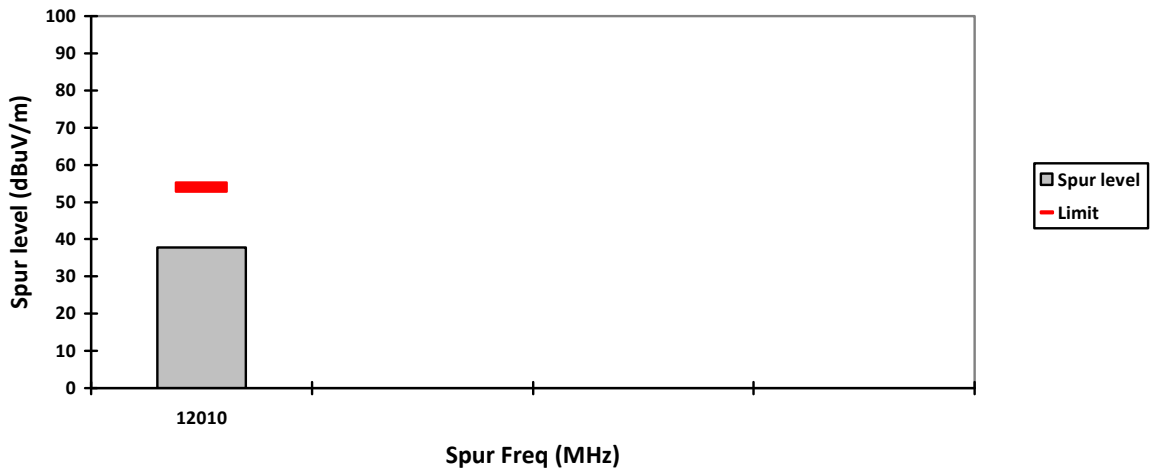


VERTICAL, QPK

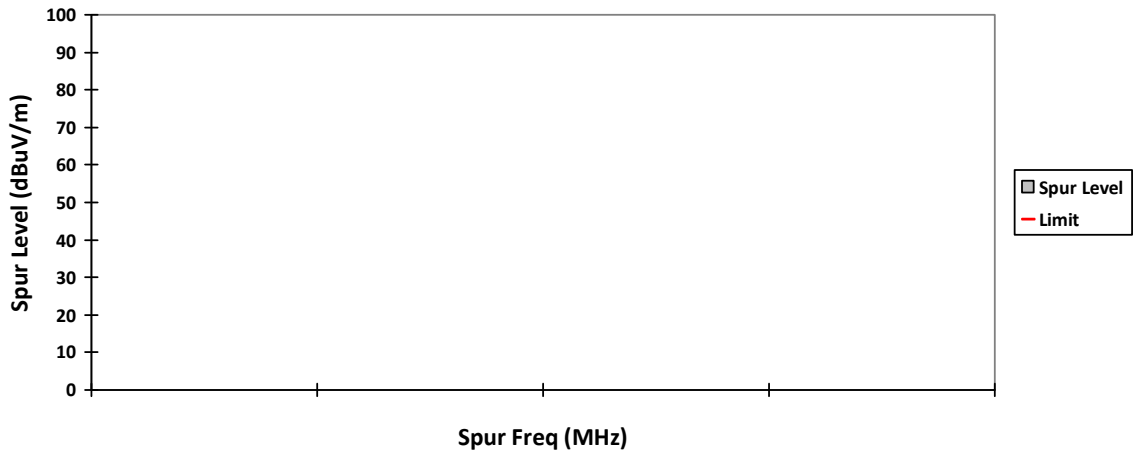


HORIZONTAL, QPK

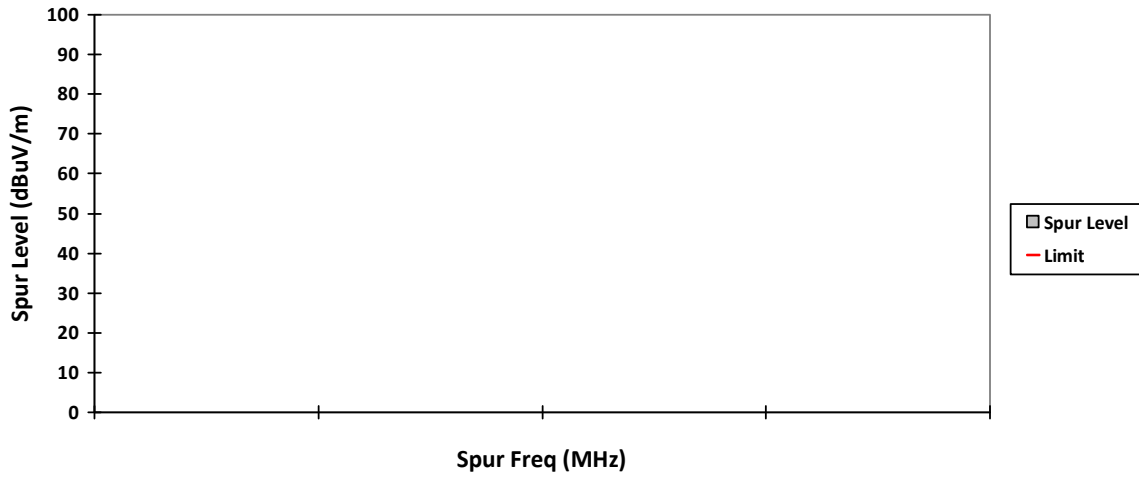


VERTICAL, PK

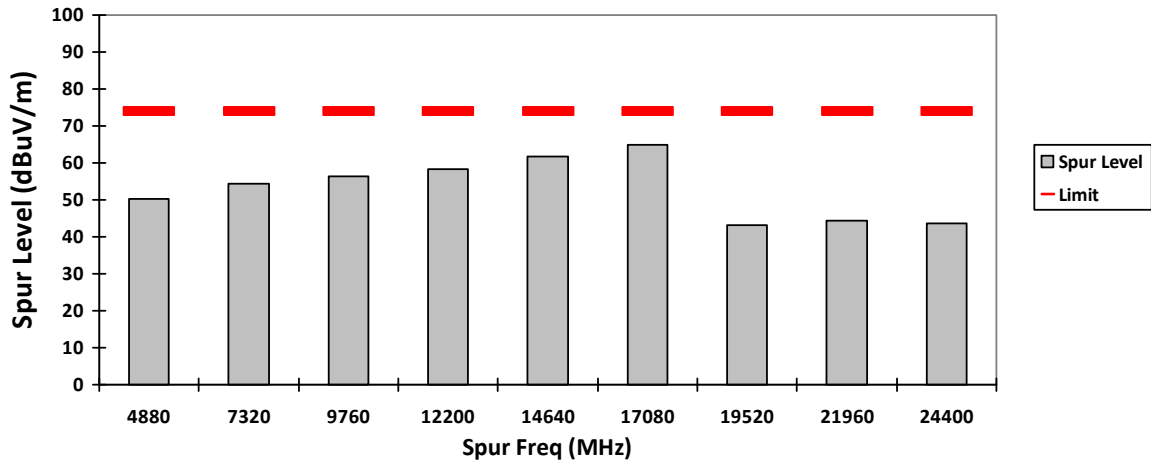


HORIZONTAL, PK

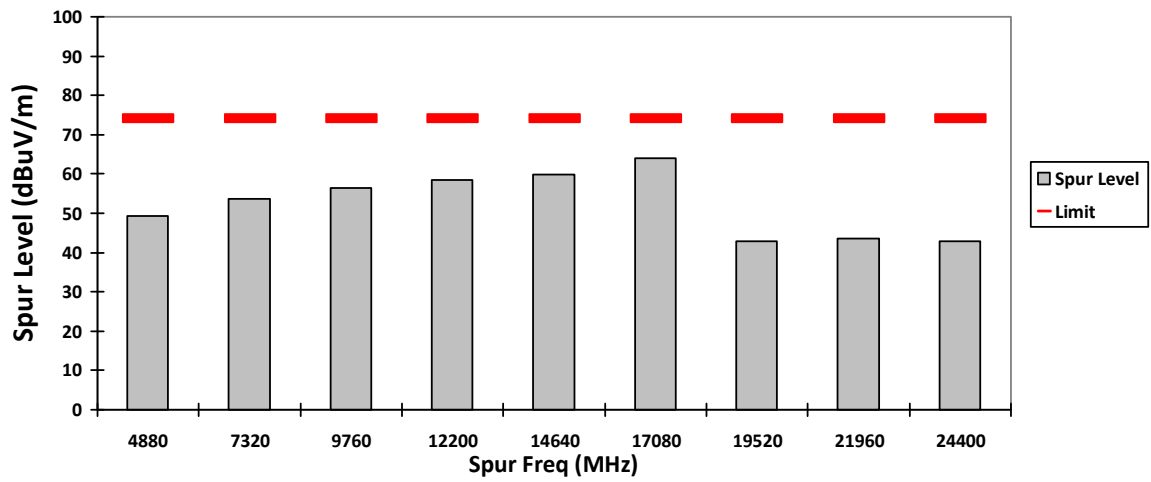

VERTICAL, AV

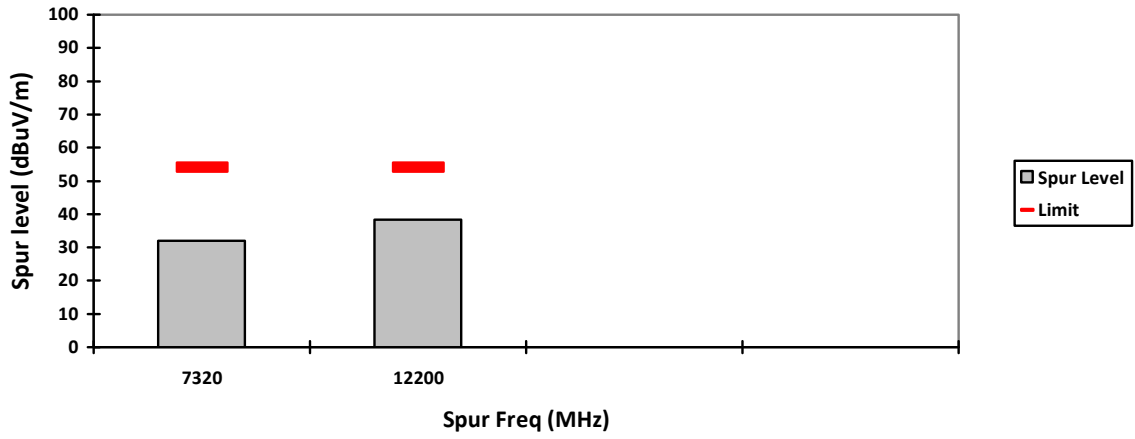


HORIZONTAL, AV

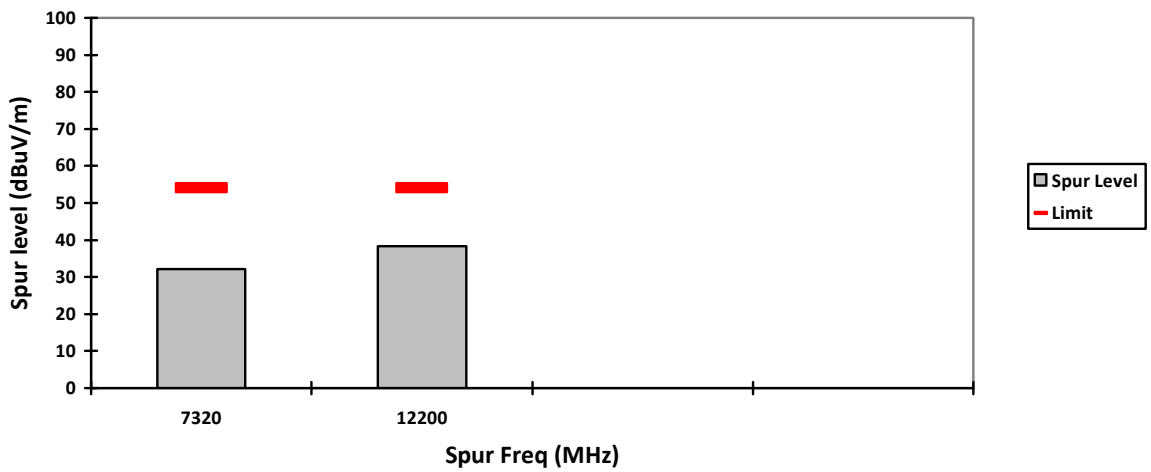

6.7 AC Powerline Conducted Emission

6.7.1 Test Setup

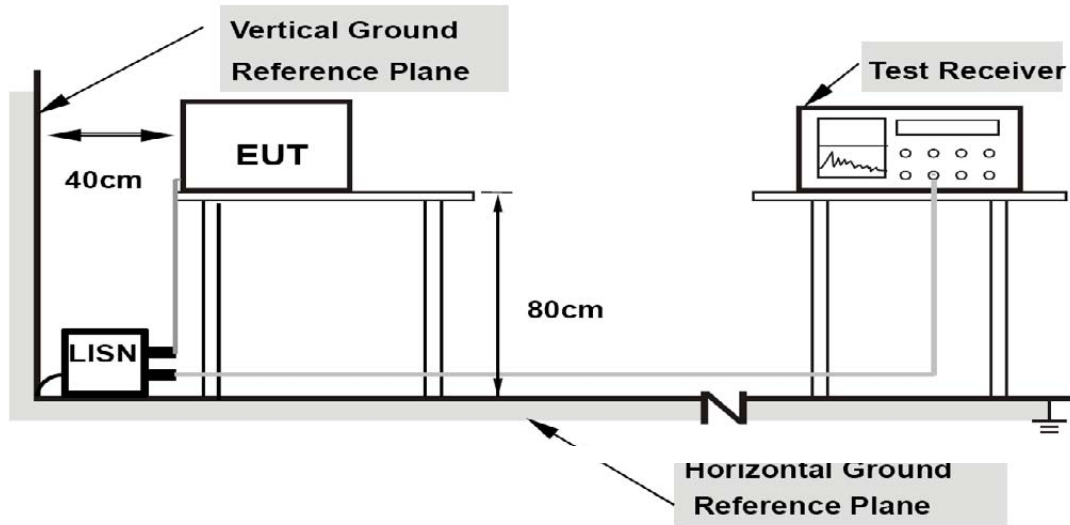

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.7.2 Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50


NOTE 1 The lower limit shall apply at the transition frequencies.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.7.3 Test Result

1) Charger + Radio in BT LE Tx (1M)

Full Spectrum

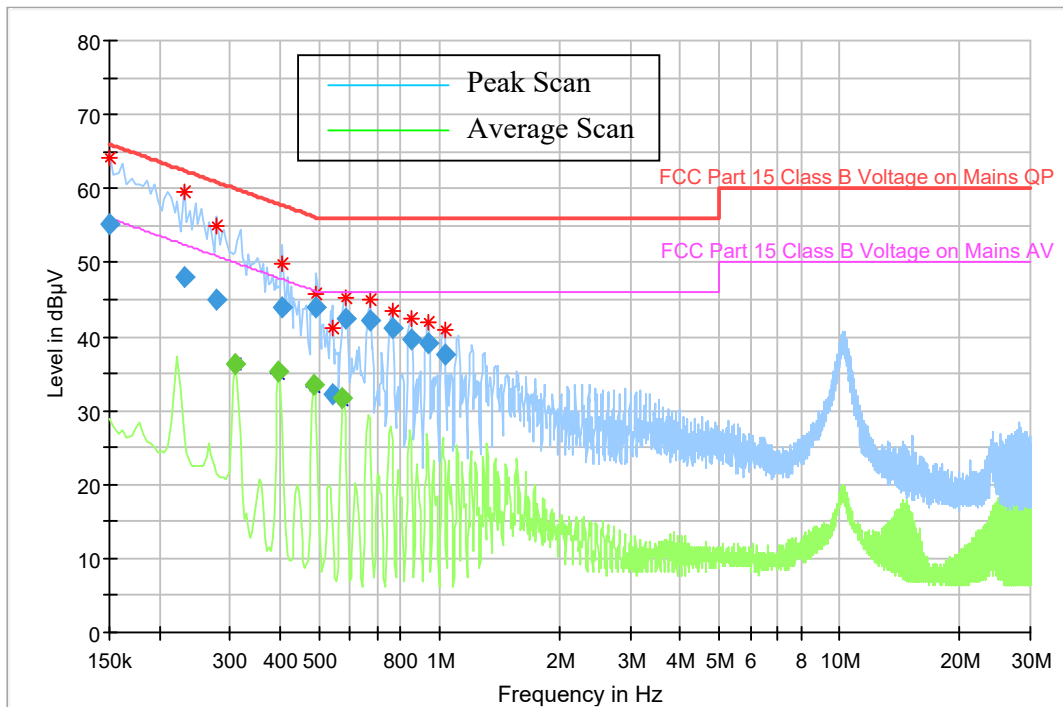


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	55.23	---	66.00	10.77	1000.0	9.000	L1	ON	10.2	PASS
0.230000	48.16	---	62.45	14.29	1000.0	9.000	L1	ON	10.2	PASS
0.278000	45.07	---	60.88	15.81	1000.0	9.000	L1	ON	10.2	PASS
0.310000	---	36.40	49.97	13.57	1000.0	9.000	L1	ON	10.1	PASS
0.398000	---	35.16	47.90	12.74	1000.0	9.000	L1	ON	10.1	PASS
0.406000	44.03	---	57.73	13.69	1000.0	9.000	L1	ON	10.1	PASS
0.486000	---	33.46	46.24	12.77	1000.0	9.000	L1	ON	10.1	PASS
0.494000	43.96	---	56.10	12.14	1000.0	9.000	L1	ON	10.1	PASS
0.542000	32.26	---	56.00	23.74	1000.0	9.000	L1	ON	10.1	PASS
0.574000	---	31.74	46.00	14.26	1000.0	9.000	L1	ON	10.1	PASS
0.582000	42.55	---	56.00	13.45	1000.0	9.000	L1	ON	10.1	PASS
0.674000	42.27	---	56.00	13.73	1000.0	9.000	L1	ON	10.1	PASS
0.762000	41.04	---	56.00	14.96	1000.0	9.000	L1	ON	10.1	PASS
0.850000	39.64	---	56.00	16.36	1000.0	9.000	L1	ON	10.1	PASS
0.942000	39.21	---	56.00	16.79	1000.0	9.000	L1	ON	10.1	PASS
1.030000	37.63	---	56.00	18.37	1000.0	9.000	L1	ON	10.1	PASS

* Expanded Uncertainty (U) = +/- 3.48d

2) Charger + Radio in BT LE Tx (2M)

Full Spectrum

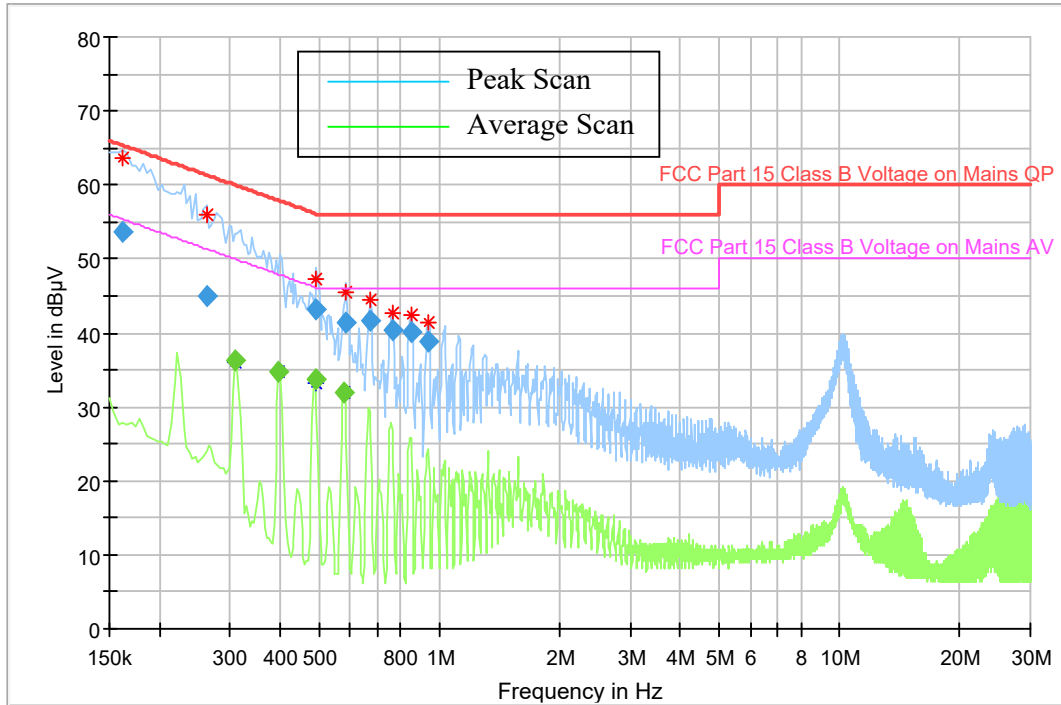

Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.162000	53.68	---	65.36	11.68	1000.0	9.000	N	ON	10.2	PASS
0.262000	45.09	---	61.37	16.28	1000.0	9.000	L1	ON	10.2	PASS
0.310000	---	36.22	49.97	13.75	1000.0	9.000	L1	ON	10.1	PASS
0.398000	---	34.82	47.90	13.08	1000.0	9.000	L1	ON	10.1	PASS
0.490000	---	33.62	46.17	12.55	1000.0	9.000	L1	ON	10.1	PASS
0.494000	43.15	---	56.10	12.95	1000.0	9.000	L1	ON	10.1	PASS
0.578000	---	32.04	46.00	13.96	1000.0	9.000	L1	ON	10.1	PASS
0.586000	41.43	---	56.00	14.57	1000.0	9.000	L1	ON	10.1	PASS
0.674000	41.74	---	56.00	14.26	1000.0	9.000	L1	ON	10.1	PASS
0.762000	40.47	---	56.00	15.53	1000.0	9.000	L1	ON	10.1	PASS
0.854000	40.17	---	56.00	15.83	1000.0	9.000	L1	ON	10.1	PASS
0.942000	38.94	---	56.00	17.06	1000.0	9.000	L1	ON	10.1	PASS

* Expanded Uncertainty (U) = +/- 3.48dB

END OF TEST REPORT