


## 1.11. Conducted Spurious Emission

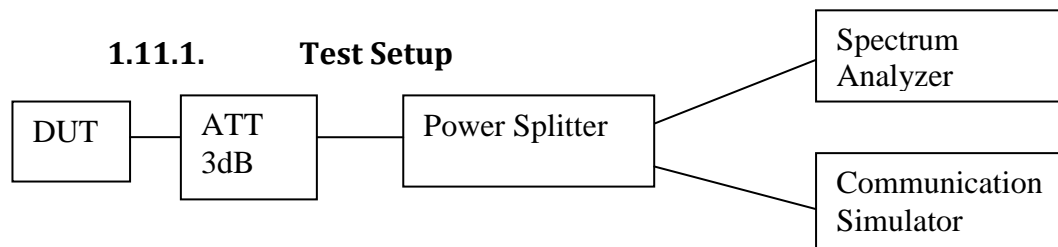



- 1) The DUT transmitter output port was connected to communication simulator with above setup.
- 2) Path loss for the measurement included.
- 3) Set DUT to transmit maximum power through communication simulator.
- 4) Spectrum Analyzer setting, RBW = 1 MHz, VBW = 3 MHz.
- 5) The spurious emission of lowest, middle and highest channels with the highest RF powers were measured.
- 6) Record the maximum trace plot into the test report.


### 1.11.2. Test Limit

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.



### 1.11.3. Conducted Spurious Emissions – LTE Band 12 (699-716MHz)


#### 1.4MHz

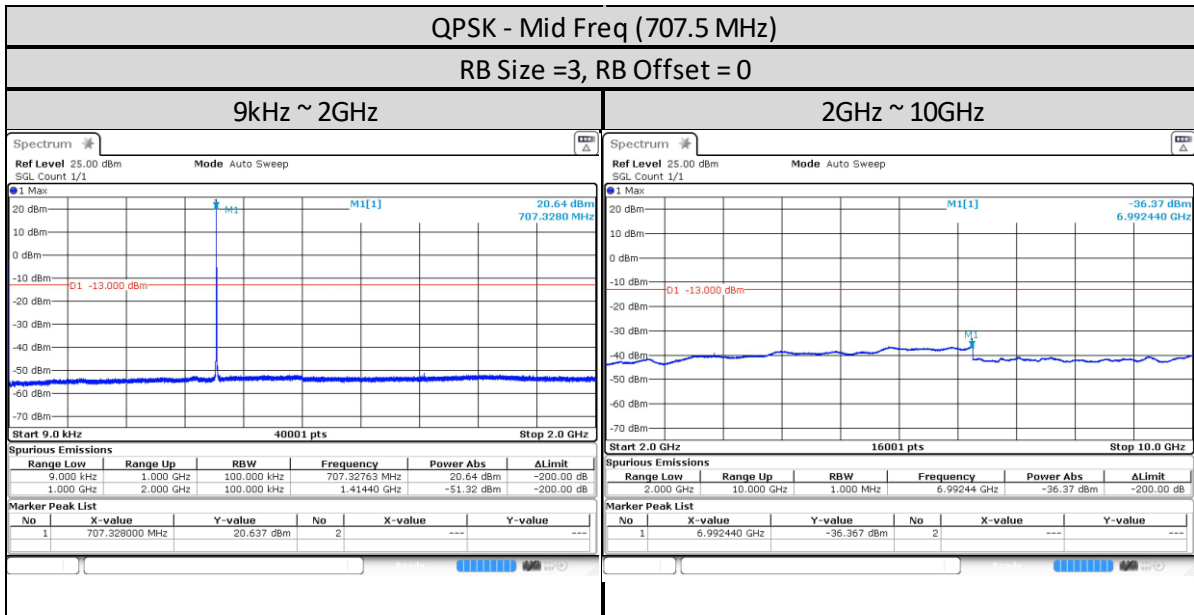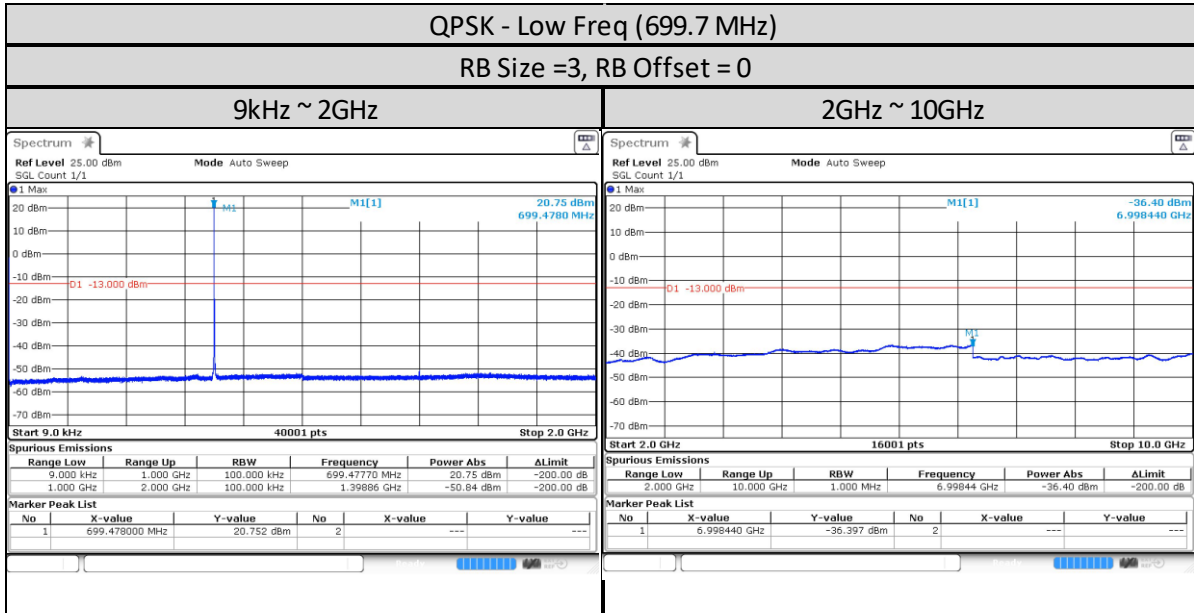


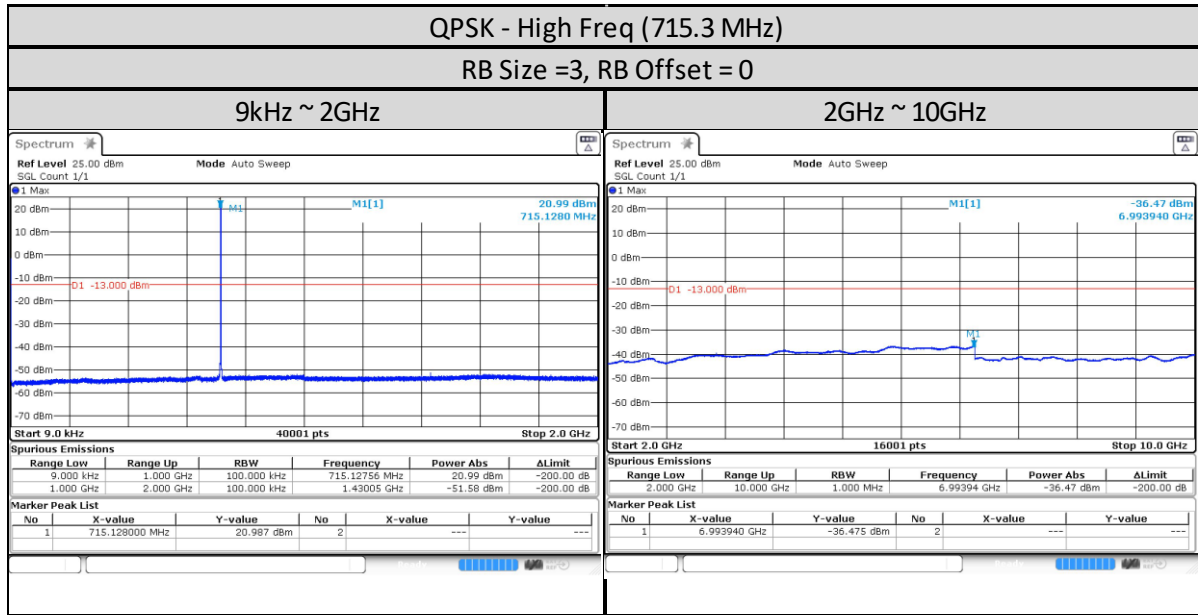


**3MHz**

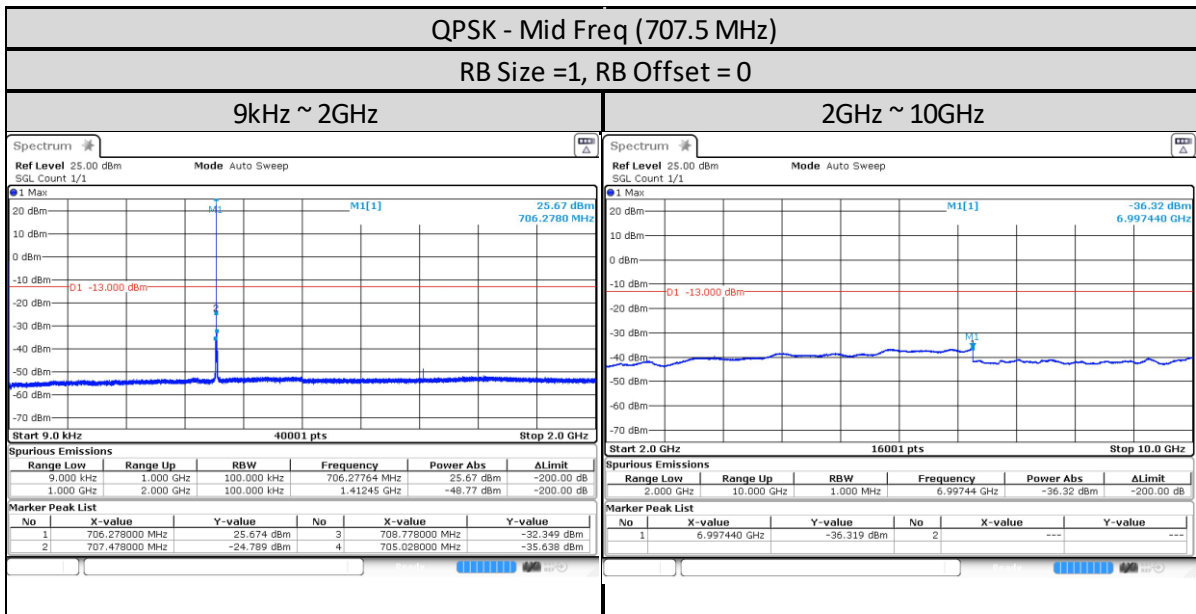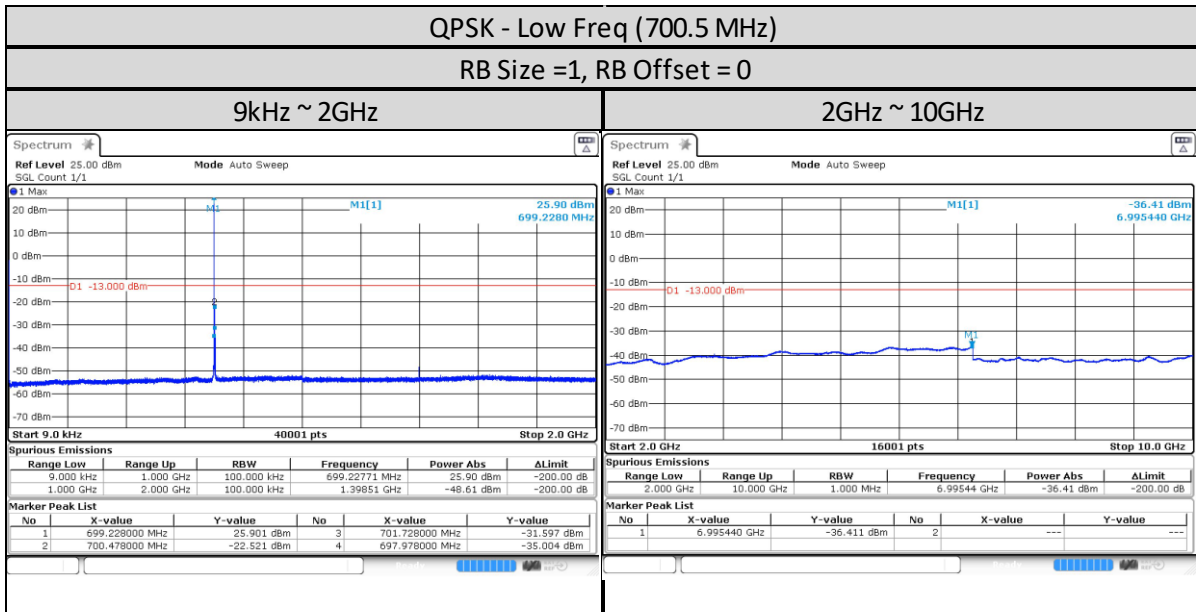


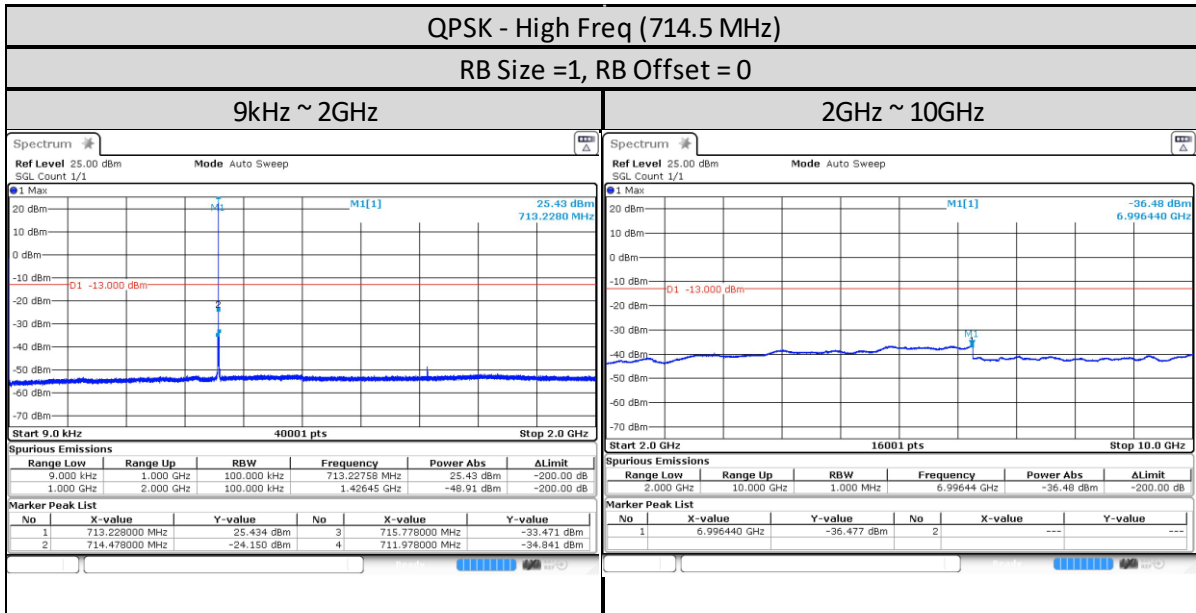

**5MHz**

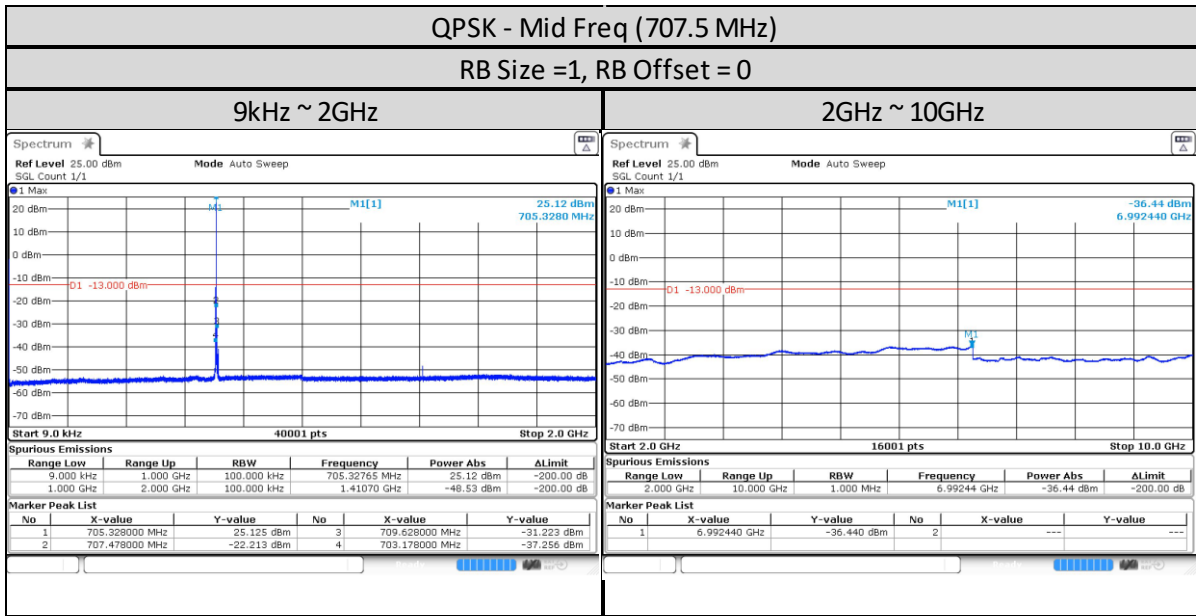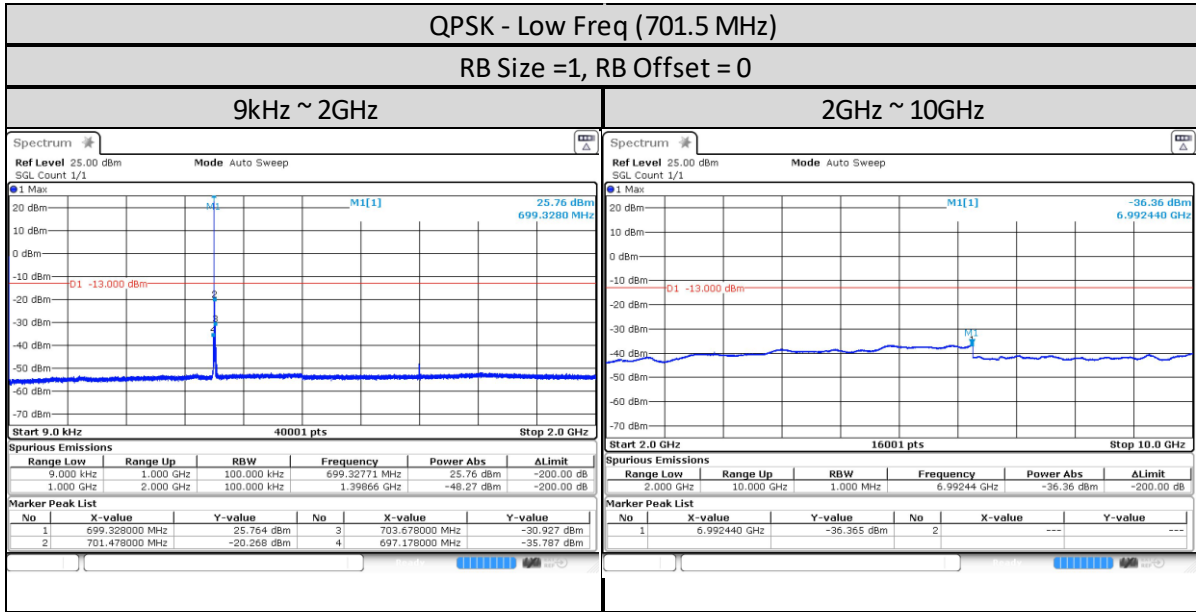



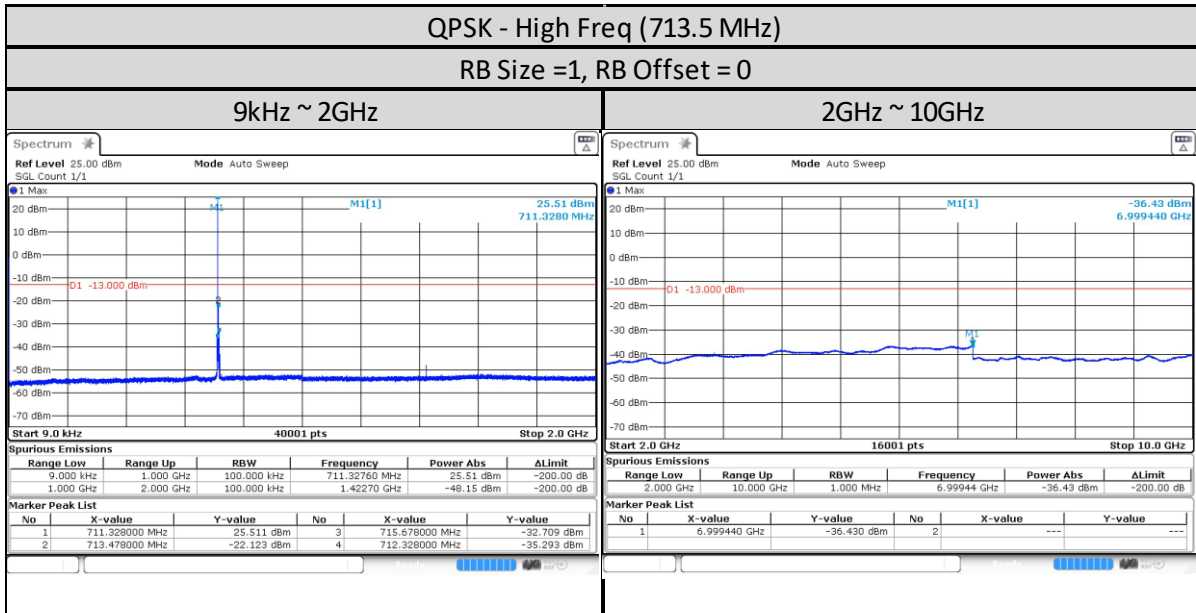

**10MHz**

