
 CERTIFICATE 2518.08  SAMM 825
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / ISED TEST REPORT Report Revision : Rev.B</p>
<p>Date/s Tested : 7-May-2023 - 22-May-2023 Report Issue Date : 23-August-2023 Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia Requestor : LIONG KOOI HAO Product Type : Accessory and Energy Product Version (PMN) : WM800 Model Number (HVIN) : PMMN4156A Frequency Band : 2.402 - 2.480 GHz Max RF Output Power : 19.95 mWatts, 17.80 mWatts Applicant Name : Motorola Solutions Inc Applicant Address : 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322 FCC Registrations : 461337 IC Registrations : MY0001 Firmware Version (FVIN) : BL: D01.00.08 ; HOST: D01.00.26 ; QCC: D01.00.26</p> <p>The equipment was tested accordance to the requirement listed below:</p> <p>(2.4GHz BT) PASS FCC 47CFR Part 15C ISED RSS 247 Issue 2, February 2017</p>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:</p> <p><i>hidayati</i></p> <hr/> <p>SITI NURHIDAYATI BINTI ABDUL HALIM Test Personnel</p>	<p>Approved Signatory:</p> <p><i>[Signature]</i></p> <hr/> <p>MAHESHVARAN A/L RAJAGOPAL Responsible Engineer</p>

Table of Contents

1.0. General Information..... 3

2.0. Summary of Test Results 4

3.0. Measurement Uncertainty 5

4.0. Equipment List..... 5

5.0. Test Mode Applicability and Test Channel Detail 6

6.0. Transmitter Test Parameters 7

 6.1. Conducted RF Output Power (Peak)..... 7

 6.1.1. Test Setup..... 7

 6.1.2. Test Limits: 7

 6.1.3. Test Data: 7

 6.2. 20dB Channel Bandwidth..... 11

 6.2.1. Test Setup..... 11

 6.2.2. Test Limits: 11

 6.2.3. Test Data: 11

 6.3. Band-edge Conducted Spurious Emission..... 15

 6.3.1. Test Setup..... 15

 6.3.2. Test Limits..... 15

 6.3.3. Test Result..... 15

 6.4. Dwell time on each channel..... 19

 6.4.1. Test Setup..... 19

 6.4.2. Test Limits: 19

 6.4.3. Test Result..... 20

 6.5. Number of hopping Frequency 24

 6.5.1. Test Setup..... 24

 6.5.2. Test Limits: 24

 6.5.3. Test Result..... 24

 6.6. Channel Separation 26

 6.6.1. Test Setup..... 26

 6.6.2. Test Limits: 26

 6.6.3. Test Result..... 26

 6.7. Conducted Spurious Emission 30

 6.7.1. Test Setup..... 30

 6.7.2. Test Limits: 30

 6.7.3. Test Data: 30

 6.8. Radiated Emission within restricted Bands 34

 6.8.1. Test Setup..... 34

 6.8.2. Test Limits: 35

 6.8.3. Test Data: 36

 6.9. AC Powerline Conducted Emission..... 83

 6.9.1. Test Setup..... 83

 6.9.2. Test Limits: 84

 6.9.3. Test Result..... 84

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	12-June-2023	Siti Nurhidayati
Rev. B	Update Emission Designator	23-August-2023	Siti Nurhidayati

1.0. General Information

EUT Description:

Technologies	2.4GHz BT
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK, Pi/4 DQPSK,8DPSK
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	ANTENNA, STAMPED METAL,BLUETOOTH ANTENNA

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BATTERY PACK,BATT LIION IP68 2050T	MOTOROLA	PMNN4846A
Charging Cable	MOTOROLA	CB000756A01
Standard AC Power Supply	MOTOROLA	PS000040A01
IMPRES 2 5650 mAh Battery	MOTOROLA	NNTN9089A
CHARGER, SINGLE-UNIT, IMPRES G2, RADIONEXT, BASE ONLY	MOTOROLA	NNTN9178A

Channel number and frequency information:

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
 KDB 558074 D01 15.247 Meas Guidance v05
 ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

2.0. Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (b)(1)	RSS-247 5.4(b)	Conducted RF Output Power (Peak)	Pass	Highest output power: 11.902 dBm (15.495 mW)	CAB23WMA0053	Hidayati
15.247 (a)(1)	RSS-247 5.1(a) RSS-247 5.1(b)	(1) 20dB Channel Bandwidth (2) Channel Separation	Pass	GFSK – 0.878MHz (8K78F1D) Pi/4 DQPSK – 1.191MHz (1M19G1D) 8DPSK – 1.188MHz (1M19G1D)	CAB23WMA0053	Hidayati
15.247(a)(1)(iii)	RSS-247 5.1(d)	Number of hopping Frequency used	Pass	Meet the limit requirement.	CAB23WMA0053	Hidayati
15.247(a)(1)(iii)	RSS-247 5.1(d)	Dwell time on each channel	Pass	Meet the limit requirement.	CAB23WMA0053	Hidayati
15.247 (d)	RSS-247 5.5	Band Edge Conducted Spurious Emission	Pass	Worst case emission: -40.80 dB	CAB23WMA0053	Hidayati
15.247 (d)	RSS-247 5.5	Conducted Spurious Emission	Pass	Worst case emission: -50.12 dBm	CAB23WMA0053	Hidayati
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: RBE: 46.3847 dBuV/m (margin: 7.6153 dB) RSE: 27.9885 dBuV/m (margin: 12.0115 dB)	PMMN4156A-CF9	Nazrin & Qawiman
15.207	RSS-Gen 8.8	AC Powerline Conducted Emission	NA	Meet the limit requirement.	NA	NA
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA	NA

3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 40GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0. Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.11_R2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92003820	8-Jul-22	8-Jul-23
ANALYZER SPECTRUM (PSA 3Hz-26.5GHz)	E4440A	US45303111	22-Jul-22	22-Jul-23
POWER SUPPLY (0-20V / 0-25A)	6652A	3640A02967	19-Oct-22	19-Oct-23

Radiated Emission Station (SW Version: EMC_FCC_RE_v1.6.5)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	1143	8-Mar-23	8-Mar-25
DRG HORN FREQ.	SAS-571	1027	3-Jun-22	3-Jun-23
DC POWER SUPPLY	N7976A	MY53410110	30-Jun-22	30-Jun-23
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101731	5-Oct-22	5-Oct-23
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112B	2863	22-Jun-22	22-Jun-23
BILOG ANTENNA	CBL6112D	55546	23-Jun-22	23-Jun-23
DATA LOGGER THERMOHYGROMETER	SDL500	A.016785	23-Jun-22	23-Jun-23
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	18-Aug-22	18-Aug-23
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	2	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118P	361	11-Sep-20	11-Sep-23
LOOP ANTENNA	6502	208416	12-Oct-22	12-Oct-23

5.0. Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Test Mode	0 to 78	0,39,78	FHSS	GFSK, Pi/4 DQPSK,8DPSK	22.8°C, 70.1%RH

Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Test Mode	0 to 78	0,39,78	FHSS	GFSK, Pi/4 DQPSK,8DPSK	22.8°C, 70.1%RH

Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

NAEUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Application Mode	0 to 78	AUTO	FHSS	AUTO	NA

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Environmental Conditions
Test Mode	0 to 78	0,39,78	FHSS	GFSK, Pi/4 DQPSK,8DPSK	25°C, 54.8%RH

6.0. Transmitter Test Parameters

6.1. Conducted RF Output Power (Peak)

6.1.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and set EUT to transmit maximum data rate with hopping disable.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = > 20 dB bandwidth
 - b. VBW = RBW
 - c. Detector mode = Peak
 - d. AMPLITUDE → Scale/Div = 10 dB
 - e. Trace = Max hold
 - f. Sweep = auto
- e) Measure the captured power within the band and recording the plot.
- f) Repeat above procedure with other different mode of operation.


6.1.2. Test Limits:

Normal Condition (25 ° C)
≤ 125mW (or 20.9dBm)


6.1.3. Test Data:

Test Conditions		Test Frequency (GHz)	Results	
Modulation	Voltage(V)		dBm	Status
GFSK	3.70	2.4020	11.902	Pass
		2.4410	11.688	Pass
		2.4800	11.170	Pass
Pi/4DQPSK	3.70	2.4020	11.246	Pass
		2.4410	10.993	Pass
		2.4800	10.454	Pass
8DPSK	3.70	2.4020	11.642	Pass
		2.4410	11.420	Pass
		2.4800	10.891	Pass


The Conducted RF Output Power test with result at low frequency, GFSK.

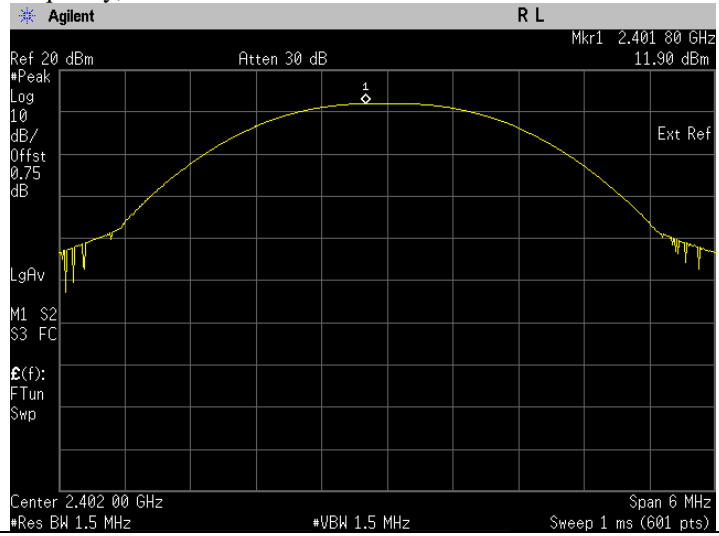


The Conducted RF Output Power test with result at mid frequency, GFSK.

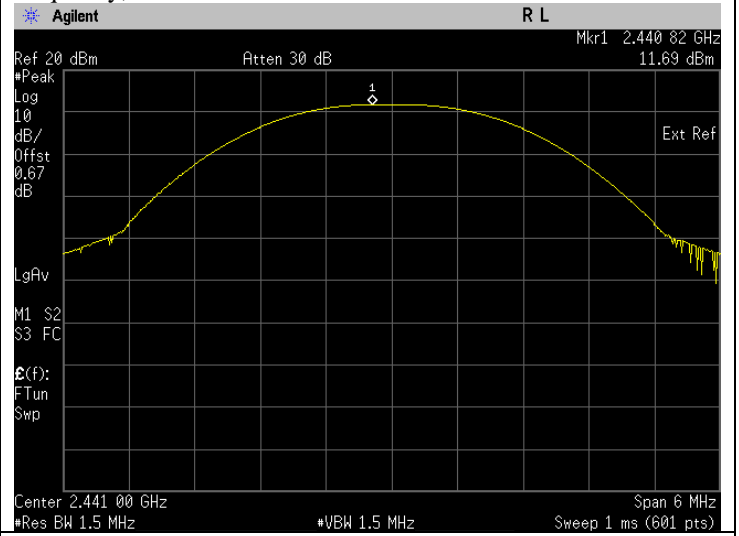


The Conducted RF Output Power test with result at high frequency, GFSK.

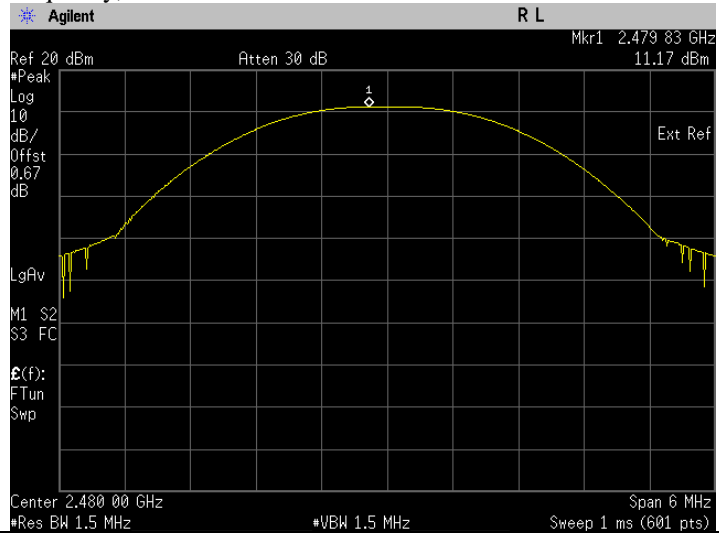


The Conducted RF Output Power test with result at low frequency, Pi/4 DQPSK.

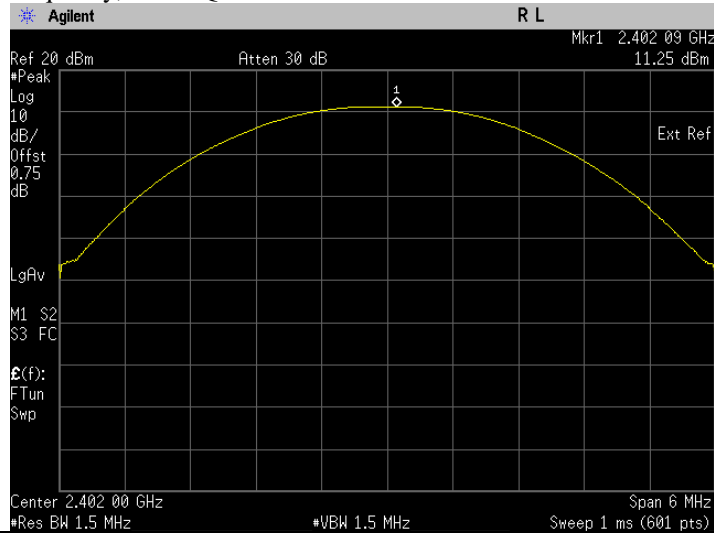


The Conducted RF Output Power test with result at mid frequency, Pi/4 DQPSK.

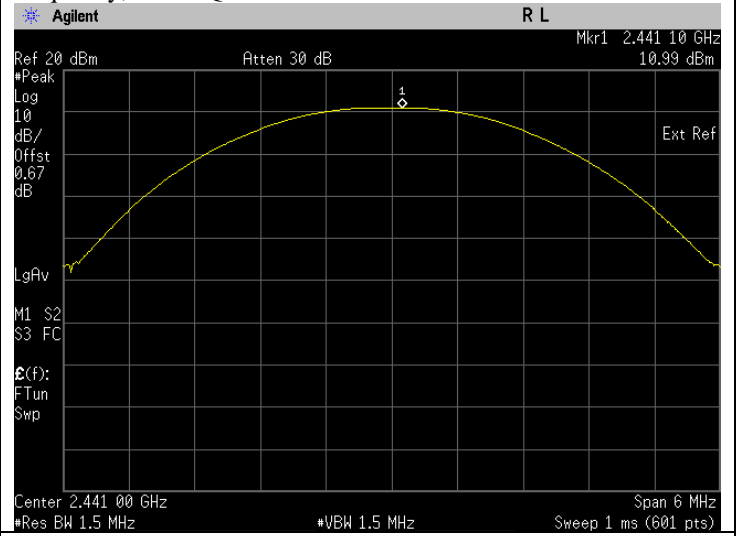


The Conducted RF Output Power test with result at high frequency, Pi/4 DQPSK.

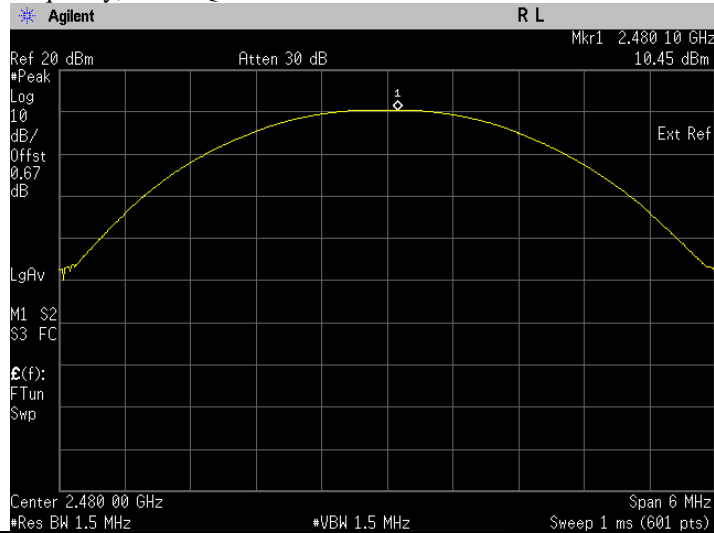


The Conducted RF Output Power test with result at low frequency, 8DPSK.

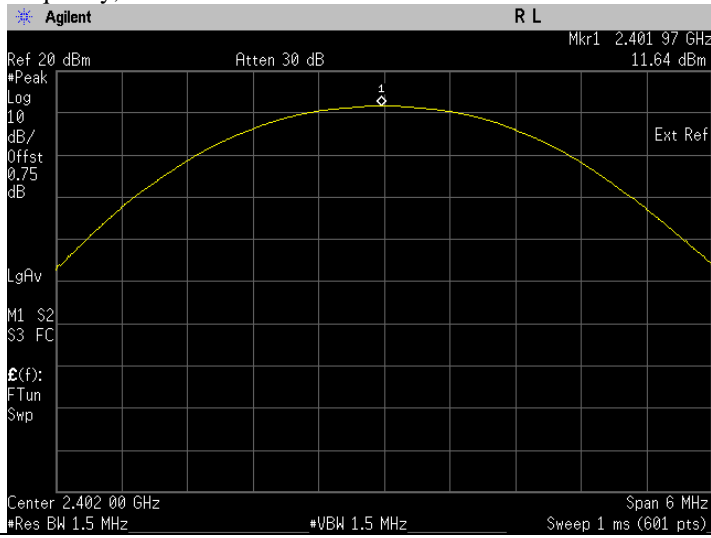

The Conducted RF Output Power test with result at mid frequency, 8DPSK.

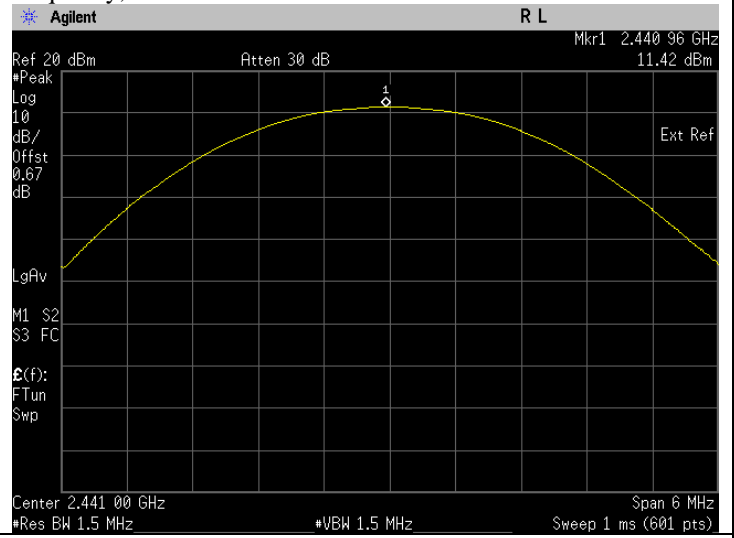


The Conducted RF Output Power test with result at high frequency, 8DPSK.

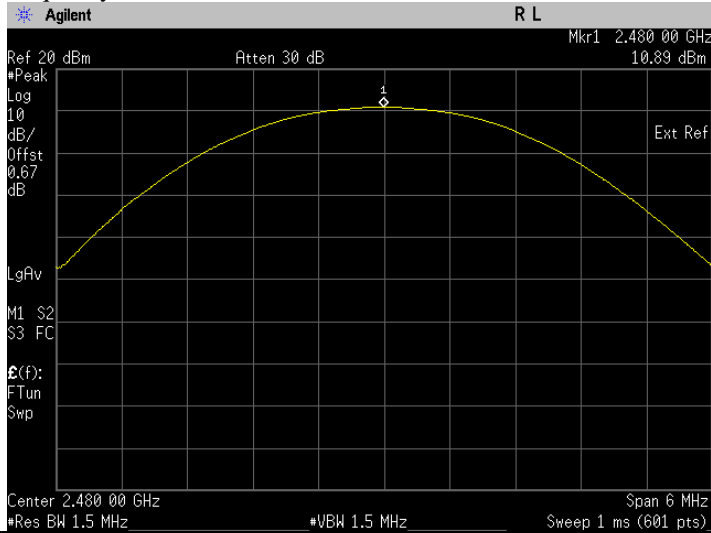

6.2. 20dB Channel Bandwidth

6.2.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and set EUT to transmit maximum data rate with hopping disable.
- c) Connect EUT’s antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 30 kHz
 - b. VBW = 100 kHz
 - c. SPAN = 3 MHz, center on test frequency
 - d. AMPLITUDE → Scale/Div = 10 dB
 - e. Detector mode = Peak
 - f. Trace = Max hold
 - g. Sweep = auto
- e) Measure the freq different of two frequencies that were attenuated 20dB from peak of the emission & record the frequency difference as the emission bandwidth.
- f) Save the plot result from spectrum analyzer screen.
- g) Repeat above procedure with other different mode of operation.


6.2.2. Test Limits:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


6.2.3. Test Data:

Test Conditions		Test Frequency TX (GHz)	Results (MHz)		
Modulation Type	Voltage(V)		20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Status
GFSK	3.70	2.4020	0.960	0.872	Pass
		2.4410	0.967	0.878	Pass
		2.4800	0.957	0.865	Pass
Pi/4 DQPSK	3.70	2.4020	1.337	1.187	Pass
		2.4410	1.337	1.188	Pass
		2.4800	1.341	1.191	Pass
8DPSK	3.70	2.4020	1.309	1.188	Pass
		2.4410	1.306	1.187	Pass
		2.4800	1.305	1.187	Pass


i. The 20 dB BW & occupied bandwidth test with result at low frequency, GFSK.

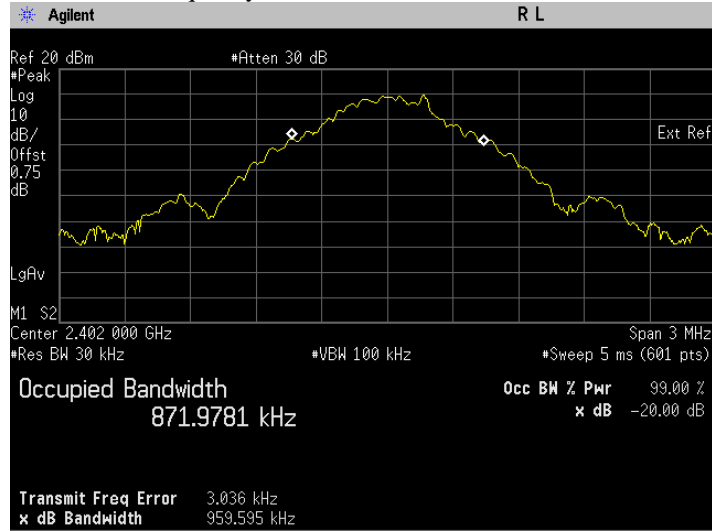


ii. The 20 dB BW & occupied bandwidth test with result at mid frequency, GFSK.

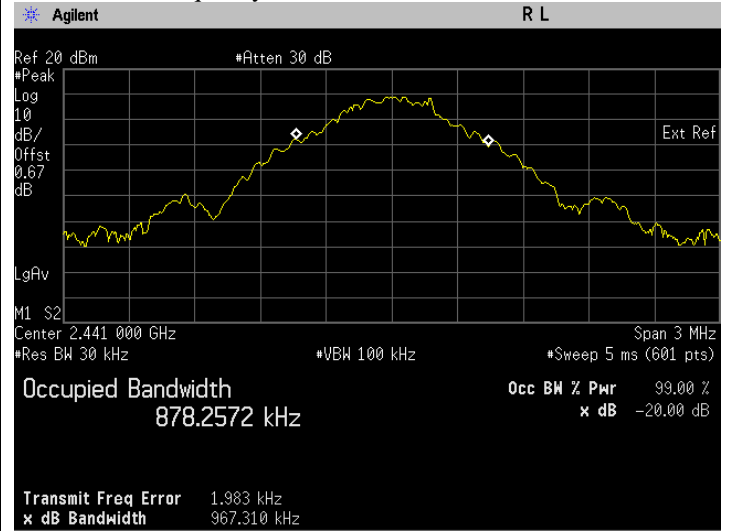


iii. The 20 dB BW & occupied bandwidth test with result at high frequency, GFSK.

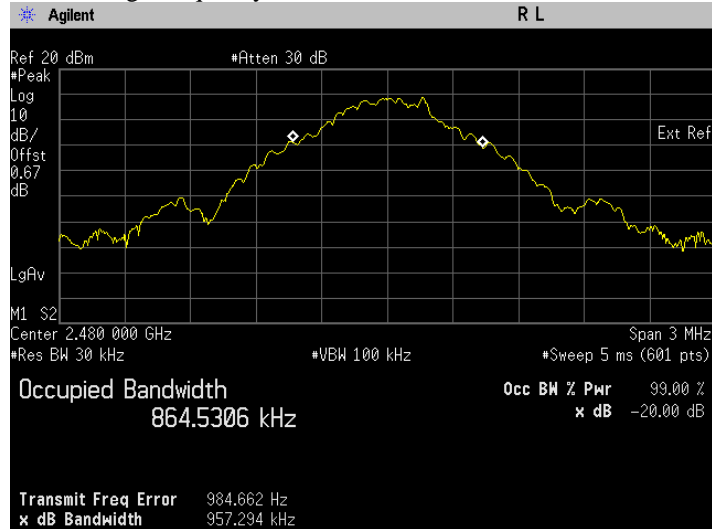


i. The 20 dB BW & occupied bandwidth test with result at low frequency, Pi/4 DQPSK.

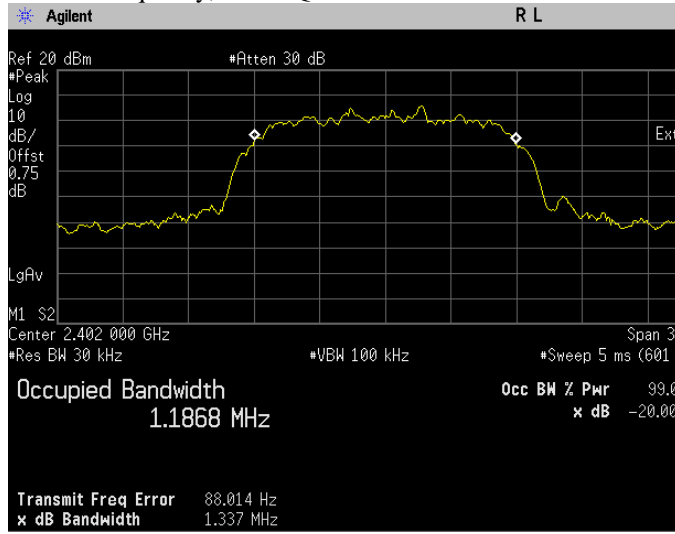


ii. The 20 dB BW & occupied bandwidth test with result at mid frequency, Pi/4 DQPSK.

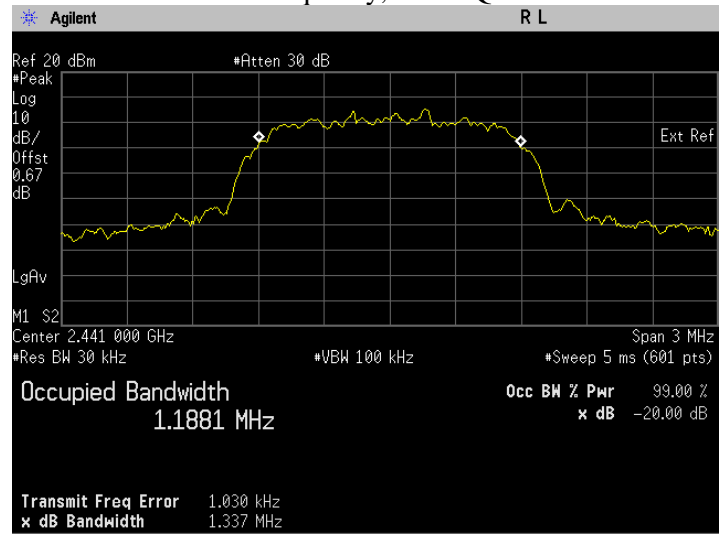


iii. The 20 dB BW & occupied bandwidth test with result at high frequency, Pi/4 DQPSK.

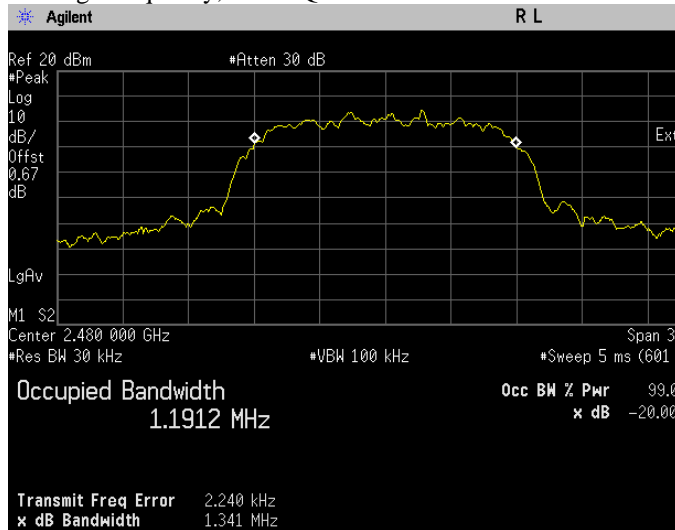


i. The 20 dB BW & occupied bandwidth test with result at low frequency, 8DPSK.

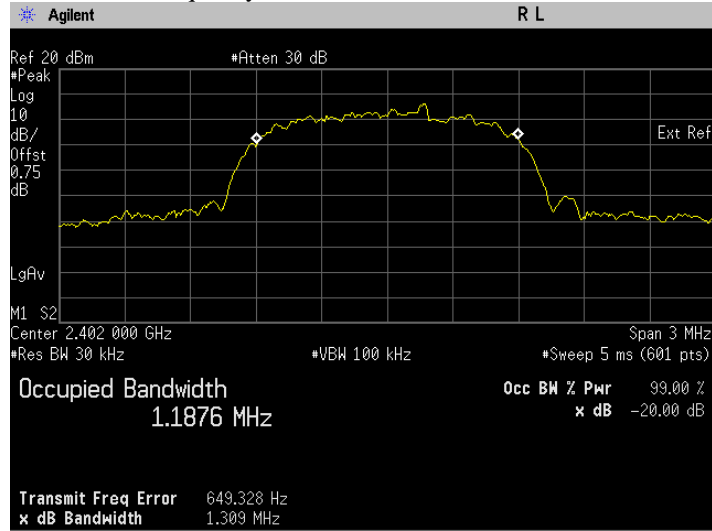

ii. The 20 dB BW & occupied bandwidth test with result at mid frequency, 8DPSK.

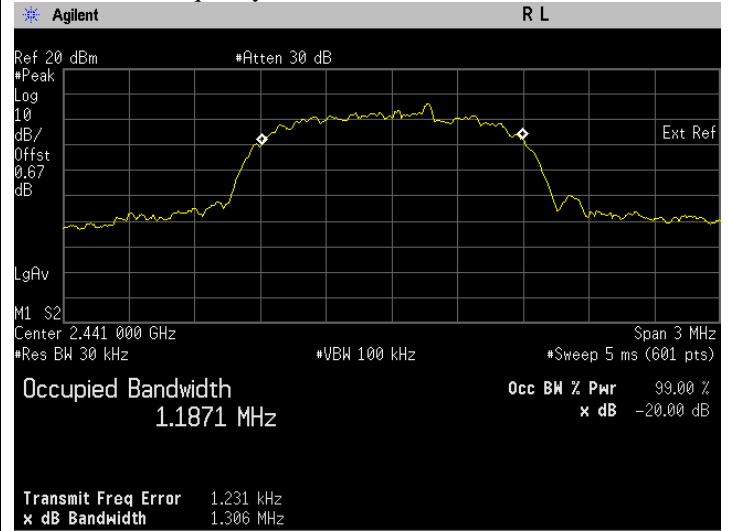


iii. The 20 dB BW & occupied bandwidth test with result at high frequency, 8DPSK.

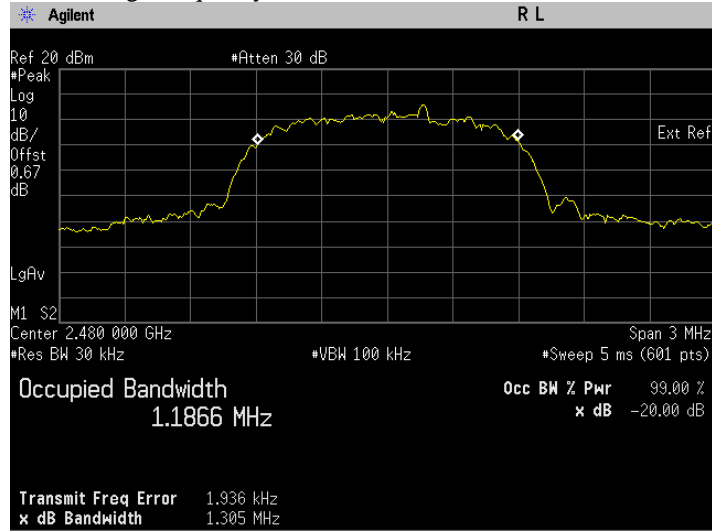

6.3. Band-edge Conducted Spurious Emission

6.3.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and keep the EUT in hopping mode.
- c) Connect EUT’s antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. SPAN = 4 MHz (Low channel) or 6MHz(High Channel)
 - d. Detector mode = Peak
 - e. AMPLITUDE → Scale/Div = 10 dB
 - f. Trace = Max hold
 - g. Sweep = auto
- e) Measure the captured band edge emission result and recording the plot.
- f) Repeat above on EUT with hopping disable.
- g) Repeat above procedure with other different test frequency.


6.3.2. Test Limits

Normal Condition (25 ° C)
Shall be at least 20 dB below the peak power.


6.3.3. Test Result

Test Conditions		Hopping Method	Test Frequency(GHz)	Results	
Modulation	Voltage(V)			dB	Status
GFSK	3.70	Enabled (continuously)	2.4020	-47.96	Pass
			2.4800	-49.64	Pass
		Disabled (constantly)	2.4020	-40.80	Pass
			2.4800	-49.57	Pass
Pi/4 DQPSK	3.70	Enabled (continuously)	2.4020	-46.77	Pass
			2.4800	-53.52	Pass
		Disabled (constantly)	2.4020	-44.62	Pass
			2.4800	-52.97	Pass
8DPSK	3.70	Enabled (continuously)	2.4020	-45.30	Pass
			2.4800	-51.44	Pass
		Disabled (constantly)	2.4020	-44.28	Pass
			2.4800	-51.10	Pass


i. The highest band edge emission at low carrier frequency with hopping function enabled, GFSK

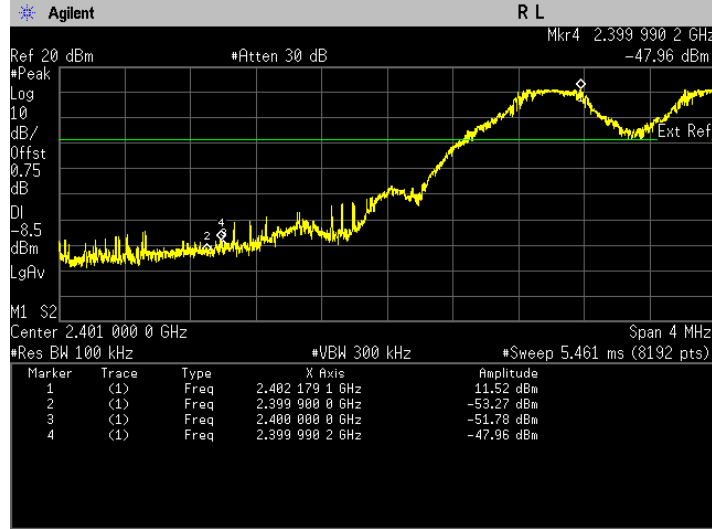


ii. The highest band edge emission at high carrier frequency with hopping function enabled, GFSK

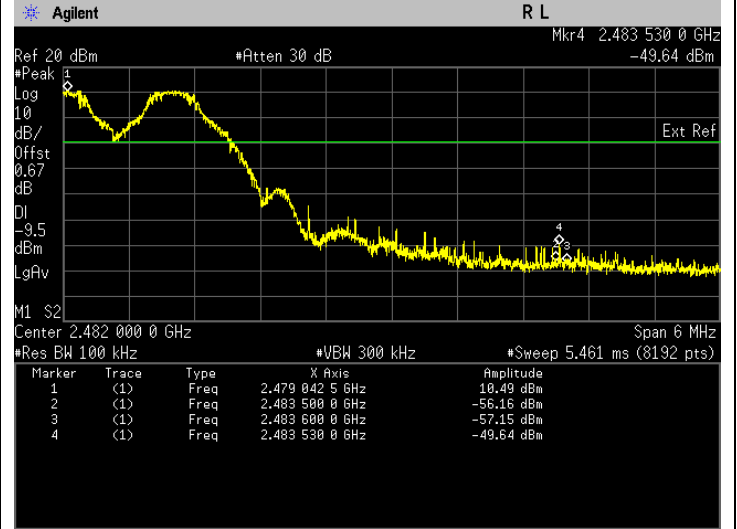


iii. The highest band edge emission at low carrier frequency with hopping function disabled, GFSK

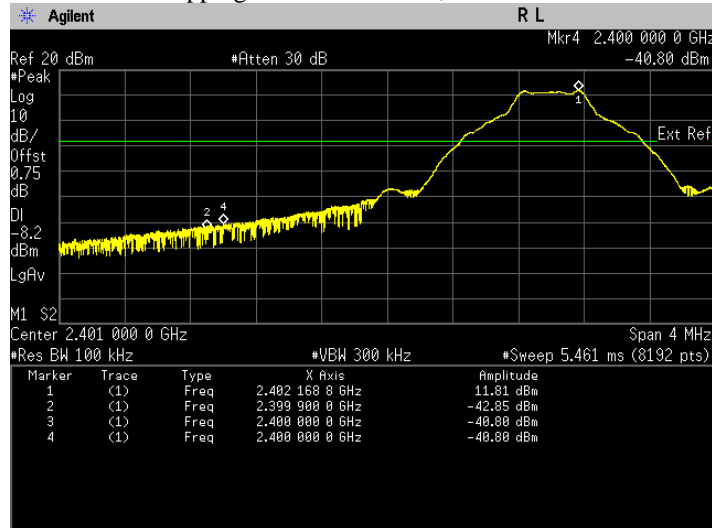


iv. The highest band edge emission at high carrier frequency with hopping function disabled, GFSK

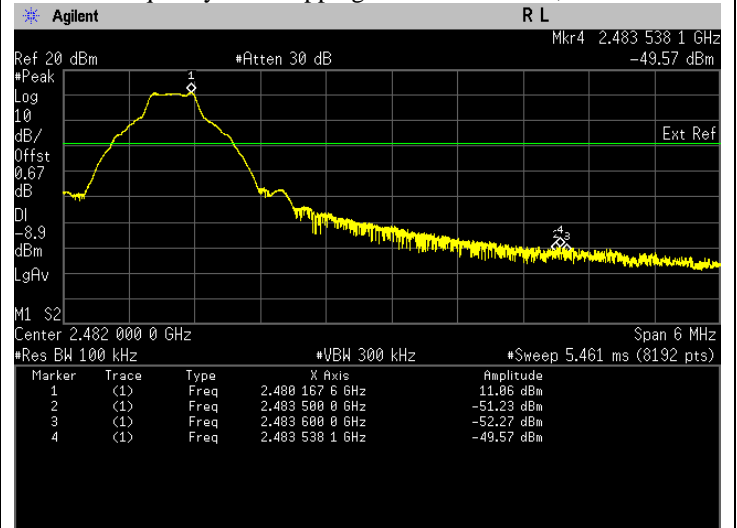


i. The highest band edge emission at low carrier frequency with hopping function enabled, Pi/4 DQPSK

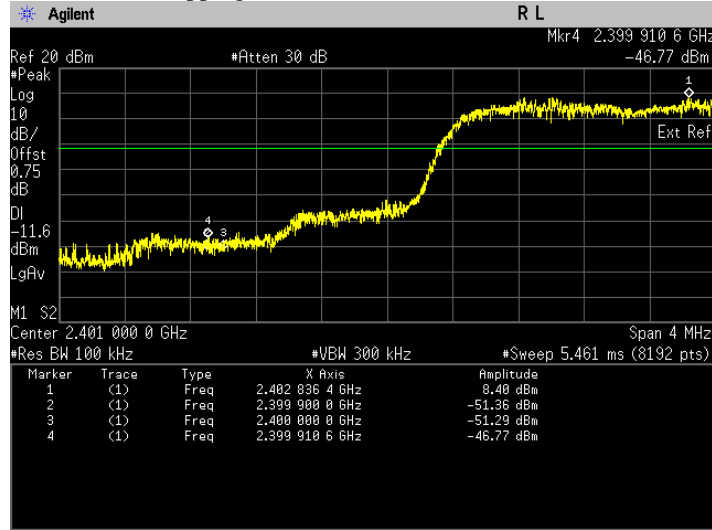


ii. The highest band edge emission at high carrier frequency with hopping function enabled, Pi/4 DQPSK

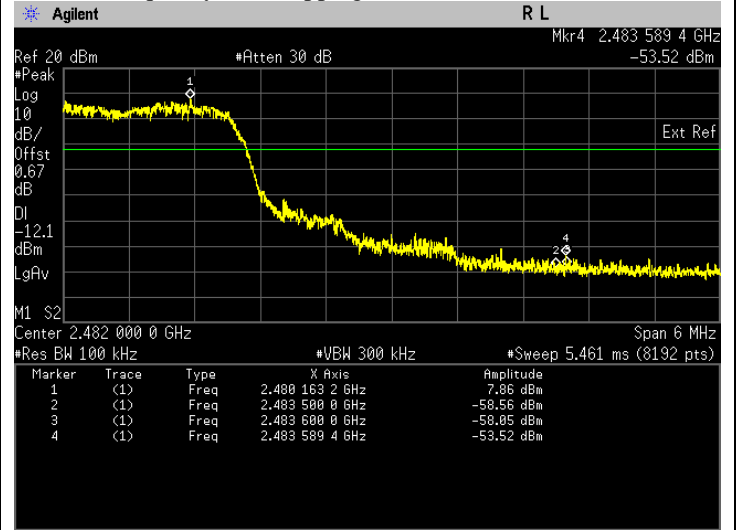


iii. The highest band edge emission at low carrier frequency with hopping function disabled, Pi/4 DQPSK

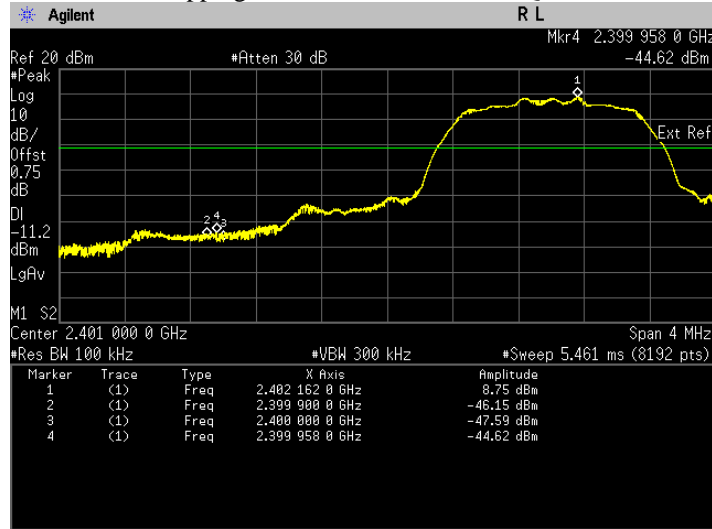


iv. The highest band edge emission at high carrier frequency with hopping function disabled, Pi/4 DQPSK

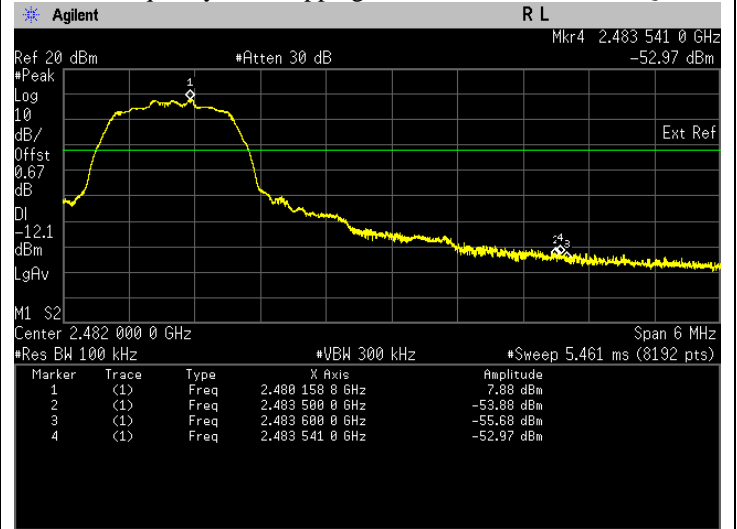


i. The highest band edge emission at low carrier frequency with hopping function enabled, 8DPSK

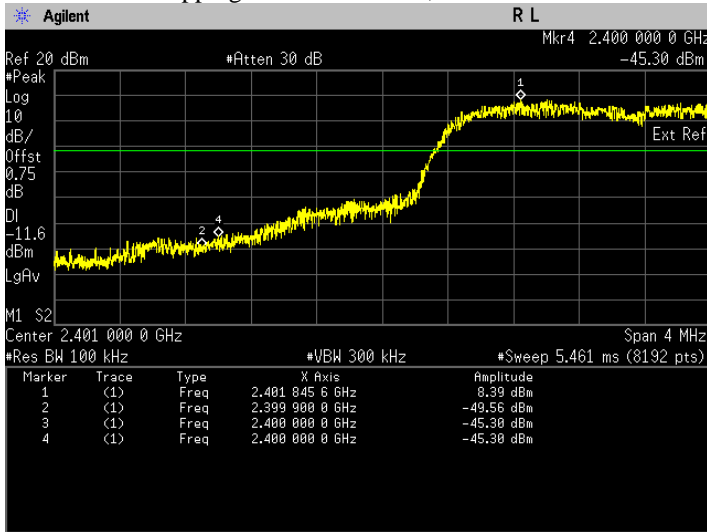


ii. The highest band edge emission at high carrier frequency with hopping function enabled, 8DPSK

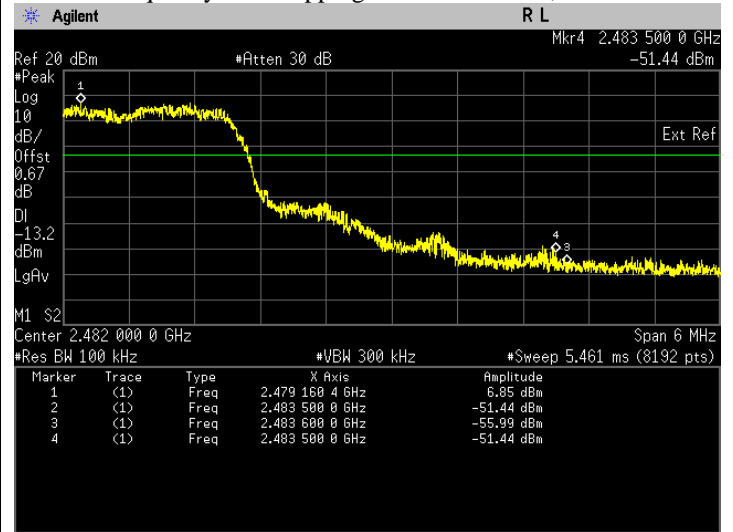

iii. The highest band edge emission at low carrier frequency with hopping function disabled, 8DPSK

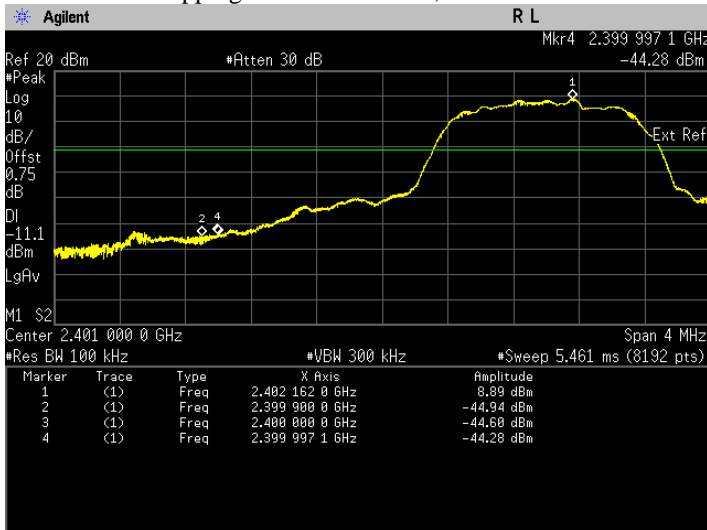


iv. The highest band edge emission at high carrier frequency with hopping function disabled, 8DPSK

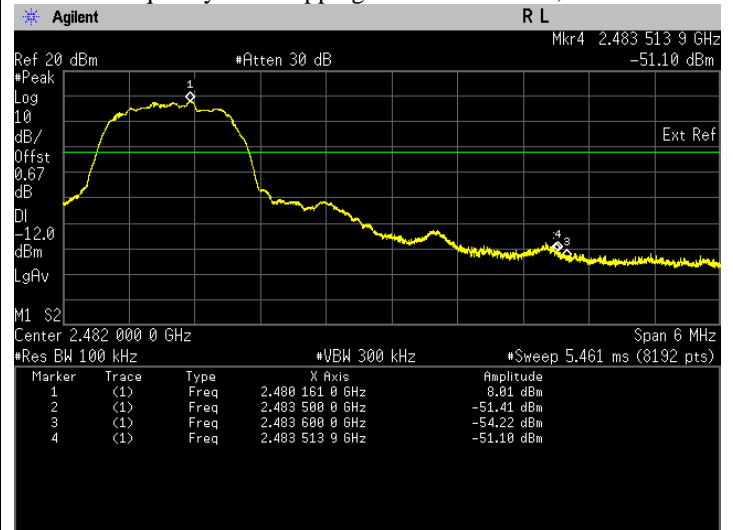

6.4. Dwell time on each channel

6.4.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and keep the EUT in hopping mode.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. SPAN = Zero SPAN, center on hopping frequency
 - d. Detector mode = Peak
 - e. Trace = Max hold
 - f. Sweep time = 5second
 - g. Sweep = Single
- e) Measure total numbers of transmissions occur in 5 second and save the plot.
- f) Change the setting of spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Sweep time = sufficient to capture dwell time for 1 transmission
 - d. Sweep = Single
- g) Measure dwell time for 1 transmission and save the plot.
- h) Calculate accumulate dwell time in a given period equal to number of hopping frequencies x 0.4
- i) Repeat above procedure with other different mode of operation.

6.4.2. Test Limits:



Normal Condition (25 ° C)
≤ 400ms

6.4.3. Test Result



Test Conditions			Data Package	Results			
Modulation	Voltage (V)	Test Frequency (GHz)		No. of transmission in 5s (a)	Dwell time in one transmission (b) (msec)	Total accumulate dwell time in 31.6s. (c) (msec)	Status
GFSK	3.70	2.4410	DH1	52	0.403	132.441920	Pass
			DH3	25	1.659	262.122000	Pass
			DH5	14	2.907	257.211360	Pass
Pi/4 DQPSK	3.70		DH1	51	0.408	131.506560	Pass
			DH3	24	1.660	251.788800	Pass
			DH5	14	2.908	257.299840	Pass
8 DPSK	3.70		DH1	51	0.407	131.184240	Pass
			DH3	27	1.659	283.091760	Pass
			DH5	13	2.910	239.085600	Pass

****Note:** Total dwell time 31.6s (79Hopping*0.4), (c) = (a) x 6.32 x (b)



i. Dwell Time at DH1, GFSK

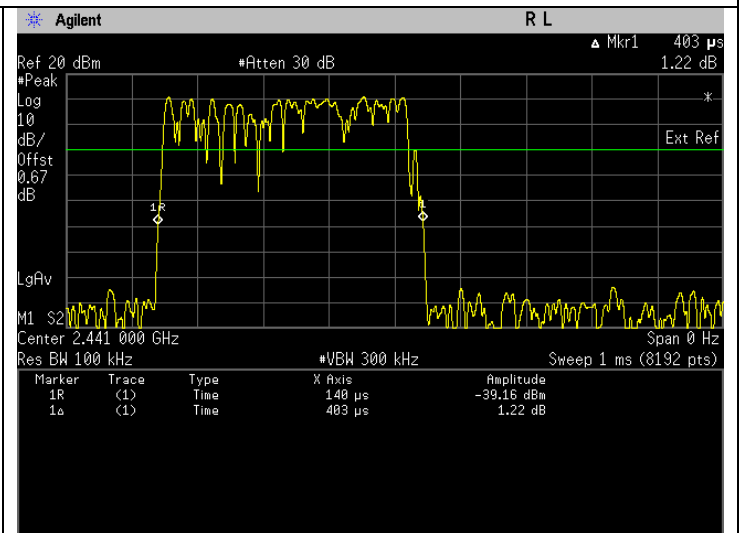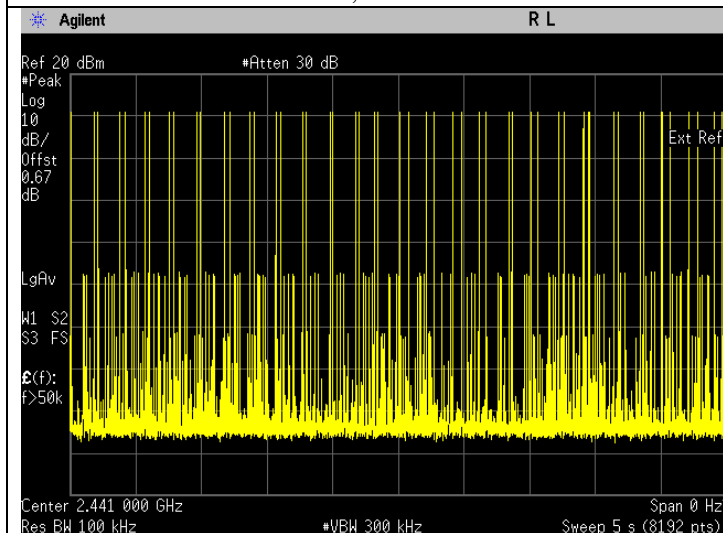



ii. Dwell Time at DH3, GFSK

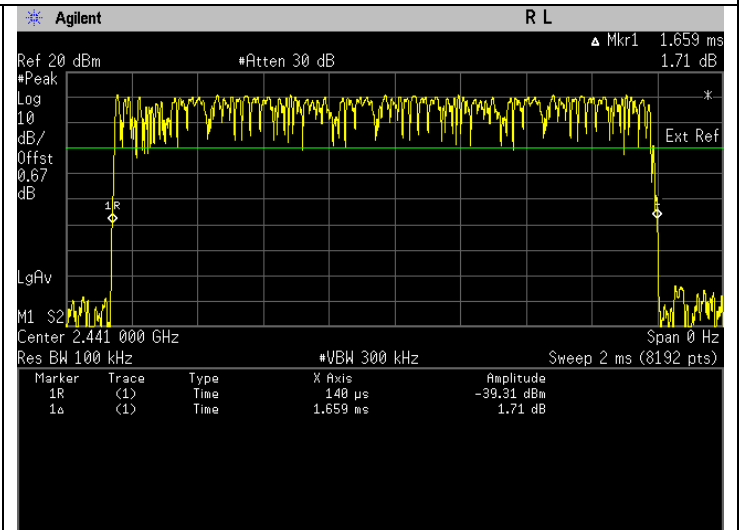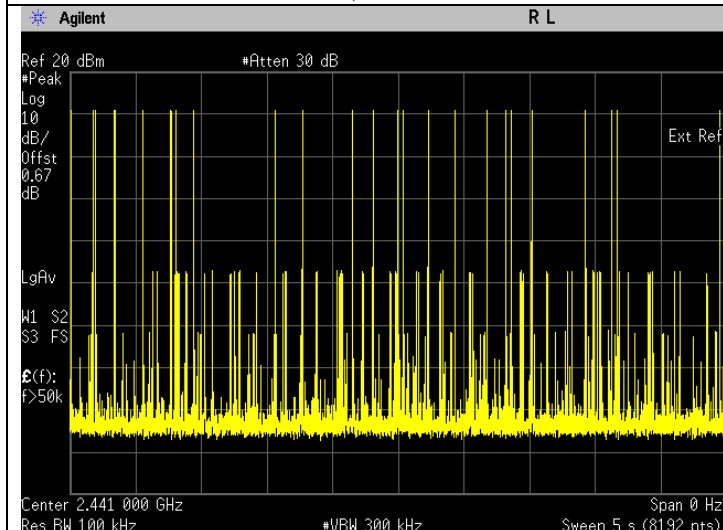



iii. Dwell Time at DH5, GFSK

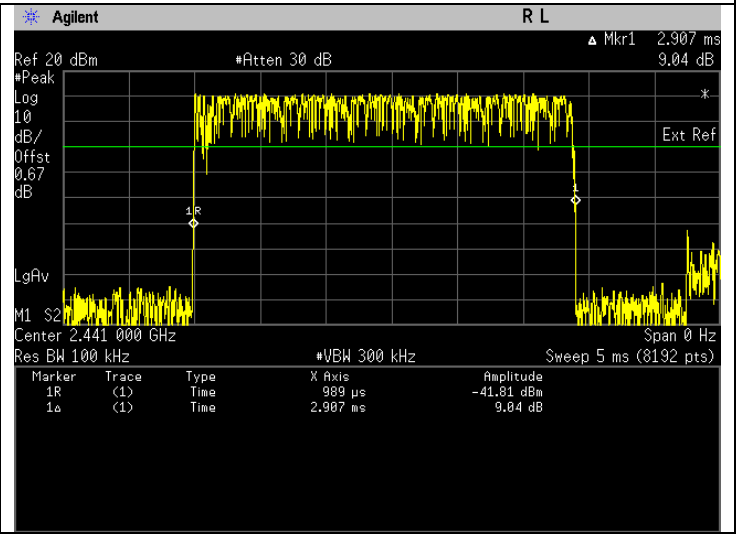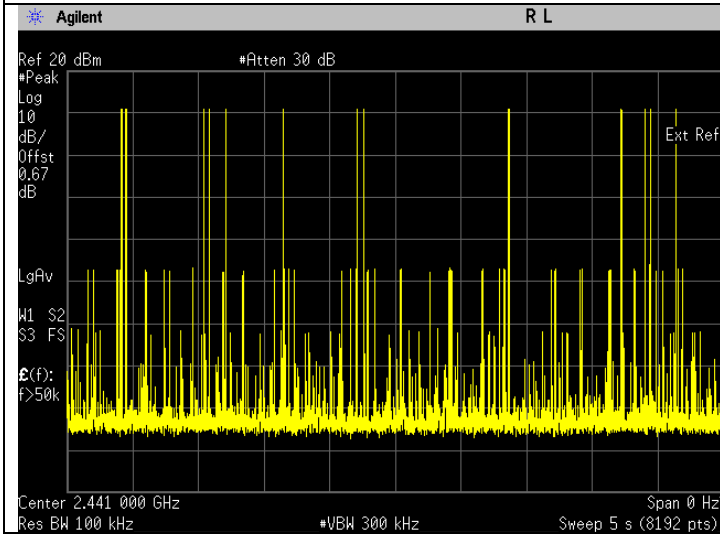



iv. Dwell Time at DH1, PI/4DQPSK

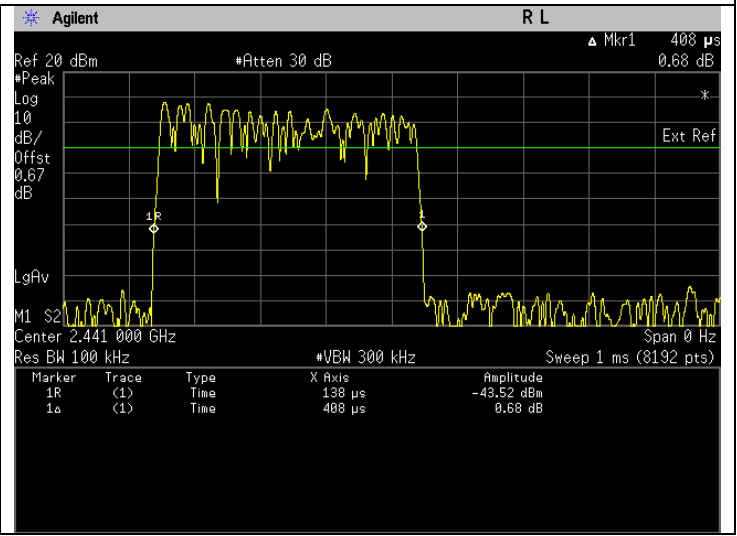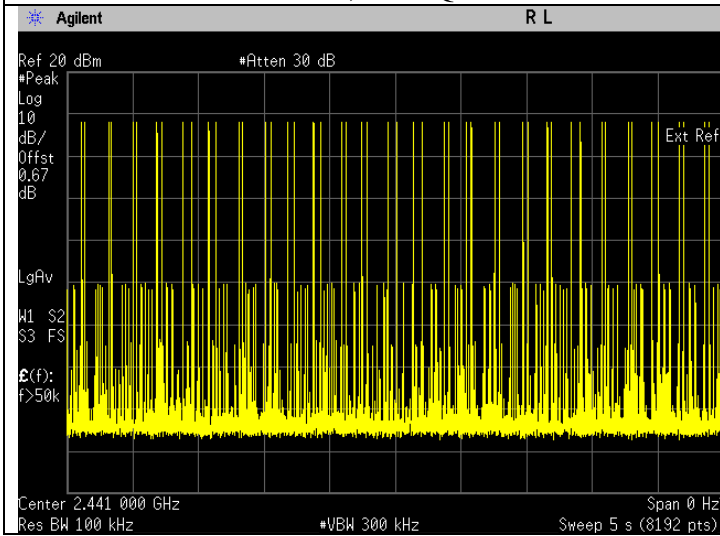



v. Dwell Time at DH3, PI/4DQPSK

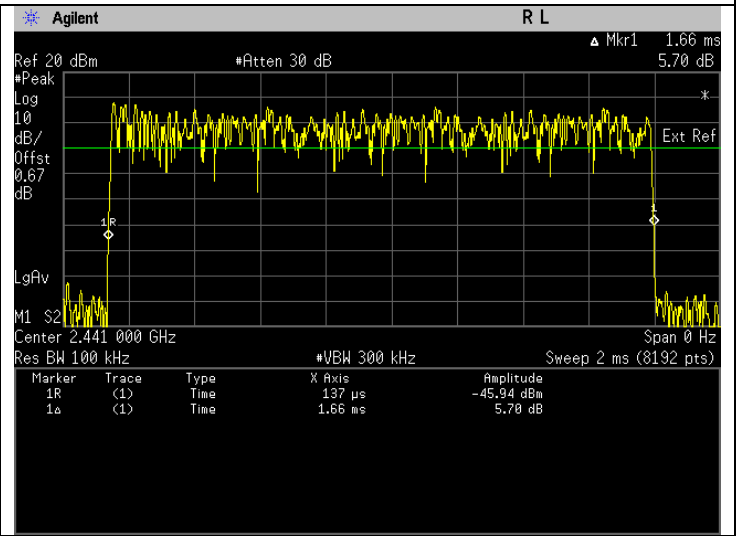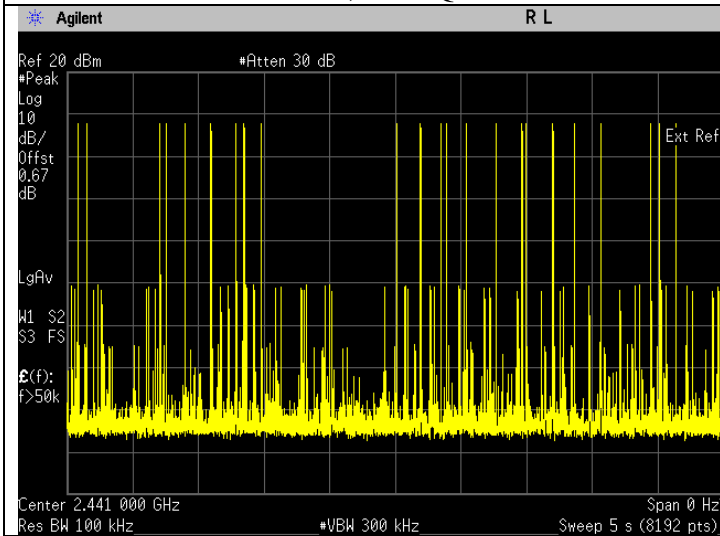



vi. Dwell Time at DH5, PI/4DQPSK

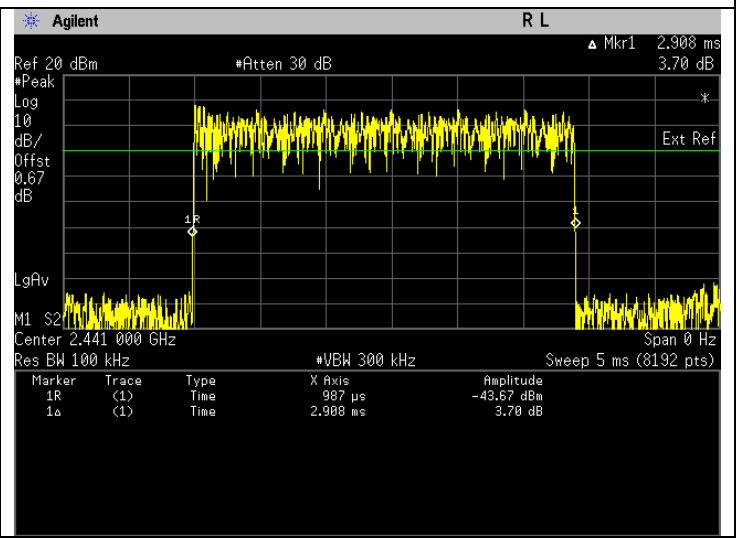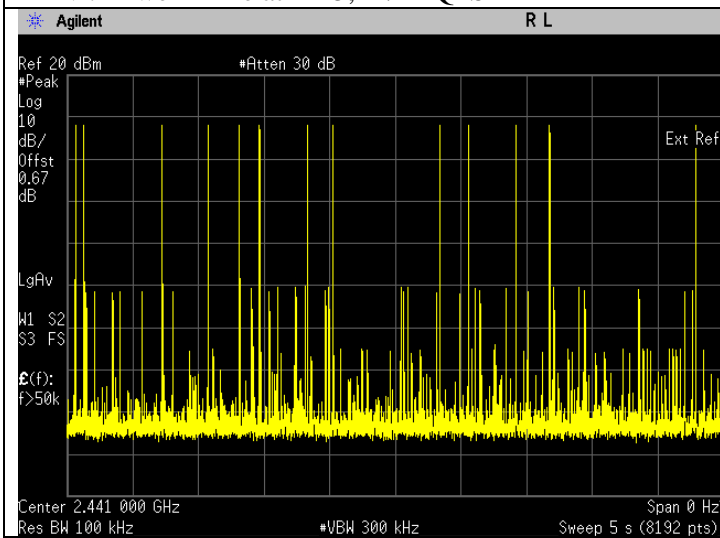


vii. Dwell Time at DH1, 8DQPSK

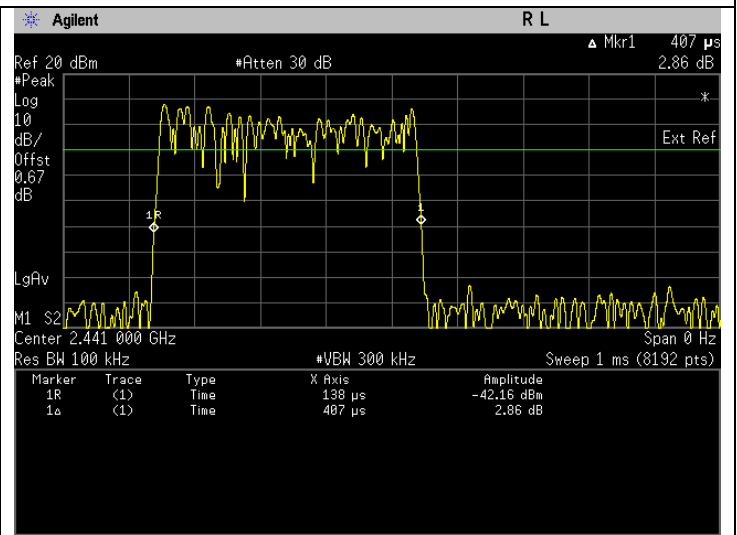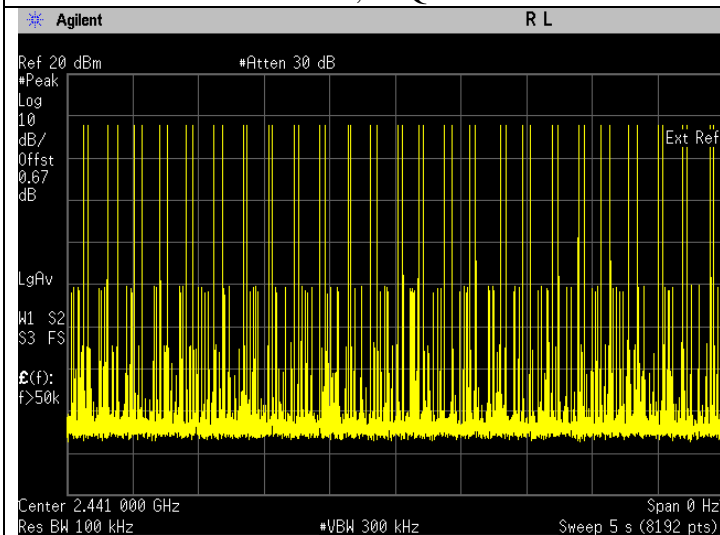

viii. Dwell Time at DH3, 8DQPSK

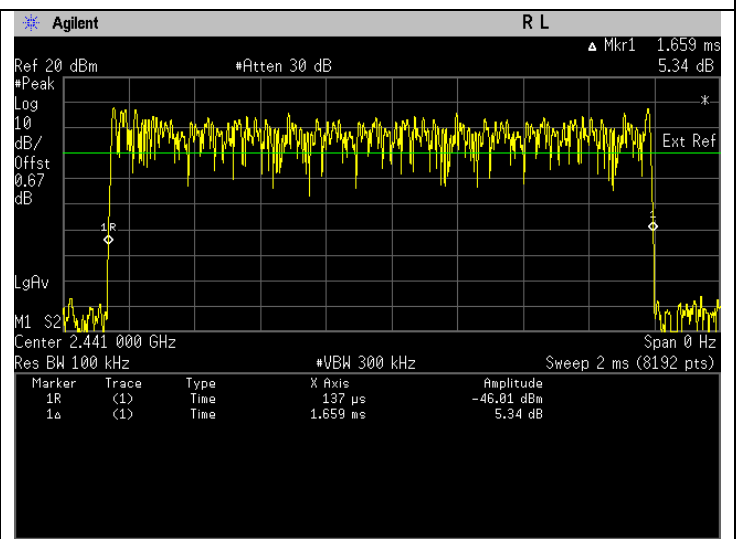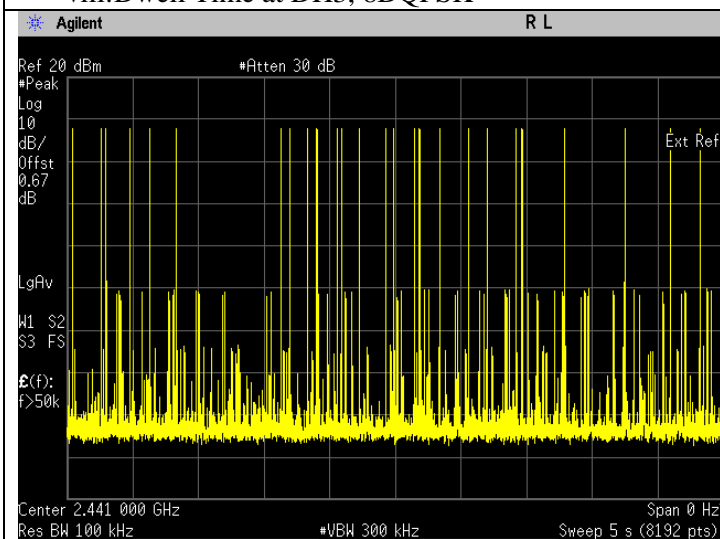


ix. Dwell Time at DH5, 8DQPSK

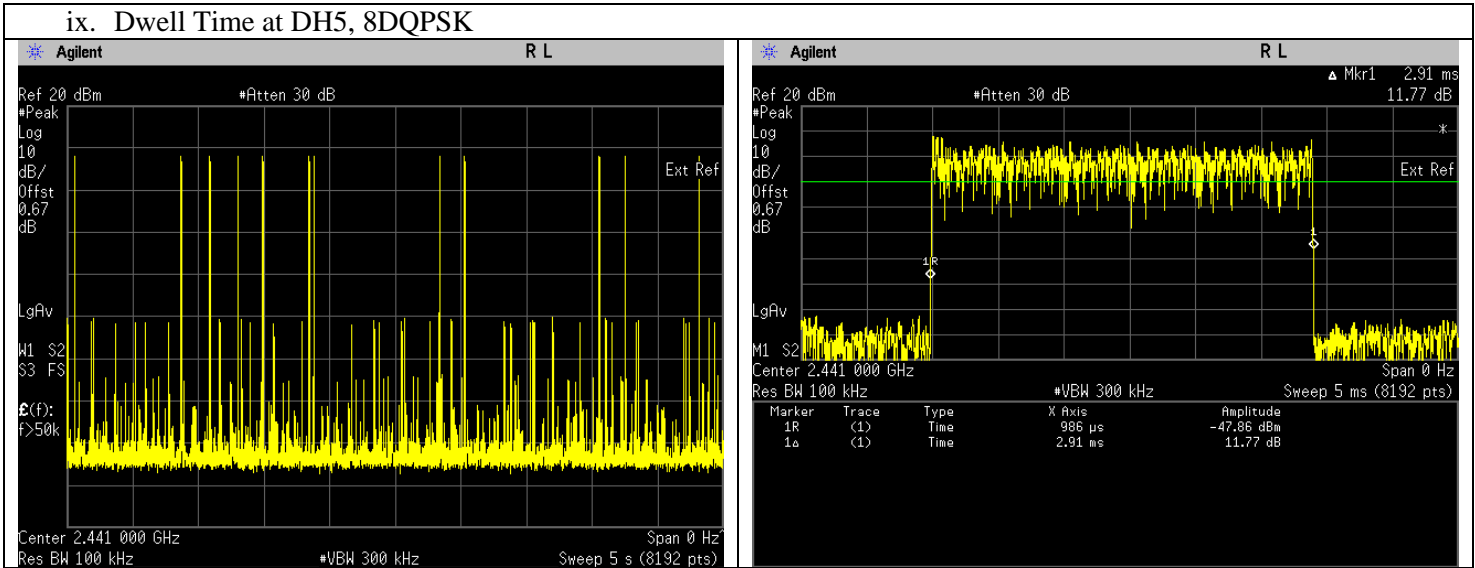

6.5. Number of hopping Frequency

6.5.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and keep the EUT in hopping mode.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 300 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
- e) Allow the trace to stabilized & save the plot result from spectrum analyzer screen.
- f) Count number of channel frequency in the operating.
- g) Repeat above procedure for other test frequency.


6.5.2. Test Limits:

Normal Condition (25 ° C)
≥ 15


6.5.3. Test Result

Test Conditions		Sweep Range (GHz)	Results	
Modulation	Voltage(V)		No. of Hopping Frequencies	Status
GFSK	3.70	2.4000-2.4835	79	Pass
Pi/4DQPSK	3.70	2.4000-2.4835	79	Pass
8DPSK	3.70	2.4000-2.4835	79	Pass


i. Number of Hopping Frequencies, GFSK

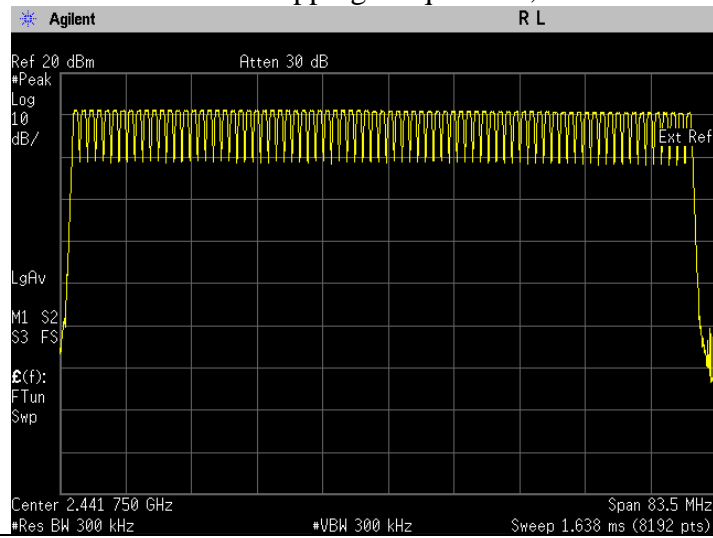

ii. Number of Hopping Frequencies, Pi/4 DQPSK

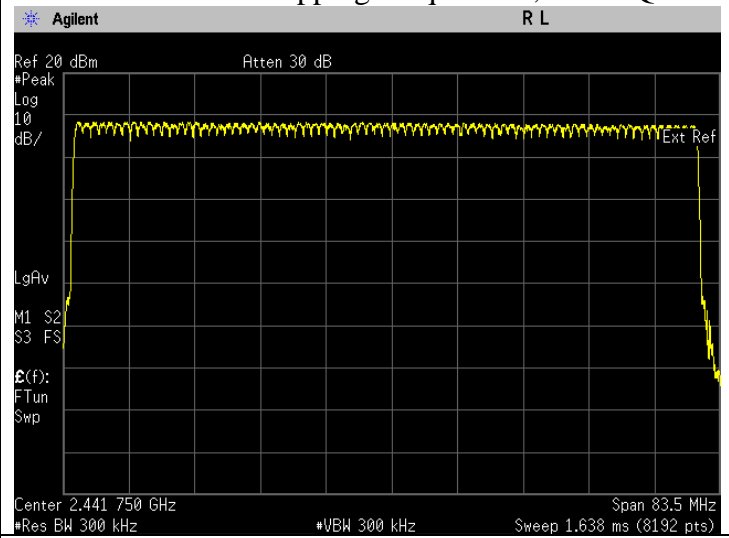


iii. Number of Hopping Frequencies, 8DPSK

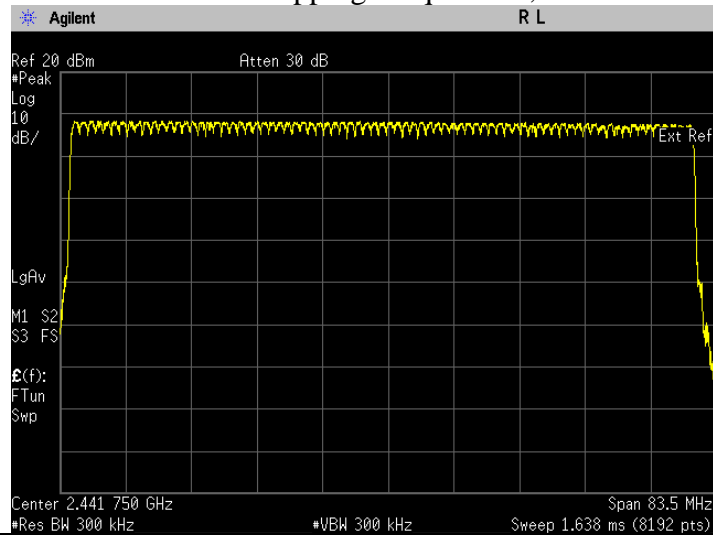

6.6. Channel Separation

6.6.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and keep the EUT in hopping mode.
- c) Connect EUT’s antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 300 kHz
 - b. VBW = 300 kHz
 - c. SPAN = 3 MHz, center on test frequency
 - d. AMPLITUDE → Scale/Div = 5 dB
 - e. Detector mode = Peak
 - f. Trace = Max hold
 - g. Sweep = auto
- e) Measure the frequency different of these two adjacent channels with marker delta function & record the measurement results.
- f) Repeat above procedure with other different mode of operation.


6.6.2. Test Limits:

Normal Condition (25 ° C)
≥ 2/3 of 20dB Bandwidth


6.6.3. Test Result

Test Conditions		Test Frequency (GHz)	Results			
Modulation	Voltage(V)		Test Data Adjacent Channel Separation (MHz)	20dB Bandwidth (MHz)	Min Limit = 2/3 of 20dB Bandwidth (kHz)	Status
GFSK	3.70	2.4020	1.009	0.960	639.730	Pass
		2.4410	1.002	0.967	644.873	Pass
		2.4800	1.005	0.957	638.196	Pass
Pi/4DQPSK	3.70	2.4020	1.002	1.337	891.316	Pass
		2.4410	1.000	1.337	891.516	Pass
		2.4800	1.000	1.341	893.773	Pass
8DPSK	3.70	2.4020	0.992	1.309	872.917	Pass
		2.4410	1.000	1.306	870.690	Pass
		2.4800	0.988	1.305	869.807	Pass


The Conducted RF Output Power test with result at low frequency, GFSK.

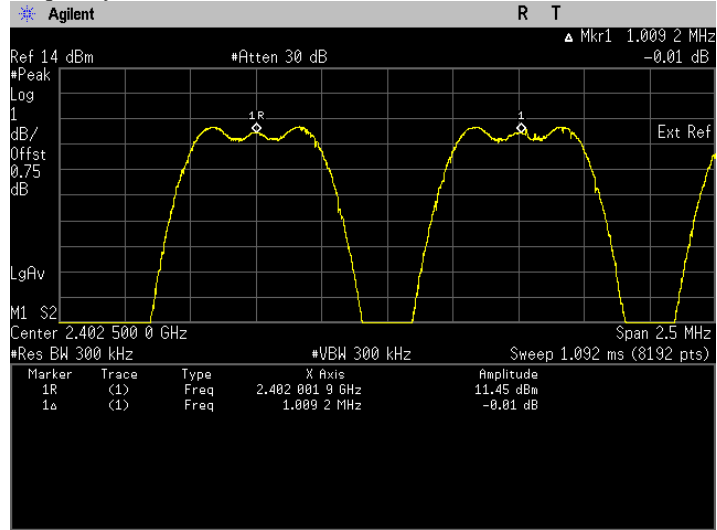


The Conducted RF Output Power test with result at mid frequency, GFSK.

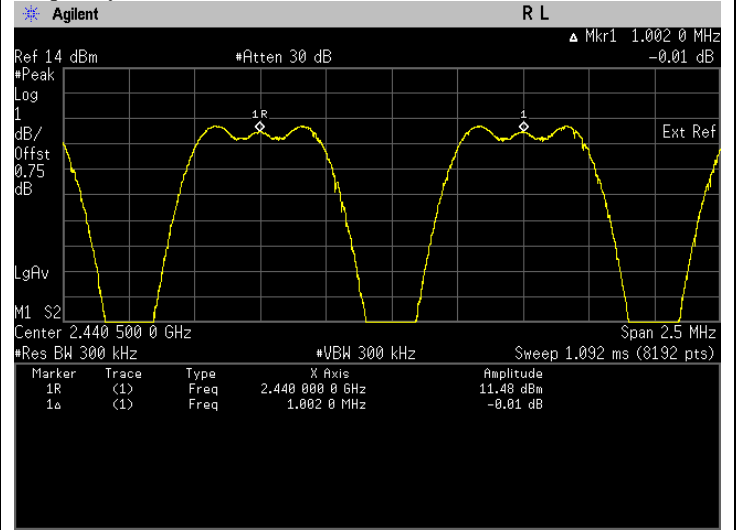


The Conducted RF Output Power test with result at high frequency, GFSK.

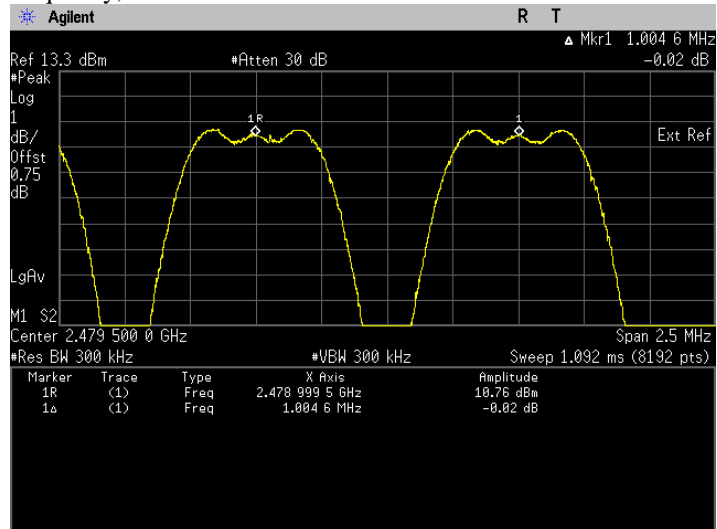


The Conducted RF Output Power test with result at low frequency, Pi/4 DQPSK.

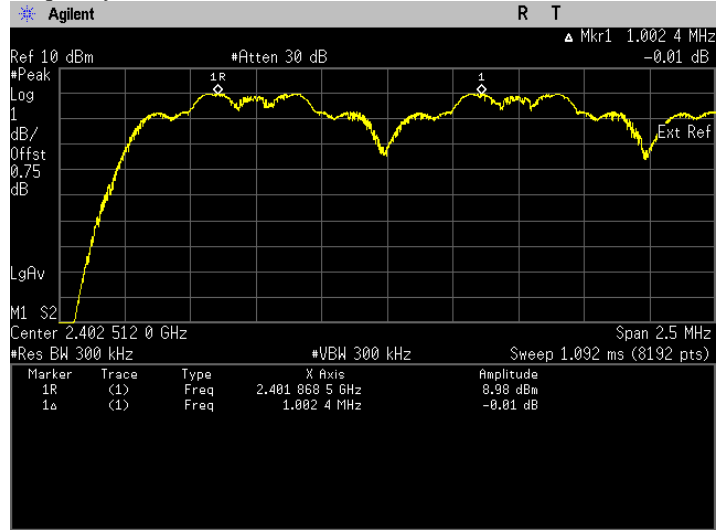


The Conducted RF Output Power test with result at mid frequency, Pi/4 DQPSK.

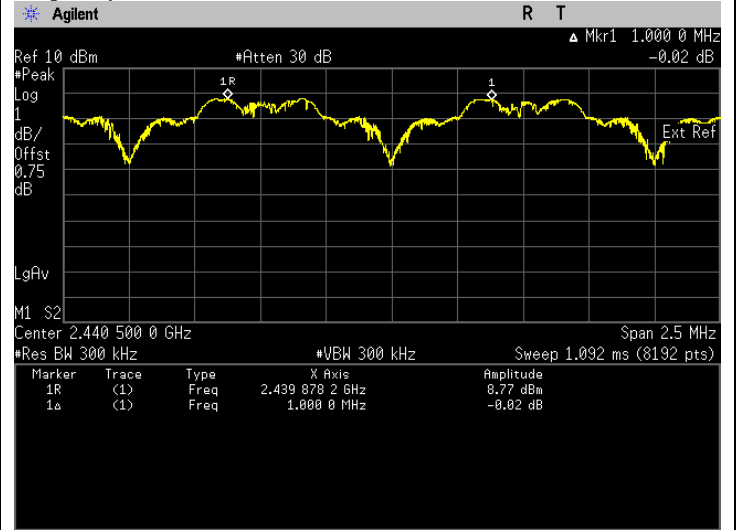


The Conducted RF Output Power test with result at high frequency, Pi/4 DQPSK.

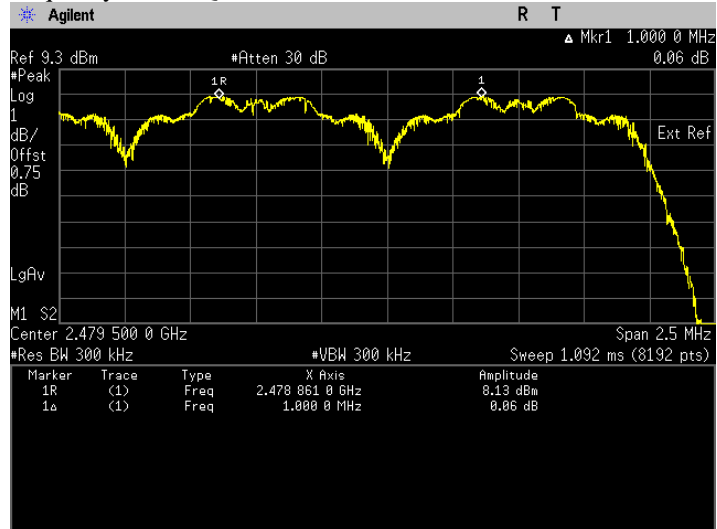


The Conducted RF Output Power test with result at low frequency, 8DPSK.

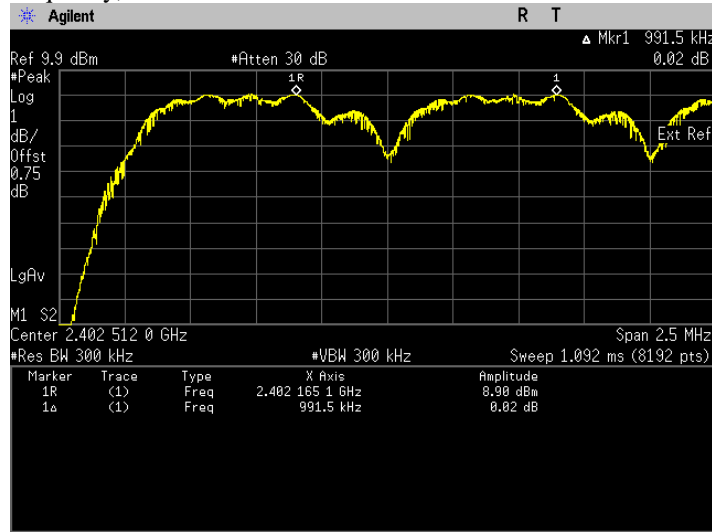

The Conducted RF Output Power test with result at mid frequency, 8DPSK.

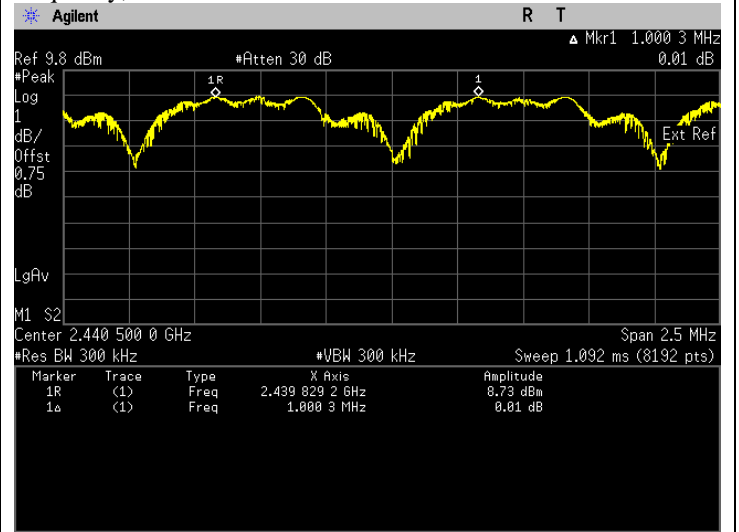


The Conducted RF Output Power test with result at high frequency, 8DPSK.

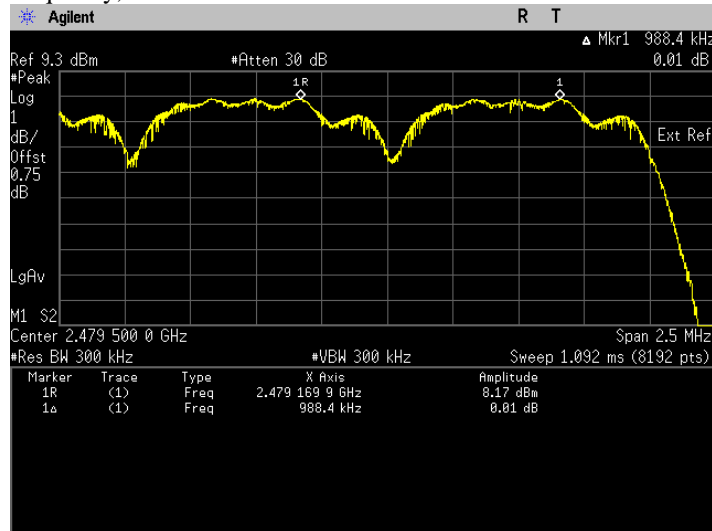

6.7. Conducted Spurious Emission

6.7.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the EUT and set EUT to transmit maximum data rate with hopping disable.
- c) Connect EUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. SPAN = Cover until 10th harmonic
 - d. Detector mode = Peak
 - e. AMPLITUDE → Scale/Div = 10 dB
 - f. Trace = Max hold
 - g. Sweep = auto
- e) Measure the captured spurious emission result and recording the plot.
- f) Repeat above procedure with other different mode of operation.

6.7.2. Test Limits:


Normal Condition (25 ° C)
Shall be at least 20 dB below for peak power.

6.7.3. Test Data:


Test Conditions			Results		
Modulation	Voltage(V)	Test Frequency (GHz)	Spurs (MHz)	Level (dBm)	Status
GFSK	3.70	2.4020	24893.000	-50.254	Pass
		2.4410	24921.000	-51.075	Pass
		2.4800	24823.000	-51.267	Pass
Pi/4 DQPSK	3.70	2.4020	24213.000	-50.931	Pass
		2.4410	24805.000	-51.289	Pass
		2.4800	24869.000	-51.502	Pass
8DPSK	3.70	2.4020	24592.000	-50.116	Pass
		2.4410	24878.000	-50.722	Pass
		2.4800	24860.000	-50.637	Pass

GFSK Modulation:


- The high emission level within the assigned band at low carrier frequency.

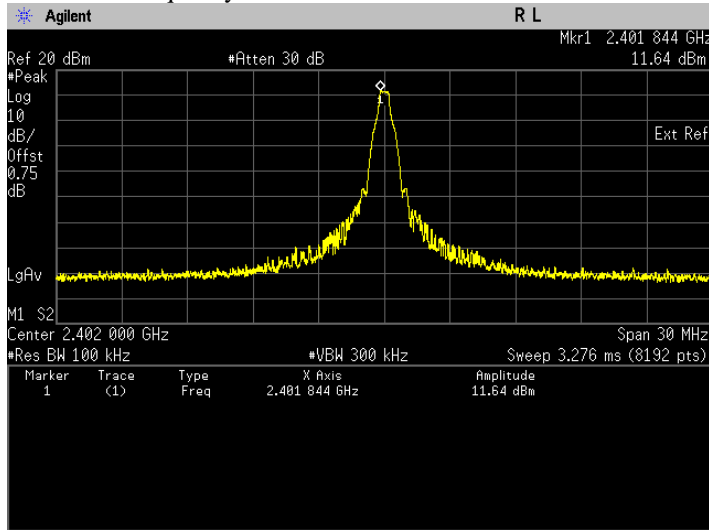


- Spurious emission measurement in 30MHz – 25GHz at low carrier frequency.

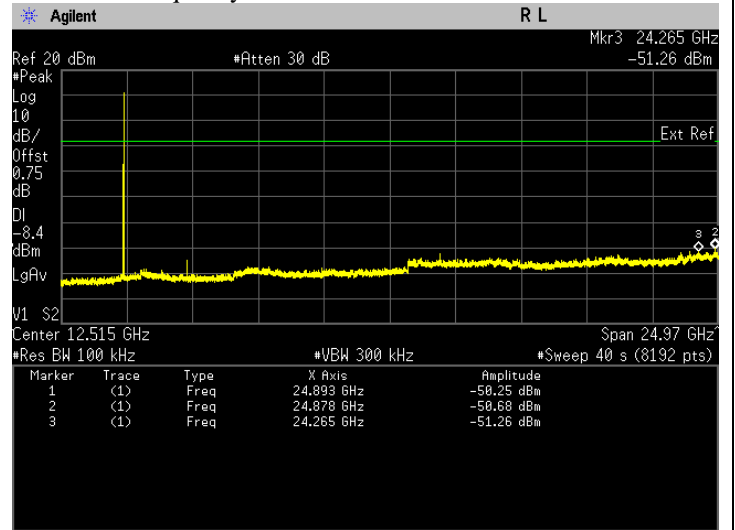


- The high emission level within the assigned band at mid carrier frequency.

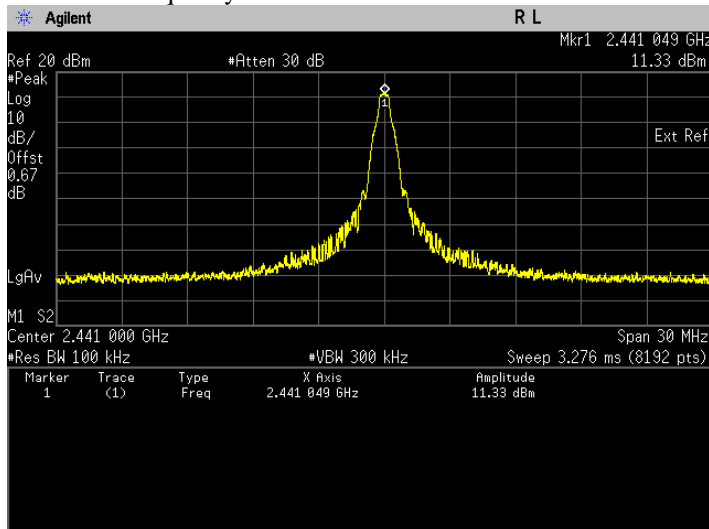


- Spurious emission measurement in 30MHz – 25GHz at mid carrier frequency.

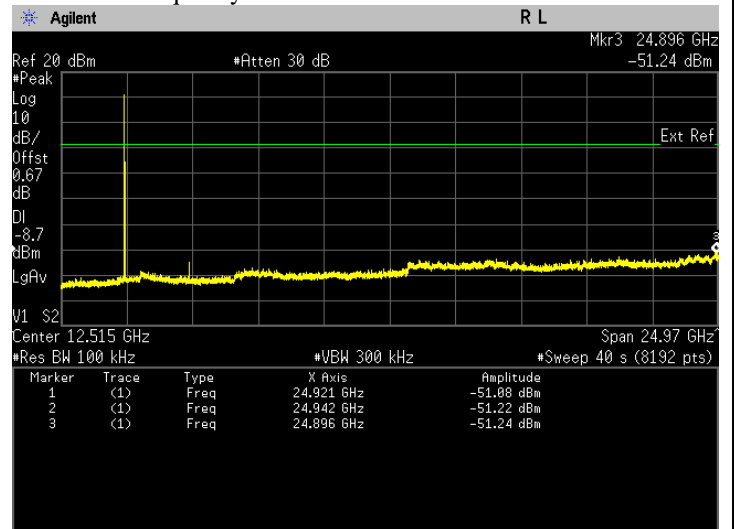

- The high emission level within the assigned band at high carrier frequency.

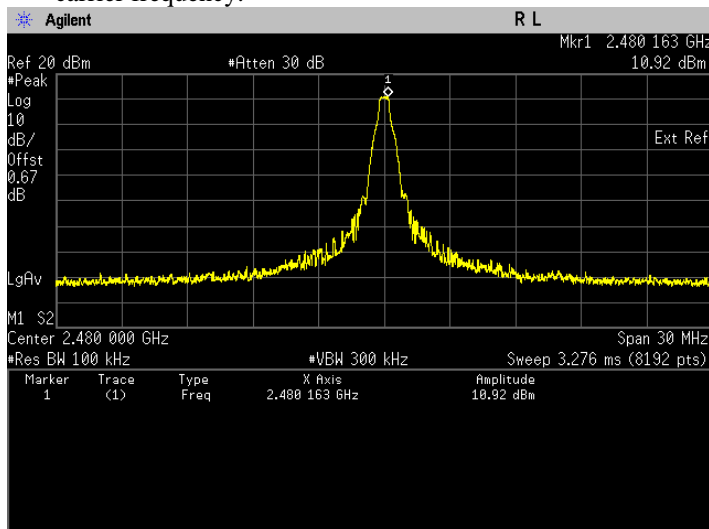


- Spurious emission measurement in 30MHz – 25GHz at high carrier frequency.

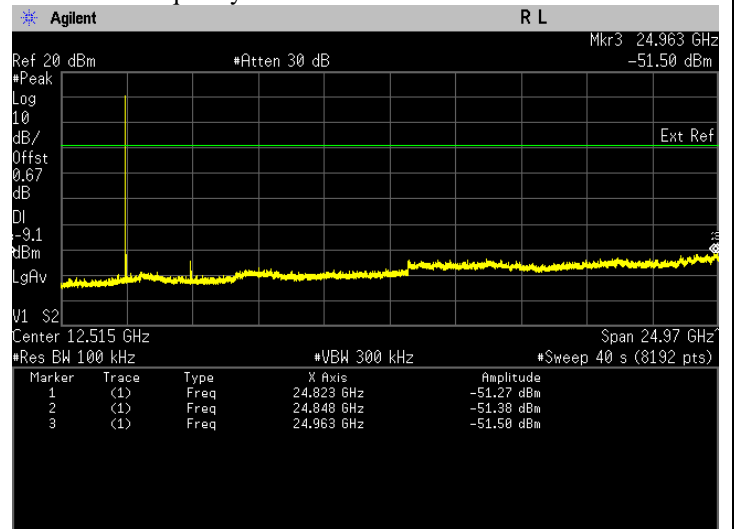


Pi/4 DQPSK Modulation:


i. The high emission level within the assigned band at low carrier frequency.

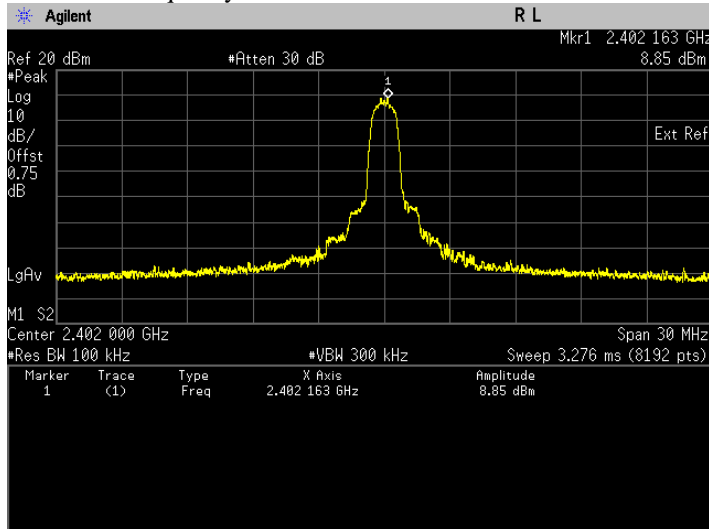


ii. Spurious emission measurement in 30MHz – 25GHz at low carrier frequency.

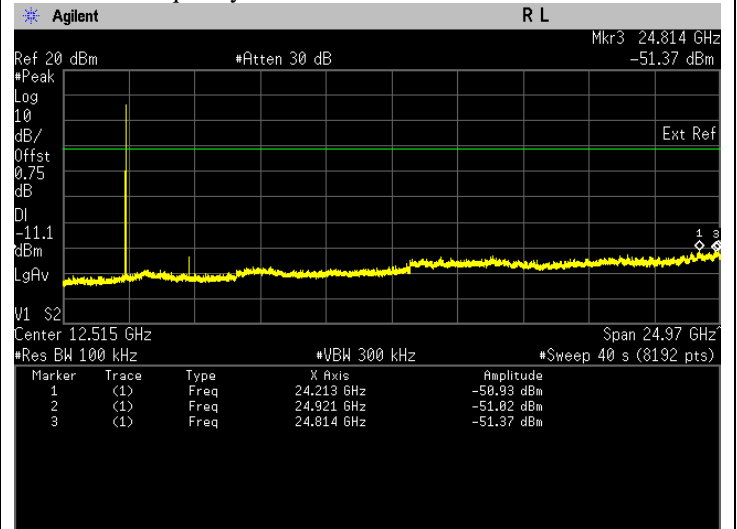


iii. The high emission level within the assigned band at mid carrier frequency.

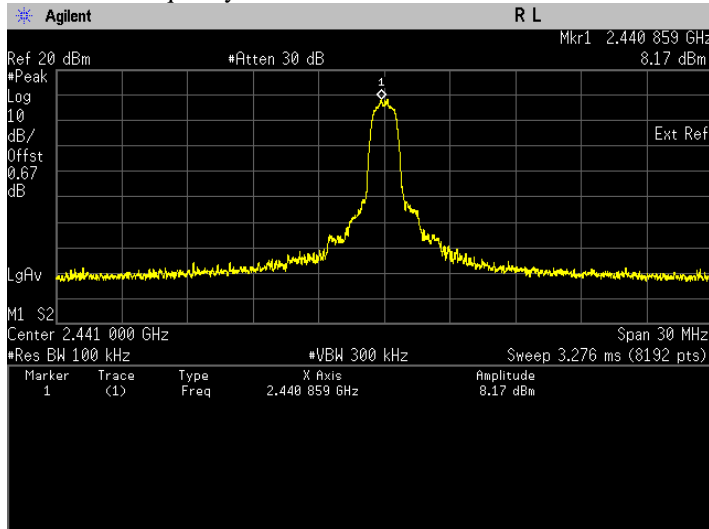


iv. Spurious emission measurement in 30MHz – 25GHz at mid carrier frequency.

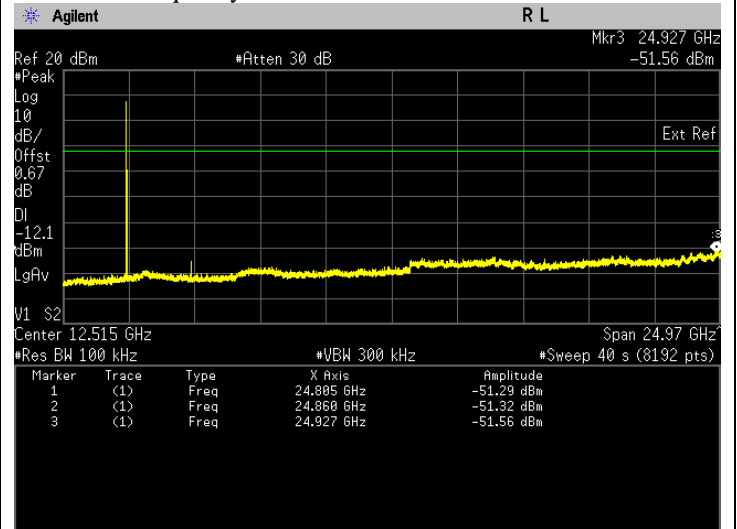

v. The high emission level within the assigned band at high carrier frequency.

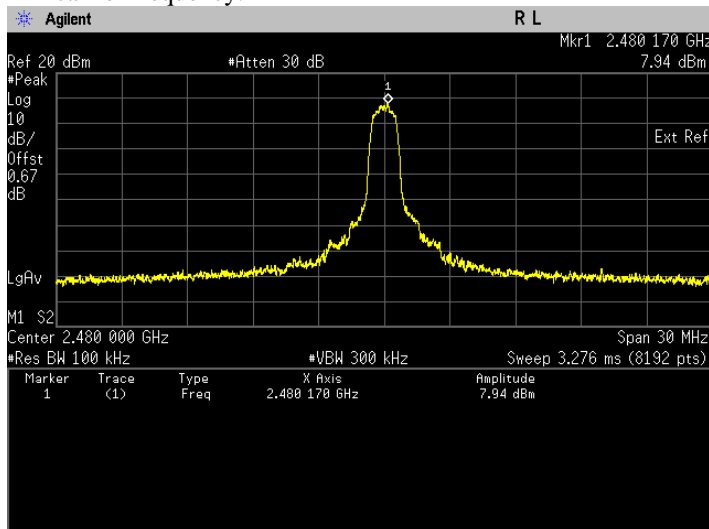


vi. Spurious emission measurement in 30MHz – 25GHz at high carrier frequency.

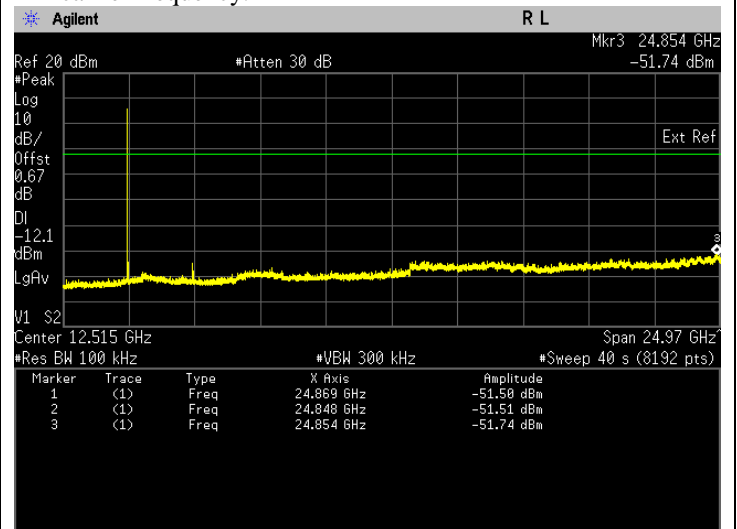


8DPSK Modulation:


i. The high emission level within the assigned band at low carrier frequency.

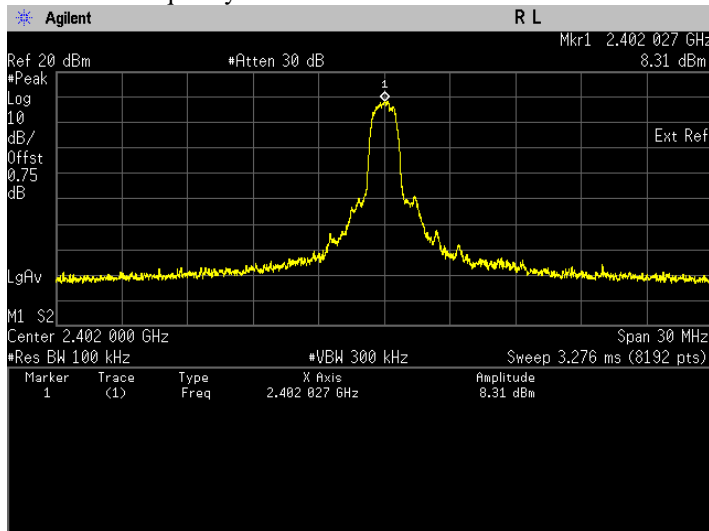


ii. Spurious emission measurement in 30MHz – 25GHz at low carrier frequency.

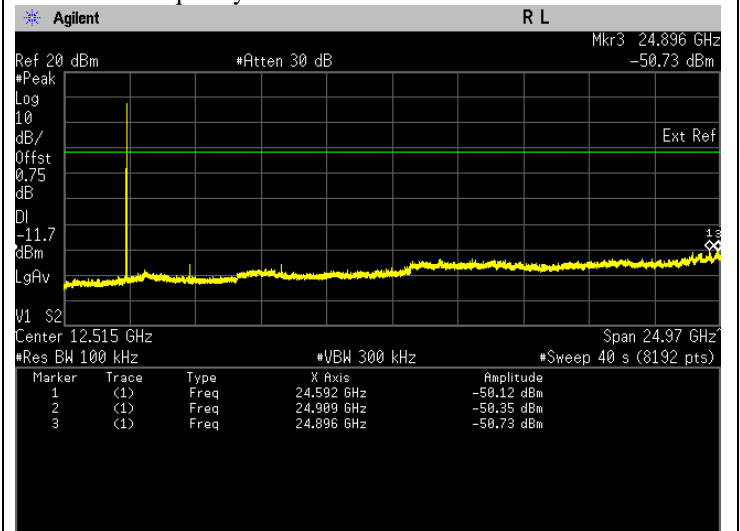


iii. The high emission level within the assigned band at mid carrier frequency.

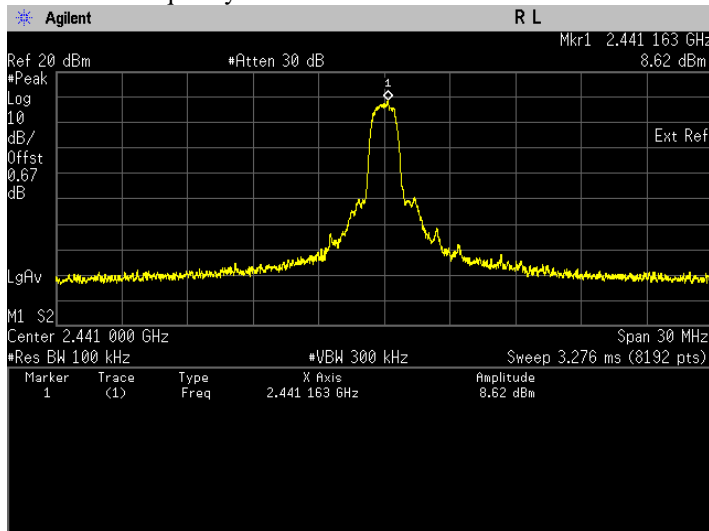


iv. Spurious emission measurement in 30MHz – 25GHz at mid carrier frequency.

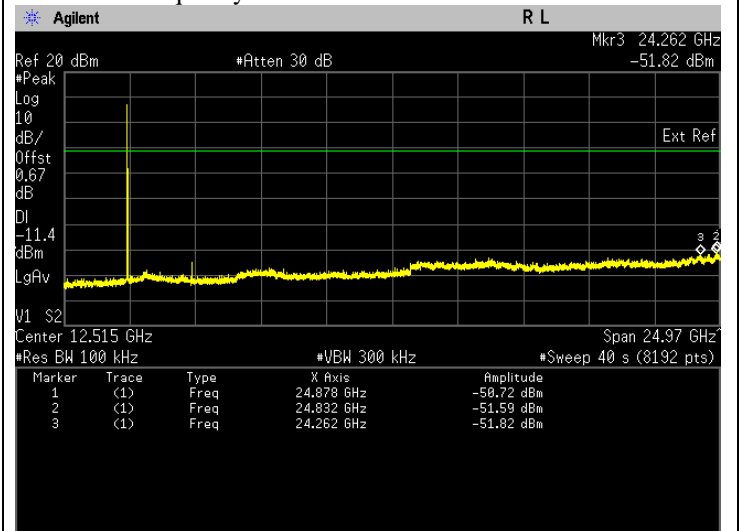

v. The high emission level within the assigned band at high carrier frequency.

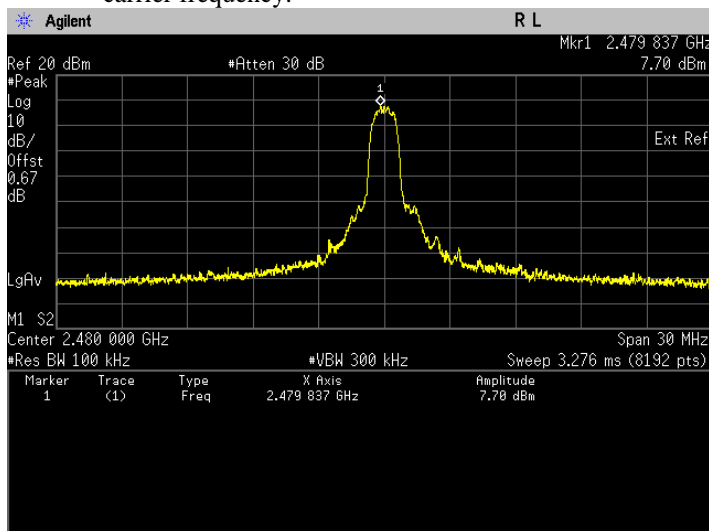


vi. Spurious emission measurement in 30MHz – 25GHz at high carrier frequency.

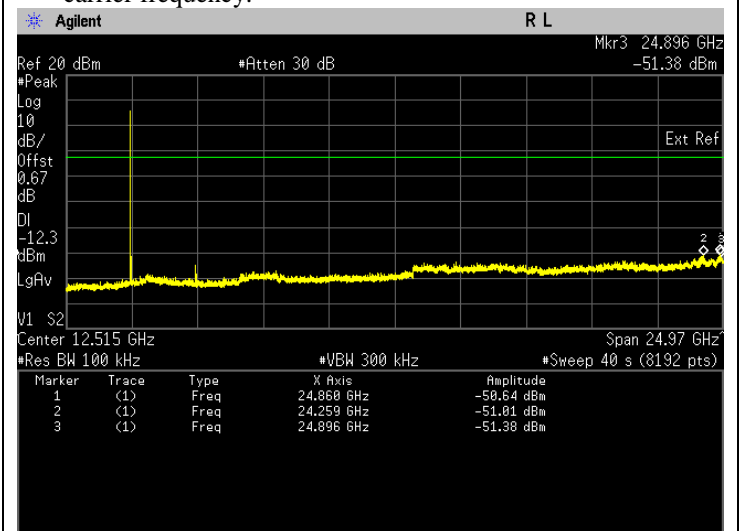

6.8. Radiated Emission within restricted Bands

6.8.1. Test Setup

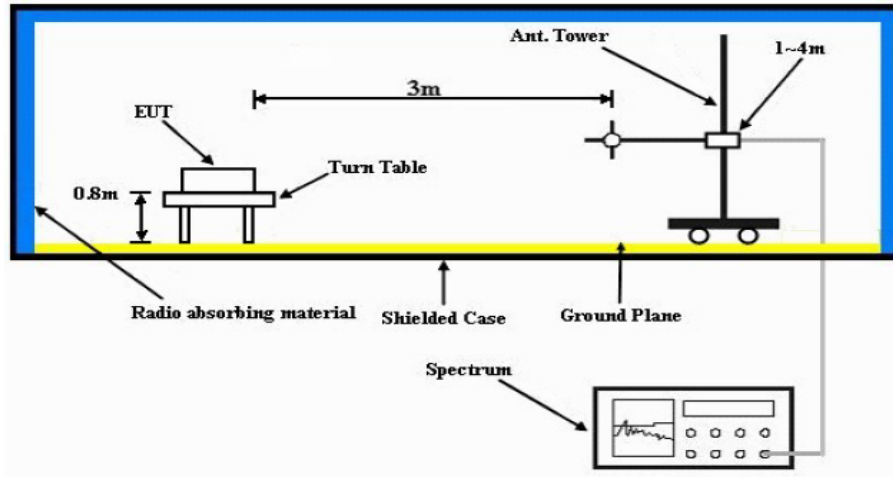

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.8.2. Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.8.3. Test Data:

Test: Bluetooth SAC Restricted Band Edge

Model Number: NA **S/N: PMMN4156A-CF9** **EMC SR ID#: 36811-EMC-00039**
Battery: PMNN4846A **Accessory: NA**
Test Channel: Low **Test Frequency: 2402.0000 MHz** **Test Standard: ANSI C63.10-2013**
Worst Case Plane: Y-Plane (GFSK)

Restricted Band Edge (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dB μ V/m)	Spur level PK (dB μ V/m)	Spur level AV (dB μ V/m)	Limit QPK (dB μ V/m)	Limit PK (dB μ V/m)	Limit AV (dB μ V/m)	Margin QPK (dB μ V/m)	Margin PK (dB μ V/m)	Margin AV (dB μ V/m)	Carrier PK Power (dB μ V/m)
2390.0000	-	53.4538	43.1503	-	74.0000	54.0000	-	20.5462	10.8497	-
Horizontal Radiated Emission Result										
2390.0000	-	53.3724	43.2610	-	74.0000	54.0000	-	20.6276	10.7390	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.6
 Test Performed by: Nazrin&Qawiman
 System MU: 5.84dB


Humidity (%): 69.8
 Test Date: Sat, 6 May, 2023

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

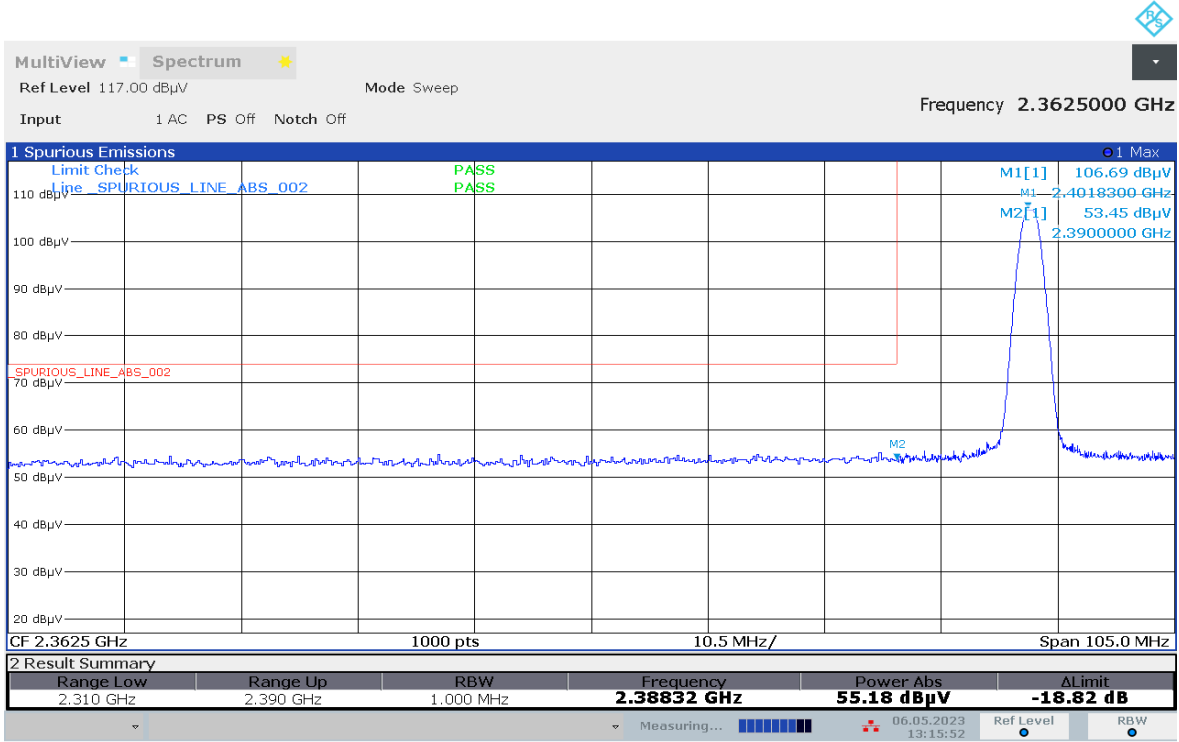


13:15:52 06.05.2023

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

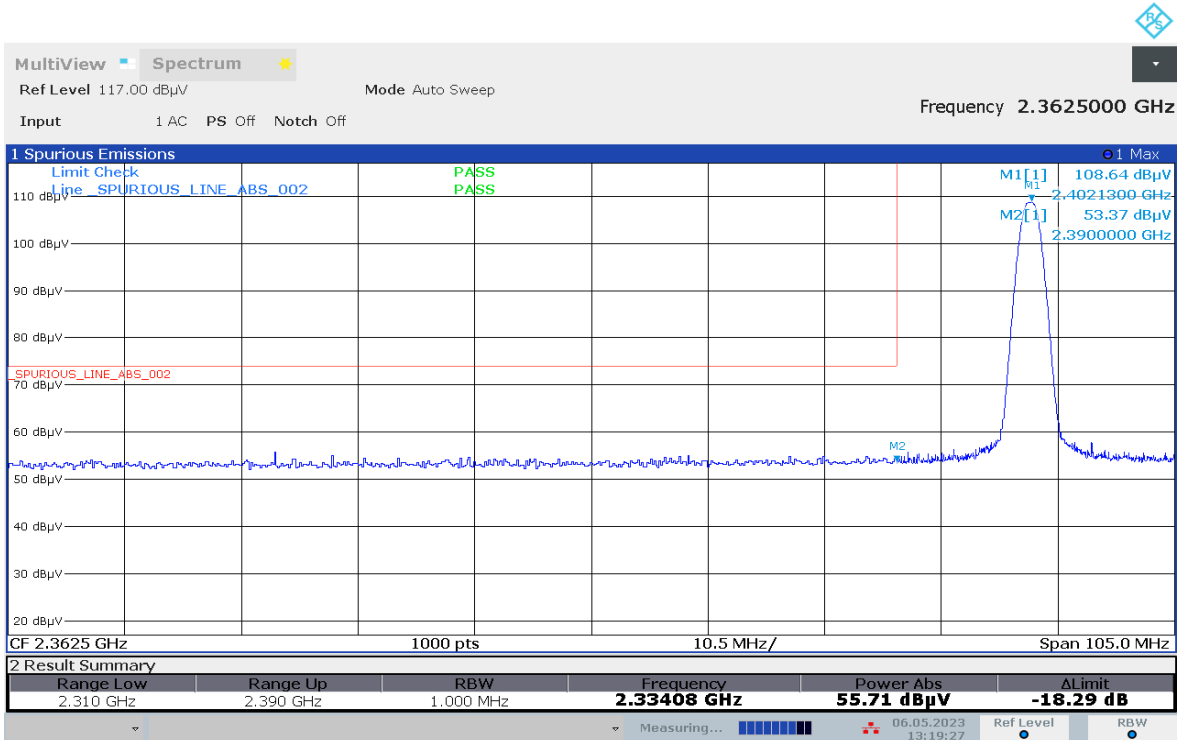


13:19:27 06.05.2023

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

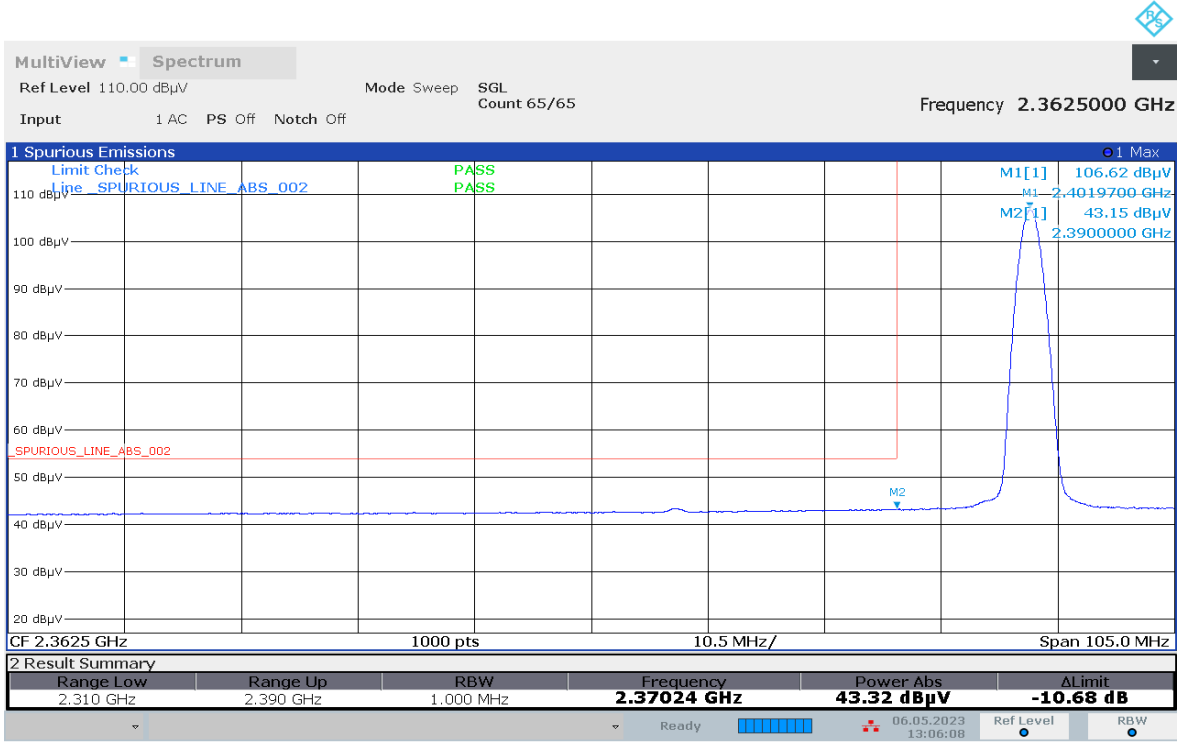

13:06:08 06.05.2023

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

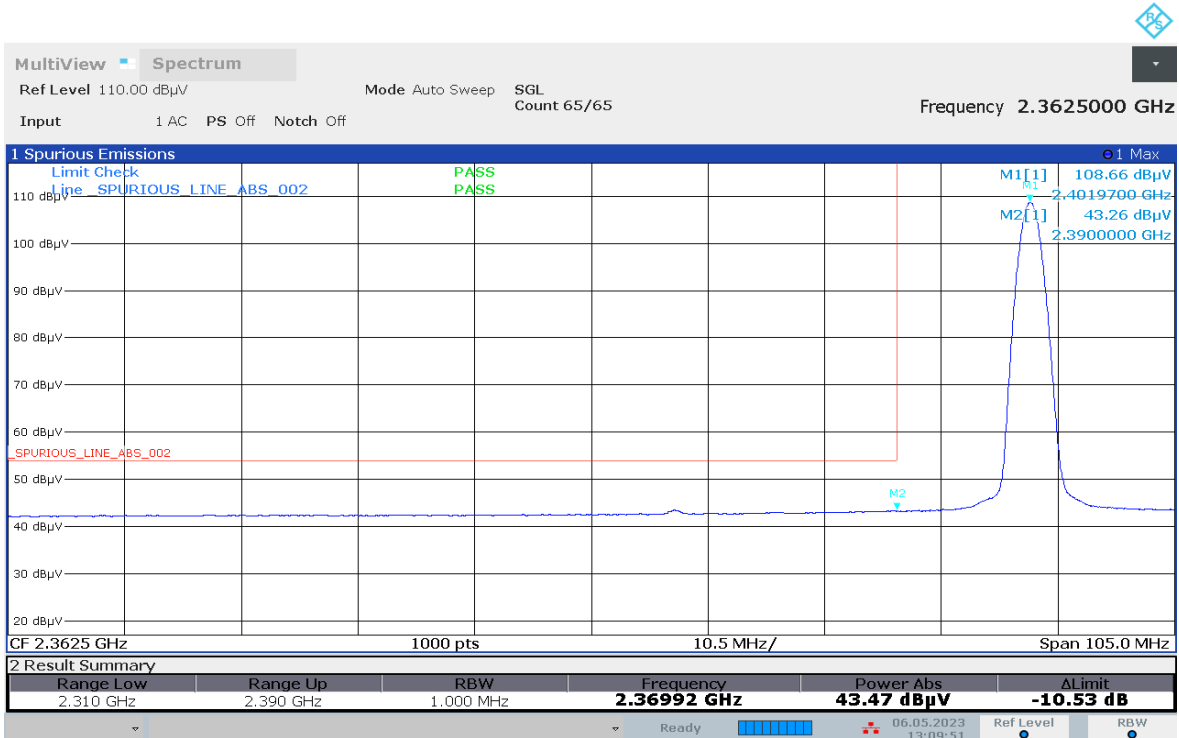

13:09:51 06.05.2023

Test: Bluetooth SAC Restricted Band Edge
Model Number: NA **S/N: PMMN4156A-CF9** **EMC SR ID#: 36811-EMC-00039**
Battery: PMNN4846A **Accessory: NA**
Test Channel: High **Test Frequency: 2480.0000 MHz** **Test Standard: ANSI C63.10-2013**
Worst Case Plane: Y-Plane (GFSK)

Restricted Band Edge (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
2483.5000	-	55.2617	45.2009	-	74.0000	54.0000	-	18.7383	8.7991	-
Horizontal Radiated Emission Result										
2483.5000	-	54.3477	45.8308	-	74.0000	54.0000	-	19.6523	8.1692	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC):23.6
Test Performed by: Nazrin&Qawiman
System MU: 5.84dB


Humidity (%): 69.8
Test Date: Sat, 6 May, 2023

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

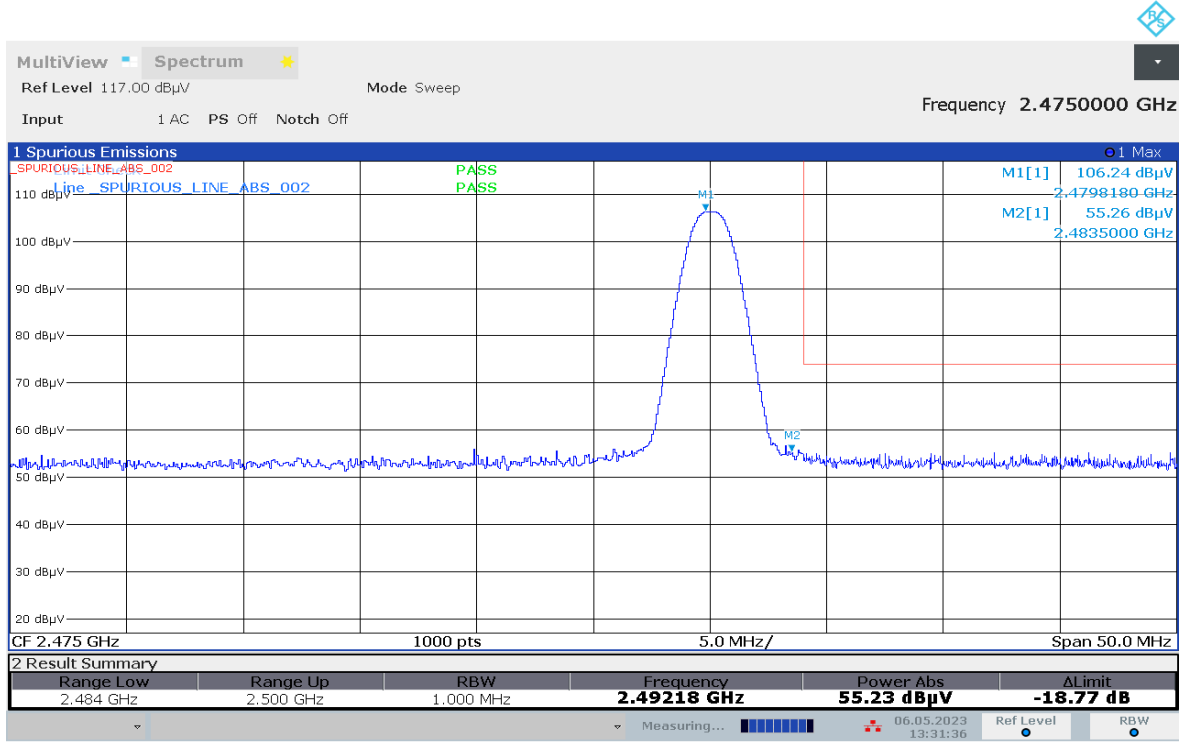


13:31:36 06.05.2023

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

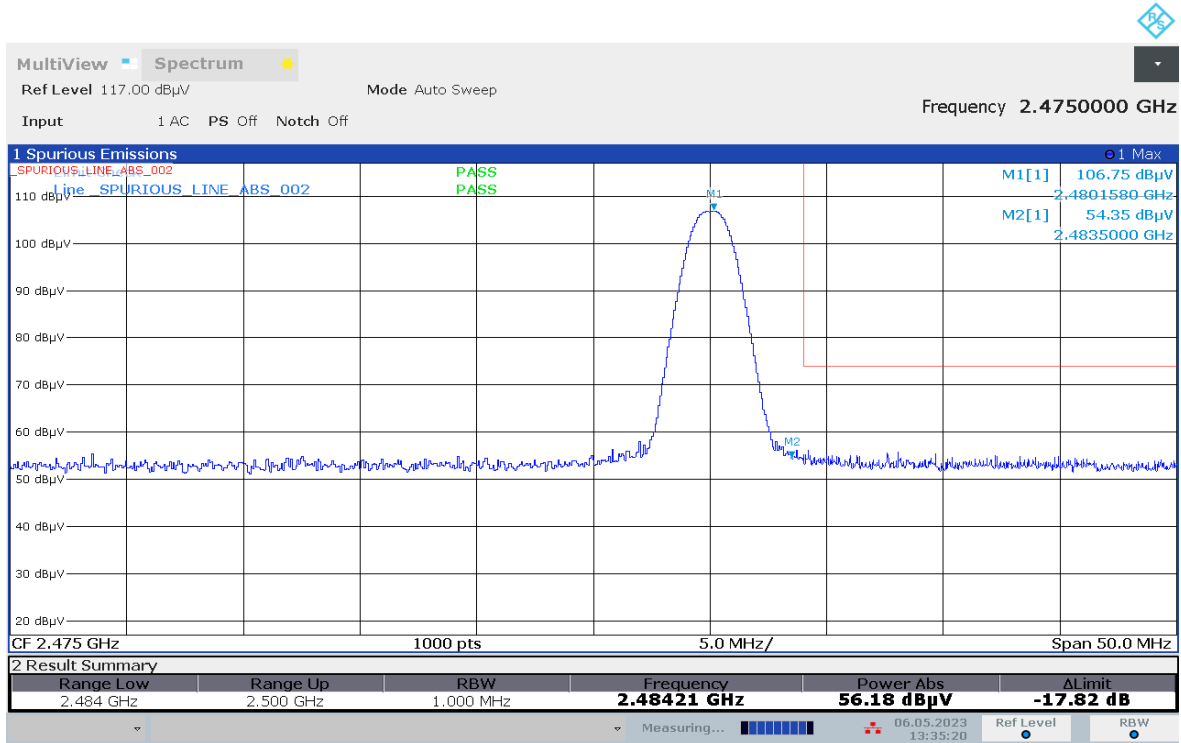


13:35:20 06.05.2023

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

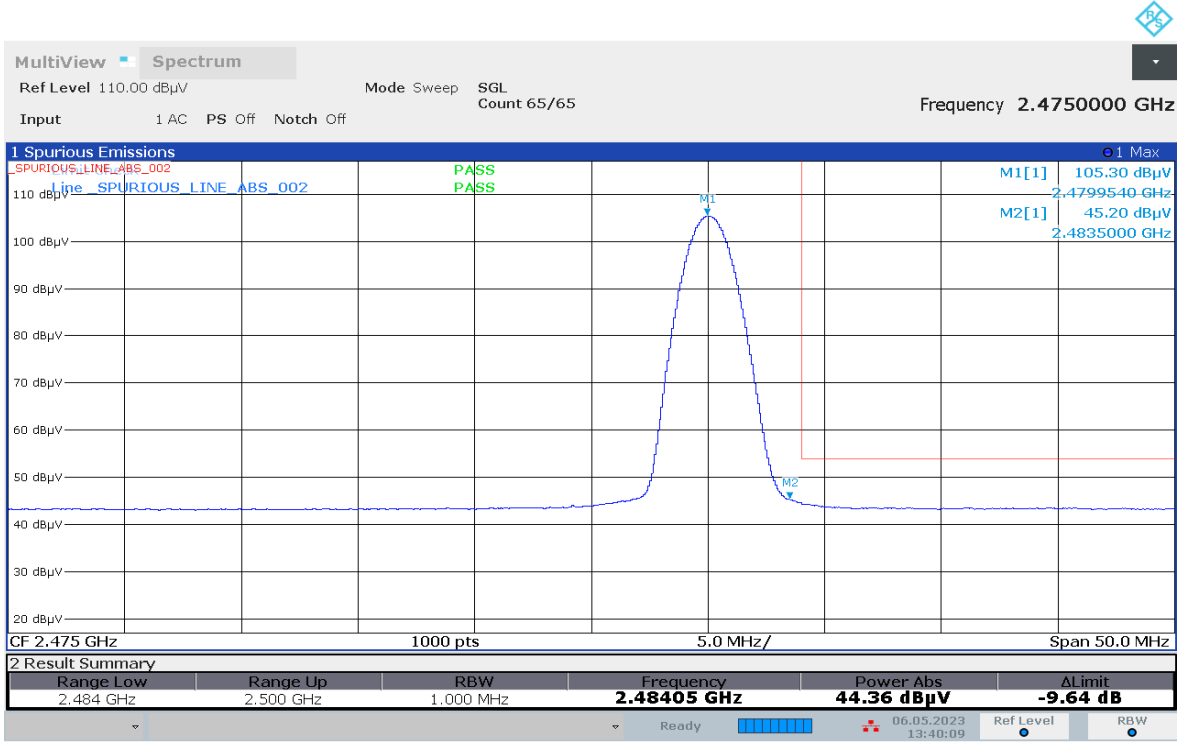

13:40:09 06.05.2023

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

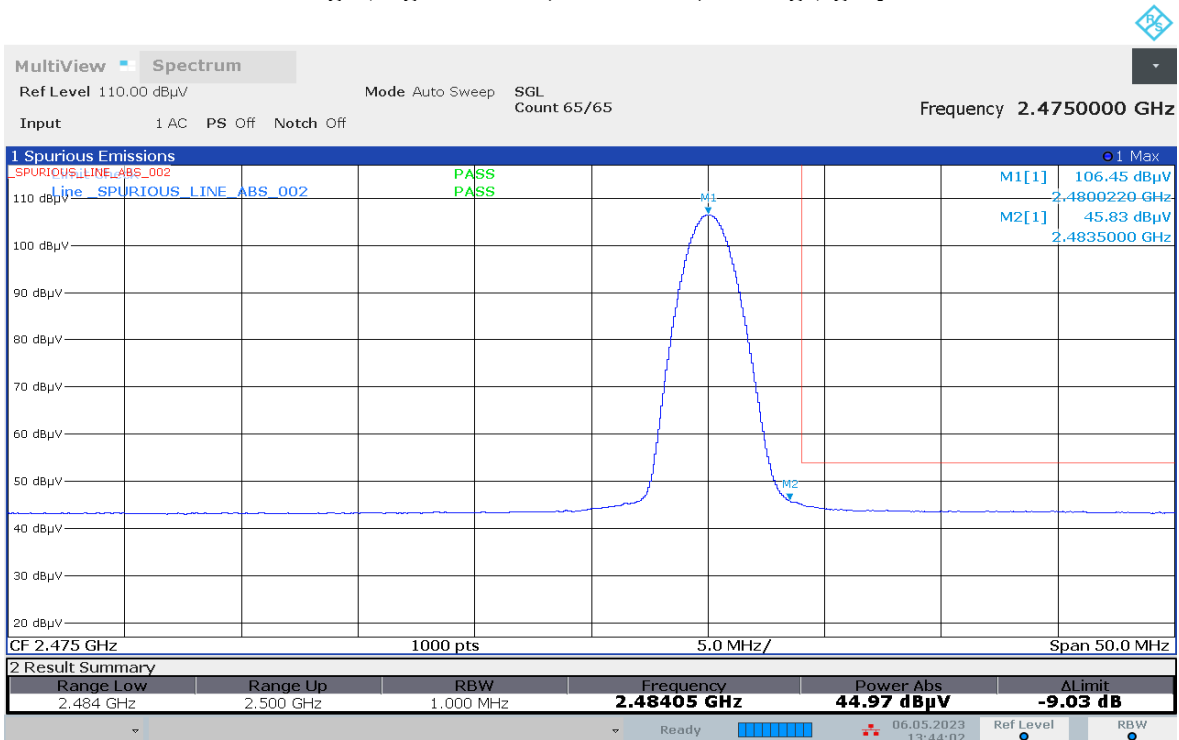

13:44:02 06.05.2023

Test: Bluetooth SAC Restricted Band Edge
Model Number: NA S/N: PMMN4156A-CF9 EMC SR ID#: 36811-EMC-00039
 Battery: PMNN4846A Accessory: NA
Test Channel: Low Test Frequency: 2402.0000 MHz Test Standard: ANSI C63.10-2013
 Worst Case Plane: Y-Plane (DQPSK)


Restricted Band Edge (Low Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
2390.0000	-	53.6095	43.1503	-	74.0000	54.0000	-	20.3905	10.8497	-
Horizontal Radiated Emission Result										
2390.0000	-	53.5744	43.1503	-	74.0000	54.0000	-	20.4256	10.8497	-


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC):23.6 Humidity (%): 69.8
 Test Performed by: Nazrin&Qawiman Test Date: Sat, 6 May, 2023
 System MU: 5.84dB


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

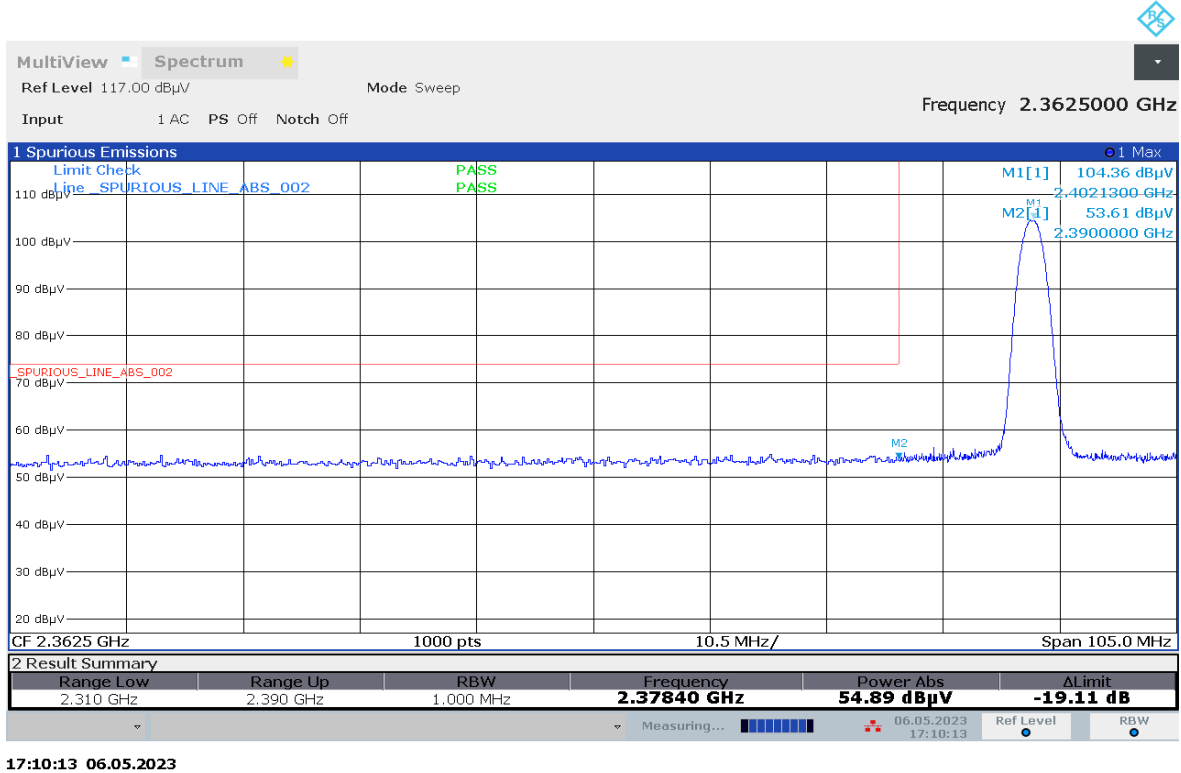

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

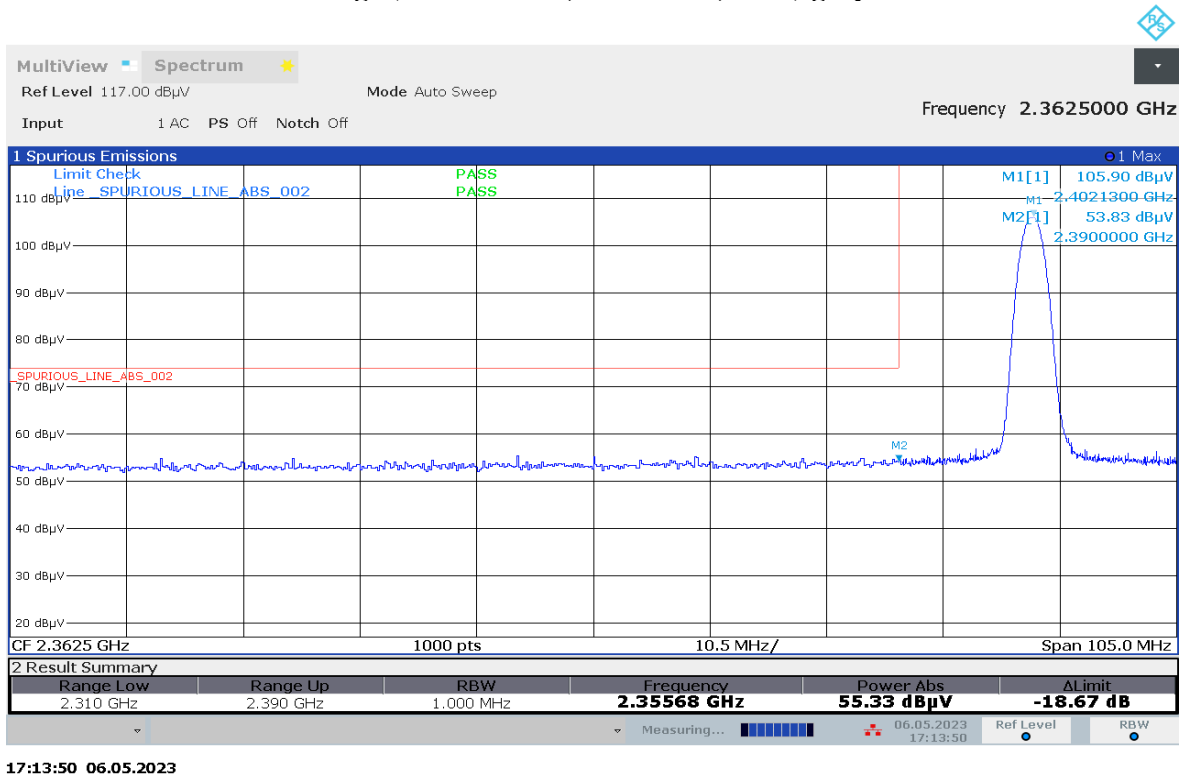


Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

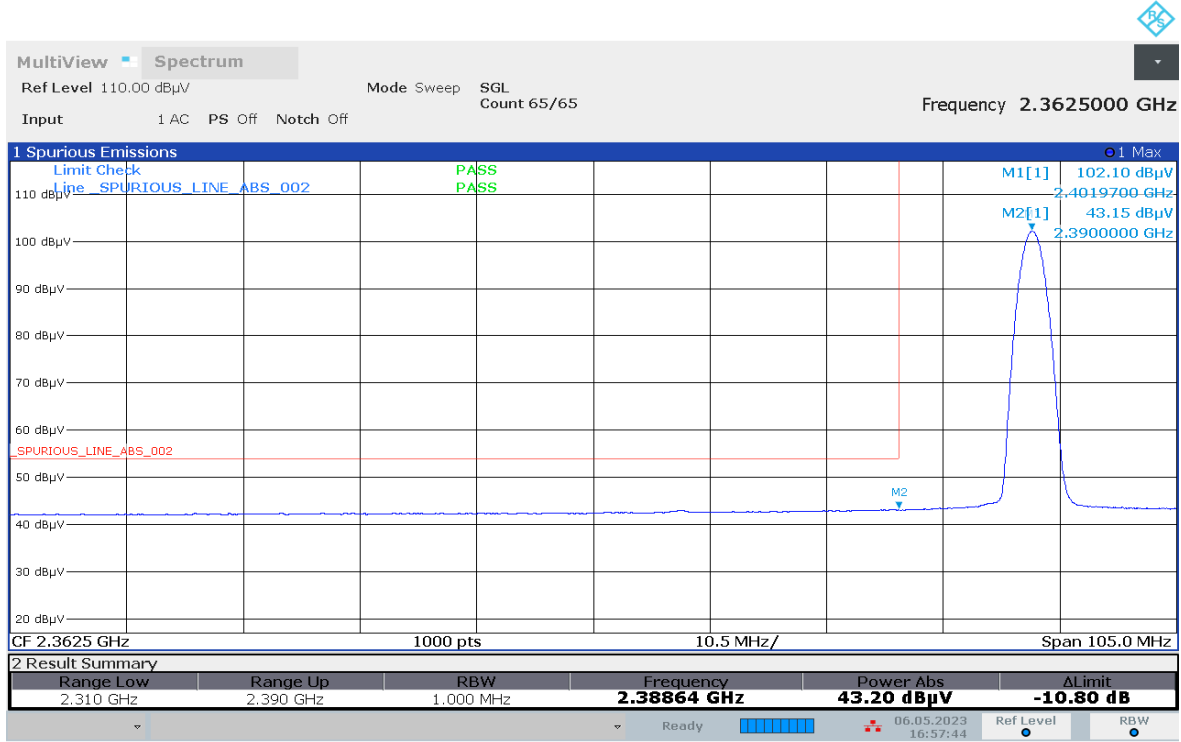


16:57:45 06.05.2023

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

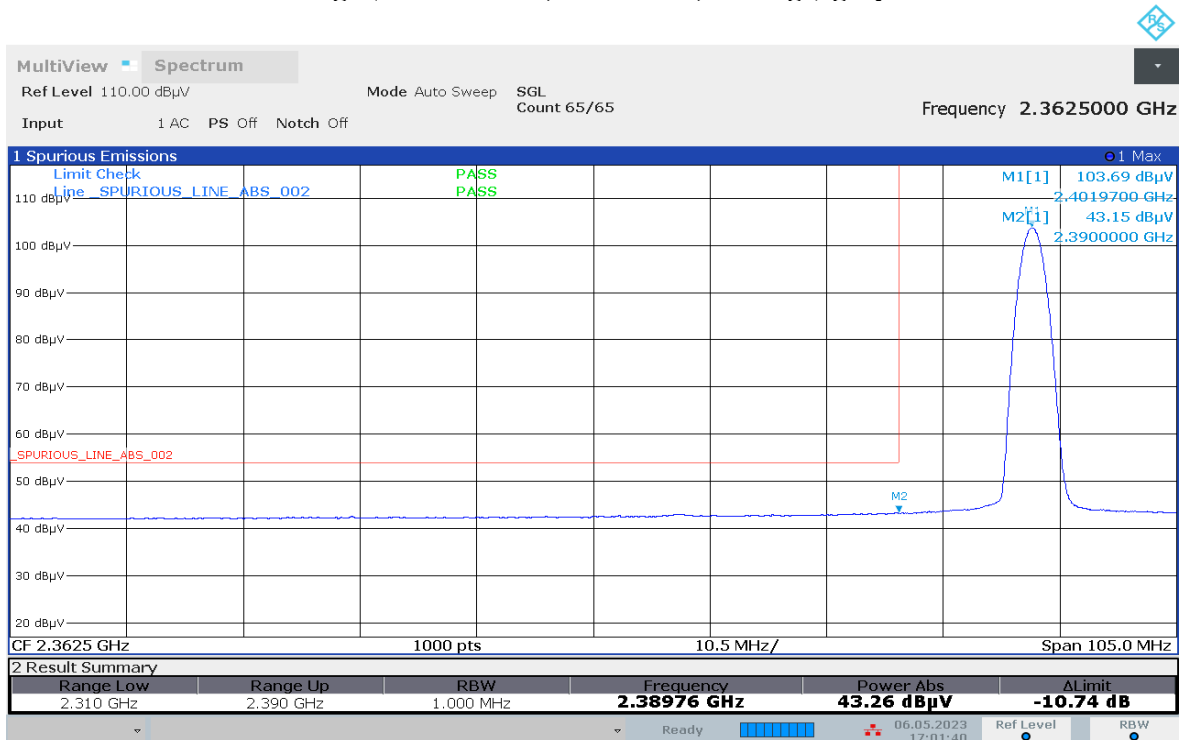


17:01:40 06.05.2023

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

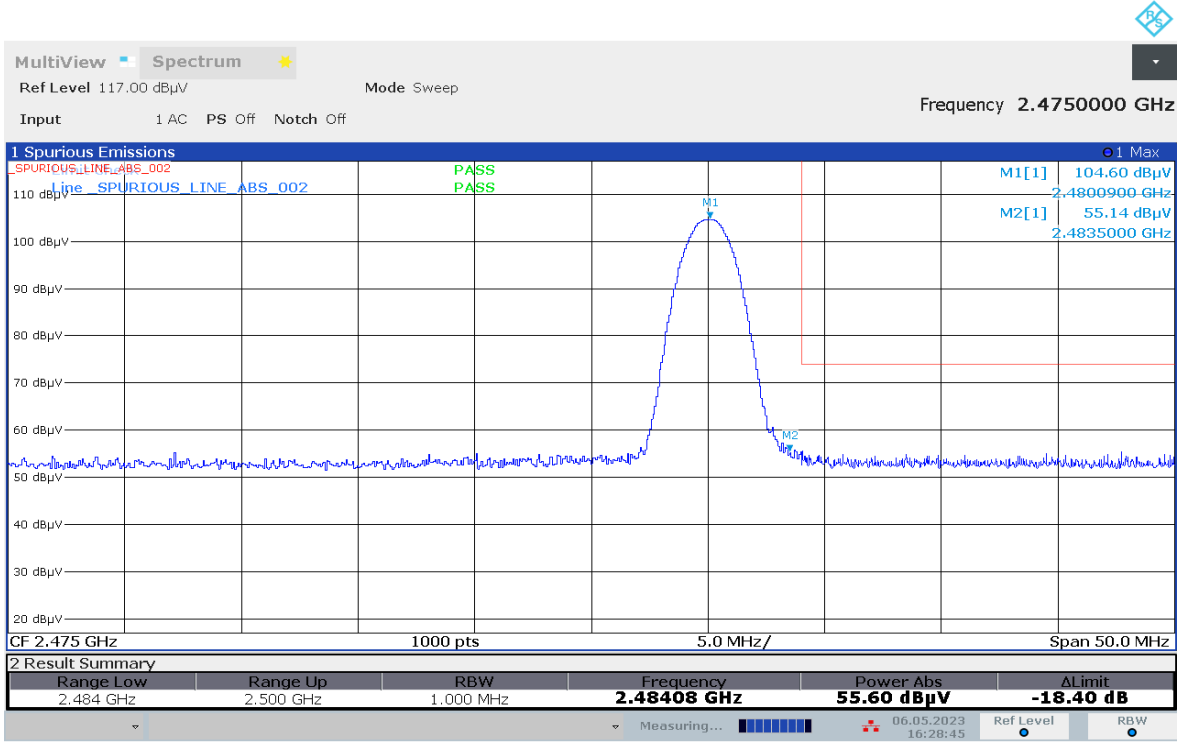


16:28:46 06.05.2023

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

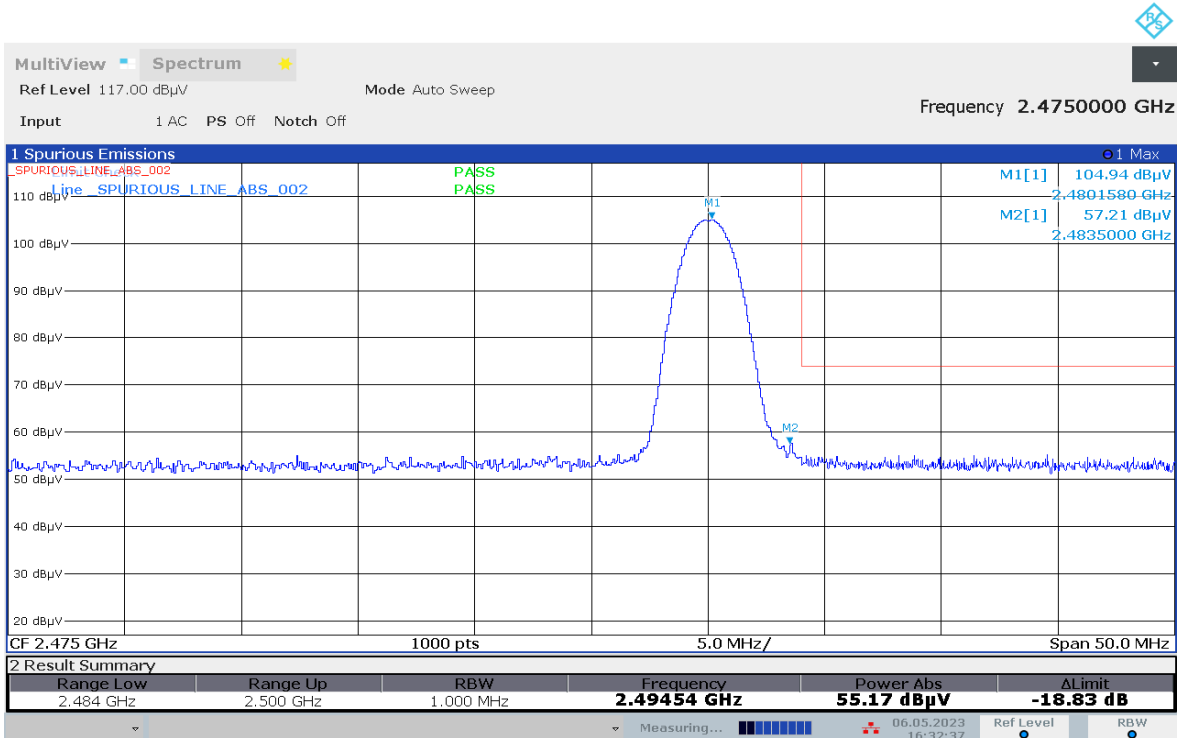


16:32:37 06.05.2023

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

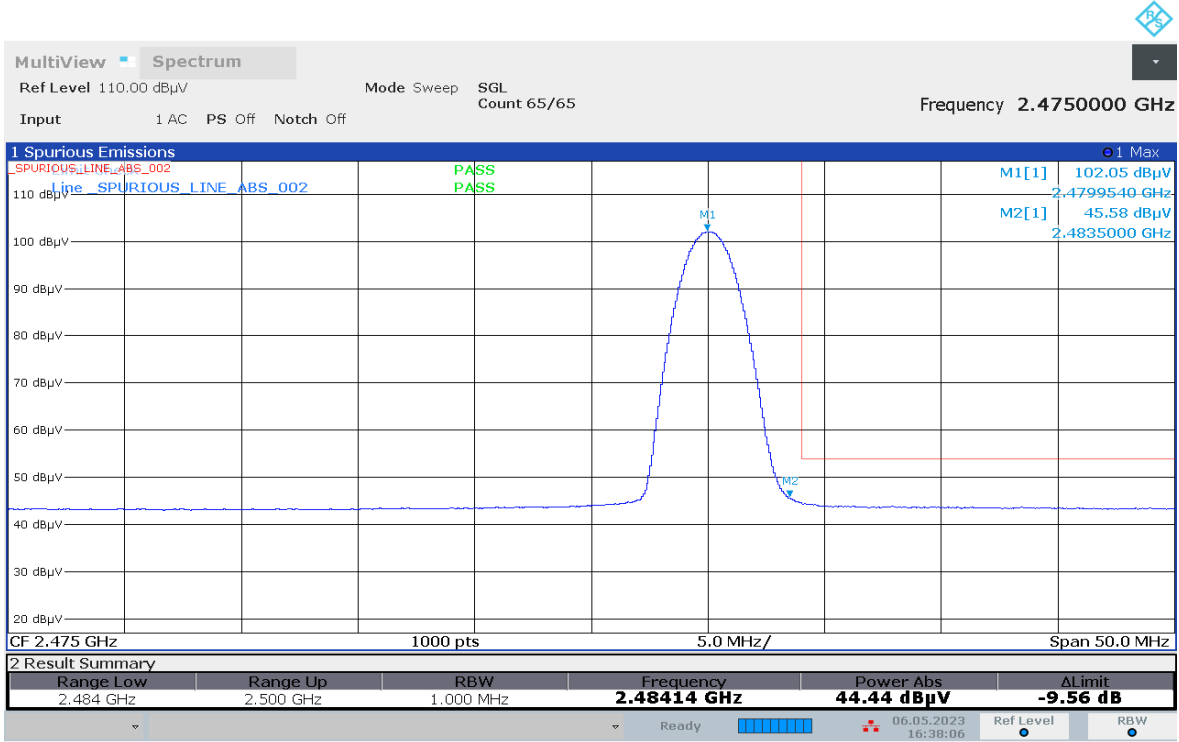

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

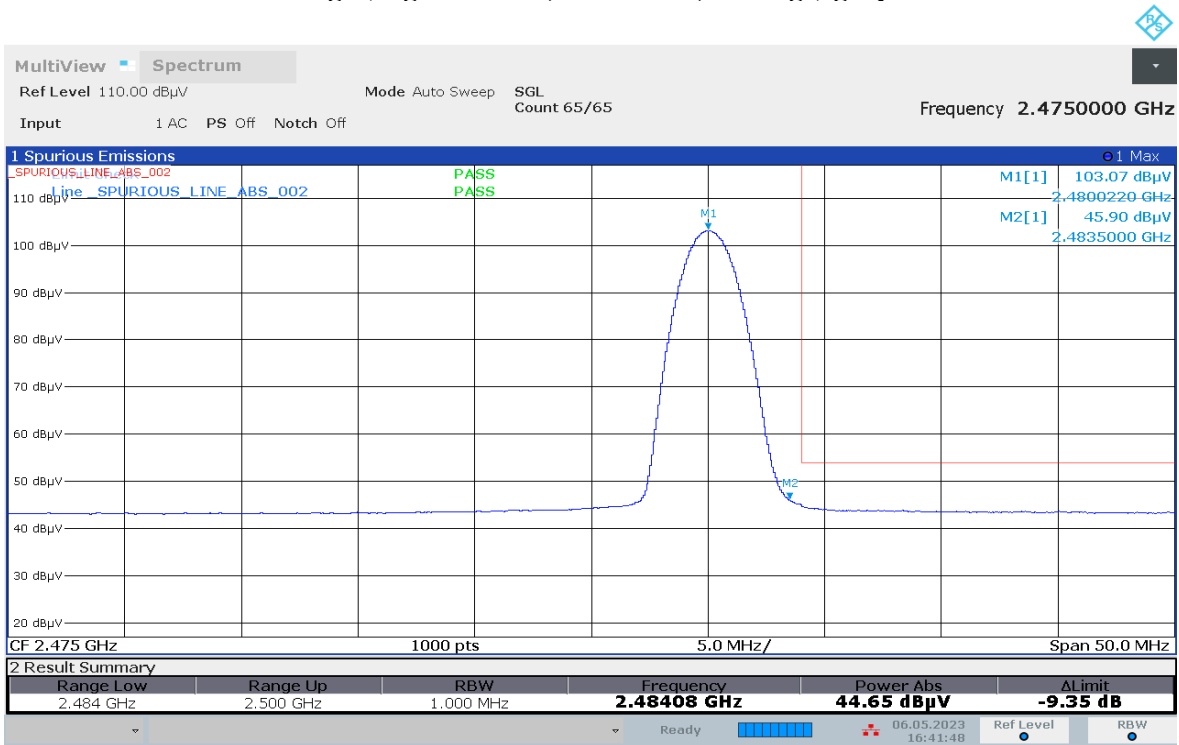

Test: Bluetooth SAC Restricted Band Edge
Model Number: NA **S/N: PMMN4156A-CF9** **EMC SR ID#: 36811-EMC-00039**
Battery: PMNN4846A **Accessory: NA**
Test Channel: Low **Test Frequency: 2402.0000 MHz** **Test Standard: ANSI C63.10-2013**
Worst Case Plane: Y-Plane (8DPSK)

Restricted Band Edge (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
2390.0000	-	53.4952	42.9817	-	74.0000	54.0000	-	20.5048	11.0183	-
Horizontal Radiated Emission Result										
2390.0000	-	53.6873	43.2610	-	74.0000	54.0000	-	20.3127	10.7390	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.6
 Test Performed by: Nazrin & Qawiman
 System MU: 5.84dB


Humidity (%): 69.8
 Test Date: Sat, 6 May, 2023

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

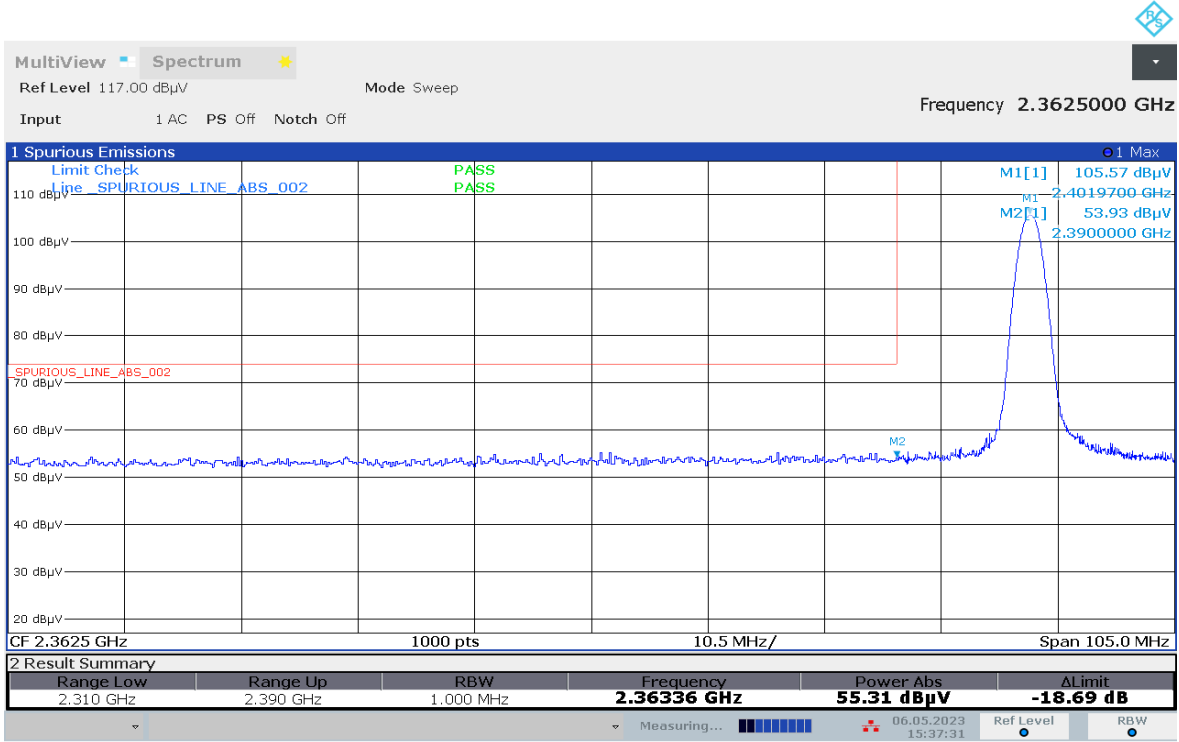

15:37:32 06.05.2023

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

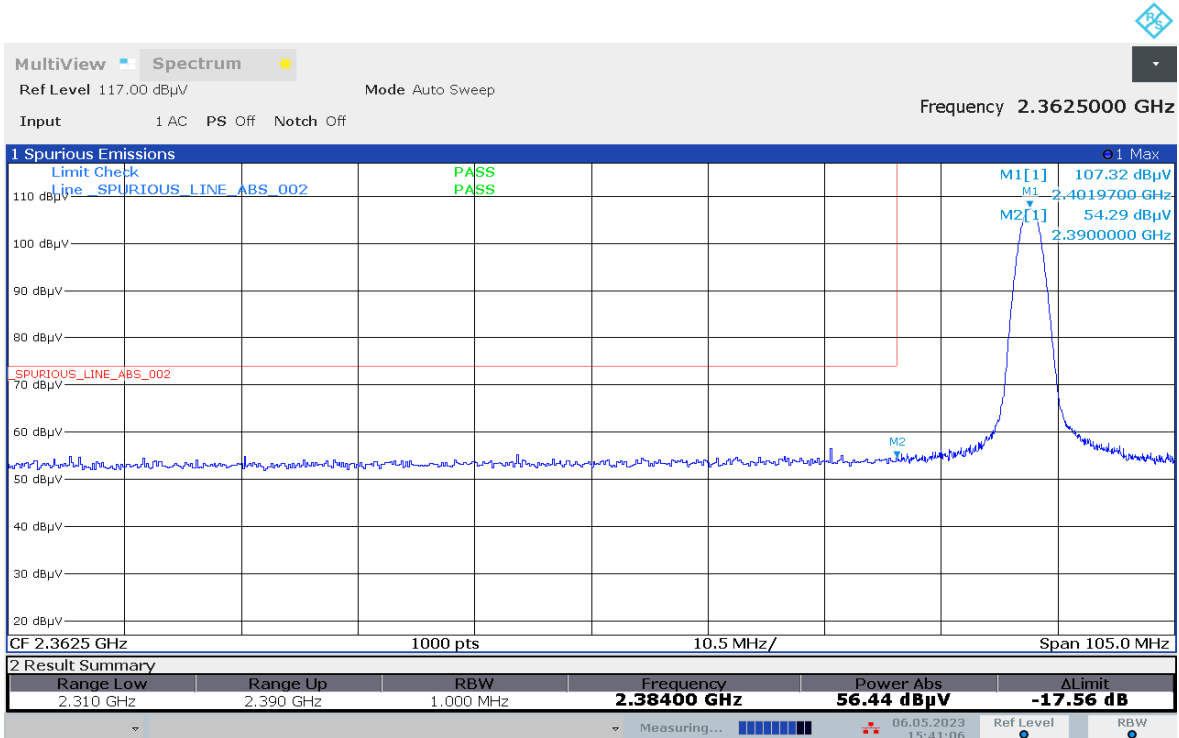


15:41:06 06.05.2023

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot




15:48:11 06.05.2023

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

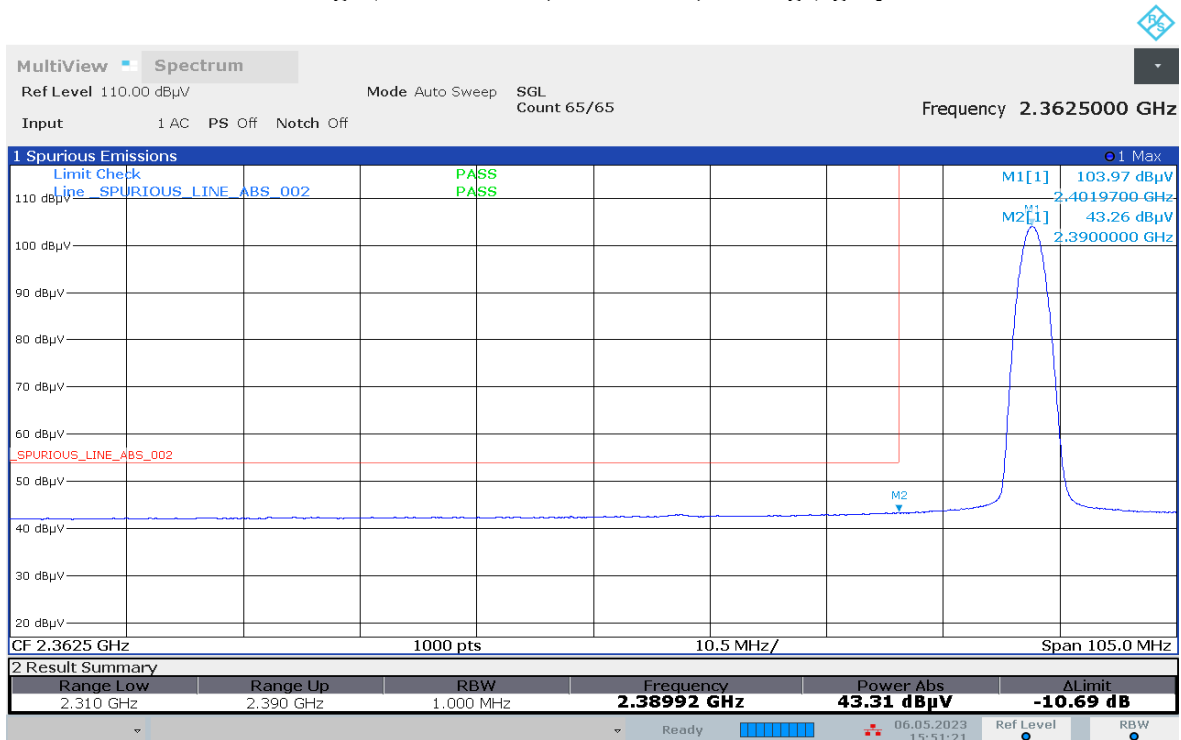


15:51:22 06.05.2023

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

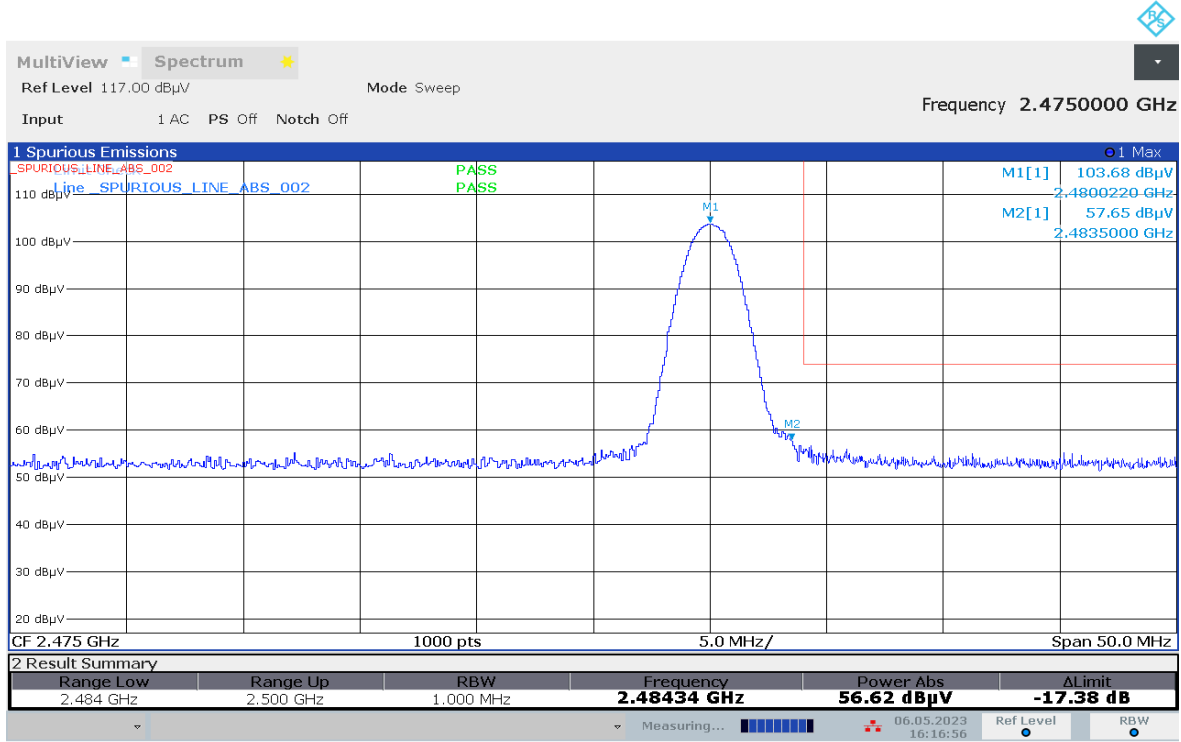


16:16:56 06.05.2023

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

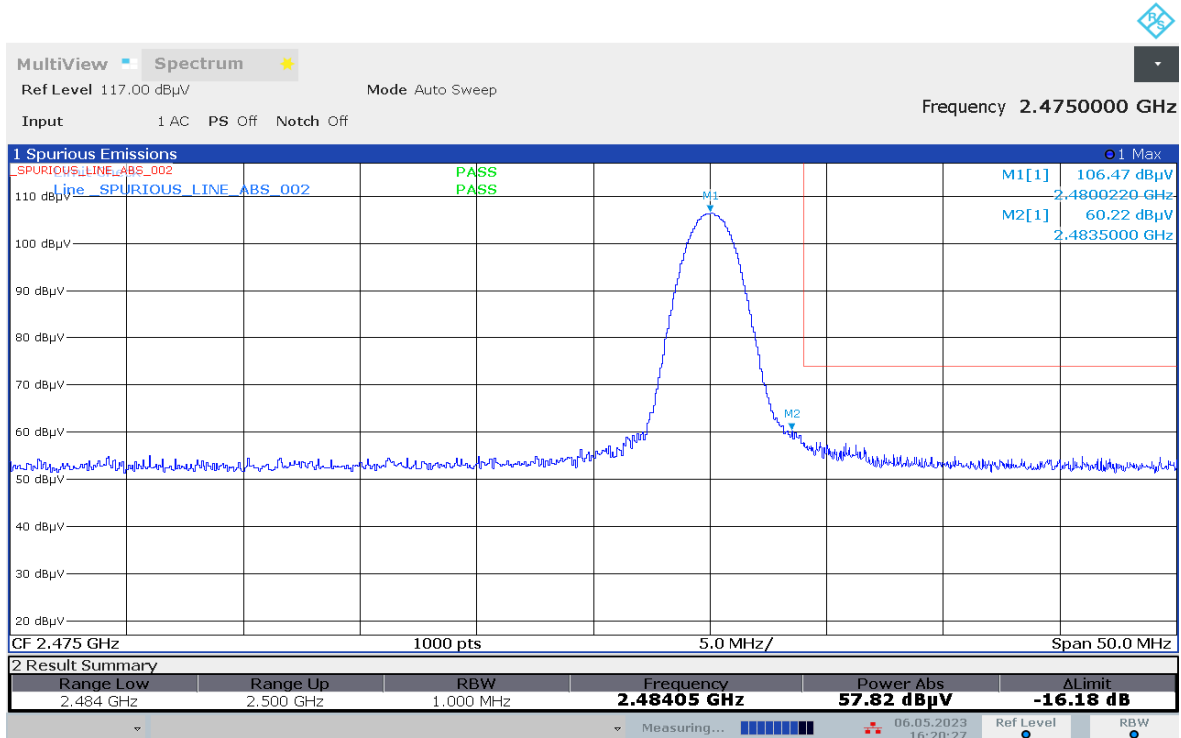


16:20:28 06.05.2023

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

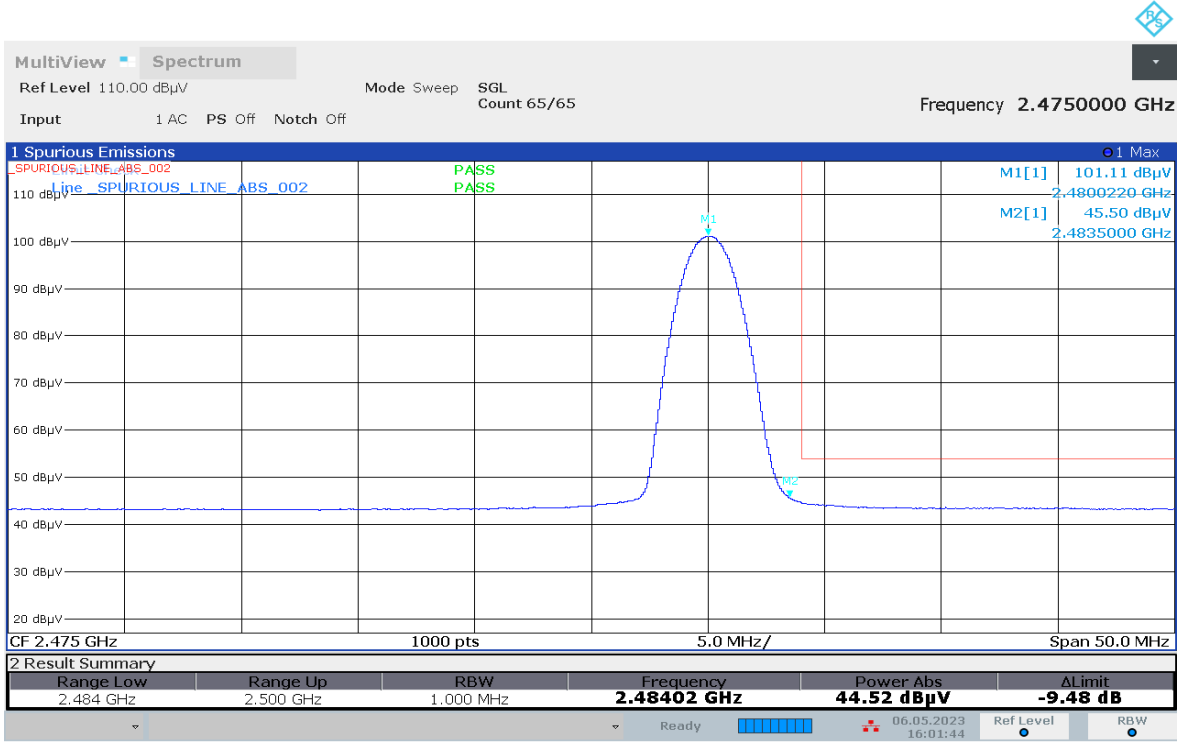

16:01:44 06.05.2023

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

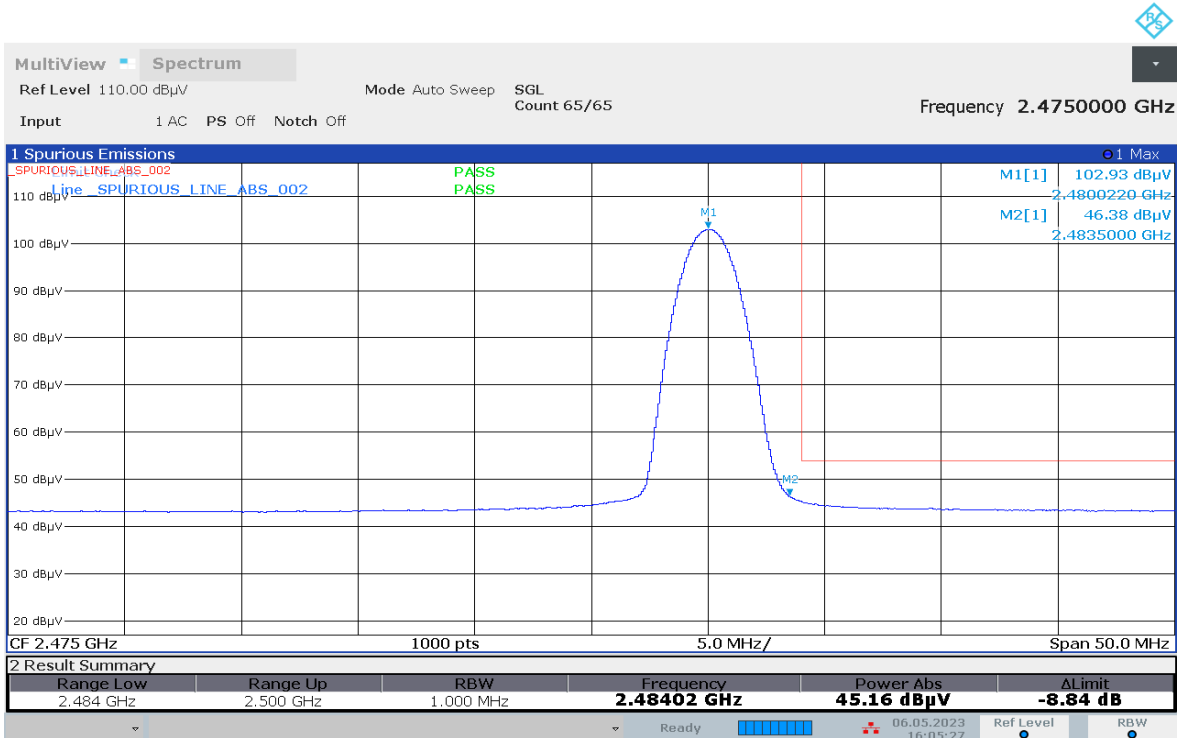

16:05:28 06.05.2023

Test: Bluetooth SAC Transmitter Radiated Emission
Model#: NA **S/N: PMMN4156A-CF9** **EMC SR ID#: 36811-EMC-00039**
Battery: PMNN4846A **Accessory: NA**
Test Channel: Low **Test Frequency: 2402.0000 MHz** **Test Standard: ANSI C63.10-2013**
Worst Case Plane: Y-Plane (GFSK)

Radiated Emission (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4804	-	50.2059**	-	-	74.0000	-	-	23.7941	-	-
7206	-	53.3691**	-	-	88.3296	-	-	34.9605	-	108.3296
9608	-	55.4158**	-	-	88.3296	-	-	32.9138	-	108.3296
12010	-	63.0846**	40.5846**	-	74.0000	54.0000	-	10.9154	13.4154	-
14412	-	61.8764**	-	-	88.3296	-	-	26.4532	-	108.3296
16814	-	64.5125**	-	-	88.3296	-	-	23.8171	-	108.3296
19216	-	40.4060**	-	-	74.0000	-	-	33.5940	-	-
21618	-	39.9637**	-	-	88.3296	-	-	48.3659	-	108.3296
24020	-	40.5050**	-	-	88.3296	-	-	47.8246	-	108.3296
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4804	-	49.9216**	-	-	74.0000	-	-	24.0784	-	-
7206	-	54.5731**	-	-	88.3296	-	-	33.7565	-	108.3296
9608	-	55.2202**	-	-	88.3296	-	-	33.1094	-	108.3296
12010	-	63.3319**	40.8319**	-	74.0000	54.0000	-	10.6681	13.1681	-
14412	-	62.5303**	-	-	88.3296	-	-	25.7993	-	108.3296
16814	-	65.3453**	-	-	88.3296	-	-	22.9843	-	108.3296
19216	-	40.5075**	-	-	74.0000	-	-	33.4925	-	-
21618	-	41.7308**	-	-	88.3296	-	-	46.5988	-	108.3296
24020	-	39.9257**	-	-	88.3296	-	-	48.4039	-	108.3296

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.6 **Humidity (%): 69.8**
Test Performed by: Nazrin&Qawiman **Test Date: Sun, 7 May, 2023**
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-1800MHz), 6.02 dB (1800MHz-4000MHz)

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

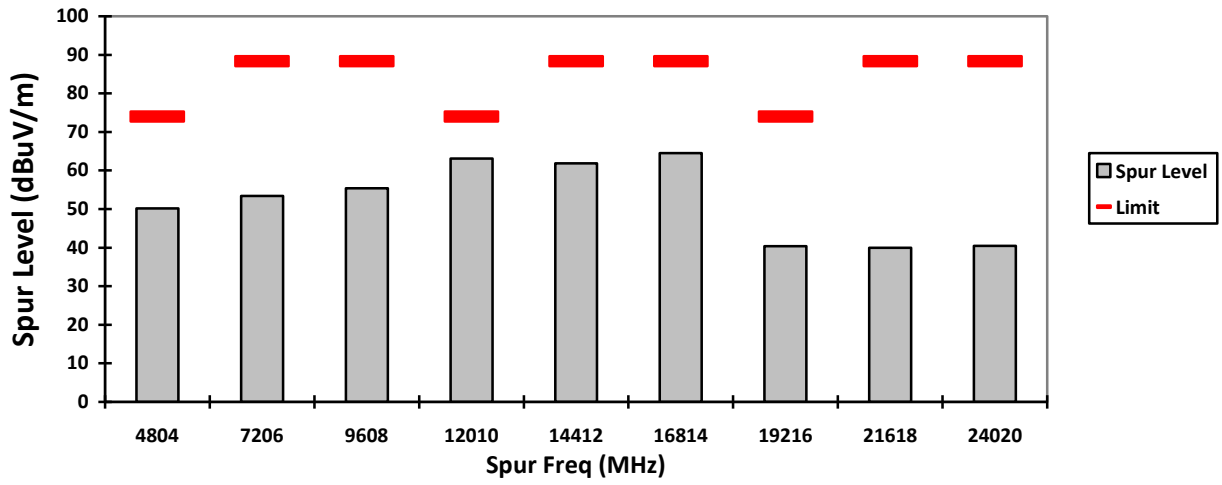


HORIZONTAL, PK

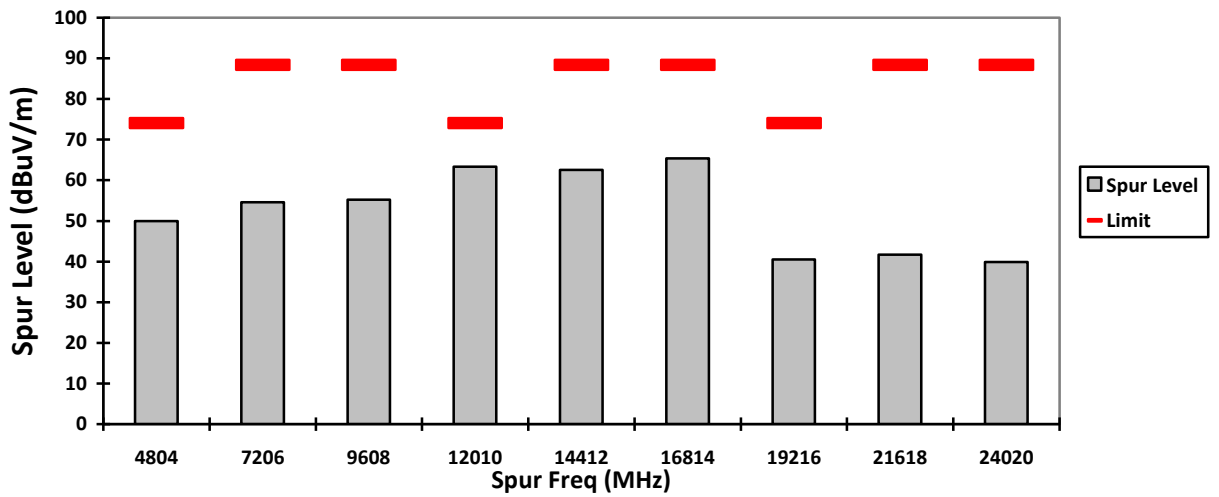

VERTICAL, AV

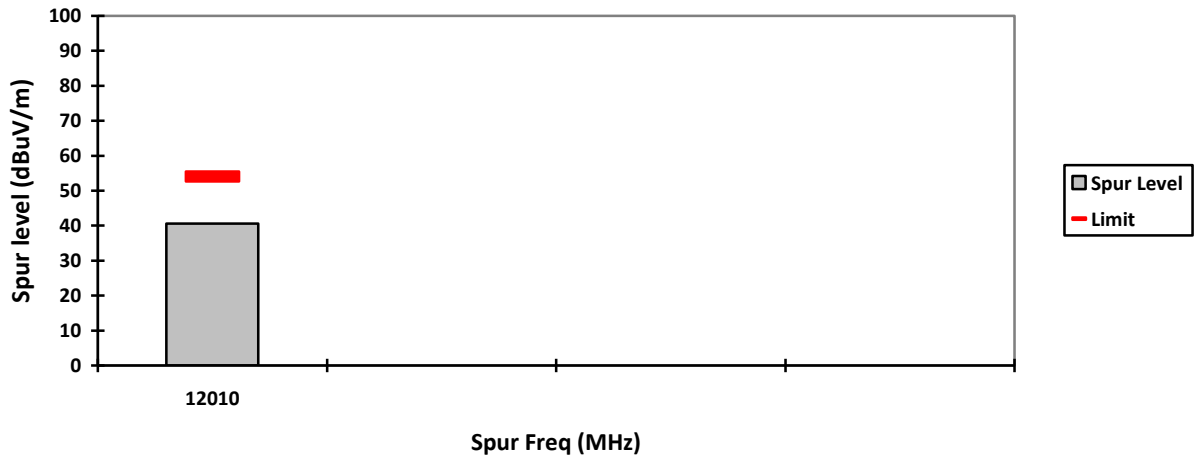

HORIZONTAL, AV

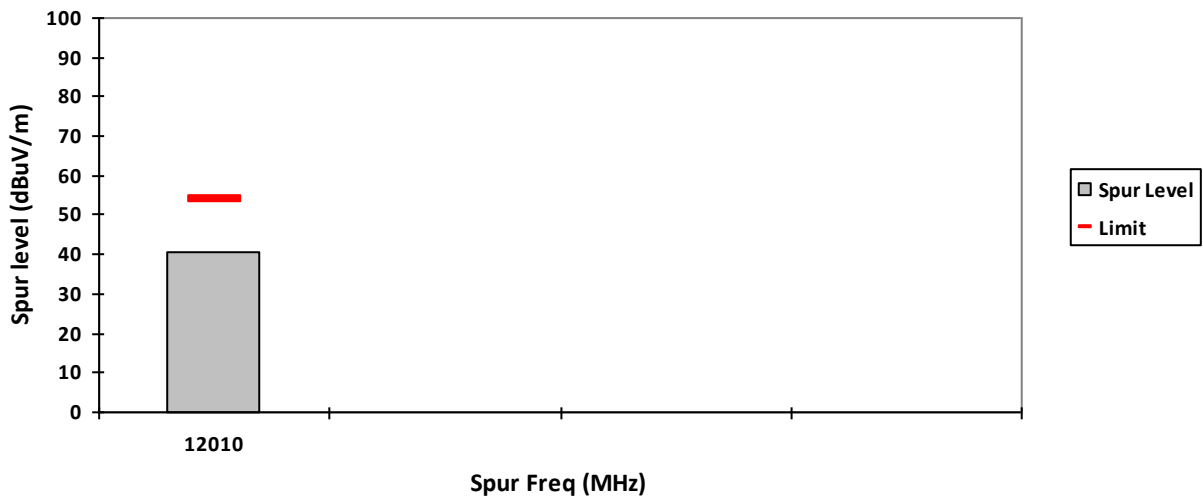

Test: Bluetooth SAC Transmitter Radiated Emission
Model#: NA S/N: PMMN4156A-CF9 EMC SR ID#: 36811-EMC-00039
Battery: PMNN4846A Accessory: NA
Test Channel: Mid Test Frequency: 2441.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Y-Plane (GFSK)

Radiated Emission (Mid Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4882	-	49.8899**	-	-	74.0000	-	-	24.1101	-	-
7323	-	57.2105**	34.7105**	-	74.0000	54.0000	-	16.7895	19.2895	-
9764	-	56.3354**	-	-	88.3296	-	-	31.9942	-	108.3296
12205	-	63.0599**	40.5599**	-	74.0000	54.0000	-	10.9401	13.4401	-
14646	-	61.7929**	-	-	88.3296	-	-	26.5367	-	108.3296
17087	-	66.9930**	-	-	88.3296	-	-	21.3366	-	108.3296
19528	-	39.1962**	-	-	74.0000	-	-	34.8038	-	-
21969	-	41.6691**	-	-	88.3296	-	-	46.6605	-	108.3296
24410	-	40.5020**	-	-	88.3296	-	-	47.8276	-	108.3296
Horizontal Radiated Emission Result										
4882	-	49.7800**	-	-	74.0000	-	-	24.2200	-	-
7323	-	57.2413**	34.7413**	-	74.0000	54.0000	-	16.7587	19.2587	-
9764	-	58.5467**	-	-	88.3296	-	-	29.7829	-	108.3296
12205	-	62.7950**	40.2950**	-	74.0000	54.0000	-	11.2050	13.7050	-
14646	-	61.9705**	-	-	88.3296	-	-	26.3591	-	108.3296
17087	-	67.2321**	-	-	88.3296	-	-	21.0975	-	108.3296
19528	-	38.9713**	-	-	74.0000	-	-	35.0287	-	-
21969	-	41.5914**	-	-	88.3296	-	-	46.7382	-	108.3296
24410	-	40.7540**	-	-	88.3296	-	-	47.5756	-	108.3296

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.6 Humidity (%): 69.8
Test Performed by: Nazrin&Qawiman Test Date: Sun, 7 May, 2023
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

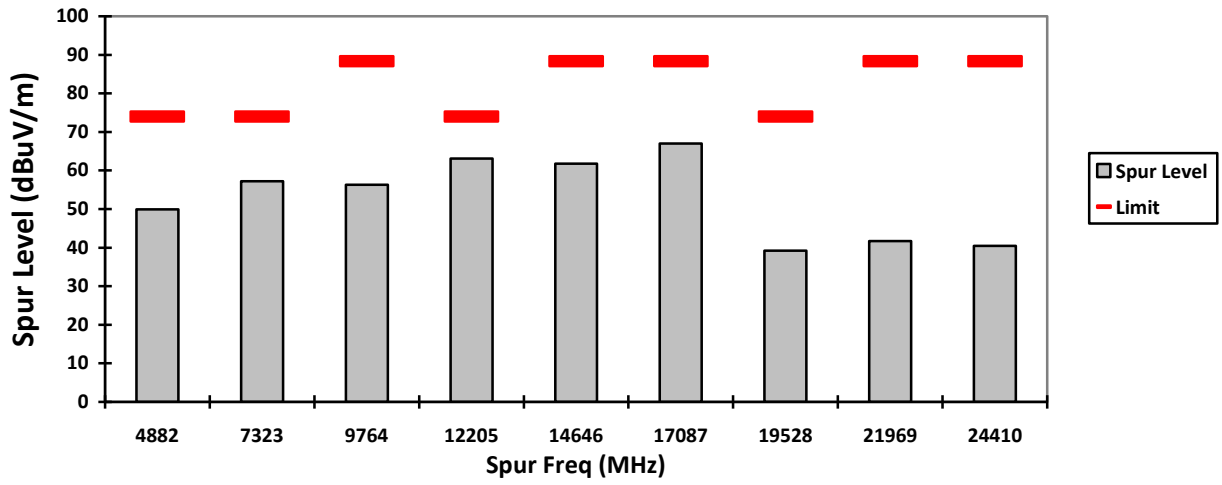


HORIZONTAL, PK

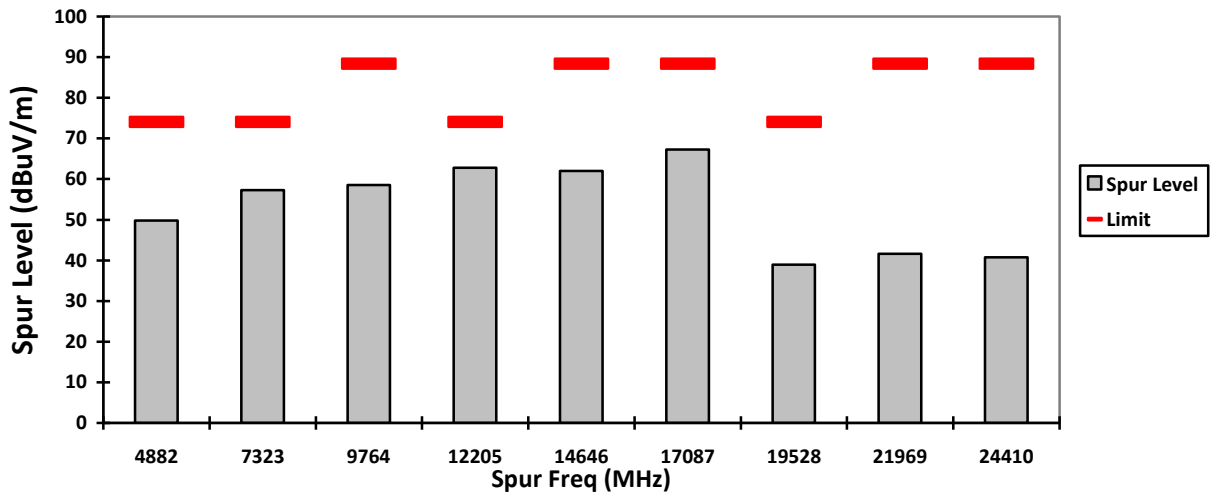

VERTICAL, AV

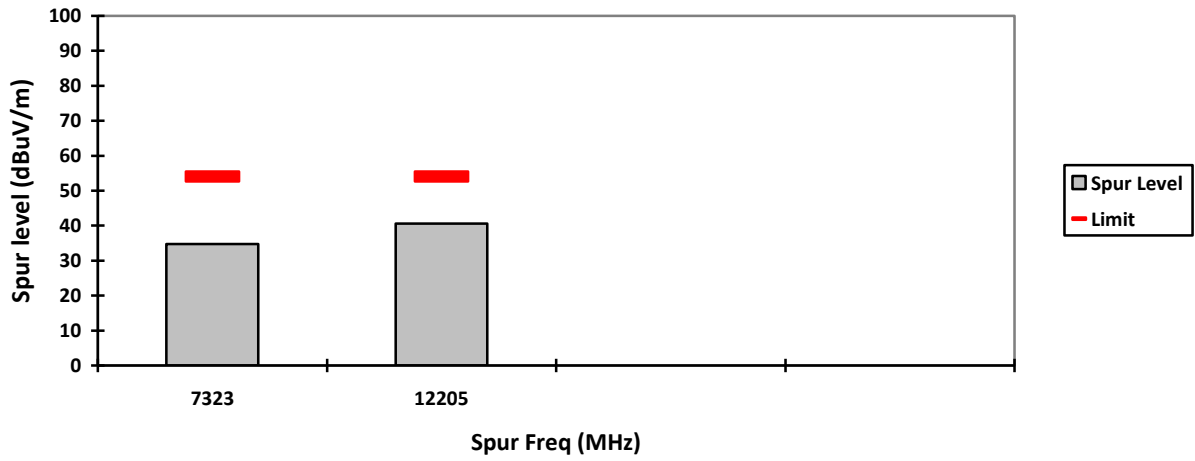

HORIZONTAL, AV

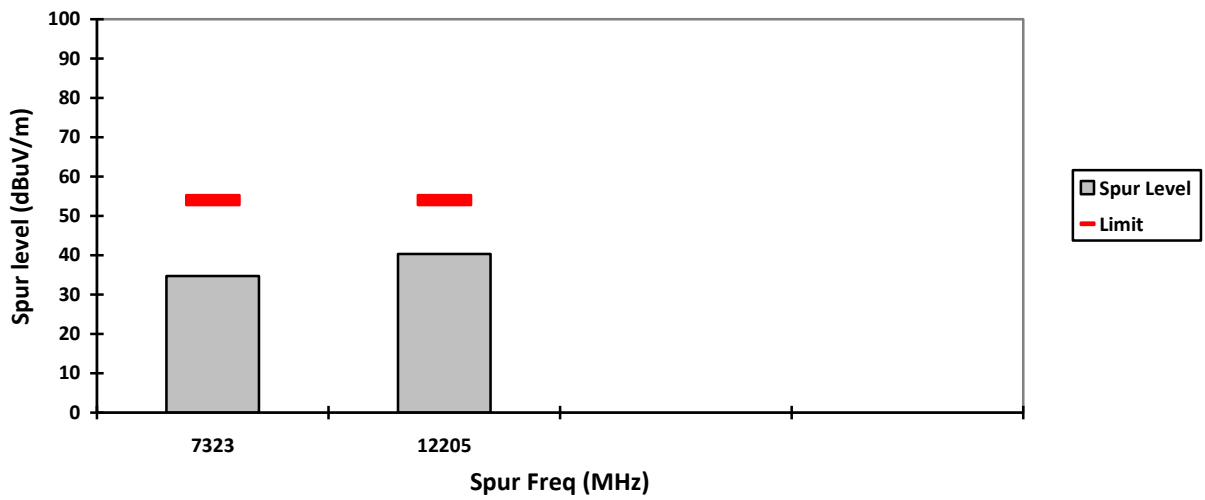

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: NA S/N: PMMN4156A-CF9 EMC SR ID#: 36811-EMC-00039
 Battery: PMNN4846A Accessory: NA
 Test Channel: High Test Frequency: 2480.0000 MHz Test Standard: ANSI C63.10-2013
 Worst Case Plane: Y-Plane (GFSK)

Radiated Emission (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4960	-	49.6138**	-	-	74.0000	-	-	24.3862	-	-
7440	-	57.8827**	35.3827**	-	74.0000	54.0000	-	16.1173	18.6173	-
9920	-	55.5499**	-	-	88.3296	-	-	32.7797	-	108.3296
12400	-	63.7527**	41.2527**	-	74.0000	54.0000	-	10.2473	12.7473	-
14880	-	62.6833**	-	-	88.3296	-	-	25.6463	-	108.3296
17360	-	66.8521**	-	-	88.3296	-	-	21.4775	-	108.3296
19840	-	40.8633**	-	-	74.0000	-	-	33.1367	-	-
22320	-	41.6329**	-	-	74.0000	-	-	32.3671	-	-
24800	-	41.7337**	-	-	88.3296	-	-	46.5959	-	108.3296
Horizontal Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4960	-	49.6715**	-	-	74.0000	-	-	24.3285	-	-
7440	-	57.6388**	35.1388**	-	74.0000	54.0000	-	16.3612	18.8612	-
9920	-	55.8749**	-	-	88.3296	-	-	32.4547	-	108.3296
12400	-	63.0467**	40.5467**	-	74.0000	54.0000	-	10.9533	13.4533	-
14880	-	62.4964**	-	-	88.3296	-	-	25.8332	-	108.3296
17360	-	68.1599**	-	-	88.3296	-	-	20.1697	-	108.3296
19840	-	39.7349**	-	-	74.0000	-	-	34.2651	-	-
22320	-	41.8773**	-	-	74.0000	-	-	32.1227	-	-
24800	-	41.7330**	-	-	88.3296	-	-	46.5966	-	108.3296

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.6 Humidity (%): 69.8
 Test Performed by: Nazrin&Qawiman Test Date: Sun, 7 May, 2023
 System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

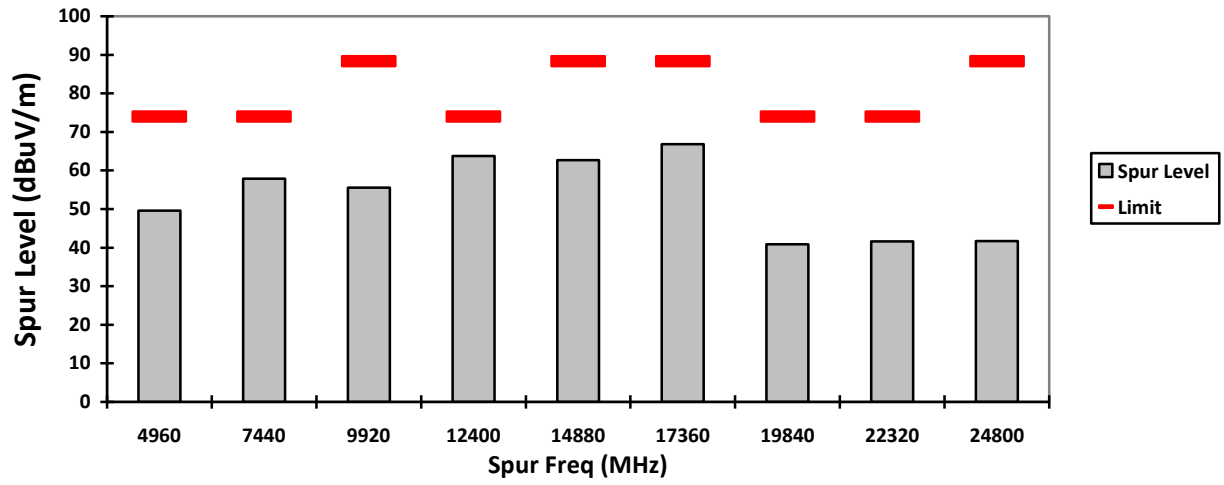


HORIZONTAL, PK

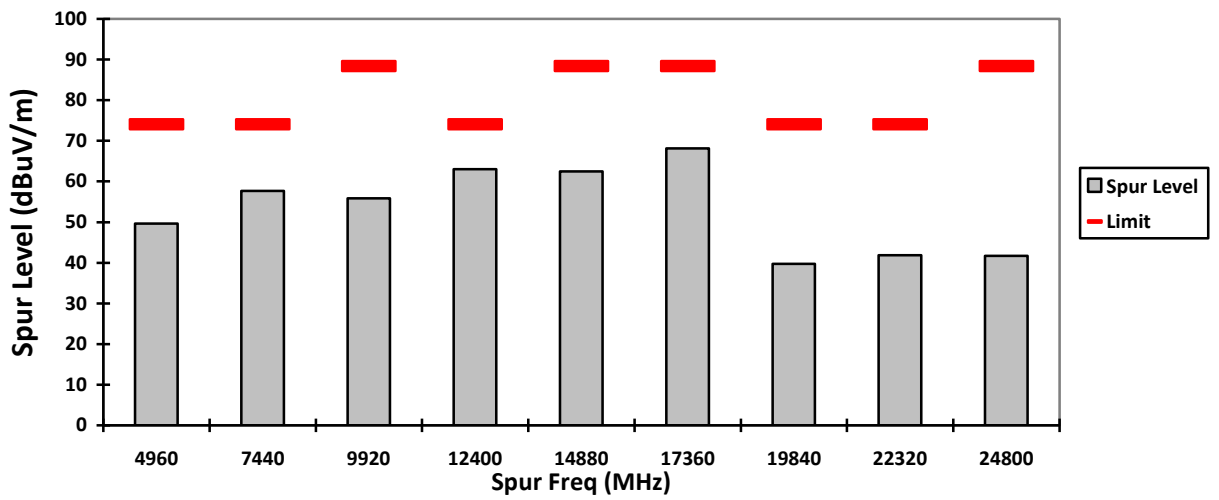

VERTICAL, AV

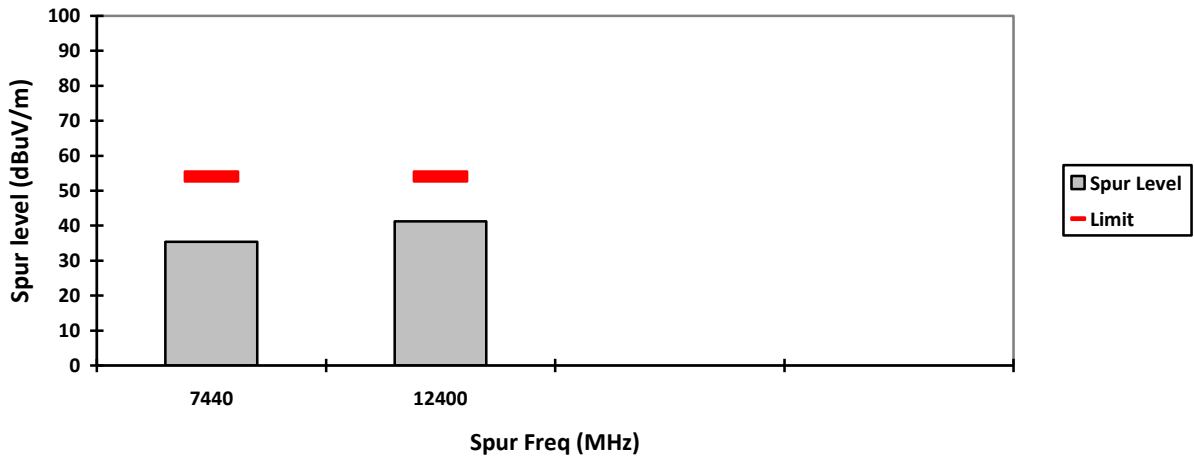

HORIZONTAL, AV

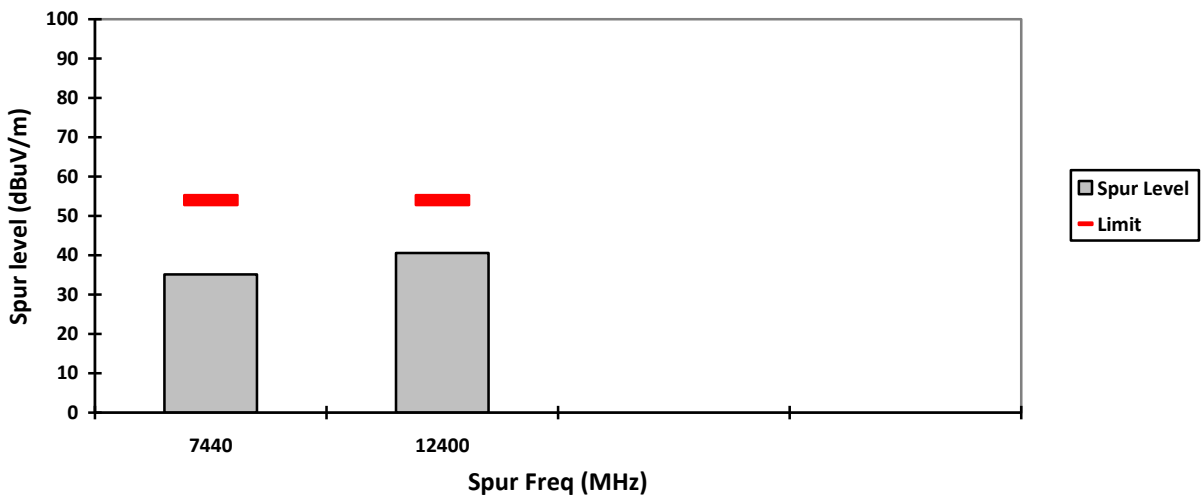

NOTE:

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)

Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)
 Adjusted channel hop rate for DH5 mode = 133.33 hops/second
 Time per channel hop = 1 / 133.33 hops/second = 7.5 ms
 Time to cycle through all channels = 7.5 x 20 channels = 150 ms
 Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)
 Worst case dwell time = 7.5 ms
 Duty cycle connection factor = $20\log_{10}(7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

Model#: NA
Test Channel: Low
Test: Bluetooth SAC Transmitter Radiated Emission
S/N: PMMN4156A-CF9
Battery: PMNN4846A
Test Frequency: 2402.0000 MHz
Worst Case Plane: Y-Plane (DQPSK)
EMC SR ID#: 36811-EMC-00039
Accessory: NA
Test Standard: ANSI C63.10-2013

Radiated Emission (Low Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4804	-	49.6043**	-	-	74.0000	-	-	24.3957	-	-
7206	-	53.6971**	-	-	88.3296	-	-	34.6325	-	108.3296
9608	-	56.3753**	-	-	88.3296	-	-	31.9543	-	108.3296
12010	-	62.6201**	40.1201**	-	74.0000	54.0000	-	11.3799	13.8799	-
14412	-	62.3829**	-	-	88.3296	-	-	25.9467	-	108.3296
16814	-	65.1031**	-	-	88.3296	-	-	23.2265	-	108.3296
19216	-	40.6438**	-	-	74.0000	-	-	33.3562	-	-
21618	-	39.8302**	-	-	88.3296	-	-	48.4994	-	108.3296
24020	-	40.5443**	-	-	88.3296	-	-	47.7853	-	108.3296
Horizontal Radiated Emission Result										
4804	-	49.0727**	-	-	74.0000	-	-	24.9273	-	-
7206	-	53.9654**	-	-	88.3296	-	-	34.3642	-	108.3296
9608	-	55.4196**	-	-	88.3296	-	-	32.9100	-	108.3296
12010	-	62.8779**	40.3779**	-	74.0000	54.0000	-	11.1221	13.6221	-
14412	-	62.2079**	-	-	88.3296	-	-	26.1217	-	108.3296
16814	-	65.3848**	-	-	88.3296	-	-	22.9448	-	108.3296
19216	-	41.2094**	-	-	74.0000	-	-	32.7906	-	-
21618	-	40.3788**	-	-	88.3296	-	-	47.9508	-	108.3296
24020	-	39.8780**	-	-	88.3296	-	-	48.4516	-	108.3296

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.6
Test Performed by: Nazrin&Qawiman
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)
Humidity (%): 69.8
Test Date: Sun, 7 May, 2023

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**


VERTICAL, PK

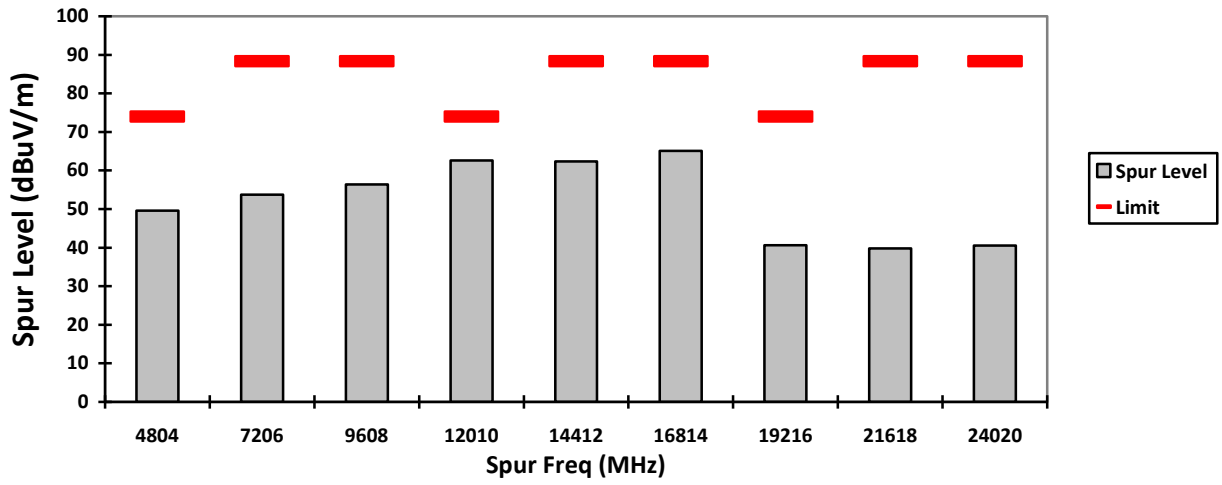


HORIZONTAL, PK

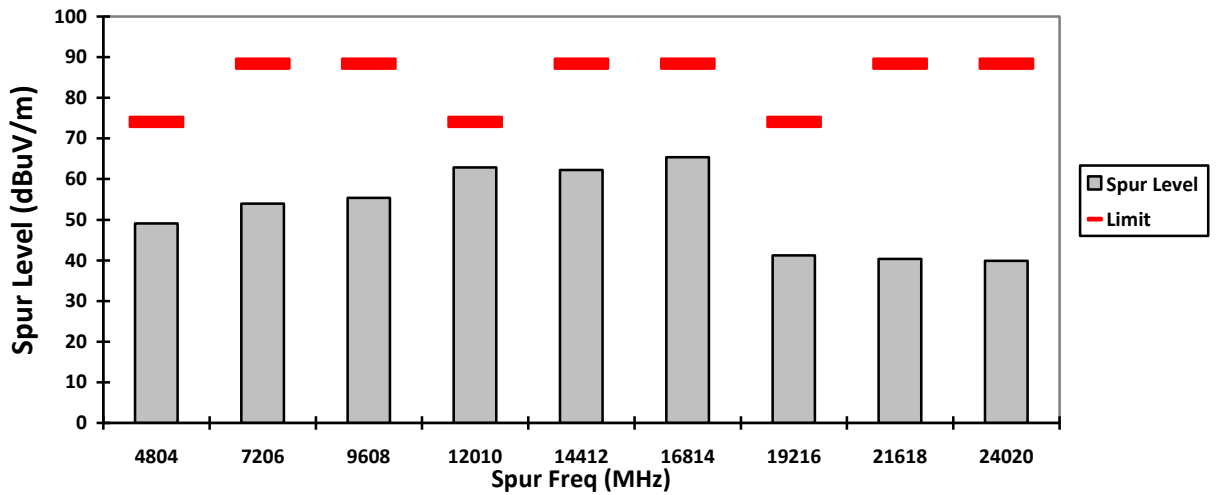


VERTICAL, AV

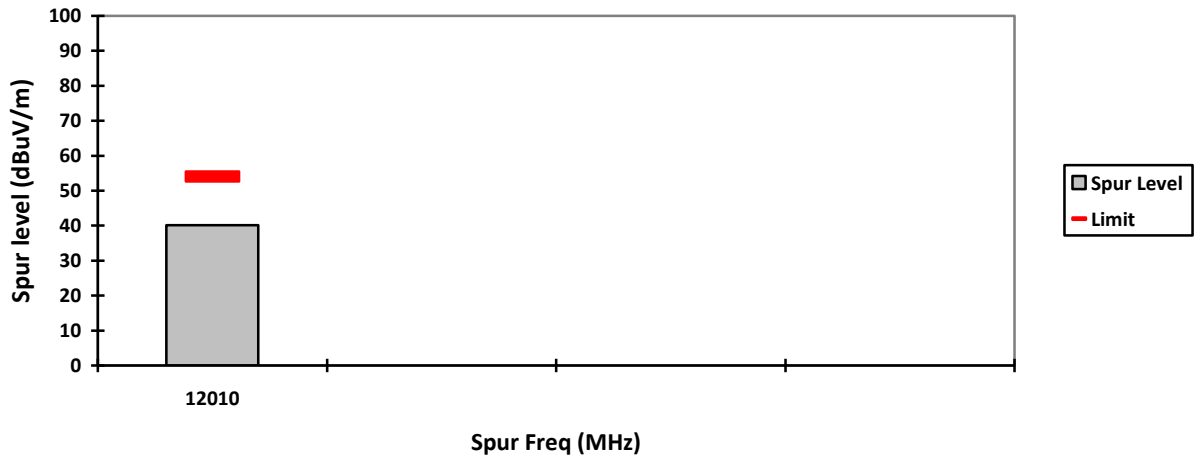


HORIZONTAL, AV

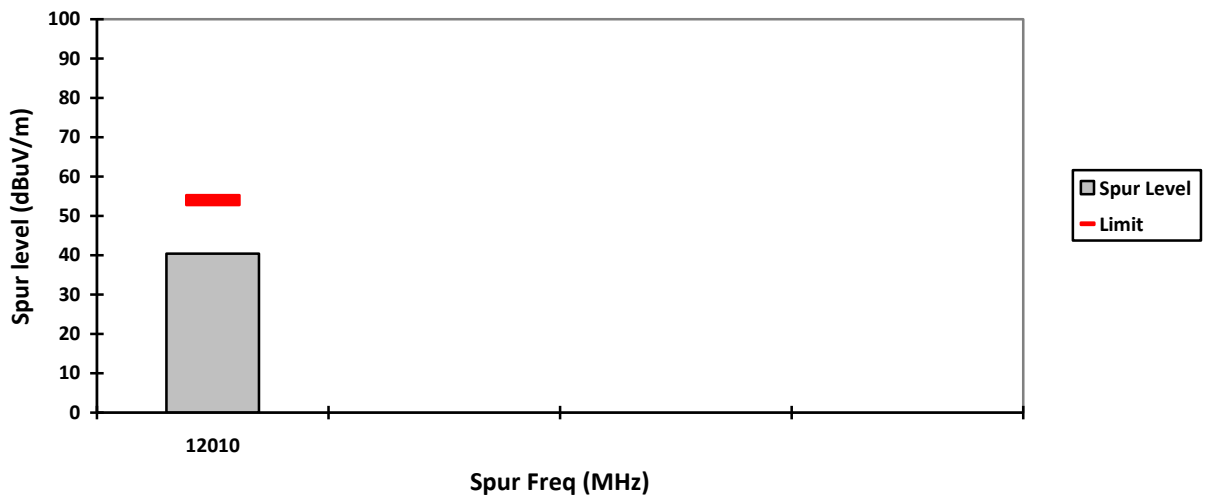


VERTICAL, PK

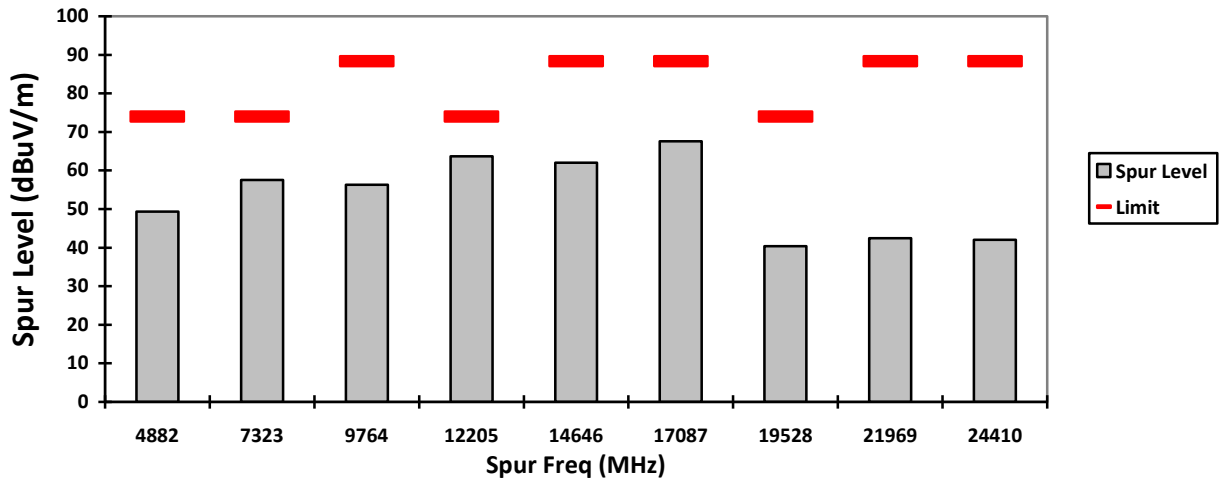


HORIZONTAL, PK

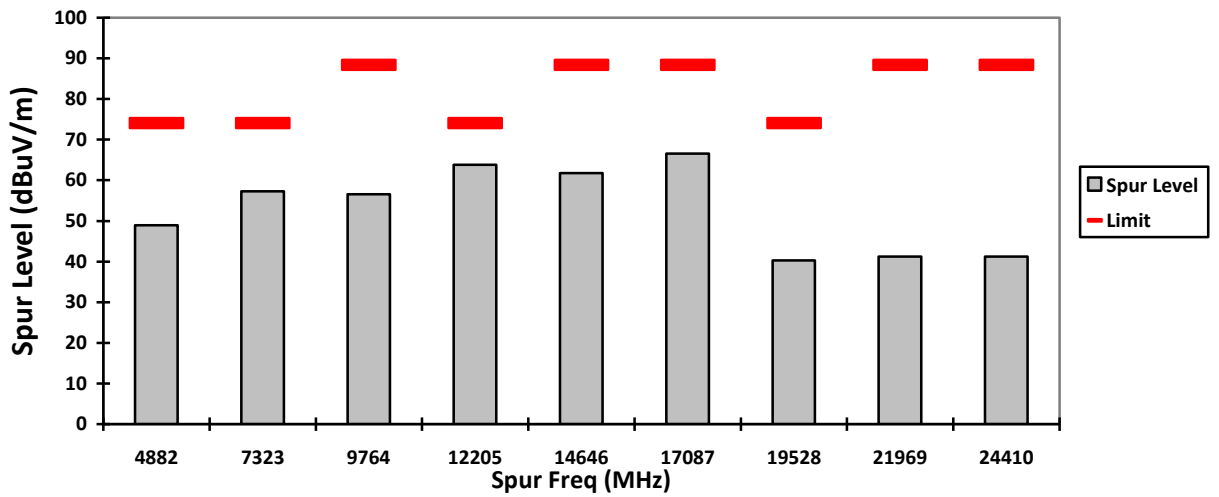

VERTICAL, AV

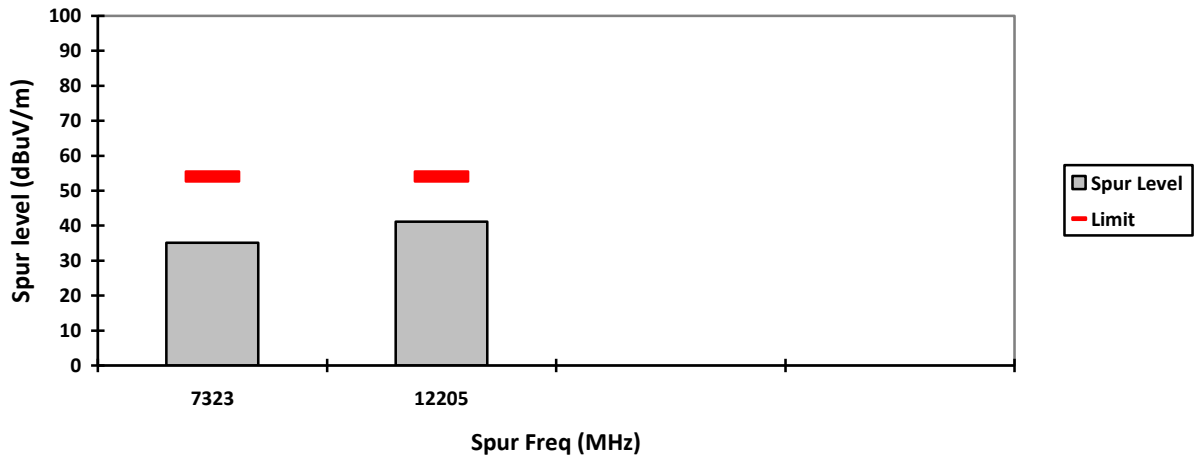

HORIZONTAL, AV

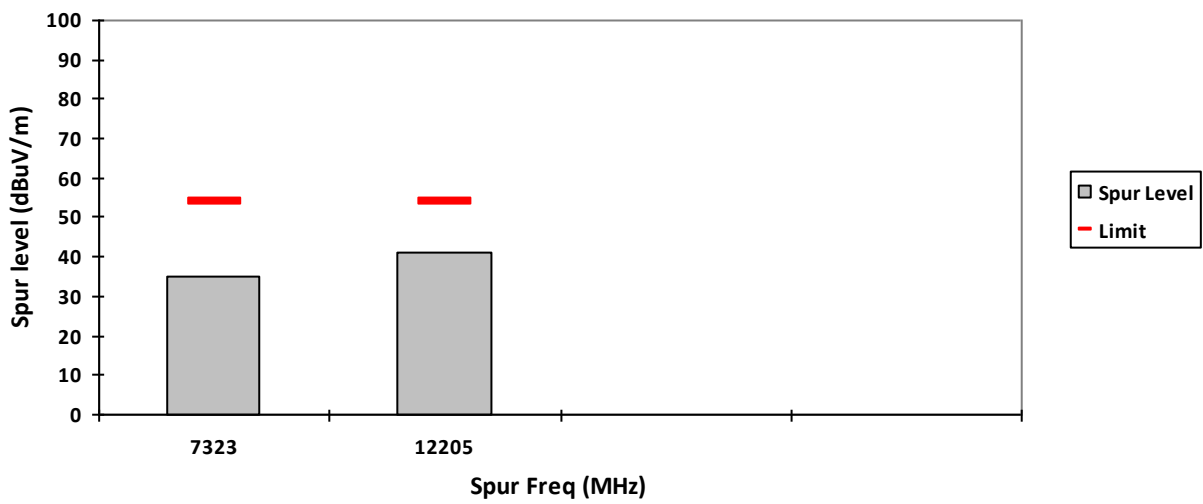

Test: Bluetooth SAC Transmitter Radiated Emission

Model#: NA

S/N: PMMN4156A-CF9

EMC SR ID#: 36811-EMC-00039

Battery: PMNN4846A

Accessory: NA

Test Channel: High

Test Frequency: 2480.0000 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: Y-Plane (DQPSK)

Radiated Emission (High Channel) tabular data


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4960	-	51.2266**	-	-	74.0000	-	-	22.7734	-	-
7440	-	57.7134**	35.2134**	-	74.0000	54.0000	-	16.2866	18.7866	-
9920	-	55.3738**	-	-	88.3296	-	-	32.9558	-	108.3296
12400	-	64.1044**	41.6044**	-	74.0000	54.0000	-	9.8956	12.3956	-
14880	-	61.4900**	-	-	88.3296	-	-	26.8396	-	108.3296
17360	-	67.4859**	-	-	88.3296	-	-	20.8437	-	108.3296
19840	-	39.1812**	-	-	74.0000	-	-	34.8188	-	-
22320	-	41.2786**	-	-	74.0000	-	-	32.7214	-	-
24800	-	41.7994**	-	-	88.3296	-	-	46.5302	-	108.3296
Horizontal Radiated Emission Result										
4960	-	49.9710**	-	-	74.0000	-	-	24.0290	-	-
7440	-	57.1654**	34.6654**	-	74.0000	54.0000	-	16.8346	19.3346	-
9920	-	56.7994**	-	-	88.3296	-	-	31.5302	-	108.3296
12400	-	63.5631**	41.0631**	-	74.0000	54.0000	-	10.4369	12.9369	-
14880	-	61.1530**	-	-	88.3296	-	-	27.1766	-	108.3296
17360	-	67.5570**	-	-	88.3296	-	-	20.7726	-	108.3296
19840	-	39.3472**	-	-	74.0000	-	-	34.6528	-	-
22320	-	41.9643**	-	-	74.0000	-	-	32.0357	-	-
24800	-	41.5710**	-	-	88.3296	-	-	46.7586	-	108.3296

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.6 **Humidity (%): 69.8**
Test Performed by: Nazrin&Qawiman **Test Date: Sun, 7 May, 2023**
System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz), 6.02 dB (18000MHz-40000MHz)

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**


VERTICAL, PK

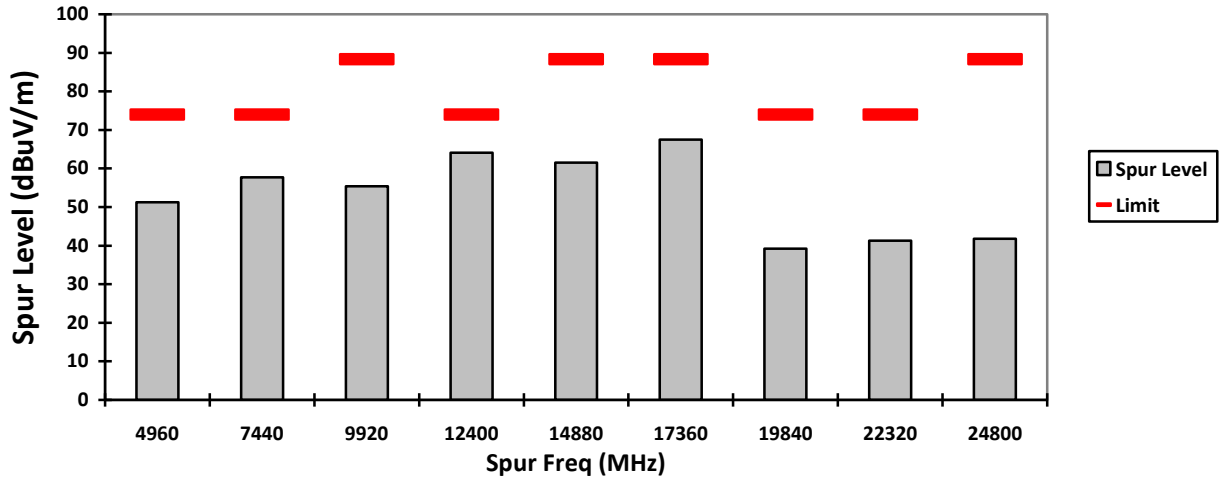


HORIZONTAL, PK

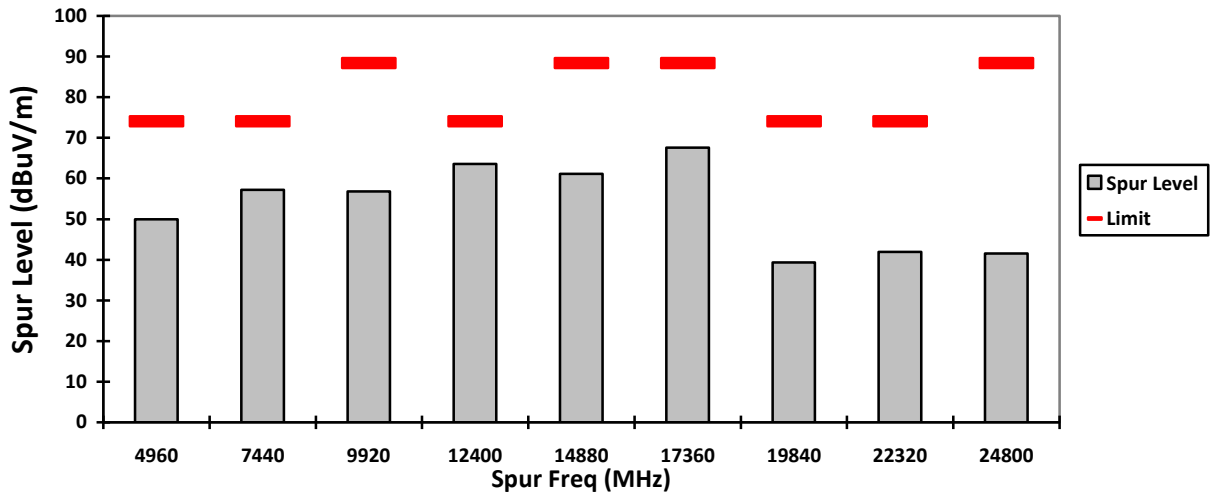

VERTICAL, AV

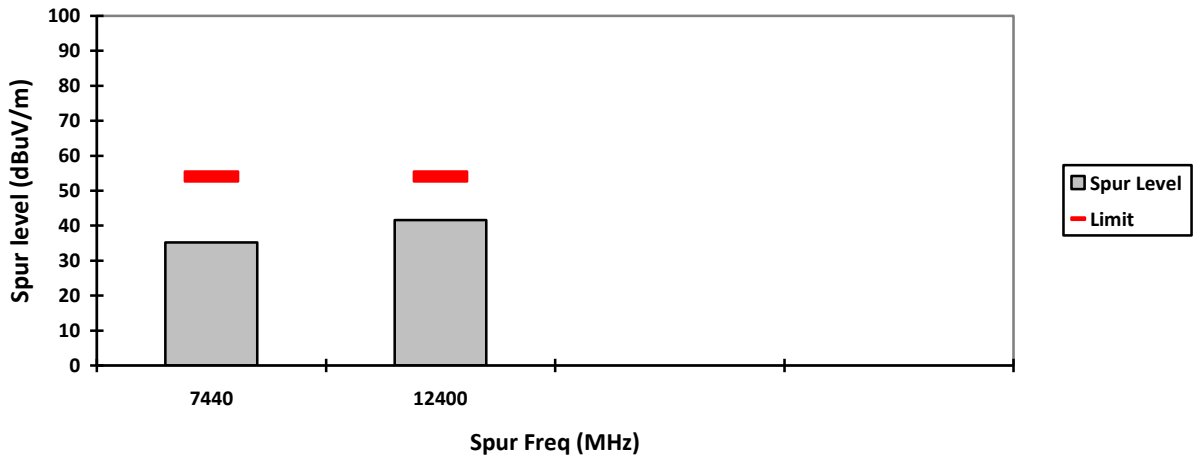

HORIZONTAL, AV

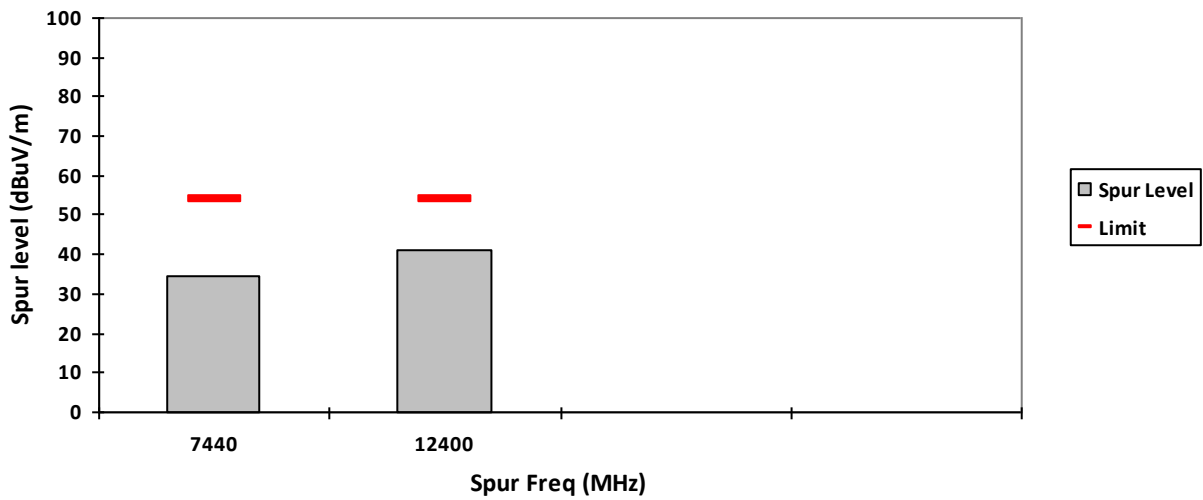


NOTE:

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)


Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)
 Adjusted channel hop rate for DH5 mode = 133.33 hops/second
 Time per channel hop = 1 / 133.33 hops/second = 7.5 ms
 Time to cycle through all channels = 7.5 x 20 channels = 150 ms
 Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)
 Worst case dwell time = 7.5 ms
 Duty cycle connection factor = $20\log_{10}(7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$


VERTICAL, PK

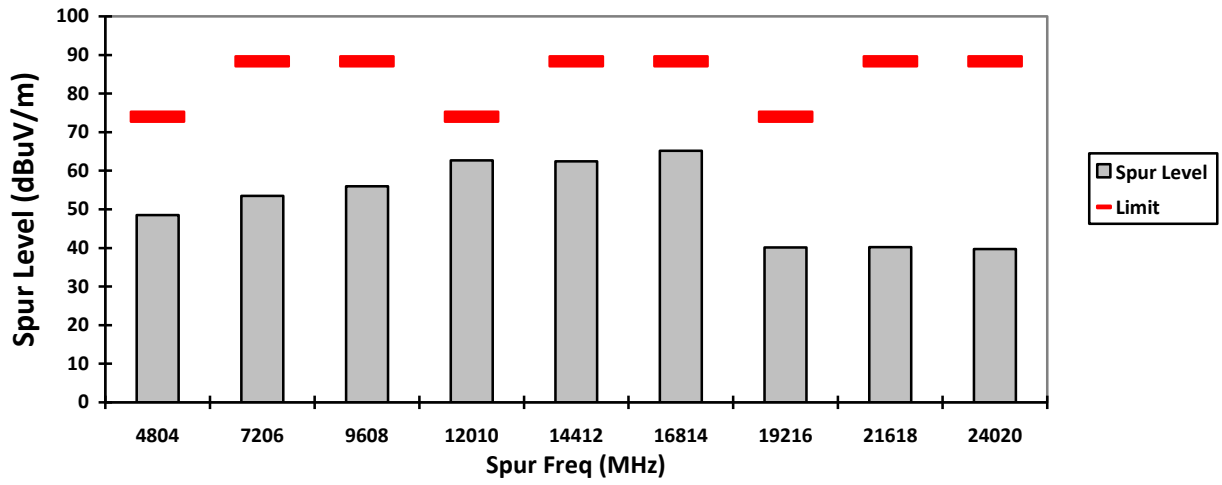


HORIZONTAL, PK

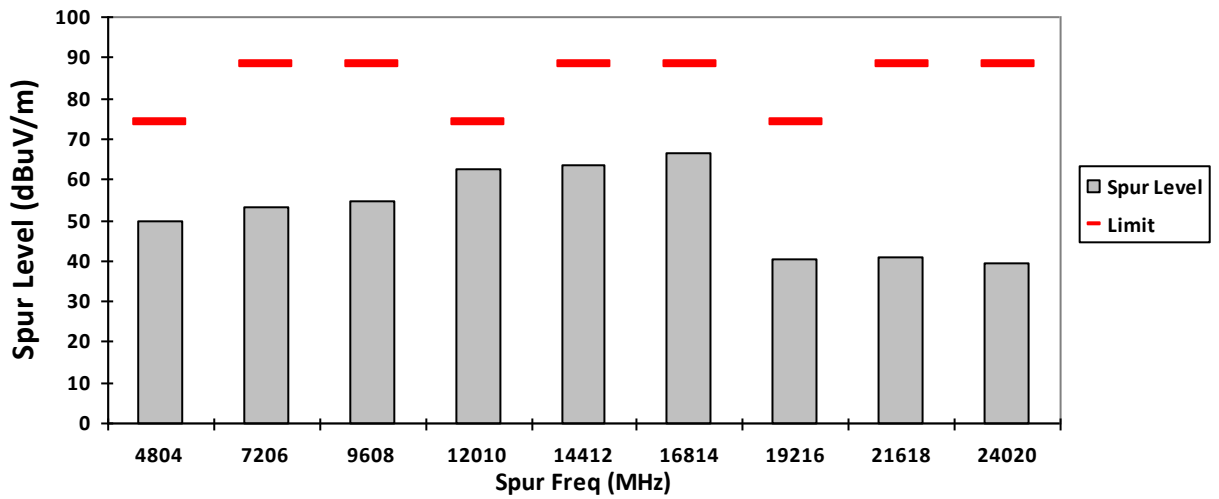


VERTICAL, AV

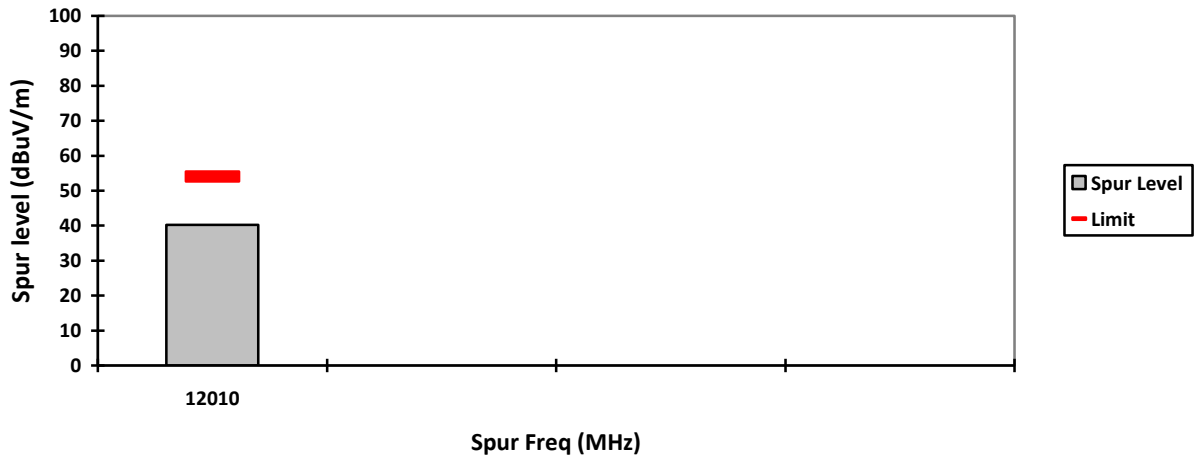


HORIZONTAL, AV

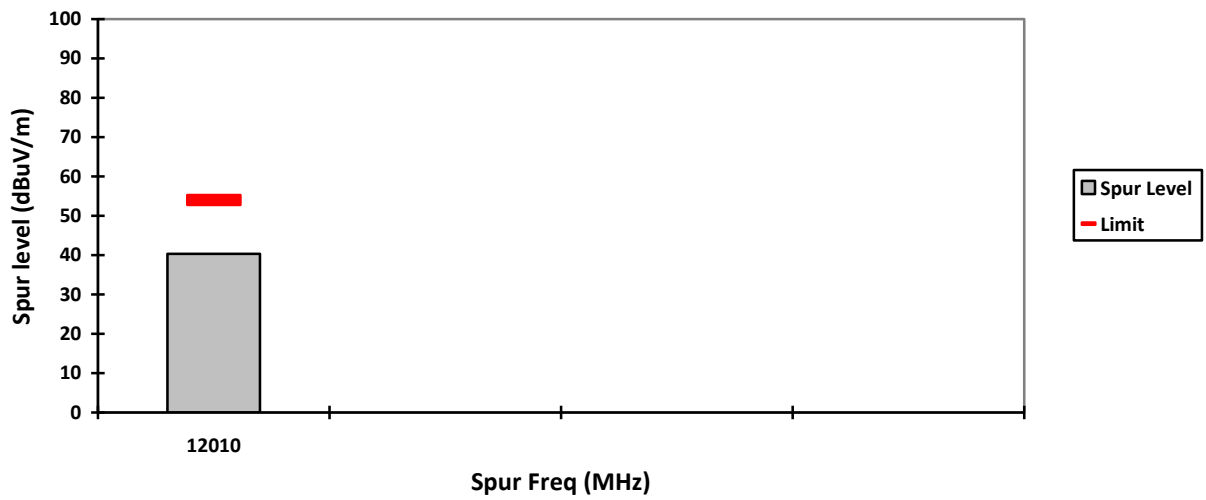


VERTICAL, PK

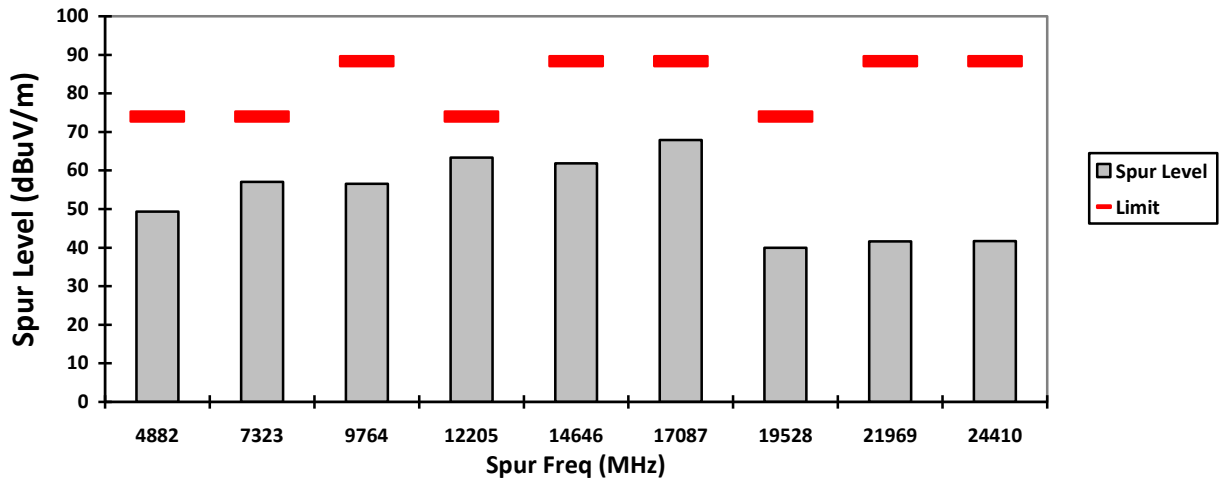


HORIZONTAL, PK

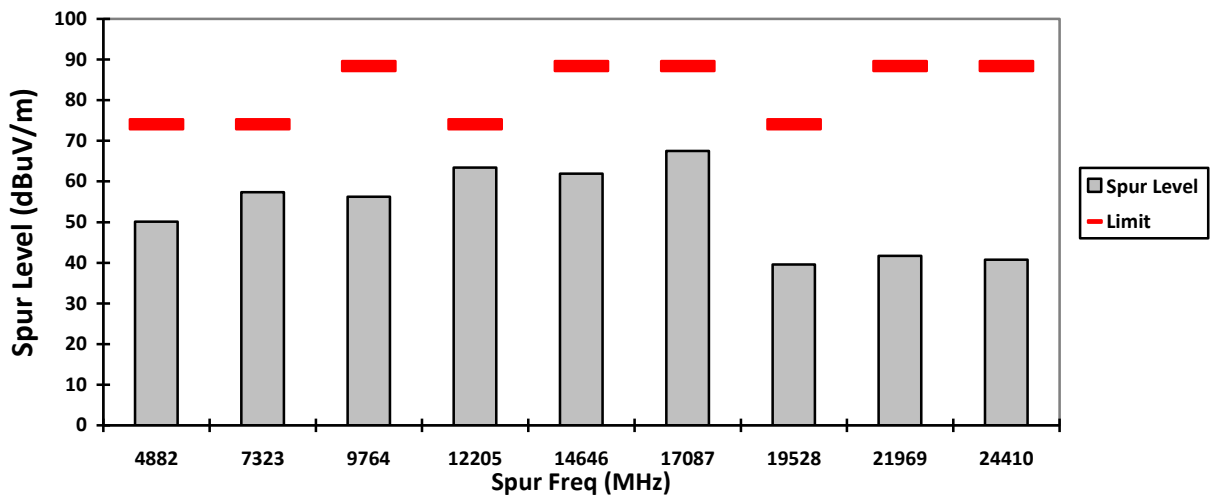


VERTICAL, AV

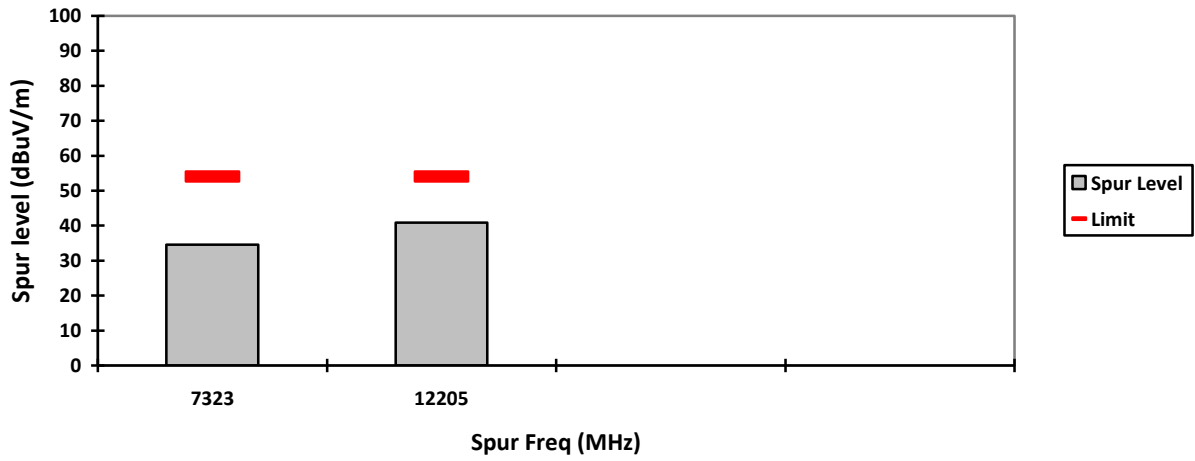


HORIZONTAL, AV

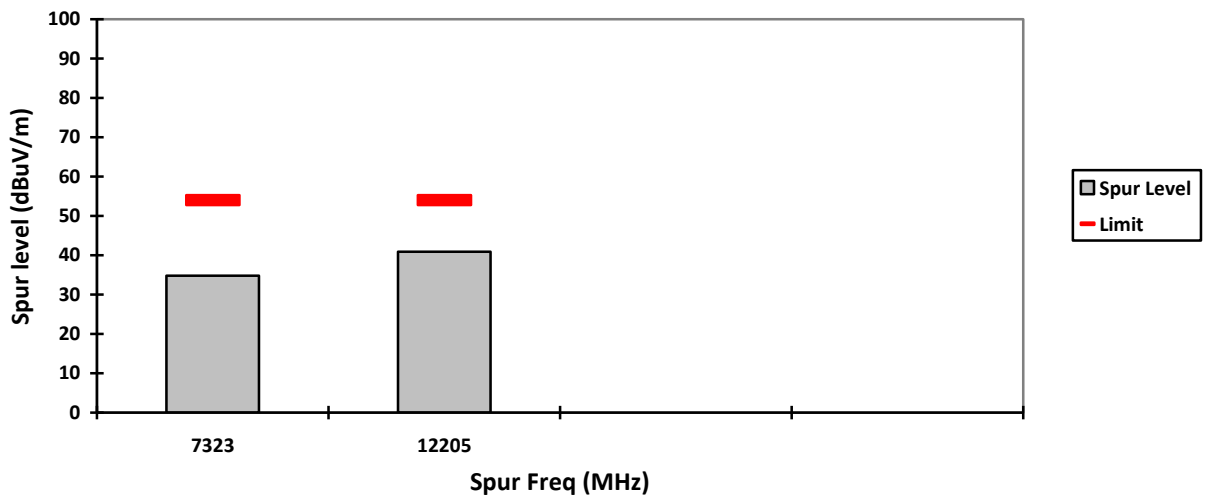


VERTICAL, PK

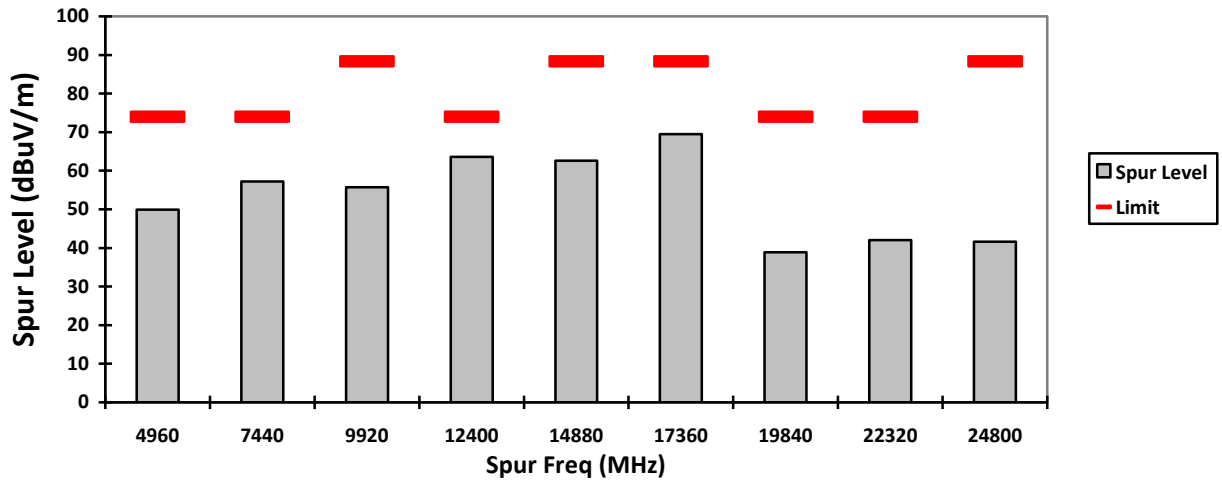


HORIZONTAL, PK

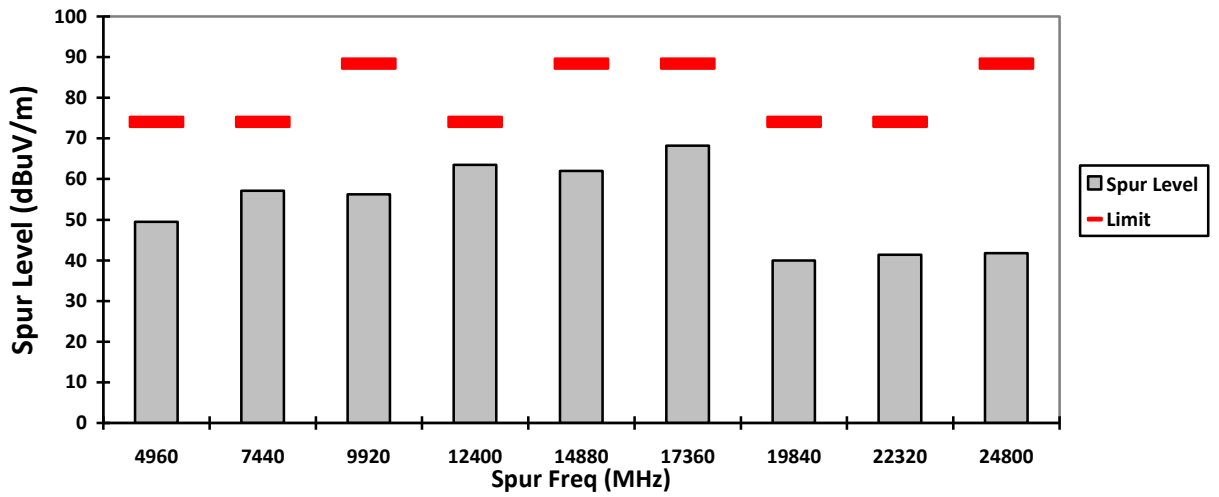

VERTICAL, AV

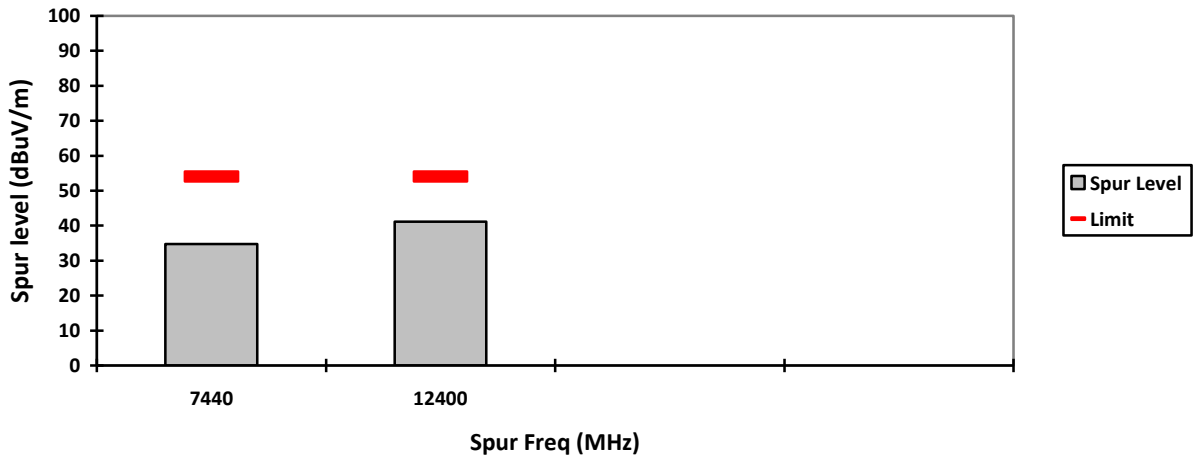

HORIZONTAL, AV

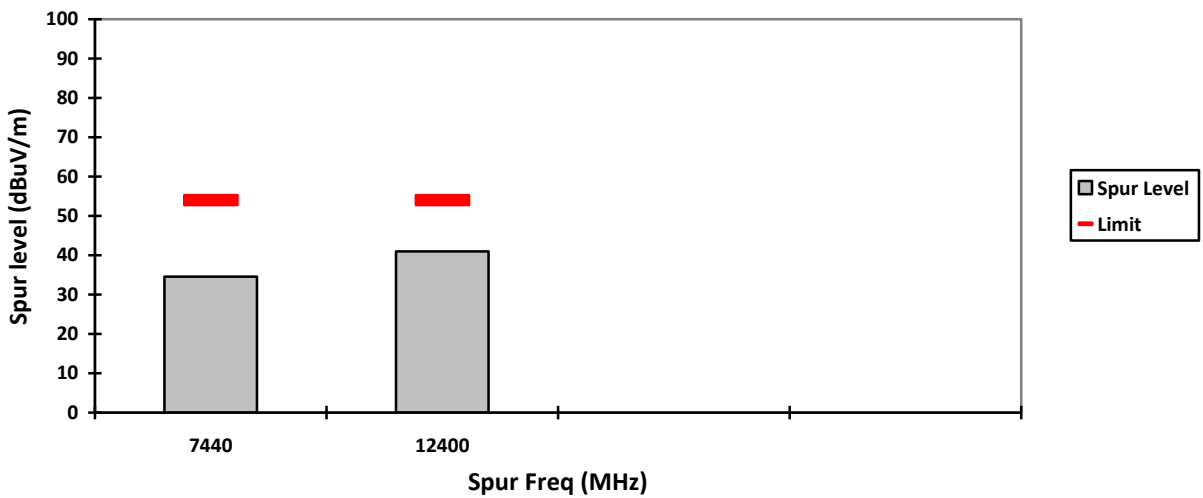


NOTE:

Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b,c)


Based on the Bluetooth Specification Version 2.1+EDR, and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)
 Adjusted channel hop rate for DH5 mode = 133.33 hops/second
 Time per channel hop = 1 / 133.33 hops/second = 7.5 ms
 Time to cycle through all channels = 7.5 x 20 channels = 150 ms
 Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)
 Worst case dwell time = 7.5 ms
 Duty cycle connection factor = $20\log_{10}(7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

VERTICAL, QPK

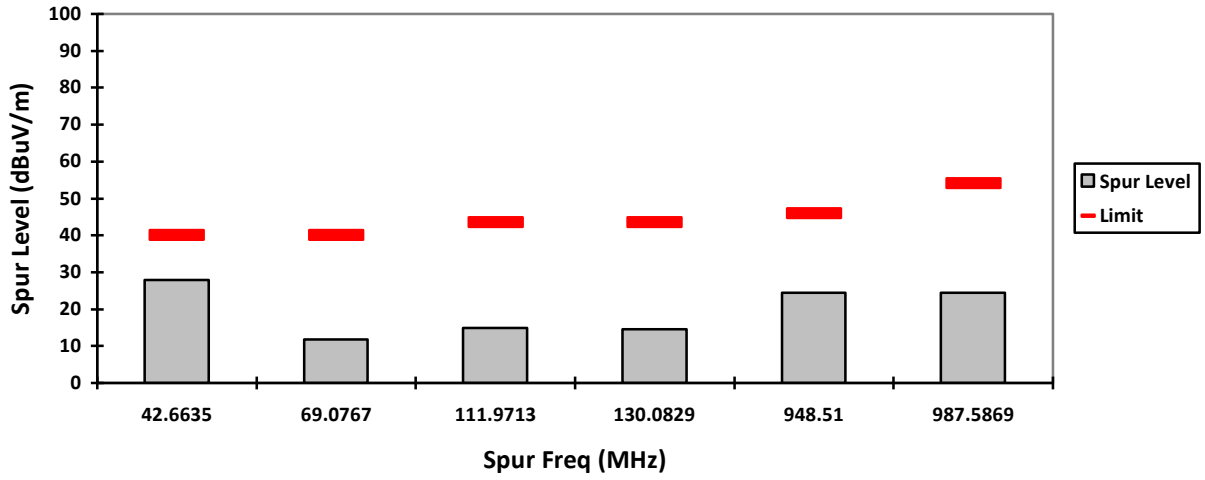


HORIZONTAL, QPK

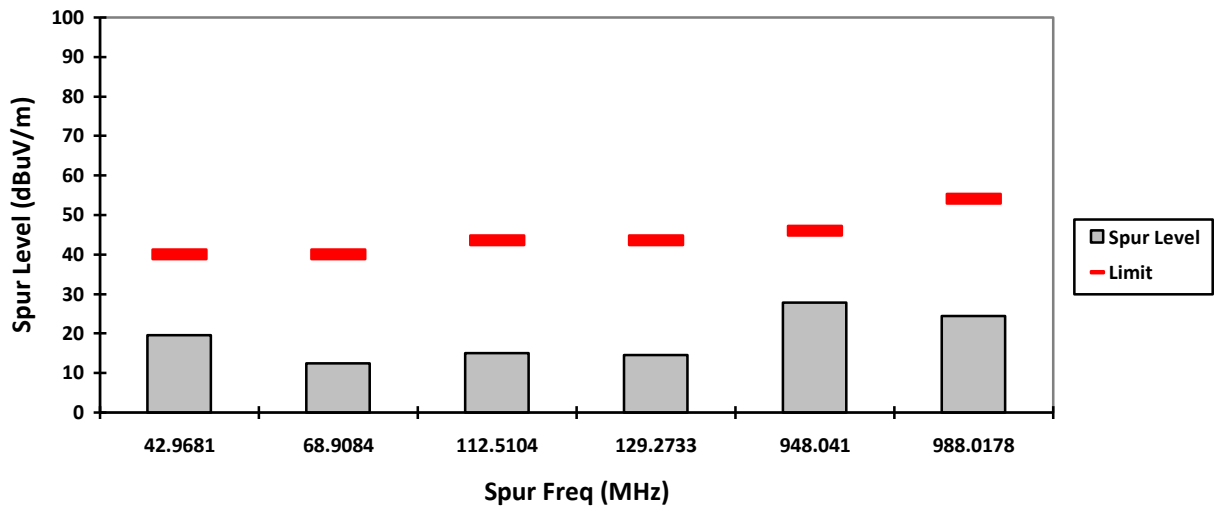

6.9. AC Powerline Conducted Emission

6.9.1. Test Setup

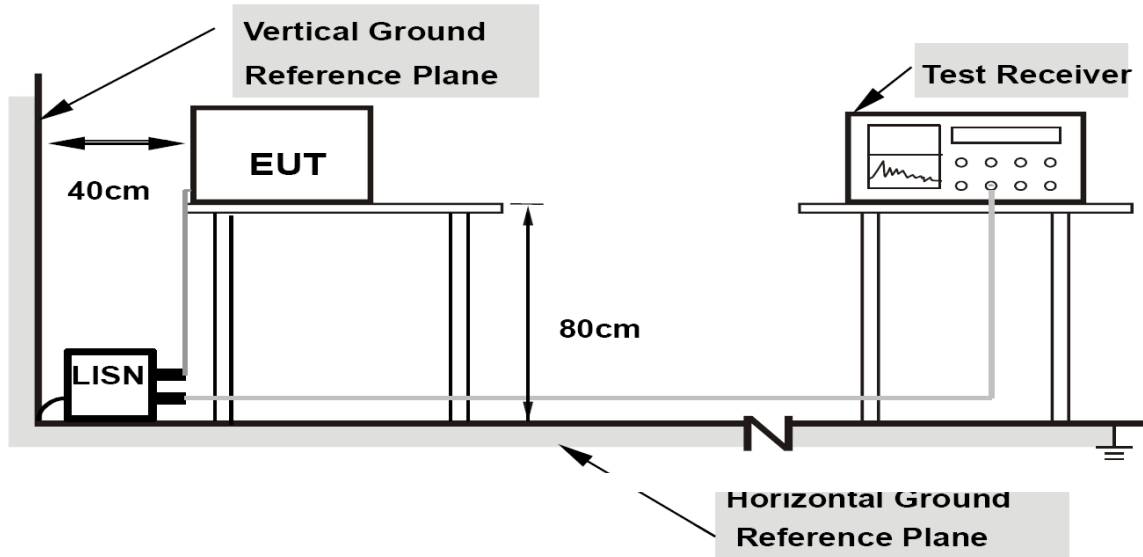

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.9.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports of class A ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

Limits for conducted disturbance at the mains ports of class B ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.
 NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE


6.9.3. Test Result

Report ID.:	: 36811-EMC-00045
Ambient Temperature:	: 20.3 °C
Humidity:	: 59.4 %RH
Tester:	: Shidee
Date of test:	: 24 May 2023

Test Data

1) Ambient


Full Spectrum

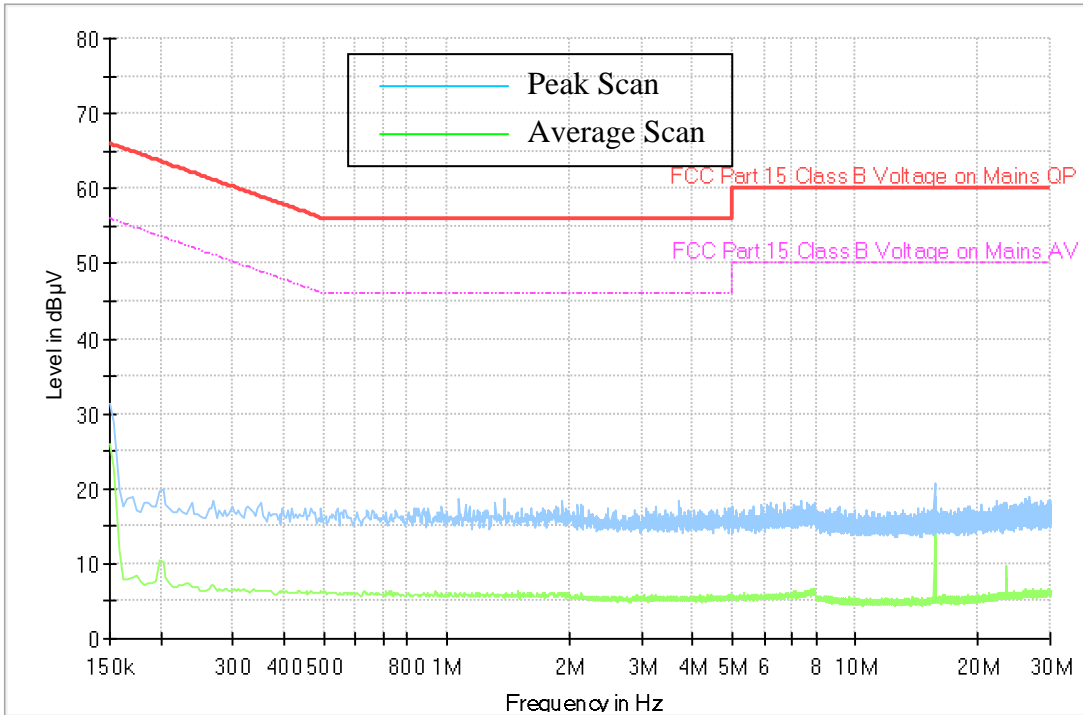

120 Vac

1) Charger Alone

Full Spectrum

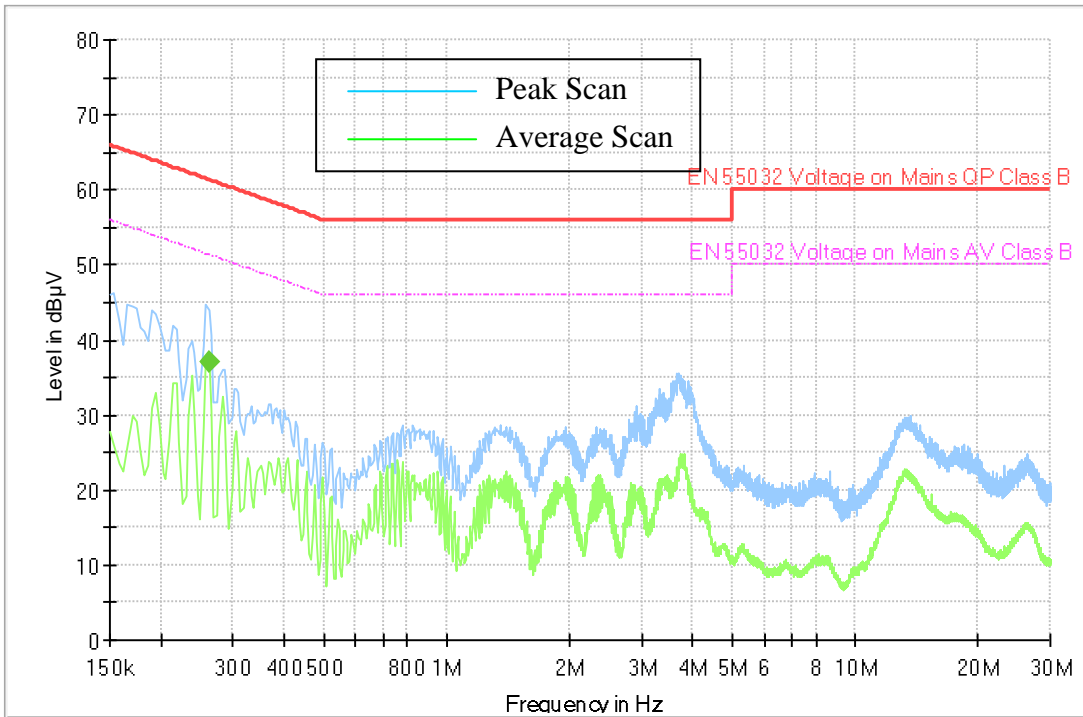


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.262000	---	37.11	51.37	14.25	1000.0	9.000	N	ON	10.2	Pass

* Expanded Uncertainty (U) = +/- 3.48dB

2) Charger + Radio Off

Full Spectrum

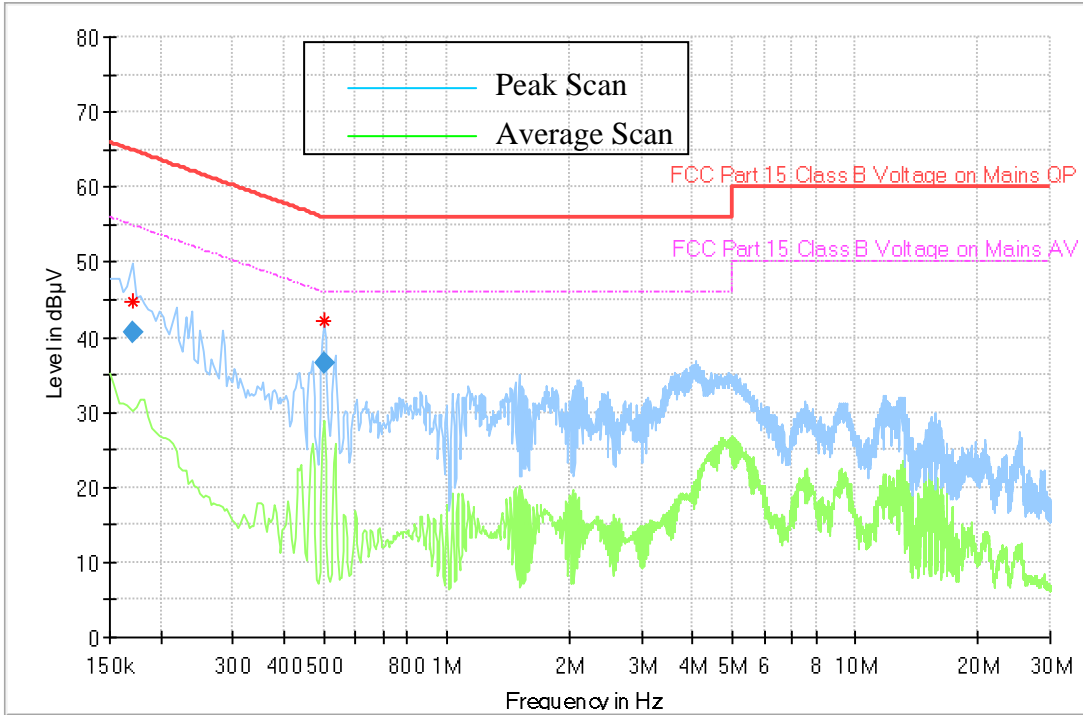


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.170000	40.65	---	64.96	24.31	1000.0	9.000	L1	ON	10.6	Pass
0.502000	36.58	---	56.00	19.42	1000.0	9.000	L1	ON	10.3	Pass

* Expanded Uncertainty (U) = +/- 3.48dB

3) Charger + Radio Standby

Full Spectrum

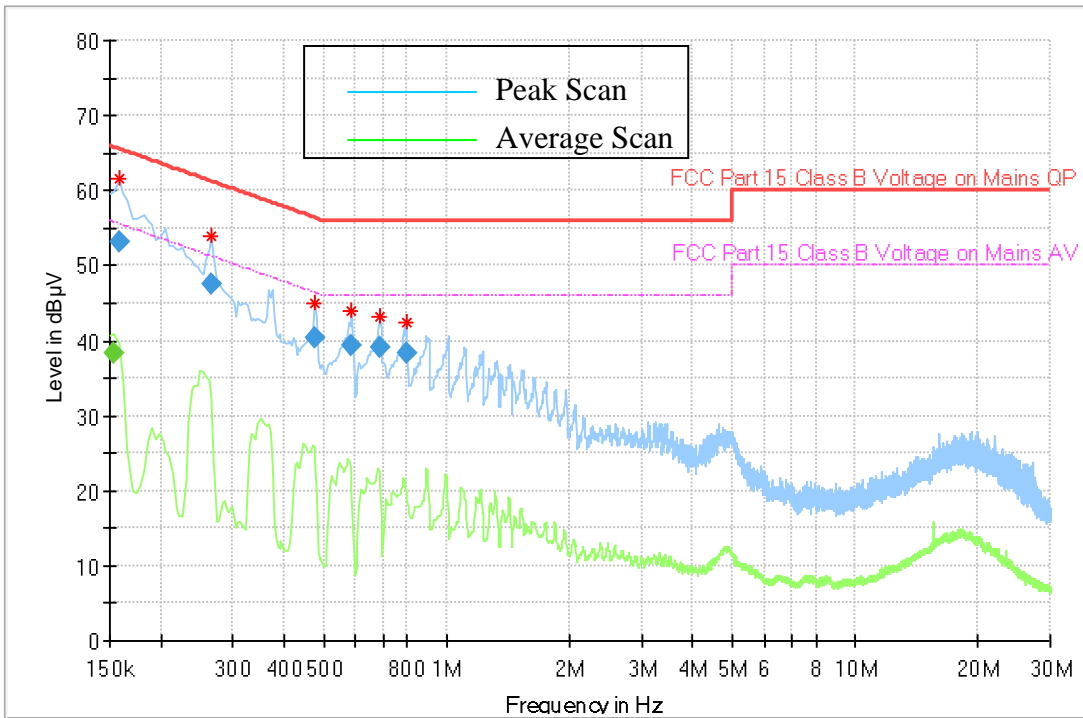


Average Measurement

Quasipeak and

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.154000	---	38.39	55.78	17.39	1000.0	9.000	L1	ON	10.4	Pass
0.158000	53.17	---	65.57	12.40	1000.0	9.000	L1	ON	10.5	Pass
0.266000	47.42	---	61.24	13.83	1000.0	9.000	L1	ON	10.2	Pass
0.478000	40.34	---	56.37	16.04	1000.0	9.000	L1	ON	10.3	Pass
0.586000	39.47	---	56.00	16.53	1000.0	9.000	L1	ON	10.3	Pass
0.686000	39.03	---	56.00	16.97	1000.0	9.000	L1	ON	10.3	Pass
0.798000	38.44	---	56.00	17.56	1000.0	9.000	L1	ON	10.3	Pass

* Expanded Uncertainty (U) = +/- 3.48dB

4) Charger + Radio Tx with BT 3.0 + EDR Mod: $\pi/4$ -DQPSK
 Full Spectrum

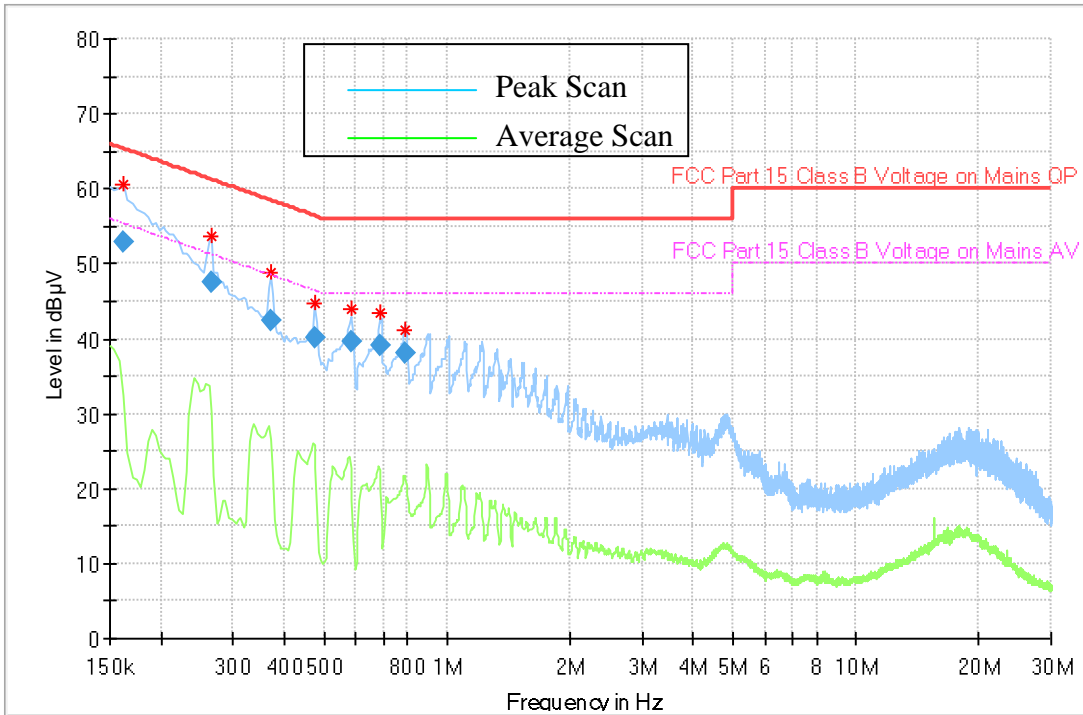

Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.162000	52.81	---	65.36	12.55	1000.0	9.000	L1	ON	10.5	Pass
0.266000	47.45	---	61.24	13.79	1000.0	9.000	L1	ON	10.2	Pass
0.370000	42.36	---	58.50	16.14	1000.0	9.000	L1	ON	10.3	Pass
0.474000	40.14	---	56.44	16.30	1000.0	9.000	L1	ON	10.3	Pass
0.582000	39.50	---	56.00	16.50	1000.0	9.000	L1	ON	10.3	Pass
0.686000	39.18	---	56.00	16.82	1000.0	9.000	L1	ON	10.3	Pass
0.790000	38.21	---	56.00	17.79	1000.0	9.000	L1	ON	10.3	Pass

* Expanded Uncertainty (U) = +/- 3.48dB

END OF TEST REPORT