



**DECLARATION OF COMPLIANCE: MPE ASSESSMENT**

**Motorola Solutions Inc.  
EME Test Laboratory**  
Motorola Solutions Malaysia Sdn Bhd  
Plot 2A, Medan Bayan Lepas,  
Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.

**Date of Report:** 1/28/2022  
**Report Revision:** B

**Responsible Engineer:** Puteri Alifah Ilyana Binti Nor Rahim (EME Engineer)  
**Report author:** Puteri Alifah Ilyana Binti Nor Rahim (EME Engineer)  
**Date(s) Tested:** 03/03/2021  
**Manufacturer:** Motorola Solutions Inc.  
**Date submitted for test:** 02/22/2021  
**DUT Description:** APX 6500 UHF R2 - Multiple HW Encryption WiFi Interoperability Data Modem Tethering via WiFi or Cable  
**Test TX mode(s):** CW  
**Max. Power output:** 18W (450-520 MHz); 11.2 mW (Bluetooth); 6.3 mW (Bluetooth LE); 39.8 mW (WLAN 2.4GHz 802.11b), 15.8 mW (WLAN 2.4GHz 802.11g), 12.6mW (WLAN 2.4GHz 802.11n); 15.8mW (WLAN 5GHz 802.11a/n/ac)  
**TX Frequency Bands:** 450-520 MHz; WLAN 2412-2462 MHz; WLAN 5180-5825 MHz; BT 2402-2480 MHz  
**Signaling type:** FM, TDMA, FHSS (Bluetooth / Bluetooth LE), 802.11b/g/n (WLAN 2.4 GHz), 802.11 a/n/ac (WLAN 5 GHz)  
**Model(s) Tested:** M25SSS9PW1BN (PMUE5756A) With G138 MOTORCYCLE OPTION  
**Model(s) Certified:** M25SSS9PW1BN (PMUE5756A) With G138 MOTORCYCLE OPTION, M24SSS9PW1BN (PMUE5756A) With G138 MOTORCYCLE OPTION  
**Serial Number(s):** 471TXD0197  
**Classification:** Occupational/Controlled Environment  
**Applicant Name:** Motorola Solutions Inc.  
**Applicant Address:** 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322  
**FCC ID:** AZ492FT4967  
 450-520 MHz, 2402-2480 MHz, 2412-2462 MHz; 5180-5825 MHz  
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.  
**ISED:** 109U-92FT4967  
 This report contains results that are immaterial for ISED Canada equipment approval, which are clearly identified.

The MPE results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits. The test results clearly demonstrate compliance with ICNIRP Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).

**Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report (no deviation from standard methods). This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc. EME Laboratory.**  
**I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements.**  
**This reporting format is consistent with the suggested guidelines of the TIA TSB-159 April 2006**  
**The results and statements contained in this report pertain only to the device(s) evaluated herein.**

  
**Saw Sun Hock (Approved Signatory)**  
**Approval Date:** 1/28/2022

**Document Revision History**

<b>Date</b>	<b>Revision</b>	<b>Comments</b>
11/21/2021	A	Initial release
1/28/2022	B	Update the model number

**Table of Contents**

1.0 Introduction..... 4

2.0 FCC MPE Summary ..... 4

3.0 Abbreviations / Definitions..... 4

4.0 Referenced Standards and Guidelines..... 5

5.0 Power Density Limits..... 5

6.0 N<sub>c</sub> Test Channels..... 7

7.0 Measurement Equipment ..... 7

8.0 Measurement System Uncertainty Levels..... 7

9.0 Product and System Description..... 8

10.0 Additional Options and Accessories ..... 9

11.0 Test Set-Up Description..... 9

12.0 Method of Measurement for motorcycle mounted antenna(s) ..... 9

    12.1 Bystander MPE measurements ..... 9

    12.2 Operator MPE measurements ..... 10

13.0 MPE Calculations ..... 10

14.0 Antenna Summary..... 11

15.0 Test Results Summary ..... 11

    15.1 MPE Test Results Summary for LMR ..... 11

    15.2 MPE Test Results for Bluetooth and WLAN ..... 12

    15.3 Simultaneous Transmission..... 14

    16.0 Conclusion..... 15

Appendix A - Illustration of Antenna Location and Test Distances ..... 16

Appendix B - Probe Calibration Certificates ..... 18

Appendix C - Photos of Assessed Antennas..... 22

Appendix D - MPE Measurement Results..... 23

### 1.0 Introduction

This report details the test setup, test equipment and test results of Maximum Permissible Exposure (MPE) performed at Motorola Solutions’ outside test site for product model M25SSS9PW1BN (PMUE5756A) With G138 MOTORCYCLE OPTION.

### 2.0 FCC MPE Summary

**Table 1**

Equipment Class	Frequency band (MHz)	Bystander		Operator	
		Power Density (mW/cm <sup>2</sup> )	Percentage of Limit (%)	Power Density (mW/cm <sup>2</sup> )	Percentage of Limit (%)
TNB	450-520 (LMR UHF2)	0.112	35.6	0.315	20.1
DTS	2412 – 2462 (WLAN 2.4 GHz)	0.025	2.50	0.025	2.50
NII	5180 - 5825 (WLAN 5 GHz)	0.011	1.06	0.011	1.06
DSS	2402-2480 (Bluetooth)	0.007	0.71	0.007	0.71
Simultaneous (Highest Combined Percentage of Limit)			38.1		22.6

### 3.0 Abbreviations / Definitions

- CNR: Calibration Not Required
- CW: Continuous Wave
- DUT: Device Under Test
- EME: Electromagnetic Energy
- FHSS: Frequency Hopping Spread Spectrum
- FM: Frequency Modulation
- MPE: Maximum Permissible Exposure
- GPS: Global Positioning System
- LMR: Land Mobile Radio
- SAR: Specific Absorption Rate
- NA: Not Applicable
- BS: Bystander
- PTT: Push to Talk
- WLAN: Wireless Local Area Network
- TDMA: Time Division Multiple Access

#### 4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 1.1310, § 2.1091 (d) and § 2.1093 for RF Exposure, where applicable.
- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65 (Edition 97-01), FCC, Washington, D.C.: August 1997.
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1999
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992. Specific to FCC rules and regulations.
- Institute of Electrical and Electronics Engineers (IEEE) C95.3-2002
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 5) – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)
- FCC KDB – 447498 D01 General RF Exposure Guidance v06
- FCC KDB – 865664 D02 RF Exposure Reporting v01r02
- EN 62311:2008 Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz).

#### 5.0 Power Density Limits

**Table 2 – Occupational / Controlled Exposure Limits**

Frequency Range (MHz)	FCC OET Bulletin 65	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS-102 Issue 5 2015
	mW/cm <sup>2</sup>	W/m <sup>2</sup>	mW/cm <sup>2</sup>	W/m <sup>2</sup>	W/m <sup>2</sup>
10 – 20					10.0
20 – 48					$44.72 / f^{0.5}$
30 – 300	1.0				
48 – 100					6.455
10 – 400		10.0			
100 – 300			1.0	10.0	
100 – 6,000					$0.6455 f^{0.5}$
300 – 1,500	f/300				

**Table 2 – Occupational / Controlled Exposure Limits (Con’t.)**

Frequency Range (MHz)	FCC OET Bulletin 65	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS-102 Issue 5 2015
	mW/cm <sup>2</sup>	W/m <sup>2</sup>	mW/cm <sup>2</sup>	W/m <sup>2</sup>	W/m <sup>2</sup>
300 – 3,000			f/300	f/30	
400 – 2,000		f/40			
1,500 – 15,000					
1,500 – 100,000	5.0				
2,000 – 300,000		50.0			
3,000 – 300,000			10.0	100.0	
6,000 – 15,000					50.0
15000 – 150,000					50.0
150000 – 300,000					$3.33 \times 10^{-4} f$

**Table 3 – General Population / Uncontrolled Exposure Limits**

Frequency Range (MHz)	FCC OET Bulletin 65	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS-102 Issue 5 2015
	mW/cm <sup>2</sup>	W/m <sup>2</sup>	mW/cm <sup>2</sup>	W/m <sup>2</sup>	W/m <sup>2</sup>
10 – 20					2.0
20 – 48					$8.944 / f^{0.5}$
30 – 300	0.2				
48 – 300					1.291
10 – 400		2.0			
100 – 300			0.2		
100 – 400				2.0	
300 – 1,500	f/1,500				
300 – 6000					$0.02619 f^{0.6834}$
400 – 2,000		f/200		f/200	
300 – 15,000			f/1,500		
1,500 – 15,000					
1,500 – 100,000	1.0				
2,000 – 100,000				10.0	
2,000 – 300,000		10.0			
6,000 – 15,000					10.0
15,000 – 150,000					10.0
150,000 – 300,000					$6.67 \times 10^{-5} f$

### 6.0 $N_c$ Test Channels

The number of test channels is determined by using Equation 1 below. This equation is available in FCC’s KDB 447498. The test channels are appropriately spaced across the antenna’s frequency range.

**Equation 1 – Number of test channels**

$$N_c = \text{Round} \{ [100(f_{\text{high}} - f_{\text{low}})/f_c]^{0.5} \times (f_c / 100)^{0.2} \}$$

where  $N_c$  is the number of test channels,  $f_{\text{high}}$  and  $f_{\text{low}}$  are the highest and lowest frequencies within the transmission band,  $f_c$  is the mid-band frequency, and frequencies are in MHz.

### 7.0 Measurement Equipment

**Table 4 – Equipment**

Equipment Type	Model #	SN	Calibration Date	Calibration Due Date
Motorcycle	Honda CBX750-2003	NA	NA	NA
Survey Meter Probe – E-Field	ETS Model HI-2200 ETS Model E100	00086887 00224511	05/06/2020	05/06/2021

E-field measurements are in mW/cm<sup>2</sup>.

### 8.0 Measurement System Uncertainty Levels

**Table 5 – Uncertainty Budget for Near Field Probe Measurements**

	Tol. (± %)	Prob. Dist.	Divisor	$u_i$ (±%)		$v_i$
<b>Measurement System</b>						
Probe Calibration	7.1	N	1.00	7.1	50.4	∞
Survey Meter Calibration	0.0	N	1.00	0.0	0.0	¥
Hemispherical Isotropy	8.0	R	1.73	4.6	21.33	∞
Linearity	5.0	R	1.73	2.9	8.33	∞
Pulse Response	1.0	R	1.73	0.6	0.33	∞
RF Ambient Noise	3.0	R	1.73	1.7	3.00	∞
RF Reflections	8.0	R	1.73	4.6	21.33	∞
Probe Positioning	10.0	R	1.73	5.8	33.333	∞
<b>Test sample Related</b>					0.00	
Antenna Positioning	3.0	N	1.00	3.0	9.0	∞
Power drift	5.0	R	1.73	2.9	8.33	∞
Bystander measurement uncertainty	4.8	N	1.00	4.8	23.04	∞
Passenger measurement uncertainty	8.1	N	1.00	8.1	65.61	∞
<b>Combined Standard Uncertainty</b>		RSS		15.6	15.6	∞
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)		$k=2$		31	31	

### 9.0 Product and System Description

This mobile device operates in the LMR bands using either frequency modulation (FM) with 100% transmit duty cycle or TDMA signals with maximum of 50% transmit duty cycle. For conservative assessment, FM signal was tested. A duty factor of 50% applies for PTT operation mode.

This device also incorporates a Class 1 Bluetooth device which is a Frequency Hopping Spread Spectrum (FHSS) technology. The Bluetooth radio modem is used to wireless link audio accessories. The maximum actual transmission duty cycle is imposed by the Bluetooth standard. The maximum duty cycle for BT is 100%. Bluetooth Low Energy (BT LE) intended to reduce power consumption.

This device also contains WLAN technology for data capabilities over 802.11b/g/n 2.4 GHz and 802.11 a/n/ac 5 GHz wireless networks.

Table 6 below summarizes the technologies, bands, maximum duty cycles and maximum output powers. Maximum output powers are defined as upper limit of the production line final test station.

**Table 6**

Technologies	Bands (MHz)	Duty Cycle (%)	Max Power (W)
LMR	450-520	50 (PTT)	18
BT	2402-2480	100	0.0112
BT LE	2402-2480	100	0.0063
WLAN	2400 – 2462 (802.11b/g/n)	100	0.0398 (802.11b)
			0.0158 (802.11g)
			0.0126 (802.11n)
	5180-5825 (802.11 a/n/ac)	100	0.0158

This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means.

Accordingly this product is classified as Occupational/Controlled Exposure. However, in accordance with FCC requirements, the bystanders external to the test motorcycle are evaluated to the General Population/Uncontrolled Exposure Limits.

(Note that “Bystanders” as used herein are people other than operator)



## 10.0 Additional Options and Accessories

Not available.

## 11.0 Test Set-Up Description

Assessments were performed with mobile radio installed on the test motorcycle, at the specified distances and test locations indicated in section 12.0, 13.0 and Appendix A.

All antennas described in Table 7 were considered in order to develop the test plan for this product. Antennas were installed and tested per their defined test channels reported in Appendix D.

## 12.0 Method of Measurement for motorcycle mounted antenna(s)

### 12.1 Bystander MPE measurements

Antenna is located at the rear of the test motorcycle. Refer to Appendix A for antenna location with respect to the bystander.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2m vertical line for the bystander test location indicated in Appendix A with 20 cm height increments, with the distance between the antenna and the geometric center of the probe sensor equal to 60 cm, directly behind the motorcycle. Unlike a car, the motorcycle does not feature a large rectangular trunk and other features (e.g. windows) that may produce significantly distinct exposures depending on the location of a bystander relative to the trunk. For a motorcycle equipped with a wire antenna mounted on a small ground plane, the separation distance between the antenna and bystander is the main factor determining the exposure levels and for this reason the rear test location is employed.

The separation distance used for testing is defined from the antenna where as the RF safety booklet defines the same distance from the motorcycle body to ensure that the assessment is applicable to other motorcycles. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the motorcycle.

## 12.2 Operator MPE measurements

Antenna is located at the rear of the test motorcycle. Refer to Appendix A for antenna location with respect to the operator.

MPE measurements for operator (OP) conditions are determined by taking the average of the (3) measurements (Head, Chest) at the test distance of 37.5cm from the operators' seat area to antennas. (Lower Trunk) at test distance of 48.5 cm to maintain 20 cm separation distance between probe sensor and reradiating objects (motorcycle's enclosure).

The measurement probe is oriented parallel (horizontal) to the ground and positioned above the motorcycle operator's seat. The probe head is pointed towards the back of the motorcycle and aimed directly at the antenna's axis while maintaining a twenty (20) centimeter separation distance between the probe sensor and reradiating structures. These (3) measurements are representative of the operator.

## 13.0 MPE Calculations

The final MPE results for this mobile radio are presented in section 15.0. These results are based on 50% duty cycle for PTT for LMR bands.

Below is an explanation of how the MPE results are calculated. Refer to Appendix D for MPE measurement results and calculations for LMR band.

Bystander - 10 measurements are averaged over the body (*Avg\_over\_body*).

Operator - 3 measurements are averaged over the top portion of body (*Avg\_TopPortion\_body*).

The Average over Body test methodology is consistent with IEEE/ANSI C95.3-2002 guidelines.

Therefore;

### Equation 2 – Power Density Calculation (*Calc.\_P.D.*)

$$Calc._P.D. = (Avg\_over\_body) * (probe\_frequency\_cal\_factor) * (duty\_cycle)$$

$$Calc._P.D. = (Avg\_TopPortion\_body) * \frac{2}{3} * (probe\_frequency\_cal\_factor) * (duty\_cycle)$$

*Note 1: The highest "average" cal factors from the calibration certificates were selected for the applicable frequency range. Linear interpretation was used to determine "probe\_frequency\_cal\_factor" for the specific test frequencies.*

*Note 2: The E-field probe calibration certificate's frequency cal factors were determined by measuring V/m. The survey meter's results were measured in power density (mW/cm<sup>2</sup>) and therefore the "probe\_frequency\_cal\_factor" was squared in equation 2 to account for these results.*

*Note 3: The H-field probe calibration certificate's frequency cal factors were determined by measuring A/m. The survey meter's results were measured in A/m and therefore the "Avg\_over\_body" A/m results were converted to*

power density (mW/cm<sup>2</sup>) using the equation 3. H-field measurements are only applicable to frequencies below 300MHz.

**Equation 3 – Converting A/m to mW/cm<sup>2</sup>**

$$mW/cm^2 = (A/m)^2 * 37.699$$

**Equation 4 – Power Density Maximum Calculation**

$$Max\_Calc.\_P.D. = P.D.\_calc * \frac{max\_output\_power}{initial\_output\_power}$$

Note 4: For initial output power > max\_output\_power; max\_output\_power / initial output power = 1

**14.0 Antenna Summary**

Table 7 below summarizes the tested antennas and their descriptions, overlap of FCC bands, number of test channels per FCC KDB 447498 (FCC N<sub>c</sub>) and actual number of tested channels (Actual N<sub>c</sub>). This information was used to determine the test configurations presented in this report.

**Table 7**

Antenna No.	Antenna Model	Frequency Range (MHz)	Physical Length (cm)	Gain (dBi)	Remarks	Overlap FCC Bands (MHz)	FCC N <sub>c</sub>	Actual N <sub>c</sub>
1	HAE6032A	425-470	15.5	2.15	1/4 wave	425-470	3	3
2	HAE6033A	450-482	14.7	2.15	1/4 wave	450-482	4	4
3	HAE6035A	450-512	8.2	2.15	1/4 wave	450-512	5	5
<b>BT/WLAN</b>								
4	AN000163A02	2400-2500 / 4900-5900	7	5.0 / 5.25	Monopole	2412-2462 ; 5180-5825	3	3

**15.0 Test Results Summary**

**15.1 MPE Test Results Summary for LMR**

The following tables below summarize the MPE results for each test configuration: test positions (BS-Bystander, OP-Operator), E/H field measurements, antenna model & freq. range, maximum output power, initial power, TX frequency, max calculated power density results, applicable FCC/ICNIRP/ISED Canada specification limits and % of the applicable specification limits.

**Table 8**

**UHF2 Band Bystander MPE assessment to General Population / Uncontrolled Exposure Limits**

Test Pos.	E/H field	Antenna No.	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit	ISED Limit	% To ISED Spec Limit
BS	E	1	HAE6032A, 425- 470 MHz	18.0	17.5	450.0125	0.086	0.30	28.6	0.23	38.1	0.17	50.3
				18.0	17.6	460.0000	0.075	0.31	24.4	0.23	32.6	0.17	43.3
				18.0	17.6	469.9875	0.070	0.31	22.5	0.23	29.9	0.18	40.1
BS	E	2	HAE6033A, 450 - 482 MHz	18.0	17.5	450.0125	0.088	0.30	29.3	0.23	39.0	0.17	51.6
				18.0	17.6	460.0000	0.079	0.31	25.8	0.23	34.4	0.17	45.8
				18.0	17.6	469.9875	0.078	0.31	25.0	0.23	33.3	0.18	44.6
				18.0	17.7	481.9875	0.062	0.32	19.4	0.24	25.9	0.18	NA
BS	E	3	HAE6035A, 450 - 512 MHz	18.0	17.5	450.0125	0.101	0.30	33.5	0.23	44.7	0.17	59.1
				18.0	17.6	469.9875	0.112	0.31	35.6	0.23	47.5	0.18	63.6
				18.0	17.7	482.5000	0.084	0.32	26.3	0.24	35.0	0.18	NA
				18.0	17.7	496.5000	0.083	0.33	25.1	0.25	33.4	0.18	NA
				18.0	17.8	511.9875	0.082	0.34	23.9	0.26	31.9	0.19	NA

Notes:  
Results highlight in yellow are configurations with highest percentage of limits for bystander.

**Table 9**

**UHF2 Band Operator MPE assessment to Occupational /Controlled Exposure Limits**

Test Pos.	E/H field	Antenna No.	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm <sup>2</sup> )	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit	ISED Limit	% To ISED Spec Limit
OP	E	1	HAE6032A, 425- 470 MHz	18.0	17.5	450.0125	0.173	1.50	11.5	1.13	15.4	1.37	12.6
				18.0	17.6	460.0000	0.162	1.53	10.5	1.15	14.1	1.38	11.7
				18.0	17.6	469.9875	0.200	1.57	12.7	1.17	17.0	1.40	14.3
OP	E	2	HAE6033A, 450 - 482 MHz	18.0	17.5	450.0125	0.165	1.50	11.0	1.13	14.7	1.37	12.1
				18.0	17.6	460.0000	0.168	1.53	11.0	1.15	14.6	1.38	12.2
				18.0	17.6	469.9875	0.218	1.57	13.9	1.17	18.6	1.40	15.6
				18.0	17.7	481.9875	0.236	1.61	14.7	1.20	19.6	1.42	NA
OP	E	3	HAE6035A, 450 - 512 MHz	18.0	17.5	450.0125	0.177	1.50	11.8	1.13	15.7	1.37	12.9
				18.0	17.6	469.9875	0.315	1.57	20.1	1.17	26.8	1.40	22.5
				18.0	17.7	482.5000	0.307	1.61	19.1	1.21	25.4	1.42	NA
				18.0	17.7	496.5000	0.299	1.66	18.1	1.24	24.1	1.44	NA
				18.0	17.8	511.9875	0.275	1.71	16.1	1.28	21.5	1.46	NA

Notes:  
Results highlight in yellow are configurations with highest percentage of limits for operator.

**15.2 MPE Test Results for Bluetooth and WLAN**

Antenna AN000163A02 supports BT and WLAN 2.4 GHz / 5 GHz should be installed on motorcycle’s enclosure. BT, WLAN 2.4 GHz and 5 GHz will not transmit simultaneously.

MPE calculation was use to determine power density for these transmitters due to lower power. According to FCC’s OET Bulletin 65 Edition 97-01 Section 2, calculations can be made to

predict RF field strength and power density levels around typical RF sources. Equation (5) is generally accurate in far-field of an antenna.

**Equation 5 – Power Density Calculation**

$$S = \frac{P_t G}{4\pi d^2 L} F$$

Equation (5) accounts for the maximum duty cycle of the signal, and the factor, F, to provide a worst-case prediction of power density per FCC OET Bulletin 65, Edition 97-01 1997.

- Where:
- S = power density
  - P<sub>t</sub> = maximum output power scaled by the maximum duty cycle of the signal
  - G = power gain of the antenna in the direction of interest relative to an isotropic radiator
  - d = distance from antenna
  - F = Enhancement factor [1 or 2.56 for predicting ground-level field strength]

Table below summarized the MPE calculation for each standalone transmitter bands, Bluetooth and WLAN.

**Table 10**

**BT/WLAN Bystander MPE assessment to General Population / Uncontrolled Exposure Limits**

Antenna #	Max Power (W)	Duty Cycle (%)	Tx Frequency (MHz)	Antenna Gain (dBi)	Cable Loss, L (dB)	Dist., d (cm)	Enhance Factor, F	Max Calc. MPE (mW/cm <sup>2</sup> )	MPE Spec Limit (mW/cm <sup>2</sup> )					
									FCC	% To FCC Spec Limit	ICNIRP	% To ICNIRP Spec Limit	ISED limit	% To ISED Spec Limit
<b>WLAN 2.4 GHz</b>														
AN000163A02	0.040	100%	2412.0	5.00	0.00	20	1.00	0.025	1.00	2.50	1.00	2.50	0.54	4.67
AN000163A02	0.040	100%	2437.0	5.00	0.00	20	1.00	0.025	1.00	2.50	1.00	2.50	0.54	4.63
AN000163A02	0.040	100%	2462.0	5.00	0.00	20	1.00	0.025	1.00	2.50	1.00	2.50	0.54	4.60
<b>WLAN 5 GHz</b>														
AN000163A02	0.016	100%	5180.0	5.25	0.00	20	1.00	0.011	1.00	1.06	1.00	1.06	0.90	1.17
AN000163A02	0.016	100%	5502.5	5.25	0.00	20	1.00	0.011	1.00	1.06	1.00	1.06	0.94	1.12
AN000163A02	0.016	100%	5825.0	5.25	0.00	20	1.00	0.011	1.00	1.06	1.00	1.06	0.98	1.08
<b>Bluetooth 2.4 GHz</b>														
AN000163A02	0.011	100%	2402.0	5.00	0.00	20	1.00	0.007	1.00	0.71	1.00	0.71	0.54	1.32
AN000163A02	0.011	100%	2441.0	5.00	0.00	20	1.00	0.007	1.00	0.71	1.00	0.71	0.54	1.30
AN000163A02	0.011	100%	2480.0	5.00	0.00	20	1.00	0.007	1.00	0.71	1.00	0.71	0.55	1.29

Notes:

- 1) Distance from antenna (d), 20cm for more conservative estimation.
- 2) Cable loss (L), all cable loss include in antenna gain, 0 dB.
- 3) Enhancement Factor (F), 1 (Ground reflection already factor in during antenna characterization)

### 15.3 Simultaneous Transmission

LMR bands can transmit simultaneously with Bluetooth or WLAN 2.4 GHz or WLAN 5 GHz. Bluetooth and WLAN 2.4 GHz or WLAN 5 GHz transmitters cannot transmit at the same time.

The highest power density results for each standalone transmitters are indicated in Table 11.

**Table 11**

Transmitters	Frequency Band (MHz)	Bystander (BS)		Operator (OP)	
		Power Density (mW/cm <sup>2</sup> )	Percentage of Limit (%)	Power Density (mW/cm <sup>2</sup> )	Percentage of Limit (%)
<b>FCC US</b>					
LMR UHF2	450-512	0.112	35.6	0.315	20.1
Bluetooth	2402 - 2480	0.007	0.71	0.007	0.71
WLAN 2.4 GHz	2412 - 2462	0.025	2.50	0.025	2.50
WLAN 5 GHz	5180 - 5825	0.011	1.06	0.011	1.06
<b>ISED Canada</b>					
LMR UHF2	450-470	0.112	63.6	0.315	22.5
Bluetooth	2402 - 2480	0.007	1.32	0.007	1.32
WLAN 2.4 GHz	2412 - 2462	0.025	4.67	0.025	4.67
WLAN 5 GHz	5180 - 5825	0.011	1.17	0.011	1.17
<b>ICNIRP</b>					
LMR UHF2	450-520	0.112	47.5	0.315	26.8
Bluetooth	2402 - 2480	0.007	0.71	0.007	0.71
WLAN 2.4 GHz	2412 - 2462	0.025	2.50	0.025	2.50
WLAN 5 GHz	5180 - 5825	0.011	1.06	0.011	1.06

Per KDB 447498 D01, simultaneous transmission MPE test exclusion applies when the sum of MPE ratios for all simultaneous transmitting antennas incorporated in a host device is  $\leq 1.0$ , according to calculated/estimated, numerically modeled, or measured field strengths or power density.

Calculated Maximum Power density for WLAN 2.4 GHz is greater than WLAN 5 GHz and Bluetooth. WLAN 2.4 GHz, WLAN 5 GHz and Bluetooth transmitters cannot transmit at the same time. Thus, WLAN 2.4 GHz will be used to evaluate simultaneous transmission test exclusion. The highest combined power density percentage for simultaneous transmission indicated in Table 12.

**Table 12**

Designator	Simultaneous Transmission Scenario	Highest Combined Percentage of Limit (%)	
		Bystander (BS)	Operator (OP)
FCC	LMR UHF2 and WLAN	38.1 %	22.6 %
ISED Canada	LMR UHF2 and WLAN	68.3 %	27.2 %
ICNIRP	LMR UHF2 and WLAN	50.0 %	29.3 %

**16.0 Conclusion**

The assessments for this device were performed with an output power range as indicated in section 15.1 (for LMR) and 15.2 (for BT/WLAN). The maximum allowable output power is equal to the upper limit of the final test factory transmit power specification listed in Table 6. The highest power density results for LMR and BT/WLAN transmitters scaled to maximum allowable power output are indicated in Table 13 and 14 for bystander and operator.

**Table 13: Maximum MPE RF Exposure Summary (LMR)**

Designator	Transmitters	Frequency Band (MHz)	Bystander (mW/cm <sup>2</sup> )	Operator (mW/cm <sup>2</sup> )
FCC	LMR UHF2	450-512	0.112	0.315
ISED Canada	LMR UHF2	450-470	0.112	0.315
ICNIRP	LMR UHF2	450-520	0.112	0.315

**Table 14: Maximum MPE RF Exposure Summary (BT/WLAN)**


Designator	Transmitters	Frequency Band (MHz)	Bystander (mW/cm <sup>2</sup> )	Operator (mW/cm <sup>2</sup> )
FCC / ISED Canada / ICNIRP	Bluetooth	2402 – 2480	0.007	0.007
	WLAN	2412-2462	0.025	0.025
	WLAN	5180-5825 MHz	0.011	0.011

These MPE results herein demonstrate compliance to the FCC/ICNIRP/ISED Canada Occupational/Controlled Exposure limit. FCC rules require compliance for Bystanders to the FCC General Population/Uncontrolled limits.


## **Appendix A - Illustration of Antenna Location and Test Distances**



### Bystander Illustration

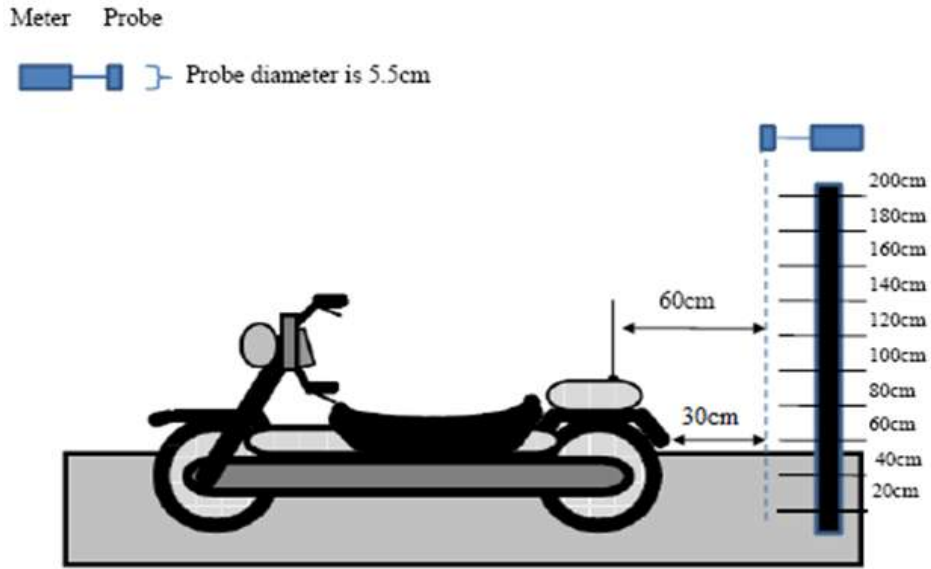

### Operator Illustration

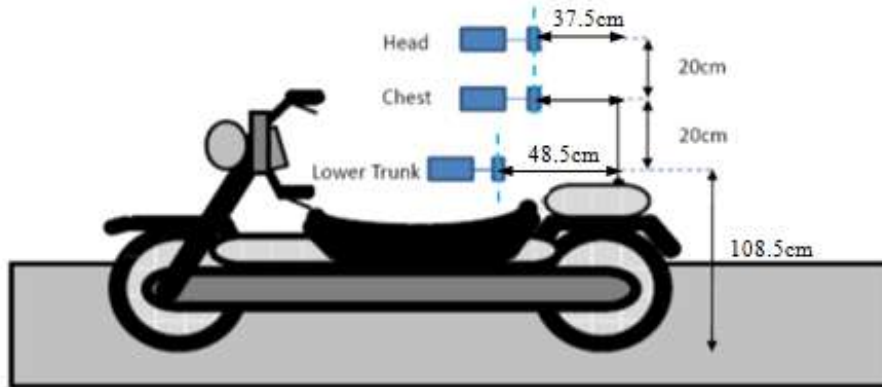

Note: Lower Trunk measurement distance 48.5cm from the antenna is to maintain minimum 20cm separation distance between the probe sensor and reradiating objects (motorcycle's enclosure)

## **Appendix B - Probe Calibration Certificates**



1301 Arrow Point Drive  
Cedar Park, Texas 78613  
(512) 531-8400



Cert I.D.: 134651

**Certificate of Calibration Conformance**

Page 1 of 3

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2013, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM 5305/5402 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

<b>Manufacturer:</b>	ETS-Lindgren	<b>Operating Range:</b>	100kHz - 5GHz
<b>Model Number:</b>	E100	<b>Instrument Type:</b>	Isotropic Probe > 1 GHz
<b>Serial Number/ ID:</b>	00224511	<b>Date Code:</b>	
<b>Tracking Number:</b>	S 000048638	<b>Alternate ID:</b>	MS10428
<b>Date Completed:</b>	06-May-20	<b>Customer:</b>	Motorola Solutions Malaysia Sdn Bhd - Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D. - Bayan Lepas - Penang 11900 - Malaysia
<b>Test Type:</b>	Standard Field, Field Strength		

**Calibration Uncertainty:** Std Field Method 100kHz - 6 GHz, +/-0.64 dB, Linearity +/- 0.95 dB, Isotropicity +/- 0.86 k=2, (95% Confidence Level)

**Test Remarks:** Probe received in tolerance thus before and after data are the same. Calibration performed with customer's HI-2200 sn 00086887.

**Calibration Traceability:** All Measuring and Test Equipment (MTE) identified below are traceable to the SI units through the National Institute for Standards and Technology (NIST) or other recognized National Metrology Institute. Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2017 and ANSI/NCSL Z540-1-1994.

**Standards and Equipment Used:**

Make / Model / Name / S/N / Calibration Date	Condition of Instrument Upon Receipt:
HP 8648C Signal Generator 3836U02236 04-May-21	In Tolerance to Internal Quality Standards
Keysight E9304A Power Sensor MY55100039 16-Apr-21	
Hewlett Packard E4422B Signal Generator US40050591 09-Aug-20	On Release:
Agilent E9304A Power Sensor MY41499013 16-Apr-21	In Tolerance to Internal Quality Standards
Agilent E9304A Power Sensor MY41499012 16-Apr-21	
Rohde & Schwarz NRP-Z91 Power Sensor 100733 06-Mar-21	
Agilent E4419B Power Meter MY40510693 08-Aug-20	
Agilent N1913A Power Meter MY50000415 16-Mar-21	
Marconi 2024 Signal Generator 112343/043 04-May-21	
Rohde & Schwarz NRVD Power Meter 828110/019 09-Jan-21	
Hewlett Packard E4419B Power Meter US39250717 14-Aug-20	
Keysight E9304A Power Sensor MY55100005 16-Apr-21	
Rohde & Schwarz NRV-Z55 Thermal Power Sensor 100352 20-Sep-20	
Rohde & Schwarz NRV-Z55 Thermal Power Sensor 100037 22-Oct-20	
Rohde & Schwarz NRP-Z91 Power Sensor 100734 01-Aug-20	
Keysight N5183B MXG Analog Signal Gener MY53270789 08-Feb-21	

*Julio Aquino*  
Calibration Completed By  
Julio A. Aquino, Calibration Technician

*George Cheras*  
Attested and Issued on 06-May-20  
George Cheras, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2017 and ANSI/NCSL Z540-1-1994. The results in this document relate only to the item(s) listed and should not be considered representative of a population unless otherwise noted. QAF 1127 (03/11)

## CALIBRATION REPORT

**Electric Field Sensor**

<i>Model</i>	<i>S/N</i>
E100	00224511
HI-2200	00086887

Date: 06 May 2020

- New Instrument
- Other
- Out of Tolerance
- X Within Tolerance

**Frequency Response**

<i>Frequency Response</i>	<i>MHz</i>	<i>Nominal Field</i> <i>V/m</i>	<i>Cal Factor*</i> <i>(Applied/Indicated)</i>	<i>Deviation</i> <i>dB</i>
1	0.1	20	1.45	-3.22
2	0.5	20	1.12	-1.01
3	1	20	1.05	-0.43
4	3	20	1.00	-0.03
5	15	20	1.00	0.00
6	27.12	20	1.01	-0.05
7	30	20	1.00	-0.04
8	75	20	1.01	-0.07
9	100	20	1.01	-0.11
10	150	20	1.01	-0.10
11	200	20	1.00	-0.03
12	250	20	1.00	-0.04
13	300	20	0.99	0.08
14	400	20	1.01	-0.05
15	500	20	1.05	-0.46
16	600	20	1.05	-0.43
17	700	20	1.08	-0.65
18	800	20	1.10	-0.81
19	900	20	1.05	-0.39
20	1000	20	1.00	0.00
21	2000	20	1.04	-0.32
22	2450	20	1.04	-0.38
23	3000	20	0.96	0.39
24	3500	20	0.90	0.91
25	4000	20	0.99	0.10
26	5000	20	1.01	-0.08
27	5500	20	1.25	-1.93
28	6000	20	1.33	-2.47

\* Corrected electric field values (V/m) can be obtained by multiplying the Cal Factor with the indicated E field readings.

**Linearity**

maximum linearity deviation is 0.42 dB  
(measurements taken from 0.3 V/m to 800 V/m at 27.12 MHz)

**Test Conditions**

Calibration performed at ambient room temperature: 23 ±3°C



### PROBE ROTATIONAL RESPONSE

Model E100  
S/N 00224511  
Report S00048638  
Date Date of Calibration 06 May 2020  
Time 08:45:13 AM  
Isotropy \* + 0.308 dB/ -0.308 dB

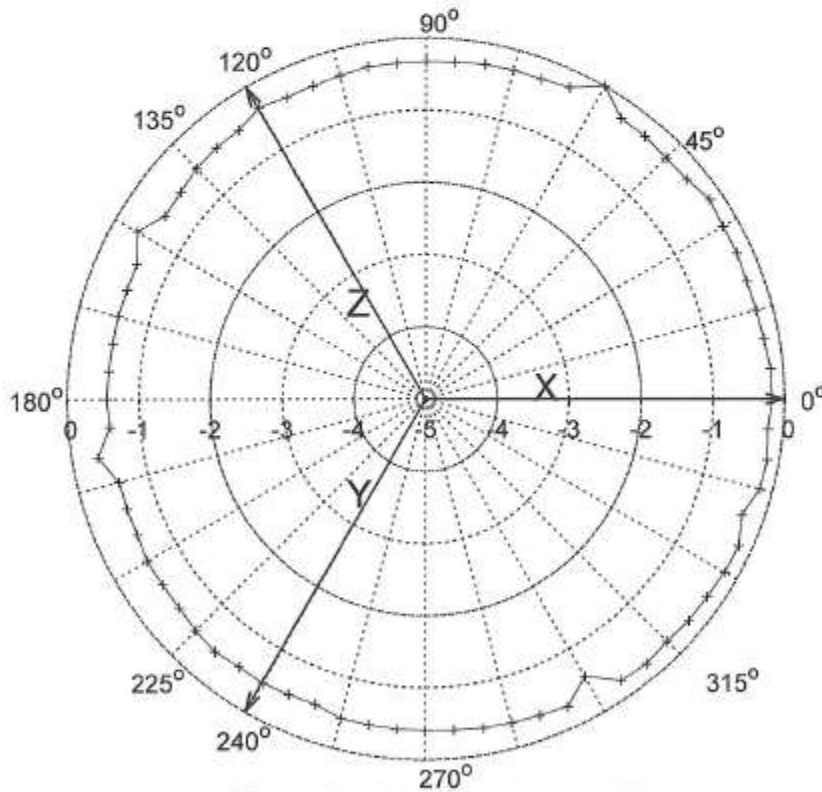


Figure 1: Probe Isotropic Response Chart.

Isotropic response is measured in a 20 V/m field at 400 MHz

\*Isotropy is the maximum deviation from the geometric mean as defined by IEEE 1309-2013.

**Appendix C - Photos of Assessed Antennas**  
(Refer to Exhibit 7B)

## **Appendix D - MPE Measurement Results**

**Table D.1**

**MPE measurement data for Bystander**

D.U.T. Info.							Probe Info.		Test Pos.	MPE Measurement										DUT Max. TX Factor	Avg. over Body (mW/cm <sup>2</sup> )	Calc. P.D. (mW/cm <sup>2</sup> )	Max Calc. P.D. (mW/cm <sup>2</sup> )
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Bystander (BS) Positions													
										20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
MC	HAE6032A, (425 MHz - 470 MHz)	2.15	450.0125	18.0	17.5	CW	E	1.06	BS	0.067	0.052	0.093	0.16	0.294	0.342	0.259	0.161	0.091	0.054	0.5	0.167	0.083	0.086
MC	HAE6032A, (425 MHz - 470 MHz)	2.15	460.0000	18.0	17.6	CW	E	1.07	BS	0.063	0.037	0.101	0.152	0.26	0.285	0.227	0.14	0.072	0.033	0.5	0.147	0.073	0.075
MC	HAE6032A, (425 MHz - 470 MHz)	2.15	469.9875	18.0	17.6	CW	E	1.08	BS	0.063	0.039	0.101	0.141	0.248	0.267	0.21	0.114	0.06	0.031	0.5	0.138	0.069	0.070
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	450.0125	18.0	17.5	CW	E	1.06	BS	0.068	0.061	0.105	0.173	0.313	0.336	0.256	0.151	0.092	0.056	0.5	0.171	0.085	0.088
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	460.0000	18.0	17.6	CW	E	1.07	BS	0.067	0.052	0.102	0.150	0.264	0.306	0.25	0.143	0.076	0.037	0.5	0.155	0.077	0.079
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	469.9875	18.0	17.6	CW	E	1.08	BS	0.073	0.047	0.114	0.166	0.267	0.295	0.228	0.126	0.064	0.036	0.5	0.153	0.076	0.078
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	481.9875	18.0	17.7	CW	E	1.09	BS	0.072	0.043	0.097	0.144	0.208	0.230	0.154	0.091	0.055	0.033	0.5	0.123	0.061	0.062
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	450.0125	18.0	17.5	CW	E	1.06	BS	0.093	0.078	0.129	0.201	0.336	0.378	0.283	0.177	0.101	0.070	0.5	0.196	0.098	0.101
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	469.9875	18.0	17.6	CW	E	1.08	BS	0.108	0.077	0.169	0.229	0.375	0.407	0.322	0.177	0.100	0.058	0.5	0.218	0.109	0.112
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	482.5000	18.0	17.7	CW	E	1.09	BS	0.098	0.064	0.135	0.184	0.259	0.296	0.217	0.132	0.085	0.054	0.5	0.166	0.083	0.084
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	496.5000	18.0	17.7	CW	E	1.10	BS	0.095	0.069	0.115	0.136	0.204	0.271	0.25	0.174	0.102	0.067	0.5	0.163	0.082	0.083
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	511.9875	18.0	17.8	CW	E	1.10	BS	0.098	0.082	0.090	0.179	0.276	0.313	0.218	0.112	0.062	0.036	0.5	0.161	0.081	0.082

MPE calculations are defined in section 13.0.



**Table D.2**  
MPE measurement data for Operator

D.U.T. Info.							Probe Info.		Test Pos.	MPE Measurement			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Operator (OP) Positions						
										Head/ Top	Chest/ Middle	Lower Trunk/ Bottom				
MC	HAE6032A, (425 MHz - 470 MHz)	2.15	450.0125	18.0	17.5	CW	E	1.06	OP	0.357	0.748	0.323	0.5	0.336	0.168	0.173
MC	HAE6032A, (425 MHz - 470 MHz)	2.15	460.0000	18.0	17.6	CW	E	1.07	OP	0.363	0.667	0.299	0.5	0.316	0.158	0.162
MC	HAE6032A, (425 MHz - 470 MHz)	2.15	469.9875	18.0	17.6	CW	E	1.08	OP	0.436	0.764	0.427	0.5	0.390	0.195	0.200
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	450.0125	18.0	17.5	CW	E	1.06	OP	0.342	0.710	0.312	0.5	0.321	0.161	0.165
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	460.0000	18.0	17.6	CW	E	1.07	OP	0.383	0.702	0.3	0.5	0.329	0.165	0.168
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	469.9875	18.0	17.6	CW	E	1.08	OP	0.48	0.842	0.458	0.5	0.427	0.214	0.218
MC	HAE6033A, (450 MHz - 482 MHz)	2.15	481.9875	18.0	17.7	CW	E	1.09	OP	0.397	0.874	0.647	0.5	0.465	0.232	0.236
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	450.0125	18.0	17.5	CW	E	1.06	OP	0.377	0.772	0.313	0.5	0.344	0.172	0.177
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	469.9875	18.0	17.6	CW	E	1.08	OP	0.72	1.203	0.643	0.5	0.616	0.308	0.315
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	482.5000	18.0	17.7	CW	E	1.09	OP	0.525	1.134	0.83	0.5	0.603	0.301	0.307
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	496.5000	18.0	17.7	CW	E	1.10	OP	0.535	1.121	0.753	0.5	0.589	0.294	0.299
MC	HAE6035A, (450 MHz - 512 MHz)	2.15	511.9875	18.0	17.8	CW	E	1.10	OP	0.484	1.063	0.676	0.5	0.543	0.272	0.275

MPE calculations are defined in section 13.0.

**Table D.3**  
**LMR UHF2 MPE Results for FCC**

<b>P<sub>max</sub> (W)</b>	18	<b>P<sub>initial</sub> (W)</b>	17.5	17.6	17.6	17.7	17.7	17.7	17.8
		<b>FCCLimit (mW/cm<sup>2</sup>)</b>	0.30	0.31	0.31	0.32	0.32	0.33	0.34

Table	Test Post	Ant Loc.	E/H Field	Antenna No.	f1	f2	f3	f4	f5	f6	f7
					450.0125	460.0000	469.9875	481.9875	482.5000	496.5000	511.9875
D.1	BS	MC	E	1	0.086	0.075	0.070				
D.1	BS	MC	E	2	0.088	0.079	0.078	0.062			
D.1	BS	MC	E	3	0.101		0.112		0.084	0.083	0.082

<b>P<sub>max</sub> (W)</b>	18	<b>P<sub>initial</sub> (W)</b>	17.5	17.6	17.6	17.7	17.7	17.7	17.8
		<b>FCCLimit (mW/cm<sup>2</sup>)</b>	1.50	1.53	1.57	1.61	1.61	1.66	1.71

Table	Test Post	Ant Loc.	E/H Field	Antenna No.	f1	f2	f3	f4	f5	f6	f7
					450.0125	460.0000	469.9875	481.9875	482.5000	496.5000	511.9875
D.2	OP	MC	E	2	0.173	0.162	2.000				
D.2	OP	MC	E	3	0.165	0.168	0.218	0.236			
D.2	OP	MC	E	4	0.177		0.315		0.307	0.299	0.275