 MS ISO/IEC 17025 TESTING SMM No. 0825
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn Bhd Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISED TEST REPORT Report Revision : Rev.B
<p>Date/s Tested : 18-APR-2018 - 10-JUN-2018 Report Issue Date : 30-JUL-2018 Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd Requestor : FEEMSTER MICHAEL Product Type : Mobile Model Number : M37TXS9PW1AN Frequency Band : 380- 470 MHz Low / Max RF Output Power : 1 Watts / 120 Watts Applicant Name : Motorola Solutions Malaysia Sdn Bhd Applicant Address : Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia ISED Registrations : 109AK FCC Test Firm Registrations : 461337</p> <p>The equipment was tested accordance to the requirement listed below:</p> <p>(LMR) FCC 47 CFR Part 22, 74, 80, 90 ISED RSS- Gen / 119 PASS</p>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:</p> <hr/> <p>Khor Wei Loong Test Personnel</p>	<p>Approved By:</p> <hr/> <p>Vincent Foong Responsible Engineer</p>

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty.....	6
4.0 Equipment List.....	7
5.0 Test Condition.....	9
5.1. Transmitter Test Conditions	9
6.0 Transmitter Test Parameters	10
6.1. RF Output Power	10
6.1.1. Test Setup.....	10
6.1.2. Test Result	10
6.2. Frequency Stability	11
6.2.1. Test Setup.....	11
6.2.2. Test Result	12
6.2.3. Test Limit.....	13
6.3. Audio Frequency Response	14
6.3.1. Test Setup.....	14
6.3.2. Test Result	15
6.3.3. Test Limit.....	16
6.4. Audio Low Pass Filter Response	17
6.4.1. Test Setup.....	17
6.4.2. Test Result	18
6.4.3. Test Limit.....	19
6.5. Modulation Limiting.....	20
6.5.1. Test Setup.....	20
6.5.2. Test Result	21
6.5.3. Test Limit.....	21
6.6. Occupied Bandwidth.....	22
6.6.1. Test Setup (Analog)	22
6.6.2. Test Result (Analog).....	23
6.6.3. Test Setup (Digital).....	28
6.6.4. Test Result (Digital).....	29
6.6.5. Test Limit.....	35
6.7. Band Edge Conducted Spurious Emission (Part 22)	36
6.7.1. Test Setup (Analog)	36
6.7.2. Test Result (Analog).....	37
6.7.3. Test Setup (Digital).....	38
6.7.4. Test Result (Digital).....	39
6.7.5. Test Limit.....	41
6.8. Transient Frequency Behavior.....	42
6.8.1. Test Setup.....	42
6.8.2. Test Result	43
6.8.3. Test Limit.....	46

6.9. Adjacent Channel Power..... 47

6.9.1. Test Setup (Analog) 47

6.9.2. Test Result 47

6.9.3. Test Setup (Digital)..... 48

6.9.4. Test Result 48

6.10. Conducted Spurious Emission 51

6.10.1. Test Setup..... 51

6.10.2. Test Result (Analog)..... 52

6.10.3. Test Result (Digital)..... 66

6.10.4. Test Limit..... 94

6.11. Radiated Spurious Emission 95

6.11.1. Test Setup..... 95

6.11.2. Test Result (Analog)..... 96

6.11.3. Test Result (Digital)..... 106

6.11.4. Test Limit..... 126

6.12. Effective Radiated Power (ERP) 127

6.12.1. Test Setup..... 127

6.12.2. Test Result 128

6.12.3. Test Limit..... 128

6.13. GNSS (EIRP for 1559 - 1610MHz)..... 128

6.13.1. Test Setup..... 129

6.13.1. Test Result 129

6.13.2. Test Limit..... 130

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	27-JUN-2018	Khor Wei Loong
Rev. B	Amended on Section 6.11 reference to ANSI C63.26 Added 459.125MHz 60W data on section 6.11	30-JUL-2018	Khor Wei Loong

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM , Phase II

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.4-2014

ANSI C63.26-2015

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remark
2.1046, 22.565, 74.461, 74.534, 80.215	RSS-Gen, RSS-119	RF Power Output	Pass	-
2.1055, 90.213, 22.355, 74.464, 74.561	-	Frequency Stability	Pass	-
2.1047, 74.463, 80.213	RSS-Gen, RSS-119	Audio Frequency Response	Pass	-
2.1047, 74.463, 80.213	RSS-Gen, RSS-119	Audio Low Pass Filter Response	Pass	-
2.1047, 74.463, 80.213	RSS-Gen, RSS-119	Modulation limiting	Pass	-
2.1049, 90.210, 22.359, 74.462, 74.535, 80.211(c), 80.211(f)	RSS-Gen, RSS-119	Occupied Bandwidth	Pass	16K0F1E – 15.0255kHz 20K0F1E – 15.1332kHz 11K0F3E – 9.9789kHz 8K10F1D – 7.9941kHz 8K10F1E – 8.0454kHz 8K10F1W – 8.0343kHz
-	-	Band Edge Conducted Spurious Emission	Pass	16K0F3E – 15.0190kHz 8K10F1E – 8.430kHz 8K10F1W – 7.9600kHz
90.214	-	Transient Frequency Behavior	Pass	-
-	-	Adjacent Channel Power	NA	-
2.1053, 90.210, 22.359, 74.461, 74.861, 80.211	RSS-Gen, RSS-119	Conducted Spurious Emissions	Pass	Highest Spur Level -23.59dBm
2.1053, 90.210, 22.359, 74.461, 74.861, 80.211	RSS-Gen, RSS-119	Radiated Spurious Emission	Pass	Highest Spur Level -36.19dBm
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA	
-	-	Effective Radiated Power (ERP)	NA	

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.5 & FCC_Frequency Stability 1.0.3 rev.)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
Audio Analyzer	8903B	3011A10475	2-May-17	2-Aug-18
SIGNAL GENERATOR	2042	203001/904	2-May-17	8-Mar-19
MODULATION ANALYZER	8901B	3216A03889	3-May-17	3-Apr-19
DSA	36570A	MY42506781	3-May-17	3-Aug-18
POWER SENSOR	E4412A	MY41502652	9-May-17	17-Apr-19
POWER METER	E4416A	GB41293855	9-May-17	16-Jan-19
POWER SUPPLY	6031A	2430A00146	09-Apr-18	08-Apr-19
CHAMBER	SH-641	92009188	3-Apr-18	3-Apr-19
RF TRANSCEIVER CONTROLLER	AX2007AI	NA	CNR	CNR

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6032A	2818A03549	11-May-17	3-Aug-18
POWER SENSOR	E4412A	MY41498918	9-May-17	9-Aug-18
POWER METER	E4416A	GB41293747	12-May-16	12-Aug-18
ATTENUATORS/SWITCH DRIVER	11713A	2508A10141	CNR	CNR
STEP ATTENUATOR/11dB	8494G	MY52300223	9-May-17	9-Aug-18
STEP ATTENUATOR/110dB	8496G	MY52300176	9-May-17	9-Aug-18
OSCILLOSCOPE	MSO8064A	MY45001903	25-May-17	25-Aug-18
AUDIO ANALYZER	8903B	3729A17409	2-May-17	5-Dec-18
AUDIO ANALYZER	8903B	3011A08952	2-May-17	25-Nov-18
MODULATION ANALYZER	8901B	3538A05696	28-Mar-18	31-Mar-19
SIGNAL GENERATOR	8657A	3323A05725	19-May-17	19-Aug-18
SPECTRUM ANALYZER	E4440A	MY46185415	24-May-17	16-Aug-19
SWITCH CONTROL UNIT	-	-	CNR	CNR

CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.01)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
SPECTRUM ANALYZER	E4440A	US45303111	16-Feb-17	16-Feb-19
POWER SUPPLY	6032A	MY41002067	5-May-17	5-Aug-18
HIGH PASS FILTER SWITCH BOX	-	CS001	9-Apr-18	9-Apr-19
MICROWAVE GENERATOR	SMP04	100146	18-Sept-17	18-Sept-18
MODULATION ANALYZER	8901B	3438A05278	3-May-17	3-Aug-18

Radiated Emission Station (SW version: EMC_FCC_IC_Bluetooth_RE_Test_v1.5.1)

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	719	18-Jul-17	18-Jul-19
DRG HORN FREQ.	SAS-571	720	2-Mar-17	2-Mar-19
POWER SUPPLY	6032A	2615A01178	6-Jun-17	6-Jun-18
MICROWAVE SIGNAL GENERATOR	SMP04	100127	19-Jul-17	18-Jul-18
EMI TEST RECEIVER	ESIB26	100336	13-Jul-17	12-Jul-18
SIGNAL ANALYZER	FSV40	101103	18-Jul-17	17-Jul-18
5m Semi-anechoic Chamber	S800-HX	J2308	CNR	CNR
BILOG ANTENNA	CBL6112D	25224	22-Jul-17	22-Jul-18
BILOG ANTENNA	CBL6112B	2964	16-Feb-18	16-Feb-20
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	7-Nov-17	7-Nov-18
DATA LOGGER	SDL500	A.016776	18-Mar-17	18-Mar-19
LOOP ANTENNA	6502	208416	27-Jul-17	27-Jul-18
SYSTEM CONTROLLER	SC104V	050806-1	CNR	CNR
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	CNR	CNR
ANTENNA POSITIONING TOWER	TLT2	NA	CNR	CNR
18 - 40GHz PREAMPLIFIER	Miteq Hi Gain Sucoflex	002	CNR	CNR
PREAMPLIFIER	PAM-0118P	361	CNR	CNR
Test Software	EMC_FCC_IC_Bluetooth_RE_Test			
Version	EMC_FCC_RE_v1.5.1			

CNR → Calibration Not Required

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By
RF Output Power	Low & Max	Analog	380.0125, 406.2, 450.65, 459.125, 467.775	Khor Wei Loong
Frequency Stability	Max	Analog	467.775	Khor Wei Loong
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	467.775	Khor Wei Loong
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	467.775	Khor Wei Loong
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	467.775	Khor Wei Loong
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	Analog, C4FM, Phase II	406.2, 450.65, 459.125, 467.775,	Khor Wei Loong
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	Analog, C4FM, Phase II	459.025, 459.65	Khor Wei Loong
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	Analog	467.775	Khor Wei Loong
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	Analog, C4FM	NA	NA
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	380.0125, 406.2, 450.65, 459.025, 459.65, 459.125, 467.775	Khor Wei Loong
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	380.0125, 406.2, 450.65, 459.125, 467.775	Nazrin & Qawiman
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	Analog	NA	NA
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	Analog	NA	NA

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

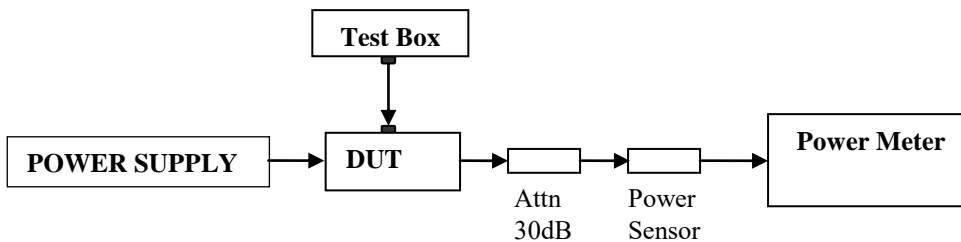


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remarks
Voltage (V)	13.6V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
380.0125	1.09	3.72	119.78	24.9	
406.2	0.96	3.61	116.47	21.3	
450.65	0.91	3.54	119.34	23.2	
459.125	0.94	3.65	116.57	24.4	
467.775	1.01	3.71	115.69	24.5	

6.2. Frequency Stability

6.2.1. Test Setup

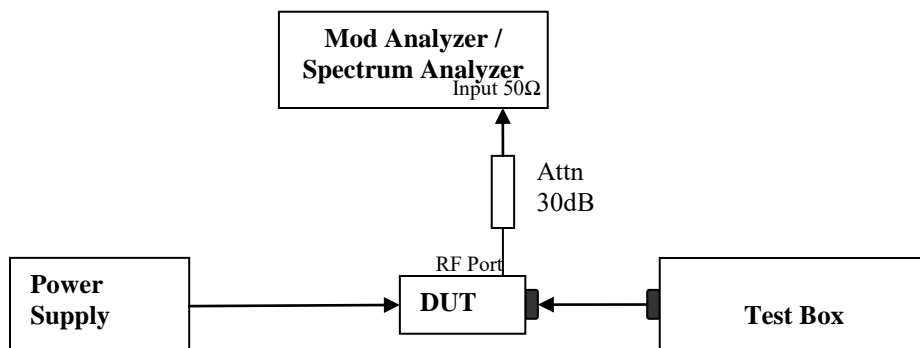


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from $-30^{\circ}C$ to $50^{\circ}C$.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:


$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

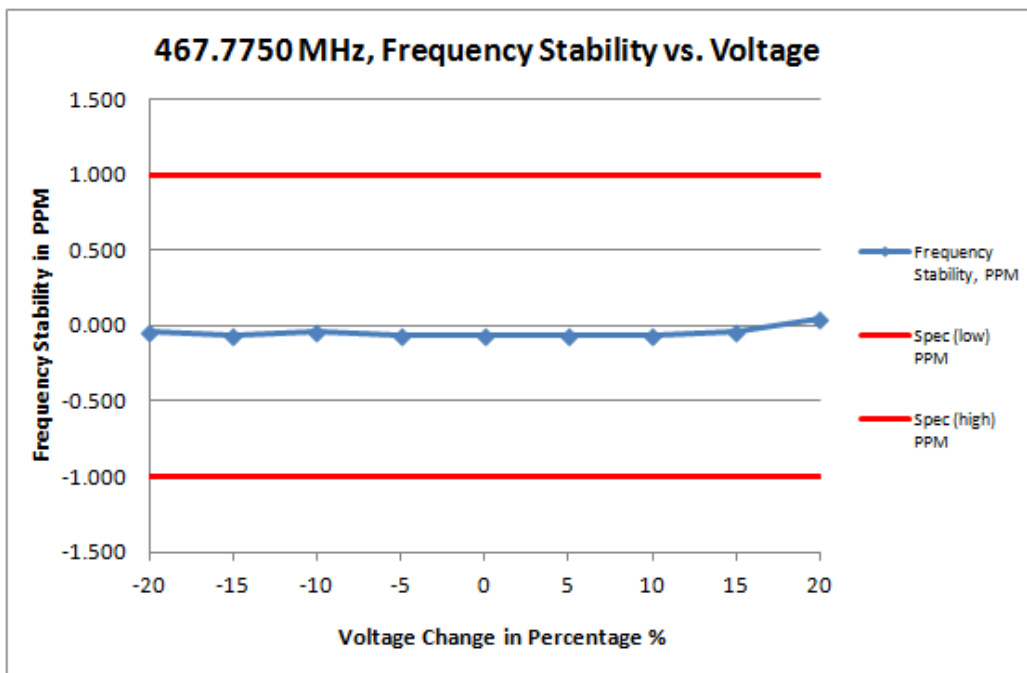

Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.800	467.774980	-0.042	-1.000	1.000
-15	11.560	467.774970	-0.064	-1.000	1.000
-10	12.240	467.774980	-0.042	-1.000	1.000
-5	12.920	467.774970	-0.064	-1.000	1.000
0	13.600	467.774970	-0.064	-1.000	1.000
5	14.280	467.774970	-0.064	-1.000	1.000
10	14.960	467.774970	-0.064	-1.000	1.000
15	15.640	467.774980	-0.042	-1.000	1.000
20	16.320	467.774980	0.042	-1.000	1.000

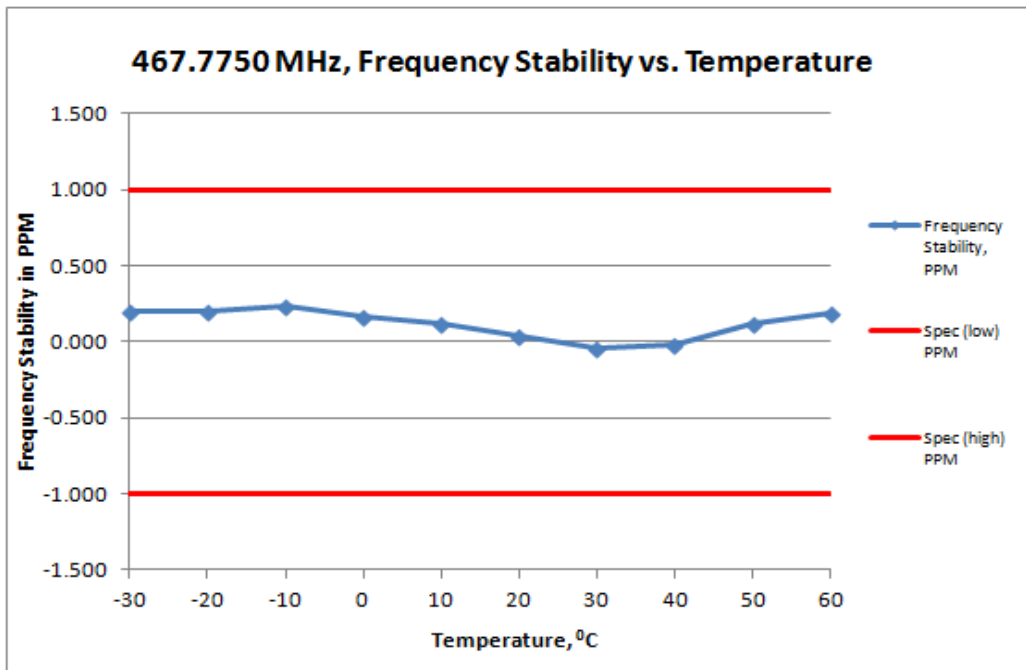


Frequency / Channel Spacing	467.7750 MHz / 12.5 kHz			
Voltage, V	13.6			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	467.775100	0.200	-1.000	1.000
-20	467.775100	0.200	-1.000	1.000
-10	467.775130	0.230	-1.000	1.000
0	467.775080	0.170	-1.000	1.000
10	467.775060	0.120	-1.000	1.000
20	467.775020	0.040	-1.000	1.000
30	467.774980	-0.040	-1.000	1.000
40	467.774990	-0.020	-1.000	1.000
50	467.775060	0.120	-1.000	1.000
60	467.775090	0.190	-1.000	1.000

6.2.3. Test Limit

As per manufacturer declared spec +/- 1ppm


6.3. Audio Frequency Response

6.3.1. Test Setup

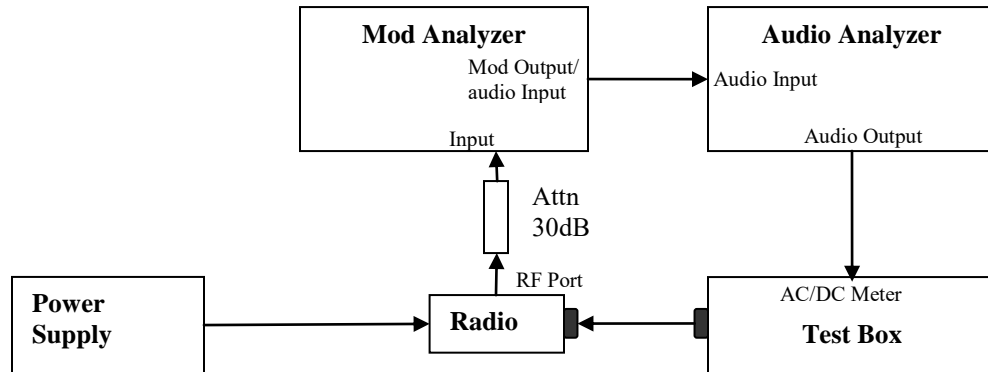


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.


6.3.2. Test Result

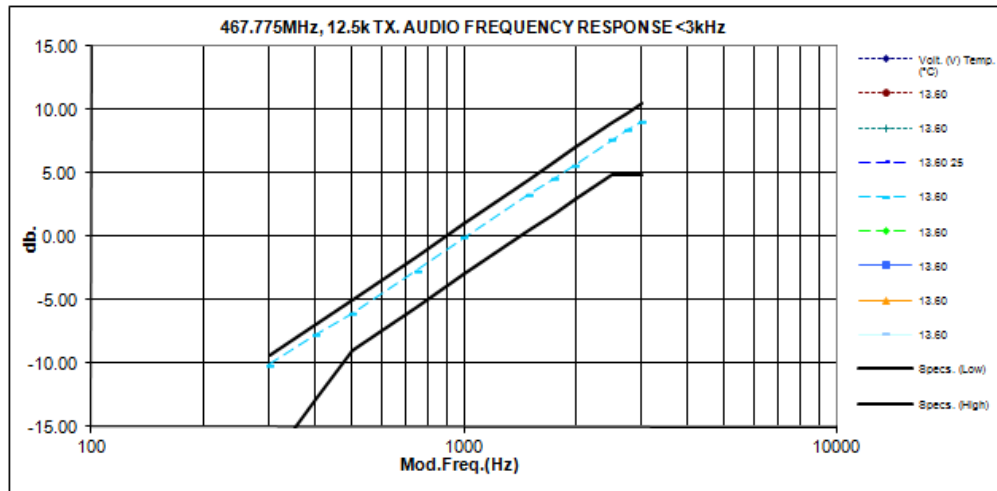

Not For FCC Review

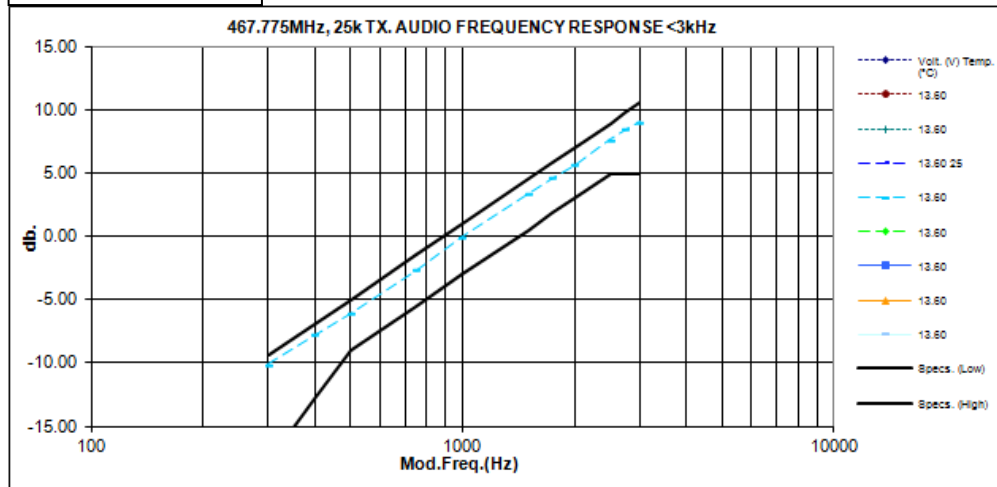

6.3.3. Test Limit

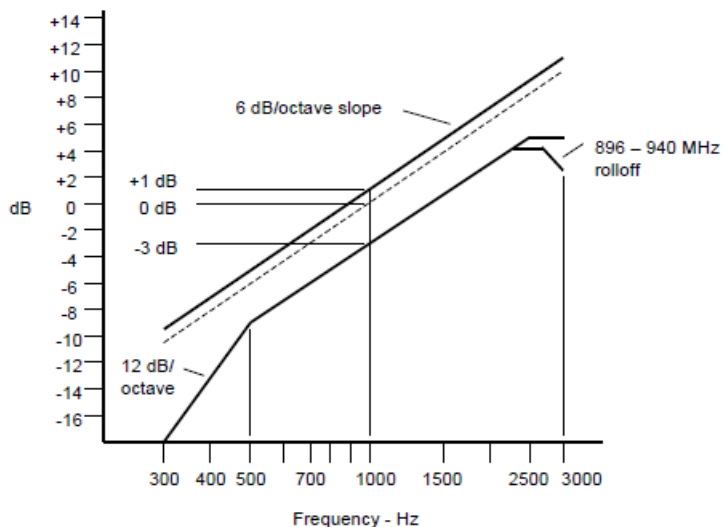


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.


6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

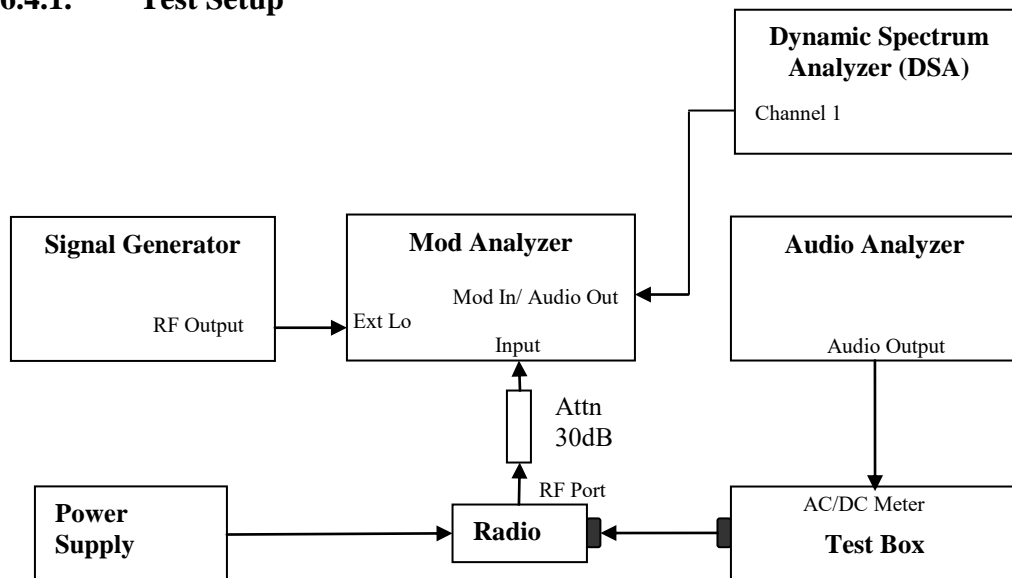


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.


6.4.2. Test Result

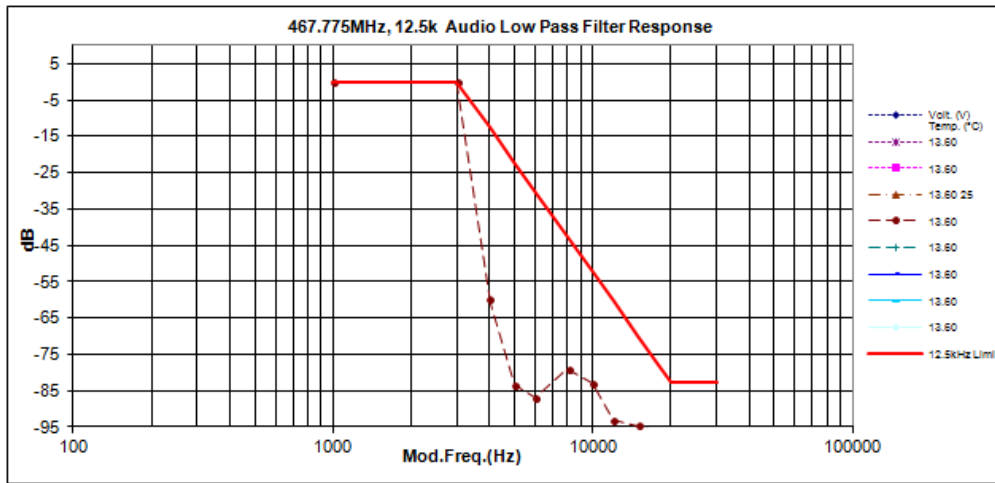

Not For FCC Review

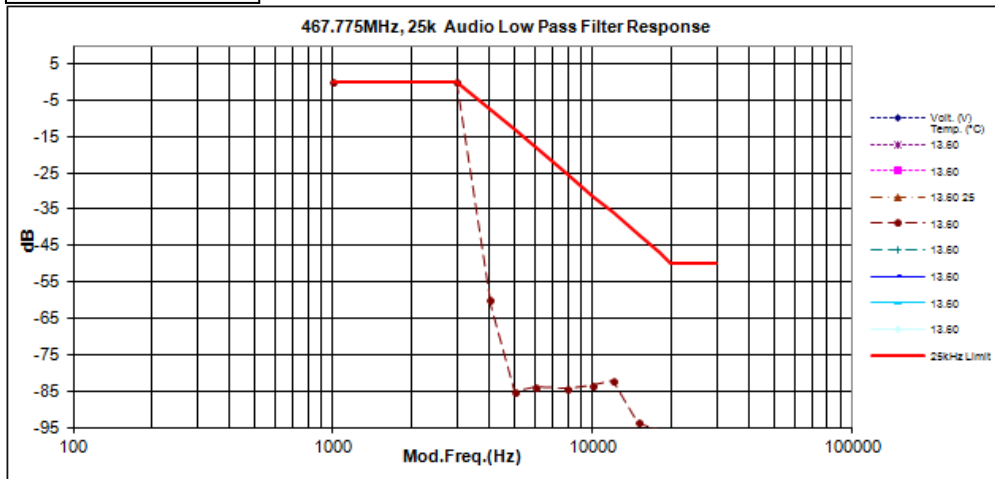

6.4.3. Test Limit

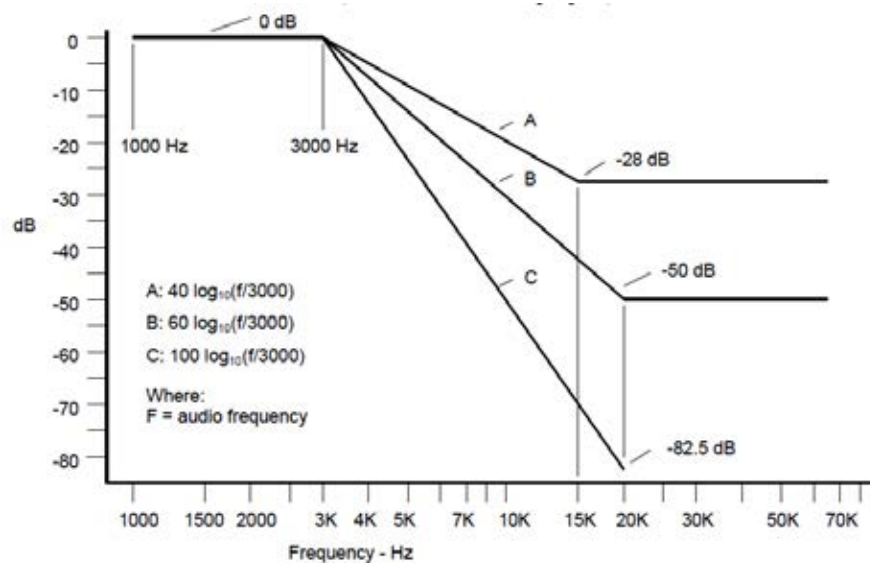

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.


6.5. Modulation Limiting

6.5.1. Test Setup

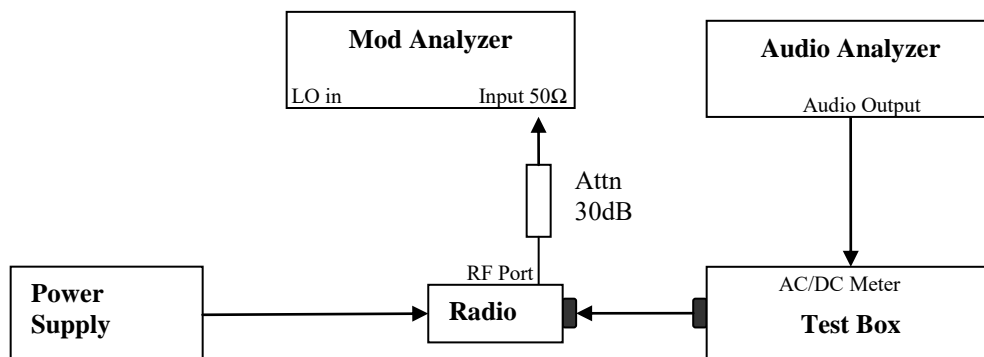


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result

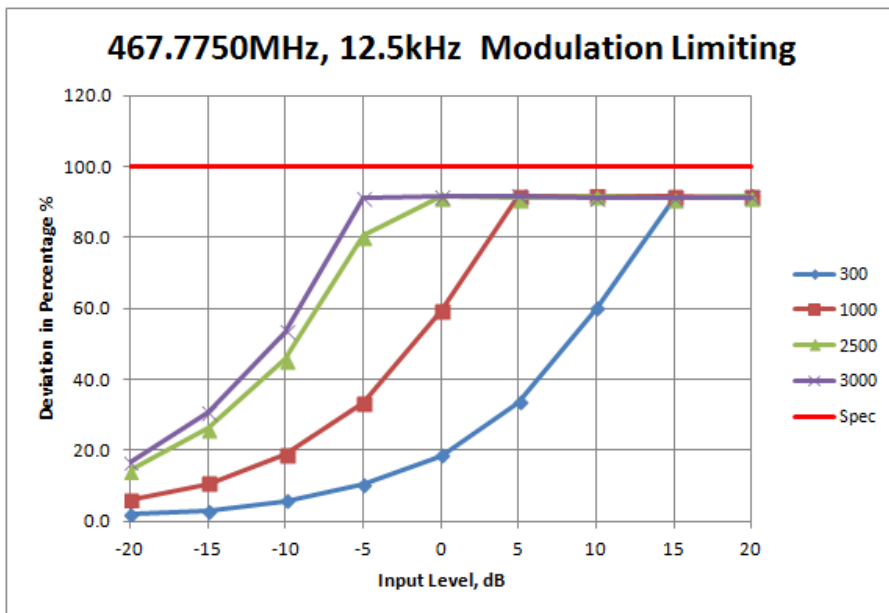

Not For FCC Review

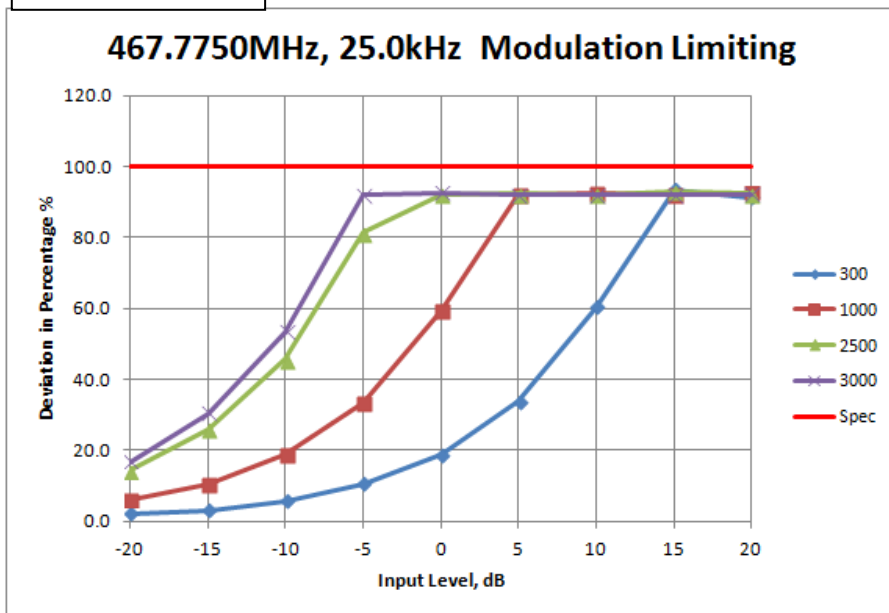


6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

6.6. Occupied Bandwidth



6.6.1. Test Setup (Analog)


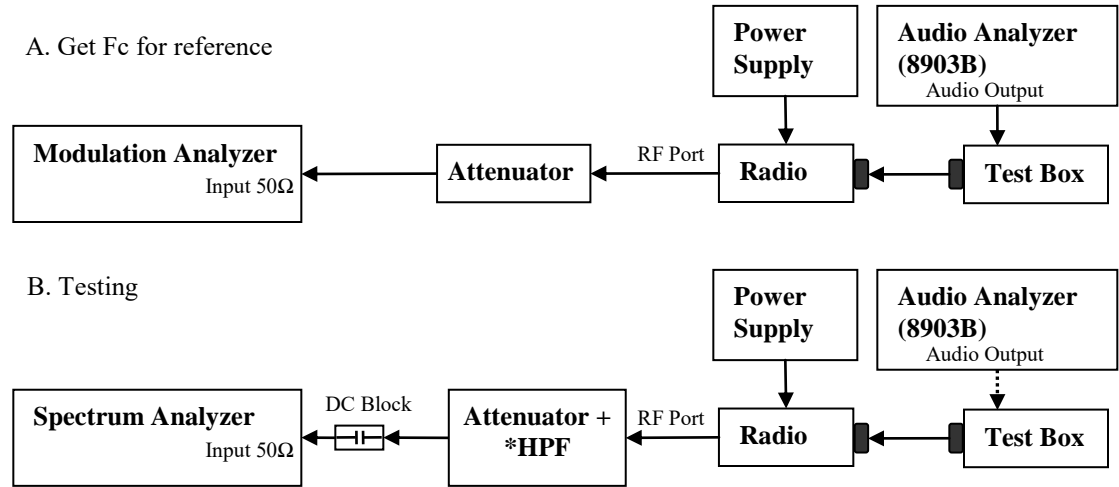




- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.



* Only HPF added for Mask 80.211 measurement with attenuator.


6.6.2. Test Result (Analog)

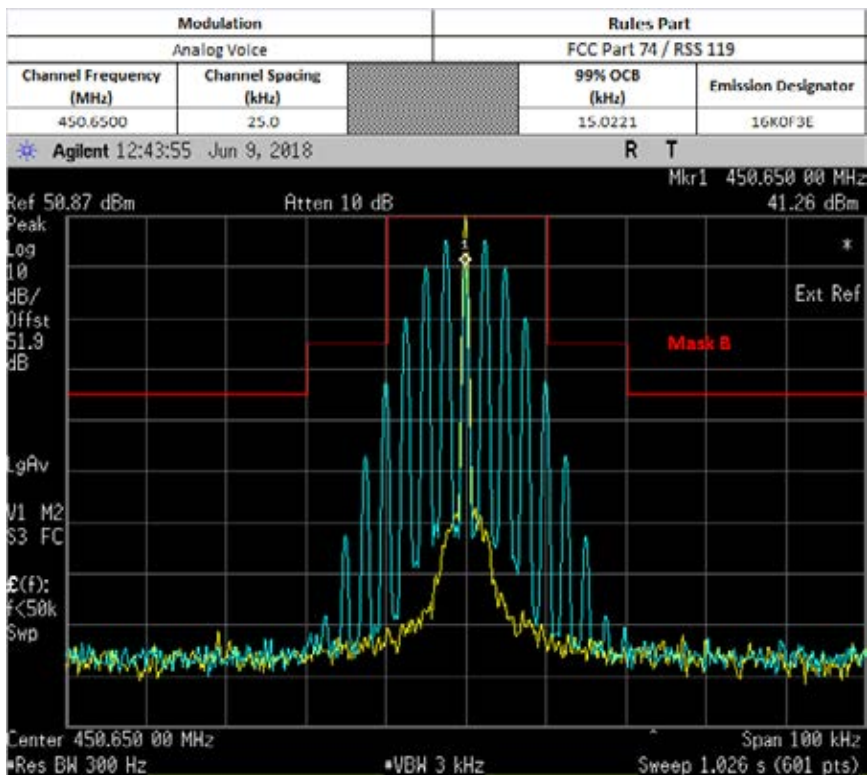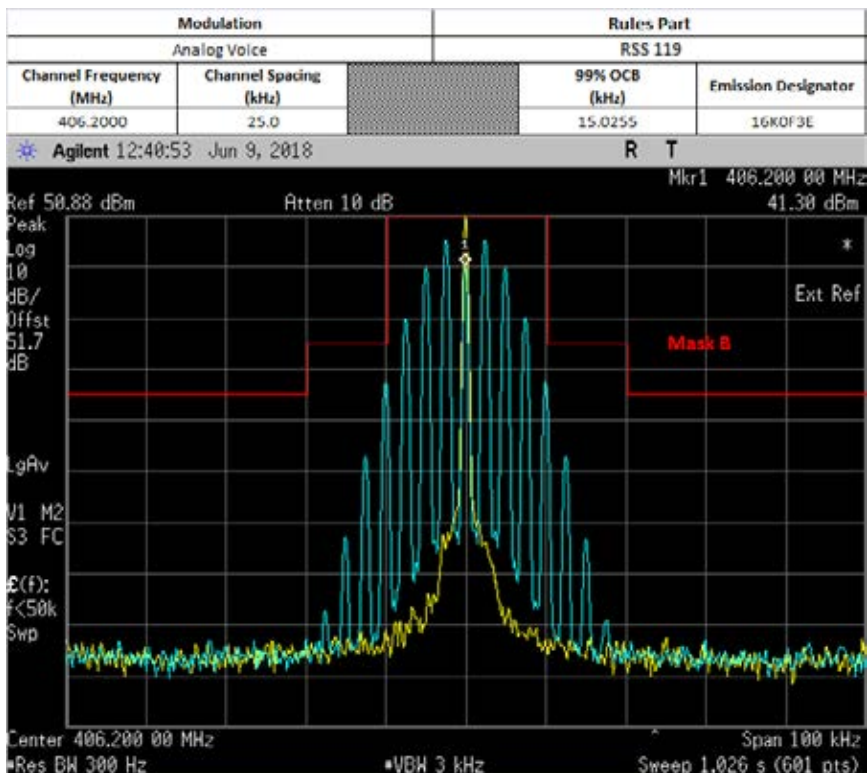

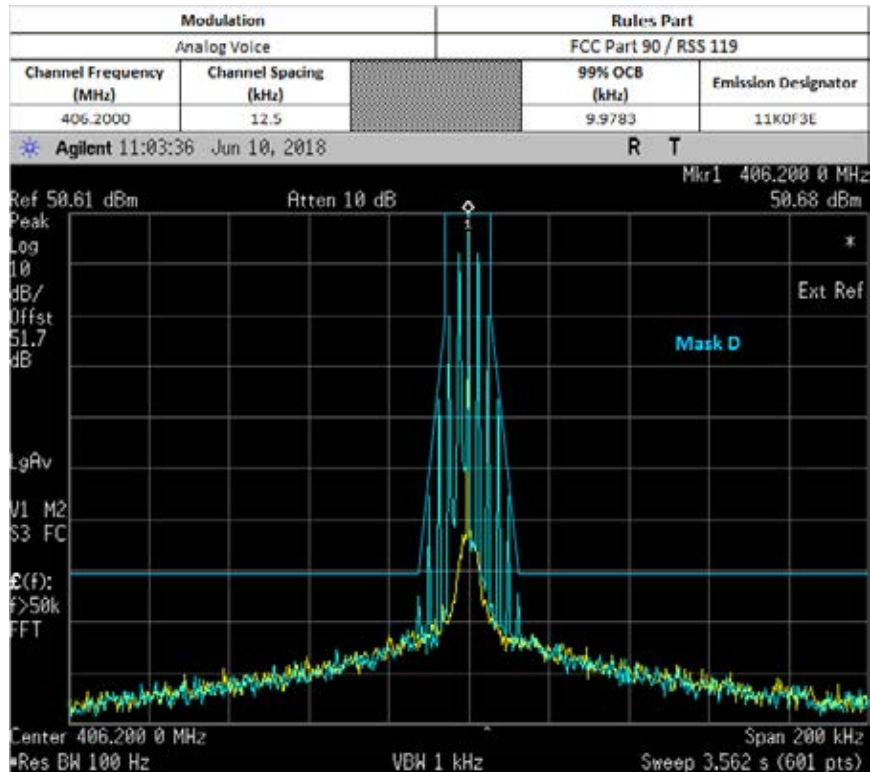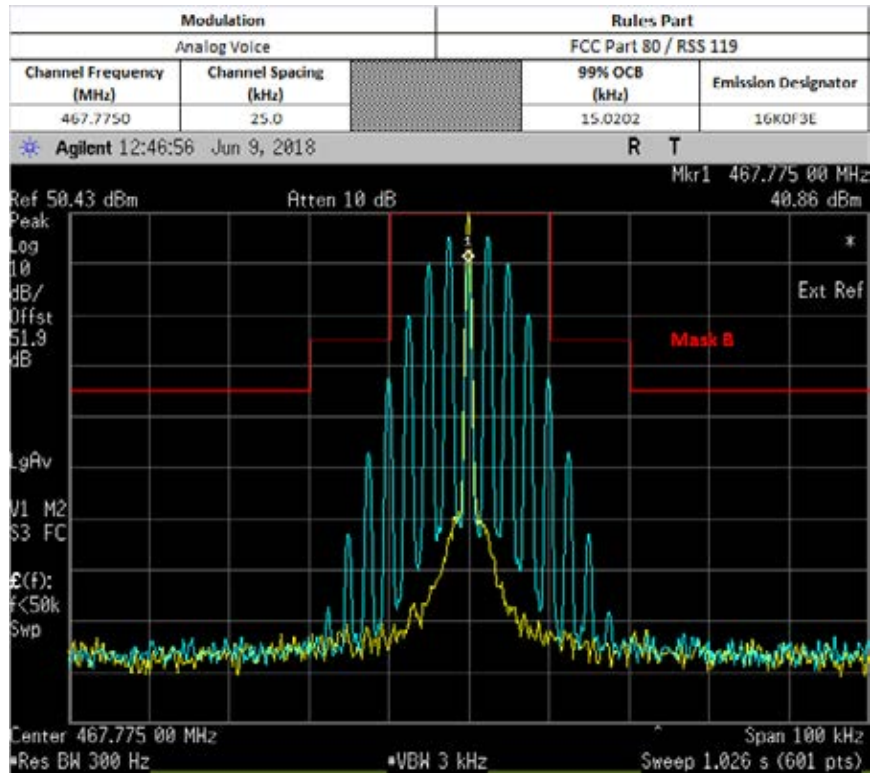


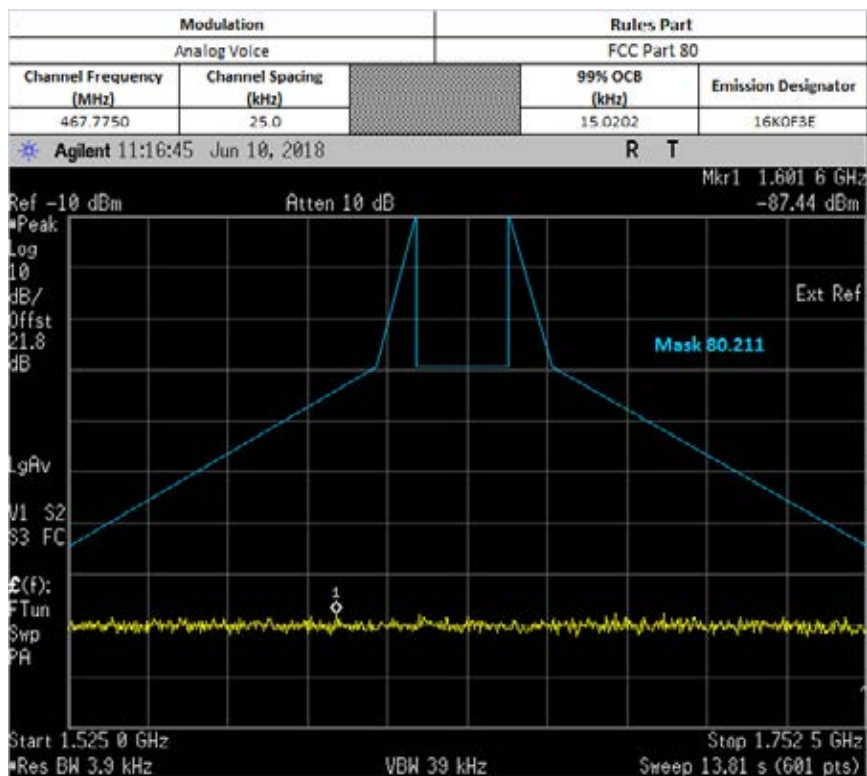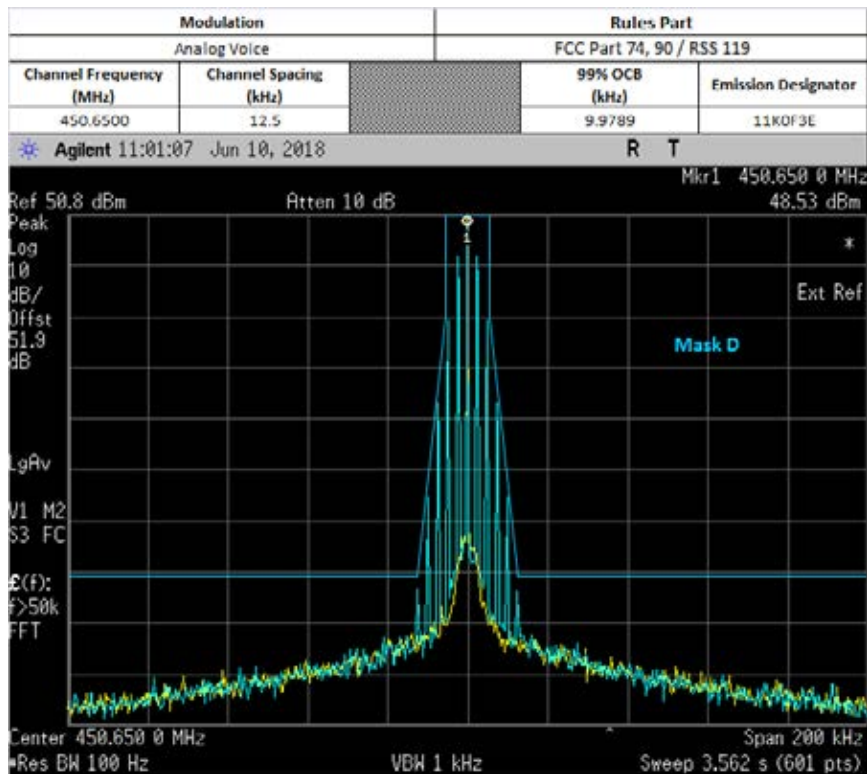

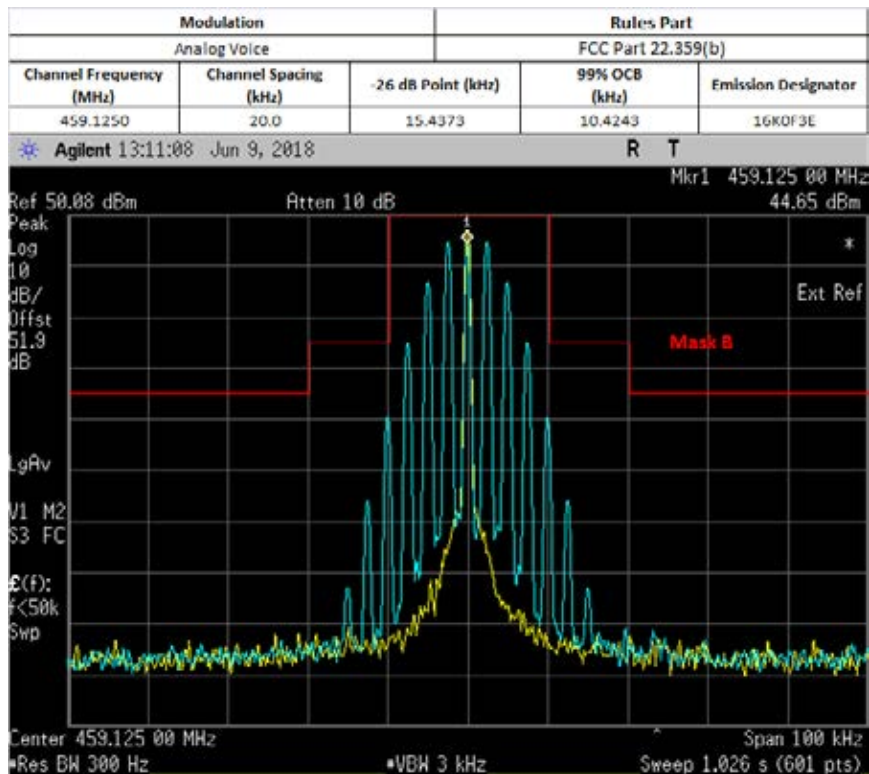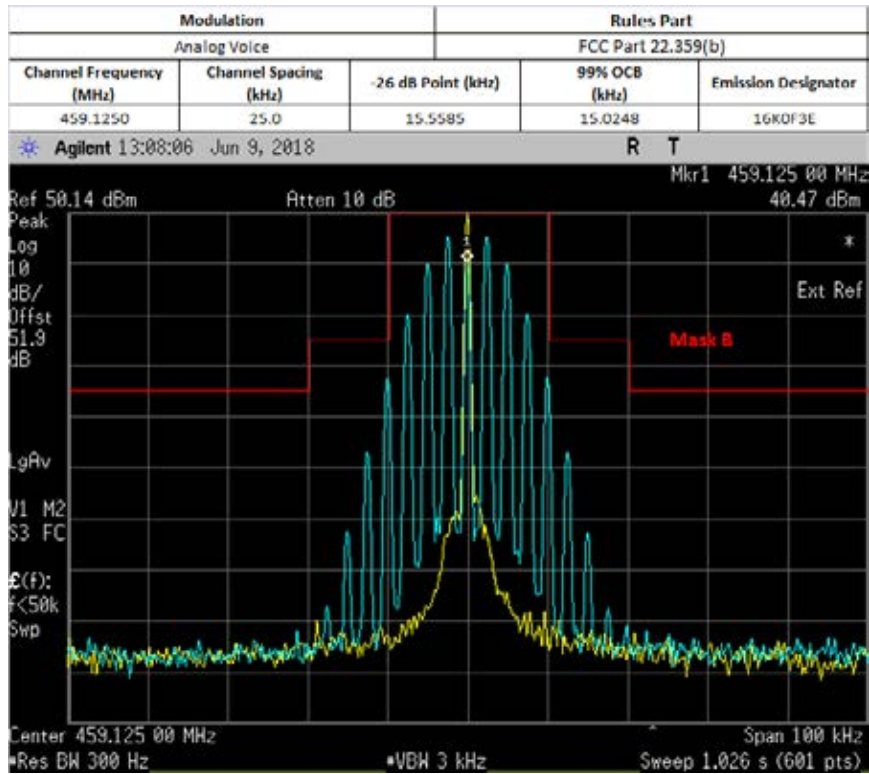

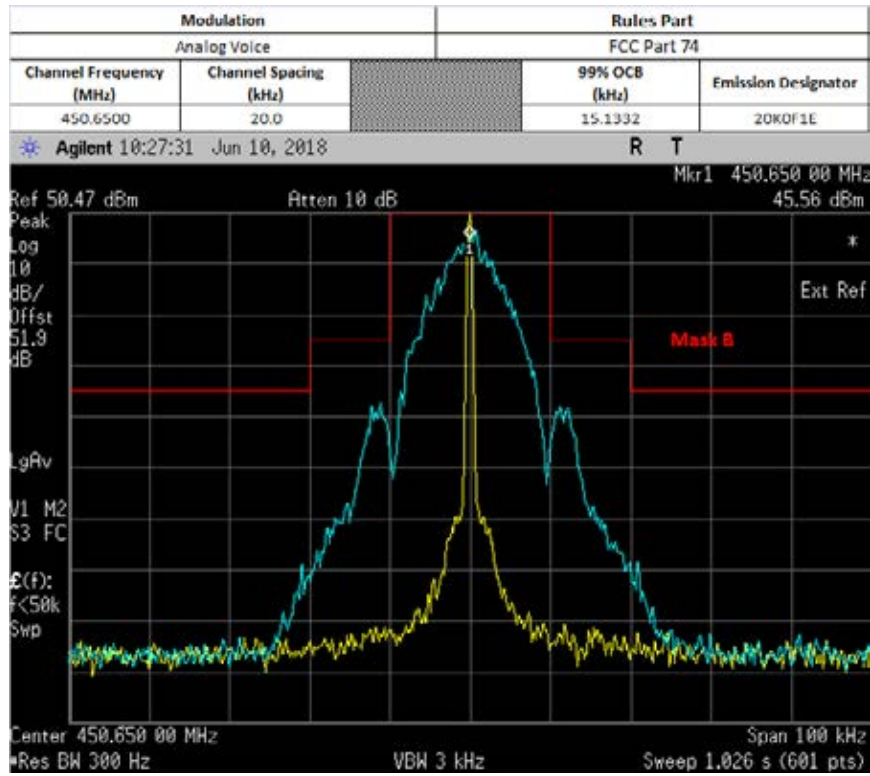

6.6.3. Test Setup (Digital)


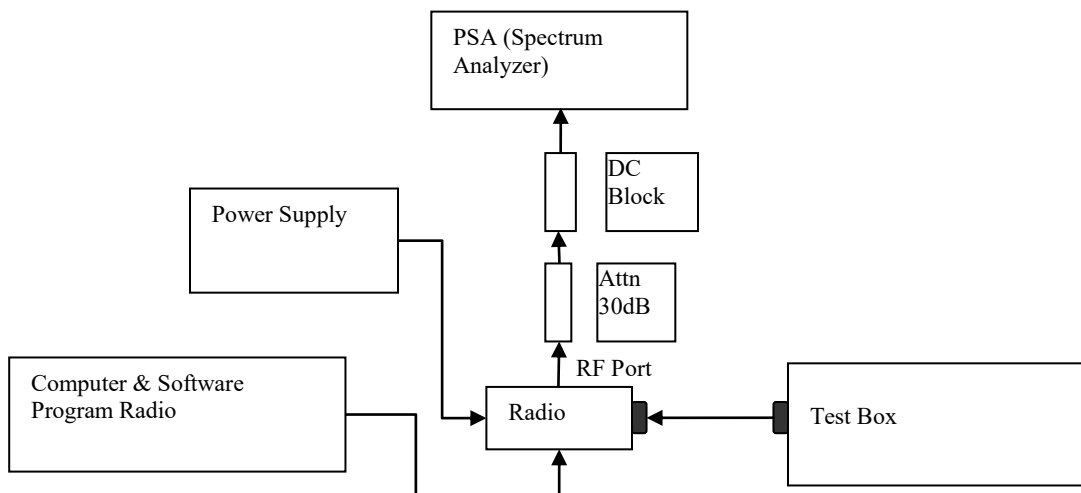




- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.



*Note:



- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.



6.6.4. Test Result (Digital)

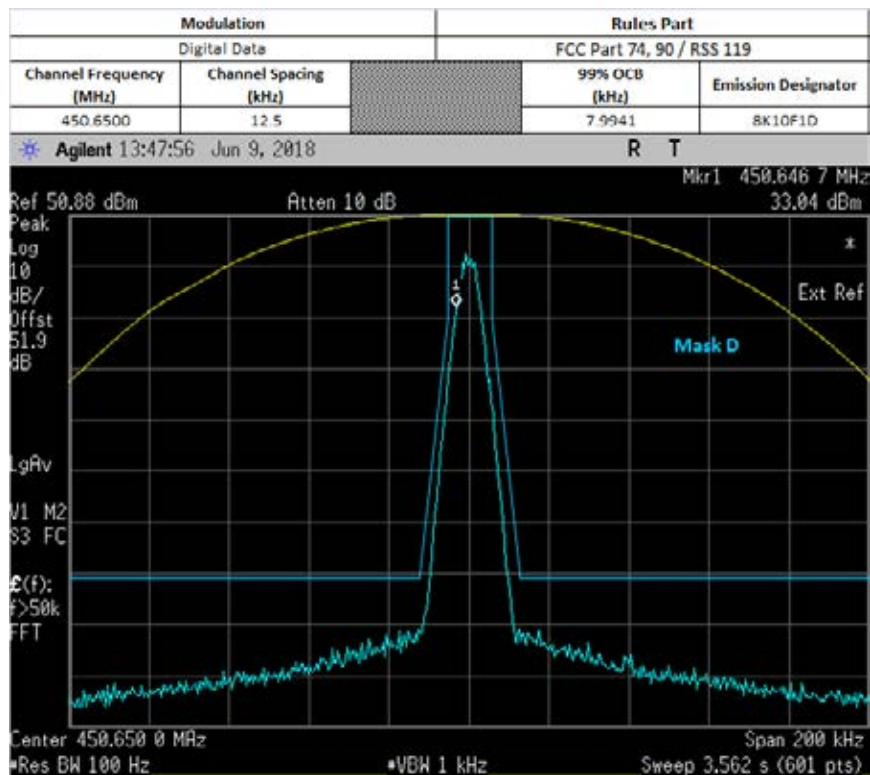
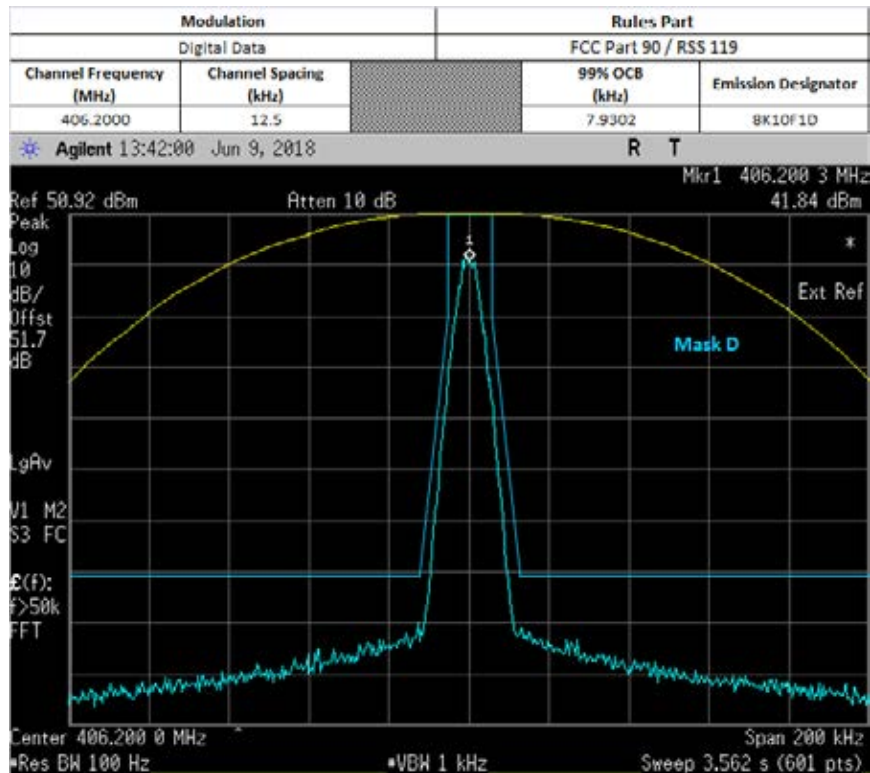


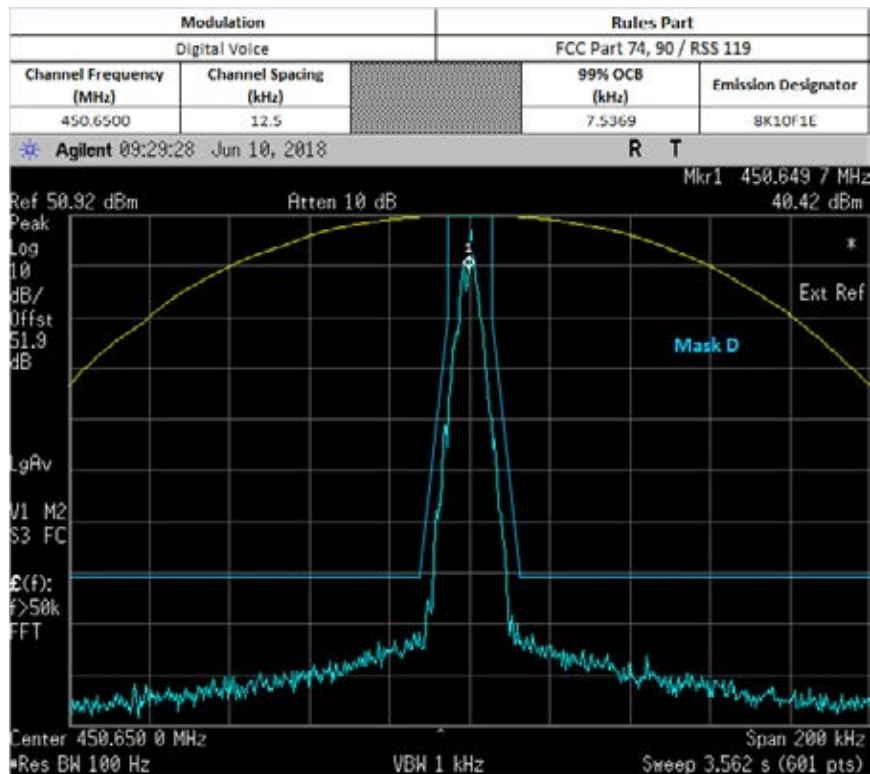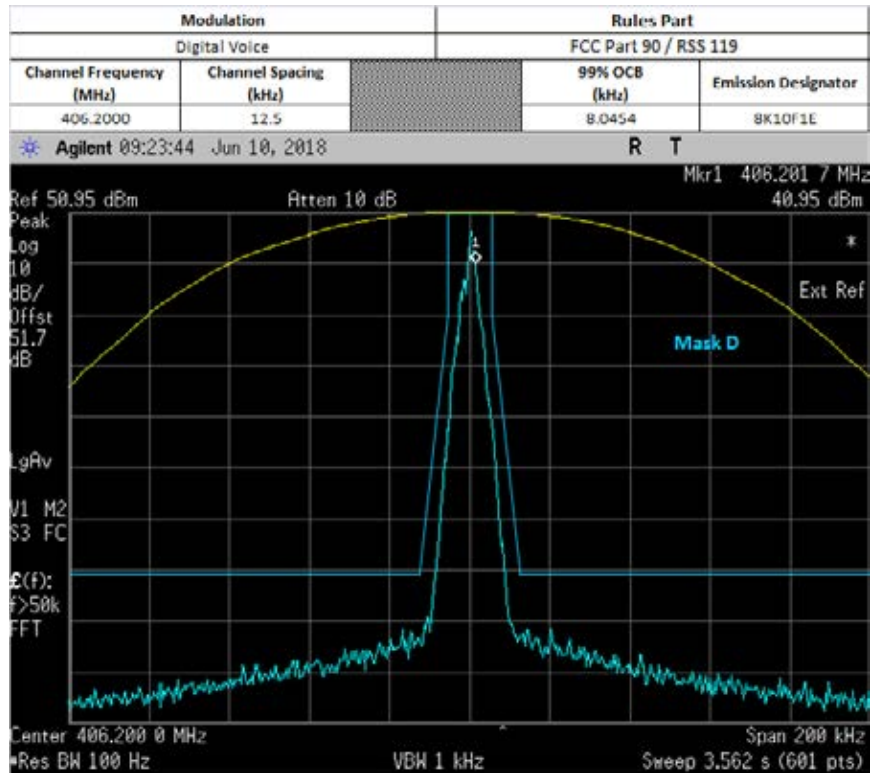

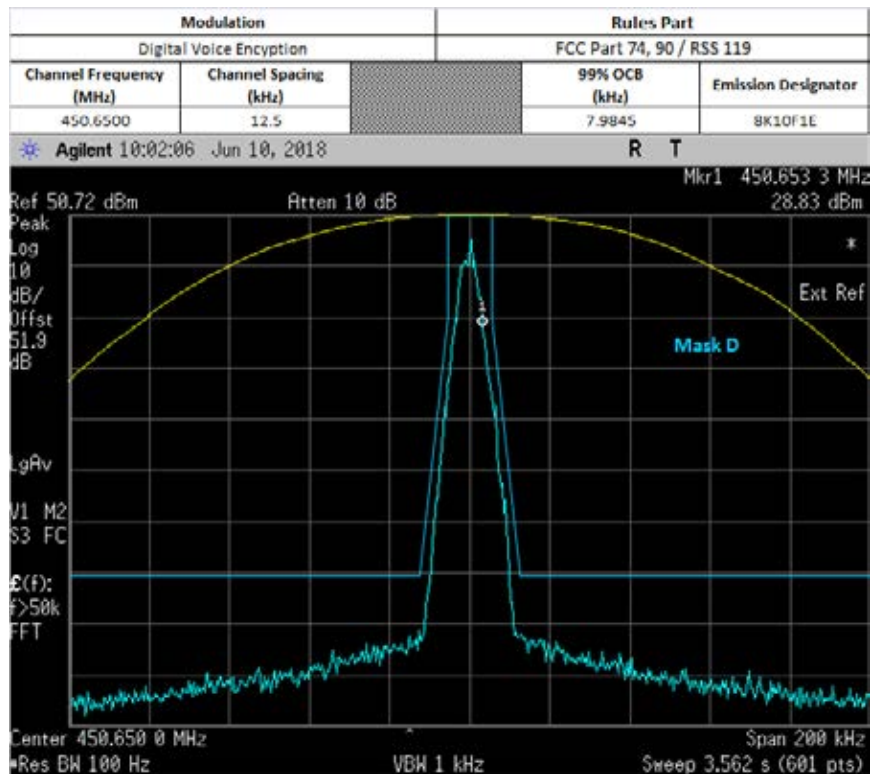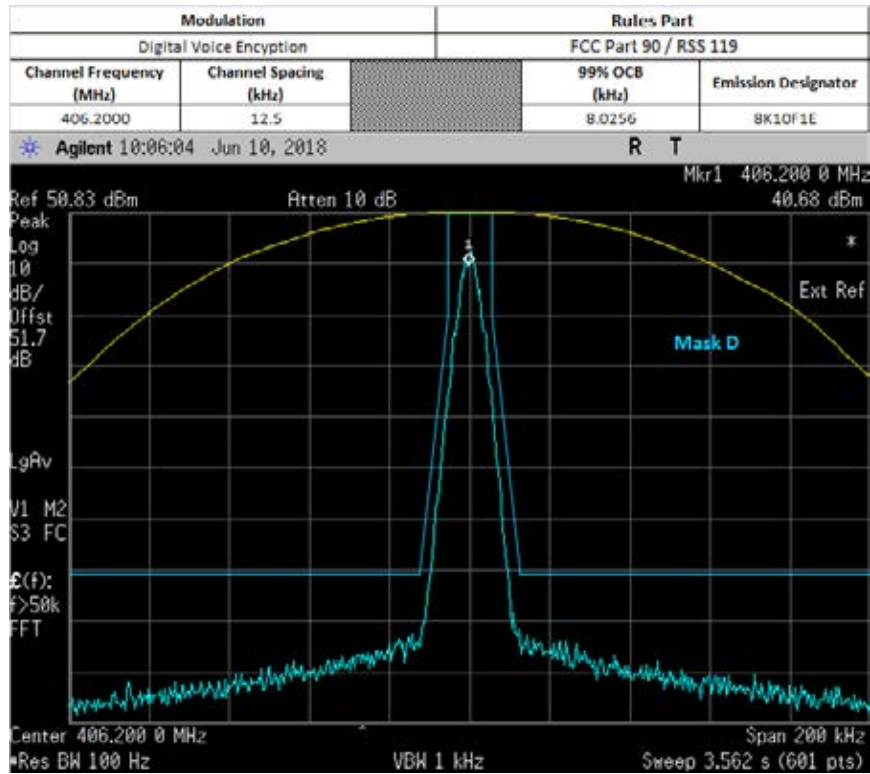

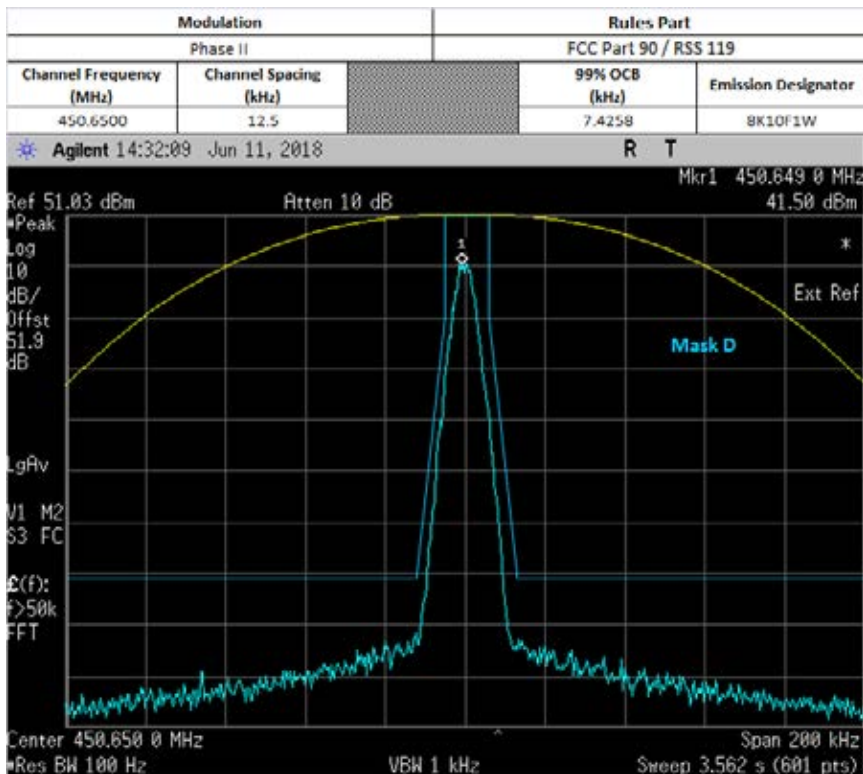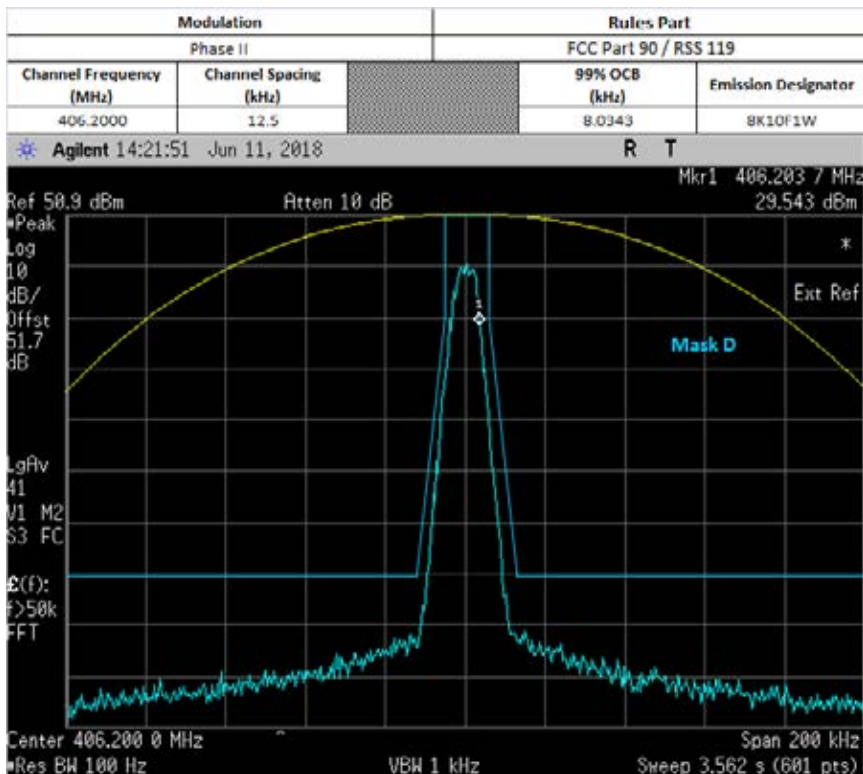

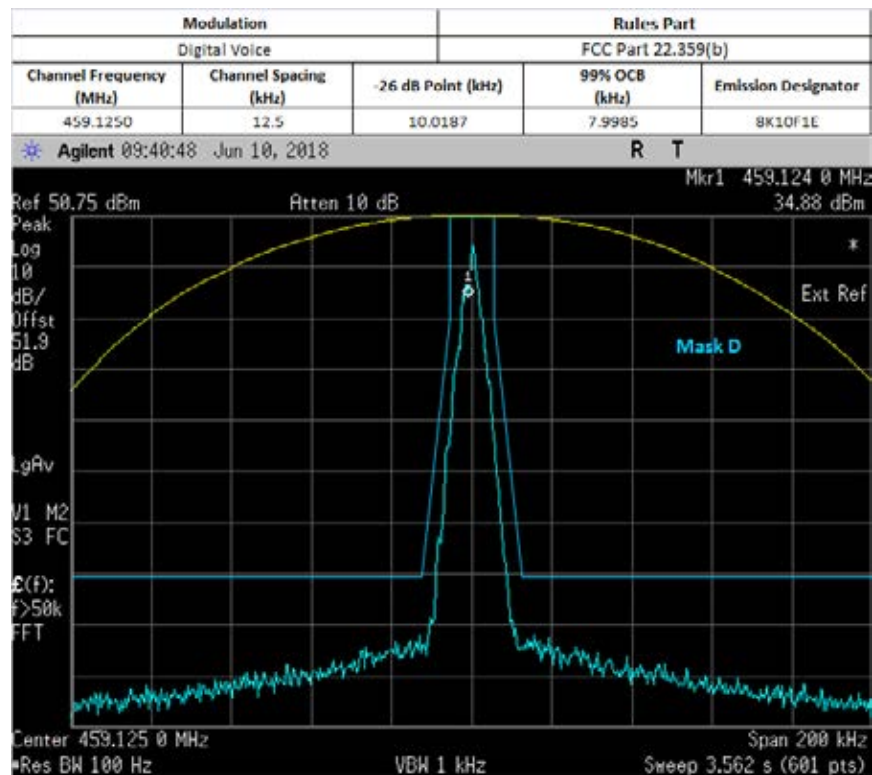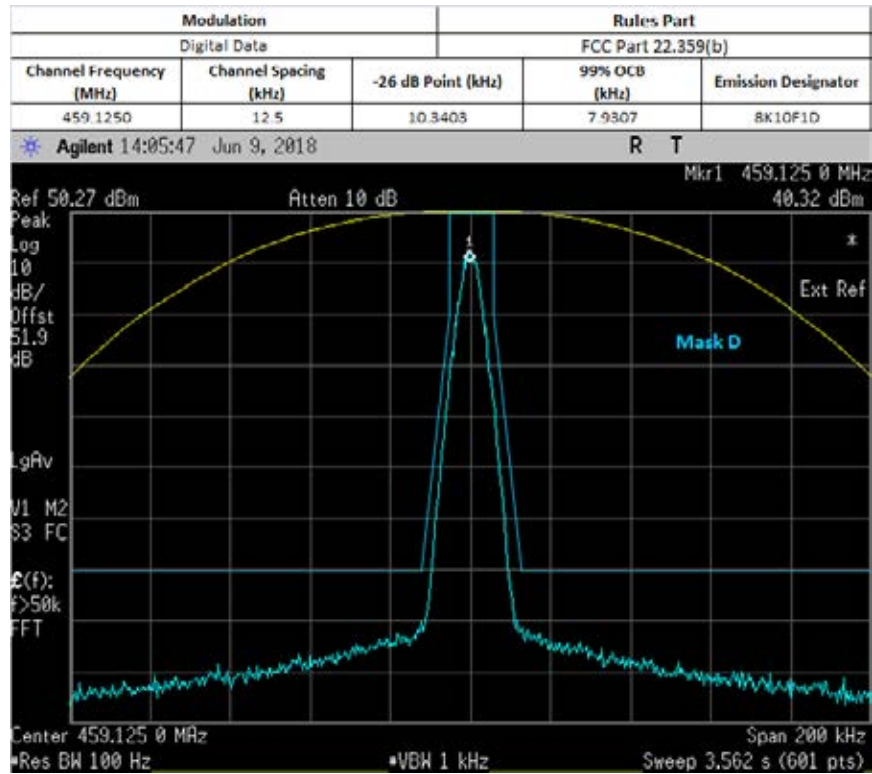

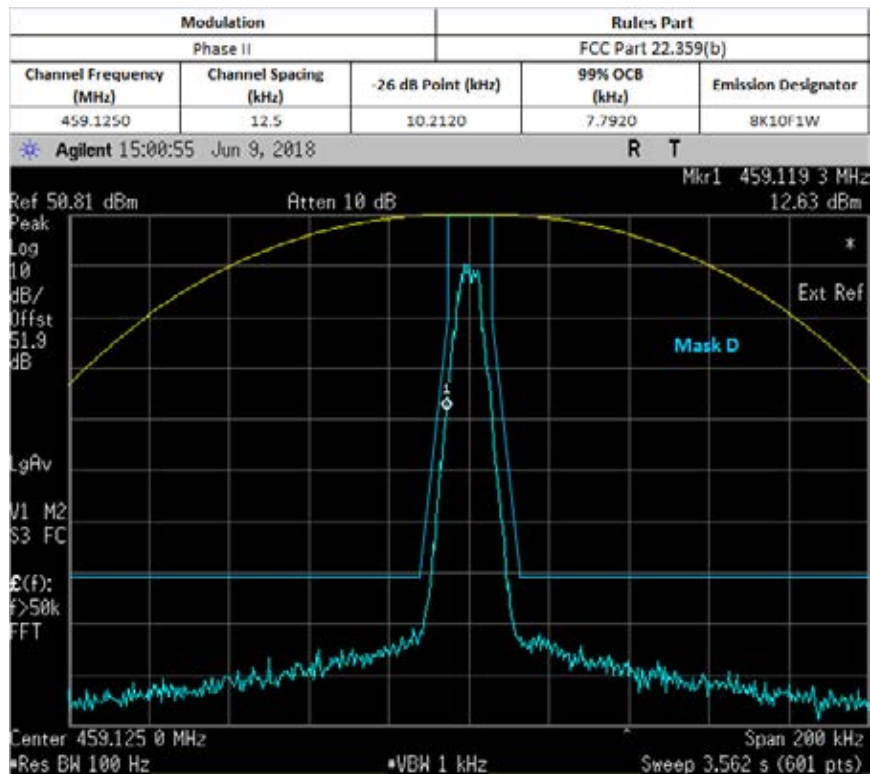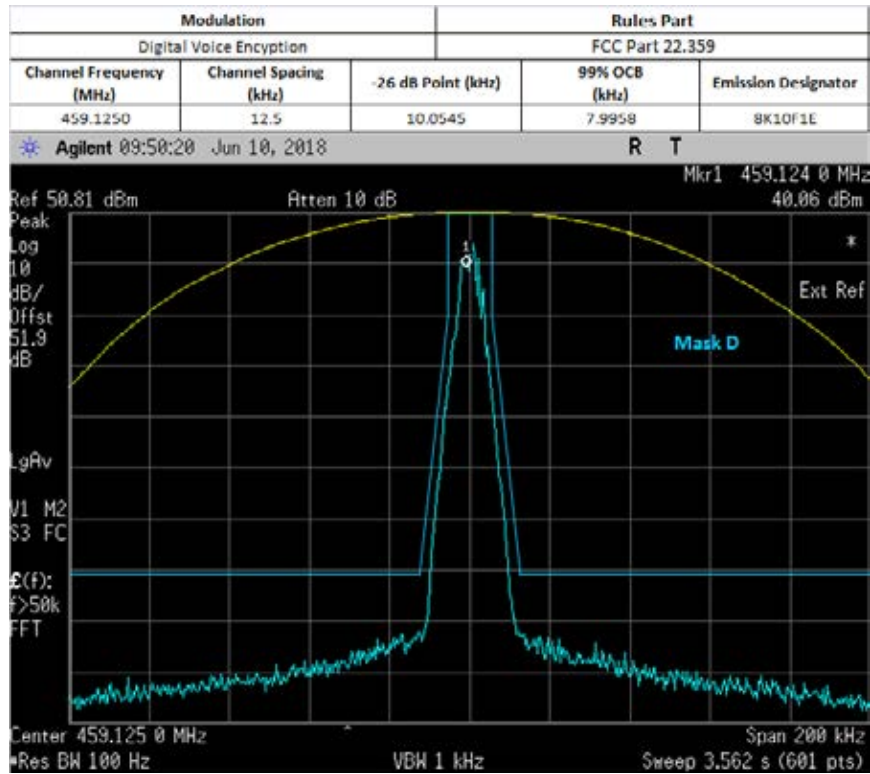


6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

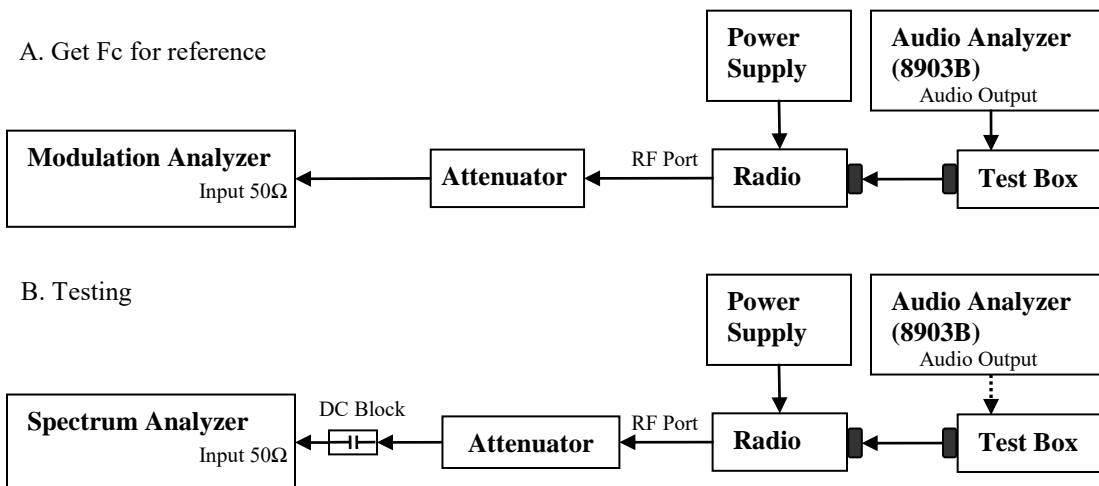



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:



- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.7.2. Test Result (Analog)


Max Power

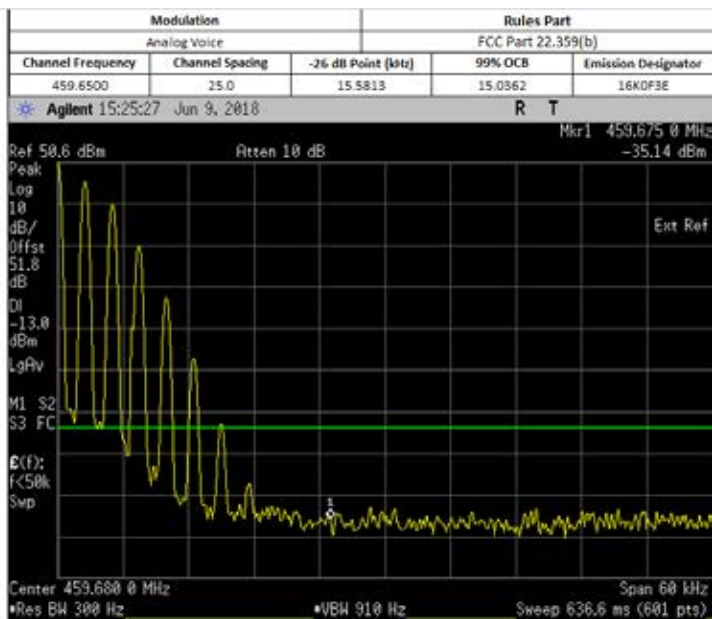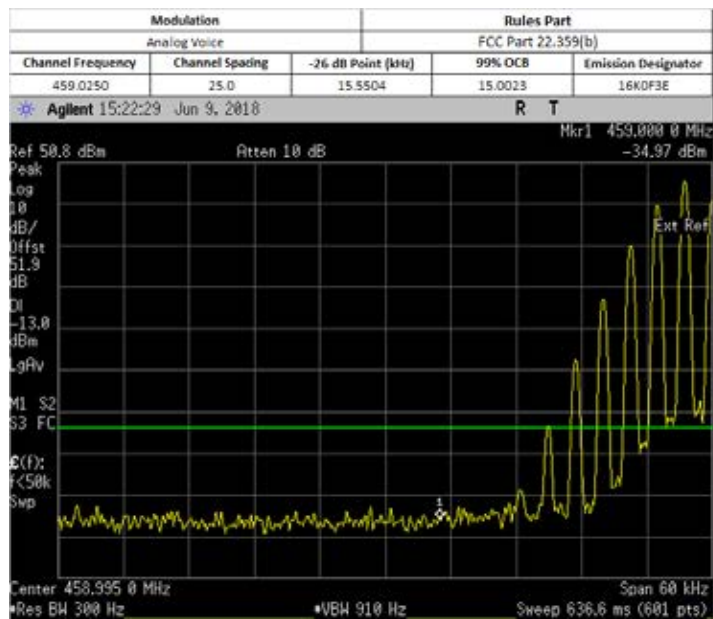

Low Power

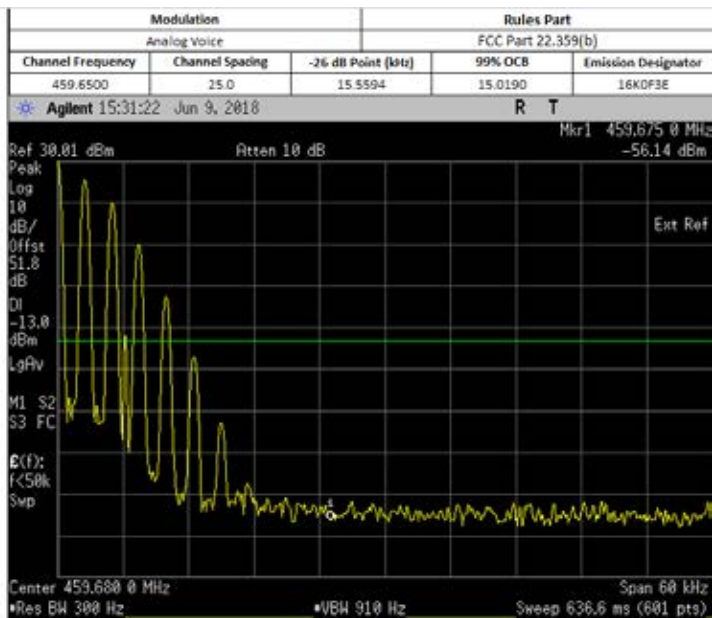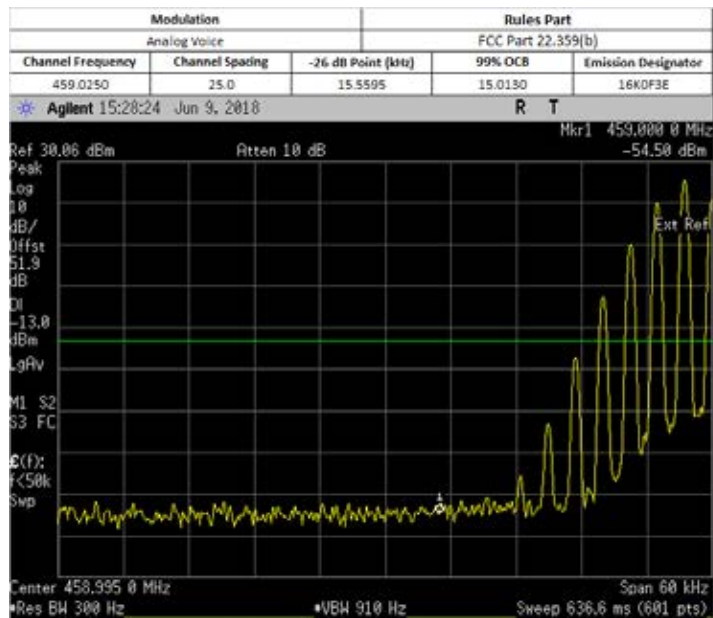

6.7.3. Test Setup (Digital)

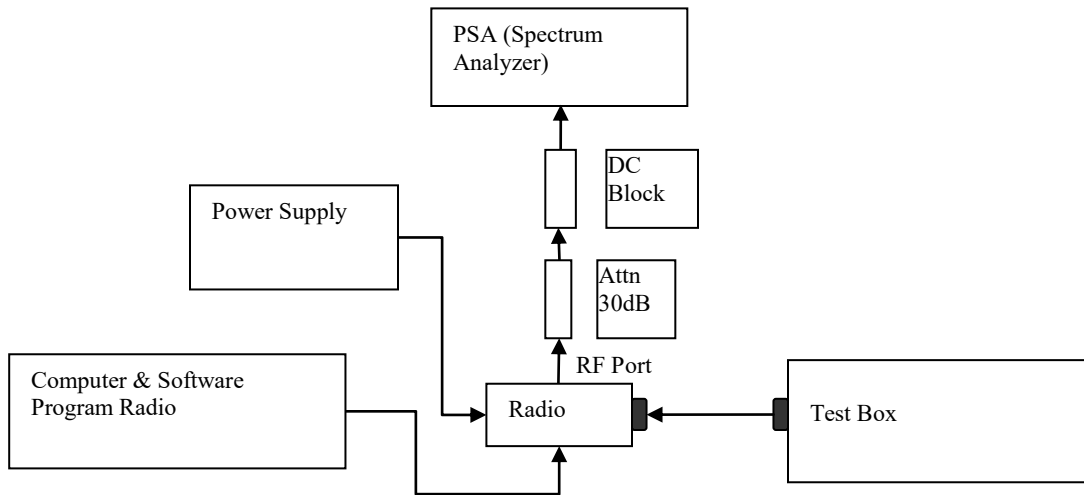



- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:



- For Digital Modulation, the same high deviation digital test pattern is used for F1E/D/W and they are therefore identical. Hence, only tests on two (digital steady state & Phase 2 TDMA) of the emissions designators will be shown

6.7.4. Test Result (Digital)



Max Power

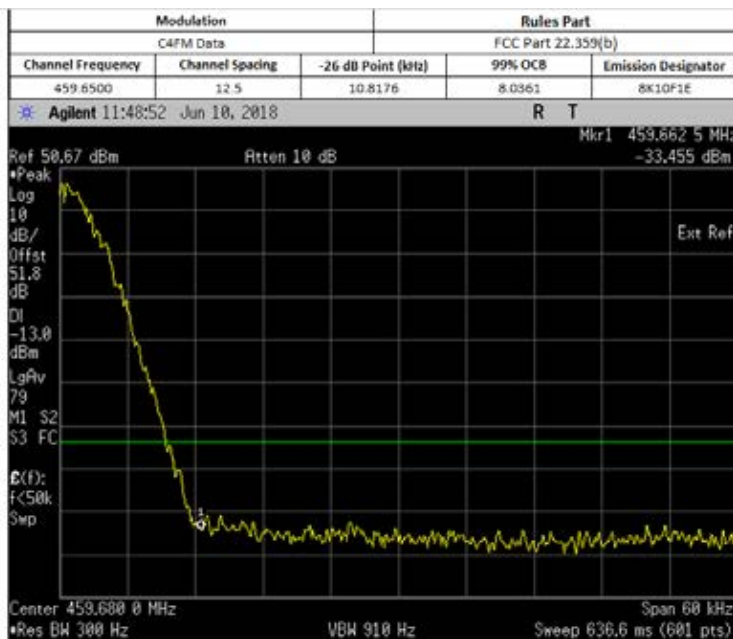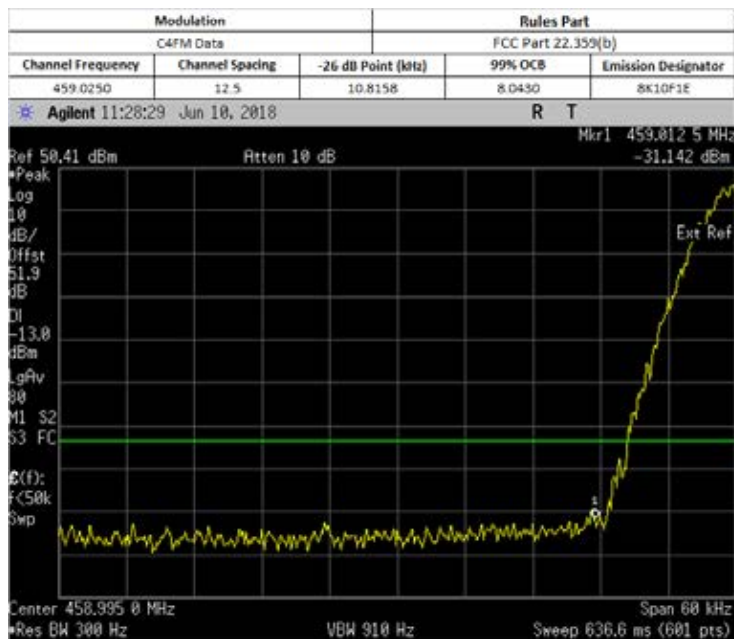



Low Power

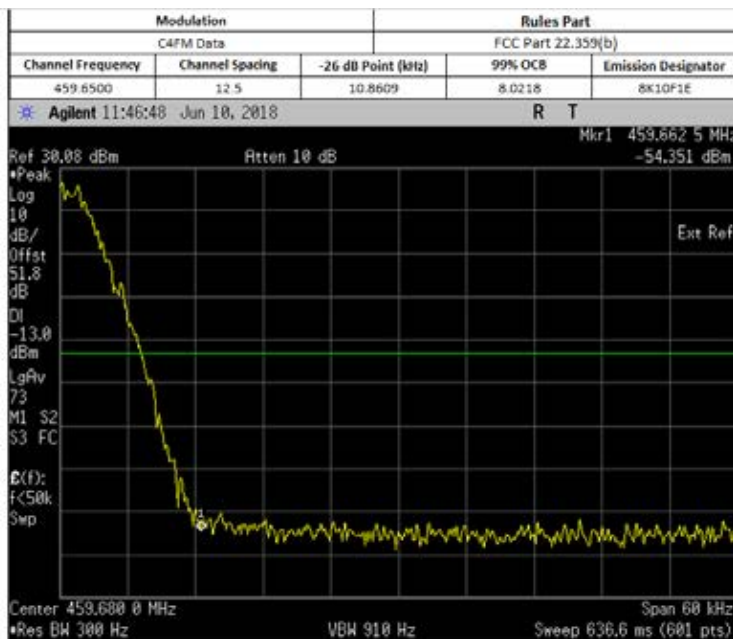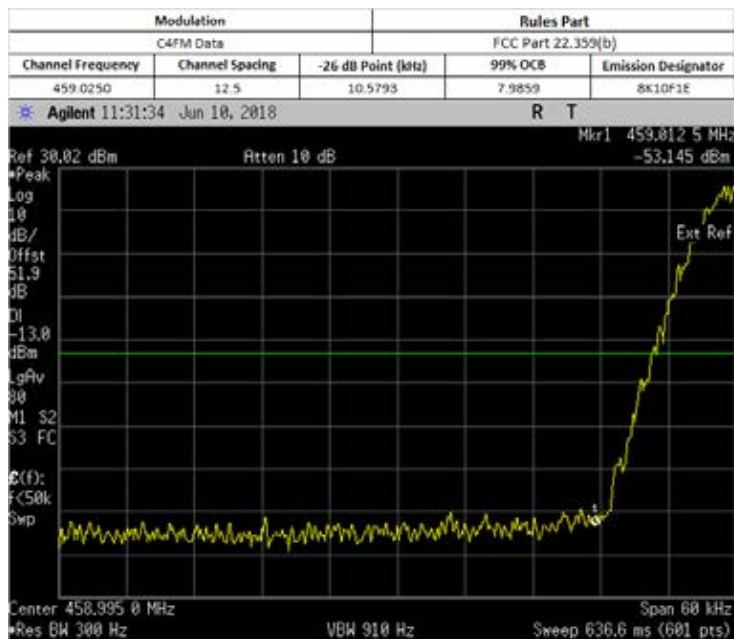

Max Power

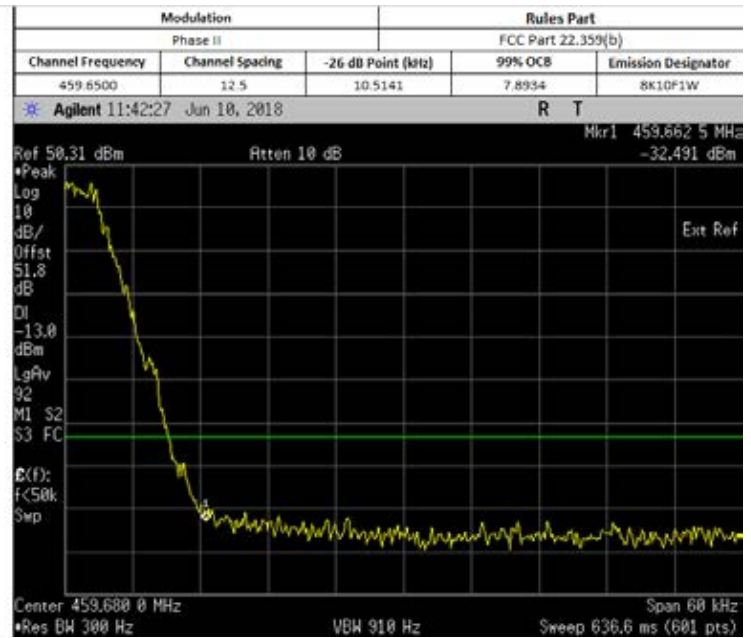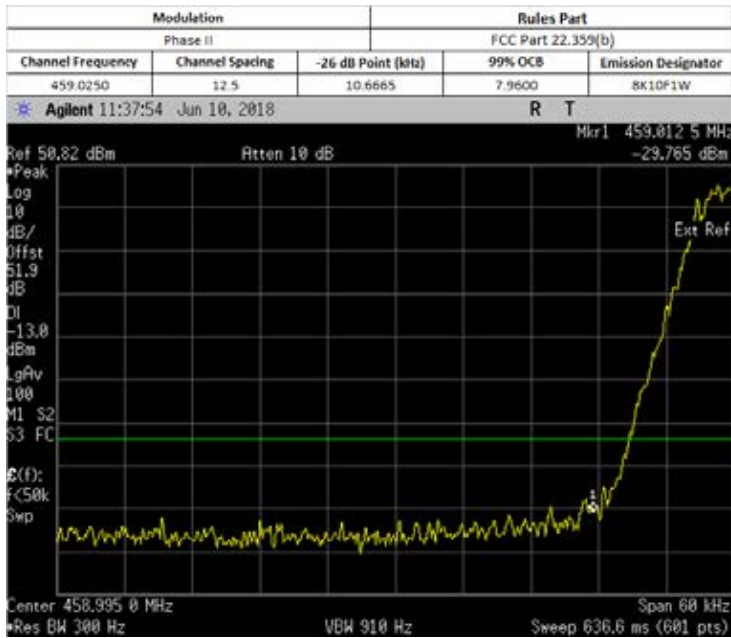

Low Power

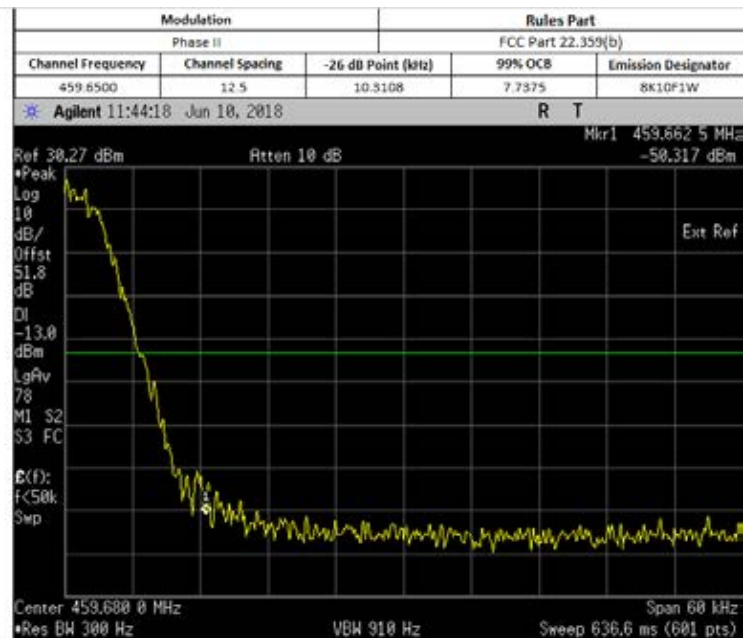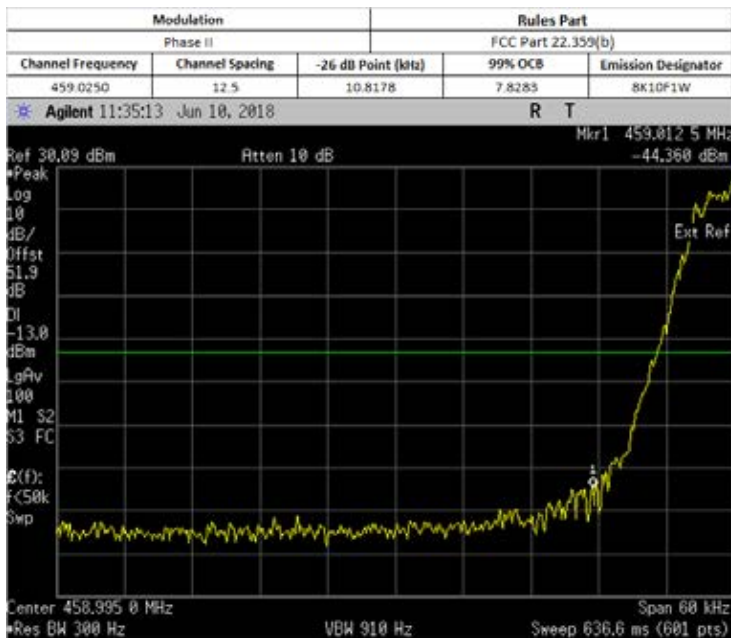


6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.



6.8. Transient Frequency Behavior



6.8.1. Test Setup


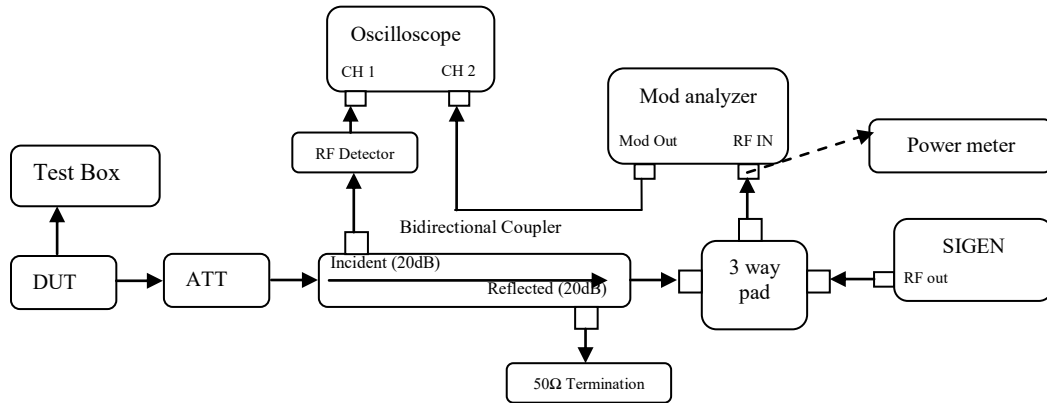


- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

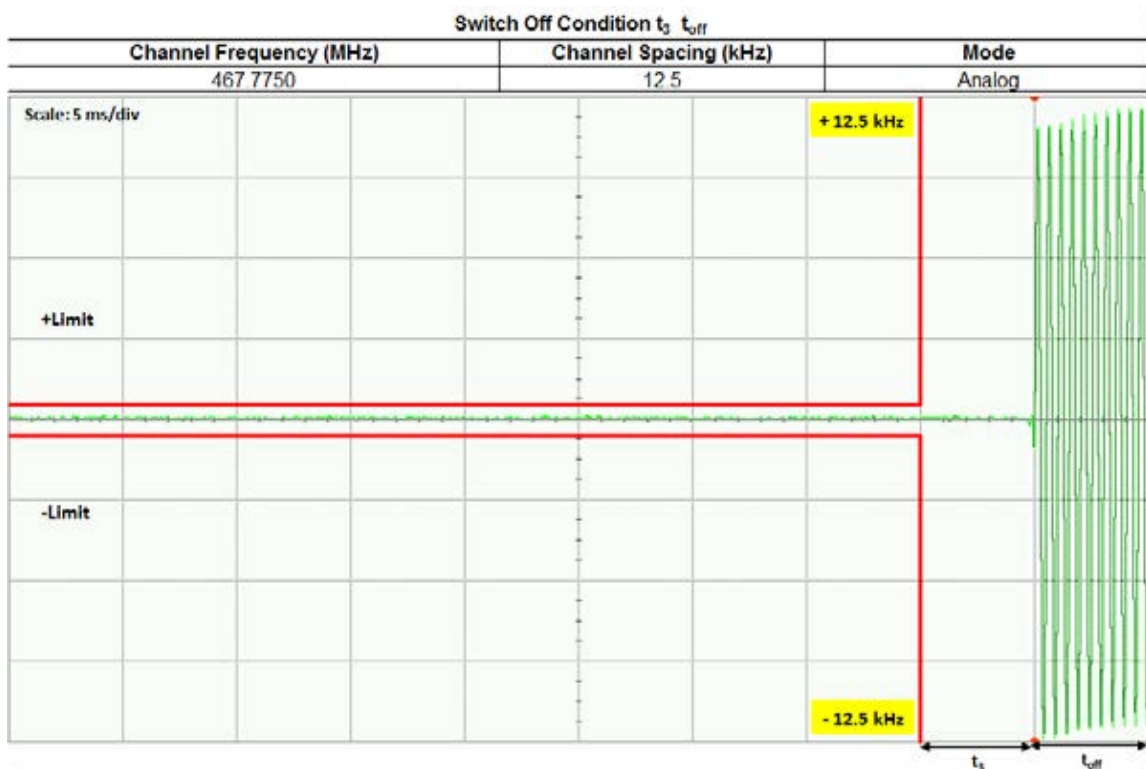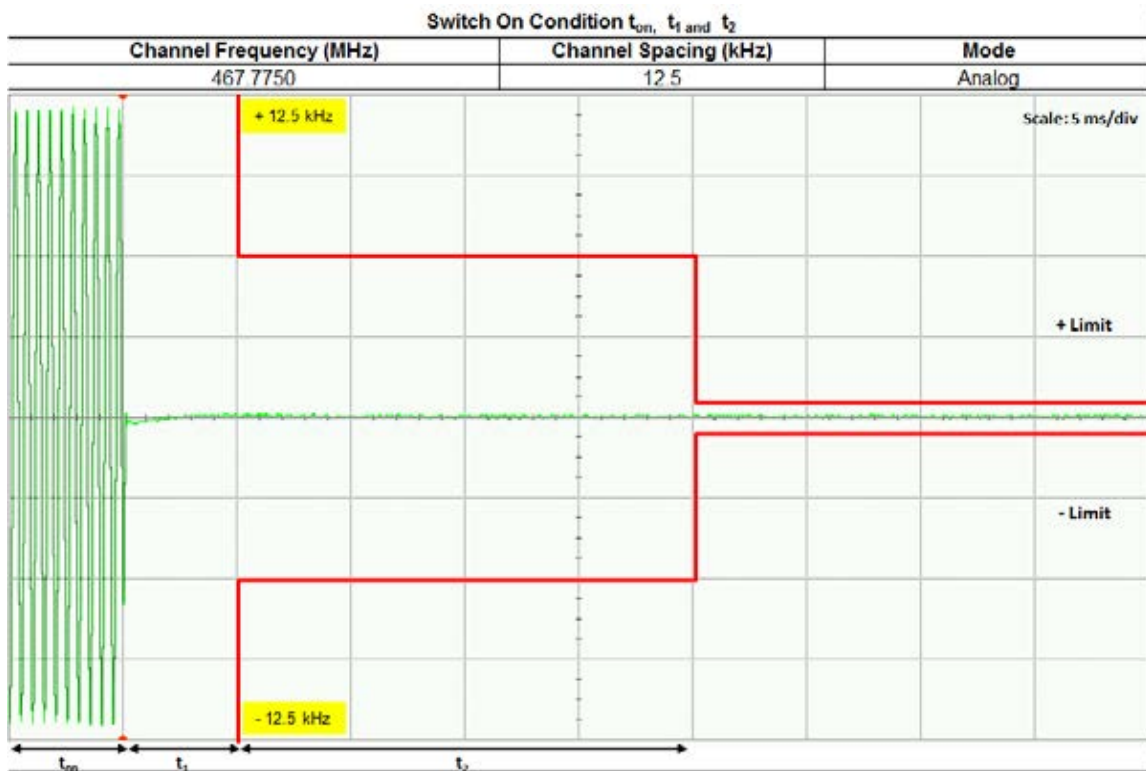

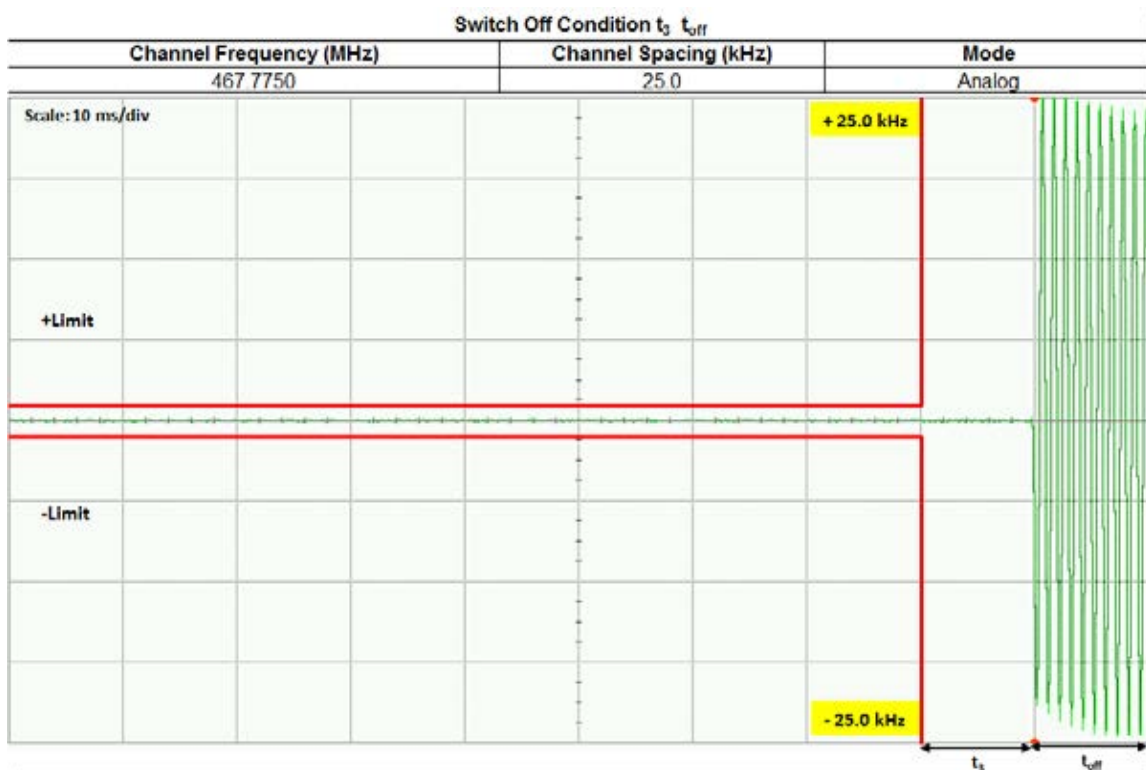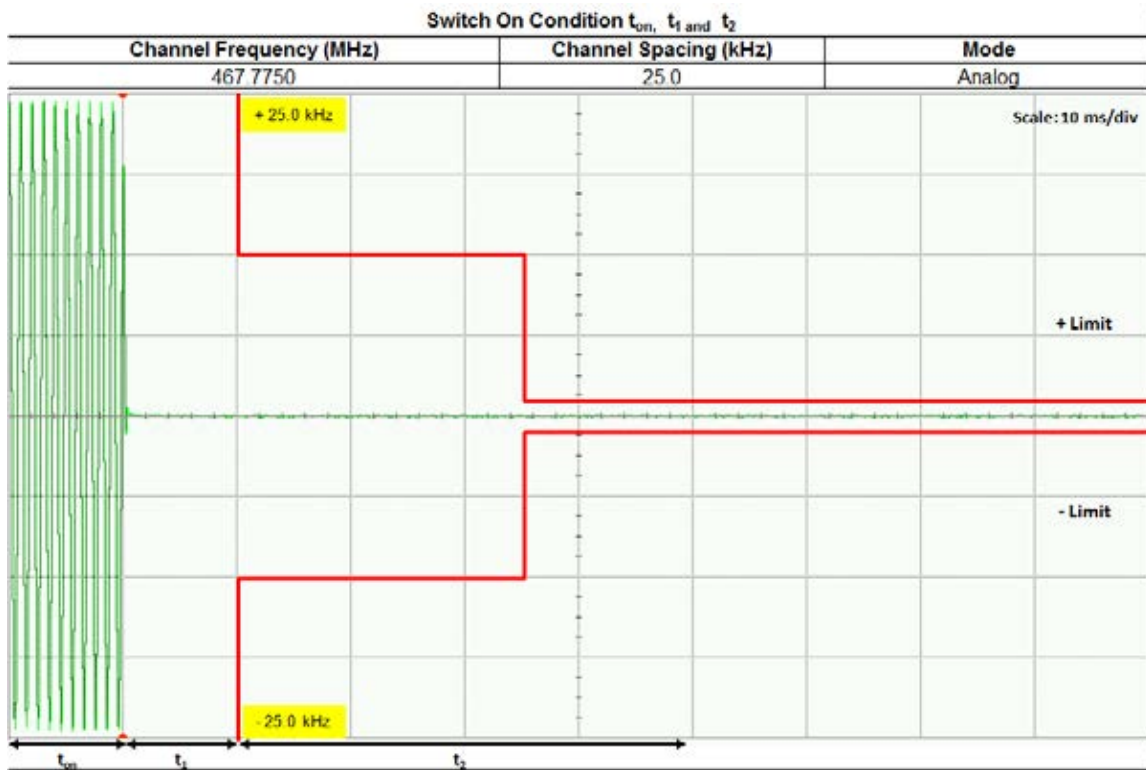

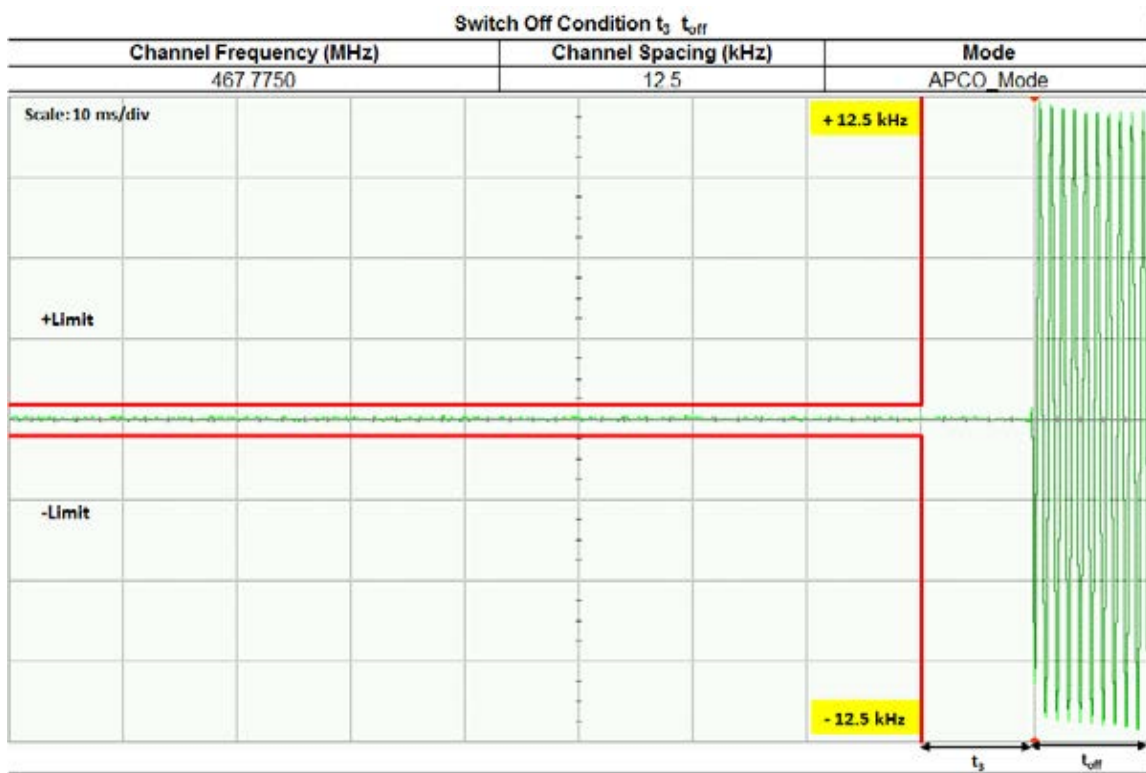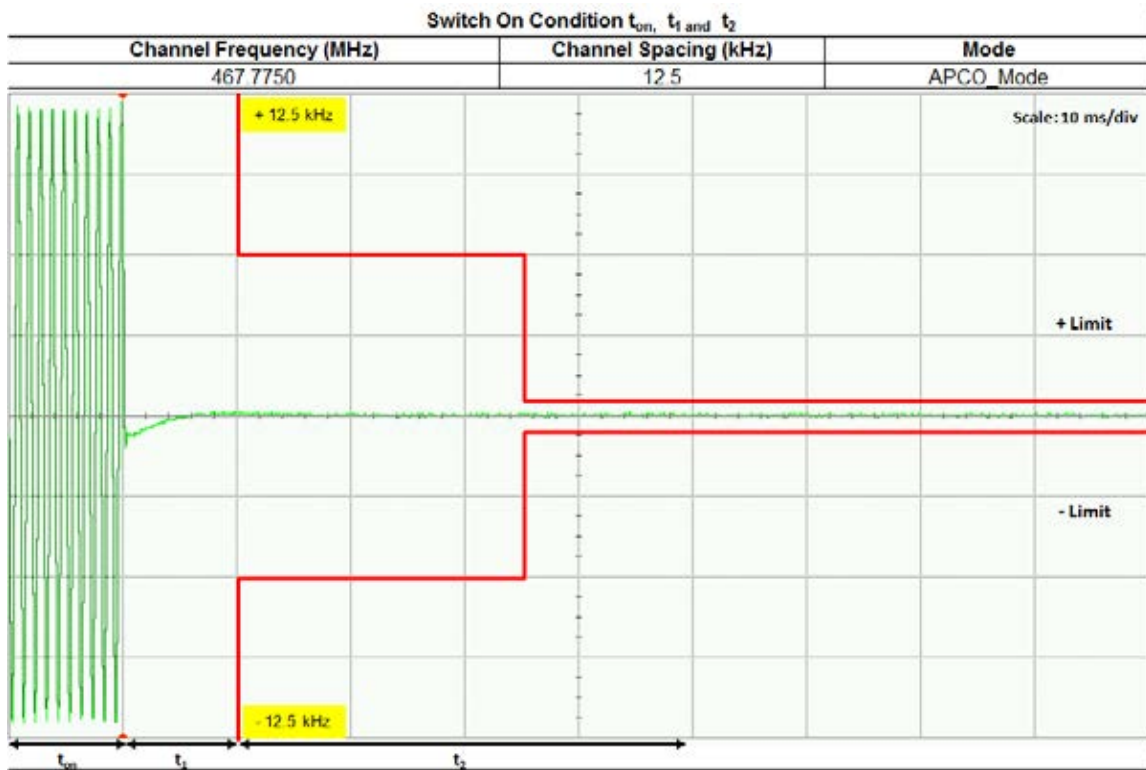

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ _{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

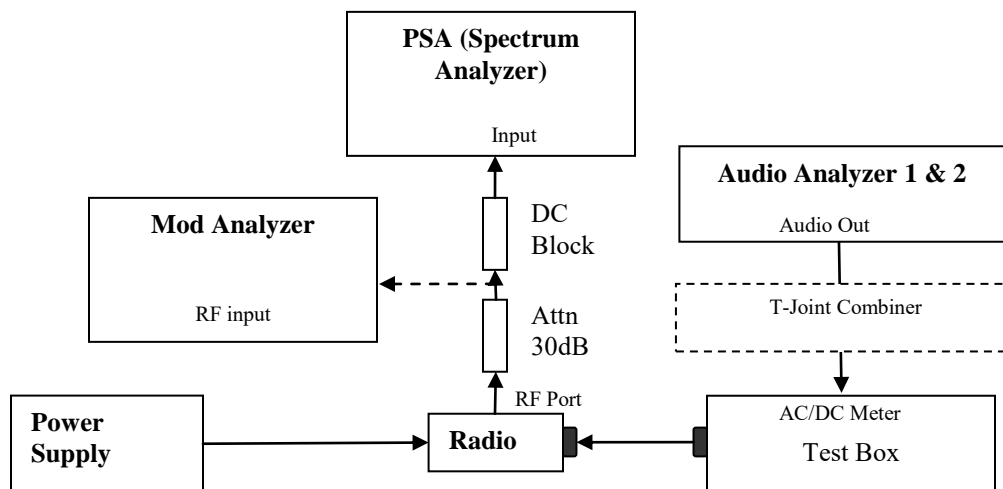


- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.2. Test Result

NA → Not Applicable

6.9.3. Test Setup (Digital)

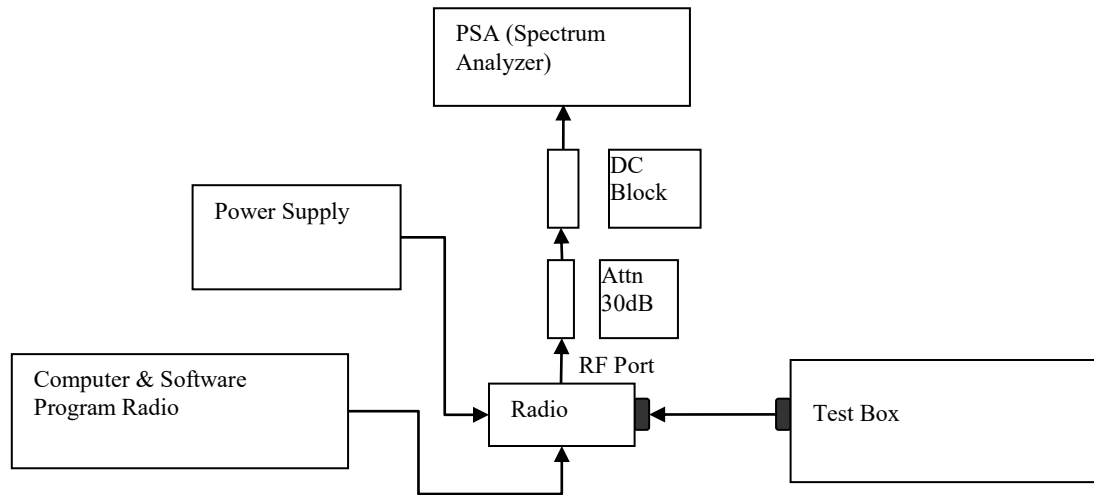

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.4. Test Result

NA → Not Applicable

Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	1-85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	1-85

6.10. Conducted Spurious Emission


6.10.1. Test Setup

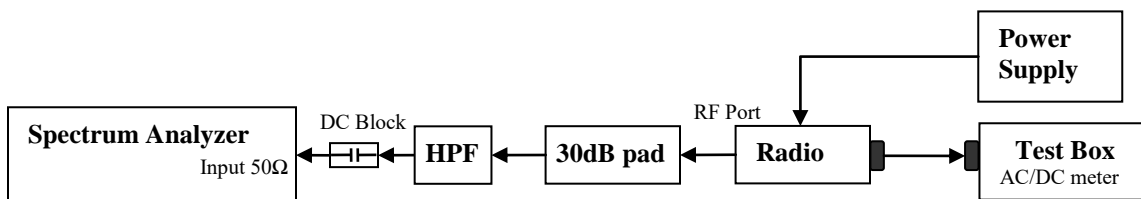

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.


6.10.2. Test Result (Analog)

Analog: 380.0125 MHz, 25.0kHz Channel Spacing, Max Power (Not For FCC Review)

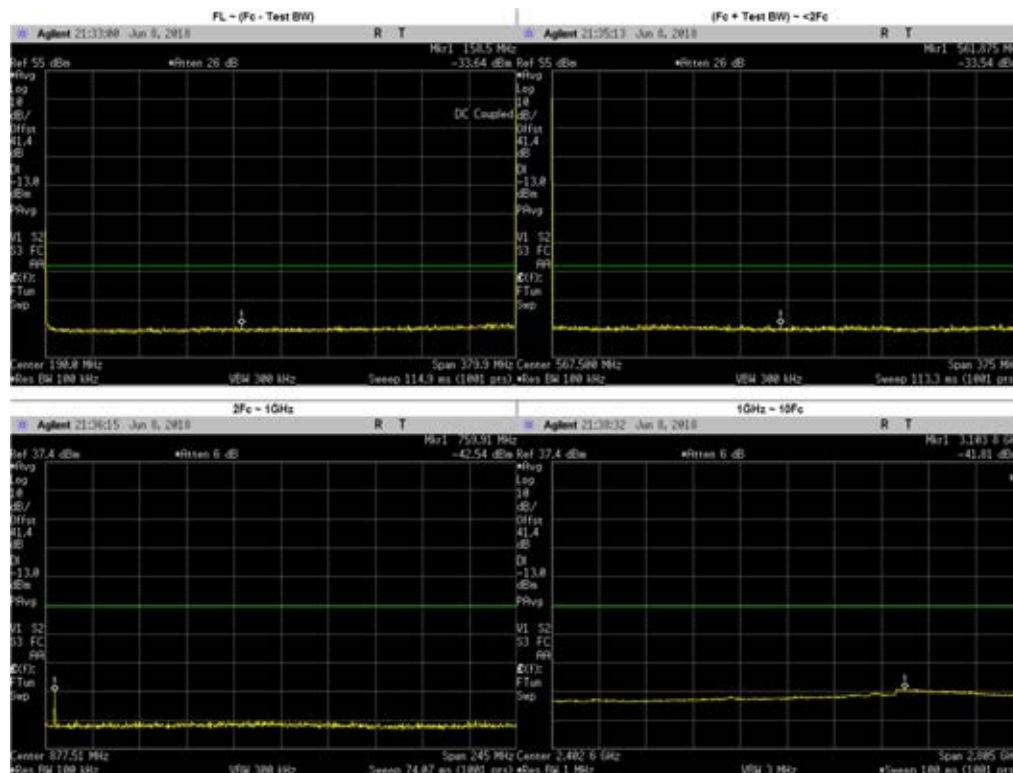


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	158.5000	-33.64	-13	PASS
(Fc + Test BW) ~ <2Fc	561.8750	-33.54	-13	PASS
2Fc ~ 1GHz	760.0250	-44.75	-13	PASS
	759.9100	-42.54	-13	PASS
1GHz ~ 10Fc	1520.0500	-45.42	-13	PASS
	1900.0620	-45.21	-13	PASS
	2280.0750	-45.26	-13	PASS
	2660.0880	-44.39	-13	PASS
	3040.1000	-43.35	-13	PASS
	3420.1130	-43.53	-13	PASS
	3800.1250	-43.52	-13	PASS
	1140.0370	-43.88	-13	PASS
	3103.8000	-41.81	-13	PASS

Analog: 380.0125 MHz, 25.0kHz Channel Spacing, Low Power
(Not For FCC Review)

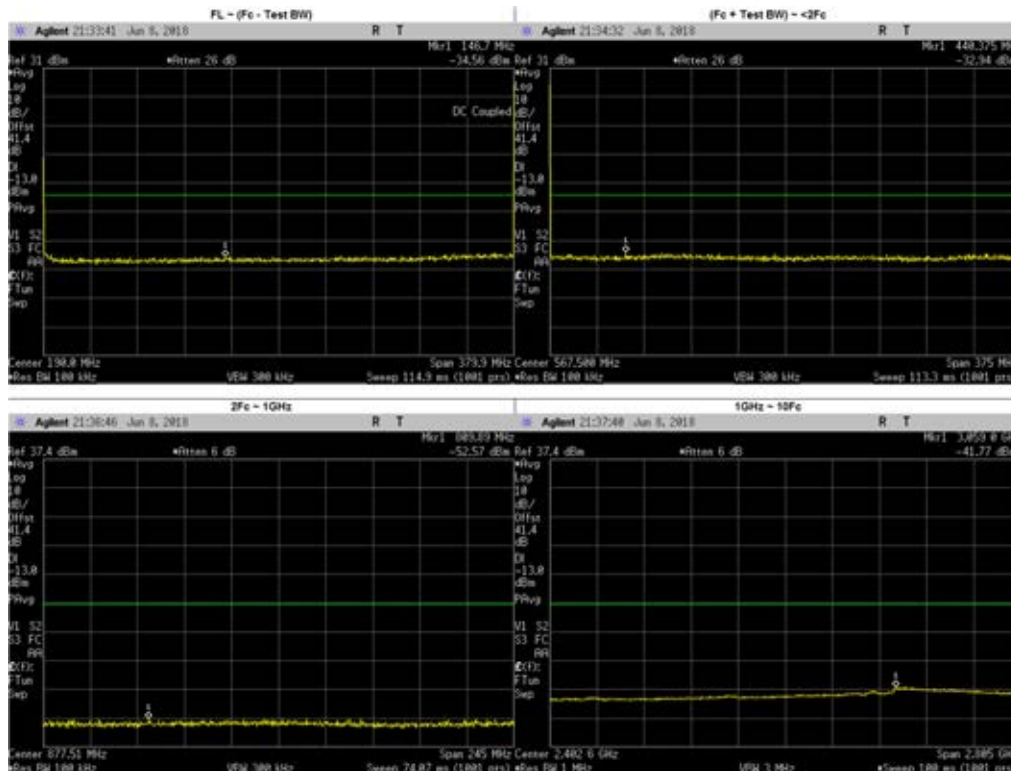


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	146.7000	-34.56	-13	PASS
(Fc + Test BW) ~ <2Fc	440.3750	-32.94	-13	PASS
2Fc ~ 1GHz	760.0250	-53.23	-13	PASS
	809.8900	-52.57	-13	PASS
1GHz ~ 10Fc	1140.0370	-45.88	-13	PASS
	1520.0500	-45.59	-13	PASS
	1900.0620	-45.08	-13	PASS
	2280.0750	-44.89	-13	PASS
	2660.0880	-44.03	-13	PASS
	3040.1000	-43.32	-13	PASS
	3420.1130	-42.50	-13	PASS
	3800.1250	-43.38	-13	PASS
	3059.0000	-41.77	-13	PASS

Analog: 406.2 MHz, 25.0kHz Channel Spacing, Max Power
(Not For FCC Review), RSS 119

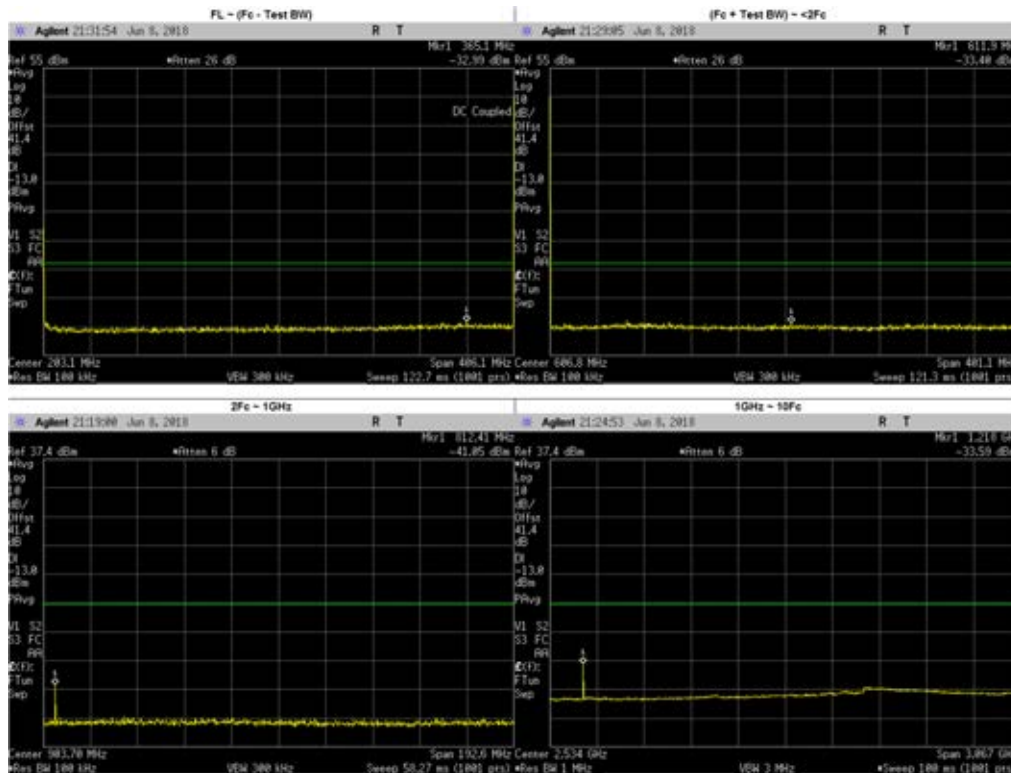


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	365.1000	-32.99	-13	PASS
(Fc + Test BW) ~ <2Fc	611.9000	-33.40	-13	PASS
2Fc ~ 1GHz	812.4100	-41.05	-13	PASS
1GHz ~ 10Fc	1624.8000	-45.99	-13	PASS
	2031.0000	-45.05	-13	PASS
	2437.2000	-43.72	-13	PASS
	3249.6000	-45.11	-13	PASS
	3655.8000	-46.81	-13	PASS
	4062.0000	46.55	-13	PASS
	2843.4000	-43.88	-13	PASS
	1218.0000	-33.59	-13	PASS

**Analog: 406.2 MHz, 12.5kHz Channel Spacing, Low Power
 (Not For FCC Review), RSS 119**

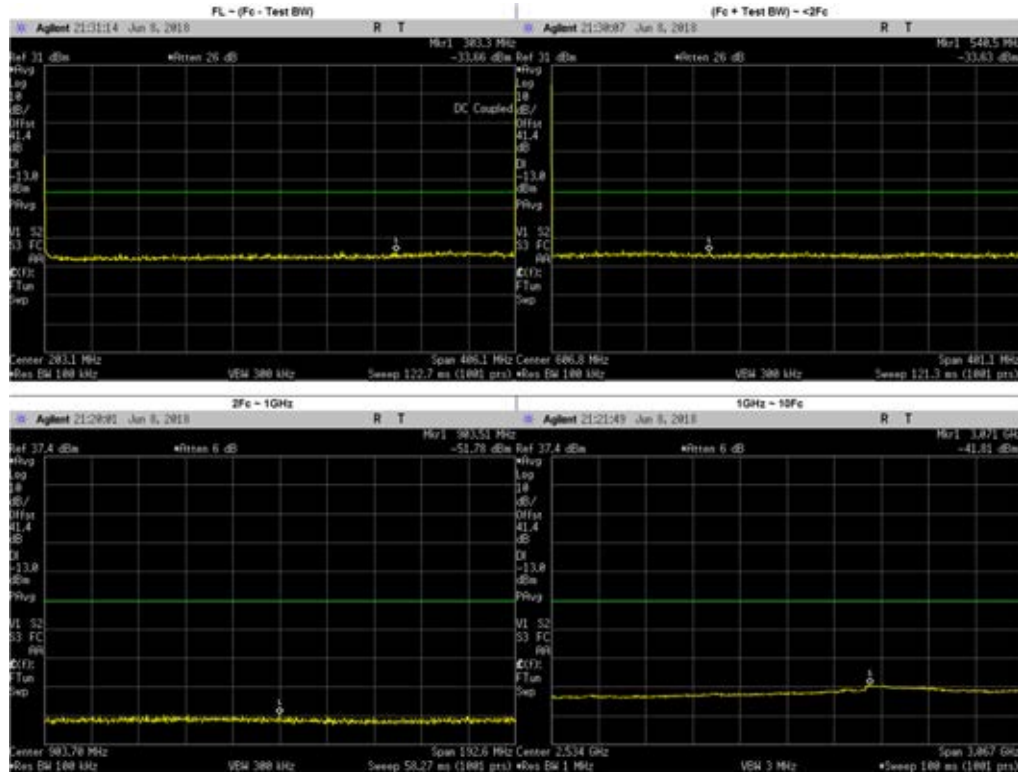


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	303.3000	-33.66	-13	PASS
(Fc + Test BW) ~ <2Fc	540.5000	-33.63	-13	PASS
2Fc ~ 1GHz	812.4000	-54.35	-13	PASS
	903.5100	-51.78	-13	PASS
1GHz ~ 10Fc	1218.6000	-45.94	-13	PASS
	1624.8000	-45.10	-13	PASS
	2031.0000	-44.77	-13	PASS
	2437.2000	-44.31	-13	PASS
	2843.4000	-43.32	-13	PASS
	3249.6000	-42.13	-13	PASS
	3655.8000	-43.56	-13	PASS
	4062.0000	-42.21	-13	PASS
	3071.0000	-41.81	-13	PASS

**Analog: 450.65 MHz, 25.0kHz Channel Spacing, Max Power
 FCC Part 74, RSS 119**

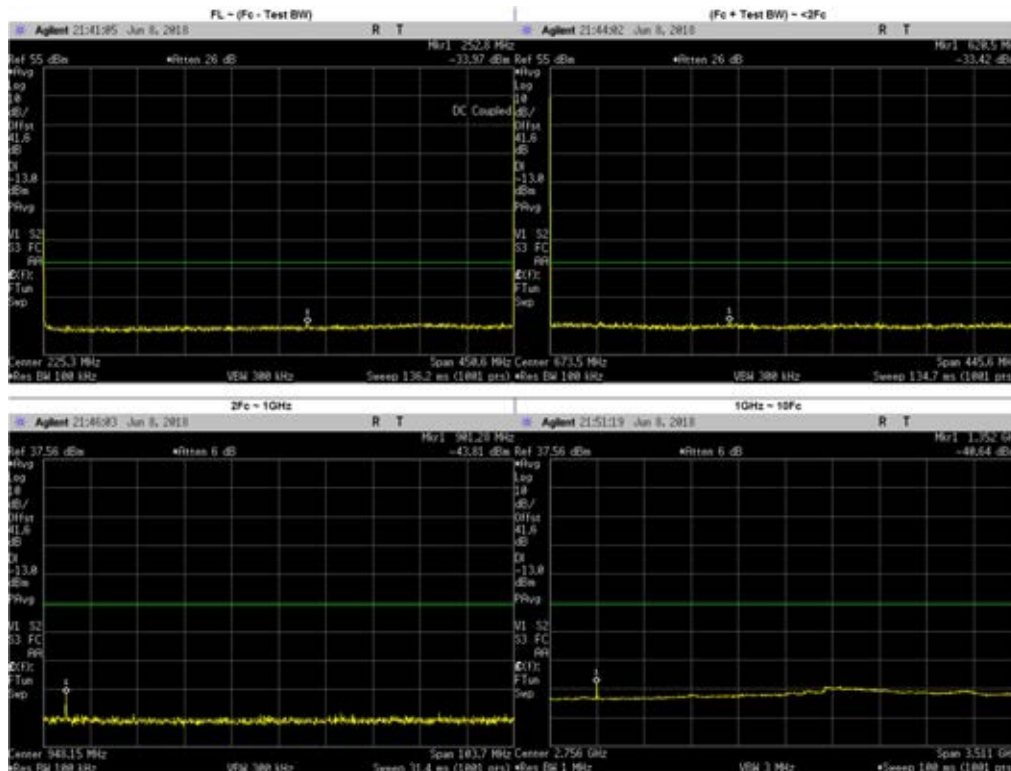


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	252.8000	-33.97	-13	PASS
(Fc + Test BW) ~ <2Fc	620.5000	-33.42	-13	PASS
2Fc ~ 1GHz	901.2800	-43.81	-13	PASS
1GHz ~ 10Fc	1352.0000	-40.64	-13	PASS
	1802.6000	-45.65	-13	PASS
	2253.2500	-45.04	-13	PASS
	2703.9000	-43.94	-13	PASS
	3154.5500	-42.56	-13	PASS
	3605.2000	-42.88	-13	PASS
	4055.8500	-48.39	-13	PASS
	4506.5000	-44.08	-13	PASS

**Analog: 450.65 MHz, 12.5kHz Channel Spacing, Low Power
 FCC Part 74, RSS 119**

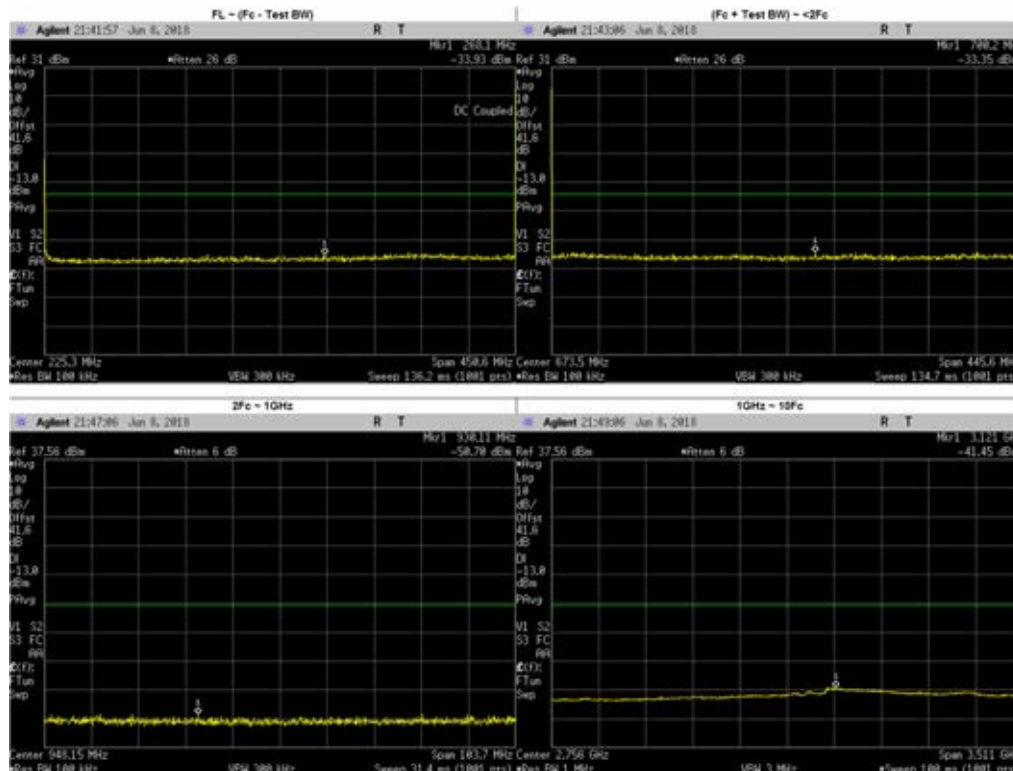


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	268.1000	-33.93	-13	PASS
(Fc + Test BW) ~ <2Fc	700.2000	-33.35	-13	PASS
2Fc ~ 1GHz	930.1100	-50.70	-13	PASS
1GHz ~ 10Fc	1351.9500	-45.69	-13	PASS
	1802.6000	-45.48	-13	PASS
	2253.2500	-45.18	-13	PASS
	2703.9000	-44.28	-13	PASS
	3154.5500	-41.59	-13	PASS
	3605.2000	-43.04	-13	PASS
	4055.8500	-42.91	-13	PASS
	4506.5000	-44.14	-13	PASS
	3121.0000	-41.45	-13	PASS

**Analog: 459.125 MHz, 25.0kHz Channel Spacing, Max Power
 FCC Part 22**

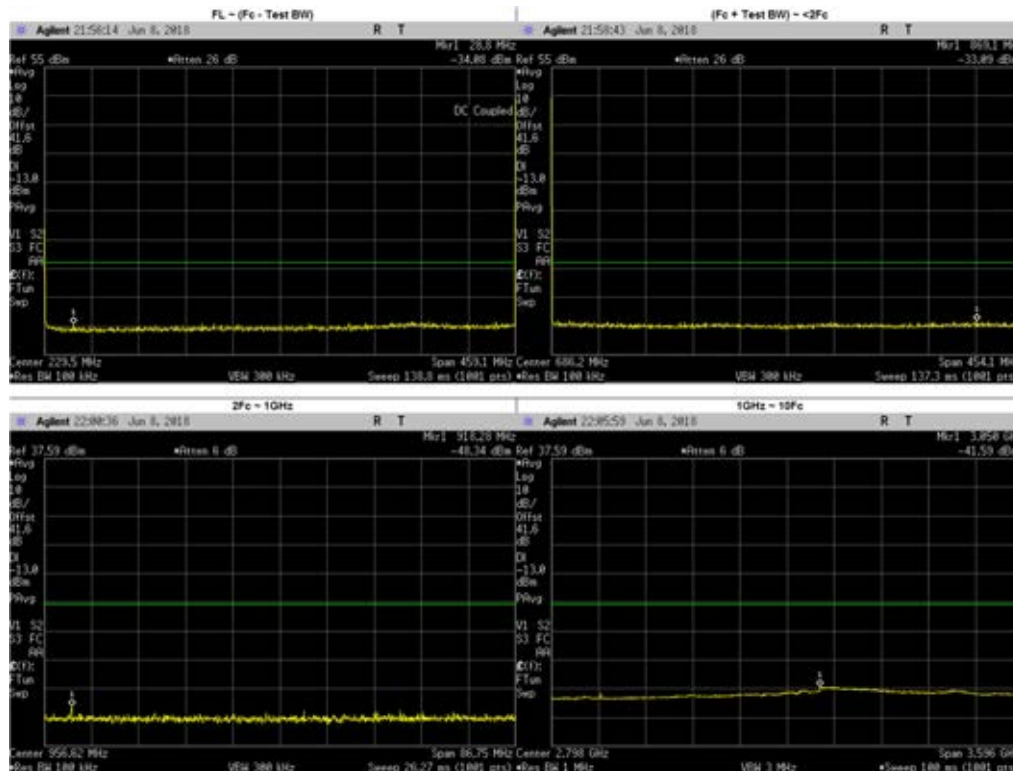


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	28.8000	-34.08	-13	PASS
(Fc + Test BW) ~ <2Fc	869.1000	-33.09	-13	PASS
2Fc ~ 1GHz	918.2800	-48.34	-13	PASS
1GHz ~ 10Fc	1377.3750	-43.89	-13	PASS
	1836.5000	-45.26	-13	PASS
	2295.6250	-42.77	-13	PASS
	2754.7500	-43.64	-13	PASS
	3213.8750	-42.31	-13	PASS
	3673.0000	-43.96	-13	PASS
	4132.1250	-43.96	-13	PASS
	4591.2500	-44.57	-13	PASS
	3050.0000	-41.59	-13	PASS

**Analog: 459.125 MHz, 25.0kHz Channel Spacing, Low Power
 FCC Part 22**

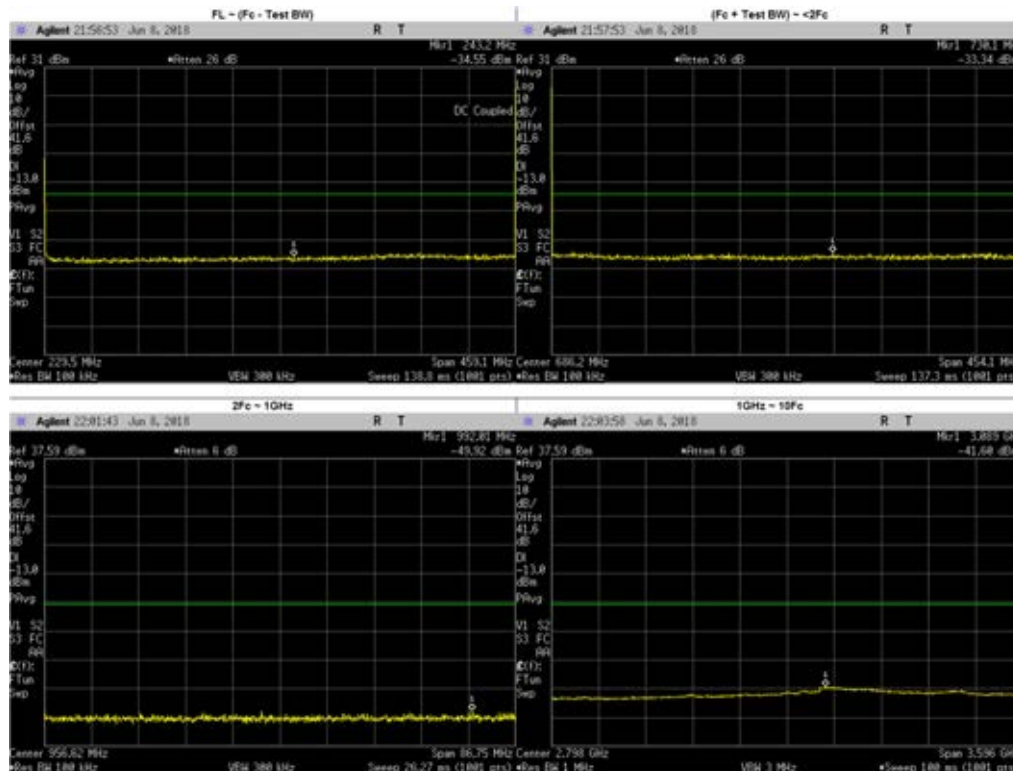


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	243.2000	-34.55	-13	PASS
(Fc + Test BW) ~ <2Fc	730.1000	-33.34	-13	PASS
2Fc ~ 1GHz	918.2500	-52.98	-13	PASS
	992.0100	-49.92	-13	PASS
1GHz ~ 10Fc	1377.3750	-45.74	-13	PASS
	1836.5000	-45.40	-13	PASS
	2295.6250	-44.68	-13	PASS
	2754.7500	-44.04	-13	PASS
	3213.8750	-42.07	-13	PASS
	3673.0000	-43.61	-13	PASS
	4132.1250	-43.27	-13	PASS
	4591.2500	-44.55	-13	PASS
	3089.0000	-41.60	-13	PASS

**Analog: 467.775 MHz, 25.0kHz Channel Spacing, Max Power
 FCC Part 80, RSS 119**

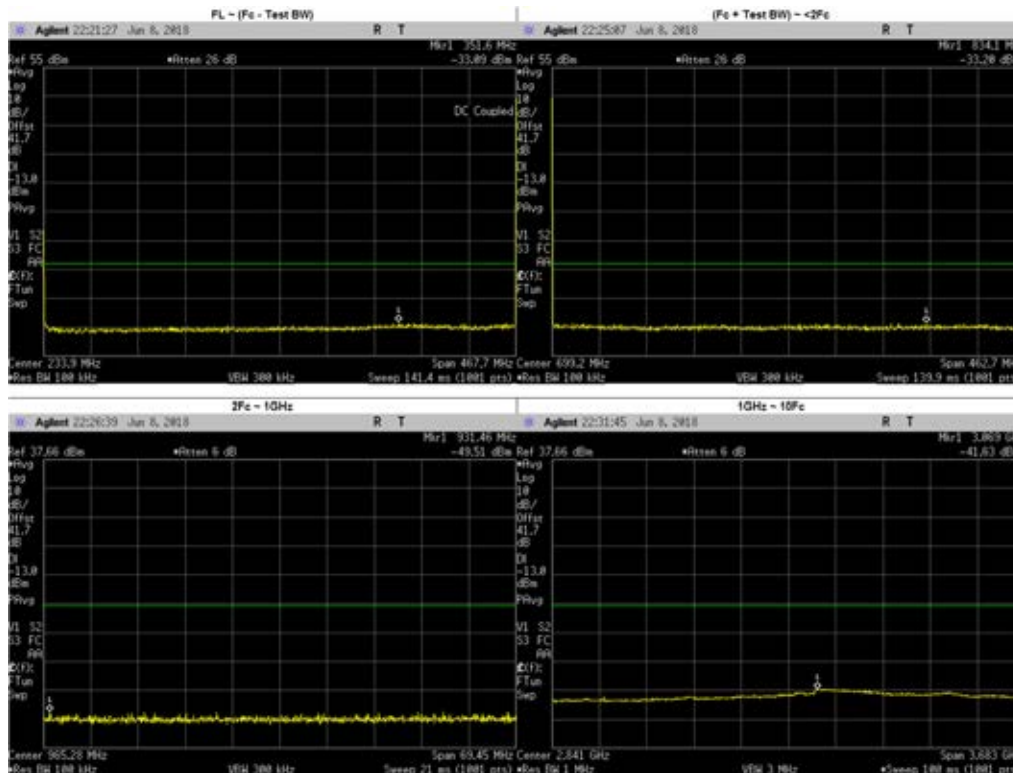


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	351.6000	-33.09	-13	PASS
(Fc + Test BW) ~ <2Fc	834.1000	-33.20	-13	PASS
2Fc ~ 1GHz	935.5500	-51.15	-13	PASS
	931.4600	-49.51	-13	PASS
1GHz ~ 10Fc	1403.3250	-44.22	-13	PASS
	1871.1000	-45.48	-13	PASS
	2338.8750	-44.54	-13	PASS
	2806.6500	-45.52	-13	PASS
	3274.4250	-43.35	-13	PASS
	3742.2000	-43.25	-13	PASS
	4209.9750	-42.91	-13	PASS
	4677.7500	-44.50	-13	PASS
	3069.0000	-41.63	-13	PASS

**Analog: 467.775 MHz, 25.0kHz Channel Spacing, Low Power
 FCC Part 80, RSS 119**

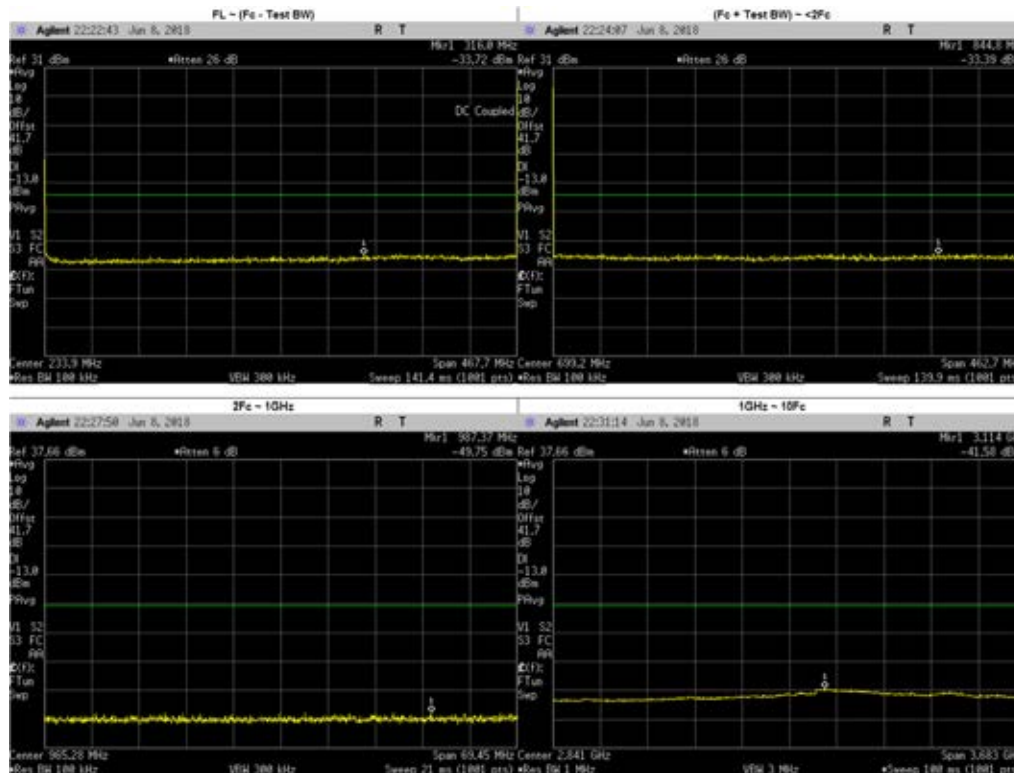


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	316.0000	-33.72	-13	PASS
(Fc + Test BW) ~ <2Fc	844.8000	-33.39	-13	PASS
2Fc ~ 1GHz	935.5500	-54.46	-13	PASS
	987.3700	-49.75	-13	PASS
1GHz ~ 10Fc	1403.3250	-45.68	-13	PASS
	1871.1000	-45.06	-13	PASS
	2338.8750	-44.80	-13	PASS
	2806.6500	-43.73	-13	PASS
	3274.4250	-42.24	-13	PASS
	3742.2000	-43.43	-13	PASS
	4209.9750	-43.89	-13	PASS
	4677.7500	-44.83	-13	PASS
	3114.0000	-41.58	-13	PASS

Analog: 459.025 MHz, 25.0kHz Channel Spacing, Max Power
FCC Part 22

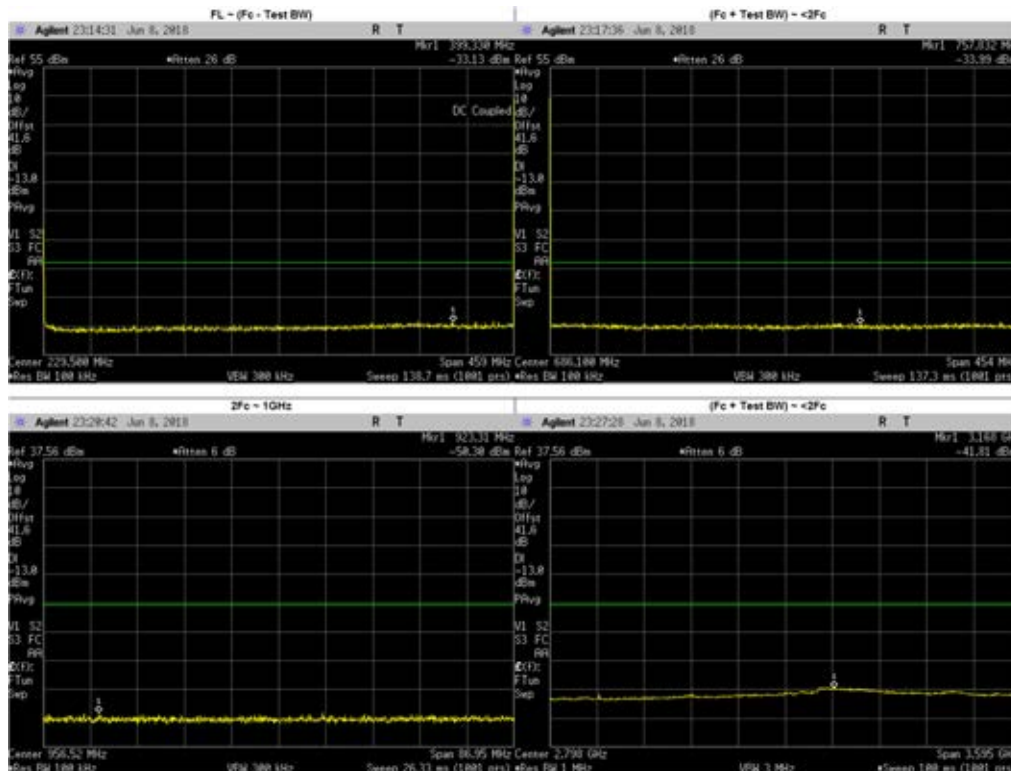


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	399.3300	-33.13	-13	PASS
(Fc + Test BW) ~ <2Fc	757.8320	-33.99	-13	PASS
2Fc ~ 1GHz	923.3100	-50.30	-13	PASS
1GHz ~ 10Fc	1377.0750	-43.87	-13	PASS
	1836.1000	-45.38	-13	PASS
	2295.1250	-44.20	-13	PASS
	2754.1500	-43.75	-13	PASS
	3213.1750	-42.16	-13	PASS
	3672.2000	-43.32	-13	PASS
	4131.2250	-43.16	-13	PASS
	4590.2500	-44.61	-13	PASS
	3168.0000	-41.81	-13	PASS

**Analog: 459.025 MHz, 25.0kHz Channel Spacing, Low Power
 FCC Part 22**

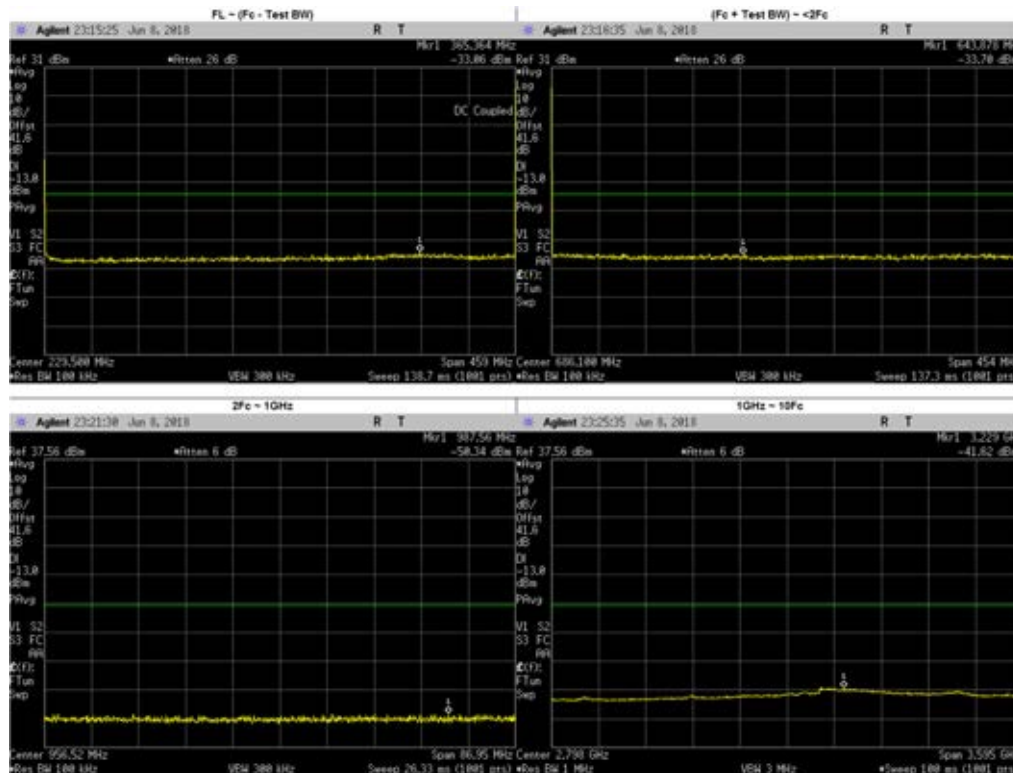


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	365.3640	-33.06	-13	PASS
(Fc + Test BW) ~ <2Fc	643.8780	-33.70	-13	PASS
2Fc ~ 1GHz	918.0500	-52.20	-13	PASS
	987.5600	-50.34	-13	PASS
1GHz ~ 10Fc	1377.0750	-45.72	-13	PASS
	1836.1000	-45.41	-13	PASS
	2295.1250	-45.10	-13	PASS
	2754.1500	-44.21	-13	PASS
	3213.1750	-42.28	-13	PASS
	3672.2000	-43.64	-13	PASS
	4131.2250	-43.37	-13	PASS
	4590.2500	-44.28	-13	PASS
	3229.0000	-41.62	-13	PASS

Analog: 459.65 MHz, 25.0kHz Channel Spacing, Max Power
FCC Part 22

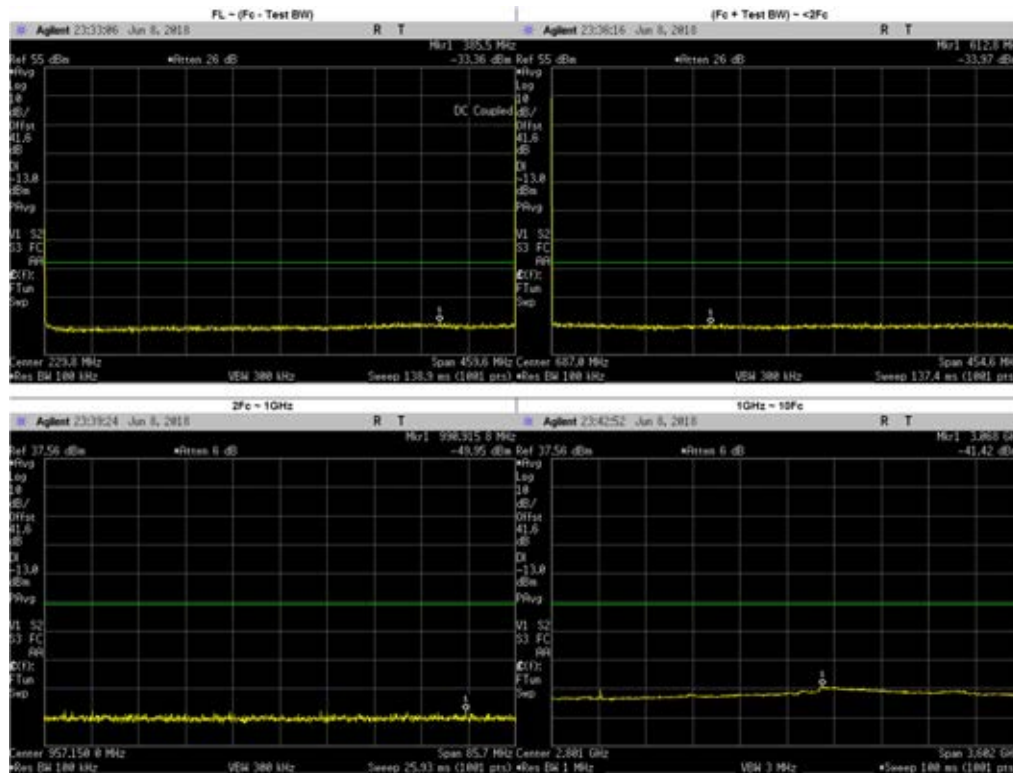

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	385.5000	-33.36	-13	PASS
(Fc + Test BW) ~ <2Fc	612.8000	-33.97	-13	PASS
2Fc ~ 1GHz	919.3000	-50.44	-13	PASS
	990.9158	-49.95	-13	PASS
1GHz ~ 10Fc	1378.9500	-42.96	-13	PASS
	1838.6000	-45.39	-13	PASS
	2298.2500	-42.13	-13	PASS
	2757.9000	-43.72	-13	PASS
	3217.5500	-42.62	-13	PASS
	3677.2000	-43.65	-13	PASS
	4136.8500	-43.50	-13	PASS
	4596.5000	-44.27	-13	PASS
	3068.0000	-41.42	-13	PASS


**Analog: 459.65 MHz, 25.0kHz Channel Spacing, Low Power
 FCC Part 22**

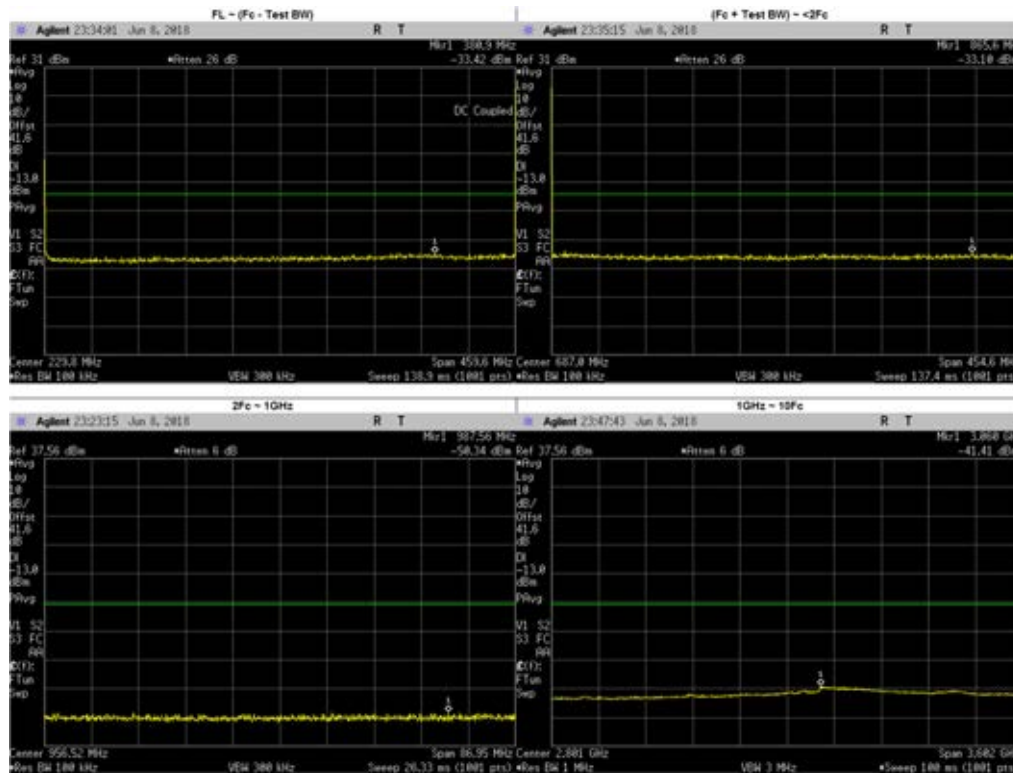

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	380.9000	-33.42	-13	PASS
(Fc + Test BW) ~ <2Fc	865.6000	-33.10	-13	PASS
2Fc ~ 1GHz	919.3000	-52.26	-13	PASS
	987.5600	-50.34	-13	PASS
1GHz ~ 10Fc	1378.9500	-45.28	-13	PASS
	1838.6000	-45.72	-13	PASS
	2298.2500	-44.98	-13	PASS
	2757.9000	-44.06	-13	PASS
	3217.5500	-44.10	-13	PASS
	3677.2000	-43.65	-13	PASS
	4136.8500	-43.95	-13	PASS
	4596.5000	-44.41	-13	PASS
	3060.0000	-41.41	-13	PASS


6.10.3. Test Result (Digital)

C4FM: 380.0125 MHz, 12.5 kHz Channel Spacing, Max Power (Not For FCC Review), RSS 119

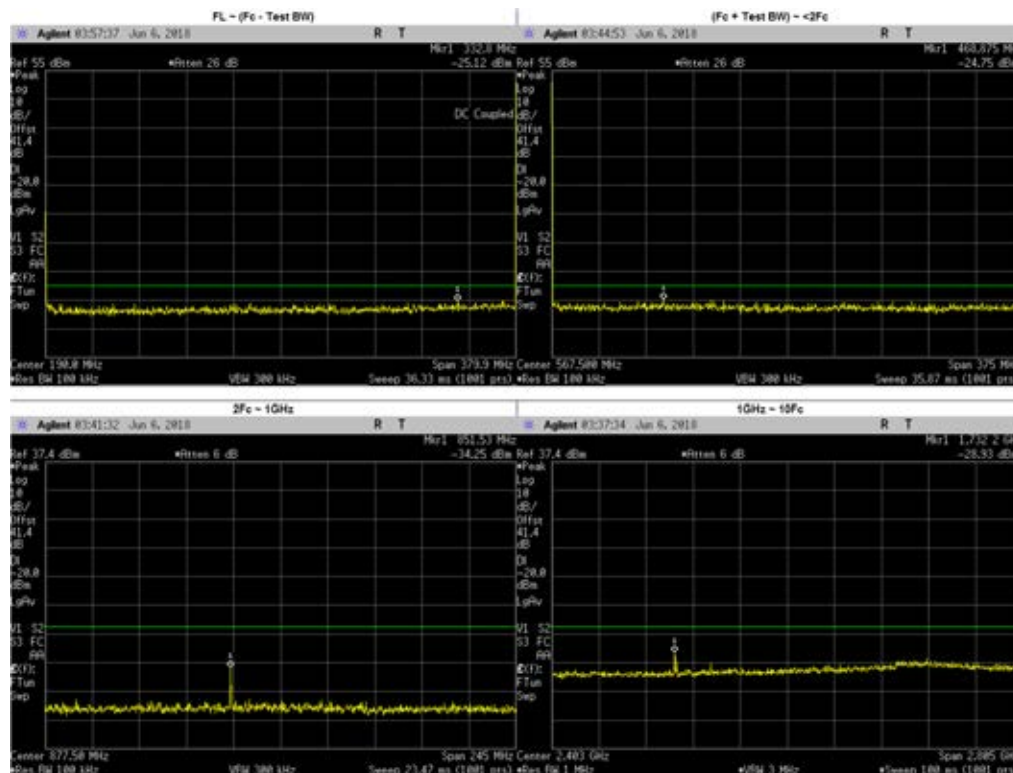


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	332.8000	-25.12	-20	PASS
(Fc + Test BW) ~ <2Fc	468.8750	-24.75	-20	PASS
2Fc ~ 1GHz	851.3500	-34.25	-20	PASS
	760.0250	-31.36	-20	PASS
1GHz ~ 10Fc	1520.0500	-46.00	-20	PASS
	2280.0750	-45.64	-20	PASS
	3040.1000	-44.91	-20	PASS
	3800.1250	-44.69	-20	PASS
	1140.4000	-30.20	-20	PASS
	1900.5000	-36.76	-20	PASS
	2660.7000	-34.44	-20	PASS
	3420.8000	-36.82	-20	PASS
	1732.2000	-28.93	-20	PASS

**C4FM: 380.0125 MHz, 12.5 kHz Channel Spacing, Low Power
 (Not For FCC Review), RSS 119**

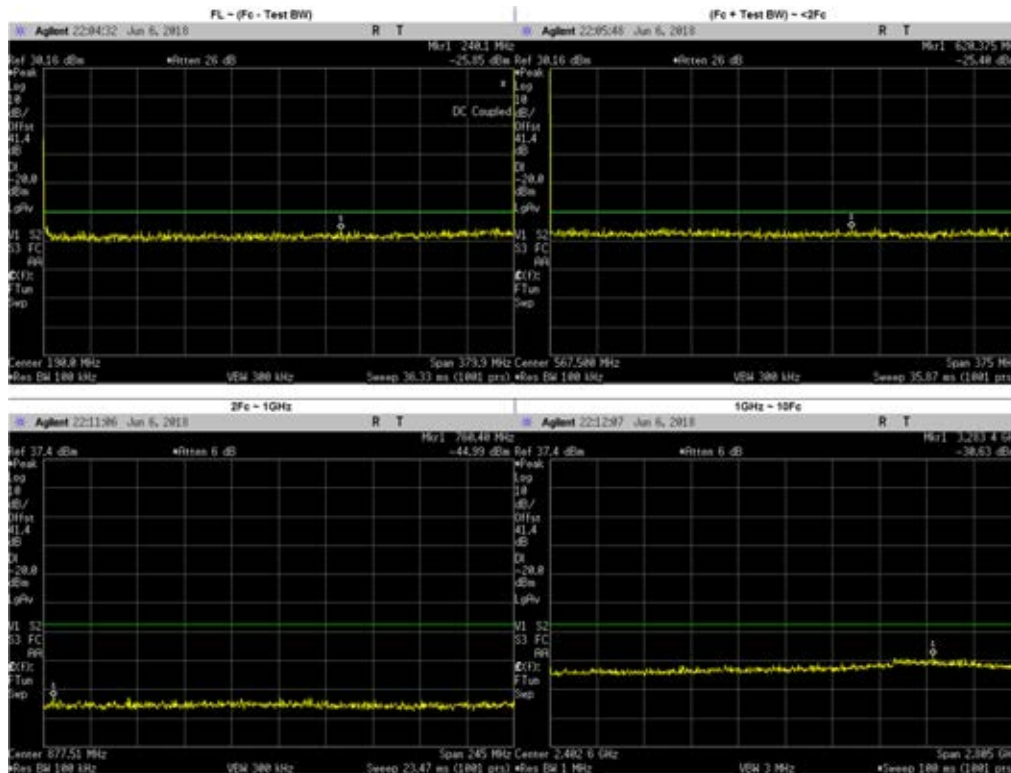


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	240.1000	-25.85	-20	PASS
(Fc + Test BW) ~ <2Fc	620.3750	-25.40	-20	PASS
2Fc ~ 1GHz	760.4000	-44.99	-20	PASS
1GHz ~ 10Fc	1140.0370	-37.33	-20	PASS
	1520.0500	-36.60	-20	PASS
	1900.0620	-35.93	-20	PASS
	2280.0750	-36.46	-20	PASS
	2660.0880	-35.00	-20	PASS
	3040.1000	-36.42	-20	PASS
	3420.1130	-37.77	-20	PASS
	3800.1250	-34.38	-20	PASS
	3283.4000	-30.63	-20	PASS

C4FM: 406.2 MHz, 12.5 kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

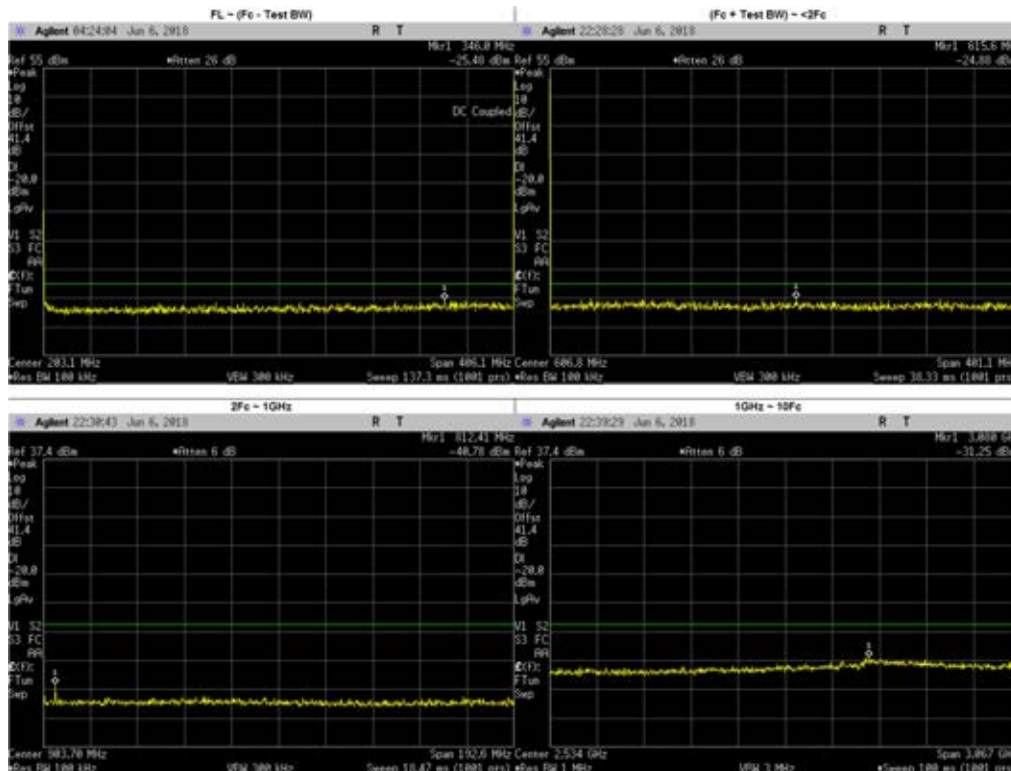


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	346.0000	-25.48	-20	PASS
(Fc + Test BW) ~ <2Fc	615.6000	-24.88	-20	PASS
2Fc ~ 1GHz	812.4100	-40.78	-20	PASS
1GHz ~ 10Fc	1624.8000	-36.61	-20	PASS
	2437.2000	-35.10	-20	PASS
	3249.6000	-32.70	-20	PASS
	3655.8000	-32.01	-20	PASS
	4062.0000	-34.66	-20	PASS
	1218.0000	-33.97	-20	PASS
	2031.0000	-36.07	-20	PASS
	2844.0000	-33.19	-20	PASS
	3080.0000	-31.25	-20	PASS

**C4FM: 406.2 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 90, RSS 119**

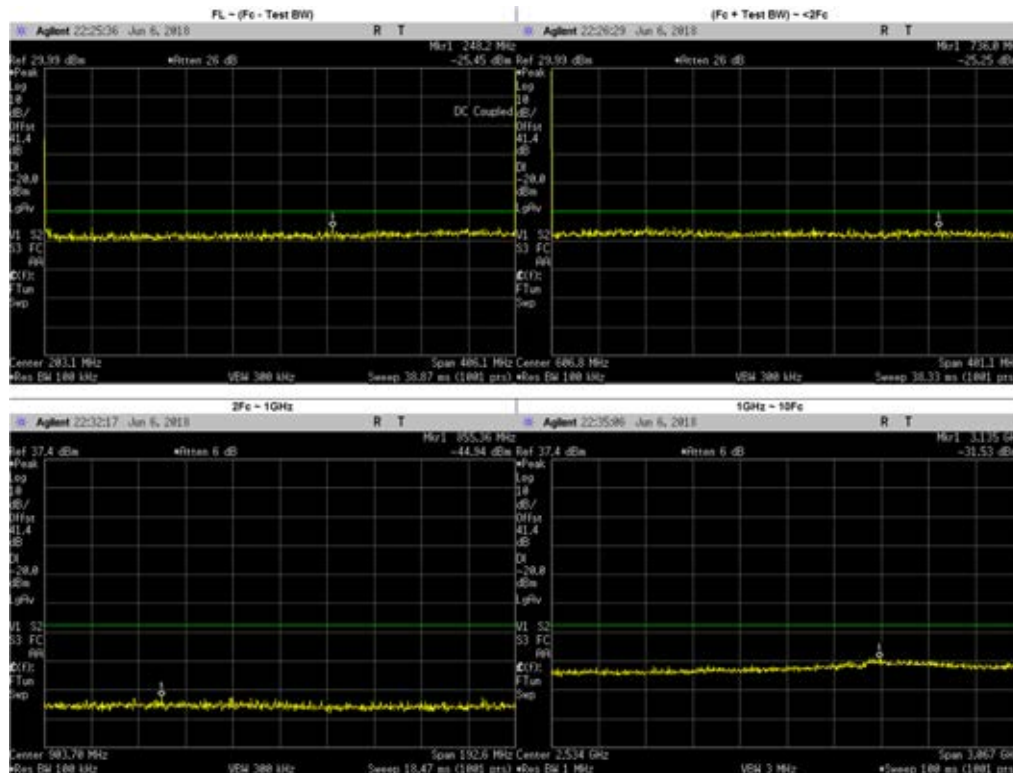


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	248.2000	-25.45	-20	PASS
(Fc + Test BW) ~ <2Fc	736.0000	-25.25	-20	PASS
2Fc ~ 1GHz	812.4000	-47.68	-20	PASS
	855.3600	-44.94	-20	PASS
1GHz ~ 10Fc	1218.6000	-36.41	-20	PASS
	1624.8000	-37.13	-20	PASS
	2031.0000	-36.44	-20	PASS
	2437.2000	-36.24	-20	PASS
	2843.4000	-35.66	-20	PASS
	3249.6000	-34.25	-20	PASS
	3655.8000	-35.70	-20	PASS
	3135.0000	-31.53	-20	PASS

**C4FM: 450.65 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 74, 90, RSS 119**

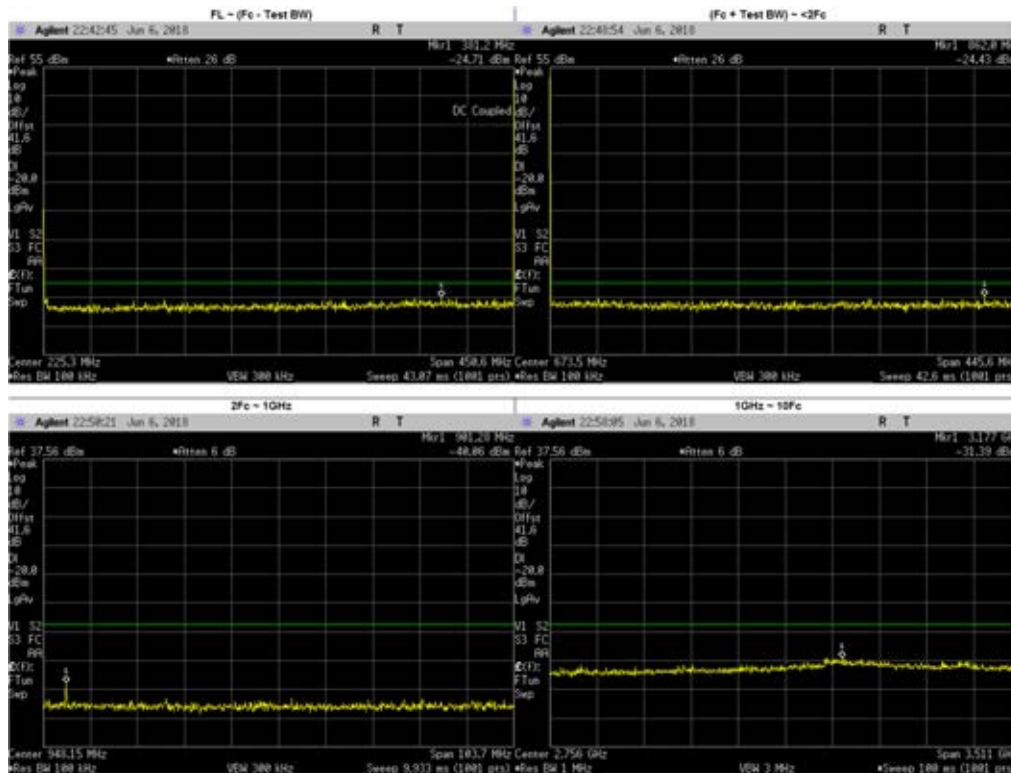


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	381.2000	-24.71	-20	PASS
(Fc + Test BW) ~ <2Fc	862.0000	-24.43	-20	PASS
2Fc ~ 1GHz	901.2800	-40.06	-20	PASS
	1802.6000	-36.33	-20	PASS
	2703.9000	-35.24	-20	PASS
	3605.2000	-34.51	-20	PASS
	4506.5000	-35.71	-20	PASS
	1352.0000	-35.91	-20	PASS
	2254.0000	-34.99	-20	PASS
	3153.0000	-32.32	-20	PASS
	4055.8500	-36.89	-20	PASS
1GHz ~ 10Fc	3177.0000	-31.39	-20	PASS

**C4FM: 450.65 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 74, 90, RSS 119**

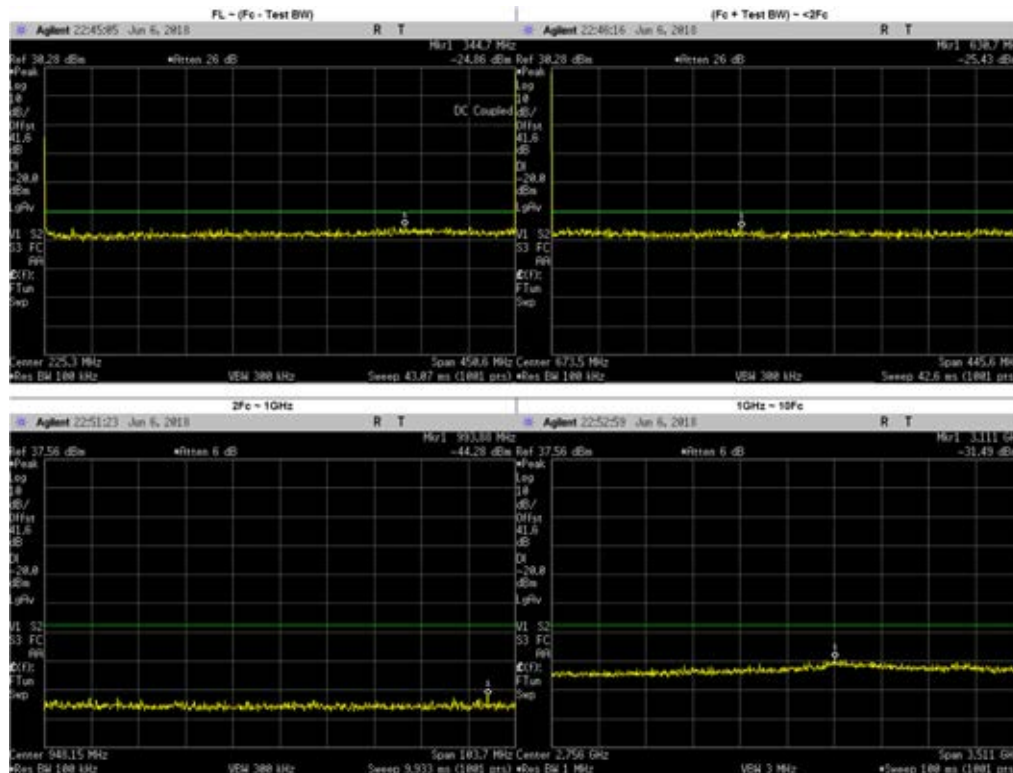


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	344.7000	-24.86	-20	PASS
(Fc + Test BW) ~ <2Fc	630.7000	-25.43	-20	PASS
2Fc ~ 1GHz	901.3000	-47.01	-20	PASS
	993.8800	-44.28	-20	PASS
1GHz ~ 10Fc	1351.9500	-36.94	-20	PASS
	1802.6000	-36.13	-20	PASS
	2253.2500	-38.71	-20	PASS
	2703.9000	-35.44	-20	PASS
	3154.5500	-34.20	-20	PASS
	3605.2000	-35.50	-20	PASS
	4055.8500	-34.44	-20	PASS
	4506.5000	-34.51	-20	PASS
	3111.0000	-31.49	-20	PASS

**C4FM: 459.125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 22, 90**

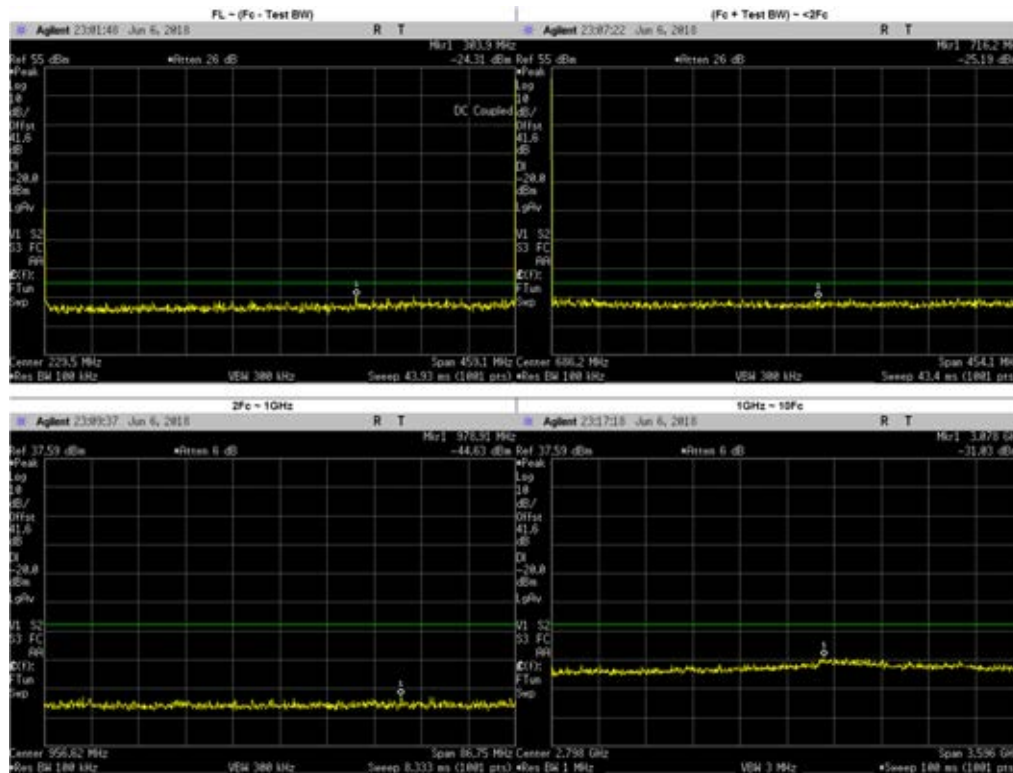


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	303.9000	-24.31	-20	PASS
(Fc + Test BW) ~ <2Fc	716.2000	-25.19	-20	PASS
2Fc ~ 1GHz	918.2800	-46.88	-20	PASS
	978.9100	-44.63	-20	PASS
1GHz ~ 10Fc	1836.5000	-36.96	-20	PASS
	2754.7500	-33.60	-20	PASS
	3673.0000	-33.52	-20	PASS
	4132.1250	-31.48	-20	PASS
	4591.2500	-34.55	-20	PASS
	1377.3750	-38.09	-20	PASS
	2295.0000	-39.50	-20	PASS
	3215.0000	-32.23	-20	PASS
	3078.0000	-31.03	-20	PASS

**C4FM: 459.125 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 22, 90**

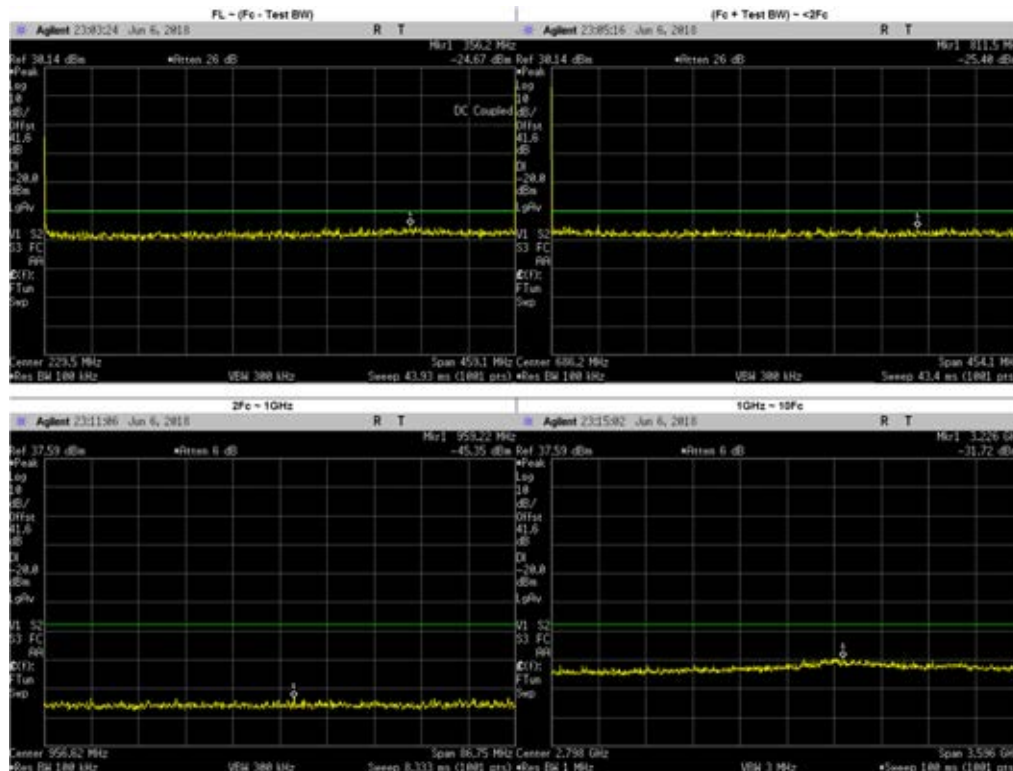


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	356.2000	-24.67	-20	PASS
(Fc + Test BW) ~ <2Fc	811.5000	-25.40	-20	PASS
2Fc ~ 1GHz	918.2500	-48.53	-20	PASS
	959.2200	-45.35	-20	PASS
1GHz ~ 10Fc	1377.3750	-36.62	-20	PASS
	1836.5000	-36.71	-20	PASS
	2295.6250	-36.53	-20	PASS
	2754.7500	-34.67	-20	PASS
	3213.8750	-33.53	-20	PASS
	3673.0000	-34.65	-20	PASS
	4132.1250	-33.87	-20	PASS
	4591.2500	-34.84	-20	PASS
	3226.0000	-31.72	-20	PASS

**C4FM: 467.775 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90, RSS 119**

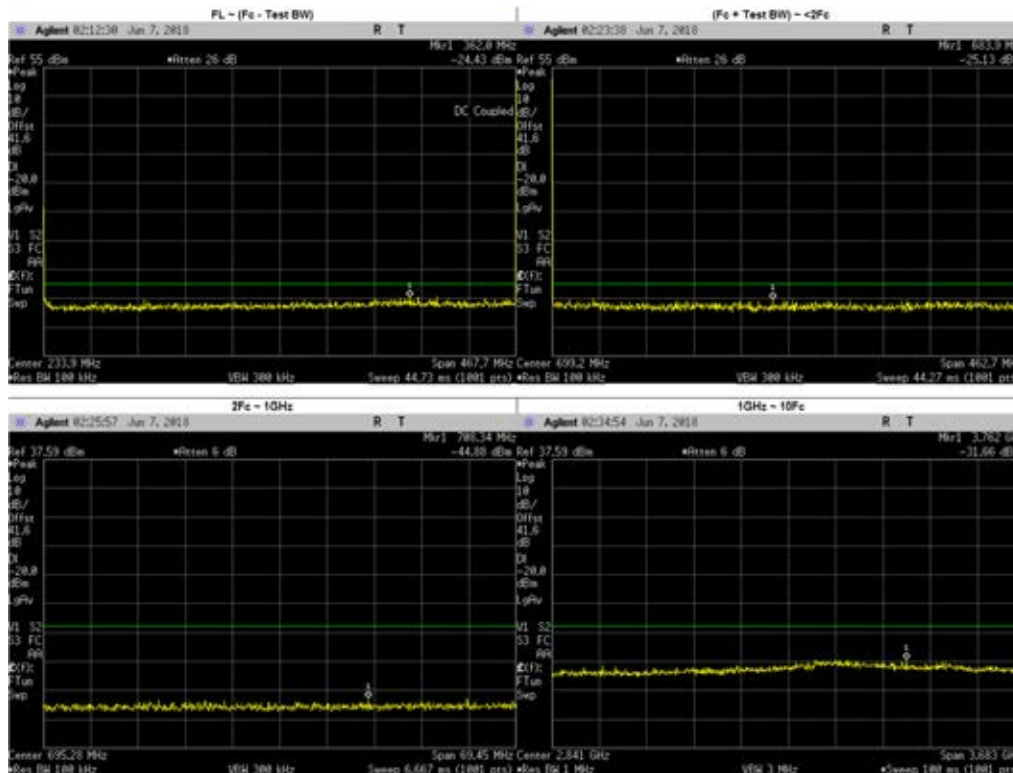


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	362.0000	-24.43	-20	PASS
(Fc + Test BW) ~ <2Fc	683.9000	-25.13	-20	PASS
2Fc ~ 1GHz	935.5500	-46.42	-20	PASS
	708.3400	-44.88	-20	PASS
1GHz ~ 10Fc	1871.1000	-36.06	-20	PASS
	2806.6500	-34.16	-20	PASS
	3742.2000	-34.46	-20	PASS
	4209.9750	-33.65	-20	PASS
	4677.7500	-35.53	-20	PASS
	1405.0000	-36.37	-20	PASS
	2340.0000	-35.49	-20	PASS
	3276.0000	-39.46	-20	PASS
	3762.0000	-31.66	-20	PASS

**C4FM: 467.775 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 90, RSS 119**

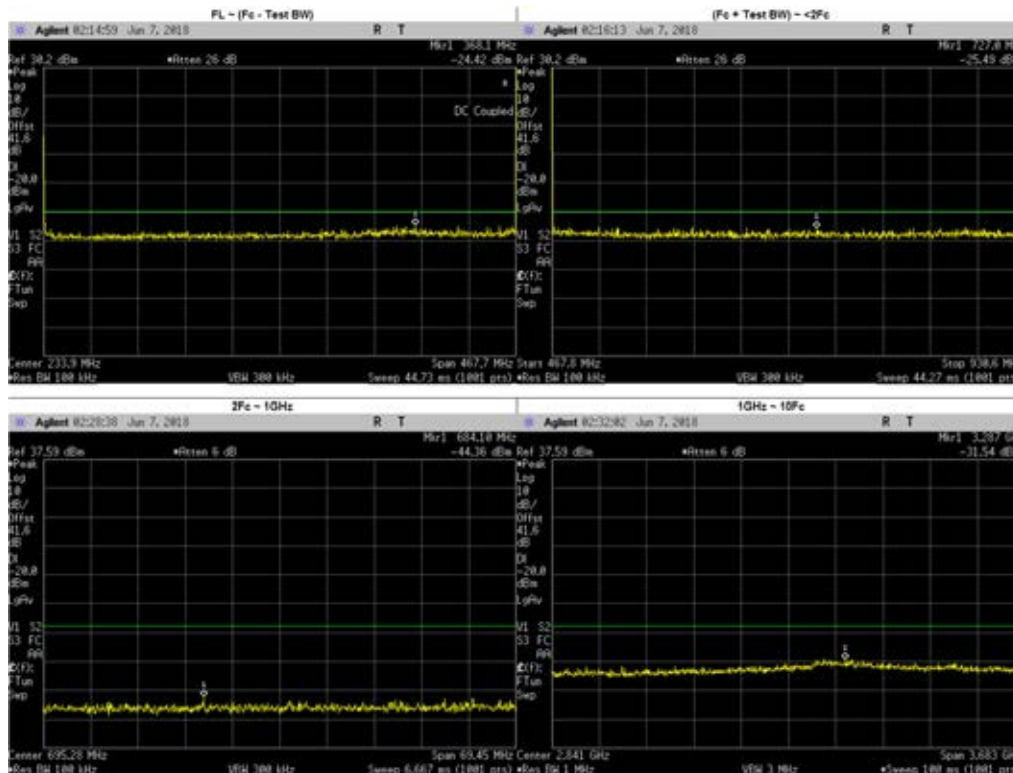


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	368.1000	-24.42	-20	PASS
(Fc + Test BW) ~ <2Fc	727.0000	-25.49	-20	PASS
2Fc ~ 1GHz	935.5500	-46.48	-20	PASS
	684.1000	-44.36	-20	PASS
1GHz ~ 10Fc	1403.3250	-35.49	-20	PASS
	1871.1000	-36.17	-20	PASS
	2338.8750	-34.28	-20	PASS
	2806.6500	-34.33	-20	PASS
	3274.4250	-33.10	-20	PASS
	3742.2000	-34.56	-20	PASS
	4209.9750	-34.90	-20	PASS
	4677.7500	-36.18	-20	PASS
	3287.0000	-31.54	-20	PASS

**C4FM: 459.025 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 22**

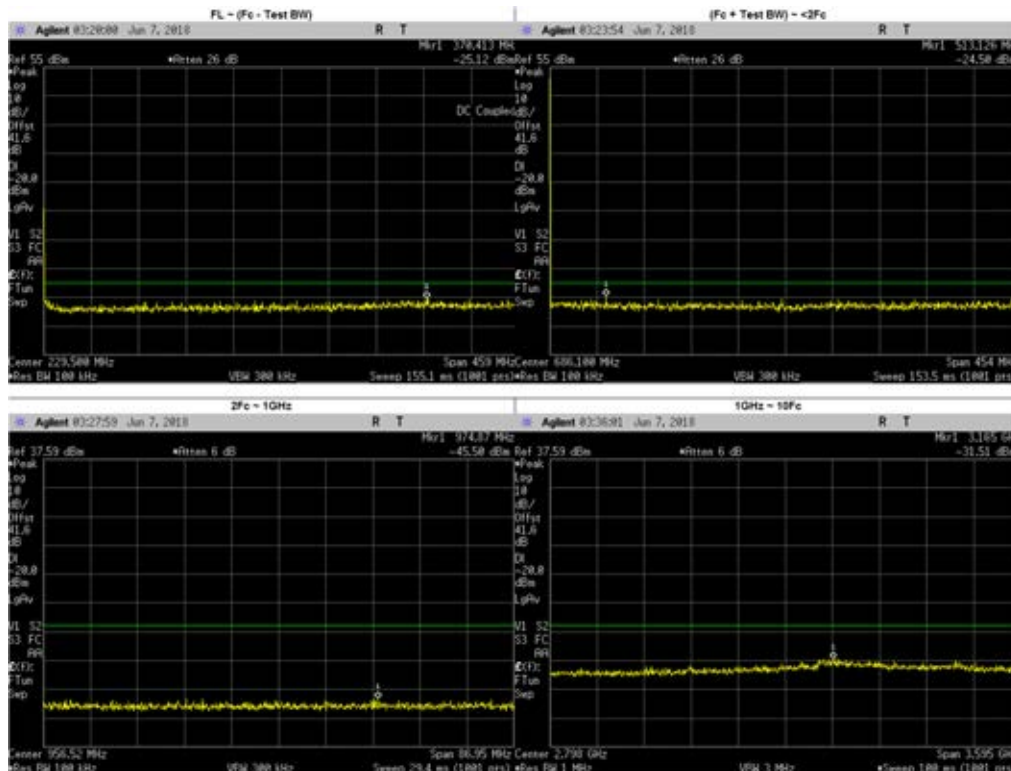


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	370.4130	-25.12	-20	PASS
(Fc + Test BW) ~ <2Fc	513.1260	-24.50	-20	PASS
2Fc ~ 1GHz	918.0900	-47.13	-20	PASS
	974.8700	-45.50	-20	PASS
1GHz ~ 10Fc	1836.1000	-45.21	-20	PASS
	2754.1500	-45.72	-20	PASS
	3672.2000	-45.76	-20	PASS
	4131.2250	-45.21	-20	PASS
	4590.2500	-44.44	-20	PASS
	3211.0790	-44.05	-20	PASS
	1378.0000	-26.89	-20	PASS
	2295.1250	-43.31	-20	PASS
	3213.1750	-44.05	-20	PASS
	3165.0000	-31.51	-20	PASS

**C4FM: 459.025 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 22**

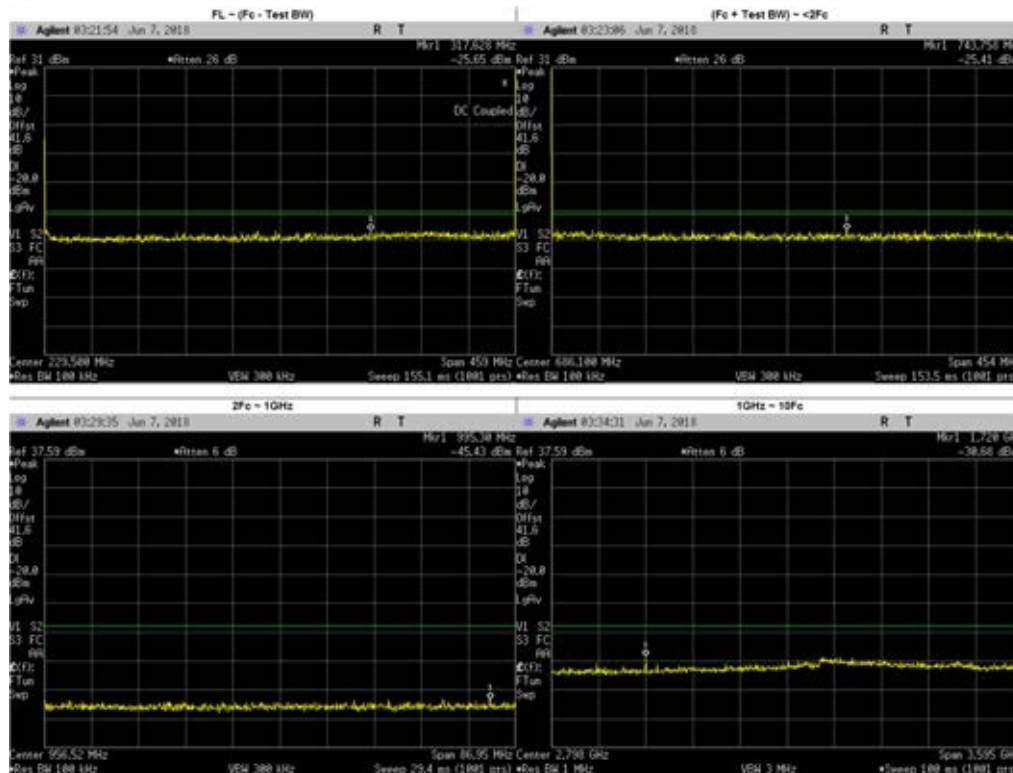


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	317.6280	-25.65	-20	PASS
(Fc + Test BW) ~ <2Fc	743.7580	-25.41	-20	PASS
2Fc ~ 1GHz	918.0500	-44.53	-20	PASS
	995.3000	-45.43	-20	PASS
1GHz ~ 10Fc	1378.0000	-41.34	-20	PASS
	1836.1000	-48.82	-20	PASS
	2295.1250	-47.49	-20	PASS
	2754.1500	-47.17	-20	PASS
	3213.1750	-44.17	-20	PASS
	3672.2000	-45.50	-20	PASS
	4131.2250	-45.86	-20	PASS
	4590.2500	-44.73	-20	PASS
	1720.0000	-30.68	-20	PASS

**C4FM: 459.65 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 22**

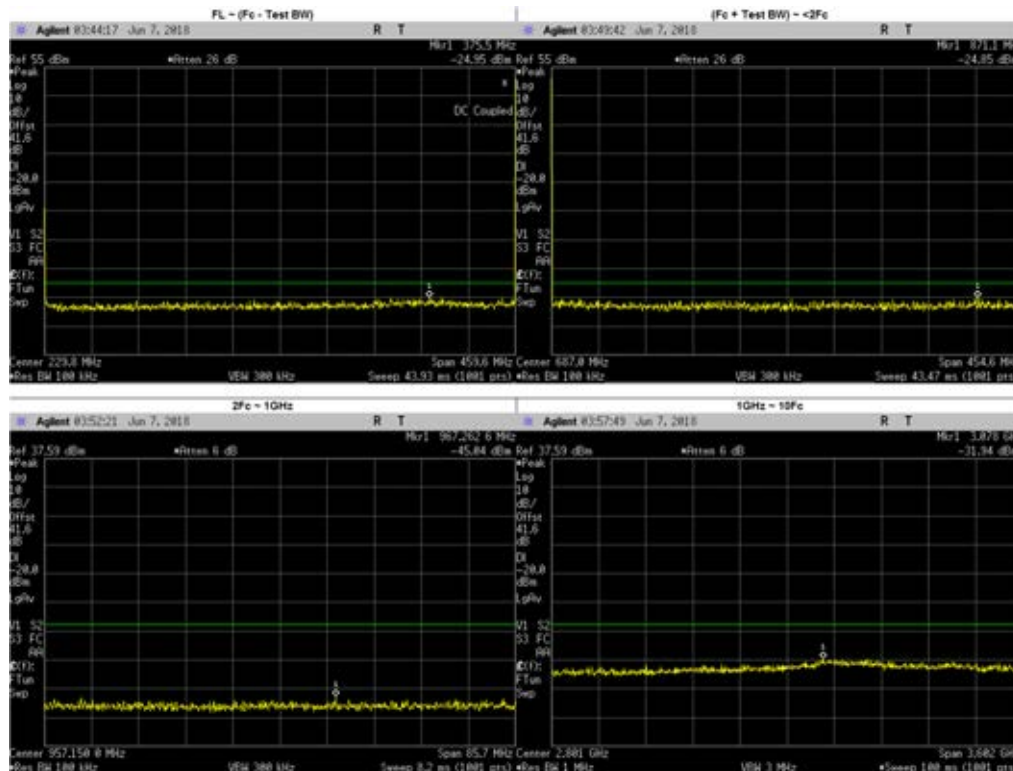


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	375.5000	-24.95	-20	PASS
(Fc + Test BW) ~ <2Fc	871.1000	-24.85	-20	PASS
2Fc ~ 1GHz	919.2700	-46.92	-20	PASS
	967.2620	-45.04	-20	PASS
1GHz ~ 10Fc	1838.6000	-36.94	-20	PASS
	2757.9000	-33.76	-20	PASS
	3677.2000	-34.05	-20	PASS
	4136.8500	-34.93	-20	PASS
	4596.5000	-35.17	-20	PASS
	1378.9500	-34.66	-20	PASS
	2297.0000	-35.58	-20	PASS
	3219.0000	-33.81	-20	PASS
	1947.0000	-37.35	-20	PASS
	3078.0000	-31.94	-20	PASS

**C4FM: 459.65 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 22**

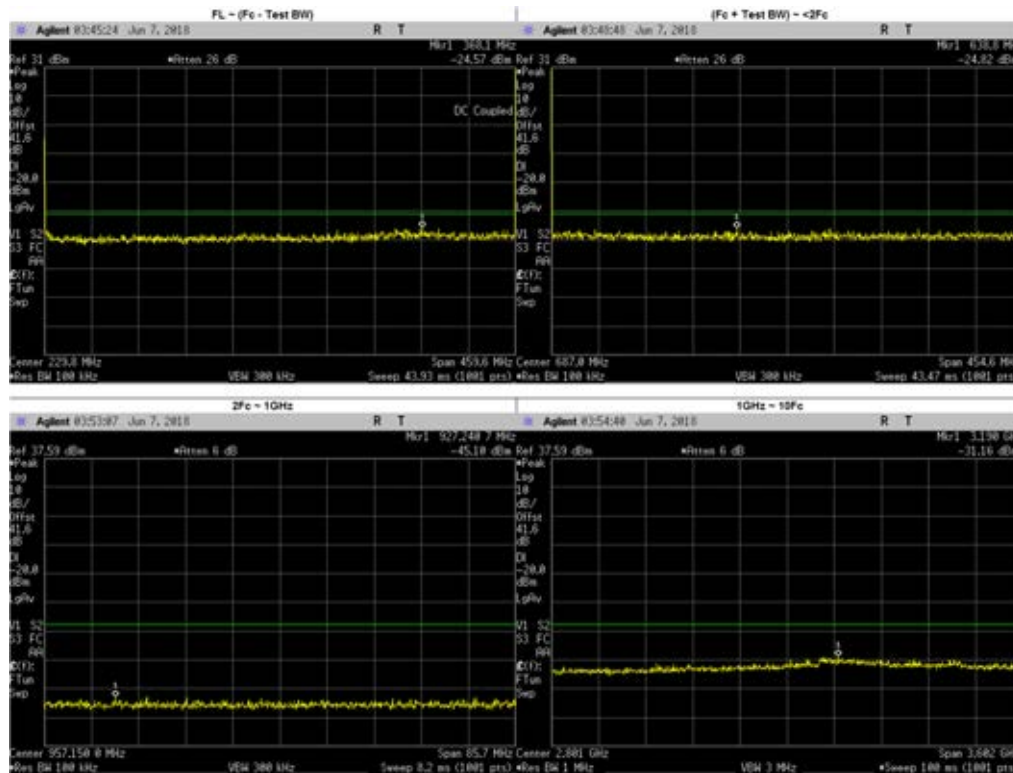


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dbm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	368.1000	-24.57	-20	PASS
(Fc + Test BW) ~ <2Fc	638.8000	-24.82	-20	PASS
2Fc ~ 1GHz	919.3000	-47.92	-20	PASS
	927.2407	-45.10	-20	PASS
1GHz ~ 10Fc	1378.9500	-36.39	-20	PASS
	1838.6000	35.79	-20	PASS
	2298.2500	35.14	-20	PASS
	2757.9000	-35.54	-20	PASS
	3217.5500	-32.77	-20	PASS
	3677.2000	-33.89	-20	PASS
	4136.8500	-34.10	-20	PASS
	4596.5000	-34.79	-20	PASS
	3190.0000	-31.16	-20	PASS

Phase II: 380.0125 MHz, 12.5 kHz Channel Spacing, Max Power
(Not For FCC Review)

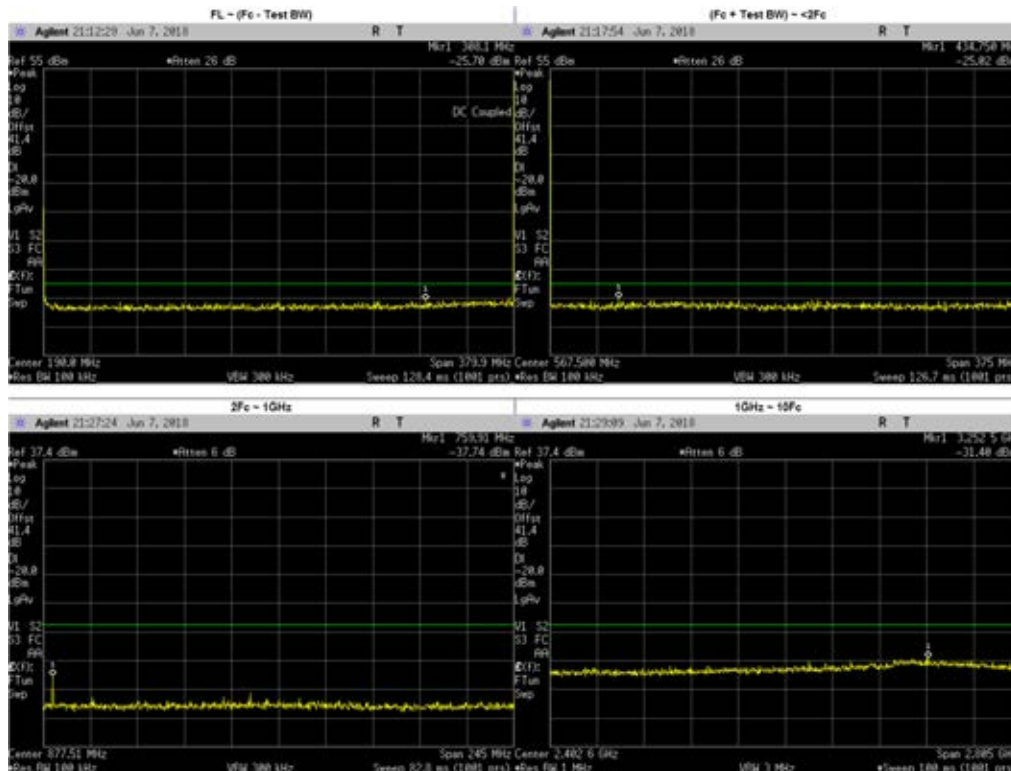


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dbm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	308.1000	-25.70	-20	PASS
(Fc + Test BW) ~ <2Fc	434.7500	-25.02	-20	PASS
2Fc ~ 1GHz	759.9100	-37.74	-20	PASS
1GHz ~ 10Fc	1520.0500	-37.44	-20	PASS
	2280.0750	-36.14	-20	PASS
	3040.1000	-34.41	-20	PASS
	3800.1250	-34.58	-20	PASS
	1140.4000	-36.13	-20	PASS
	1900.0620	38.09	-20	PASS
	2660.0880	-35.16	-20	PASS
	3420.1130	-37.78	-20	PASS
	3252.5000	-31.40	-20	PASS

**Phase II: 380.0125 MHz, 12.5 kHz Channel Spacing, Low Power
 (Not For FCC Review)**

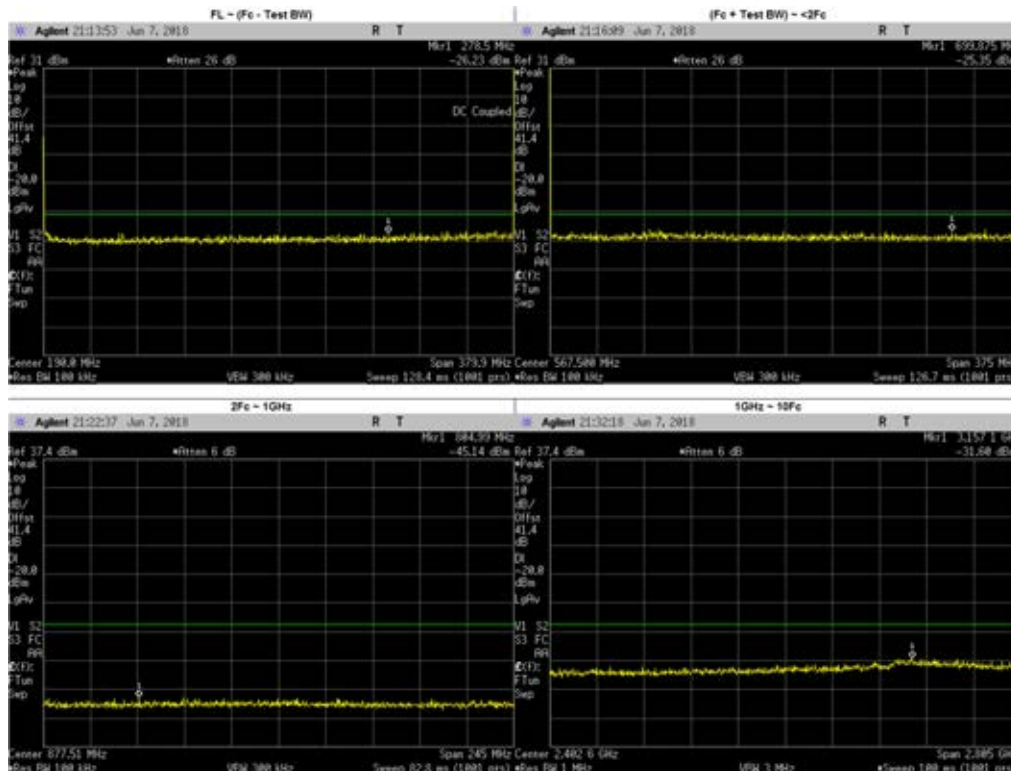


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dbm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	278.5000	-26.23	-20	PASS
(Fc + Test BW) ~ <2Fc	699.8750	-25.35	-20	PASS
2Fc ~ 1GHz	760.0250	-47.28	-20	PASS
	804.9900	-45.14	-20	PASS
1GHz ~ 10Fc	1140.0370	-37.00	-20	PASS
	1520.0500	-37.12	-20	PASS
	1900.0620	-36.83	-20	PASS
	2280.0750	-35.79	-20	PASS
	2660.0880	-35.92	-20	PASS
	3040.1000	-34.03	-20	PASS
	3420.1130	-34.89	-20	PASS
	3800.1250	-35.12	-20	PASS
	3157.1000	-31.60	-20	PASS

**Phase II: 406.2 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90, RSS 119**

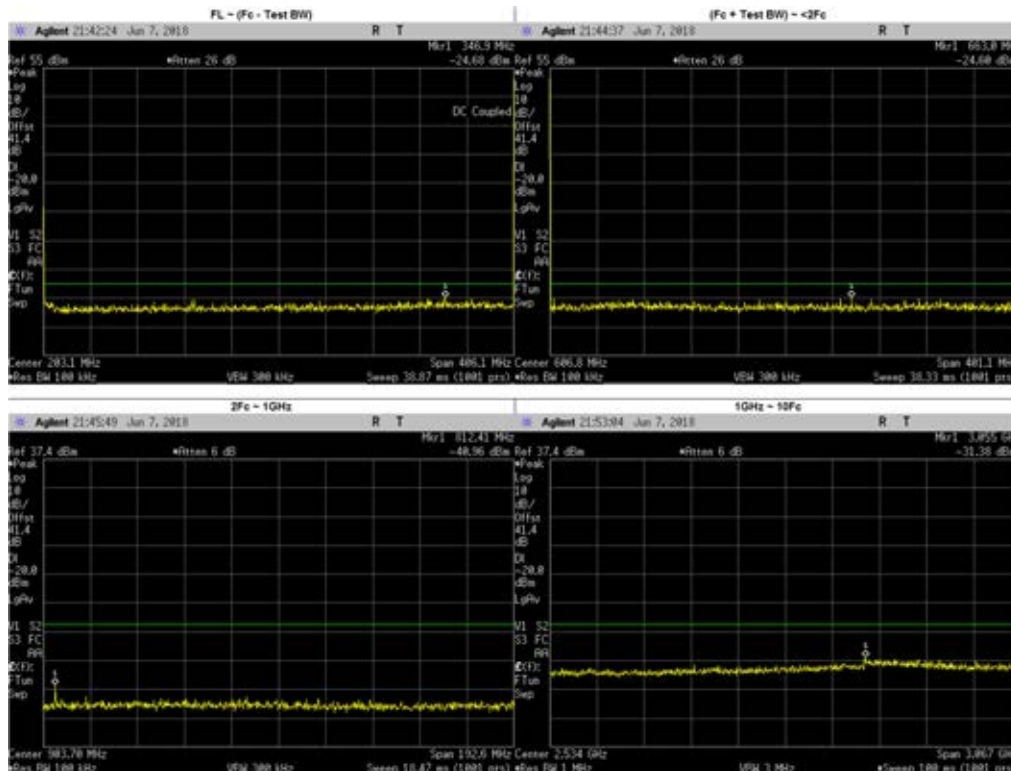


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	346.9000	-24.68	-20	PASS
(Fc + Test BW) ~ <2Fc	663.0000	-24.60	-20	PASS
2Fc ~ 1GHz	812.4100	-40.96	-20	PASS
1GHz ~ 10Fc	1624.8000	-36.90	-20	PASS
	2437.2000	-35.61	-20	PASS
	3249.6000	-33.99	-20	PASS
	4062.0000	-35.30	-20	PASS
	1218.6000	-35.60	-20	PASS
	2031.0000	-35.63	-20	PASS
	2843.4000	-36.90	-20	PASS
	3655.8000	-35.08	-20	PASS
	3055.0000	-31.38	-20	PASS

**Phase II: 406.2 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 90, RSS 119**

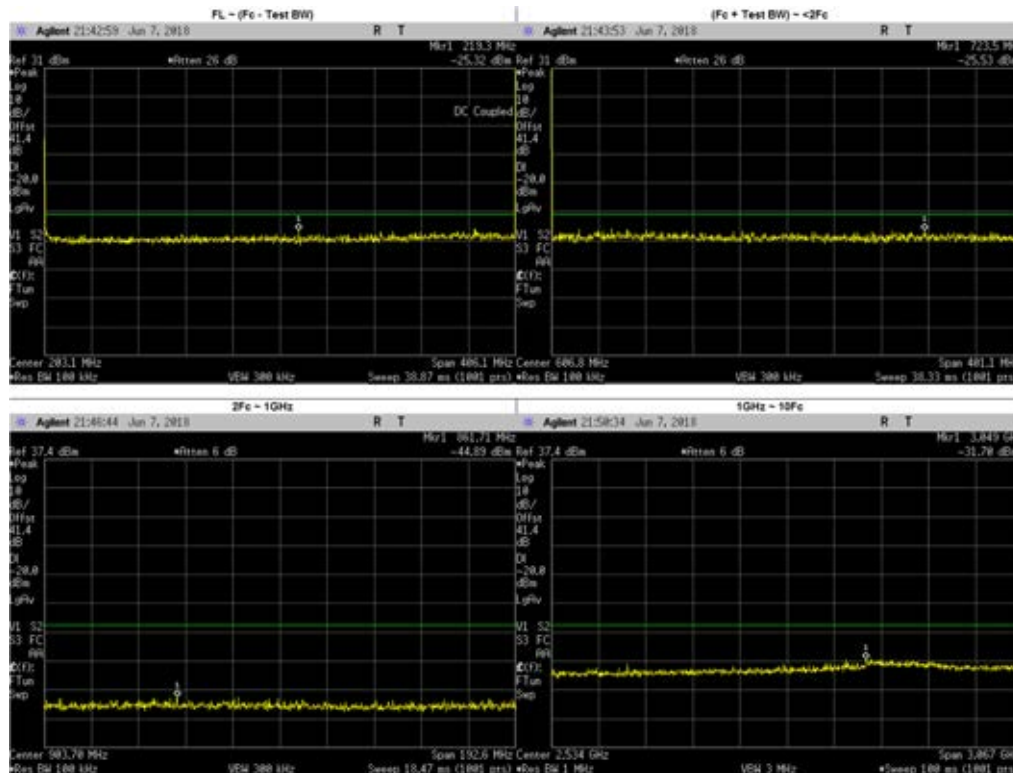


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	219.3000	-25.32	-20	PASS
(Fc + Test BW) ~ <2Fc	723.5000	-25.53	-20	PASS
2Fc ~ 1GHz	812.4000	-48.86	-20	PASS
	864.7100	-44.89	-20	PASS
1GHz ~ 10Fc	1218.6000	-36.64	-20	PASS
	1624.8000	-36.55	-20	PASS
	2031.0000	-36.16	-20	PASS
	2437.2000	-35.44	-20	PASS
	2843.4000	-35.64	-20	PASS
	3249.6000	-33.37	-20	PASS
	3655.8000	-34.26	-20	PASS
	4062.0000	-33.28	-20	PASS
	3049.0000	-31.70	-20	PASS

**Phase II: 450.65 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 74, 90 RSS 119**

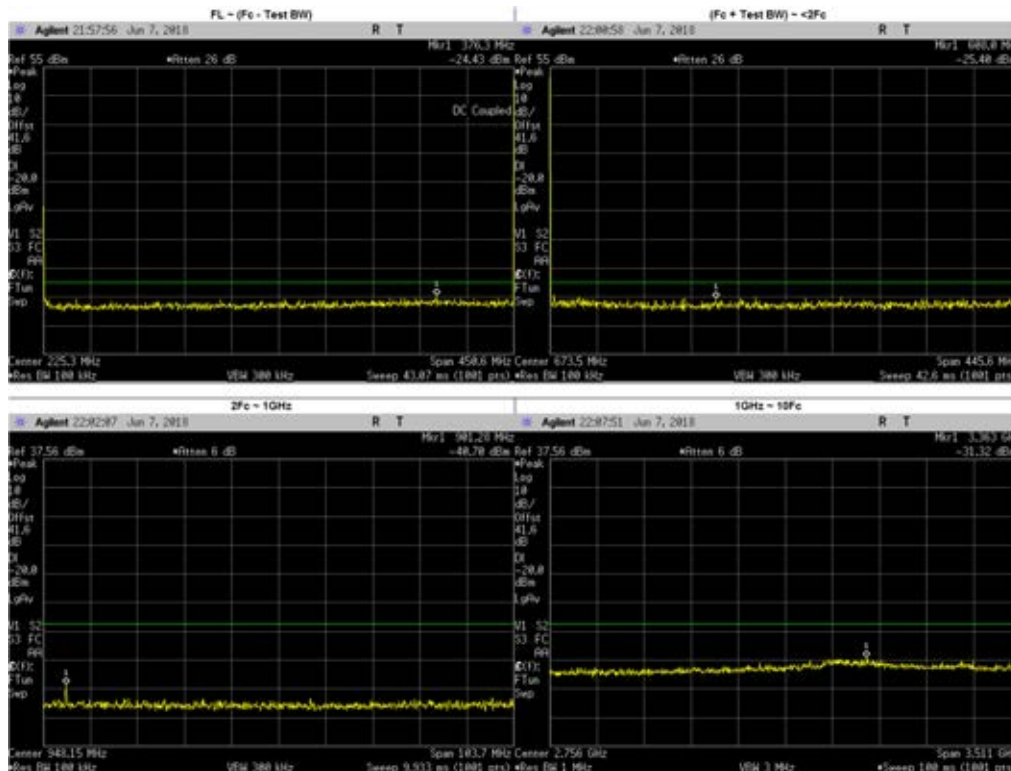


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	376.3000	-24.43	-20	PASS
(Fc + Test BW) ~ <2Fc	608.0000	-25.40	-20	PASS
2Fc ~ 1GHz	901.2800	-40.70	-20	PASS
1GHz ~ 10Fc	1802.6000	-36.49	-20	PASS
	2703.9000	-36.43	-20	PASS
	3605.2000	-35.13	-20	PASS
	4506.5000	-36.15	-20	PASS
	1351.9500	-35.75	-20	PASS
	2254.0000	-35.63	-20	PASS
	3154.5500	-33.74	-20	PASS
	4055.8500	-33.83	-20	PASS
	3363.0000	-31.32	-20	PASS

**Phase II: 450.65 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 74, 90 RSS 119**

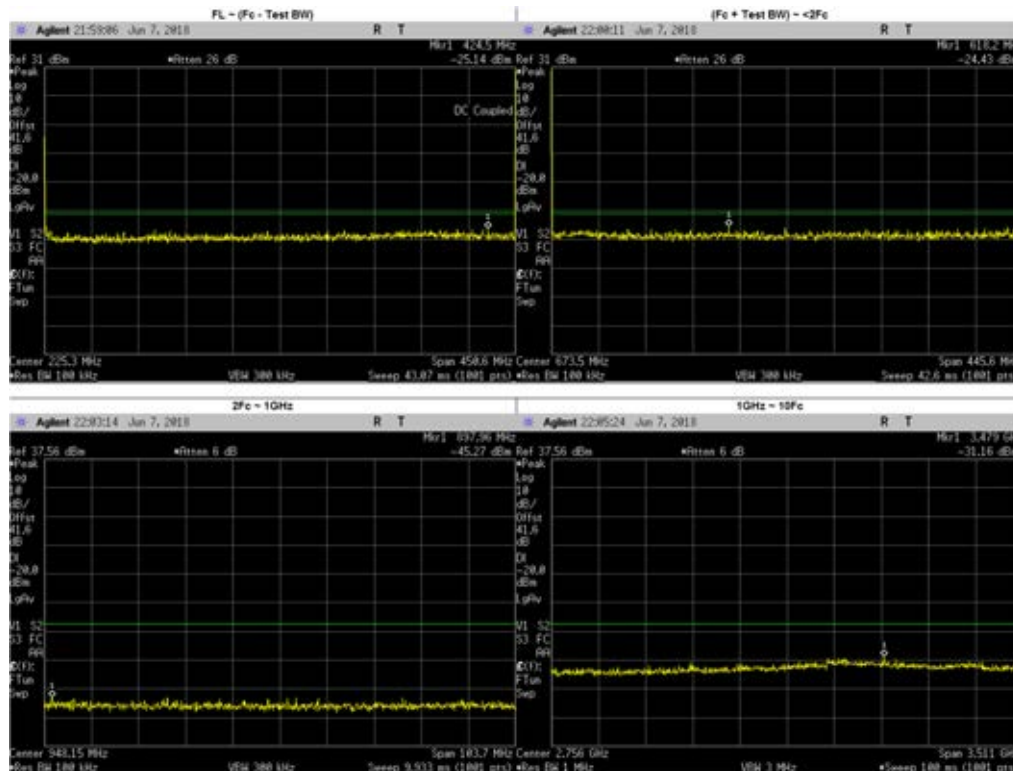


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	424.5000	-25.14	-20	PASS
(Fc + Test BW) ~ <2Fc	618.2000	-24.43	-20	PASS
2Fc ~ 1GHz	901.3000	-48.21	-20	PASS
	897.9600	-45.27	-20	PASS
1GHz ~ 10Fc	1351.9500	-37.27	-20	PASS
	1802.6000	-37.41	-20	PASS
	2253.2500	-35.13	-20	PASS
	2703.9000	-34.61	-20	PASS
	3154.5500	-33.01	-20	PASS
	3605.2000	-34.16	-20	PASS
	4055.8500	-34.21	-20	PASS
	4506.5000	-34.52	-20	PASS
	3479.0000	-31.16	-20	PASS

**Phase II: 459.125 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 22, 90**

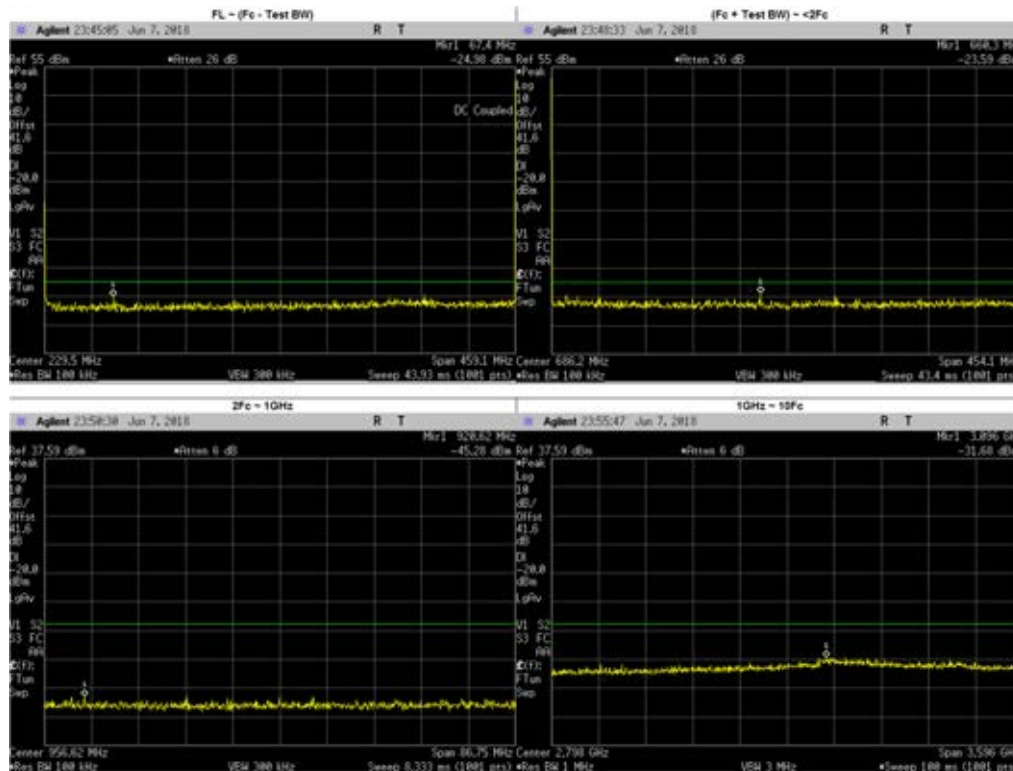


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	67.4000	-24.98	-20	PASS
(Fc + Test BW) ~ <2Fc	666.3000	-23.59	-20	PASS
2Fc ~ 1GHz	918.2500	-46.35	-20	PASS
	920.6200	-45.28	-20	PASS
1GHz ~ 10Fc	1836.5000	-36.32	-20	PASS
	2754.7500	-33.51	-20	PASS
	3673.0000	-34.59	-20	PASS
	4591.2500	-34.50	-20	PASS
	3211.6940	-32.20	-20	PASS
	2298.2460	36.35	-20	PASS
	1377.3750	-33.88	-20	PASS
	2295.6250	-35.25	-20	PASS
	3213.8750	-32.96	-20	PASS
	4132.1250	-33.28	-20	PASS
3096.0000	-31.68	-20	PASS	

**Phase II: 459.125 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 22, 90**

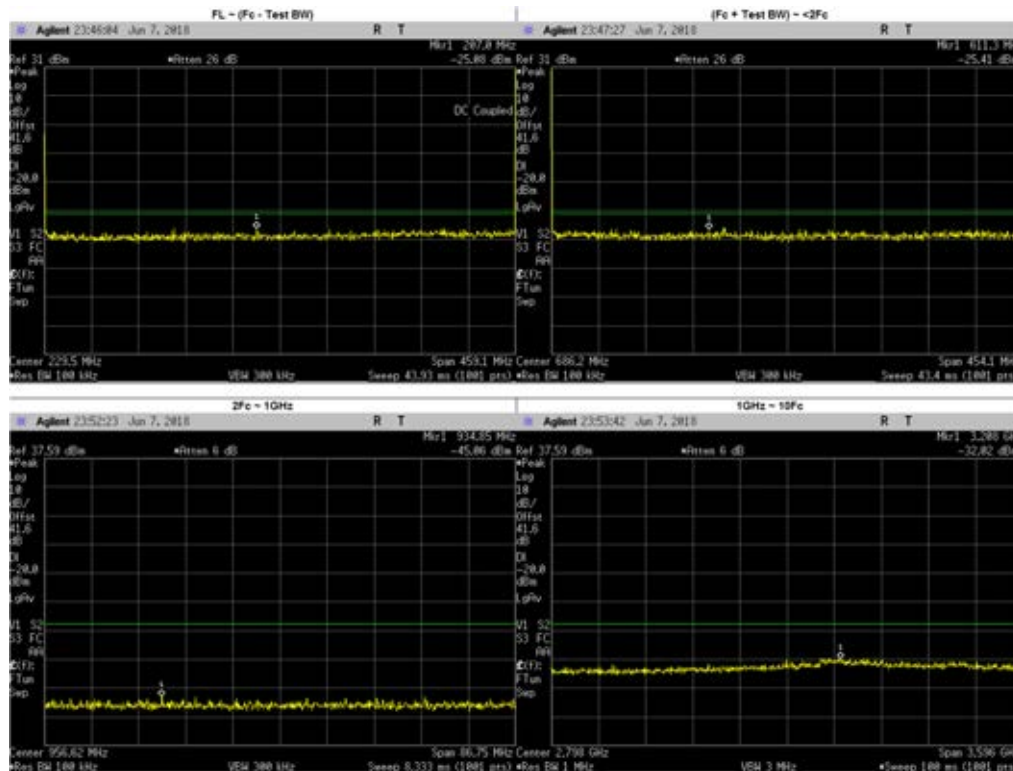


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	207.0000	-25.08	-20	PASS
(Fc + Test BW) ~ <2Fc	611.3000	-25.41	-20	PASS
2Fc ~ 1GHz	918.2500	-57.35	-20	PASS
	934.8500	-45.06	-20	PASS
1GHz ~ 10Fc	1377.3750	-35.92	-20	PASS
	1836.5000	-35.77	-20	PASS
	2295.6250	-35.03	-20	PASS
	2754.7500	-34.28	-20	PASS
	3213.8750	-32.96	-20	PASS
	3673.0000	-33.61	-20	PASS
	4132.1250	-33.76	-20	PASS
	4591.2500	-34.72	-20	PASS
	3208.0000	-32.02	-20	PASS

**Phase II: 467.775 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90, RSS 119**

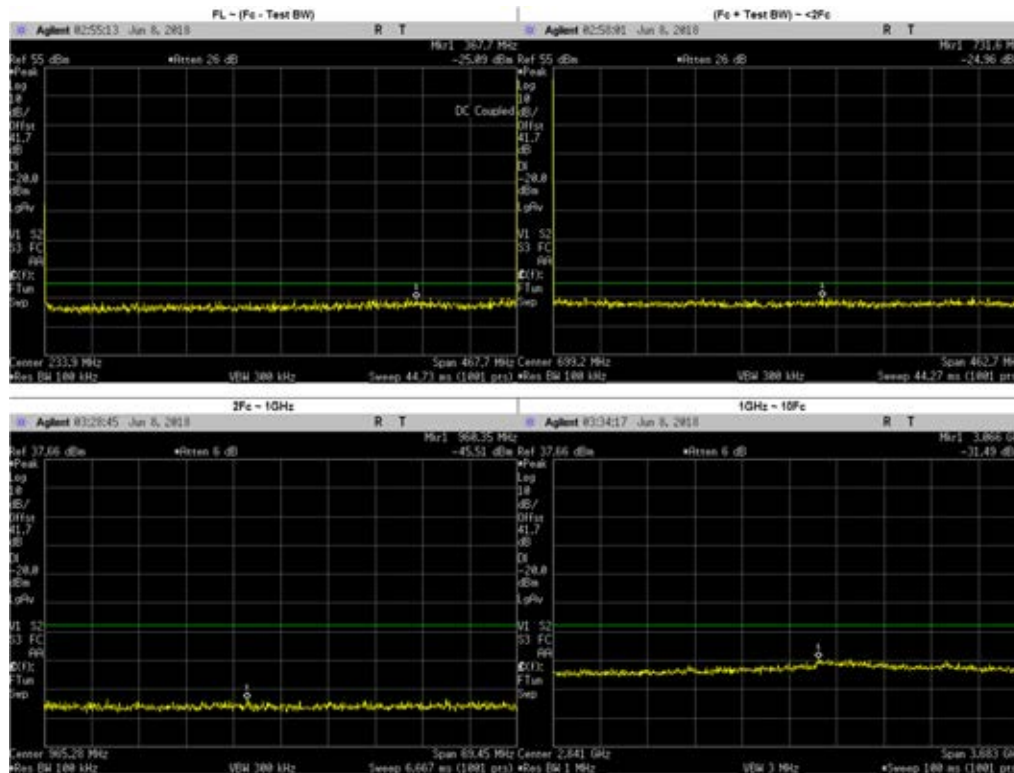


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	367.7000	-25.09	-20	PASS
(Fc + Test BW) ~ <2Fc	731.6000	-24.96	-20	PASS
2Fc ~ 1GHz	935.5500	-42.26	-20	PASS
	960.3500	-45.51	-20	PASS
1GHz ~ 10Fc	1871.1000	-36.36	-20	PASS
	2806.6500	-36.82	-20	PASS
	3742.2000	-36.10	-20	PASS
	4209.9750	-35.40	-20	PASS
	4677.7500	-33.88	-20	PASS
	1403.3250	-32.68	-20	PASS
	2338.8750	-34.49	-20	PASS
	3274.4250	-32.43	-20	PASS
	3066.0000	-31.49	-20	PASS

**Phase II: 467.775 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 90, RSS 119**

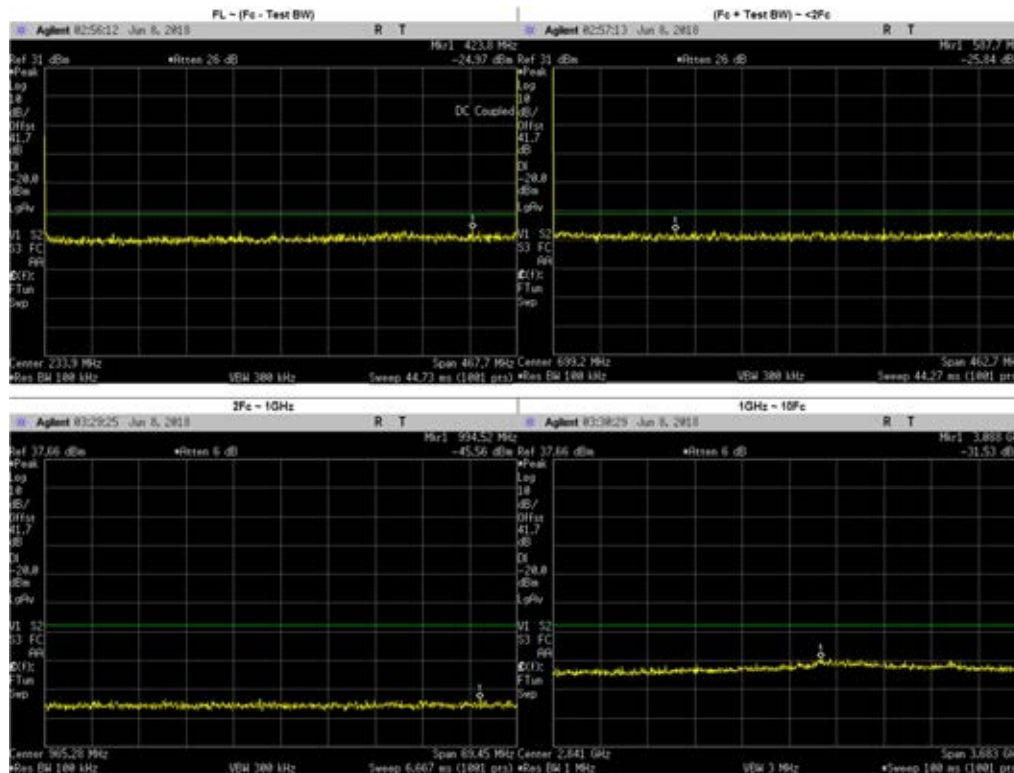


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	423.8000	-24.97	-20	PASS
(Fc + Test BW) ~ <2Fc	587.7000	-25.84	-20	PASS
2Fc ~ 1GHz	935.5500	-57.05	-20	PASS
	994.5200	-45.56	-20	PASS
1GHz ~ 10Fc	1403.3250	-37.02	-20	PASS
	1871.1000	-37.22	-20	PASS
	2338.8750	-35.63	-20	PASS
	2806.6500	-35.92	-20	PASS
	3274.4250	-34.22	-20	PASS
	3742.2000	-35.26	-20	PASS
	4209.9750	-35.76	-20	PASS
	4677.7500	-36.52	-20	PASS
	3088.0000	-31.53	-20	PASS

**Phase II: 459.025 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 22**

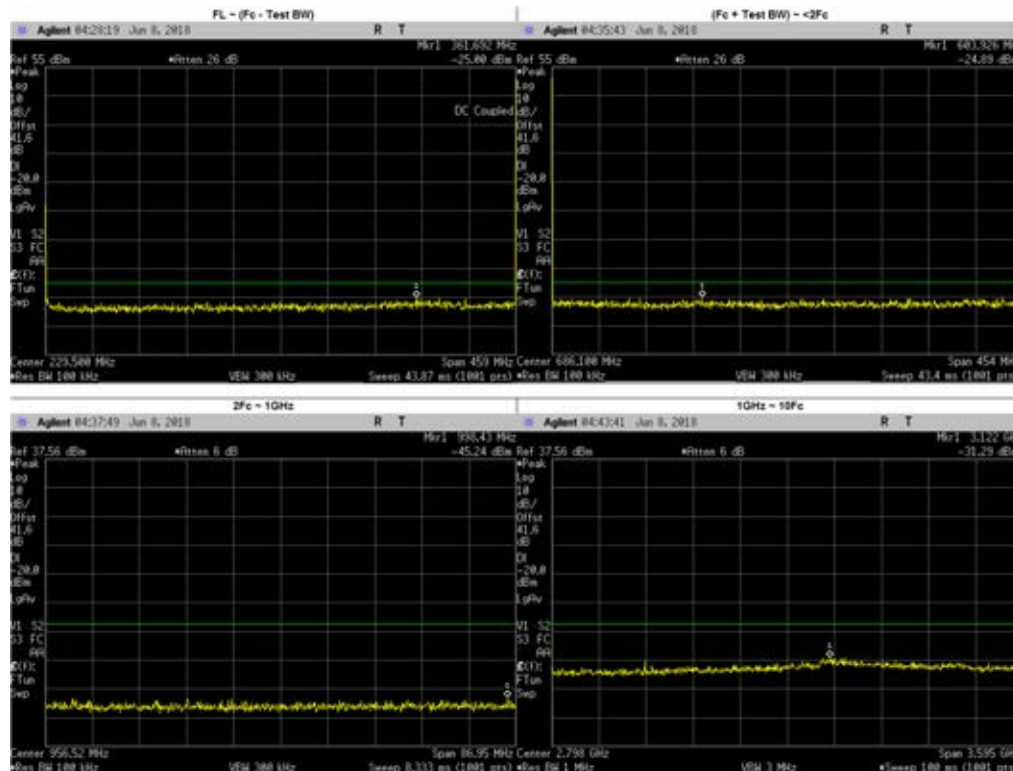


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	361.6920	-25.00	-20	PASS
(Fc + Test BW) ~ <2Fc	603.9260	-24.89	-20	PASS
2Fc ~ 1GHz	918.0500	-46.12	-20	PASS
	998.4300	-45.24	-20	PASS
1GHz ~ 10Fc	1836.1000	-36.77	-20	PASS
	2754.1500	-35.96	-20	PASS
	3672.2000	-35.89	-20	PASS
	4590.2500	-36.81	-20	PASS
	1377.0750	-36.11	-20	PASS
	2295.1250	-36.37	-20	PASS
	3213.1750	-32.96	-20	PASS
	4131.2250	-34.12	-20	PASS
	3122.0000	-31.29	-20	PASS

**Phase II: 459.025 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 22**

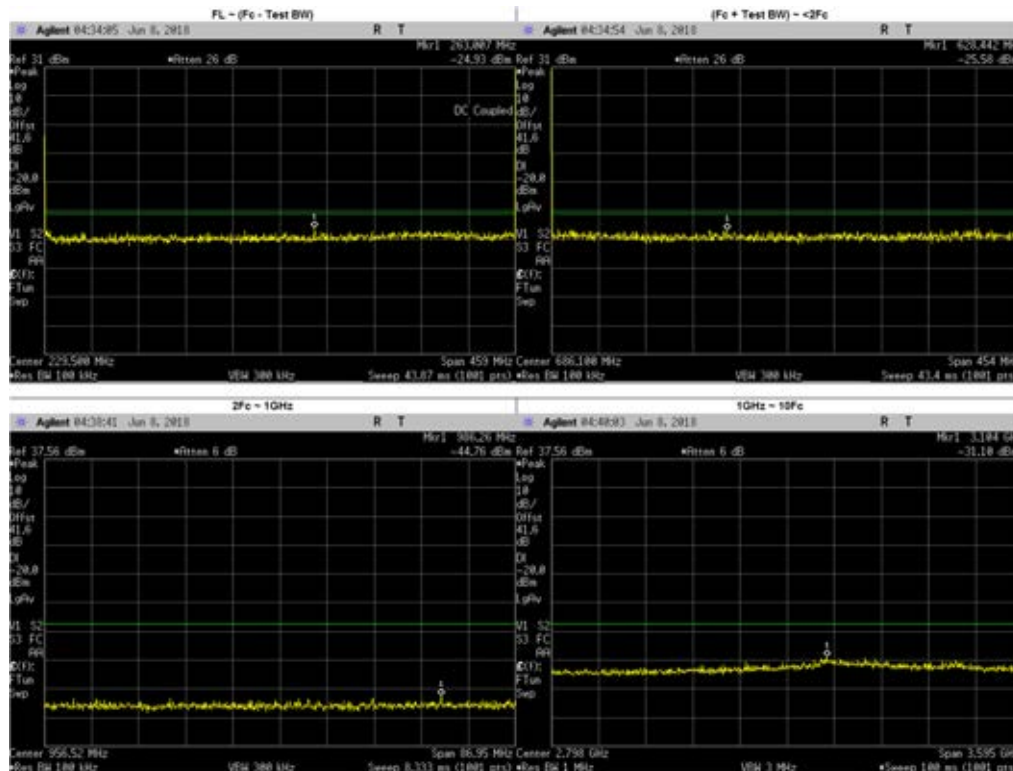


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	263.0070	-24.93	-20	PASS
(Fc + Test BW) ~ <2Fc	628.4420	-25.58	-20	PASS
2Fc ~ 1GHz	918.0500	-47.16	-20	PASS
	986.2600	-44.76	-20	PASS
1GHz ~ 10Fc	1377.0750	-36.89	-20	PASS
	1836.1000	-35.15	-20	PASS
	2295.1250	-35.44	-20	PASS
	2754.1500	-34.60	-20	PASS
	3213.1750	-33.54	-20	PASS
	3672.2000	-34.81	-20	PASS
	4131.2250	-34.23	-20	PASS
	4590.2500	-35.16	-20	PASS
	3104.0000	-31.10	-20	PASS

**Phase II: 459.65 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 22**

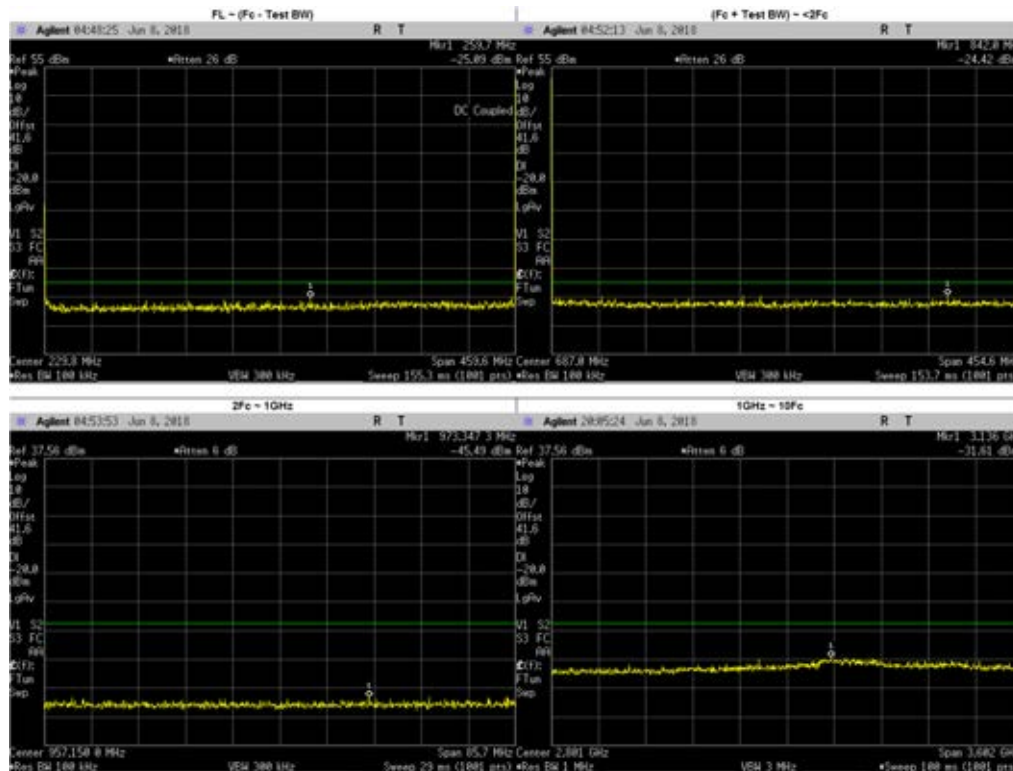

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	259.7000	-25.09	-20	PASS
(Fc + Test BW) ~ <2Fc	842.0000	-24.42	-20	PASS
2Fc ~ 1GHz	919.3000	-45.79	-20	PASS
	973.3470	-45.49	-20	PASS
1GHz ~ 10Fc	1838.6000	-36.26	-20	PASS
	2757.9000	-35.89	-20	PASS
	3677.2000	-36.00	-20	PASS
	4136.8500	-35.12	-20	PASS
	4596.5000	-36.21	-20	PASS
	1378.9500	-35.44	-20	PASS
	2298.2500	-35.73	-20	PASS
	3219.0000	-33.50	-20	PASS
	3136.0000	-31.61	-20	PASS

**Phase II: 459.65 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 22**

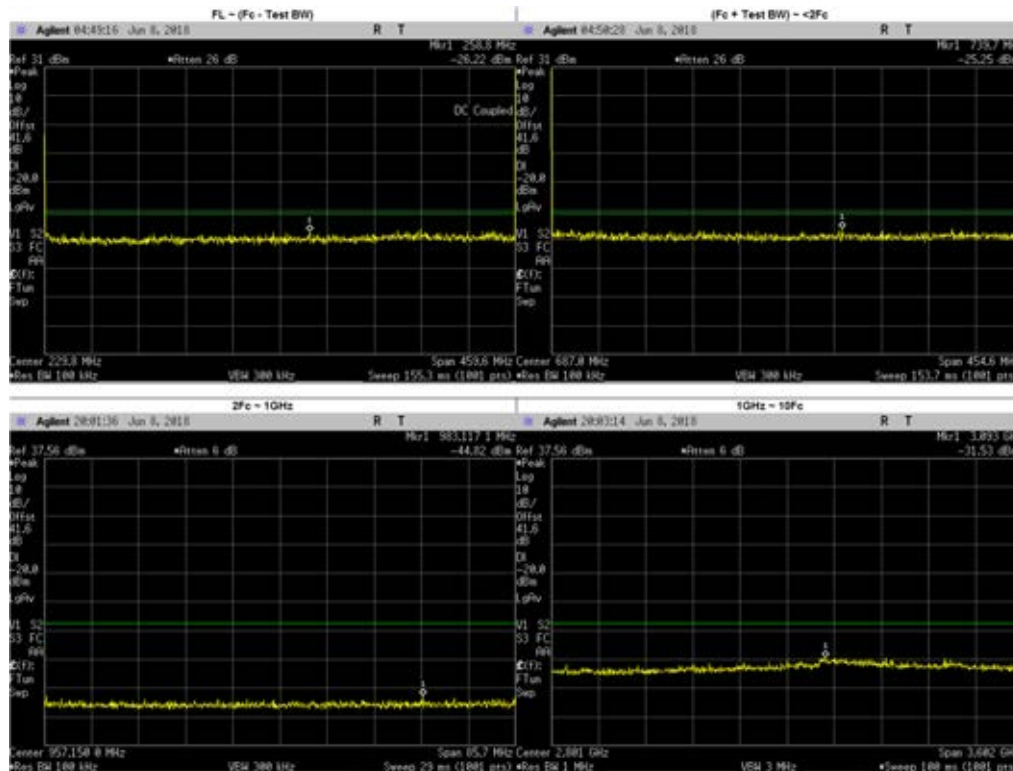

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL ~ (Fc - Test BW)	258.8000	-26.22	-20	PASS
(Fc + Test BW) ~ <2Fc	739.7000	-25.25	-20	PASS
2Fc ~ 1GHz	919.3000	-47.42	-20	PASS
	983.1171	-44.82	-20	PASS
1GHz ~ 10Fc	1378.9500	-37.55	-20	PASS
	1838.6000	-37.50	-20	PASS
	2298.2500	-37.98	-20	PASS
	2757.9000	-37.60	-20	PASS
	3217.5500	-35.42	-20	PASS
	3677.2000	-36.79	-20	PASS
	4136.8500	-36.41	-20	PASS
	4596.5000	-36.63	-20	PASS
	3093.0000	-31.53	-20	PASS

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Radiated Spurious Emission

6.11.1. Test Setup

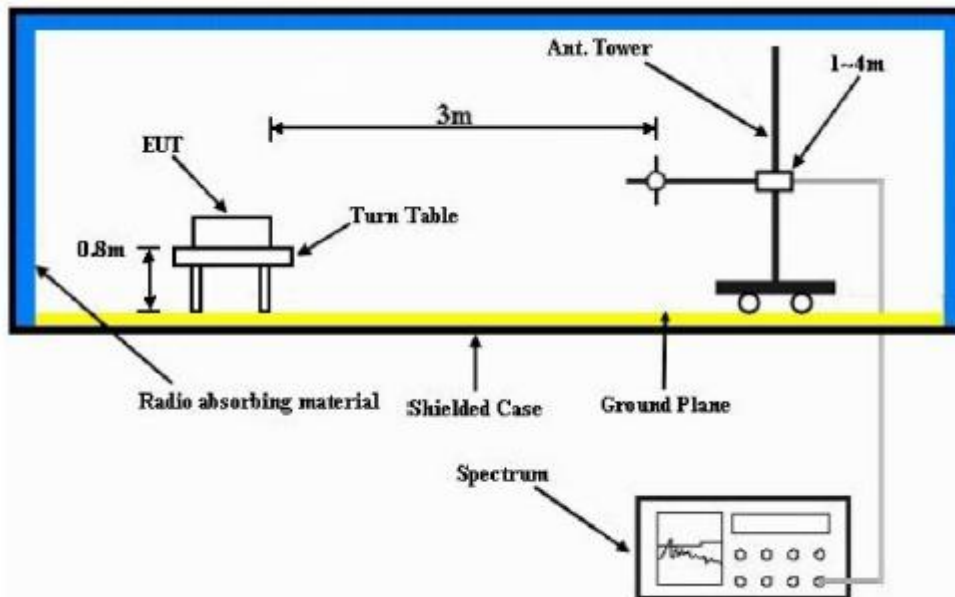

- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for frequencies < 1GHz) and 1.5m (for frequencies > 1GHz) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.


6.11.2. Test Result (Analog)

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN S/N: 681P3A0078 SR:08878-EMC-00004
 Battery Part No: NA Accy Part No: 3466-HMN1079G-3,
 3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
 Test Mode: TX Analog
 380.012500 MHz 25 kHz 120.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-13.0000	-83.4551 **	-83.9713 **
1140.0375	-13.0000	-62.4160 **	-60.1894 **
1408.2000	-13.0000	-53.9800 *	-42.3000 *
1424.1000	-13.0000	-53.9900 *	-43.8800 *
1440.0000	-13.0000	-54.4500 *	-44.5300 *
1456.2000	-13.0000	-53.9900 *	-43.6100 *
1520.0500	-13.0000	-52.3300 *	-50.4300 *
1770.8900	-13.0000	-56.0200 *	-56.2000 *
1900.0625	-13.0000	-49.7700 *	-42.3100 *
2280.0750	-13.0000	-48.4800 *	-40.1900 *
2660.0875	-13.0000	-54.1698 **	-54.2917 **
3040.1000	-13.0000	-48.2300 *	-48.4200 *
3420.1125	-13.0000	-52.8825 **	-51.9349 **
3800.1250	-13.0000	-53.1355 **	-51.8888 **

RADIATED SPURIOUS EMISSIONS

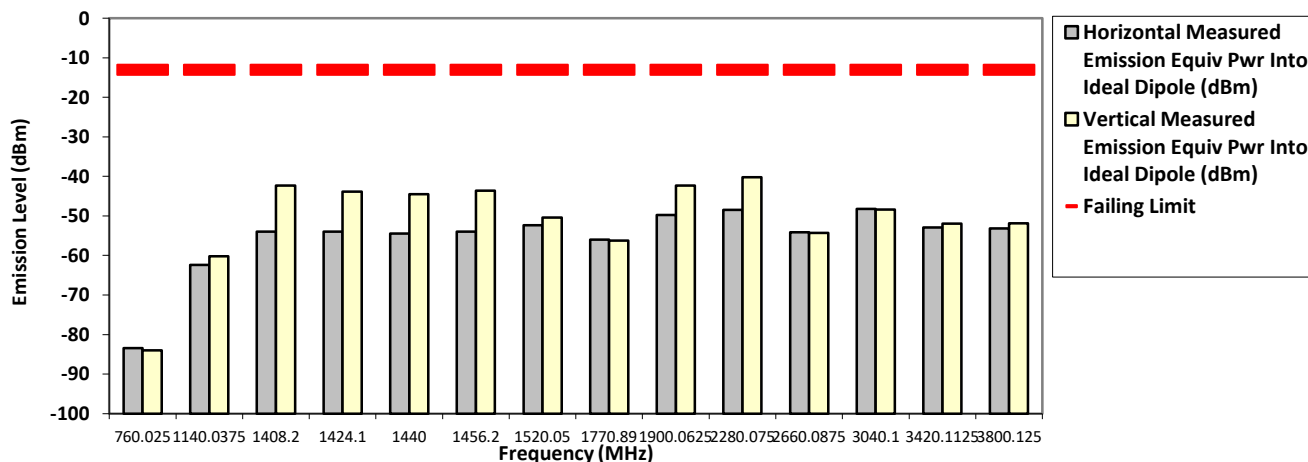

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Tue, May 01, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX Analog

380.012500 MHz **25 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
760.0250	-13.0000	-84.0745 **	-84.1013 **
1140.0375	-13.0000	-62.9407 **	-63.7349 **
1407.7500	-13.0000	-55.5100 *	-45.6400 *
1424.1000	-13.0000	-54.2700 *	-40.9200 *
1440.1500	-13.0000	-53.4000 *	-39.6600 *
1456.2000	-13.0000	-55.0800 *	-41.0500 *
1520.0500	-13.0000	-53.3400 *	-51.3000 *
1769.8400	-13.0000	-55.7100 *	-56.0900 *
1900.0625	-13.0000	-60.3062 **	-59.8562 **
2280.0750	-13.0000	-58.9278 **	-58.4404 **
2560.4500	-13.0000	-50.9100 *	-43.5200 *
2568.8500	-13.0000	-49.7100 *	-41.1200 *
2660.0875	-13.0000	-55.0843 **	-56.5210 **
3040.1000	-13.0000	-55.3306 **	-54.6290 **
3420.1125	-13.0000	-53.9877 **	-54.3072 **
3800.1250	-13.0000	-54.3050 **	-51.9324 **

RADIATED SPURIOUS EMISSIONS

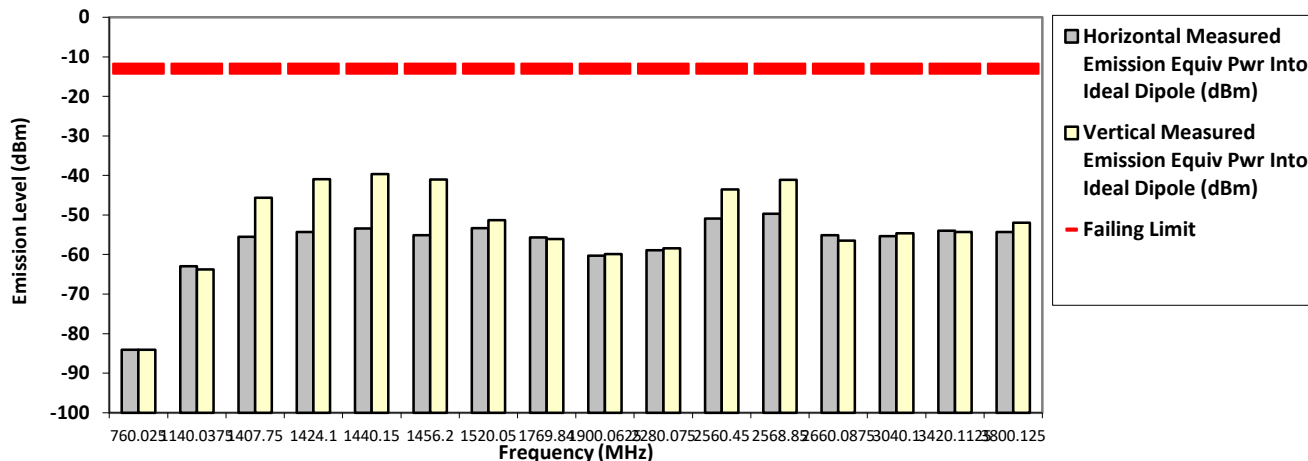

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Tue, May 01, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX Analog
406.200000 MHz **25 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-83.9777 **	-83.8772 **
1218.6000	-13.0000	-61.4845 **	-60.4194 **
1424.2800	-13.0000	-54.9200 *	-46.4200 *
1440.0800	-13.0000	-54.0100 *	-42.1600 *
1456.0800	-13.0000	-55.3100 *	-42.7800 *
1535.8700	-13.0000	-53.2200 *	-50.4000 *
1624.8000	-13.0000	-50.2700 *	-50.0000 *
1769.2600	-13.0000	-55.7100 *	-56.2300 *
2031.0000	-13.0000	-51.9400 *	-40.9000 *
2437.2000	-13.0000	-44.2600 *	-43.1200 *
2843.4000	-13.0000	-55.9339 **	-56.0153 **
3249.6000	-13.0000	-53.2391 **	-52.7552 **
3655.8000	-13.0000	-54.2398 **	-54.5595 **
4062.0000	-13.0000	-51.4007 **	-52.5310 **

RADIATED SPURIOUS EMISSIONS

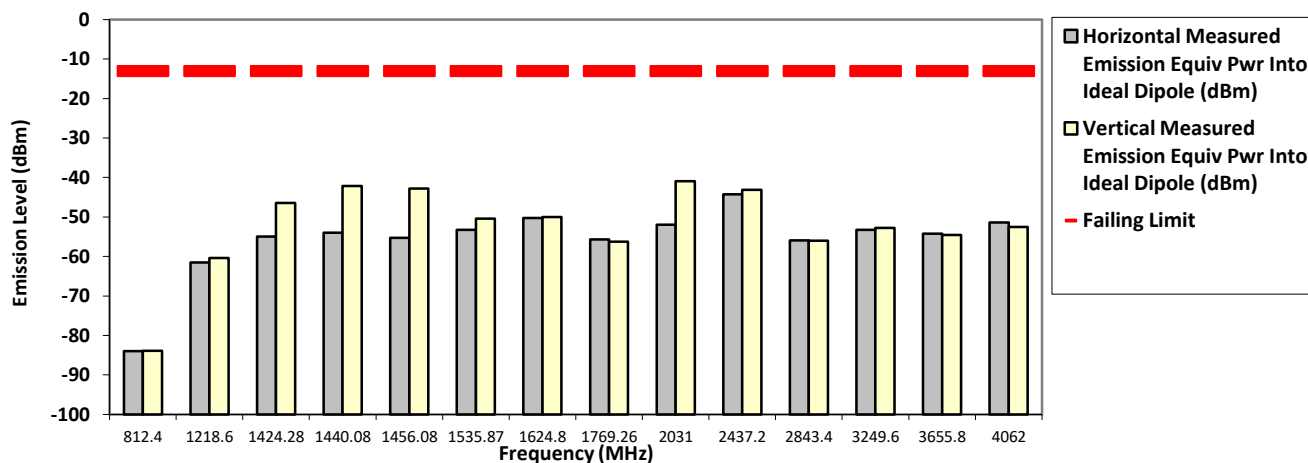

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Tue, May 01, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN S/N: 681P3A0078 SR:08878-EMC-00004
 Battery Part No: NA Accy Part No: 3466-HMN1079G-3,
 3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
 Test Mode: TX Analog
 406.200000 MHz 25 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-85.0146 **	-85.1828 **
1218.6000	-13.0000	-61.9311 **	-60.6143 **
1407.8800	-13.0000	-56.8400 *	-41.3000 *
1424.0800	-13.0000	-55.6900 *	-48.1800 *
1440.2800	-13.0000	-52.4100 *	-40.5100 *
1456.0800	-13.0000	-50.3500 *	-45.2400 *
1624.8000	-13.0000	-61.3612 **	-61.6488 **
1769.0600	-13.0000	-55.6700 *	-56.5600 *
2031.0000	-13.0000	-57.7498 **	-56.6076 **
2437.2000	-13.0000	-57.9348 **	-56.8065 **
2843.4000	-13.0000	-55.3687 **	-55.9319 **
3249.6000	-13.0000	-52.5341 **	-53.4260 **
3655.8000	-13.0000	-54.0338 **	-54.5648 **
4062.0000	-13.0000	-52.3560 **	-51.9981 **

RADIATED SPURIOUS EMISSIONS

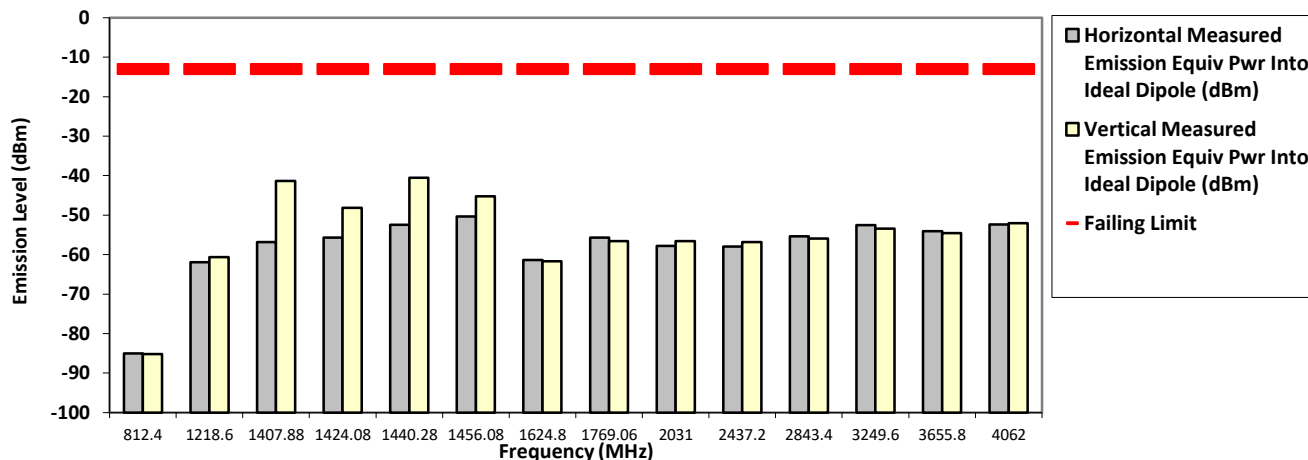

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, May 02, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB


Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX Analog
450.650000 MHz **25 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
901.3000	-13.0000	-84.4877 **	-83.8508 **
1351.9500	-13.0000	-44.8600 *	-41.2700 *
1407.6800	-13.0000	-55.9000 *	-46.6500 *
1424.0800	-13.0000	-55.6400 *	-44.2900 *
1440.0800	-13.0000	-55.8800 *	-43.5200 *
1535.8700	-13.0000	-54.5600 *	-46.8000 *
1802.6000	-13.0000	-46.3600 *	-46.5800 *
2253.2500	-13.0000	-49.8100 *	-42.9800 *
2703.9000	-13.0000	-50.8700 *	-45.5800 *
3154.5500	-13.0000	-43.5100 *	-40.0600 *
3605.2000	-13.0000	-54.1606 **	-53.1250 **
4055.8500	-13.0000	-51.8505 **	-51.7957 **
4506.5000	-13.0000	-52.1363 **	-49.8481 **

RADIATED SPURIOUS EMISSIONS

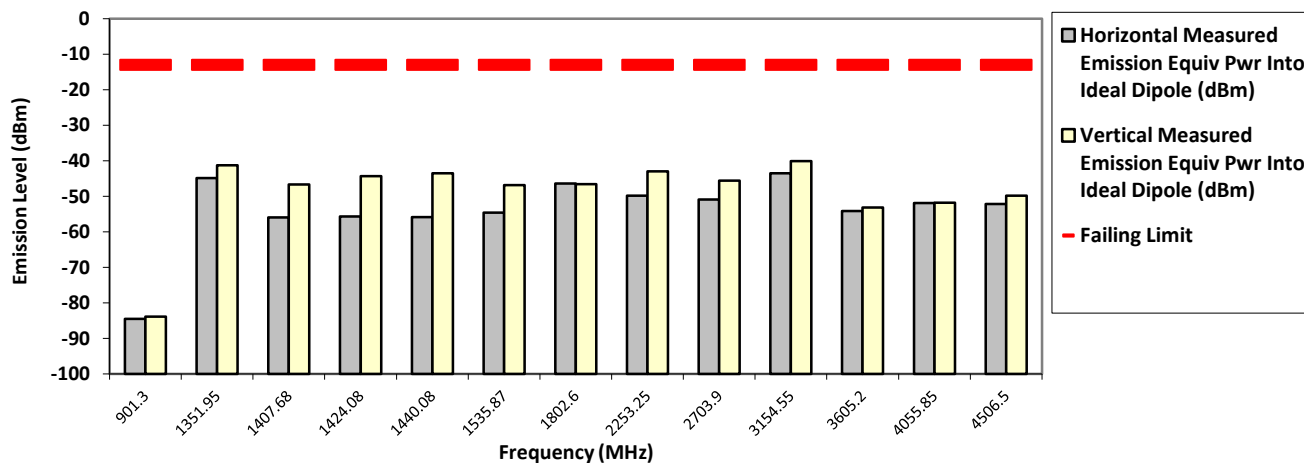

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Tue, May 01, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN

S/N: 681P3A0078

SR:08878-EMC-00004

Battery Part No: NA

Accy Part No: 3466-HMN1079G-3,

3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1

Test Mode: TX Analog


450.650000 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
901.3000	-13.0000	-83.8932 **	-83.7918 **
1098.1000	-13.0000	-47.1900 *	-38.6500 *
1351.9500	-13.0000	-60.5708 **	-61.4537 **
1407.8800	-13.0000	-56.8500 *	-41.4200 *
1424.2800	-13.0000	-50.5800 *	-43.9200 *
1440.2800	-13.0000	-55.8400 *	-39.9500 *
1456.2800	-13.0000	-47.4600 *	-44.8400 *
1536.2700	-13.0000	-53.5400 *	-47.9000 *
1802.6000	-13.0000	-60.2061 **	-60.4046 **
2253.2500	-13.0000	-57.2197 **	-58.4984 **
2561.6200	-13.0000	-51.4100 *	-35.9200 *
2703.9000	-13.0000	-55.7812 **	-55.2110 **
3154.5500	-13.0000	-52.7830 **	-53.6195 **
3605.2000	-13.0000	-54.8028 **	-54.9596 **
4055.8500	-13.0000	-51.0650 **	-51.5147 **
4506.5000	-13.0000	-50.8266 **	-50.8523 **

RADIATED SPURIOUS EMISSIONS

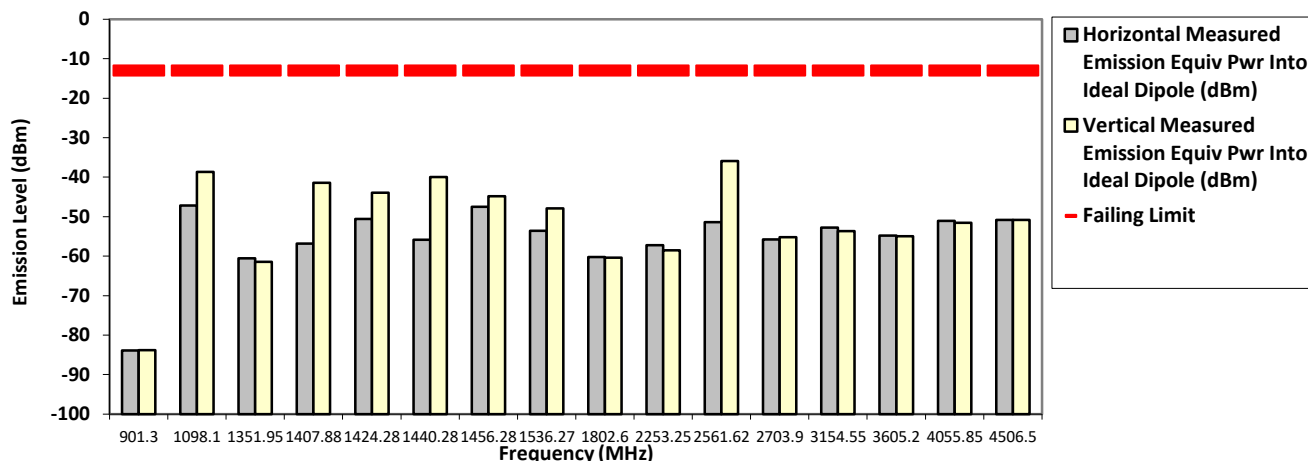

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, May 02, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN

S/N: 681P3A0078

SR:08878-EMC-00004

Battery Part No: NA **Accy Part No: 3466-HMN4079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1

Test Mode: TX Analog


459.125000 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-82.4090 **	-84.0337 **
1024.1000	-13.0000	-51.4100 *	-36.8500 *
1377.3750	-13.0000	-61.5974 **	-61.2226 **
1407.6800	-13.0000	-56.1800 *	-40.7400 *
1423.8800	-13.0000	-49.7600 *	-46.6400 *
1440.0800	-13.0000	-43.2700 *	-45.2300 *
1455.8800	-13.0000	-48.5500 *	-42.0400 *
1536.0700	-13.0000	-53.2300 *	-52.5000 *
1769.6600	-13.0000	-44.3700 *	-49.1800 *
1836.5000	-13.0000	-60.3202 **	-59.8377 **
2295.6250	-13.0000	-57.4202 **	-57.8520 **
2754.7500	-13.0000	-56.4363 **	-55.4781 **
3213.8750	-13.0000	-51.8125 **	-54.1414 **
3673.0000	-13.0000	-54.6617 **	-54.7565 **
4132.1250	-13.0000	-52.0528 **	-52.0583 **
4591.2500	-13.0000	-49.9634 **	-50.4416 **

RADIATED SPURIOUS EMISSIONS

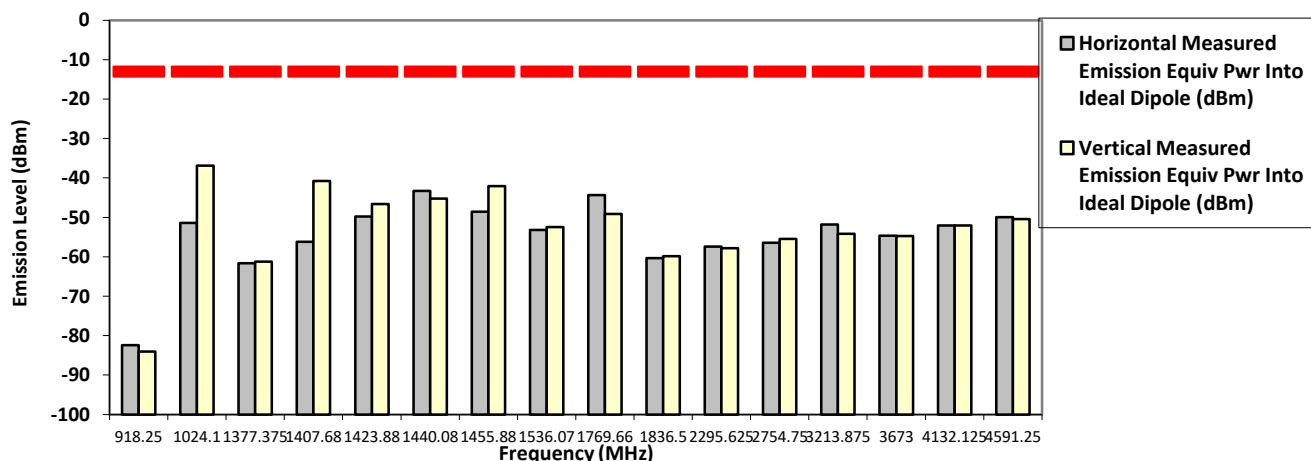

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Wed, May 02, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX Analog
467.775000 MHz **25 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-82.9245 **	-82.7920 **
1403.3250	-13.0000	-44.5200 *	-39.7300 *
1424.0800	-13.0000	-55.9400 *	-53.5300 *
1535.8700	-13.0000	-56.1300 *	-54.0000 *
1871.1000	-13.0000	-43.5900 *	-42.3900 *
2338.8750	-13.0000	-45.4700 *	-46.0300 *
2806.6500	-13.0000	-49.6700 *	-45.6500 *
3274.4250	-13.0000	-51.1667 **	-51.7959 **
3742.2000	-13.0000	-54.1721 **	-52.3899 **
4209.9750	-13.0000	-51.5732 **	-50.2545 **
4677.7500	-13.0000	-50.1434 **	-49.8455 **

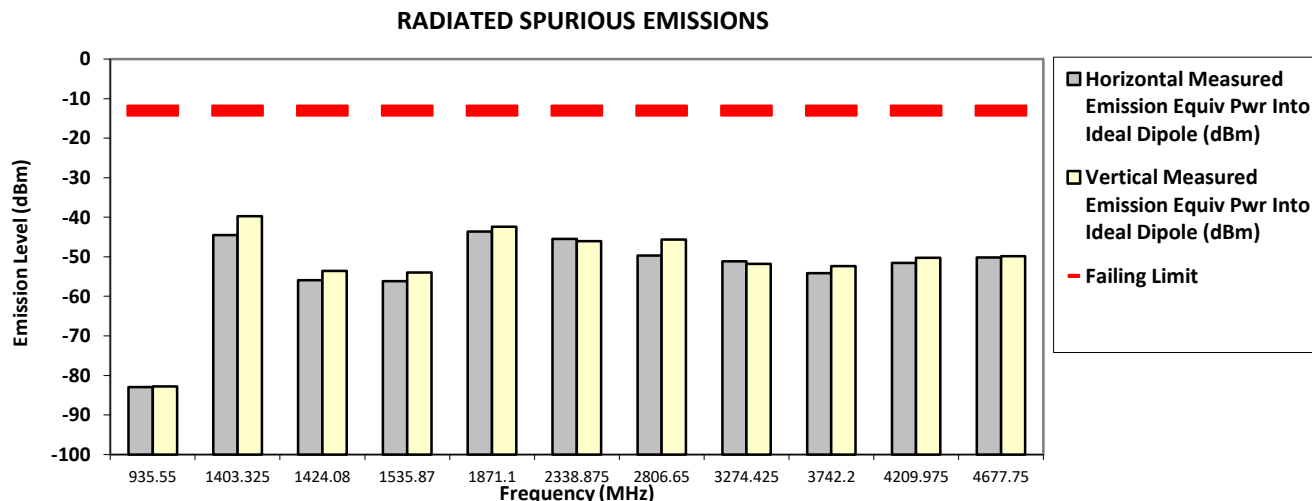

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sun, May 20, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 22.6 Hum(%RH): 69.9

System MU: 5.01 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX Analog
467.775000 MHz **25 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-83.6597 **	-83.0018 **
1403.3250	-13.0000	-61.7286 **	-60.5836 **
1407.8800	-13.0000	-55.1000 *	-46.7400 *
1424.0800	-13.0000	-54.2700 *	-42.6600 *
1440.2800	-13.0000	-55.0100 *	-44.2900 *
1456.0800	-13.0000	-49.7300 *	-44.6100 *
1535.8700	-13.0000	-53.9900 *	-49.3700 *
1871.1000	-13.0000	-58.8374 **	-60.3129 **
2338.8750	-13.0000	-57.6184 **	-57.8123 **
2569.0200	-13.0000	-51.5700 *	-37.5000 *
2806.6500	-13.0000	-55.6660 **	-56.7362 **
3274.4250	-13.0000	-53.2846 **	-53.6057 **
3742.2000	-13.0000	-53.7141 **	-53.1591 **
4209.9750	-13.0000	-52.2650 **	-51.5562 **
4677.7500	-13.0000	-50.0536 **	-51.1633 **

RADIATED SPURIOUS EMISSIONS

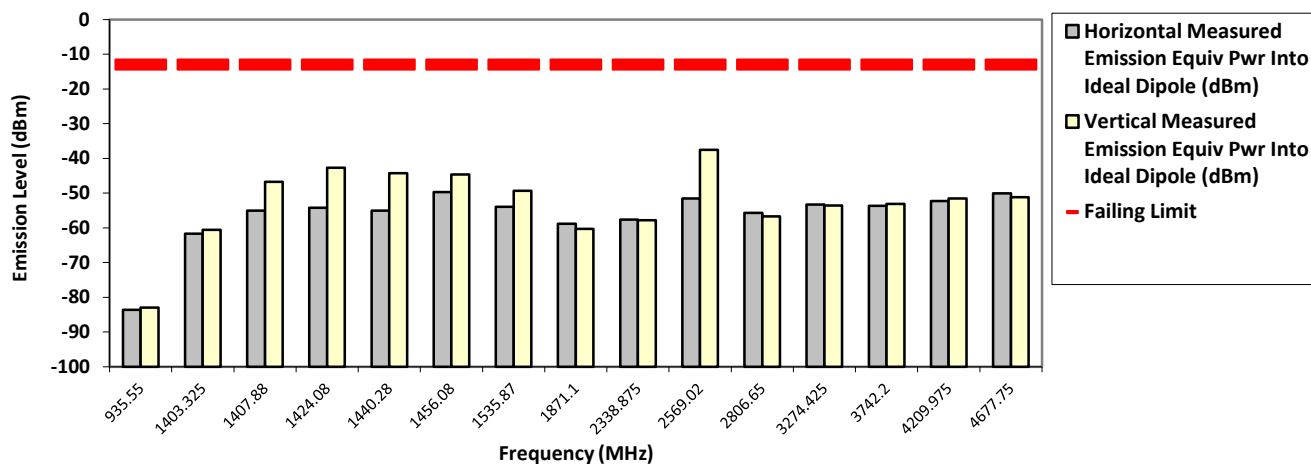

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Wed, May 02, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


6.11.3. Test Result (Digital)

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM
380.012500 MHz **12.5 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-84.5949 **	-84.6133 **
1005.0200	-20.0000	-49.5800 *	-38.3600 *
1061.2700	-20.0000	-46.7200 *	-44.5700 *
1074.4470	-20.0000	-48.4000 *	-36.8600 *
1140.0375	-20.0000	-62.2377 **	-60.7110 **
1424.1000	-20.0000	-52.3500 *	-49.7800 *
1456.2000	-20.0000	-50.2500 *	-44.6900 *
1520.0500	-20.0000	-52.9400 *	-43.3400 *
1536.1500	-20.0000	-54.4300 *	-49.6400 *
1900.0625	-20.0000	-45.6900 *	-46.6400 *
2280.0750	-20.0000	-44.3900 *	-37.3500 *
2660.0875	-20.0000	-54.6539 **	-53.2985 **
3040.1000	-20.0000	-50.4095 **	-50.6310 **
3420.1125	-20.0000	-52.9426 **	-53.0826 **
3800.1250	-20.0000	-52.5475 **	-53.4290 **

RADIATED SPURIOUS EMISSIONS

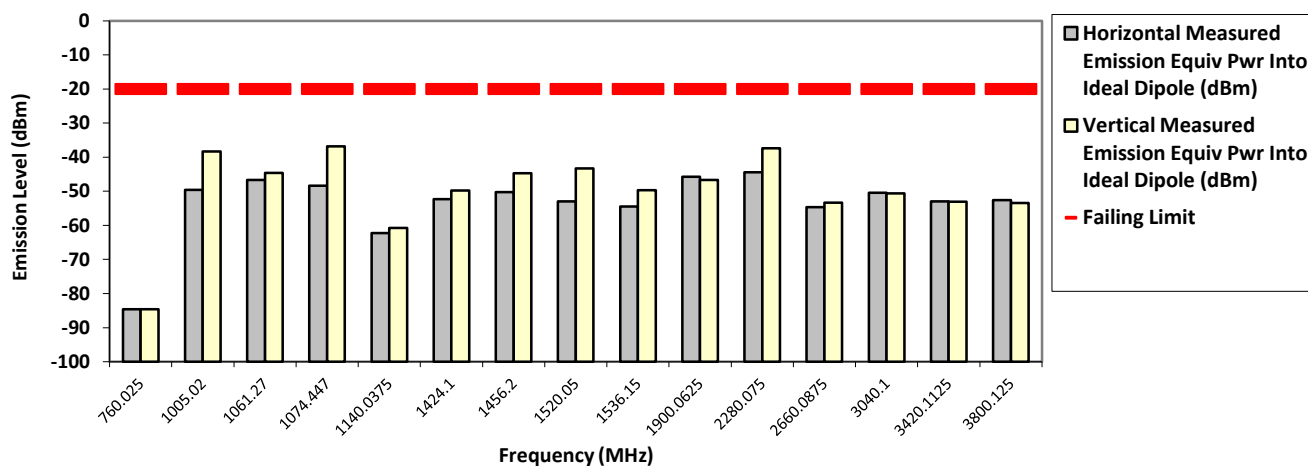

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, May 02, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN S/N: 681P3A0078 SR:08878-EMC-00004
 Battery Part No: NA Accy Part No: 3466-HMN1079G-3,
 3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
 Test Mode: TX APCO Digital C4FM


380.012500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-85.0089 **	-85.3357 **
1140.0375	-20.0000	-61.6368 **	-62.3491 **
1424.1000	-20.0000	-54.3800 *	-43.0900 *
1456.0500	-20.0000	-54.6800 *	-46.2400 *
1519.8000	-20.0000	-55.1900 *	-45.1700 *
1535.7000	-20.0000	-53.8400 *	-50.8800 *
1769.2400	-20.0000	-56.0600 *	-54.0100 *
1900.0625	-20.0000	-59.3415 **	-58.7240 **
2280.0750	-20.0000	-57.5238 **	-55.9539 **
2660.0875	-20.0000	-55.7468 **	-55.5511 **
3040.1000	-20.0000	-54.5959 **	-55.2356 **
3420.1125	-20.0000	-54.3061 **	-54.6209 **
3800.1250	-20.0000	-53.0996 **	-53.0086 **

RADIATED SPURIOUS EMISSIONS

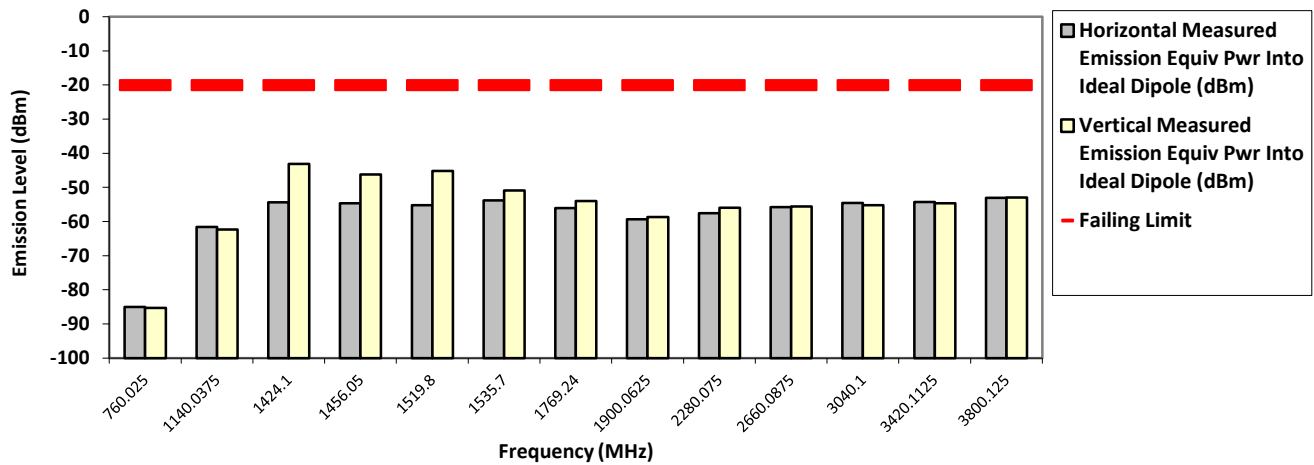

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Wed, May 02, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 22.6 Hum(%RH): 70.3

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM

406.200000 MHz **12.5 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
812.4000	-20.0000	-83.5451 **	-84.1793 **
1220.4900	-20.0000	-54.6200 *	-60.1500 *
1424.2800	-20.0000	-53.7100 *	-53.7500 *
1439.8800	-20.0000	-54.4800 *	-54.7900 *
1456.0800	-20.0000	-54.6300 *	-54.2300 *
1536.0700	-20.0000	-55.2000 *	-54.4100 *
1624.8000	-20.0000	-54.4400 *	-50.0100 *
1769.4600	-20.0000	-56.0200 *	-50.5800 *
2031.0000	-20.0000	-52.3800 *	-51.0200 *
2437.2000	-20.0000	-46.8100 *	-44.0500 *
2843.4000	-20.0000	-56.2531 **	-55.4482 **
3249.6000	-20.0000	-53.9788 **	-53.4839 **
3655.8000	-20.0000	-53.5705 **	-53.5879 **
4062.0000	-20.0000	-51.7278 **	-52.5501 **

RADIATED SPURIOUS EMISSIONS

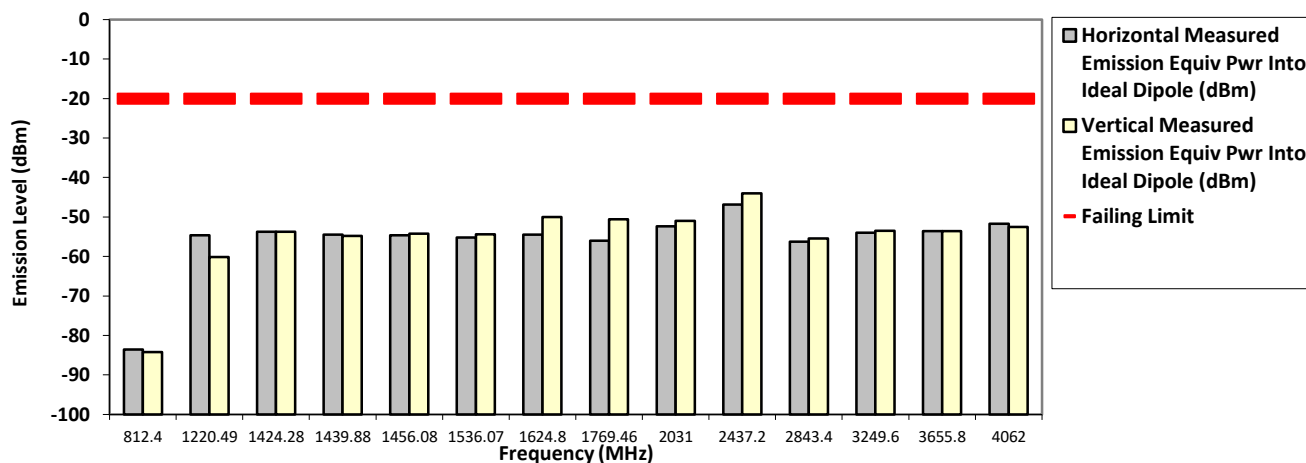

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Fri, May 04, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM

406.200000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-84.5287 **	-84.2947 **
1218.6000	-20.0000	-62.2797 **	-61.2604 **
1408.2800	-20.0000	-54.5900 *	-54.0800 *
1423.8800	-20.0000	-54.8000 *	-52.8700 *
1440.0800	-20.0000	-55.2600 *	-53.9900 *
1456.0800	-20.0000	-55.6300 *	-53.6400 *
1624.8000	-20.0000	-61.1716 **	-61.1146 **
1769.2600	-20.0000	-55.2000 *	-56.1600 *
2031.0000	-20.0000	-57.4496 **	-57.8796 **
2437.2000	-20.0000	-56.0674 **	-57.1575 **
2843.4000	-20.0000	-56.3348 **	-56.2961 **
3249.6000	-20.0000	-54.0772 **	-53.2545 **
3655.8000	-20.0000	-54.4572 **	-53.9654 **
4062.0000	-20.0000	-50.2926 **	-50.2615 **

RADIATED SPURIOUS EMISSIONS

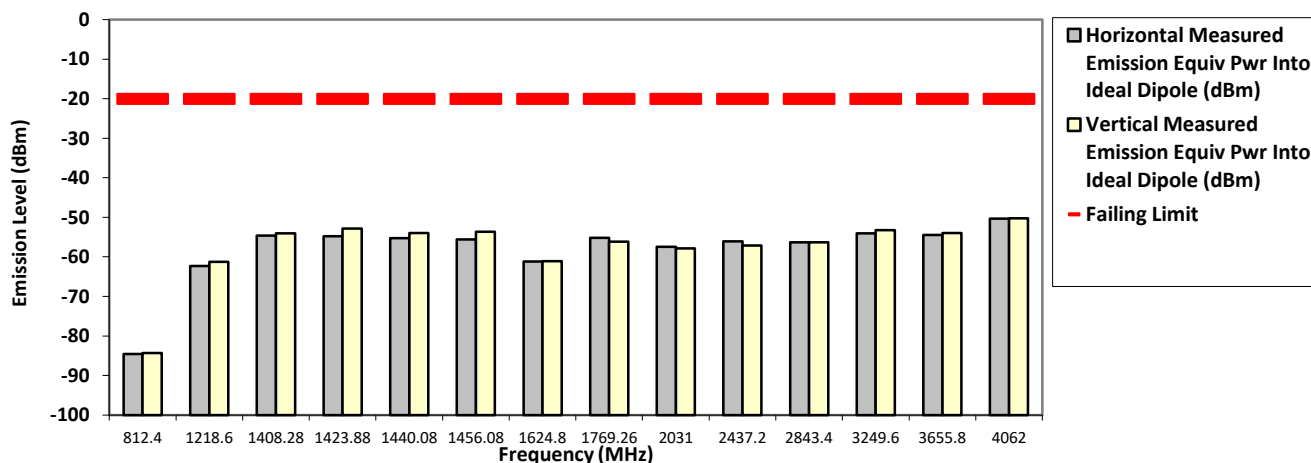

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Fri, May 04, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM

450.650000 MHz **12.5 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-83.2007 **	-83.1787 **
1351.9500	-20.0000	-46.4600 *	-42.0400 *
1424.0800	-20.0000	-55.3200 *	-54.6400 *
1536.0700	-20.0000	-54.4500 *	-54.3200 *
1802.6000	-20.0000	-47.6800 *	-47.8700 *
2253.2500	-20.0000	-51.1000 *	-49.6800 *
2703.9000	-20.0000	-51.4400 *	-50.1600 *
3154.5500	-20.0000	-44.2600 *	-41.1900 *
3605.2000	-20.0000	-55.0146 **	-53.7191 **
4055.8500	-20.0000	-52.1413 **	-50.3164 **
4506.5000	-20.0000	-51.3124 **	-51.3780 **

RADIATED SPURIOUS EMISSIONS

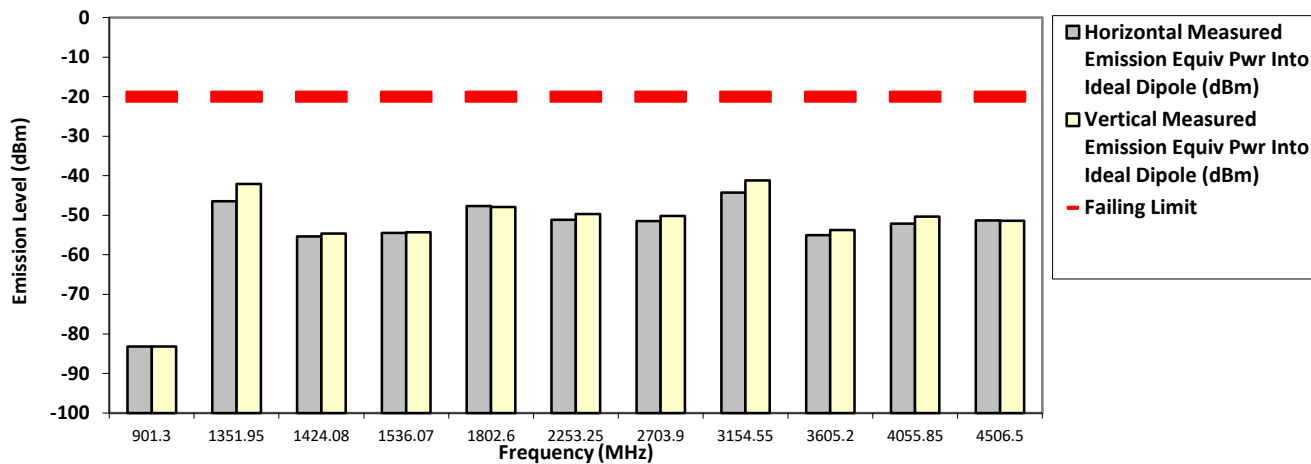

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Fri, May 04, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM

450.650000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
901.3000	-20.0000	-82.7182 **	-84.1468 **
1022.9000	-20.0000	-53.6000 *	-52.7700 *
1030.9000	-20.0000	-53.4500 *	-50.3000 *
1351.9500	-20.0000	-61.2922 **	-61.1061 **
1424.2800	-20.0000	-55.1500 *	-54.0100 *
1536.0700	-20.0000	-54.3500 *	-56.0500 *
1769.4600	-20.0000	-44.1600 *	-48.5800 *
1802.6000	-20.0000	-60.9939 **	-60.4865 **
2253.2500	-20.0000	-58.6276 **	-57.5862 **
2703.9000	-20.0000	-56.3326 **	-56.0628 **
3154.5500	-20.0000	-54.0002 **	-52.8011 **
3605.2000	-20.0000	-54.5927 **	-54.5111 **
4055.8500	-20.0000	-51.6227 **	-52.0806 **
4506.5000	-20.0000	-51.7283 **	-50.9934 **

RADIATED SPURIOUS EMISSIONS

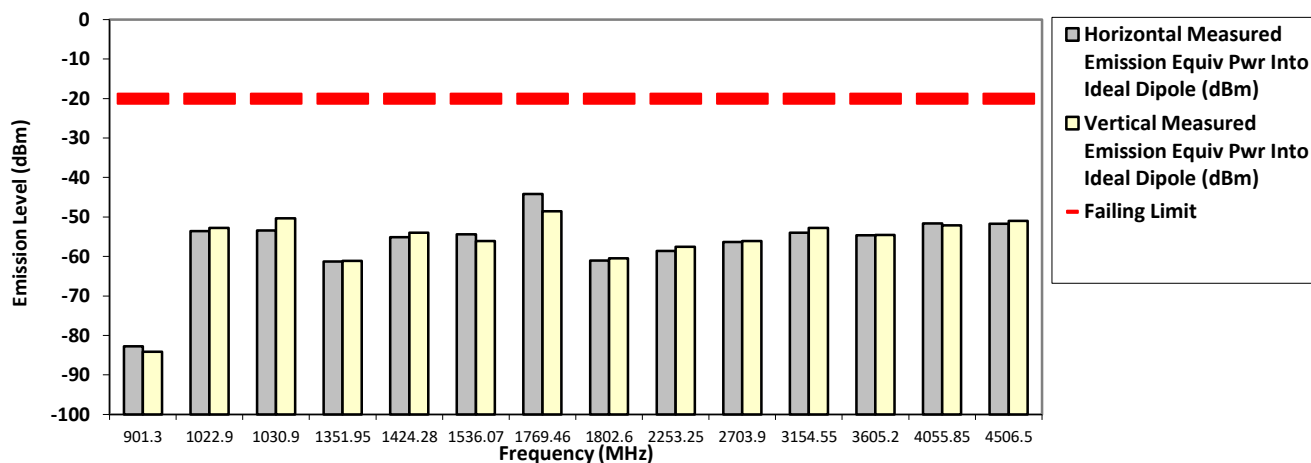

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Fri, May 04, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: G0P0TV0894** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN4079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM

459.125000 MHz 12.5 kHz 60.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-83.2668 **	-84.9564 **
1377.3750	-20.0000	-44.7800 *	-43.8800 *
1836.5000	-20.0000	-49.0100 *	-51.0800 *
2295.6250	-20.0000	-42.5600 *	-42.2700 *
2754.7500	-20.0000	-53.4618 **	-52.8727 **
3213.8750	-20.0000	-53.2217 **	-50.9818 **
3673.0000	-20.0000	-54.5345 **	-53.2292 **
4132.1250	-20.0000	-51.9862 **	-52.5294 **
4591.2500	-20.0000	-50.7878 **	-51.3362 **

RADIATED SPURIOUS EMISSIONS

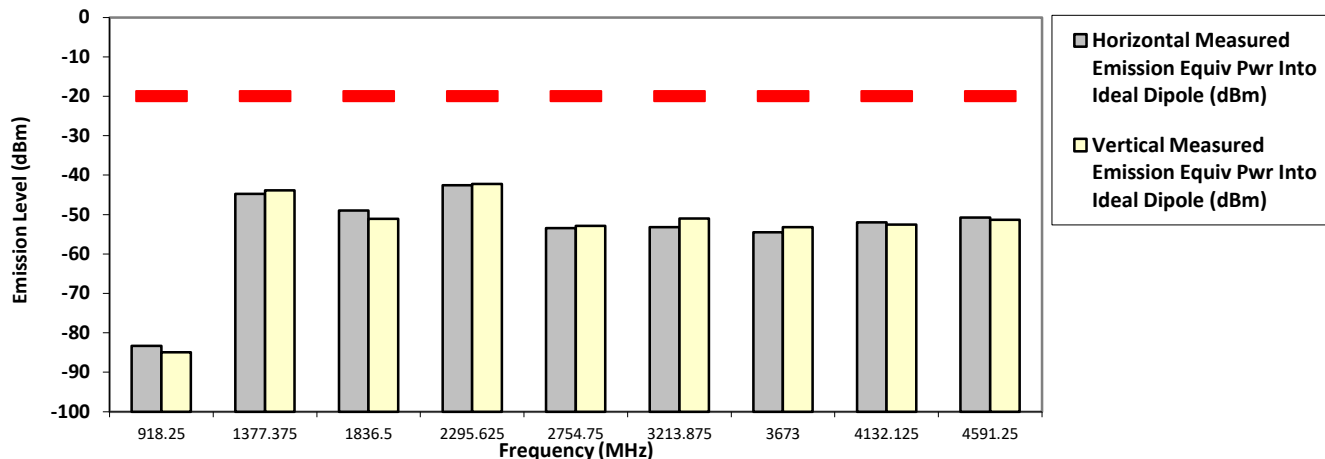

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin & Qawiman Wed, Jul 25, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.5 Hum(%RH): 70.3

System MU: 5.01 dB


Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN S/N: 681P3A0078 SR:08878-EMC-00004
 Battery Part No: NA Accy Part No: 3466-HMN1079G-3,
 3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
 Test Mode: TX APCO Digital C4FM
 459.125000 MHz 12.5 kHz 1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
918.2500	-20.0000	-83.4112 **	-83.1717 **
1377.3750	-20.0000	-61.5469 **	-61.1744 **
1423.8800	-20.0000	-55.5100 *	-54.6600 *
1536.0700	-20.0000	-55.5200 *	-56.3500 *
1768.8600	-20.0000	-49.1300 *	-48.0000 *
1836.5000	-20.0000	-59.9753 **	-59.7646 **
2295.6250	-20.0000	-58.4442 **	-58.5442 **
2754.7500	-20.0000	-55.0843 **	-56.9348 **
3213.8750	-20.0000	-53.2634 **	-53.4906 **
3673.0000	-20.0000	-54.8075 **	-53.5797 **
4132.1250	-20.0000	-52.8664 **	-52.5133 **
4591.2500	-20.0000	-49.5189 **	-50.6707 **

RADIATED SPURIOUS EMISSIONS

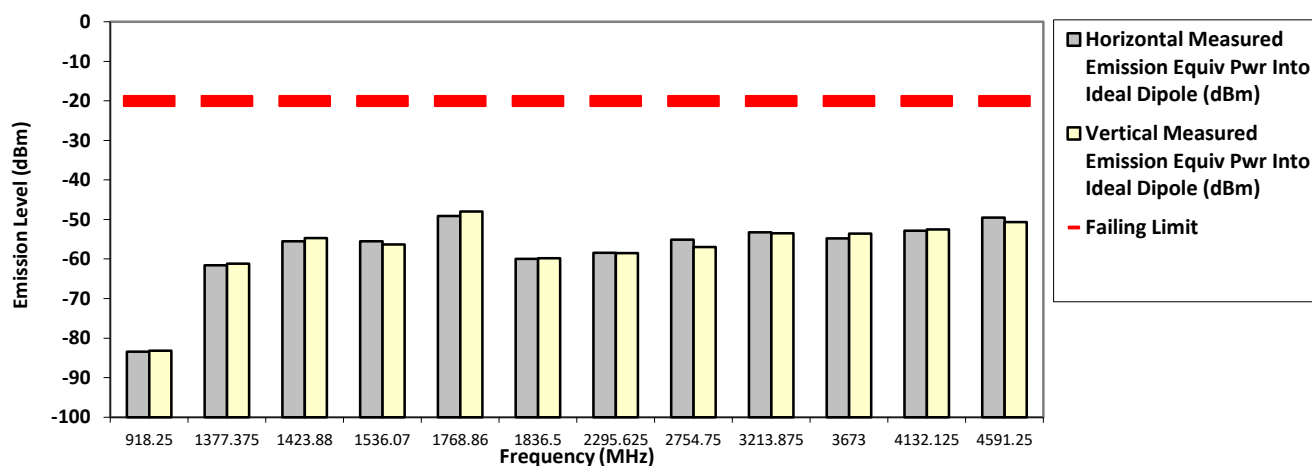

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Fri, May 04, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM

467.775000 MHz **12.5 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-83.2199 **	-83.2460 **
1403.3250	-20.0000	-43.7600 *	-42.2800 *
1424.0300	-20.0000	-54.3000 *	-53.8100 *
1440.0800	-20.0000	-55.5300 *	-56.0600 *
1535.8700	-20.0000	-54.3000 *	-54.4900 *
1769.8600	-20.0000	-55.7400 *	-56.1400 *
1871.1000	-20.0000	-45.8000 *	-43.3300 *
2338.8750	-20.0000	-52.1000 *	-50.5500 *
2806.6500	-20.0000	-55.1004 **	-53.9744 **
3274.4250	-20.0000	-52.7844 **	-52.7134 **
3742.2000	-20.0000	-53.5528 **	-52.5944 **
4209.9750	-20.0000	-50.4064 **	-51.3019 **
4677.7500	-20.0000	-50.8968 **	-49.1863 **

RADIATED SPURIOUS EMISSIONS

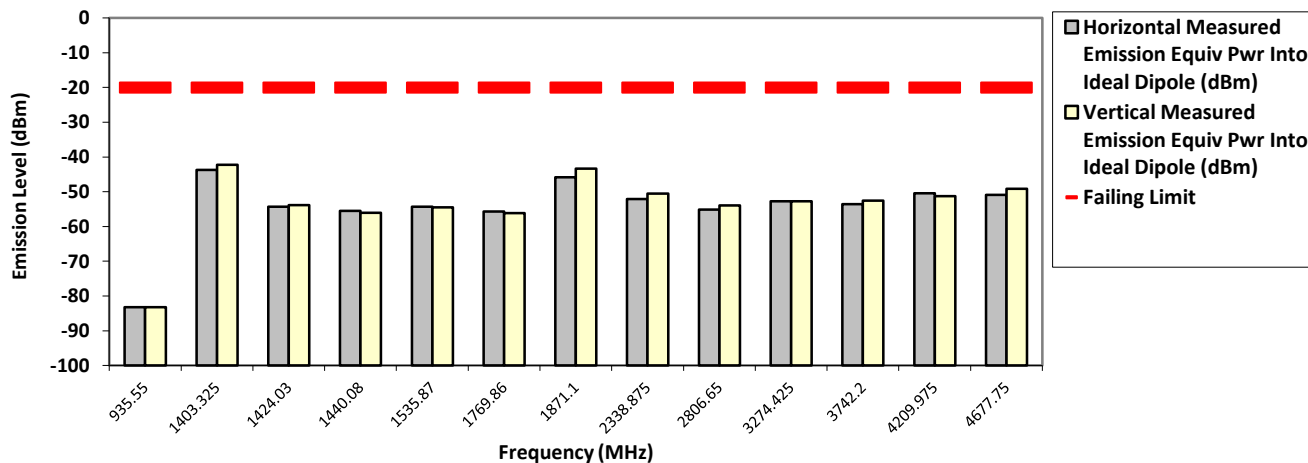

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Fri, May 04, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital C4FM

467.775000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-83.1552 **	-84.1284 **
1403.3250	-20.0000	-61.0911 **	-60.4597 **
1424.0800	-20.0000	-55.2900 *	-54.5600 *
1440.2800	-20.0000	-56.2400 *	-56.0800 *
1455.6800	-20.0000	-55.4200 *	-55.0500 *
1770.2600	-20.0000	-55.7500 *	-55.9400 *
1871.1000	-20.0000	-60.0746 **	-59.7850 **
2338.8750	-20.0000	-58.2750 **	-58.2363 **
2806.6500	-20.0000	-55.6548 **	-56.3904 **
3274.4250	-20.0000	-54.0042 **	-54.2580 **
3742.2000	-20.0000	-53.0923 **	-53.8797 **
4209.9750	-20.0000	-51.5653 **	-51.7271 **
4677.7500	-20.0000	-49.4815 **	-50.1661 **

RADIATED SPURIOUS EMISSIONS

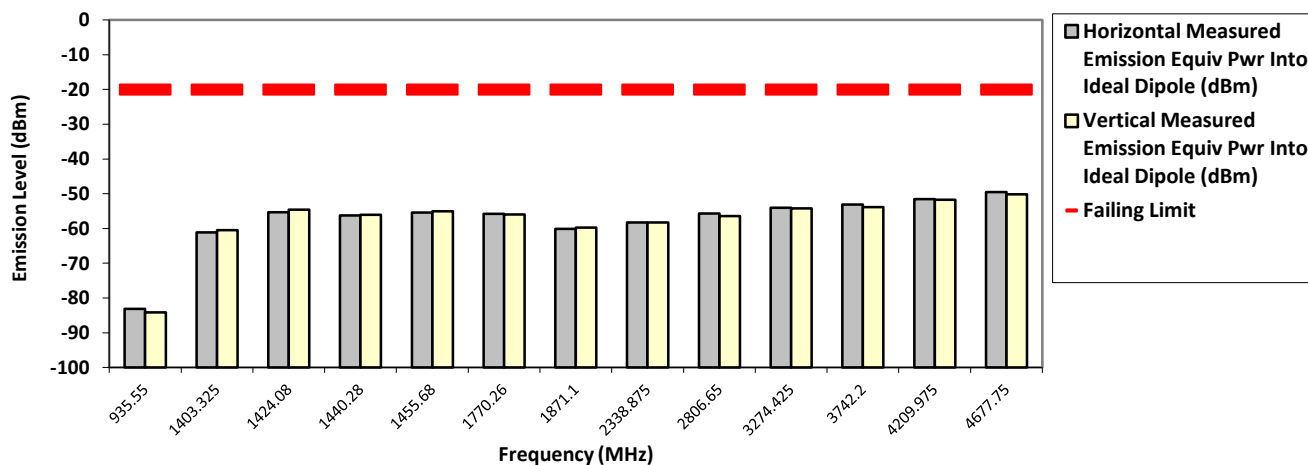

The data presented here was taken using the substitution method as found in the ANSI C63.26 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Fri, May 04, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

380.012500 MHz **12.5 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-84.6603 **	-83.2096 **
1140.0375	-20.0000	-62.7013 **	-62.9494 **
1408.0500	-20.0000	-54.4700 *	-54.9000 *
1423.8000	-20.0000	-52.9400 *	-53.4200 *
1440.0000	-20.0000	-53.3100 *	-54.4400 *
1455.9000	-20.0000	-54.1600 *	-54.3400 *
1520.0500	-20.0000	-58.2761 **	-57.6694 **
1535.8500	-20.0000	-55.8200 *	-53.8900 *
1900.0625	-20.0000	-59.3459 **	-58.2617 **
2280.0750	-20.0000	-58.0535 **	-58.0172 **
2660.0875	-20.0000	-55.2708 **	-55.4339 **
3040.1000	-20.0000	-54.6281 **	-53.5323 **
3420.1125	-20.0000	-54.8930 **	-53.8220 **
3800.1250	-20.0000	-53.1305 **	-53.6601 **

RADIATED SPURIOUS EMISSIONS

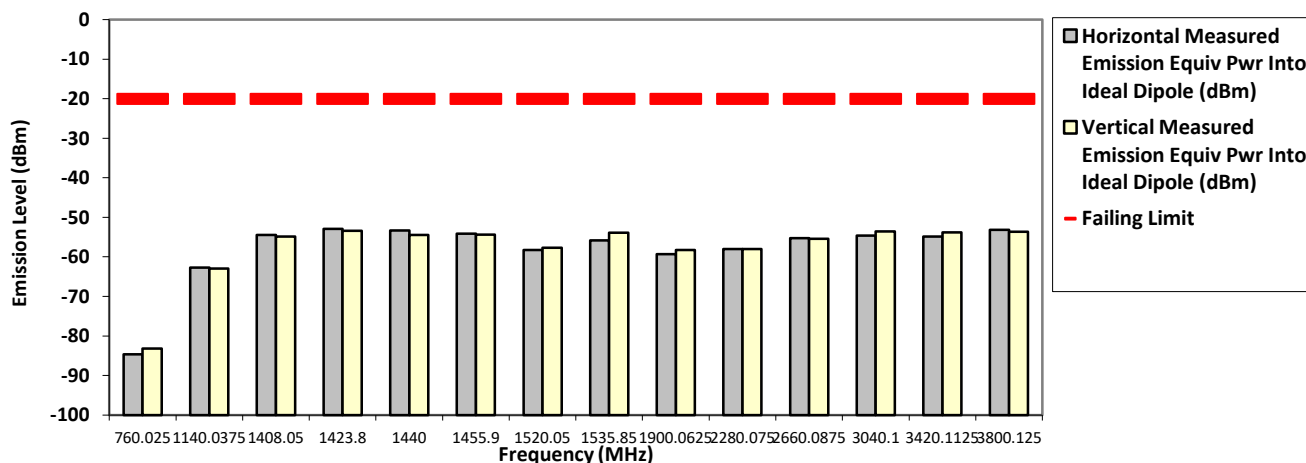

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

380.012500 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-83.9993 **	-83.9822 **
1140.0375	-20.0000	-63.6217 **	-61.7359 **
1424.1000	-20.0000	-53.4600 *	-53.1500 *
1439.7000	-20.0000	-54.2800 *	-54.4700 *
1455.9000	-20.0000	-54.7600 *	-54.4200 *
1520.0500	-20.0000	-58.5126 **	-57.7839 **
1535.8500	-20.0000	-56.3100 *	-54.7200 *
1900.0625	-20.0000	-59.4532 **	-58.7654 **
2280.0750	-20.0000	-58.4608 **	-58.3098 **
2660.0875	-20.0000	-55.2493 **	-56.6010 **
3040.1000	-20.0000	-54.4852 **	-54.0960 **
3420.1125	-20.0000	-53.5051 **	-53.3334 **
3800.1250	-20.0000	-53.0789 **	-53.1684 **

RADIATED SPURIOUS EMISSIONS

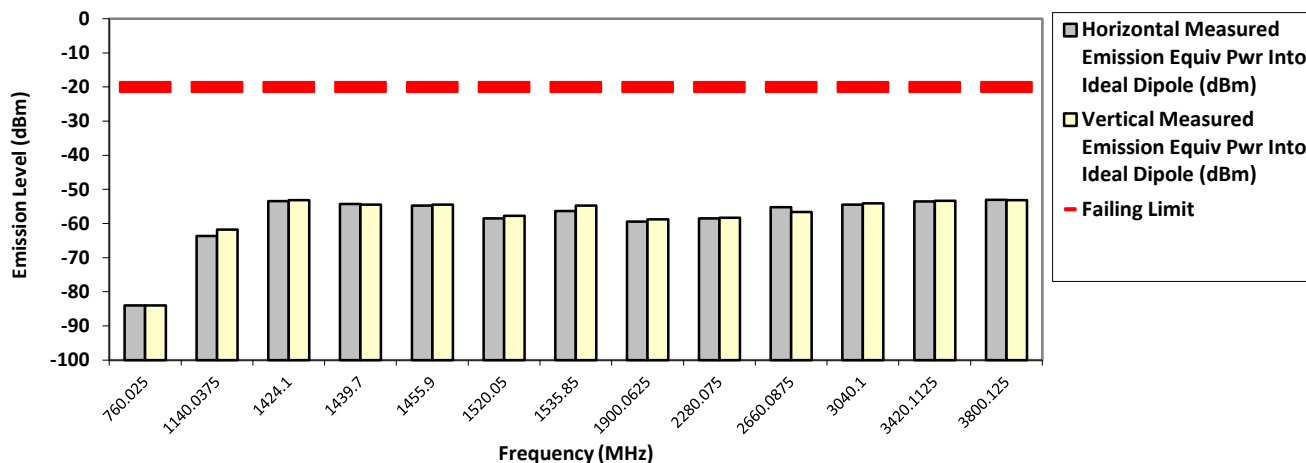

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

406.200000 MHz **12.5 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-84.6371 **	-84.8272 **
1218.6000	-20.0000	-60.4258 **	-60.3337 **
1408.0800	-20.0000	-55.3800 *	-55.4800 *
1424.0800	-20.0000	-54.2800 *	-53.5900 *
1440.0800	-20.0000	-55.1900 *	-55.2000 *
1456.2800	-20.0000	-55.5000 *	-54.7100 *
1488.0800	-20.0000	-56.9300 *	-55.2700 *
1624.8000	-20.0000	-53.3300 *	-49.9400 *
2031.0000	-20.0000	-51.7200 *	-46.8500 *
2437.2000	-20.0000	-39.9400 *	-38.0000 *
2843.4000	-20.0000	-55.9681 **	-55.0500 **
3249.6000	-20.0000	-52.0699 **	-51.9566 **
3655.8000	-20.0000	-54.1270 **	-53.6329 **
4062.0000	-20.0000	-52.3978 **	-52.0868 **

RADIATED SPURIOUS EMISSIONS

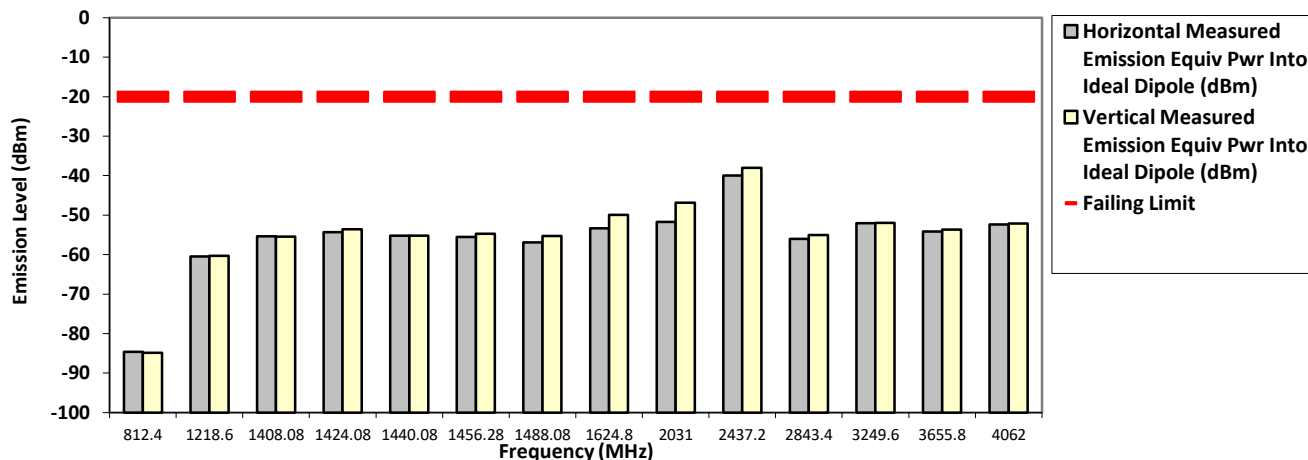

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

406.200000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-84.8341 **	-84.2352 **
1218.6000	-20.0000	-61.4239 **	-62.2126 **
1408.0800	-20.0000	-56.3800 *	-55.9600 *
1424.0800	-20.0000	-54.8500 *	-53.8100 *
1439.8800	-20.0000	-55.7200 *	-55.2900 *
1520.6700	-20.0000	-55.8000 *	-55.7700 *
1536.0700	-20.0000	-53.8600 *	-53.5000 *
1624.8000	-20.0000	-60.1526 **	-61.9190 **
2031.0000	-20.0000	-57.9214 **	-57.8424 **
2437.2000	-20.0000	-57.3099 **	-57.8946 **
2843.4000	-20.0000	-56.4995 **	-56.6886 **
3249.6000	-20.0000	-54.1653 **	-54.9764 **
3655.8000	-20.0000	-53.9675 **	-55.7310 **
4062.0000	-20.0000	-52.3402 **	-52.8199 **

RADIATED SPURIOUS EMISSIONS

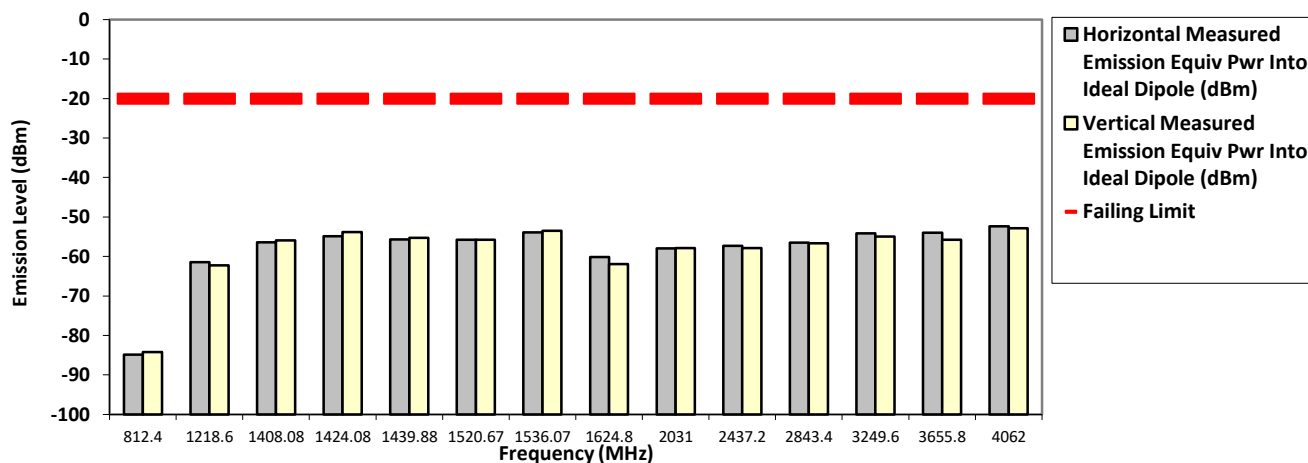

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
 Model Number: M37TXS9PW1AN S/N: 681P3A0078 SR:08878-EMC-00004
 Battery Part No: NA Accy Part No: 3466-HMN1079G-3,
 3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
 Test Mode: TX APCO Digital Phase II

450.650000 MHz 12.5 kHz 120.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-83.7231 **	-83.9187 **
1351.9500	-20.0000	-43.9700 *	-39.9700
1424.0800	-20.0000	-52.9200 *	-53.7900 *
1536.2700	-20.0000	-53.9100 *	-55.1000 *
1769.0600	-20.0000	-55.8000 *	-56.4800 *
1771.6600	-20.0000	-56.2200 *	-56.6100 *
1802.6000	-20.0000	-45.6900 *	-45.9700 *
2253.2500	-20.0000	-41.8600 *	-41.1400 *
2703.9000	-20.0000	-51.0100 *	-46.9100 *
3154.5500	-20.0000	-46.1900 *	-42.0000 *
3605.2000	-20.0000	-54.4575 **	-53.8471 **
4055.8500	-20.0000	-52.3250 **	-49.9389 **
4506.5000	-20.0000	-51.9745 **	-51.0882 **

RADIATED SPURIOUS EMISSIONS

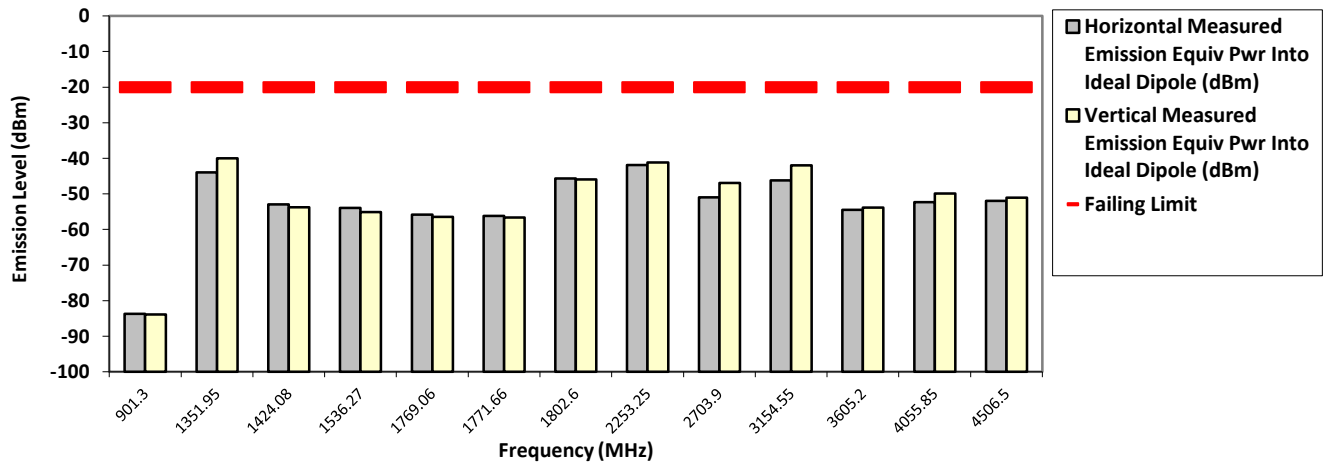

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

450.650000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
901.3000	-20.0000	-84.7652 **	-83.4912 **
1351.9500	-20.0000	-61.6253 **	-61.6580 **
1424.0800	-20.0000	-53.7500 *	-53.6800 *
1456.0800	-20.0000	-54.7500 *	-54.5200 *
1536.0700	-20.0000	-53.8800 *	-55.4000 *
1769.4600	-20.0000	-55.7500 *	-53.6100 *
1802.6000	-20.0000	-58.7588 **	-60.7813 **
2253.2500	-20.0000	-57.7265 **	-56.5221 **
2703.9000	-20.0000	-55.8349 **	-55.3345 **
3154.5500	-20.0000	-54.0766 **	-54.7752 **
3605.2000	-20.0000	-54.4978 **	-55.0571 **
4055.8500	-20.0000	-51.7731 **	-52.1531 **
4506.5000	-20.0000	-51.8374 **	-51.0147 **

RADIATED SPURIOUS EMISSIONS

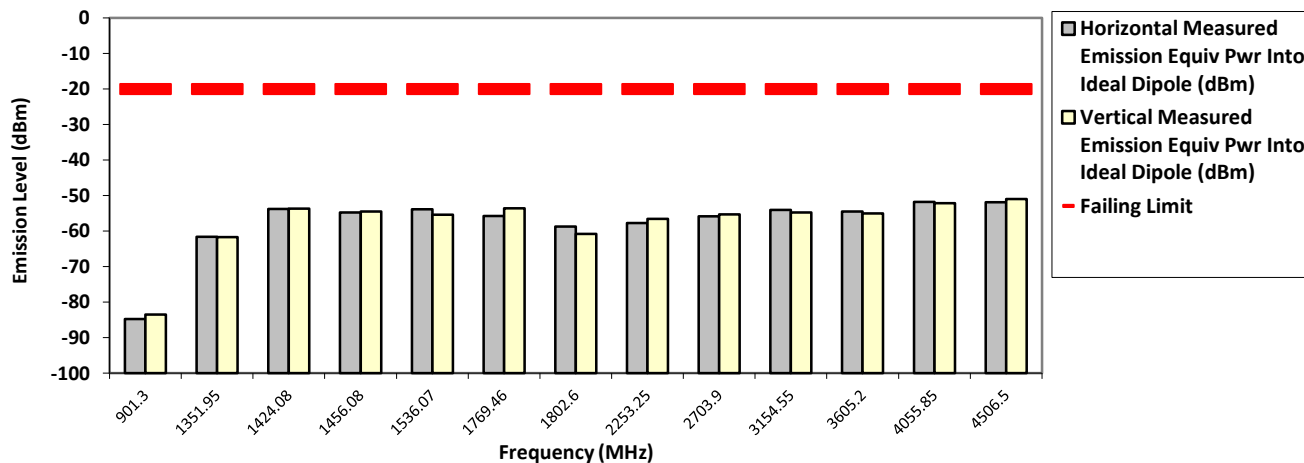

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: G0P0TV0894** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN4079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

459.125000 MHz 12.5 kHz 60.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-83.6325 **	-83.6832 **
1377.3750	-20.0000	-49.6200 *	-35.2900 *
1836.5000	-20.0000	-48.8800 *	-48.3700 *
2295.6250	-20.0000	-44.0200 *	-39.2700 *
2754.7500	-20.0000	-56.0621 **	-53.1339 **
3213.8750	-20.0000	-53.8760 **	-51.3346 **
3673.0000	-20.0000	-53.8038 **	-55.1591 **
4132.1250	-20.0000	-52.9885 **	-51.9382 **
4591.2500	-20.0000	-50.2522 **	-50.7596 **

RADIATED SPURIOUS EMISSIONS

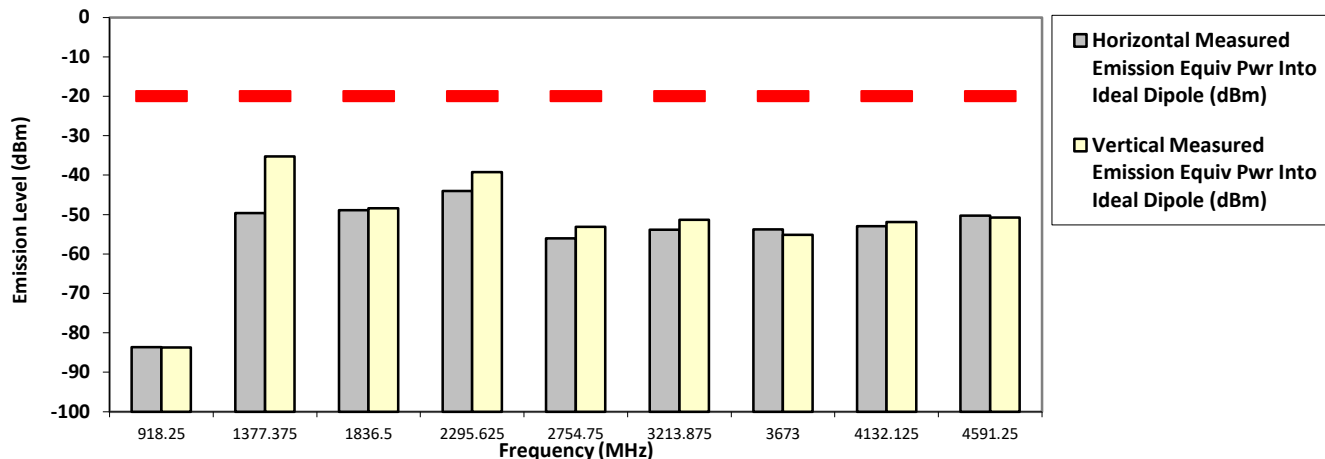

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin & Qawiman Wed, Jul 25, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.5 Hum(%RH): 70.3


System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II
459.125000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-84.2950 **	-83.0514 **
1377.3750	-20.0000	-61.7509 **	-61.5211 **
1424.2800	-20.0000	-53.3700 *	-53.4000 *
1456.4800	-20.0000	-54.8200 *	-54.5900 *
1536.0700	-20.0000	-53.9300 *	-53.0300 *
1836.5000	-20.0000	-59.9878 **	-60.3245 **
2295.6250	-20.0000	-58.3766 **	-57.1481 **
2754.7500	-20.0000	-55.2556 **	-55.9282 **
3213.8750	-20.0000	-53.6100 **	-53.5920 **
3673.0000	-20.0000	-54.9348 **	-53.5544 **
4132.1250	-20.0000	-50.8679 **	-51.8866 **
4591.2500	-20.0000	-50.8751 **	-50.3383 **

RADIATED SPURIOUS EMISSIONS

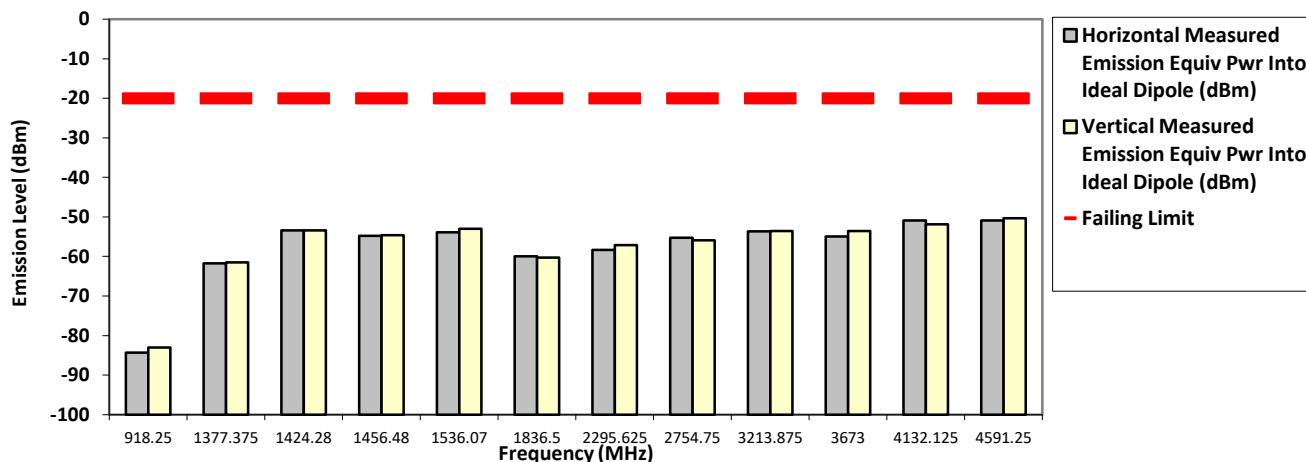

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks: Passed Results Marginal Results Failed Results


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

467.775000 MHz **12.5 kHz** **120.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-83.0462 **	-83.4237 **
1403.3250	-20.0000	-41.7100 *	-37.7000
1424.0800	-20.0000	-53.8300 *	-53.8700 *
1440.0800	-20.0000	-55.2100 *	-55.1700 *
1455.8800	-20.0000	-54.8200 *	-54.6000 *
1536.2700	-20.0000	-55.0600 *	-53.4900 *
1871.1000	-20.0000	-43.4800 *	-40.5600 *
2338.8750	-20.0000	-45.2600 *	-43.3400 *
2561.4200	-20.0000	-52.7900 *	-50.5000 *
2806.6500	-20.0000	-55.1409 **	-53.0696 **
3274.4250	-20.0000	-52.3626 **	-52.1830 **
3742.2000	-20.0000	-52.9913 **	-52.4891 **
4209.9750	-20.0000	-51.7828 **	-50.6039 **
4677.7500	-20.0000	-49.6116 **	-49.9013 **

RADIATED SPURIOUS EMISSIONS

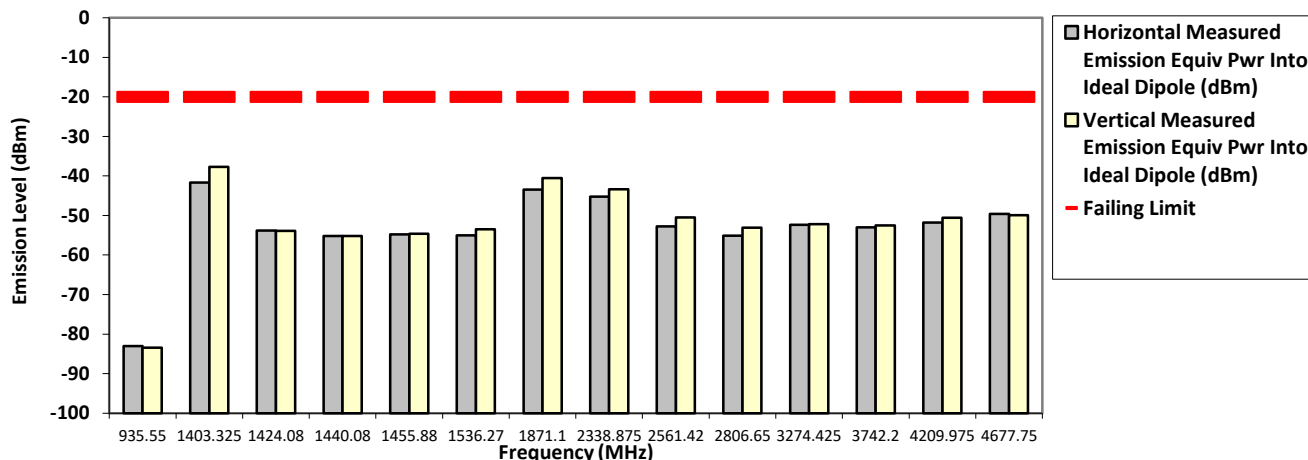

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
-----------------	----------------	------------------	----------------


SAC Transmitter Radiated Emission:

Model Number: M37TXS9PW1AN **S/N: 681P3A0078** **SR:08878-EMC-00004**
Battery Part No: NA **Accy Part No: 3466-HMN1079G-3,**
3466-HKN6163C-1, 254-HKN6170B-02, 1187-HKN6188B-1, 1187-PMHN4194A-1
Test Mode: TX APCO Digital Phase II

467.775000 MHz **12.5 kHz** **1.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-83.9640 **	-83.9023 **
1403.3250	-20.0000	-60.8320 **	-59.3387 **
1408.0800	-20.0000	-55.7000 *	-55.3700 *
1424.2800	-20.0000	-53.5400 *	-54.4300 *
1440.2800	-20.0000	-54.5200 *	-54.6600 *
1455.8800	-20.0000	-55.1000 *	-54.4800 *
1536.0700	-20.0000	-54.2100 *	-53.1200 *
1871.1000	-20.0000	-59.8701 **	-58.7251 **
2338.8750	-20.0000	-57.9712 **	-58.4235 **
2806.6500	-20.0000	-55.0812 **	-56.7611 **
3274.4250	-20.0000	-53.6203 **	-53.0352 **
3742.2000	-20.0000	-53.1226 **	-53.7441 **
4209.9750	-20.0000	-52.7242 **	-51.4824 **
4677.7500	-20.0000	-50.2803 **	-51.0080 **

RADIATED SPURIOUS EMISSIONS

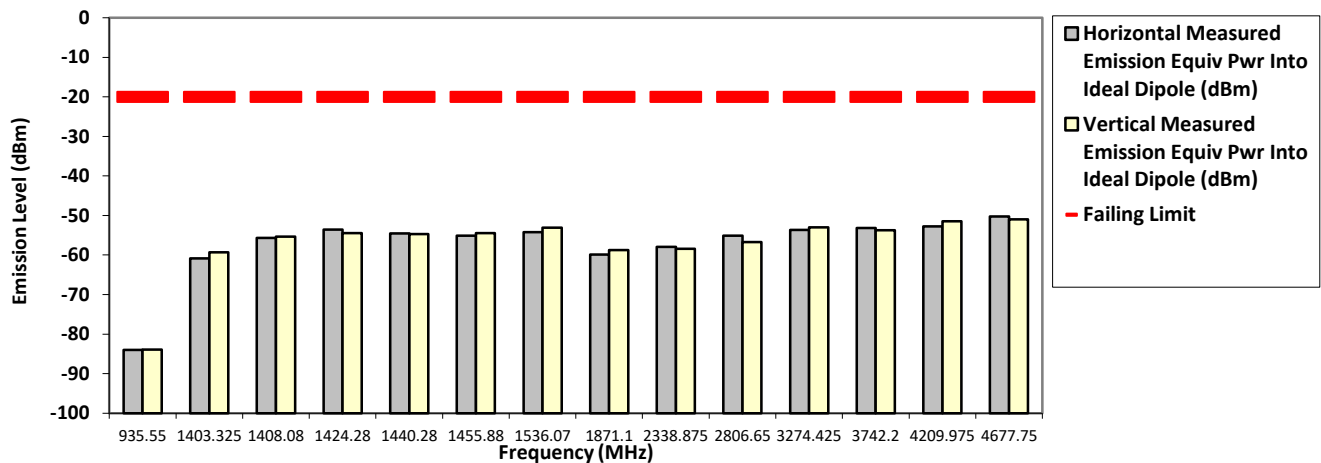

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Sat, May 05, 2018

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 70.9

System MU: 5.01 dB

Remarks:	Passed Results	Marginal Results	Failed Results
-----------------	----------------	------------------	----------------

6.11.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.12. Effective Radiated Power (ERP)

6.12.1. Test Setup

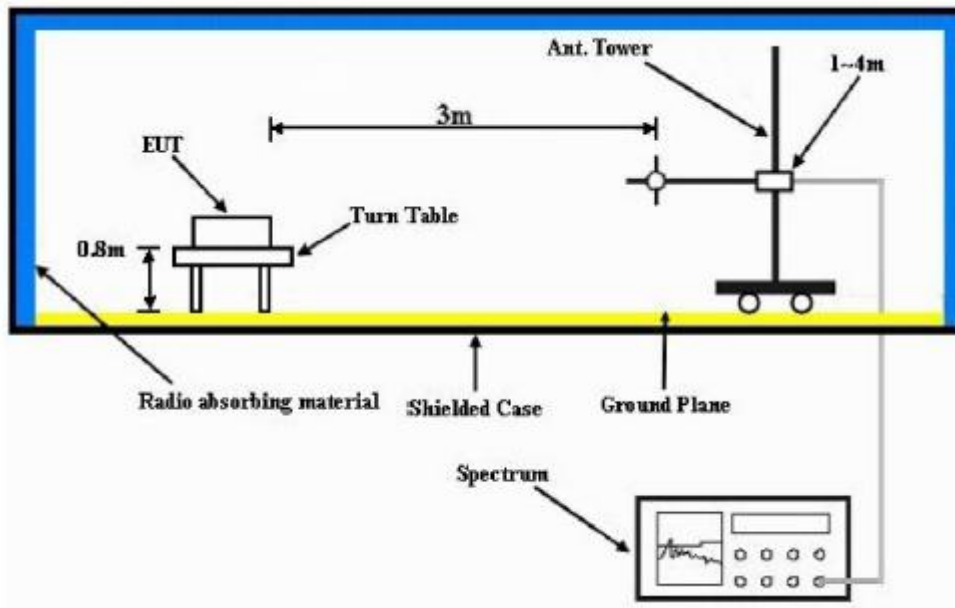

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.


6.12.2. Test Result

6.12.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

6.13. GNSS (EIRP for 1559 - 1610MHz)

6.13.1. Test Setup

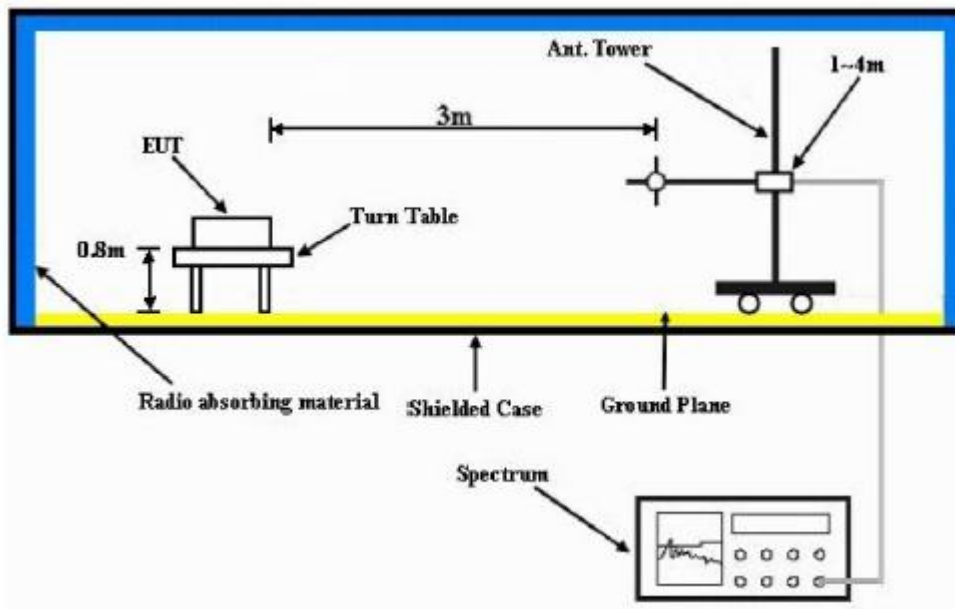

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15.$

6.13.1. Test Result

6.13.2. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Report ~