

 <p>CERTIFICATE 2518.08</p> <p>MS ISO/IEC 17025 TESTING SAMMNO. 0825</p>																																																
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / ISED TEST REPORT Report Revision : Rev.C</p>																																																
<table border="0"> <tr> <td>Date/s Tested</td> <td>: 02-Apr-2020 - 05-Apr-2020</td> <td></td> </tr> <tr> <td>Report Issue Date</td> <td>: 15-Apr-2020</td> <td></td> </tr> <tr> <td>Manufacturer/Location</td> <td>: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td> <td></td> </tr> <tr> <td>Requestor</td> <td>: TANG, GARY</td> <td></td> </tr> <tr> <td>Product Type</td> <td>: Mobile</td> <td></td> </tr> <tr> <td>Product Version (PMN)</td> <td>: APX6500</td> <td></td> </tr> <tr> <td>Model Number (HVIN)</td> <td>: M25KSS9PW1BN</td> <td></td> </tr> <tr> <td>Frequency Band</td> <td>: 2.402 - 2.480 GHz</td> <td></td> </tr> <tr> <td>Max RF Output Power</td> <td>: 6.31 mWatts</td> <td></td> </tr> <tr> <td>Applicant Name</td> <td>: Motorola Solutions Inc</td> <td></td> </tr> <tr> <td>Applicant Address</td> <td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td> <td></td> </tr> <tr> <td>FCC Registrations</td> <td>: 461337</td> <td></td> </tr> <tr> <td>ISED Registrations</td> <td>: MY0001</td> <td></td> </tr> <tr> <td>Firmware Version (FVIN)</td> <td>: D21.15.25</td> <td></td> </tr> </table> <div style="text-align: right; margin-top: 10px;">  </div> <p>The equipment was tested accordance to the requirement listed below:</p> <table border="0" style="width: 100%; margin-top: 10px;"> <tr> <td style="width: 60%;">(2.4GHz BT LE)</td> <td style="text-align: right;">PASS</td> </tr> <tr> <td>47 CFR Part 15C</td> <td></td> </tr> <tr> <td>ISED RSS 247 Issue 2</td> <td></td> </tr> </table>		Date/s Tested	: 02-Apr-2020 - 05-Apr-2020		Report Issue Date	: 15-Apr-2020		Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia		Requestor	: TANG, GARY		Product Type	: Mobile		Product Version (PMN)	: APX6500		Model Number (HVIN)	: M25KSS9PW1BN		Frequency Band	: 2.402 - 2.480 GHz		Max RF Output Power	: 6.31 mWatts		Applicant Name	: Motorola Solutions Inc		Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322		FCC Registrations	: 461337		ISED Registrations	: MY0001		Firmware Version (FVIN)	: D21.15.25		(2.4GHz BT LE)	PASS	47 CFR Part 15C		ISED RSS 247 Issue 2	
Date/s Tested	: 02-Apr-2020 - 05-Apr-2020																																																
Report Issue Date	: 15-Apr-2020																																																
Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																																
Requestor	: TANG, GARY																																																
Product Type	: Mobile																																																
Product Version (PMN)	: APX6500																																																
Model Number (HVIN)	: M25KSS9PW1BN																																																
Frequency Band	: 2.402 - 2.480 GHz																																																
Max RF Output Power	: 6.31 mWatts																																																
Applicant Name	: Motorola Solutions Inc																																																
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																																
FCC Registrations	: 461337																																																
ISED Registrations	: MY0001																																																
Firmware Version (FVIN)	: D21.15.25																																																
(2.4GHz BT LE)	PASS																																																
47 CFR Part 15C																																																	
ISED RSS 247 Issue 2																																																	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																																																	
<p>Prepared By:</p> <div style="text-align: center; margin-top: 20px;">  <hr style="width: 200px; margin: 0 auto;"/> <p>GAN BOON TEONG Test Personnel</p> </div>	<p>Approved Signatory:</p> <div style="text-align: center; margin-top: 20px;"> <hr style="width: 200px; margin: 0 auto;"/> <p>VINCENT FOONG CHUEN KIT Deputy Technical Manager</p> </div>																																																

Table of Contents

1.0 General Information	3
2.0 Summary of Test Results.....	5
3.0. Measurement Uncertainty	5
4.0 Equipment List	6
5.0 Test Mode Applicability and Test Channel Detail	7
6.0 Transmitter Test Parameters.....	8
6.1 6dB Channel Bandwidth.....	8
6.1.1 Test Setup.....	8
6.1.2 Test Limits:	8
6.1.3 Test Data:	8
6.2 Maximum Peak Conducted RF Output Power	9
6.2.1 Test Setup.....	9
6.2.2 Test Limits:	9
6.2.3 Test Data:	10
6.3 Maximum Peak Power Spectral Density	11
6.3.1 Test Setup.....	11
6.3.2 Test Limits:	11
6.3.3 Test Result	11
6.4 Conducted Spurious Emission.....	12
6.4.1 Test Setup.....	12
6.4.2 Test Limits:	12
6.4.3 Test Result	12
6.5 Band edge Conducted Spurious Emission.....	13
6.5.1 Test Setup.....	13
6.5.2 Test Limits:	13
6.5.3 Test Result	13
6.6 Radiated Emission within Restricted Bands.....	14
6.6.1 Test Setup.....	14
6.6.2 Test Limits:	15
6.6.3 Test Results:.....	16
6.7 AC Powerline Conducted Emission	23
6.7.1 Test Setup.....	23
6.7.2 Test Limits:	23
6.7.3 Test Result	24

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	15-Apr-2020	Gan Boon Teong
Rev.B	Updated Summary Table and Reference to other FCC ID	14-May-2020	Vincent Foong
Rev. C	Corrected table height	20-May-2020	Vincent Foong

1.0 General Information

EUT Description:

Technologies	2.4GHz BT LE
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	Motorcycle (AN000163A02)

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
ASSY,CBL,PWR	MOTOROLA	HKN4191B
CABLE, DATA, USB, 1-1/2M, XTL5000	MOTOROLA	HKN6163C
15 Watt Speaker (Water Resistant)	MOTOROLA	HSN4040A
Keypad Microphone	MOTOROLA	HMN4079G
ANTENNA, STUBBY,WIFI/GNSS LOW LOSS LMR240 (2.4/5 GHZ WI-FI/BT AND GNSS BT/WiFi/GPS Antenna)	MOTOROLA	AN000163A01
ANTENNA, WHIP,3DB MCYCLE 764-870 MHZ 762-870 MHZ	MOTOROLA	AN000197A10
O7 Control Head (English)	MOTOROLA	PMHN4194C
O2 Control Head (Grey)	MOTOROLA	PMHN4193F
ANTENNA, STUBBY,WIFI/GNSS, M-CYCLE, QMA, 6FT, LMR195, FLEXIBLE, PVC FREE GPS WIFI	MOTOROLA	AN000163A02
ANT 5.0DB 380-420 MHZ MAXRAD 380 Mhz - 433 MHZ	MOTOROLA	HAE6011A
Water Resistant Microphone	MOTOROLA	HMN1089C
13 Watt Speaker (Motorcycle) - Non EPP Compliant	MOTOROLA	HSN6003C
VEHICULAR Roof and TrunkTop	MOTOROLA	RAD4010ARB
ANTENNA, STUBBY,WIFI/GNSS, M-CYCLE, QMA, 6FT, LMR195, FLEXIBLE, PVC FREE GPS WIFI ROOF 2400MHz - 2500MHz; 4900MHz - 5900MHz	MOTOROLA	AN000163A02
MCYCLE POWER CABLE	MOTOROLA	HKN6032B
Motorcycle Remote Cable for 05 CH	MOTOROLA	3075217A02
O5 CONTROL HEAD (ENGLISH)	MOTOROLA	PHCN4000E
ASSY,KIT,CH END REM	MOTOROLA	PHLN1002A
APXM STANDARD TIB MP	MOTOROLA	PMUN1083A

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

2.0 Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested
15.247 (a)(2)	RSS 247 5.2 (a)	DTS & 99% Channel Bandwidth	NA	References data from FCC ID AZ492FT7124 / ISED 109U-92FT7124	NA
15.247 (b)(3)	RSS 247 5.4 (d)	Conducted RF Output Power (Average)	Pass	Highest output power: 7.279 dBm	471TWD5477
15.247(e)	RSS 247 5.2 (b)	Maximum Peak Power Spectral Density	NA	References data from FCC ID AZ492FT7124 / ISED 109U-92FT7124	NA
15.247 (d)	RSS-247 5.5	Band-Edge Conducted Spurious Emission	NA	References data from FCC ID AZ492FT7124 / ISED 109U-92FT7124	NA
15.247 (b)	RSS-247 5.5	Conducted Spurious Emission	NA	References data from FCC ID AZ492FT7124 / ISED 109U-92FT7124	NA
15.205, 15.209, 15.247 (d)	RSS247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: 46.8705 dB μ V/m	471TWD5475
15.207	RSS-Gen 8.8	AC Power Line Conducted Spurious Emission	NA	Device does not operate on AC	NA
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA

NA → Not Available

***NOTE: The BT LE chipset is identical to FCC ID AZ492FT7124 / ISED 109U-92FT7124. The rest of conducted measurements are by similarity. Only worst case configuration of radiated emission based on FCC ID AZ492FT7124 / ISED 109U-92FT7124 is tested. As per KDB 484596 D01v01, the applicant takes full responsibility that data referenced represents compliance to the relevant rules for this current FCC ID.**

3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.10_R2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SPECTRUM ANALYZER	FSEK30	838495/014	19-Jul-19	19-Jul-20
SPECTRUM ANALYZER	E4443A	MY46181974	9-Aug-18	9-Aug-20
POWER SUPPLY	6033A	3004A05137	24-Jul-18	24-Jul-20
CHAMBER	SH-641	92003821	26-Sep-19	26-Sep-20
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

Radiated Emission Station (SW Version: EMC FCC RE v1.6.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY (0-60V / 0-50A, 1000W)	6032A	MY41001736	25-May-19	25-May-20
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Jul-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Jul-20
5m Semi-anechoic Chamber	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112D	30991	5-Aug-19	5-Aug-20
BILOG ANTENNA	CBL6112B	2950	8-Jul-19	8-Jul-21
DATA LOGGER	DSB	16372019	31-Oct-19	31-Oct-20
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	23-Jun-19	23-Jun-20
18 - 40GHz PREAMPLIFIER	Miteq Hi Gain Sucoflex	002	12-Jun-19	12-Jun-22
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-20
LOOP ANTENNA	6502	00208416	5-Sep-19	5-Sep-20

5.0 Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	23.4°C, 59.8%RH

Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	23.4°C, 59.8%RH

Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	NA

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	25°C, 54.8%RH

6.0 Transmitter Test Parameters

6.1 6dB Channel Bandwidth

6.1.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.

6.1.2 Test Limits:


Normal Condition (25 ° C)
≥500 kHz

6.1.3 Test Data:

N/A

6.2 Conducted RF Output Power

6.2.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 30 kHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{OBW bandwidth}]$.
 - d. Detector = average.
 - e. Sweep time = auto couple.
 - f. Trace mode = free run.
 - g. Allow trace to fully stabilize.
- 5) Add in duty cycle correction into final test result.
- 6) Duty cycle correction is calculated as below:
 $10 \log (1/x)$


6.2.2 Test Limits:

Normal Condition (25 ° C)
$\leq 1 \text{ Watt}(30 \text{ dBm})$


6.2.3 Test Data:

Output power = Band Power + Duty Cycle factor
 =Band Power + 1.984dBm


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	7.080	Pass
Bluetooth L.E	GFSK	2440	7.035	Pass
Bluetooth L.E	GFSK	2480	7.279	Pass

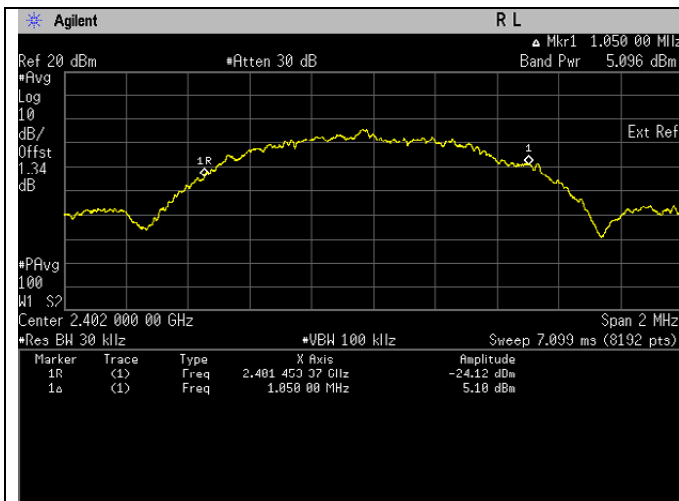


Frequency 2402 MHz

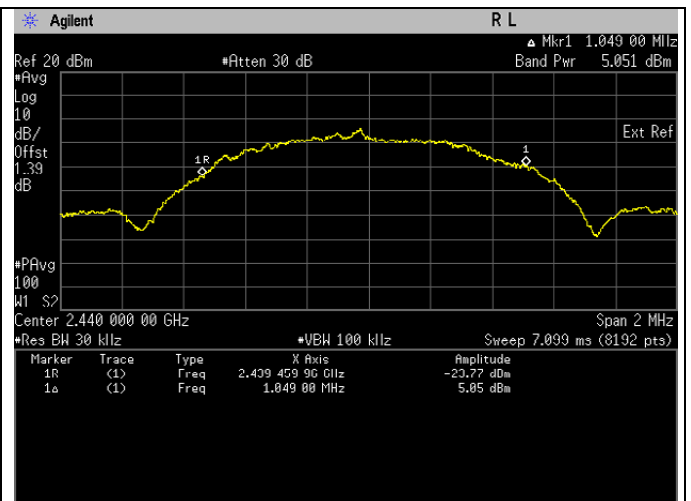

Frequency 2440 MHz

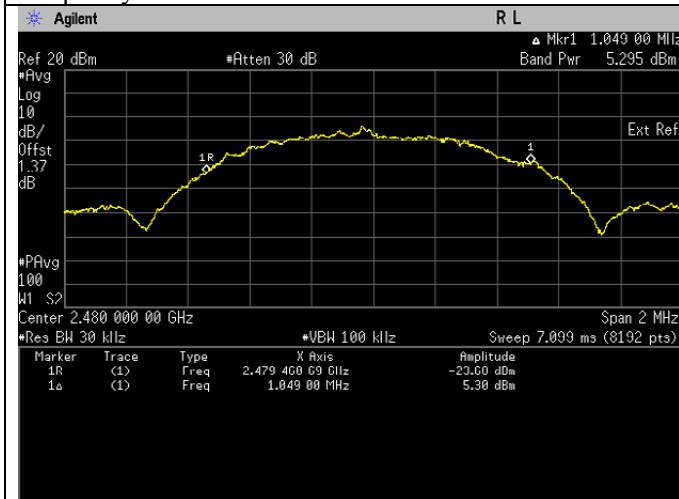


Frequency 2480 MHz

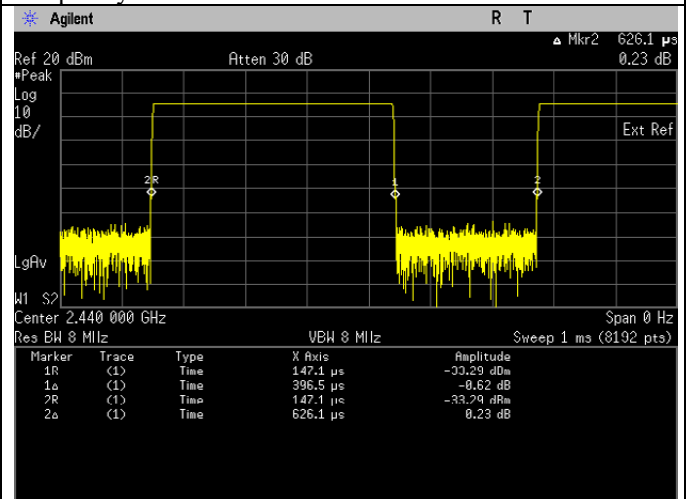

Duty Cycle

6.3 Maximum Peak Power Spectral Density

6.3.1 Test Setup



Maximum Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to 3 kHz.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

6.3.2 Test Limits:


Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$

6.3.3 Test Result

N/A

6.4 Conducted Spurious Emission

6.4.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- 5) Use the peak marker function to measure highest emission and scan up to 10th harmonic.

6.4.2 Test Limits:


Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.

6.4.3 Test Result

N/A

6.5 Band edge Conducted Spurious Emission

6.5.1 Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.

6.5.2 Test Limits:


Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.

6.5.3 Test Result

N/A

6.6 Radiated Emission within Restricted Bands

6.6.1 Test Setup

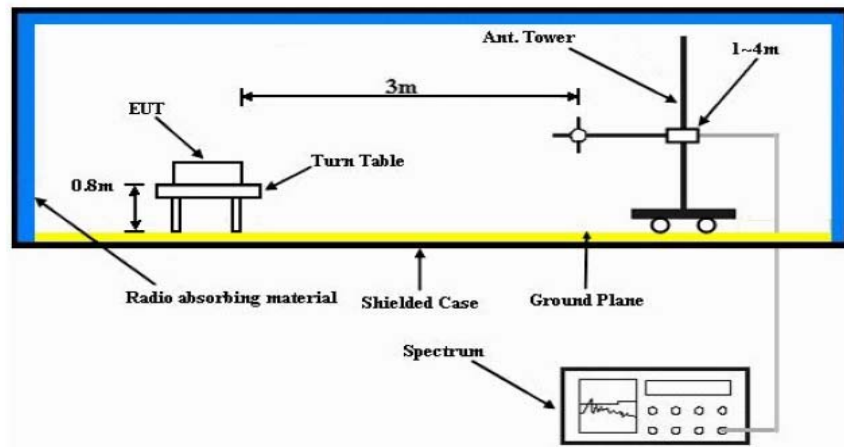

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

6.6.2 Test Limits:


Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


NOTE:

- 1) The lower limit shall apply at the transition frequencies.
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.


VERTICAL, QPK

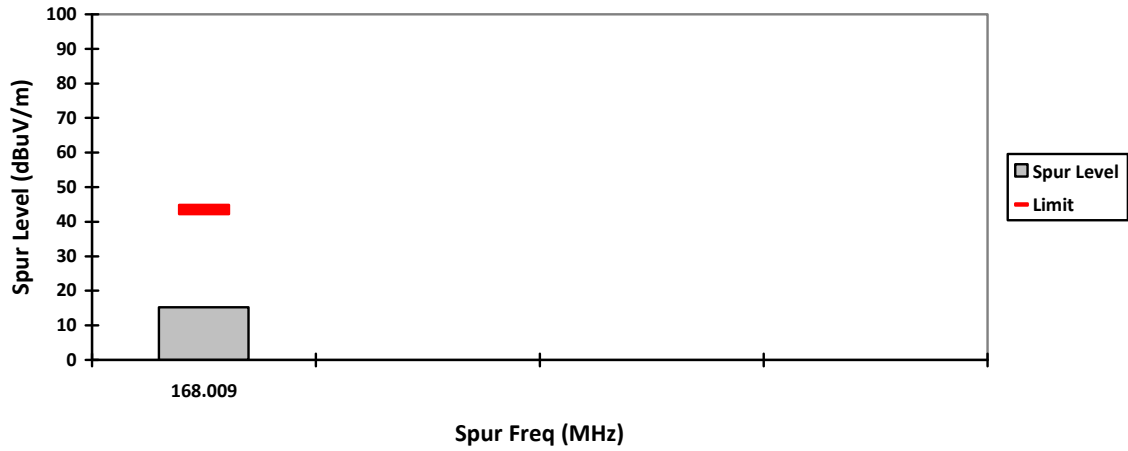


HORIZONTAL, QPK

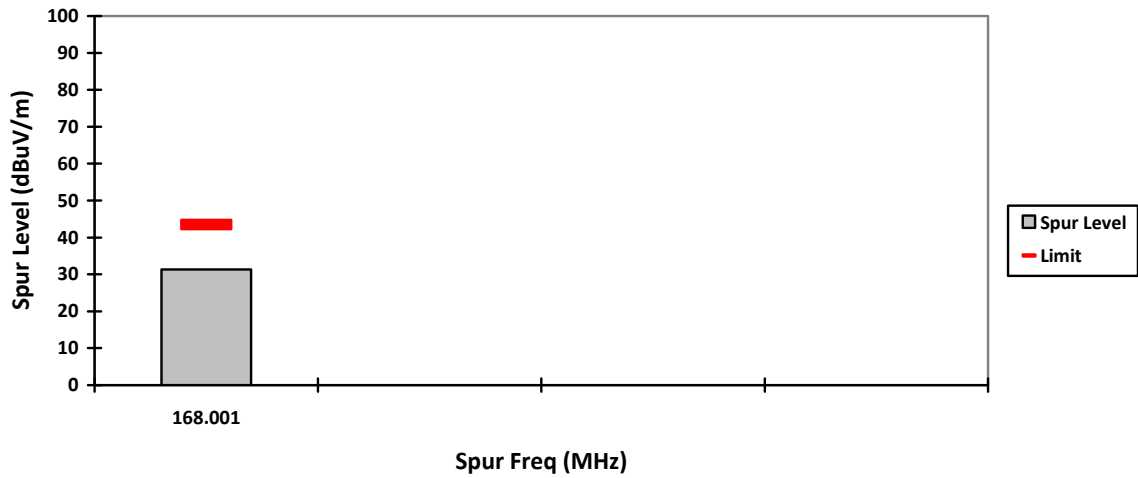


VERTICAL, PK

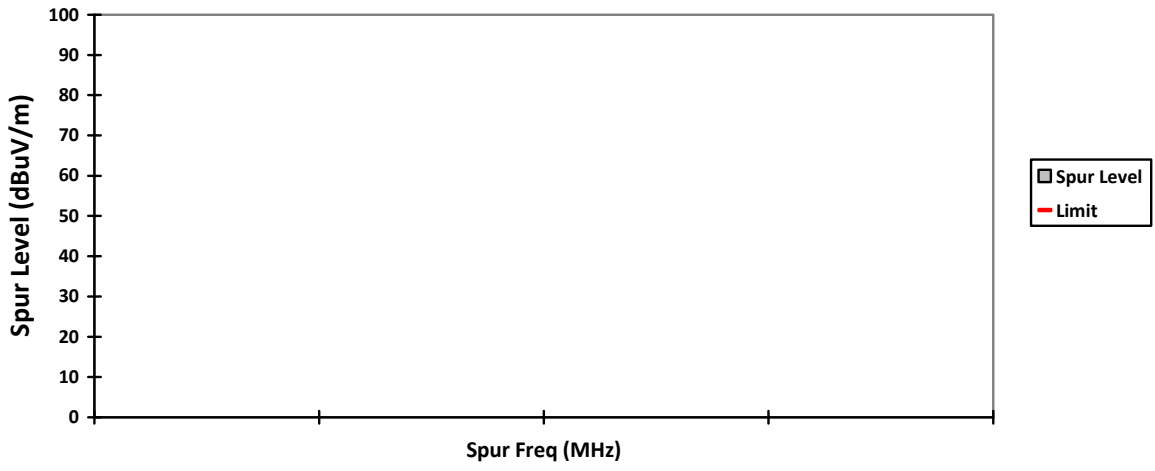


HORIZONTAL, PK

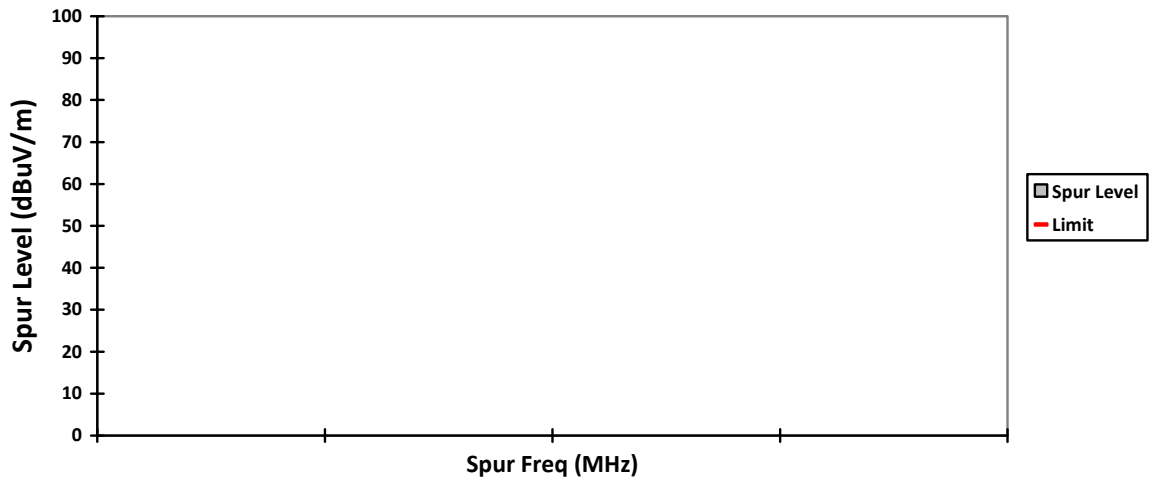


VERTICAL, AV

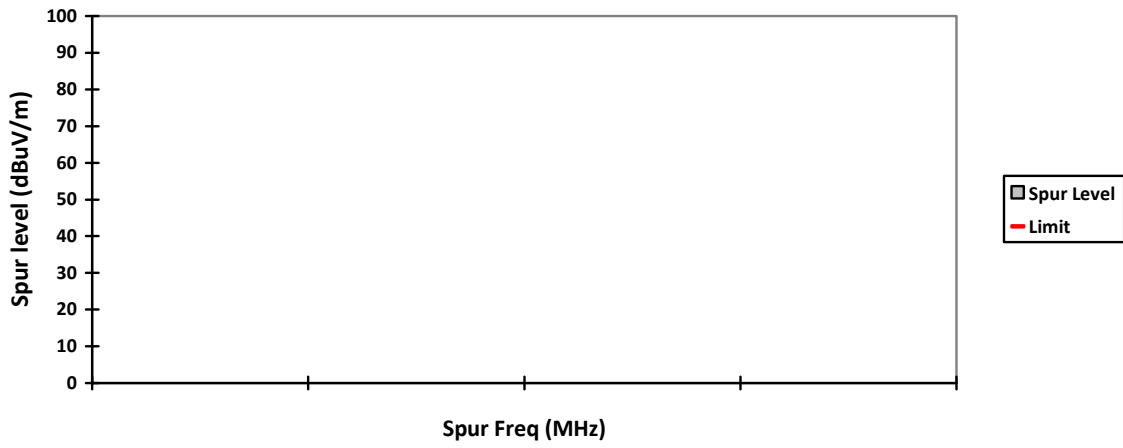


HORIZONTAL, AV

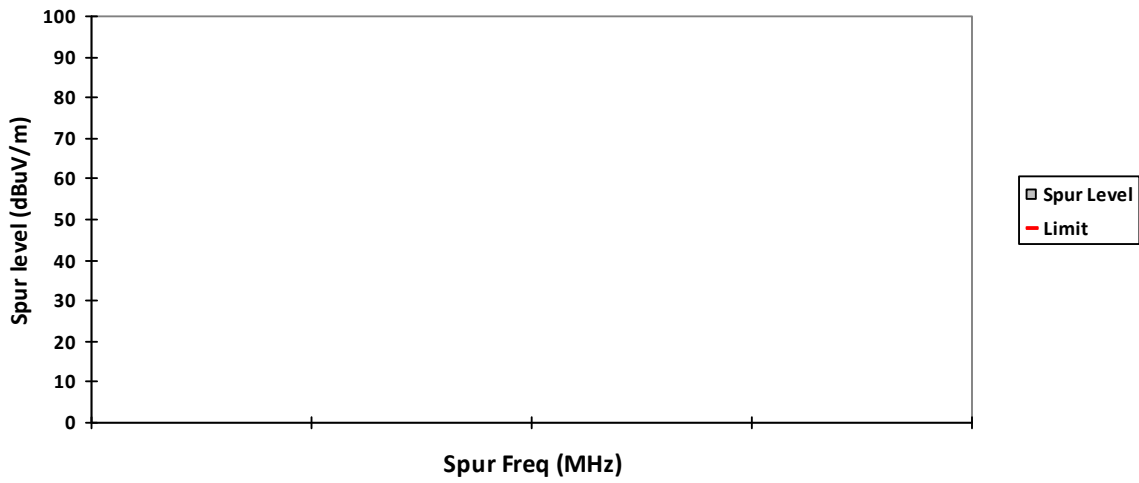


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

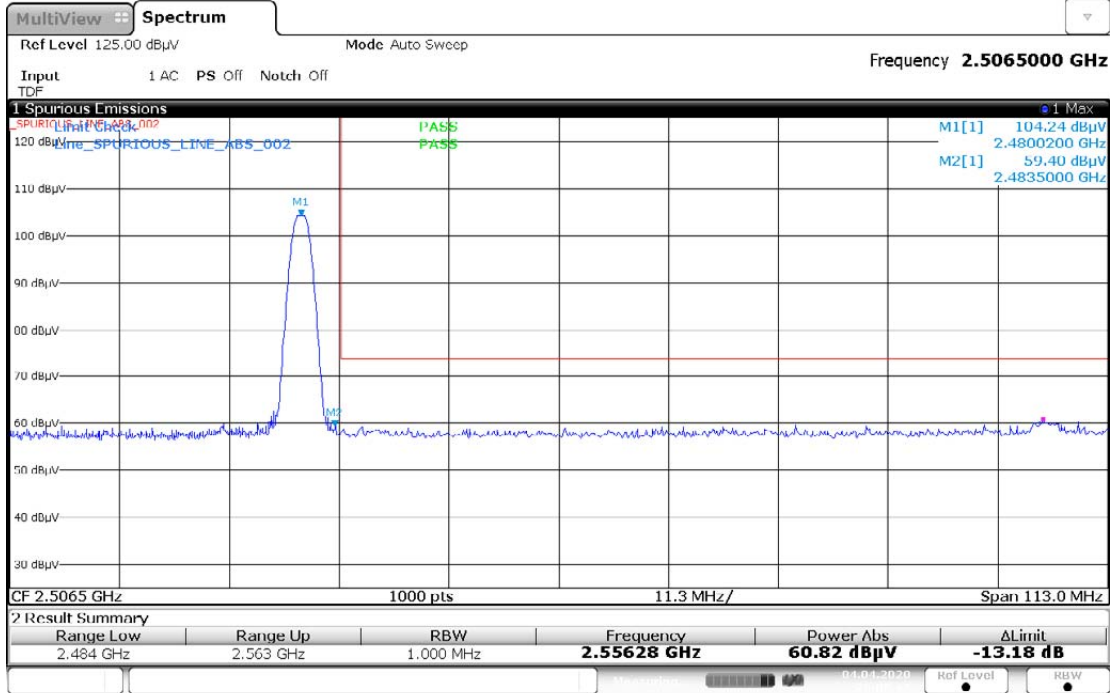

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

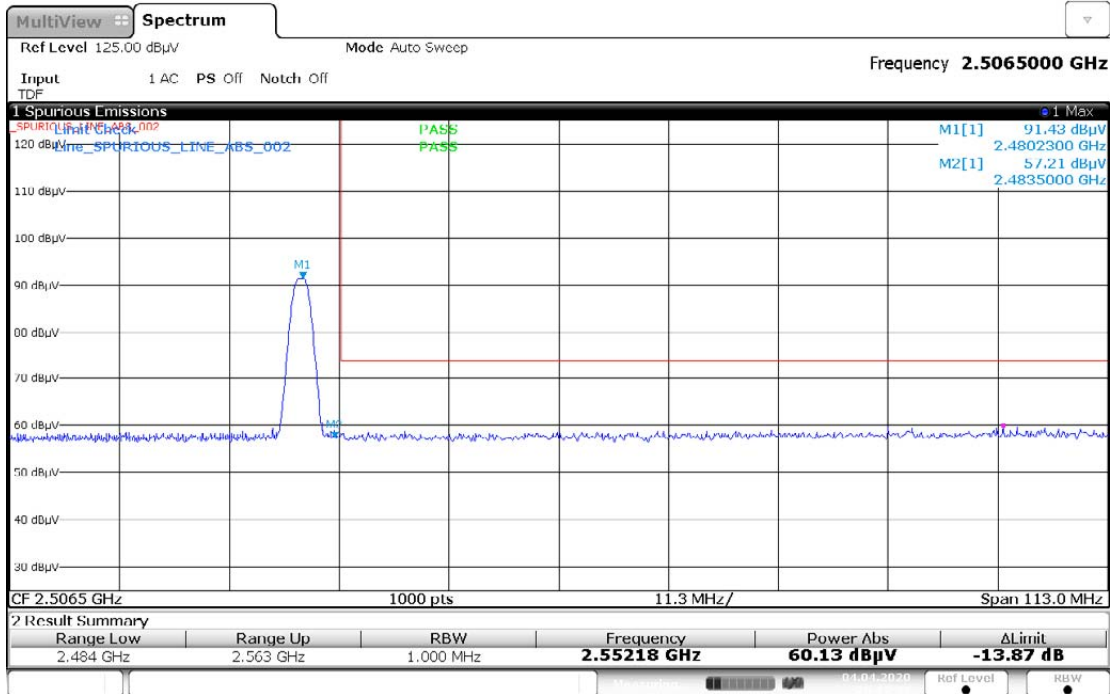


Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

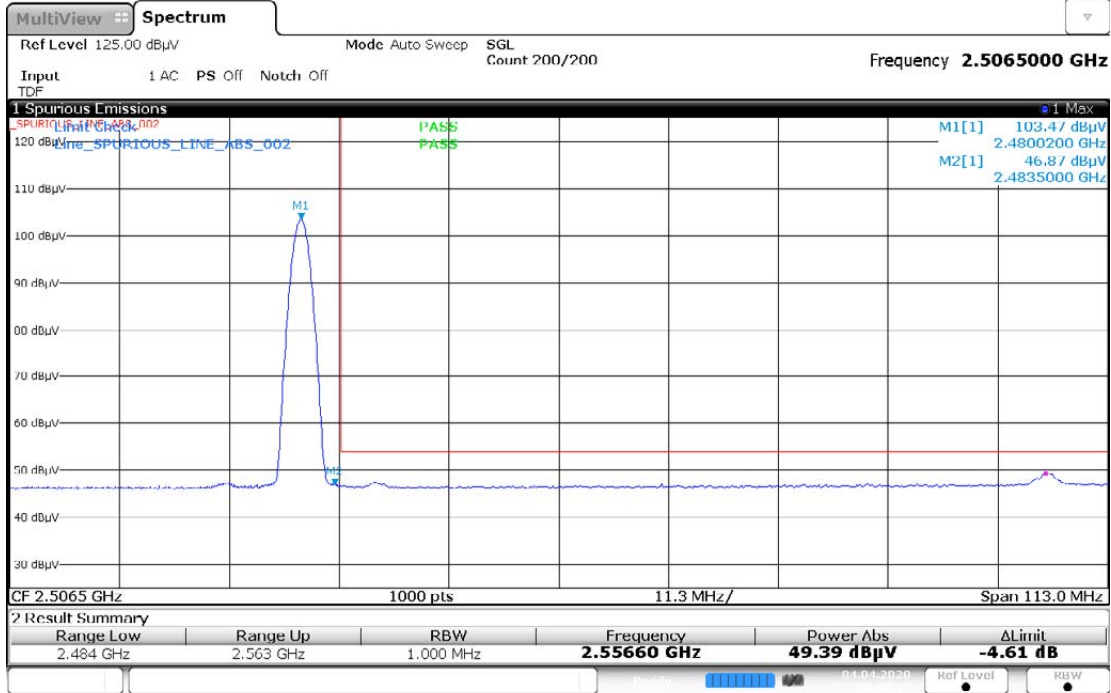

19:46:16 04.04.2020


Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

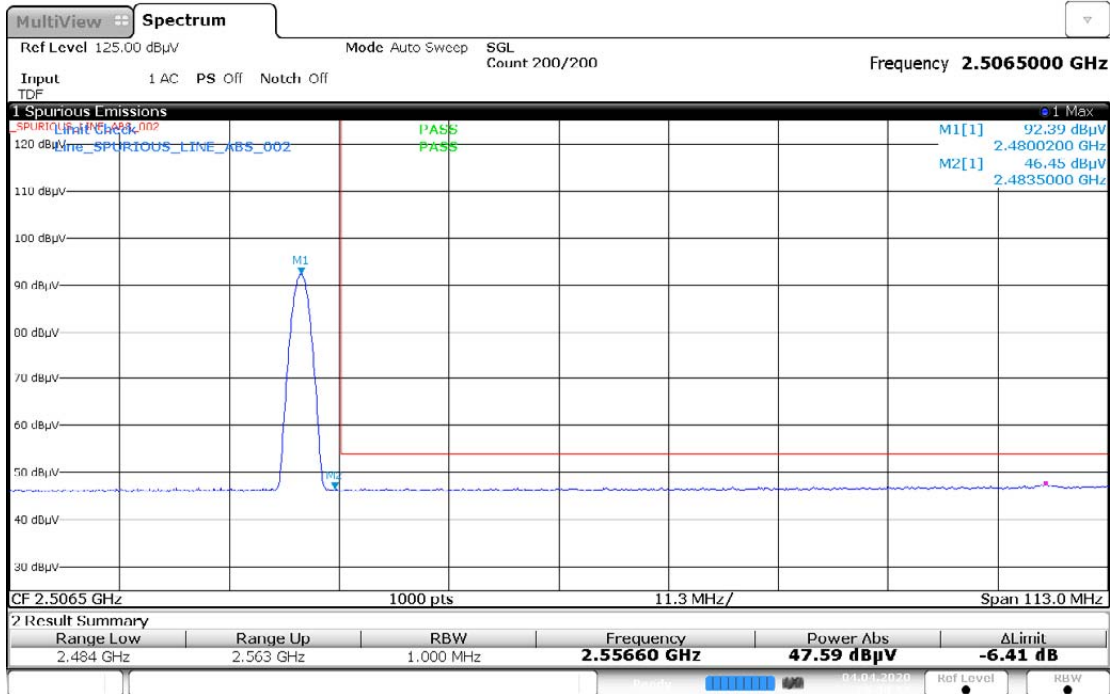

19:50:56 04.04.2020

6.7 AC Powerline Conducted Emission

6.7.1 Test Setup

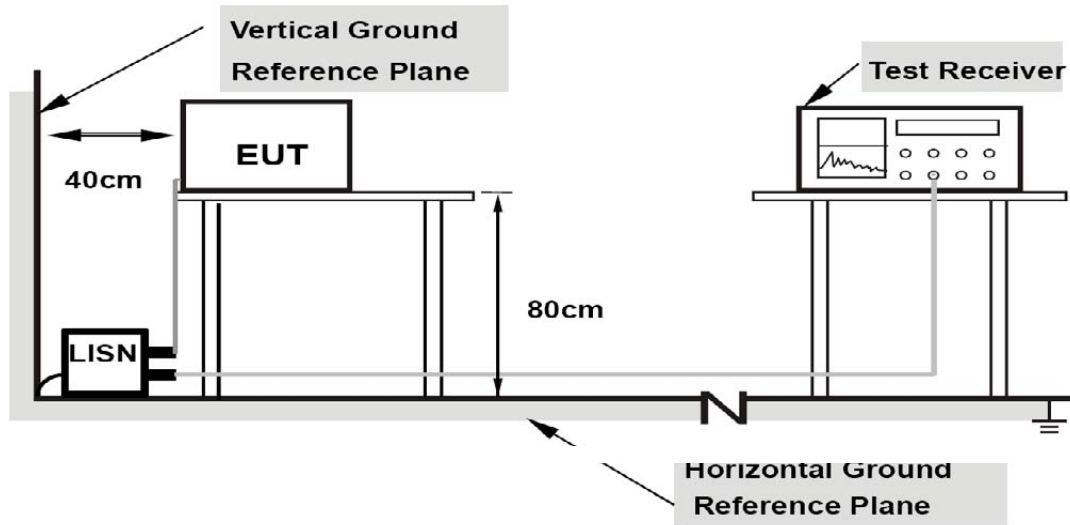

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.7.2 Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.7.3 Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.

END OF TEST REPORT