

## 01\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Back\_0mm\_Ch23230

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used:  $f = 782.000$  MHz;  $\sigma = 0.911$  S/m;  $\epsilon_r = 41.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.58, 10.16, 9.11); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.671 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.962 W/kg; SAR (10g) = 0.574 W/kg;

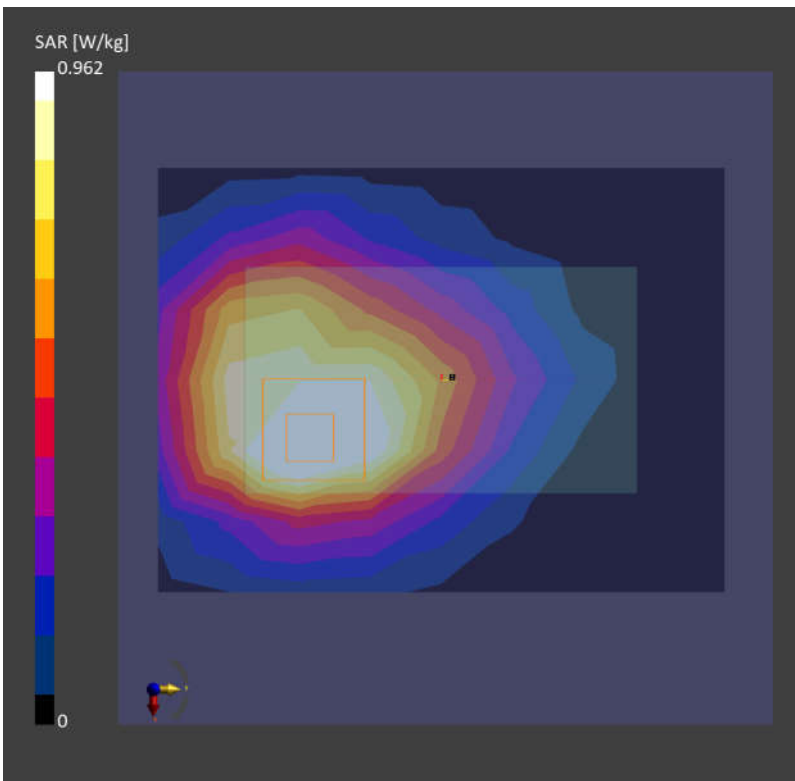

## 02\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Back\_0mm\_Ch20525

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used:  $f = 836.500$  MHz;  $\sigma = 0.932$  S/m;  $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.56, 9.74, 9.17); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.657 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.876 W/kg; SAR (10g) = 0.524 W/kg;

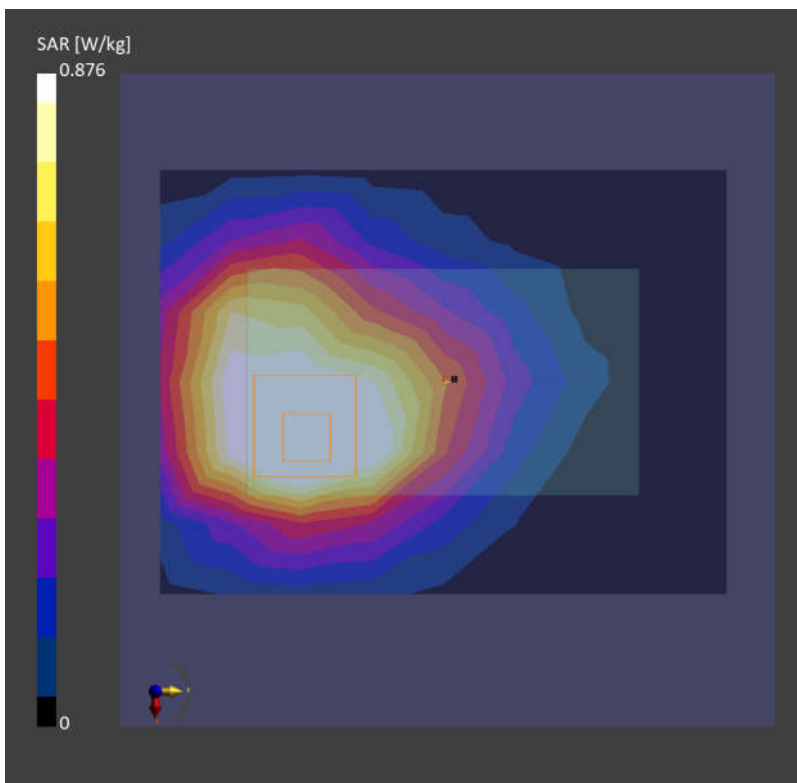

### 03\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Back\_3mm\_Ch132572

Communication System: Band 66; Frequency: 1770.000

Medium: HSL. Medium parameters used:  $f = 1770.000$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.48, 8.68, 7.98); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.615 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.959 W/kg; SAR (10g) = 0.582 W/kg;

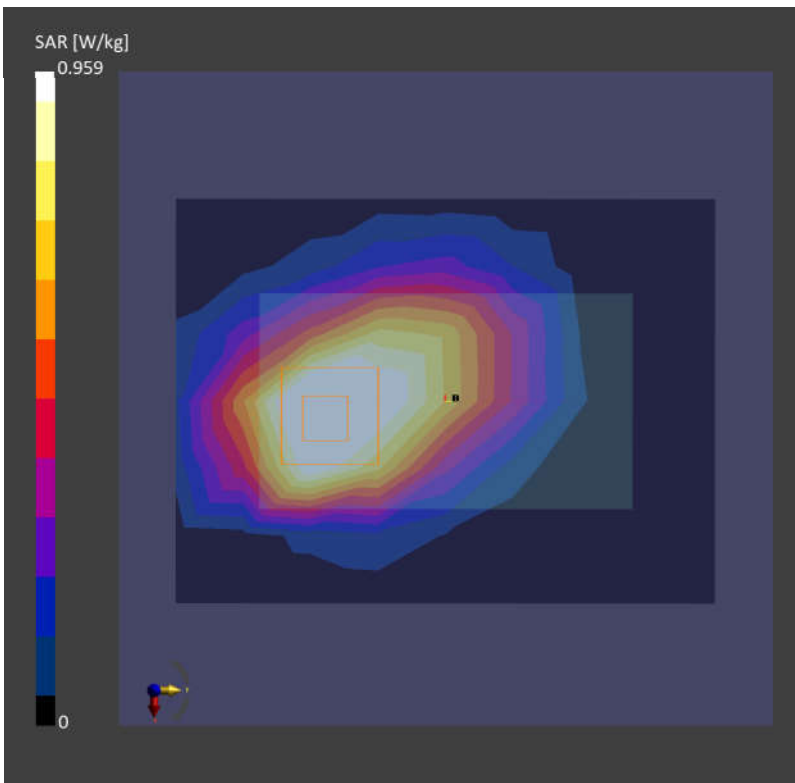

#### 04\_LTE Band 2\_20M\_QPSK\_1RB\_0Offset\_Back\_3mm\_Ch18700

Communication System: Band 2; Frequency: 1860.000

Medium: HSL. Medium parameters used:  $f = 1860.000$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 39.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.0, 8.12, 7.59); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.899 W/kg; SAR (10g) = 0.510 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.898 W/kg; SAR (10g) = 0.491 W/kg;

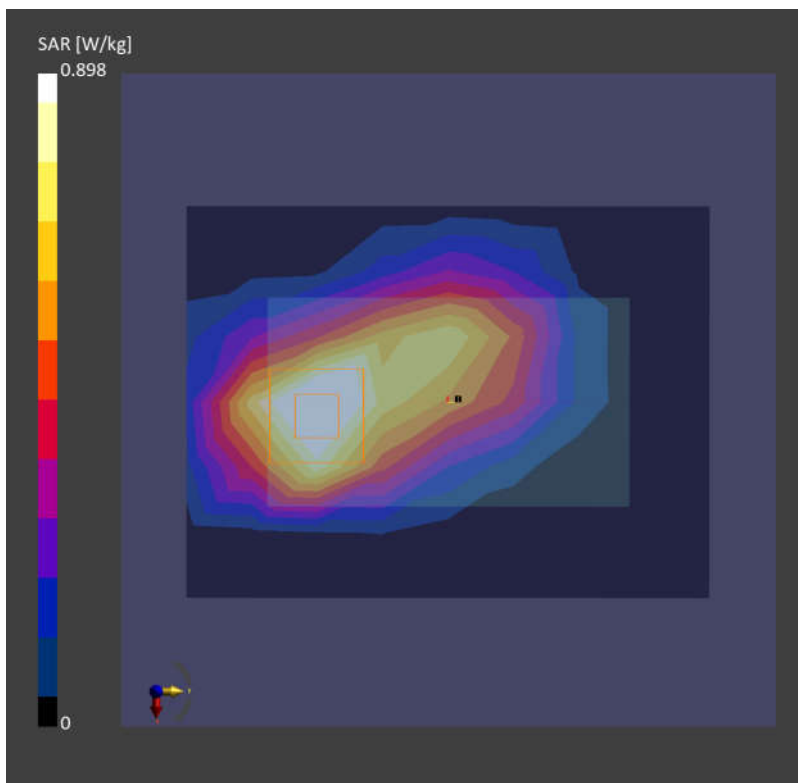

## 05\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_0mm\_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used:  $f= 2412.000$  MHz;  $\sigma= 1.74$  S/m;  $\epsilon_r = 39.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.39, 7.01); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (80.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.794 W/kg; SAR (10g) = 0.369 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.903 W/kg; SAR (10g) = 0.385 W/kg;

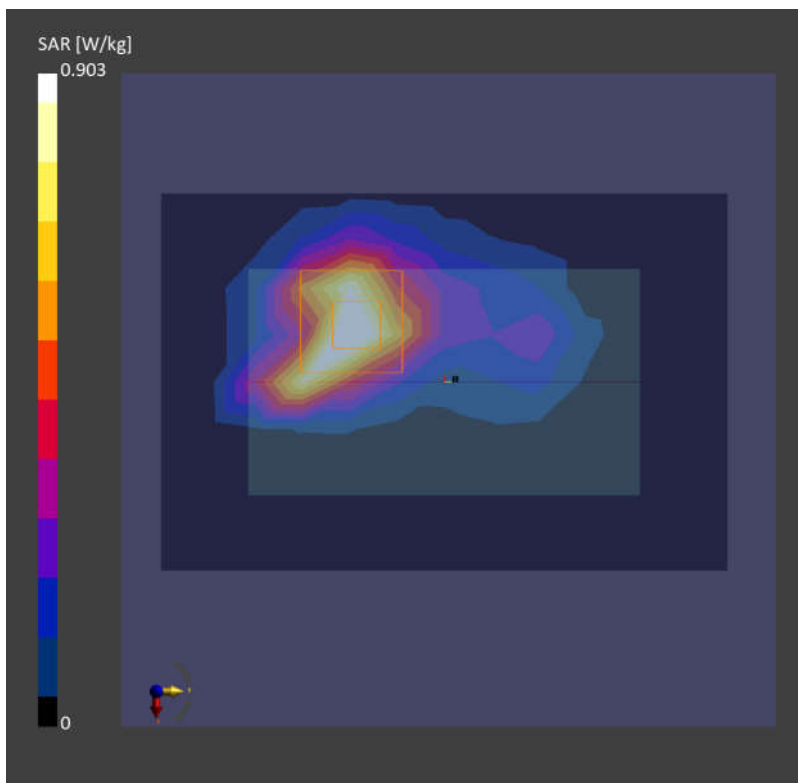

## 06\_Bluetooth\_1Mbps\_Back\_0mm\_Ch0

Communication System: ISM 2.4 GHz Band; Frequency: 2402.000

Medium: HSL. Medium parameters used:  $f = 2402.000$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 40.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (80.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.095 W/kg; SAR (10g) = 0.043 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.098 W/kg; SAR (10g) = 0.043 W/kg;

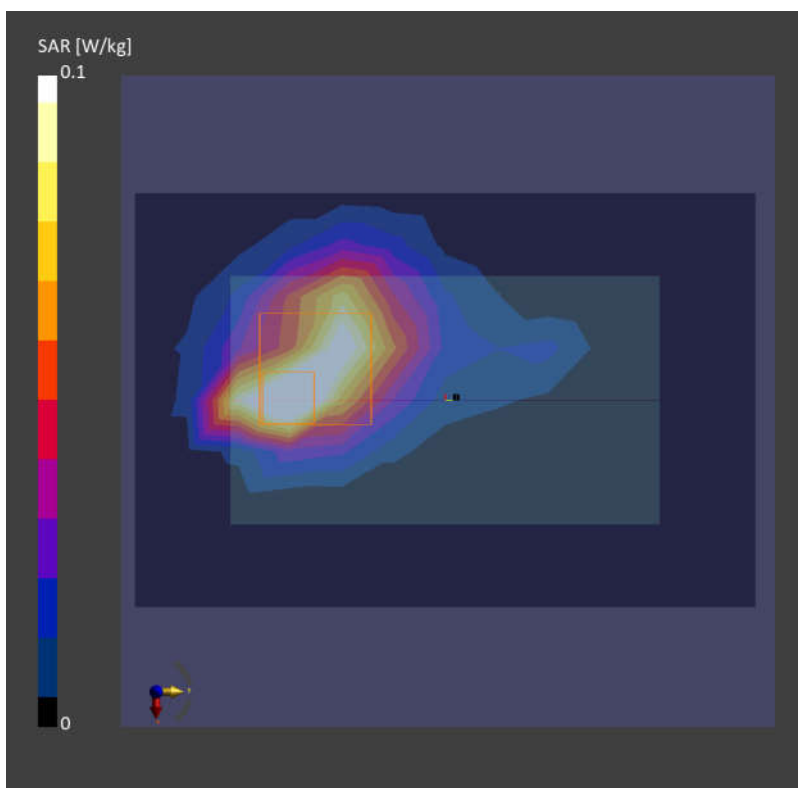

## 07\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch64

Communication System: WLAN 5GHz; Frequency: 5320.000

Medium: HSL. Medium parameters used:  $f= 5320.000$  MHz;  $\sigma= 4.76$  S/m;  $\epsilon_r = 36.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (80.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.824 W/kg; SAR (10g) = 0.276 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.776 W/kg; SAR (10g) = 0.254 W/kg;

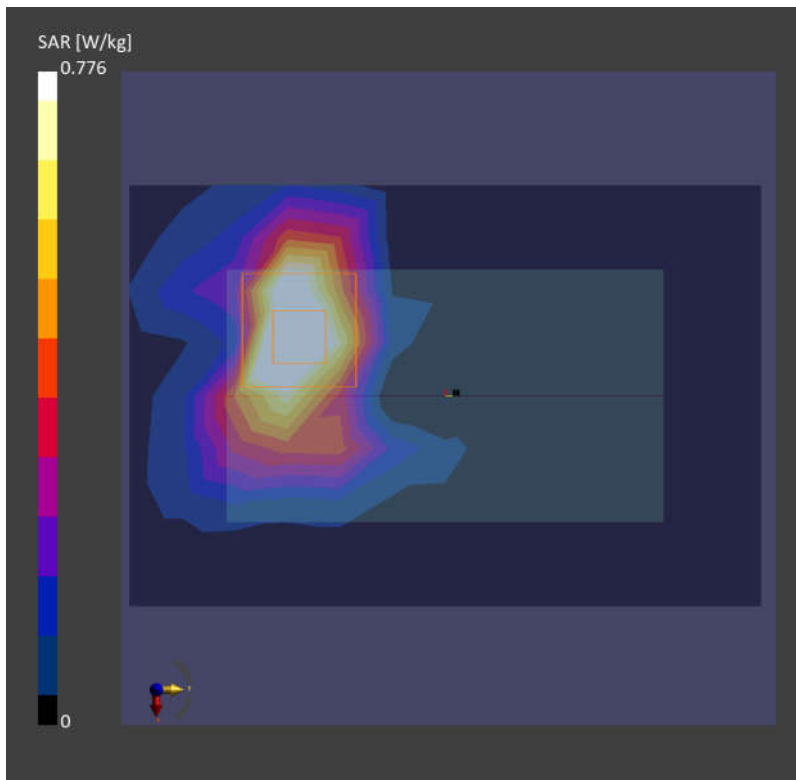

## 08\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch124

Communication System: WLAN 5GHz; Frequency: 5620.000

Medium: HSL. Medium parameters used:  $f= 5620.000$  MHz;  $\sigma= 5.10$  S/m;  $\epsilon_r = 36.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(4.83, 5.71, 4.9); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (80.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.916 W/kg; SAR (10g) = 0.332 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.932 W/kg; SAR (10g) = 0.323 W/kg;

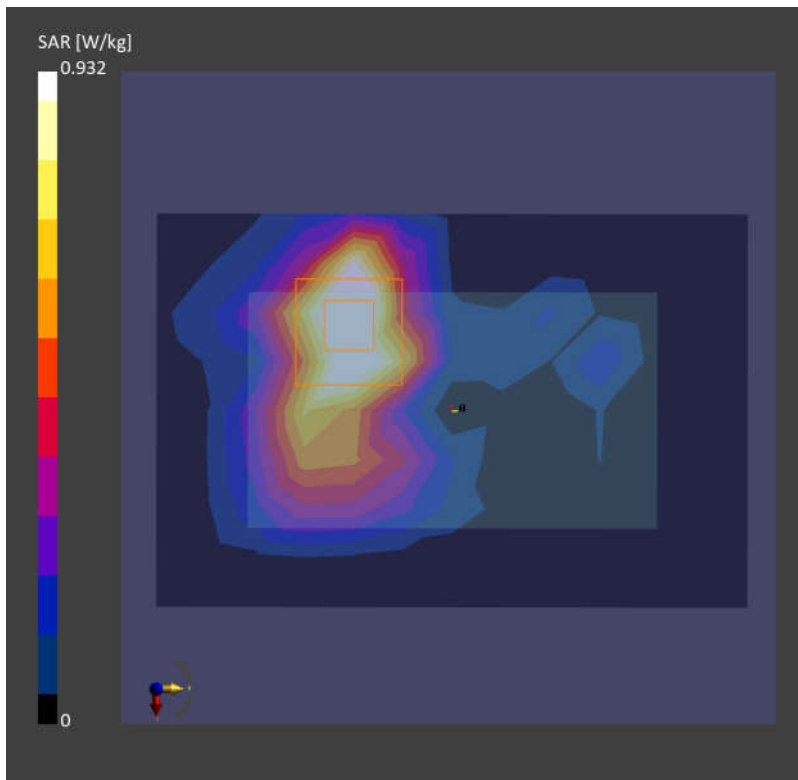



## 09\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch165

Communication System: WLAN 5GHz; Frequency: 5825.000

Medium: HSL. Medium parameters used:  $f= 5825.000$  MHz;  $\sigma= 5.23$  S/m;  $\epsilon_r = 35.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (80.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.262 W/kg; SAR (10g) = 0.096 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.256 W/kg; SAR (10g) = 0.080 W/kg;

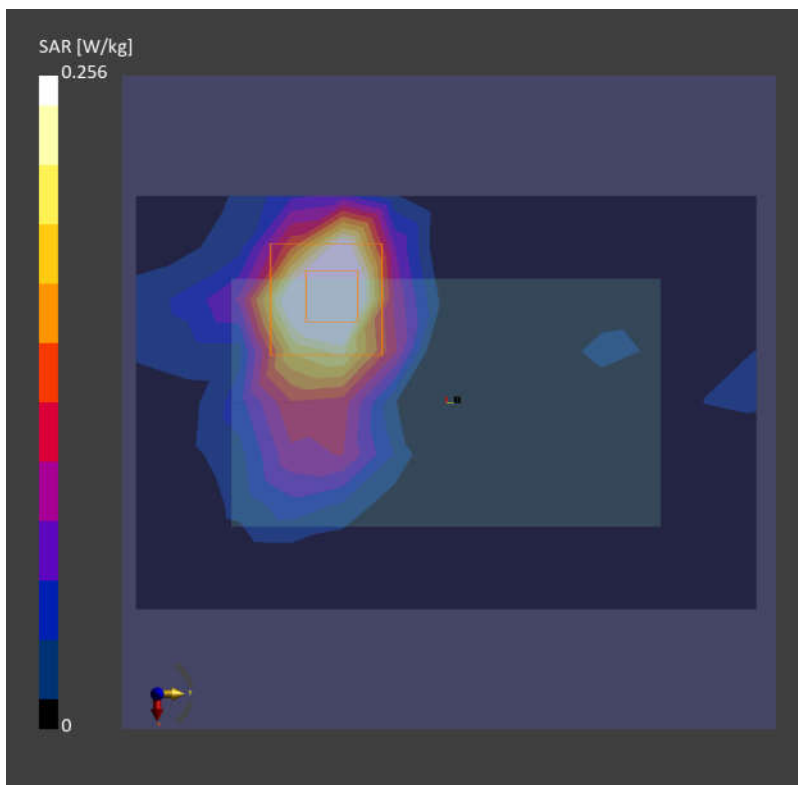

## 10\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Front\_0mm\_Ch23230

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used:  $f = 782.000$  MHz;  $\sigma = 0.911$  S/m;  $\epsilon_r = 41.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.58, 10.16, 9.11); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.03 W/kg; SAR (10g) = 1.34 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 2.19 W/kg; SAR (10g) = 1.17 W/kg;

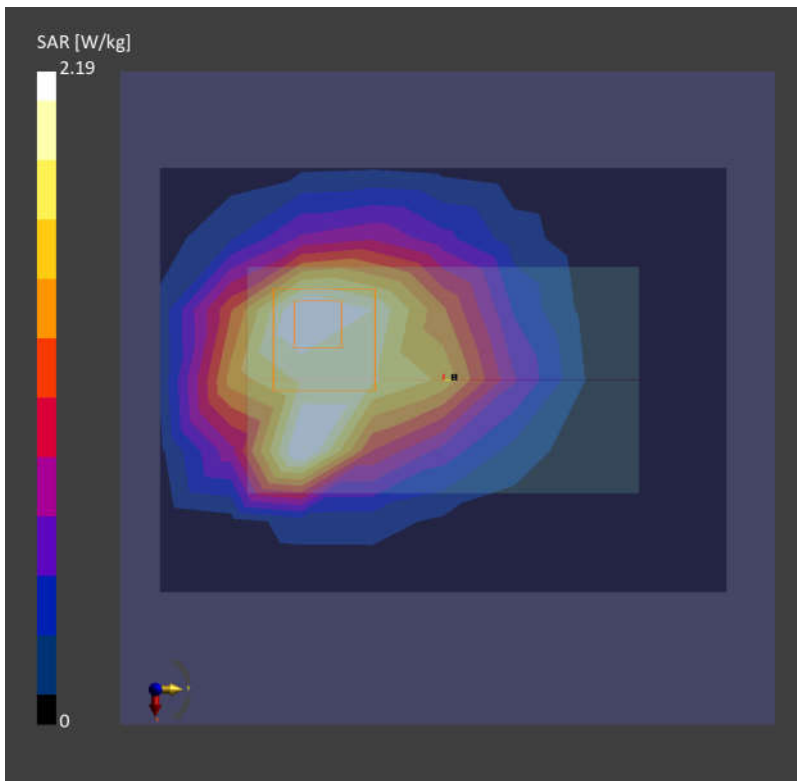

## 11\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Front\_0mm\_Van Gogh Earpiece\_Ch20525

Communication System: Band 5; Frequency: 836.500

Medium: HSL. Medium parameters used:  $f = 836.500$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 42.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.27 W/kg; SAR (10g) = 0.848 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.4 mm x 5.4 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 1.32 W/kg; SAR (10g) = 0.743 W/kg;

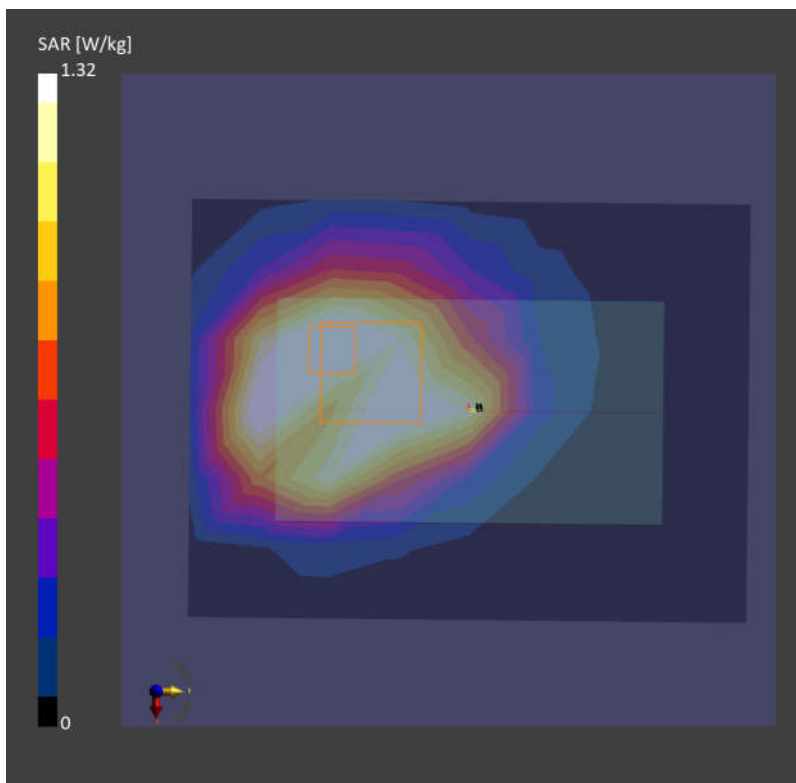

## 12\_LTE Band 66\_20M\_QPSK\_50RB\_0Offset\_Front\_0mm\_Short Cord Earpiece\_Ch132322

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used:  $f = 1745.000$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 42.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.728 W/kg; SAR (10g) = 0.399 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 1.42 W/kg; SAR (10g) = 0.728 W/kg;

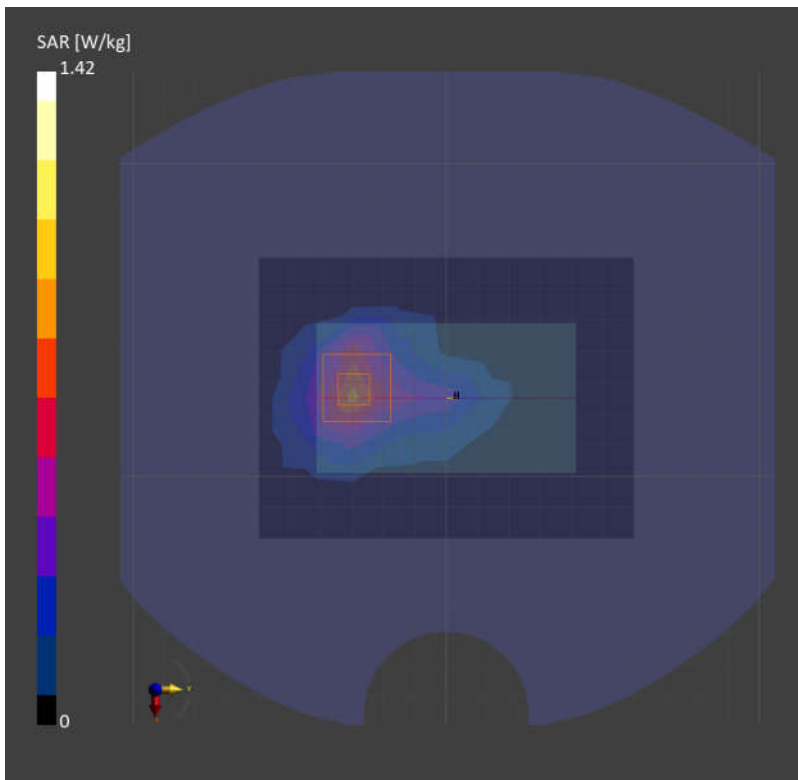

### 13\_LTE Band 2\_20M\_QPSK\_1RB\_0Offset\_Front\_0mm\_Ch18900

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used:  $f = 1880.000$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.0, 8.12, 7.59); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (90.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.36 W/kg; SAR (10g) = 0.697 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.18 dB

SAR (1g) = 1.61 W/kg; SAR (10g) = 0.779 W/kg;

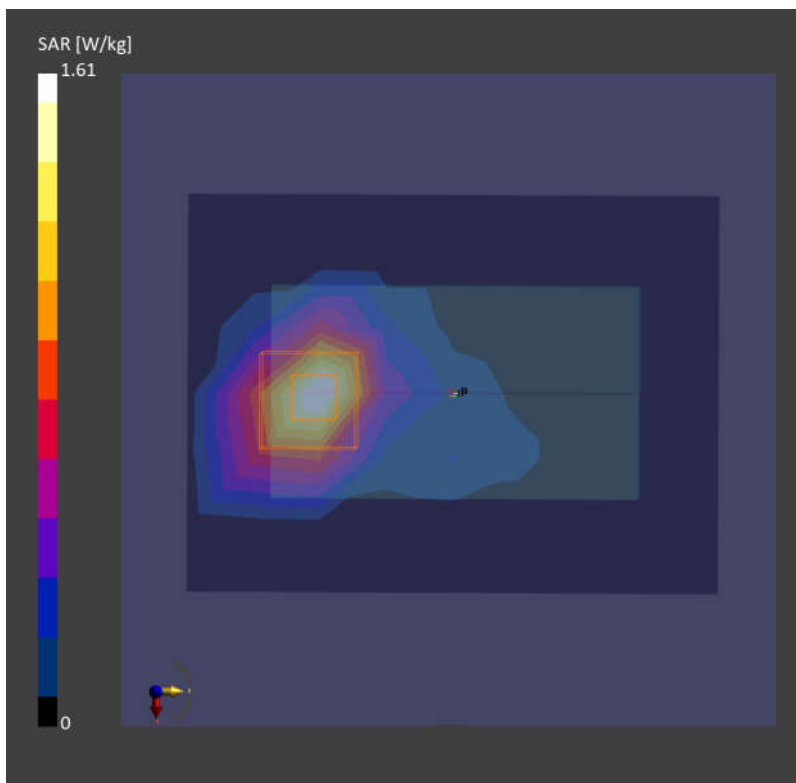

## 14\_WLAN2.4GHz\_802.11b 1Mbps\_Front\_0mm\_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used:  $f = 2412.000$  MHz;  $\sigma = 1.74$  S/m;  $\epsilon_r = 39.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.39, 7.01); Calibrated: 2023-06-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (80.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.25 W/kg; SAR (10g) = 0.571 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.25 W/kg; SAR (10g) = 0.519 W/kg;

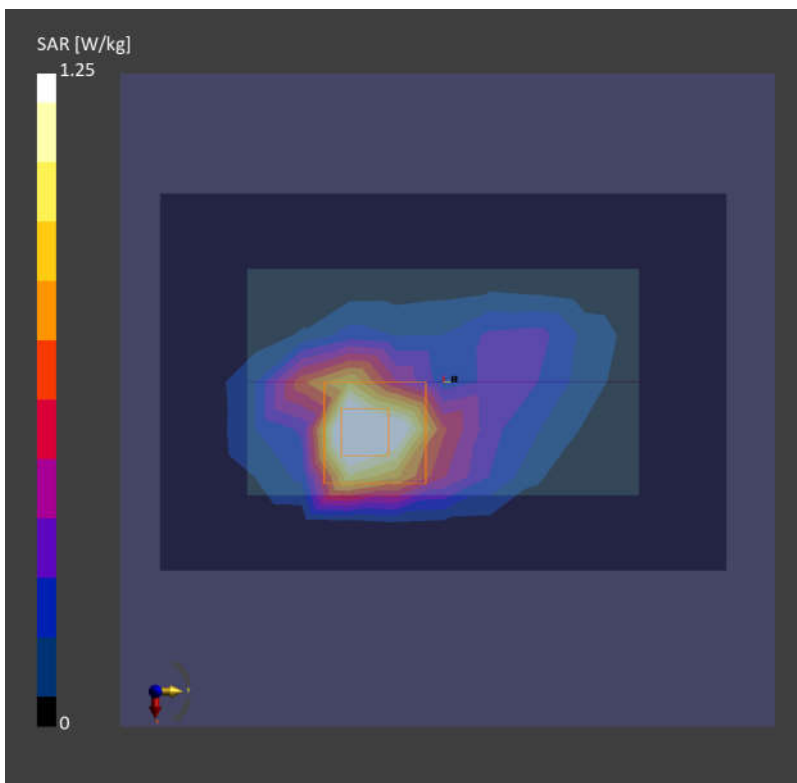

## 15\_Bluetooth\_1Mbps\_Front\_0mm\_Van Gogh Earpiece\_Ch0

Communication System: ISM 2.4 GHz Band; Frequency: 2402.000

Medium: HSL. Medium parameters used:  $f = 2402.000$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 40.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (80.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.077 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.174 W/kg; SAR (10g) = 0.070 W/kg;

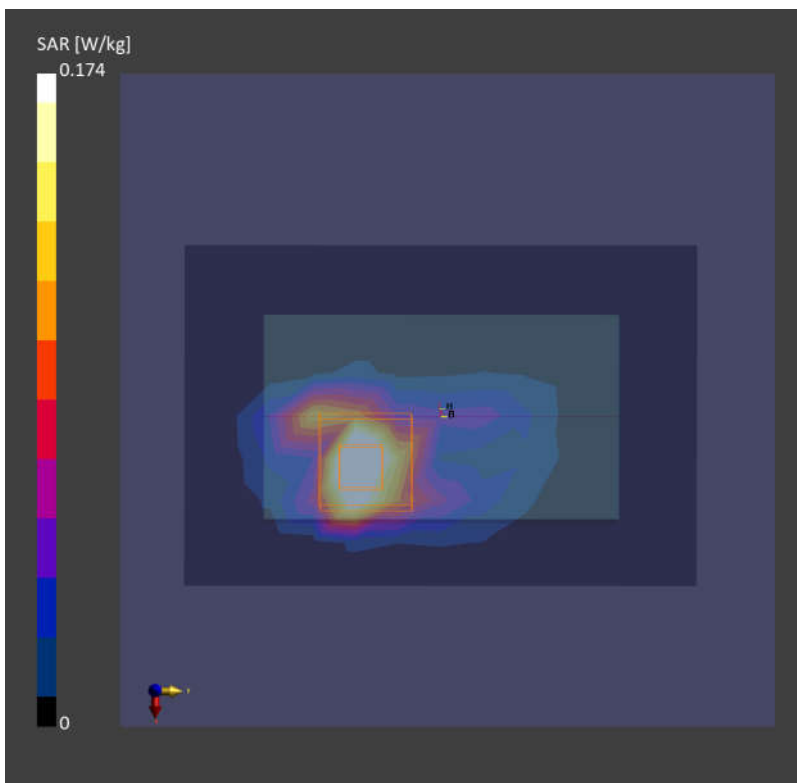

## 16\_WLAN5GHz\_802.11a 6Mbps\_Right Side\_0mm\_Ch64


Communication System: WLAN 5GHz; Frequency: 5320.000  
Medium: HSL. Medium parameters used:  $f= 5320.000$  MHz;  $\sigma= 4.64$  S/m;  $\epsilon_r = 35.3$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448

**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 1.72 W/kg; SAR (10g) = 0.429 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm  
Power Drift = -0.05 dB  
SAR (1g) = 1.92 W/kg; SAR (10g) = 0.428 W/kg;

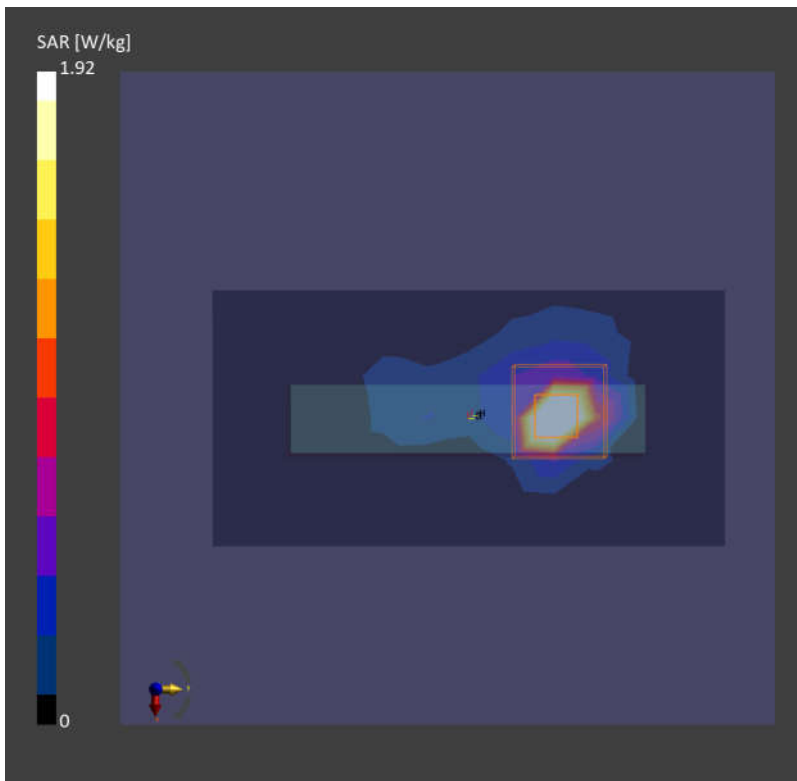



## 17\_WLAN5GHz\_802.11a 6Mbps\_Right Side\_0mm\_Ch124

Communication System: WLAN 5GHz; Frequency: 5620.000

Medium: HSL. Medium parameters used:  $f= 5620.000$  MHz;  $\sigma= 4.98$  S/m;  $\epsilon_r = 34.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(4.83, 5.71, 4.9); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.98 W/kg; SAR (10g) = 0.652 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm

Power Drift = -0.01 dB

SAR (1g) = 3.26 W/kg; SAR (10g) = 0.682 W/kg;

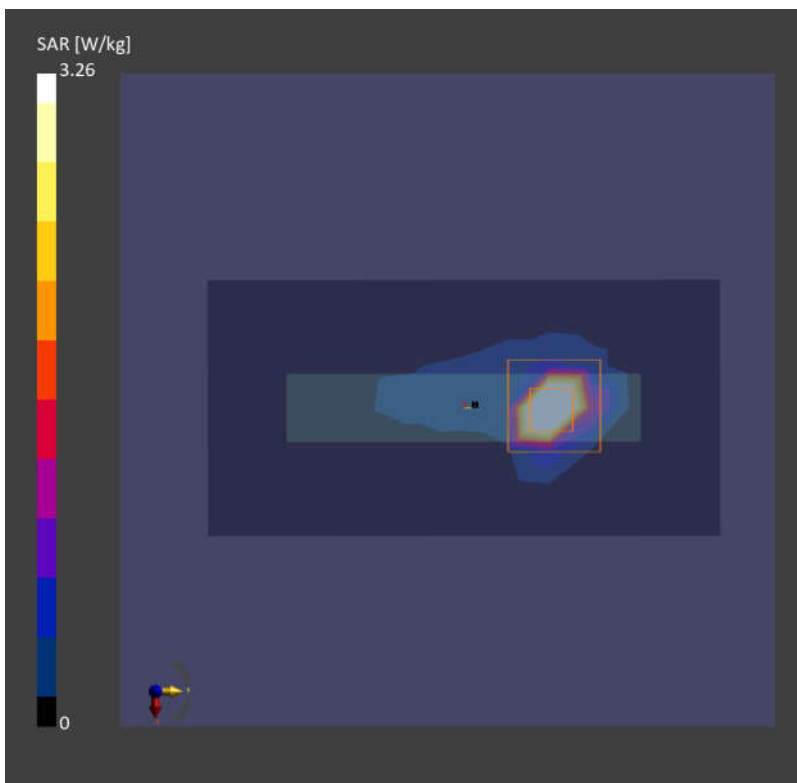

## 18\_WLAN5GHz\_802.11a 6Mbps\_Right Side\_0mm\_Short Cord Earpiece\_Ch165

Communication System: WLAN 5GHz; Frequency: 5825.000

Medium: HSL. Medium parameters used:  $f = 5825.000$  MHz;  $\sigma = 5.23$  S/m;  $\epsilon_r = 35.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448

**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.798 W/kg; SAR (10g) = 0.174 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.983 W/kg; SAR (10g) = 0.189 W/kg;

