



# FCC/ISED RF Test Report

APPLICANT : Motorola Solutions Inc.  
EQUIPMENT : WAVE PTX TWO-WAY RADIO  
BRAND NAME : MOTOROLA  
FCC MODEL NAME : TLK 25  
FCC MODEL NUMBER : HK2197A  
HVIN : HK2199A  
IC MODEL NUMBER : HK2199A  
PMN : TLK 25  
FCC ID : AZ499FT7171  
IC : 109U-99FT7171  
STANDARD : FCC Part 15 Subpart E §15.407  
ISED RSS-247 Issue 3  
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure  
TEST DATE(S) : Feb. 01, 2024 ~ Feb. 23, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer ..... 5

1.3 Product Feature of Equipment Under Test ..... 5

1.4 Product Specification of Equipment Under Test ..... 6

1.5 Specification of Accessory ..... 7

1.6 Modification of EUT ..... 7

1.7 Testing Location ..... 8

1.8 Test Software ..... 8

1.9 Applicable Standards ..... 9

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

2.1 Carrier Frequency and Channel ..... 10

2.2 Test Mode ..... 11

2.3 Connection Diagram of Test System ..... 13

2.4 Support Unit used in test configuration and system ..... 14

2.5 EUT Operation Test Setup ..... 14

2.6 Measurement Results Explanation Example ..... 14

**3 TEST RESULT ..... 15**

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 15

3.2 Maximum Conducted Output Power Measurement ..... 17

3.3 Power Spectral Density Measurement ..... 19

3.4 Unwanted Emissions Measurement ..... 22

3.5 AC Conducted Emission Measurement ..... 27

3.6 Antenna Requirements ..... 29

**4 LIST OF MEASURING EQUIPMENT ..... 30**

**5 MEASUREMENT UNCERTAINTY ..... 32**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR341404D	Rev. 01	Initial issue of report	Mar. 13, 2024
FR341404D	Rev. 02	Update the information of Applicant & Manufacturer	Mar. 25, 2024
FR341404D	Rev. 03	Add "*" mark to the radiated spurious emission test data to represent the noise floor	Apr. 03, 2024



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	ISED Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	RSS-247 Section 6	6dB, 26dB Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.1	2.1049 & 15.403(i)	RSS-247 Section 6	Emission Designator	-	Report Only	Pass	802.11a : 17M7D1D 802.11n HT20 : 18M5D1D 802.11n HT40 : 36M8D1D 802.11ac VHT80 : 76M6D1D
3.2	15.407(a)	RSS-247 Section 6	Maximum Conducted Output Power	≤ 24 dBm / RSS-247 Section 6 Limit	≤ 30 dBm	Pass	802.11a: 17.80 dBm / 0.0603 W 802.11n HT20: 16.66 dBm / 0.0463 W 802.11n HT40: 16.06 dBm / 0.0404 W 802.11ac VHT20: 15.86 dBm / 0.0385 W 802.11ac VHT40: 15.42 dBm / 0.0348 W 802.11ac VHT80: 15.39 dBm / 0.0346 W
3.3	15.407(a)	RSS-247 Section 6	Power Spectral Density	≤ 11 dBm/MHz / RSS-247 Section 6 Limit	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	RSS-247 Section 6	Unwanted Emissions	15.407(b) & 15.209(a) / RSS-247 [6.2] & RSS-Gen [8.9 Table 5, Table 6 and Table 7]	15.407(b)(4)(i) & 15.209(a) / RSS-247 [6.2] & RSS-Gen [8.9 Table 5, Table 6 and Table 7]	Pass	Under limit 5.38 dB at 5458.900 MHz for Band Edge, Under limit 13.18 dB at 11160.000 MHz for Harmonic, Under limit 6.37 dB at 49.400 MHz for LF
3.5	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a) / RSS-Gen [8.8 Table 4]	15.207(a) / RSS-Gen [8.8 Table 4]	Pass	Under limit 9.51 dB at 0.484 MHz
3.6	15.203 & 15.407(a)	N/A	Antenna Requirement	N/A	N/A	Pass	-

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

**Motorola Solutions Inc.**

Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.

## 1.2 Manufacturer

**Motorola Solutions Malaysia SDN BHD**

Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WAVE PTX TWO-WAY RADIO
Brand Name	MOTOROLA
FCC Model Name	TLK 25
FCC Model Number	HK2197A
HVIN	HK2199A
IC Model Number	HK2199A
PMN	TLK 25
FCC ID	AZ499FT7171
IC	109U-99FT7171
IMEI Code	Conducted: 354667800018580 Conduction: 354667800018143 Radiation: 354958440023837/354958440023845
HW Version	P2A
SW Version/FVIN	VANGOGH_BASE_ENG_D01.01.01_AP_D01.02.06_LNA
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
<b>Maximum Output Power to Antenna</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 17.80 dBm / 0.0603 W  802.11n HT20 : 16.66 dBm / 0.0463 W  802.11n HT40 : 15.95 dBm / 0.0394 W  802.11ac VHT20: 15.51 dBm / 0.0356 W  802.11ac VHT40: 14.98 dBm / 0.0315 W  802.11ac VHT80: 10.19 dBm / 0.0104 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 17.04 dBm / 0.0506 W  802.11n HT20 : 16.40 dBm / 0.0437 W  802.11n HT40 : 14.60 dBm / 0.0288 W  802.11ac VHT20: 14.56 dBm / 0.0286 W  802.11ac VHT40: 13.44 dBm / 0.0221 W  802.11ac VHT80: 10.05 dBm / 0.0101 W</p> <p><b>&lt;5500 MHz ~ 5700 MHz &gt;</b>  802.11a : 17.65 dBm / 0.0582 W  802.11n HT20 : 15.89 dBm / 0.0388 W  802.11n HT40 : 15.89 dBm / 0.0388 W  802.11ac VHT20: 15.53 dBm / 0.0357 W  802.11ac VHT40: 14.69 dBm / 0.0294 W  802.11ac VHT80: 15.39 dBm / 0.0346 W</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 16.02 dBm / 0.0400 W  802.11n HT20 : 16.00 dBm / 0.0398 W  802.11n HT40 : 16.06 dBm / 0.0404 W  802.11ac VHT20: 15.86 dBm / 0.0385 W  802.11ac VHT40: 15.42 dBm / 0.0348 W  802.11ac VHT80: 14.84 dBm / 0.0305 W</p>
<b>99% Occupied Bandwidth</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 17.502 MHz  802.11n HT20 : 18.382 MHz  802.11n HT40 : 36.683 MHz  802.11ac VHT80 : 76.084 MHz</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 17.423 MHz  802.11n HT20 : 18.382 MHz  802.11n HT40 : 36.683 MHz  802.11ac VHT80 : 76.244 MHz</p> <p><b>&lt;5500 MHz ~ 5700 MHz&gt;</b>  802.11a : 17.742 MHz  802.11n HT20 : 18.382 MHz  802.11n HT40 : 36.683 MHz  802.11ac VHT80 : 76.563 MHz</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 17.502 MHz  802.11n HT20 : 18.462 MHz  802.11n HT40 : 36.763 MHz  802.11ac VHT80 : 76.404 MHz</p>



<b>Antenna Type / Gain</b>	<p>&lt;5180 MHz ~ 5240 MHz&gt; PIFA Antenna with gain 1.80 dBi</p> <p>&lt;5260 MHz ~ 5320 MHz&gt; PIFA Antenna with gain 1.50 dBi</p> <p>&lt;5500 MHz ~ 5700 MHz&gt; PIFA Antenna with gain 0.40 dBi</p> <p>&lt;5745 MHz ~ 5825 MHz&gt; PIFA Antenna with gain -2.40 dBi</p>
<b>Type of Modulation</b>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)</p> <p>802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>

**Note:** For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.

### 1.5 Specification of Accessory

Accessories Information				
AC Adapter	Brand Name	MOTOROLA	Model Name	PS000150A31
MUC	Brand Name	MOTOROLA	Model Name	PMPN4659A
MUC power supply (US plug)	Brand Name	MOTOROLA	Model Name	PS000580A01
Battery	Brand Name	MOTOROLA	Model Name	PMNN4602A
Earphone 1	Brand Name	MOTOROLA	Model Name	PMLN8536A
Earphone 2	Brand Name	MOTOROLA	Model Name	PMLN8536B
USB Cable	Brand Name	MOTOROLA	Model Name	PMKN4294A

Note: Earphone 1 and Earphone 2 are only different in model name.

### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.7 Testing Location

<FCC>

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

<IC>

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02

<b>Test Firm</b>	Sporton International Inc. (KunShan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL: +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>Company Number</b>	<b>CAB identifier</b>
	CO01-KS 03CH06-KS TH01-KS	4086E	CN0050

### 1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	6.2009-8-24al
3.	CO01-KS	AUDIX	E3	6.2009-8-24





## 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013
- ♦ ISED RSS-247 Issue 3
- ♦ ISED RSS-Gen Issue 5

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210		
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290		
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

Note:

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

<b>AC</b>	
<b>Conducted Emission</b>	Mode 1 : WLAN Link(5G) + USB Cable(Charging From MUC)
<b>Remark:</b> For Radiated Test Cases, The tests were performed with Adapter, USB Cable and Earphone 1.	



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11n HT20	802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11n HT40	802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-

## 2.3 Connection Diagram of Test System

For Conducted Emission:

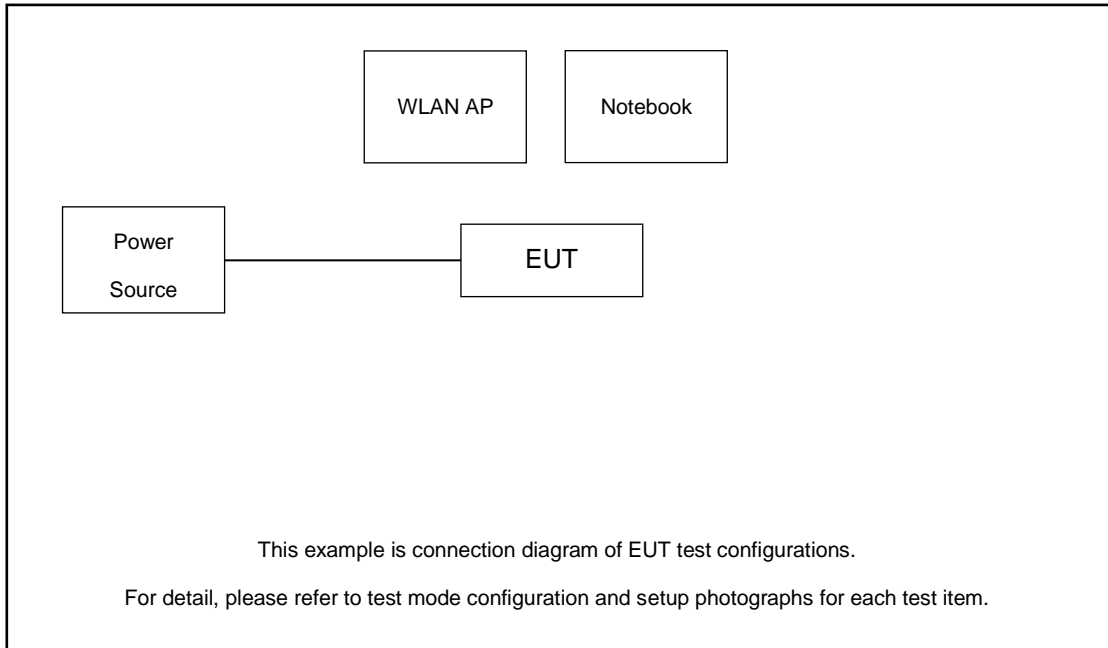

For Radiated Emission:

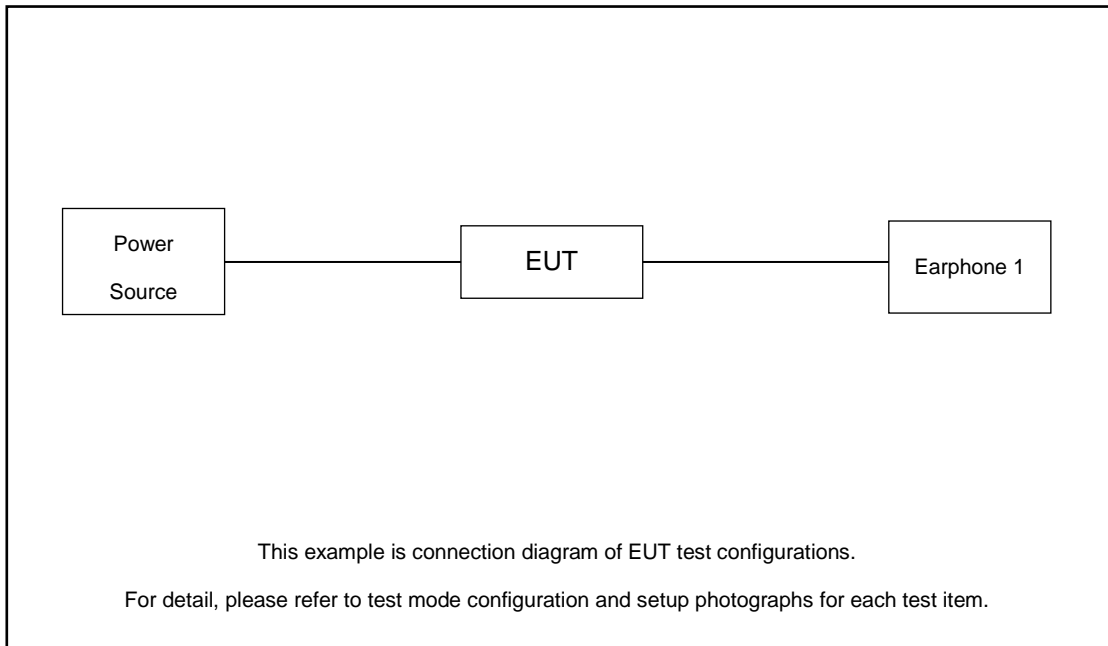

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.82 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.82 + 10 = 14.82 \text{ (dB)} \end{aligned}$$



### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

##### 3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> <li>Set RBW = approximately 1% of the emission bandwidth.</li> <li>Set the VBW &gt; RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</li> <li>For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.</li> <li>Measure and record the results in the test report.</li> </ol>
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> <li>Set RBW = 100kHz.</li> <li>Set the VBW ≥ 3 x RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 6 dB down from the peak of the emission.</li> <li>Measure and record the results in the test report.</li> </ol>

### 3.1.4 Test Setup

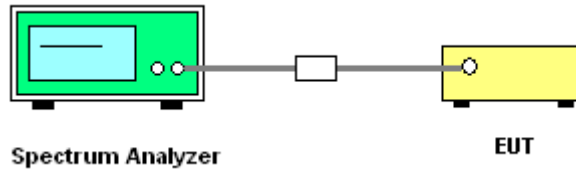

### 3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.





### 3.2 Maximum Conducted Output Power Measurement

#### 3.2.1 Limit of Maximum Conducted Output Power

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

**<IC RSS-247 Section 6>**

For the 5.15–5.25 GHz band,

<input type="checkbox"/>	For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log10B, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.
<input checked="" type="checkbox"/>	For other devices, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.25–5.35 GHz band,

<input type="checkbox"/>	For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log10B, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.
<input checked="" type="checkbox"/>	Other than devices installed in vehicles, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log10 B, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log10 B, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where x is the duty cycle.

### 3.2.4 Test Setup

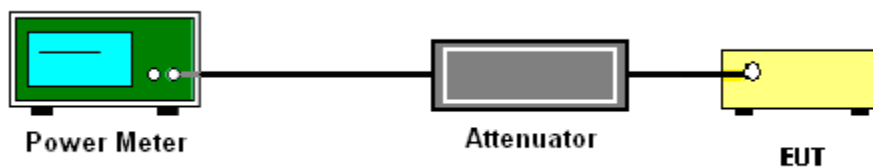

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

**<IC RSS-247 Section 6>**

For the 5.15–5.25 GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the 5.25–5.35 GHz band, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

#### For devices operating in the bands UNII-1/2A/2C

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

#### For devices operating in the band UNII-3


##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

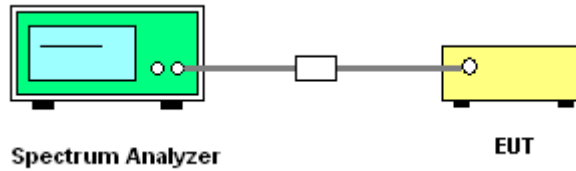

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27$  dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) -104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.




7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

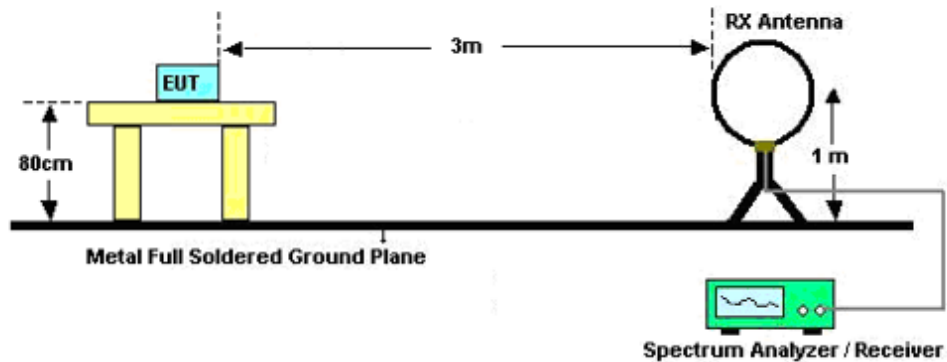

For radiated emissions from 30MHz to 1GHz

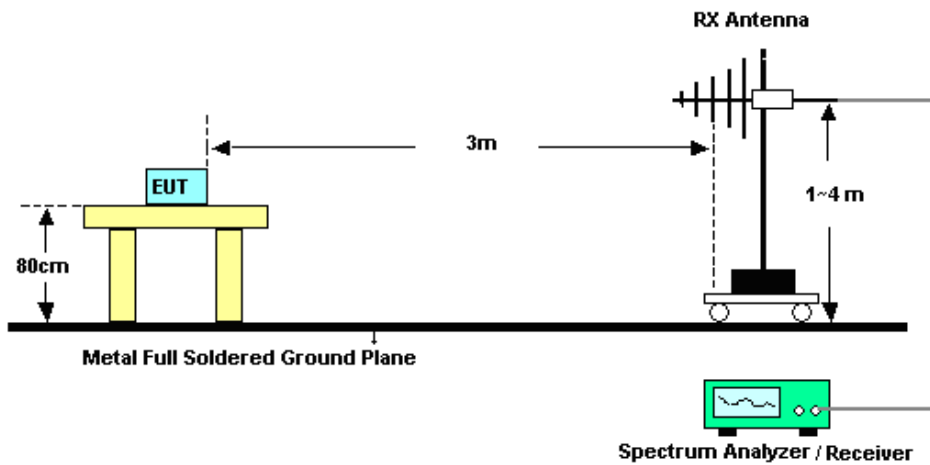

For radiated emissions above 1GHz

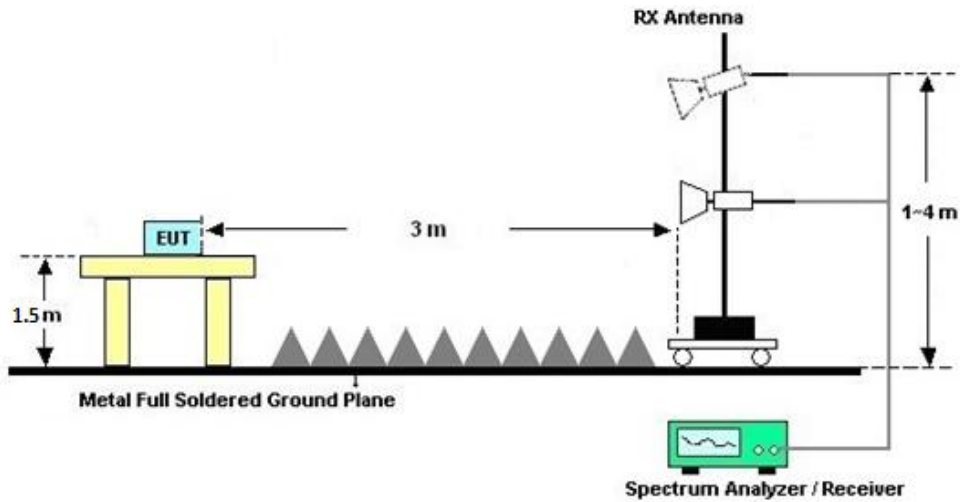

### 3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.4.7 Duty Cycle

Please refer to Appendix D.

### 3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

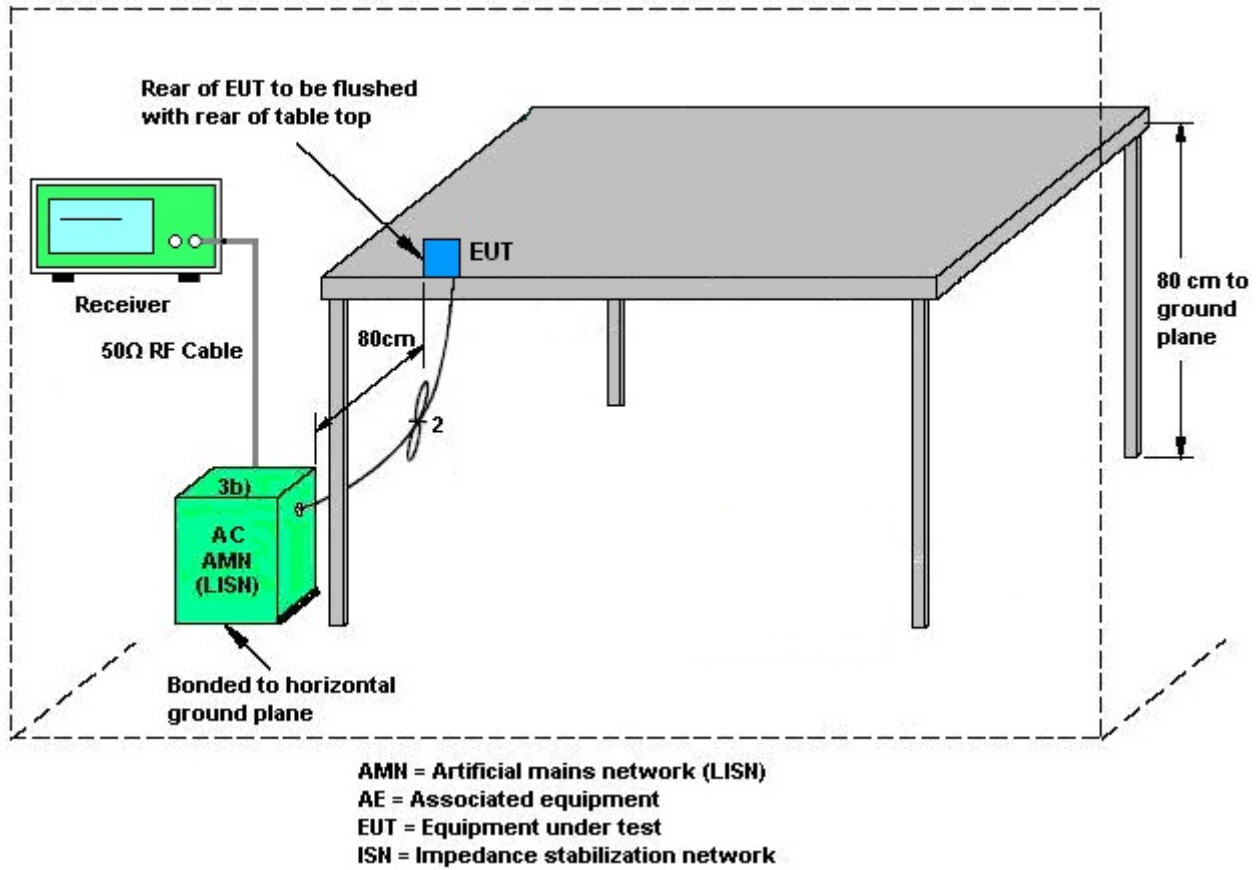

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Feb. 01, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Feb. 01, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Feb. 01, 2024	Jan. 01, 2025	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS 001	30MHz~40GHz	Jun. 17, 2023	Feb. 01, 2024	Jun. 16, 2024	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS 002	30MHz~40GHz	Jun. 17, 2023	Feb. 01, 2024	Jun. 16, 2024	Conducted (TH01-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX 104	TH01KS 003	30MHz~40GHz	Jun. 17, 2023	Feb. 01, 2024	Jun. 16, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2023	Feb. 04, 2024~Feb. 07, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 10, 2023	Feb. 04, 2024~Feb. 07, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Feb. 04, 2024~Feb. 07, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 09, 2023	Feb. 04, 2024~Feb. 07, 2024	Apr. 08, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2023	Feb. 04, 2024~Feb. 07, 2024	Apr. 05, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2024	Feb. 04, 2024~Feb. 07, 2024	Jan. 04, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 06, 2023	Feb. 04, 2024~Feb. 07, 2024	Jul. 05, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 04, 2024	Feb. 04, 2024~Feb. 07, 2024	Jan. 03, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz~18Ghz	Jan. 04, 2024	Feb. 04, 2024~Feb. 07, 2024	Jan. 03, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 10, 2023	Feb. 04, 2024~Feb. 07, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 04, 2024~Feb. 07, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 04, 2024~Feb. 07, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 04, 2024~Feb. 07, 2024	NCR	Radiation (03CH06-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX1 26E	03CH06KS 001	30Mhz-18Ghz	Aug. 02, 2023	Feb. 04, 2024~Feb. 07, 2024	Aug. 01, 2024	Radiation (03CH06-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX1 26E	03CH06KS 002	30Mhz-18Ghz	Aug. 02, 2023	Feb. 04, 2024~Feb. 07, 2024	Aug. 01, 2024	Radiation (03CH06-KS)
High Pass Filter	Wainwright Instruments GmbH	WHKX10-5850-6500-18000-40ST	1	6.5G High Pass	Aug. 02, 2023	Feb. 04, 2024~Feb. 07, 2024	Aug. 01, 2024	Radiation (03CH06-KS)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Feb. 23, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Feb. 23, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Feb. 23, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Feb. 23, 2024	Oct. 10, 2024	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q 3N1	9kHz~30MHz	Sep. 15, 2023	Feb. 23, 2024	Sep. 14, 2024	Conduction (CO01-KS)
Transient limiter	COM-POWER	LIT-153	531040	150kHz~30MHz	Sep. 15, 2023	Feb. 23, 2024	Sep. 14, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----





## Appendix A. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2024/2/1	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-1 single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	36	5180	0.08	16.62	24.00	1.80		Pass	15.5
11a	6Mbps	1	44	5220	0.08	17.80	24.00	1.80		Pass	17
11a	6Mbps	1	48	5240	0.08	17.70	24.00	1.80		Pass	17
HT20	MCS0	1	36	5180	0.09	14.91	24.00	1.80		Pass	14
HT20	MCS0	1	44	5220	0.09	16.65	24.00	1.80		Pass	16
HT20	MCS0	1	48	5240	0.09	16.66	24.00	1.80		Pass	16
HT40	MCS0	1	38	5190	0.18	10.91	24.00	1.80		Pass	8
HT40	MCS0	1	46	5230	0.18	15.95	24.00	1.80		Pass	14
VHT20	MCS0	1	36	5180	0.09	14.64	24.00	1.80		Pass	14
VHT20	MCS0	1	44	5220	0.09	15.51	24.00	1.80		Pass	15
VHT20	MCS0	1	48	5240	0.09	15.44	24.00	1.80		Pass	15
VHT40	MCS0	1	38	5190	0.18	10.70	24.00	1.80		Pass	8
VHT40	MCS0	1	46	5230	0.18	14.98	24.00	1.80		Pass	13
VHT80	MCS0	1	42	5210	0.33	10.19	24.00	1.80		Pass	8

**TEST RESULTS DATA**  
**Average Power Table**

IC U-NII-1 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	IC Conducted Power Limit (dBm)	DG (dBi)	IC EIRP Power (dBm)	IC EIRP Power Limit (dBm)	Pass /Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	36	5180	0.08	16.62	20.59	1.80	18.42	22.39	Pass	15.5
11a	6Mbps	1	44	5220	0.08	17.80	20.61	1.80	19.60	22.41	Pass	17
11a	6Mbps	1	48	5240	0.08	17.70	20.63	1.80	19.50	22.43	Pass	17
HT20	MCS0	1	36	5180	0.09	14.91	20.81	1.80	16.71	22.61	Pass	14
HT20	MCS0	1	44	5220	0.09	16.65	20.84	1.80	18.45	22.64	Pass	16
HT20	MCS0	1	48	5240	0.09	16.66	20.84	1.80	18.46	22.64	Pass	16
HT40	MCS0	1	38	5190	0.18	10.91	21.21	1.80	12.71	23.01	Pass	8
HT40	MCS0	1	46	5230	0.18	15.95	21.21	1.80	17.75	23.01	Pass	14
VHT20	MCS0	1	36	5180	0.09	14.64	20.81	1.80	16.44	22.61	Pass	14
VHT20	MCS0	1	44	5220	0.09	15.51	20.84	1.80	17.31	22.64	Pass	15
VHT20	MCS0	1	48	5240	0.09	15.44	20.84	1.80	17.24	22.64	Pass	15
VHT40	MCS0	1	38	5190	0.18	10.70	21.21	1.80	12.50	23.01	Pass	8
VHT40	MCS0	1	46	5230	0.18	14.98	21.21	1.80	16.78	23.01	Pass	13
VHT80	MCS0	1	42	5210	0.33	10.19	21.21	1.80	11.99	23.01	Pass	8

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2A single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	52	5260	0.08	17.04	23.98	1.50	26.99	Pass	16.5
11a	6Mbps	1	60	5300	0.08	16.19	23.98	1.50	26.99	Pass	16.5
11a	6Mbps	1	64	5320	0.08	16.21	23.98	1.50	26.99	Pass	17
HT20	MCS0	1	52	5260	0.09	16.40	23.98	1.50	26.99	Pass	16
HT20	MCS0	1	60	5300	0.09	15.62	23.98	1.50	26.99	Pass	16
HT20	MCS0	1	64	5320	0.09	15.51	23.98	1.50	26.99	Pass	16
HT40	MCS0	1	54	5270	0.18	14.60	23.98	1.50	26.99	Pass	13
HT40	MCS0	1	62	5310	0.18	11.22	23.98	1.50	26.99	Pass	10
VHT20	MCS0	1	52	5260	0.09	14.33	23.98	1.50	26.99	Pass	14
VHT20	MCS0	1	60	5300	0.09	14.02	23.98	1.50	26.99	Pass	14
VHT20	MCS0	1	64	5320	0.09	14.56	23.98	1.50	26.99	Pass	15
VHT40	MCS0	1	54	5270	0.18	13.44	23.98	1.50	26.99	Pass	12
VHT40	MCS0	1	62	5310	0.18	11.13	23.98	1.50	26.99	Pass	10
VHT80	MCS0	1	58	5290	0.33	10.05	23.98	1.50	26.99	Pass	9

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2C single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	100	5500	0.08	17.31	23.98	0.40	26.99	Pass	18
11a	6Mbps	1	116	5580	0.08	17.65	23.98	0.40	26.99	Pass	18
11a	6Mbps	1	140	5700	0.08	17.01	23.98	0.40	26.99	Pass	17.5
HT20	MCS0	1	100	5500	0.09	15.89	23.98	0.40	26.99	Pass	16
HT20	MCS0	1	116	5580	0.09	15.18	23.98	0.40	26.99	Pass	15
HT20	MCS0	1	140	5700	0.09	15.53	23.98	0.40	26.99	Pass	15.5
HT40	MCS0	1	102	5510	0.18	11.89	23.98	0.40	26.99	Pass	10.5
HT40	MCS0	1	110	5550	0.18	14.20	23.98	0.40	26.99	Pass	13
HT40	MCS0	1	134	5670	0.18	15.89	23.98	0.40	26.99	Pass	15
VHT20	MCS0	1	100	5500	0.09	15.53	23.98	0.40	26.99	Pass	15.5
VHT20	MCS0	1	116	5580	0.09	13.73	23.98	0.40	26.99	Pass	13.5
VHT20	MCS0	1	140	5700	0.09	14.11	23.98	0.40	26.99	Pass	14
VHT40	MCS0	1	102	5510	0.18	11.80	23.98	0.40	26.99	Pass	10.5
VHT40	MCS0	1	110	5550	0.18	13.62	23.98	0.40	26.99	Pass	12.5
VHT40	MCS0	1	134	5670	0.18	14.69	23.98	0.40	26.99	Pass	14
VHT80	MCS0	1	106	5530	0.33	10.49	23.98	0.40	26.99	Pass	9.5
VHT80	MCS0	1	122	5610	0.33	15.39	23.98	0.40	26.99	Pass	14.5

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 single antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
					Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	149	5745	0.08	15.51	30.00	-2.40	Pass	15
11a	6Mbps	1	157	5785	0.08	15.90	30.00	-2.40	Pass	15
11a	6Mbps	1	165	5825	0.08	16.02	30.00	-2.40	Pass	15
HT20	MCS0	1	149	5745	0.09	14.81	30.00	-2.40	Pass	14
HT20	MCS0	1	157	5785	0.09	14.68	30.00	-2.40	Pass	13.5
HT20	MCS0	1	165	5825	0.09	16.00	30.00	-2.40	Pass	15
HT40	MCS0	1	151	5755	0.18	15.70	30.00	-2.40	Pass	14
HT40	MCS0	1	159	5795	0.18	16.06	30.00	-2.40	Pass	14
VHT20	MCS0	1	149	5745	0.09	14.66	30.00	-2.40	Pass	14
VHT20	MCS0	1	157	5785	0.09	13.11	30.00	-2.40	Pass	12
VHT20	MCS0	1	165	5825	0.09	15.86	30.00	-2.40	Pass	15
VHT40	MCS0	1	151	5755	0.18	13.40	30.00	-2.40	Pass	11.5
VHT40	MCS0	1	159	5795	0.18	15.42	30.00	-2.40	Pass	13.5
VHT80	MCS0	1	155	5775	0.33	14.84	30.00	-2.40	Pass	13.5



### Emission Bandwidth

#### Test Result


TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	22.44	5168.80	5191.24	---	---
		5220	23.96	5207.76	5231.72	---	---
		5240	24.16	5228.04	5252.20	---	---
		5260	23.20	5248.40	5271.60	---	---
		5300	23.56	5288.28	5311.84	---	---
		5320	23.96	5308.04	5332.00	---	---
		5500	24.88	5487.92	5512.80	---	---
		5580	24.68	5567.44	5592.12	---	---
		5700	24.16	5688.08	5712.24	---	---
		5745	23.64	5733.00	5756.64	---	---
		5785	24.20	5772.68	5796.88	---	---
11N20SISO	Ant1	5180	23.28	5168.12	5191.40	---	---
		5220	23.92	5208.40	5232.32	---	---
		5240	24.20	5228.28	5252.48	---	---
		5260	24.60	5247.52	5272.12	---	---
		5300	23.72	5288.40	5312.12	---	---
		5320	24.76	5307.48	5332.24	---	---
		5500	25.44	5487.44	5512.88	---	---
		5580	24.08	5567.68	5591.76	---	---
		5700	24.72	5687.52	5712.24	---	---
		5745	24.24	5732.92	5757.16	---	---
		5785	23.92	5773.32	5797.24	---	---
11N40SISO	Ant1	5190	41.84	5169.12	5210.96	---	---
		5230	41.52	5209.28	5250.80	---	---
		5270	41.84	5249.12	5290.96	---	---
		5310	41.60	5289.36	5330.96	---	---
		5510	41.36	5489.28	5530.64	---	---
		5550	41.44	5529.36	5570.80	---	---
		5670	41.60	5649.20	5690.80	---	---
		5755	41.52	5734.20	5775.72	---	---
11AC80SISO	Ant1	5210	82.72	5169.04	5251.76	---	---
		5290	85.12	5246.80	5331.92	---	---
		5530	84.96	5487.12	5572.08	---	---
		5610	100.00	5552.08	5652.08	---	---
		5775	83.68	5733.24	5816.92	---	---








11A\_5240

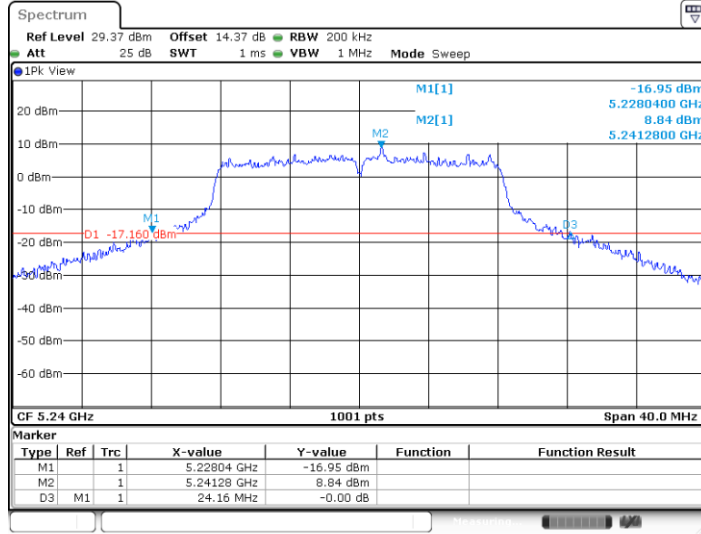


Date: 1.FEB.2024 11:37:37

11A\_5260

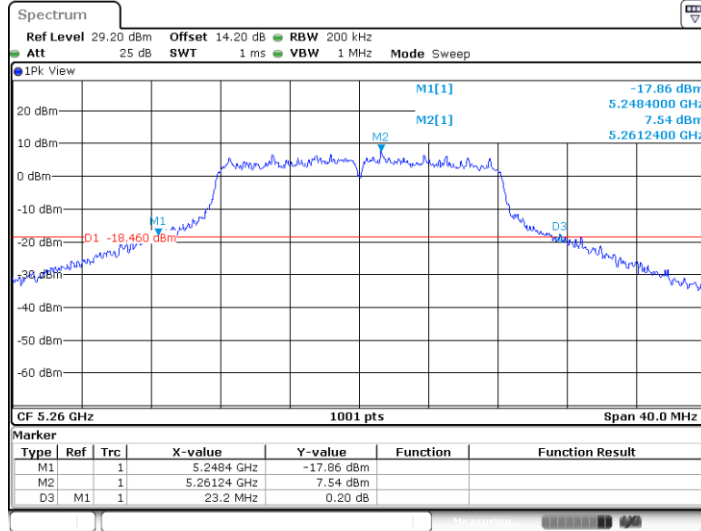


Date: 1.FEB.2024 11:38:31

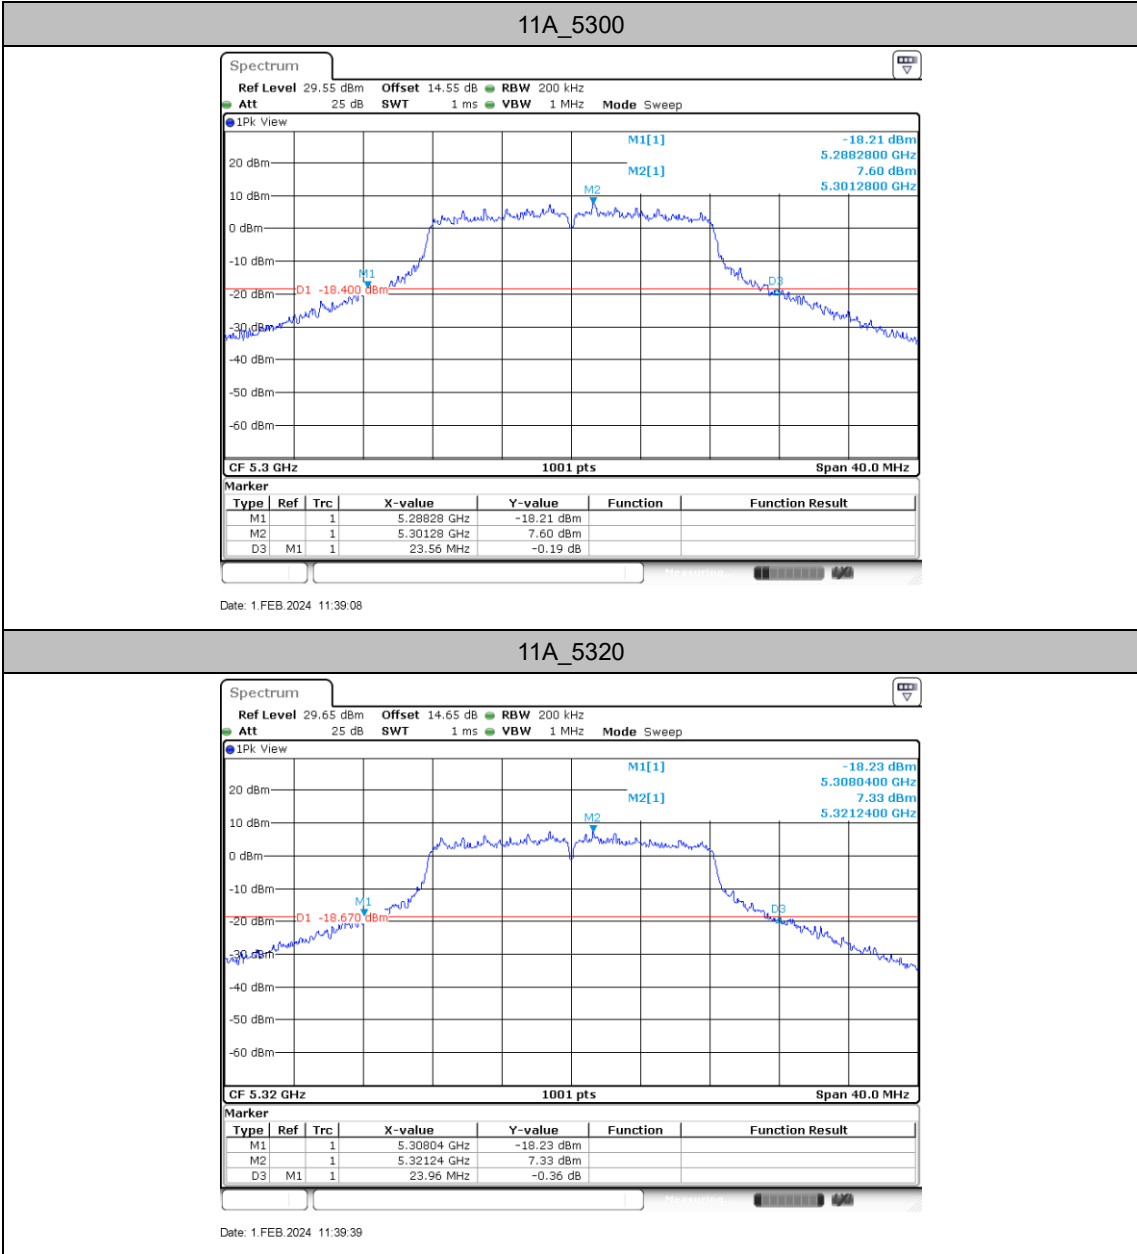




11A\_5500

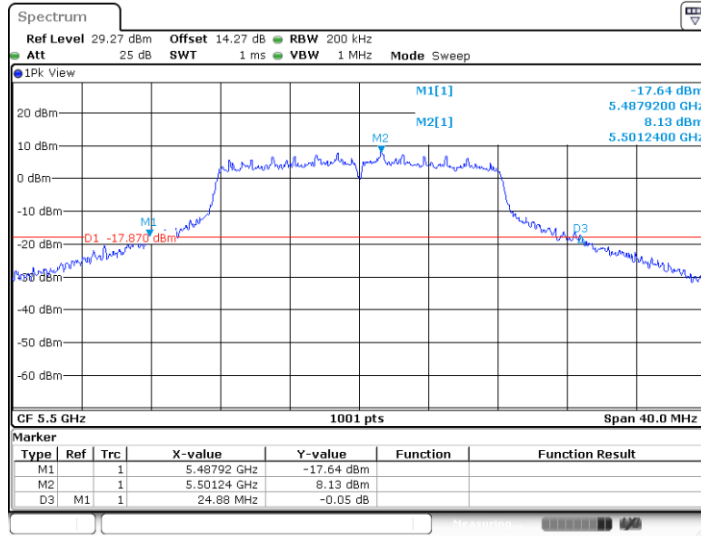

Date: 1.FEB.2024 11:40:09


11A\_5580

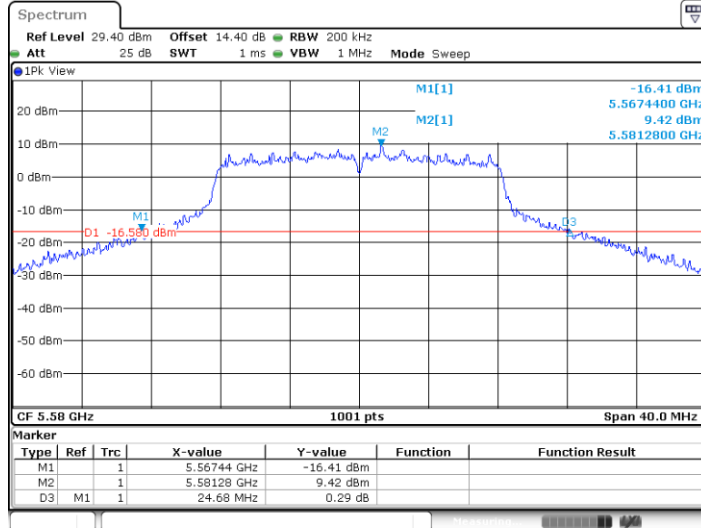

Date: 1.FEB.2024 11:41:06




11A\_5700

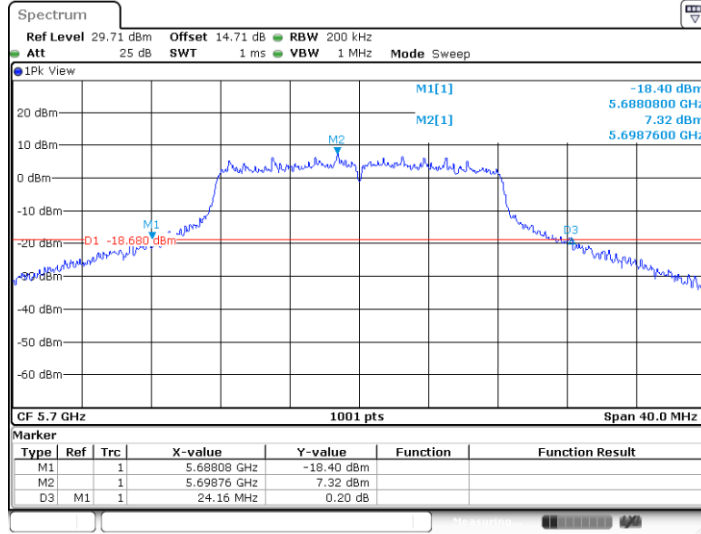


Date: 1.FEB.2024 11:41:43

11A\_5745

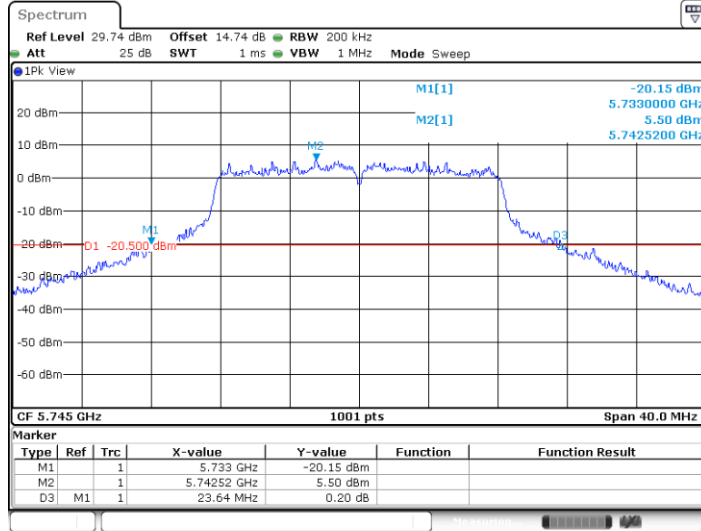


Date: 1.FEB.2024 11:42:27

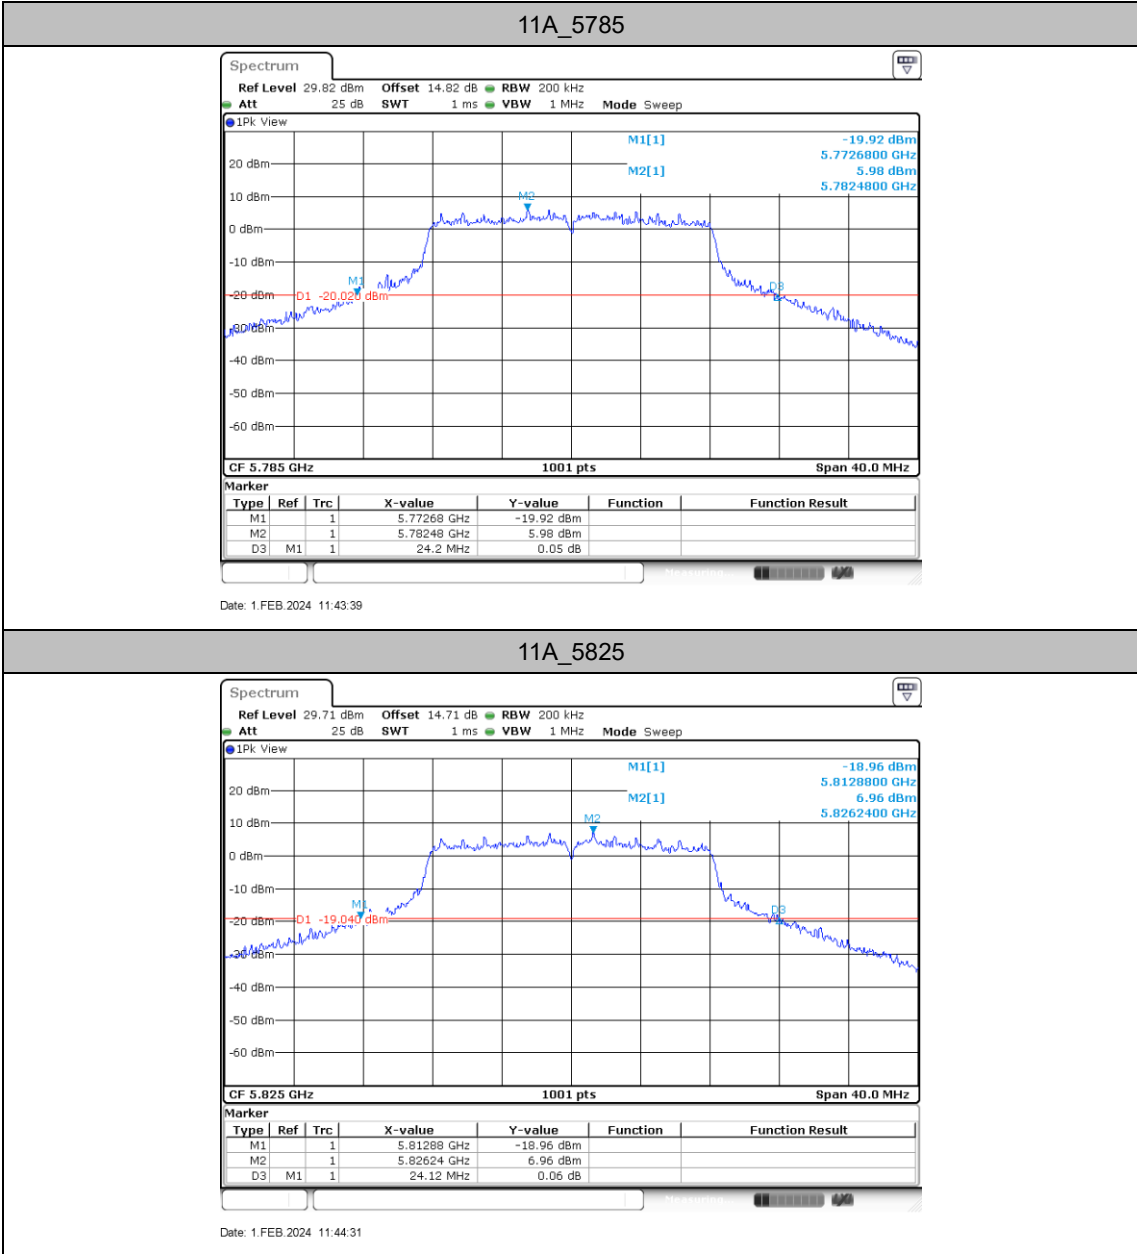




11N20SISO\_5180

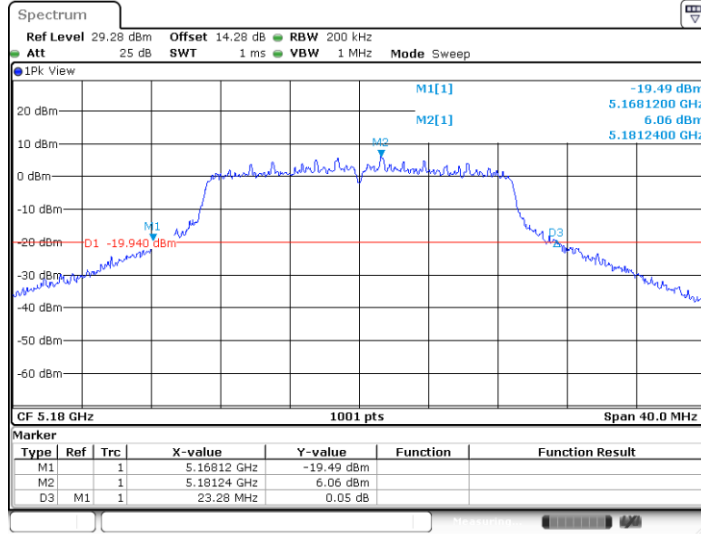

Date: 1.FEB.2024 11:46:07


11N20SISO\_5220

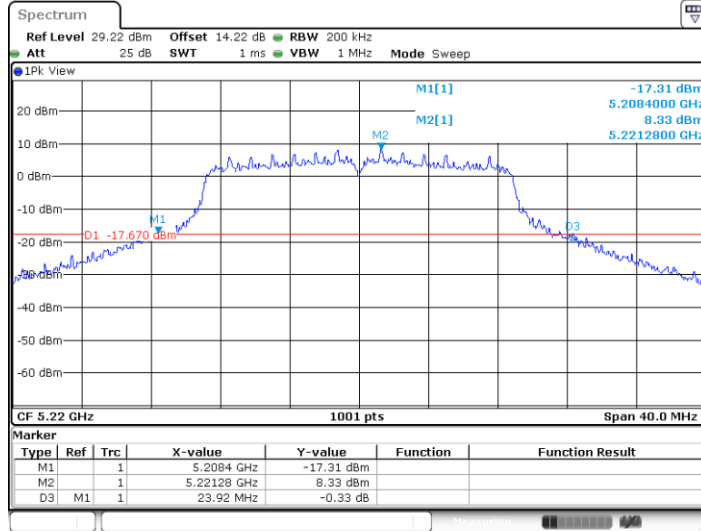

Date: 1.FEB.2024 11:46:51




11N20SISO\_5240

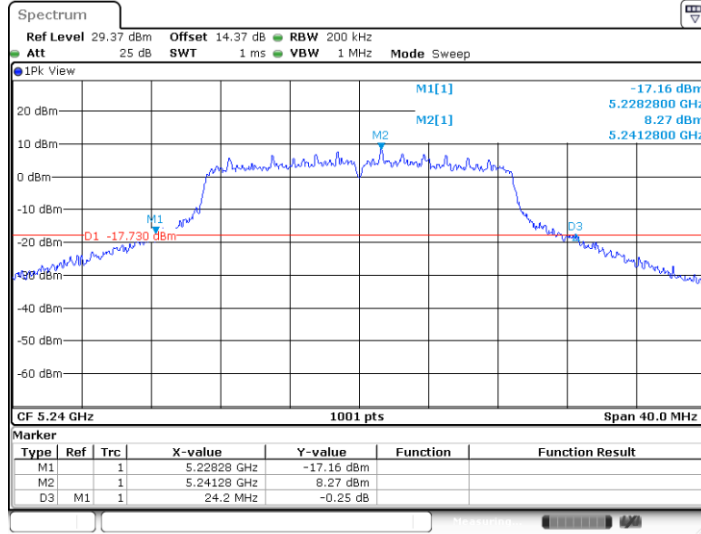

Date: 1.FEB.2024 11:47:39

11N20SISO\_5260

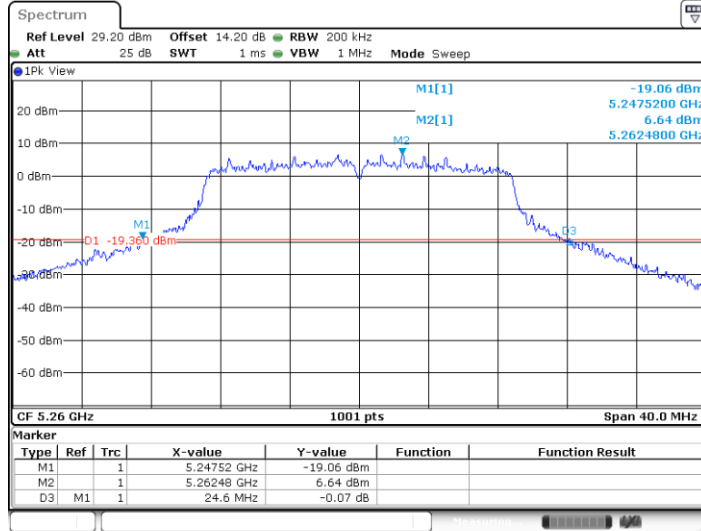


Date: 1.FEB.2024 11:48:16






11N20SISO\_5300

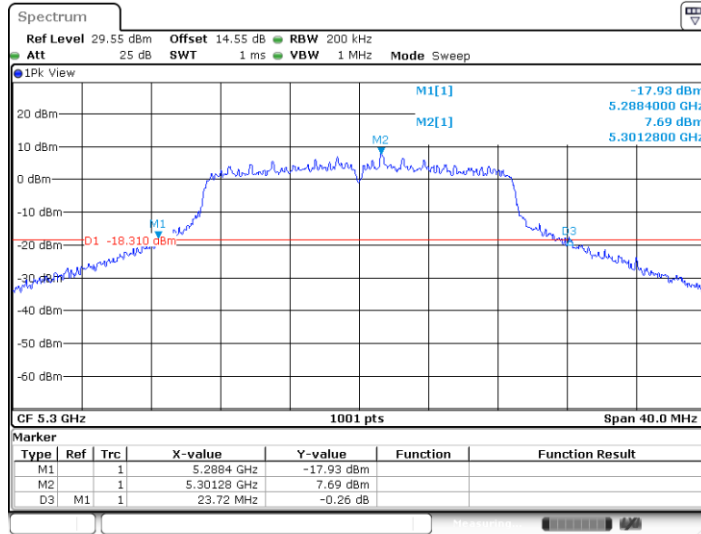

Date: 1.FEB.2024 11:48:48


11N20SISO\_5320

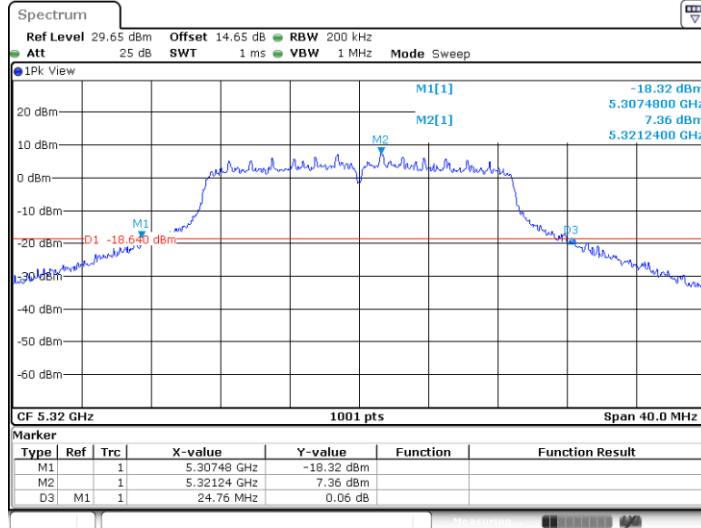

Date: 1.FEB.2024 11:58:53




11N20SISO\_5500

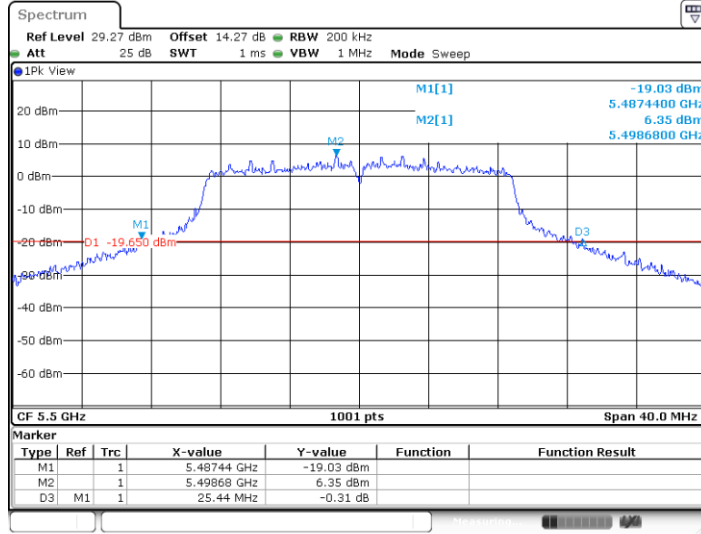

Date: 1.FEB.2024 11:59:21


11N20SISO\_5580

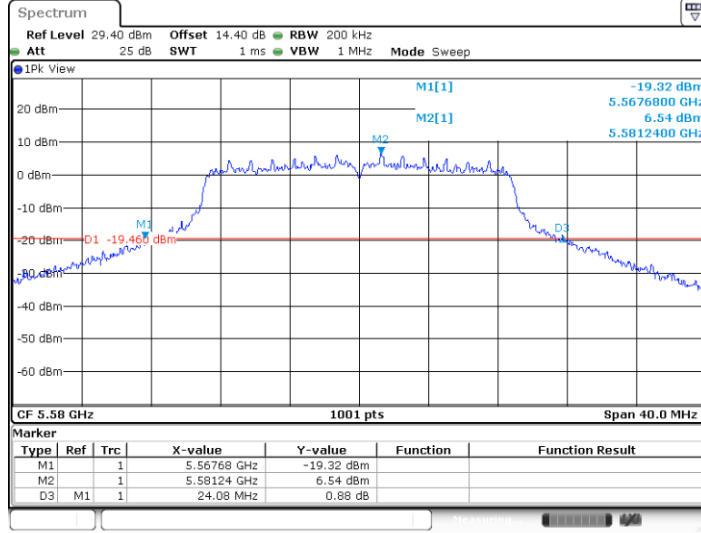

Date: 1.FEB.2024 11:59:53




11N20SISO\_5700

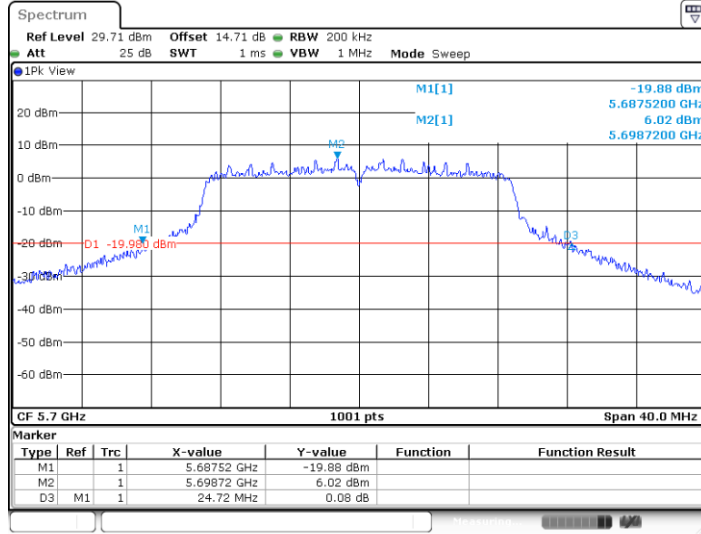


Date: 1.FEB.2024 12:00:22

11N20SISO\_5745

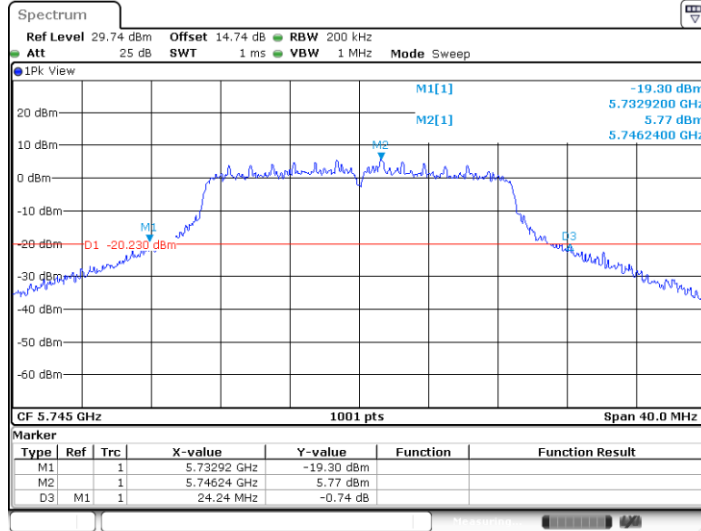


Date: 1.FEB.2024 12:01:02

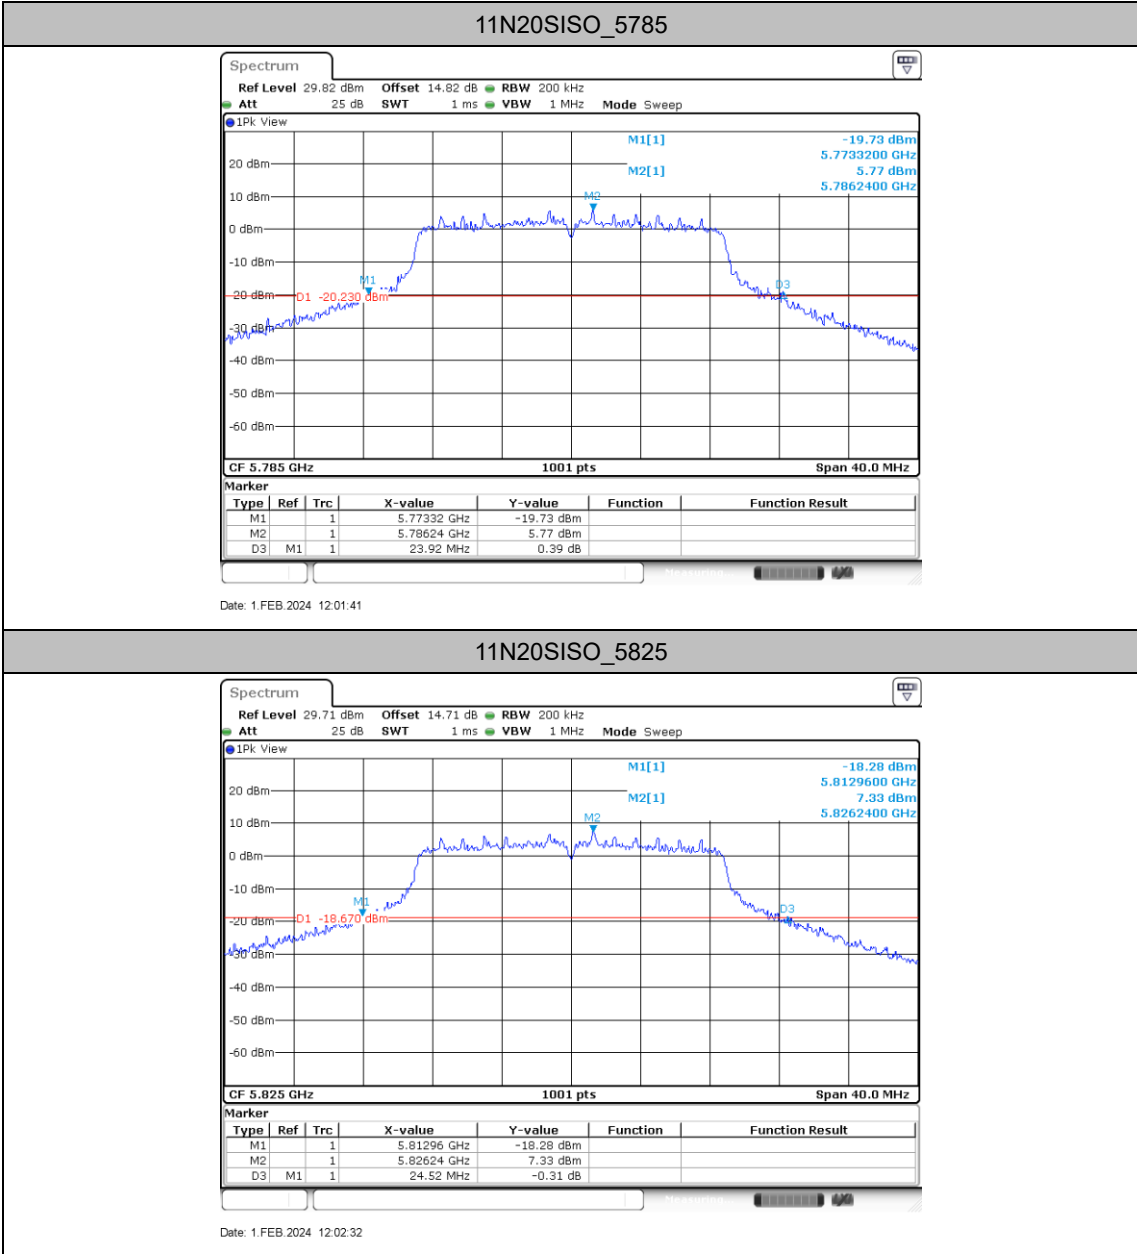




11N40SISO\_5190

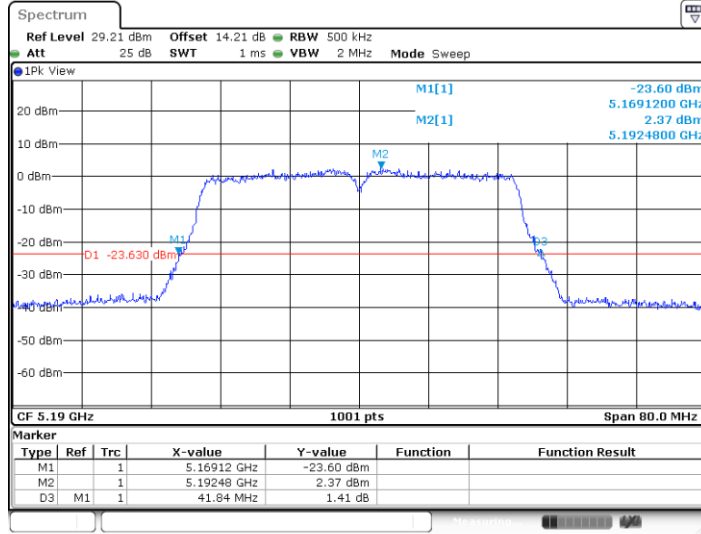

Date: 1.FEB.2024 12:04:21


11N40SISO\_5230

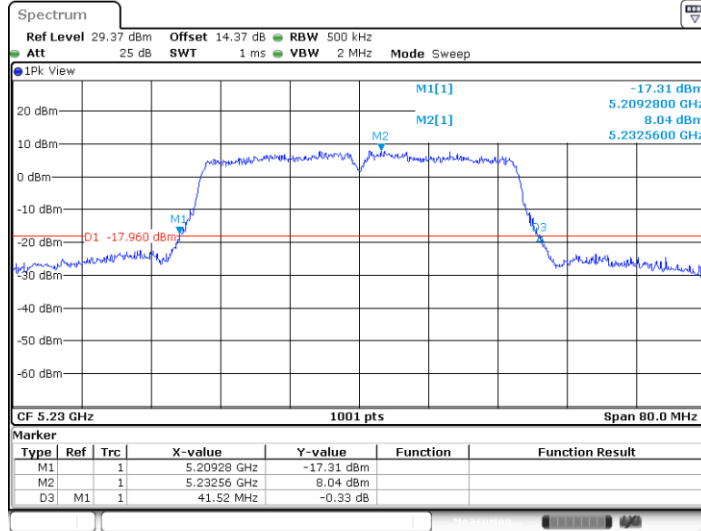

Date: 1.FEB.2024 12:05:35




11N40SISO\_5270

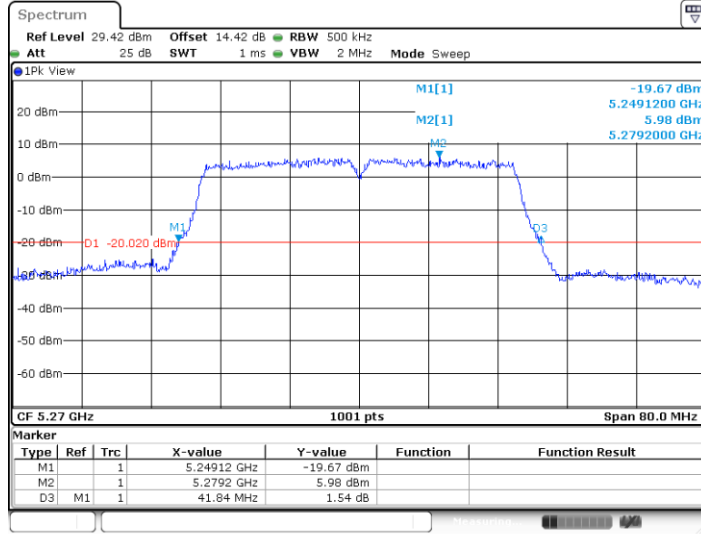

Date: 1.FEB.2024 12:06:16


11N40SISO\_5310

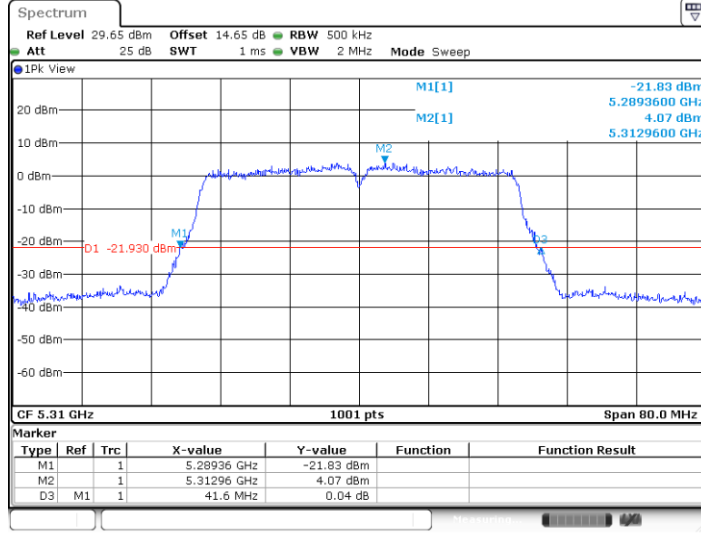

Date: 1.FEB.2024 12:06:58




11N40SISO\_5510

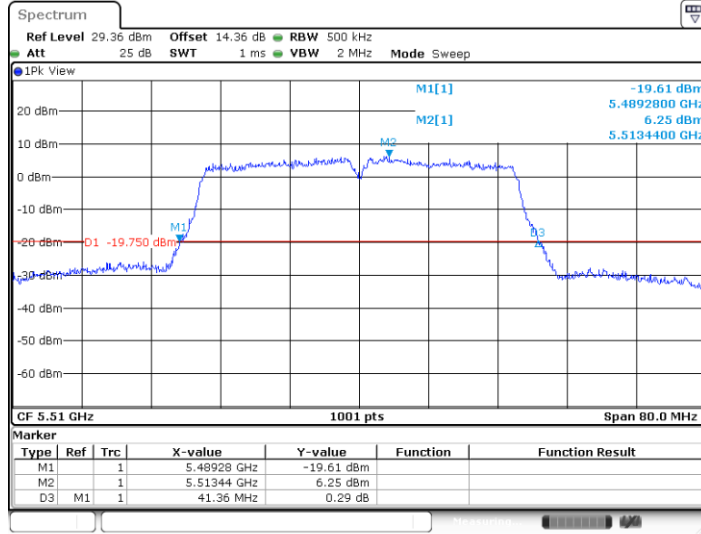

Date: 1.FEB.2024 12:07:30


11N40SISO\_5550

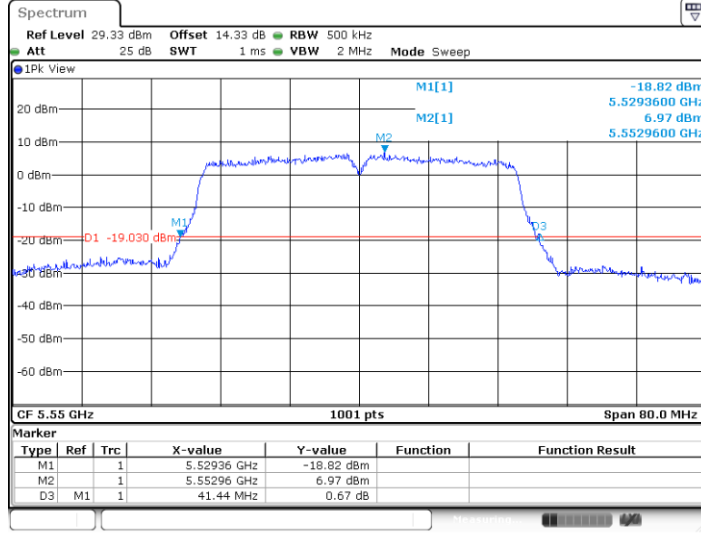

Date: 1.FEB.2024 12:08:10




11N40SISO\_5670

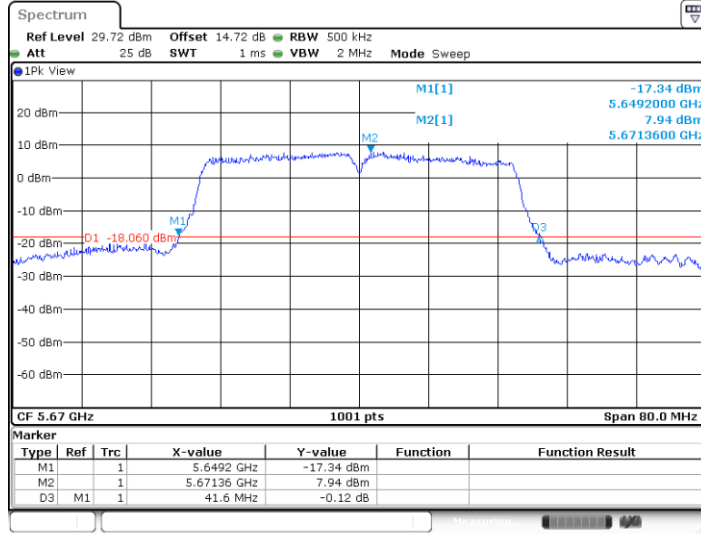

Date: 1.FEB.2024 12:09:08

11N40SISO\_5755

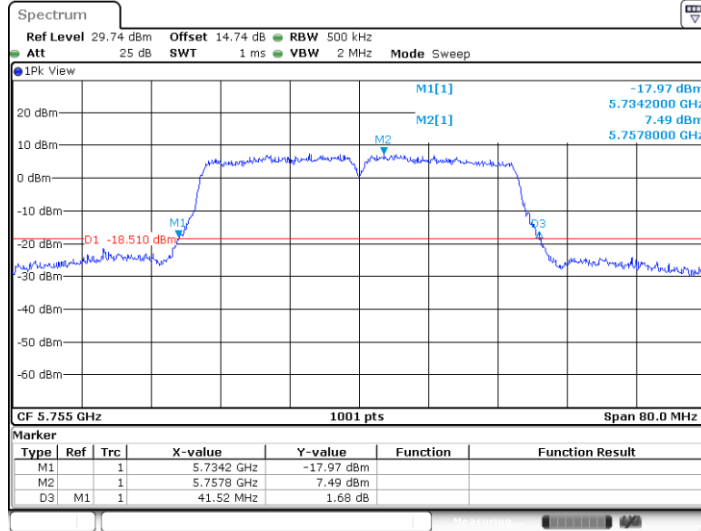


Date: 1.FEB.2024 12:11:58






11N40SISO\_5795

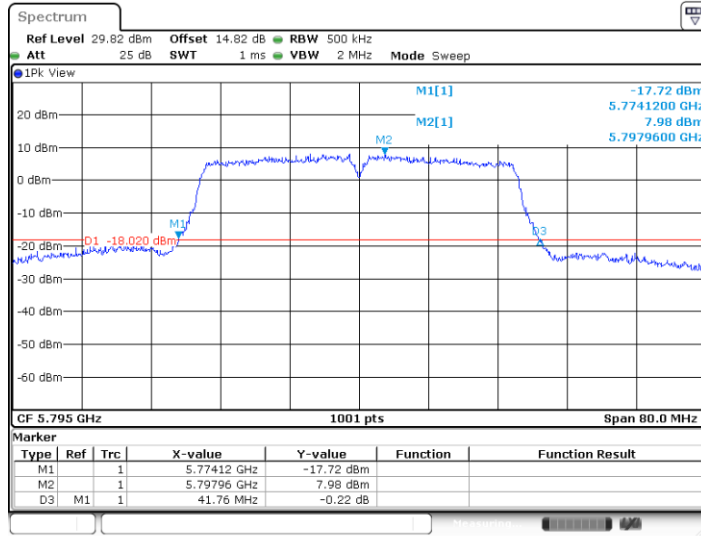

Date: 1.FEB.2024 12:12:46


11AC80SISO\_5210

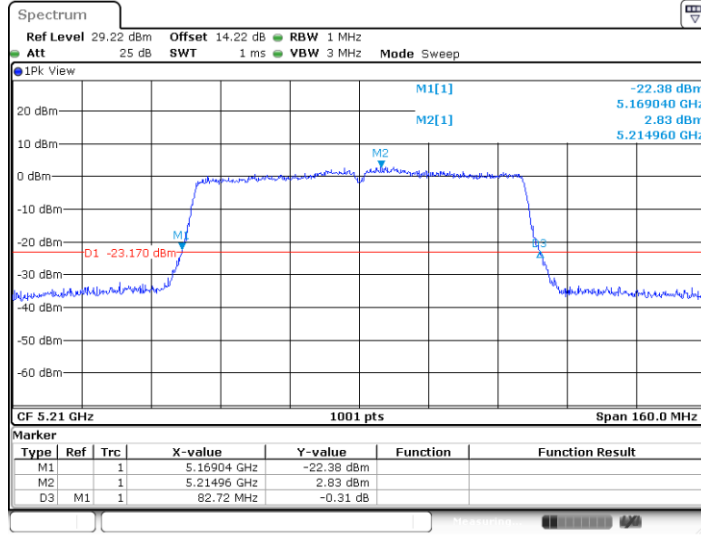

Date: 1.FEB.2024 12:17:58




11AC80SISO\_5290

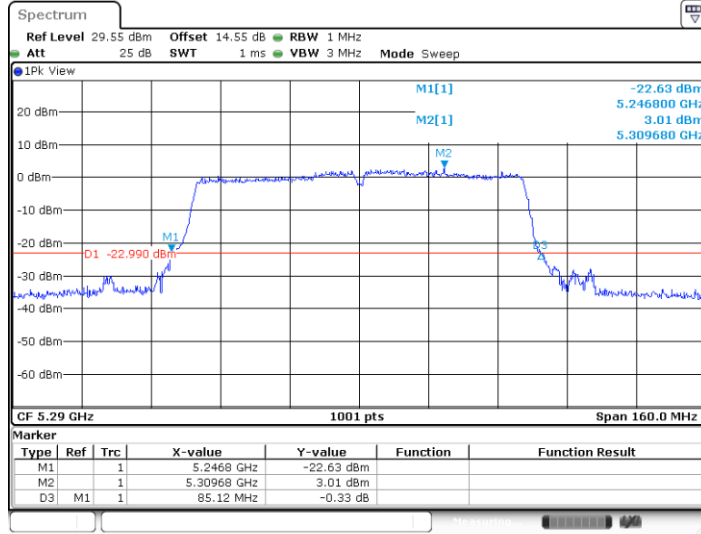

Date: 1.FEB.2024 12:19:28


11AC80SISO\_5530

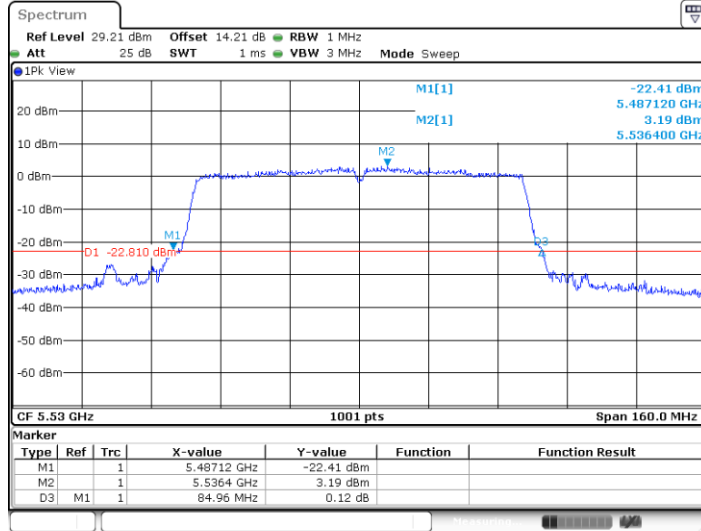

Date: 1.FEB.2024 12:20:31




11AC80SISO\_5610

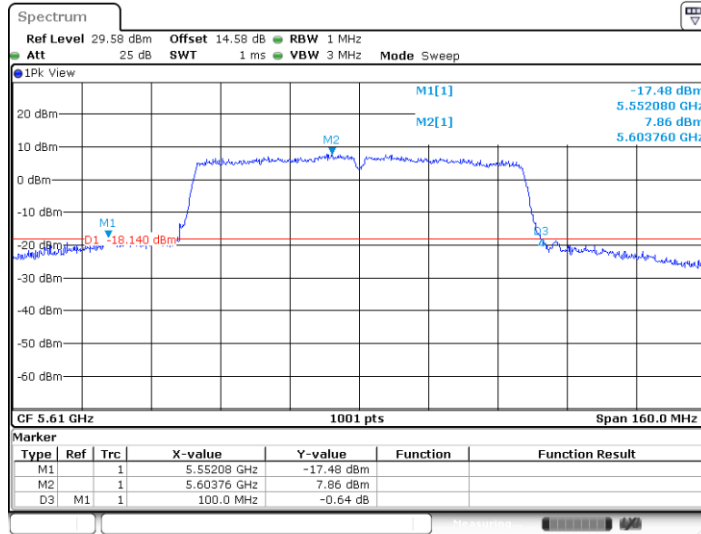

Date: 1.FEB.2024 12:21:48

11AC80SISO\_5775

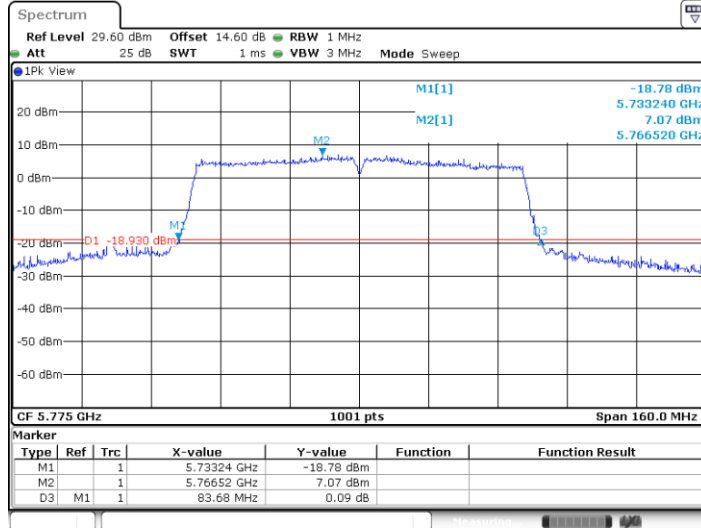

Date: 1.FEB.2024 12:22:40





Occupied channel bandwidth Test Result

Table with 8 columns: TestMode, Antenna, Freq(MHz), OCB [MHz], FL[MHz], FH[MHz], Limit[MHz], Verdict. It contains test data for modes 11A, 11N20SISO, 11N40SISO, and 11AC80SISO, all using Ant1.




Test Graphs

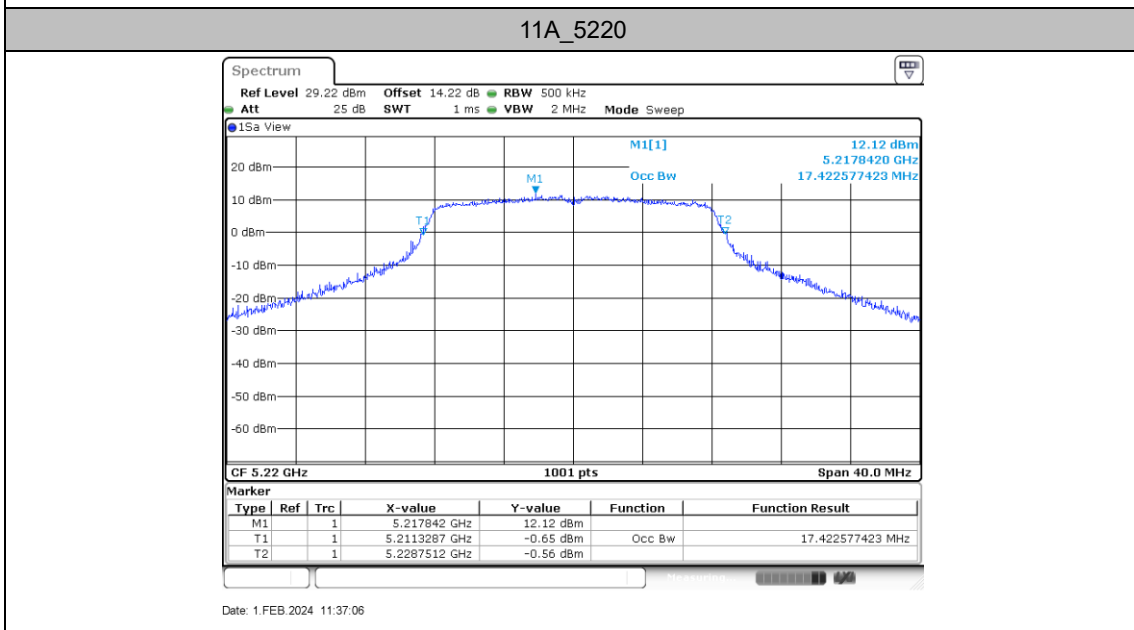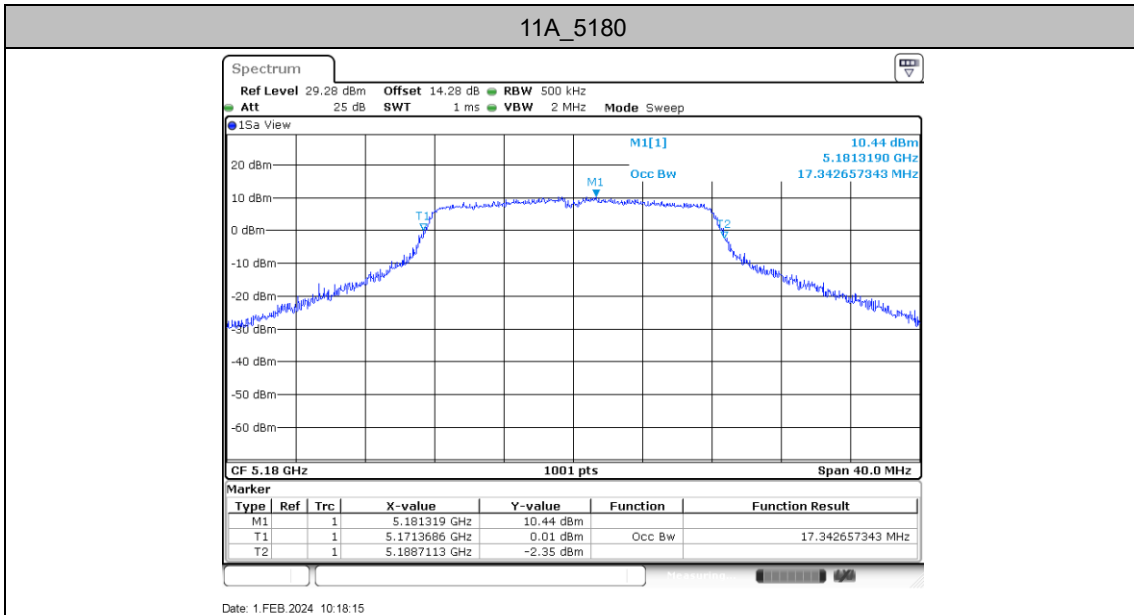




11A\_5240

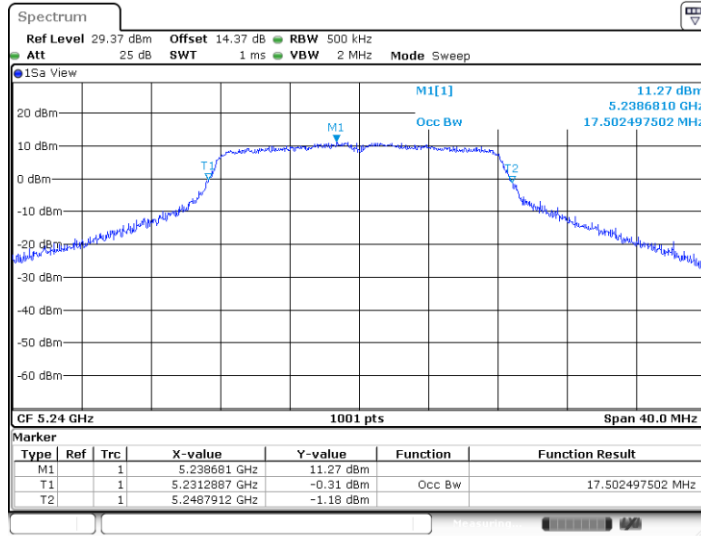


Date: 1.FEB.2024 11:37:45

11A\_5260

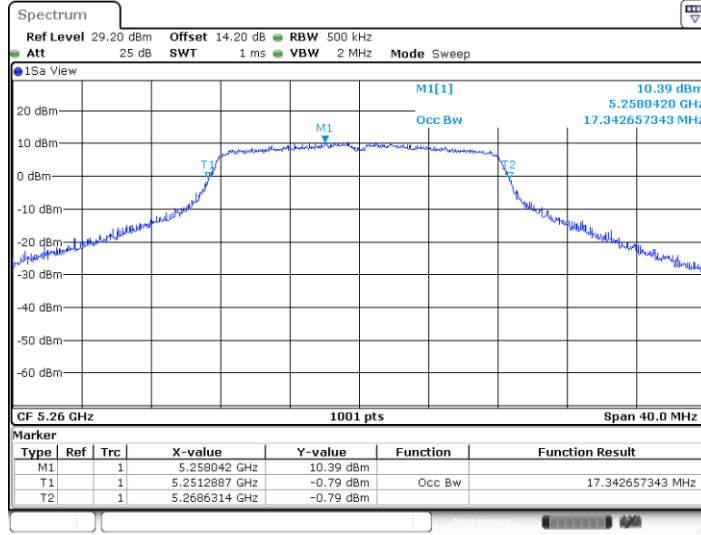


Date: 1.FEB.2024 11:38:39

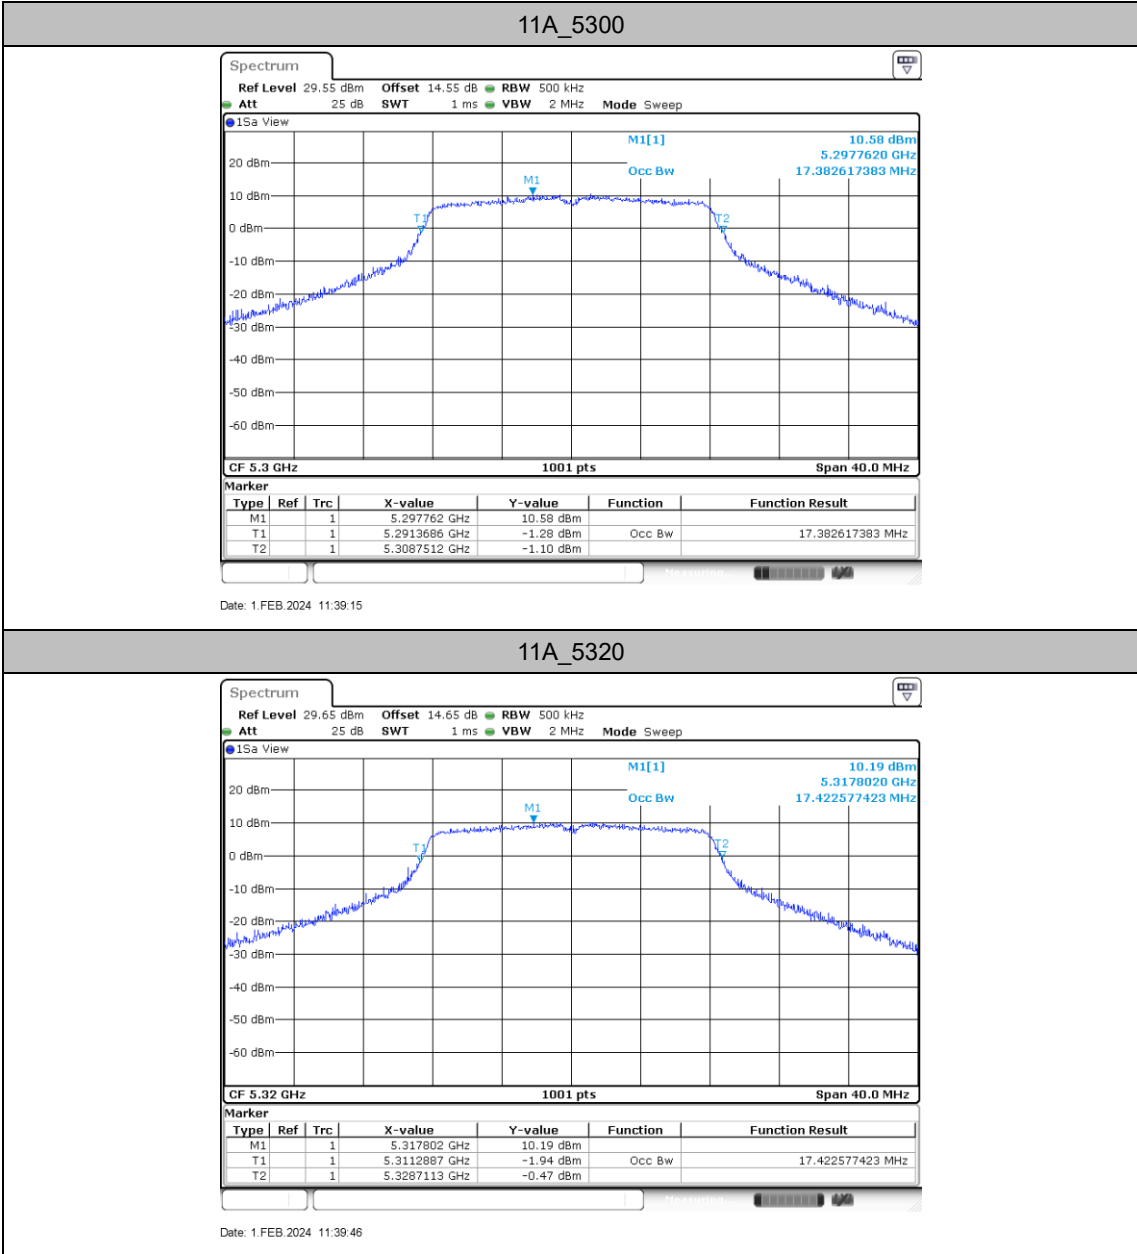




11A\_5500

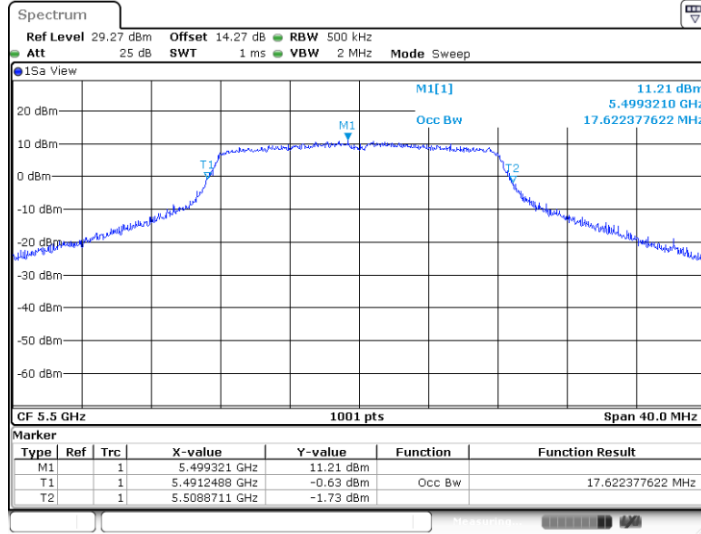


Date: 1.FEB.2024 11:40:16

11A\_5580

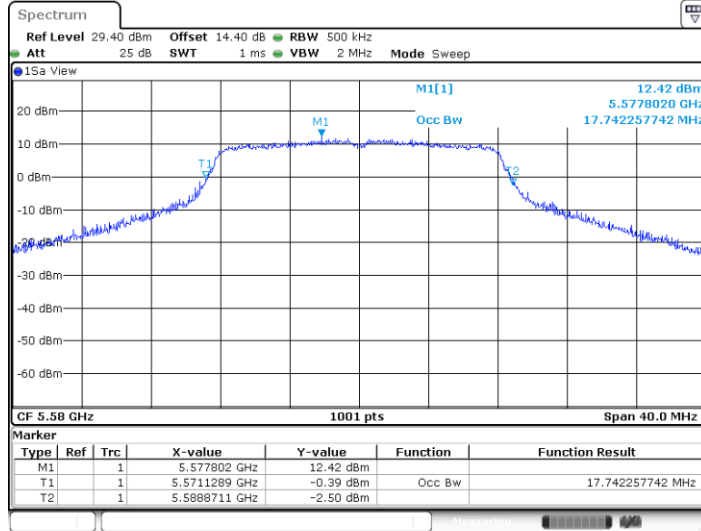


Date: 1.FEB.2024 11:41:13



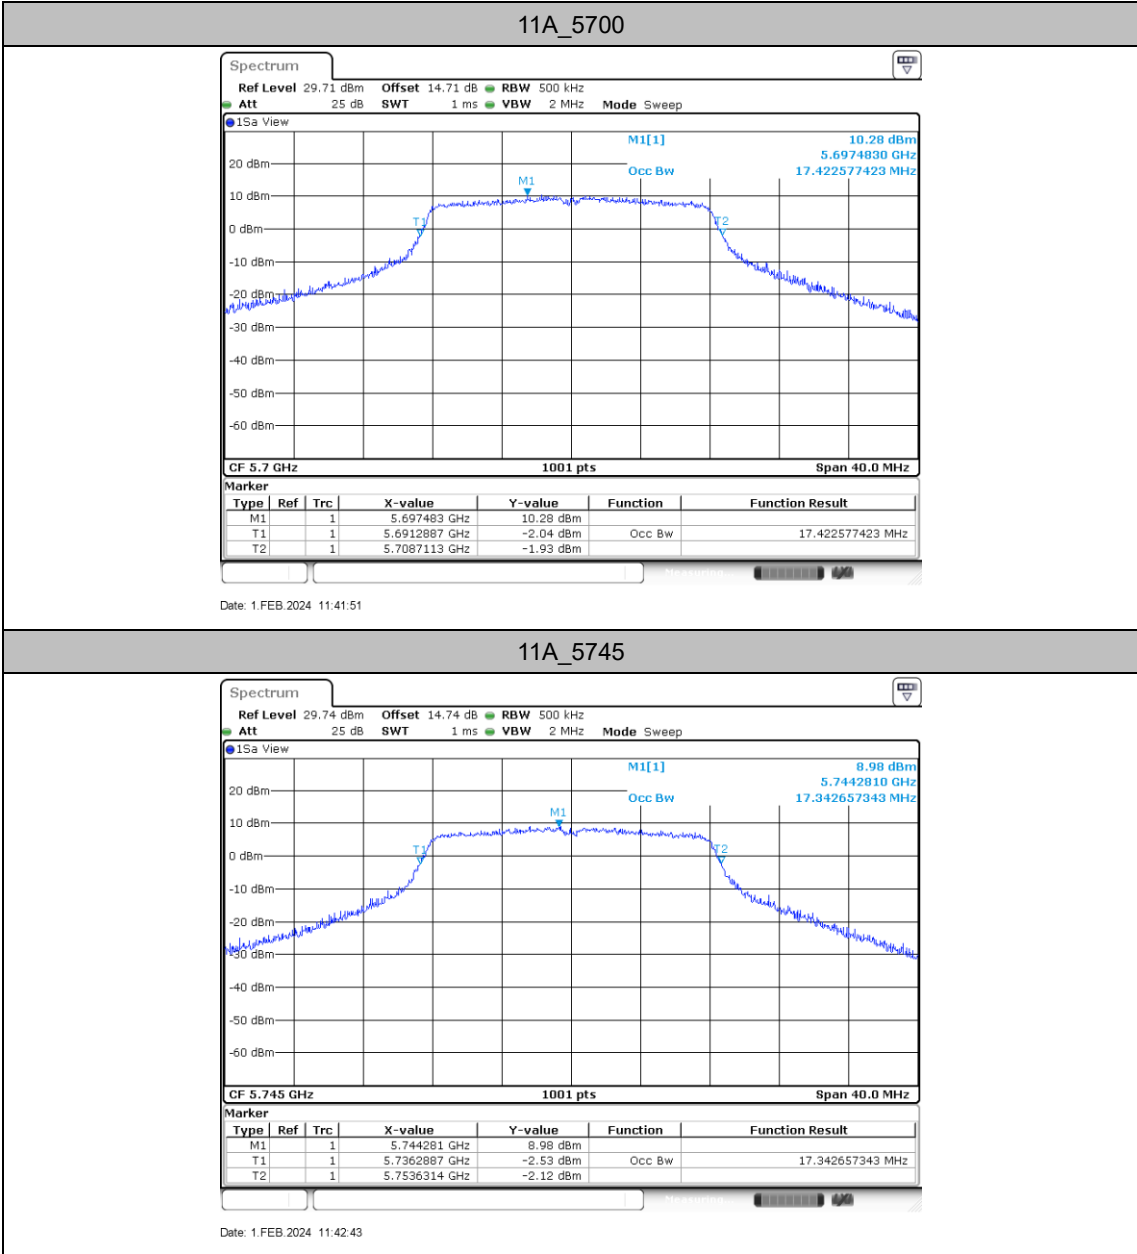




11A\_5785

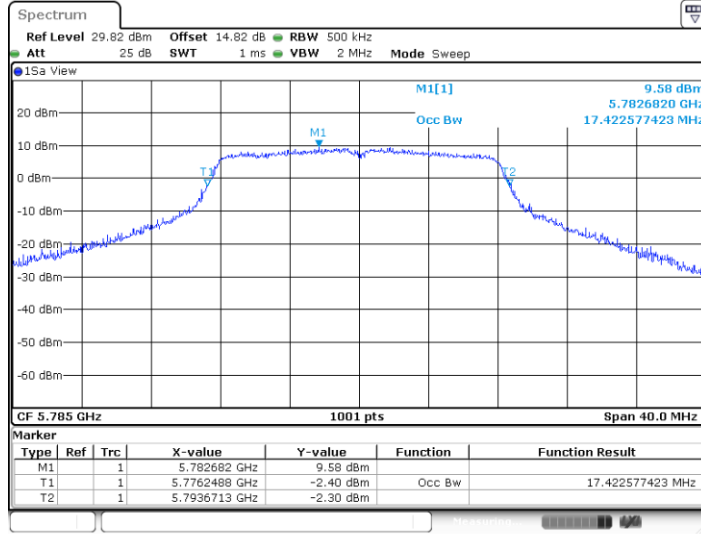

Date: 1.FEB.2024 11:43:55


11A\_5825

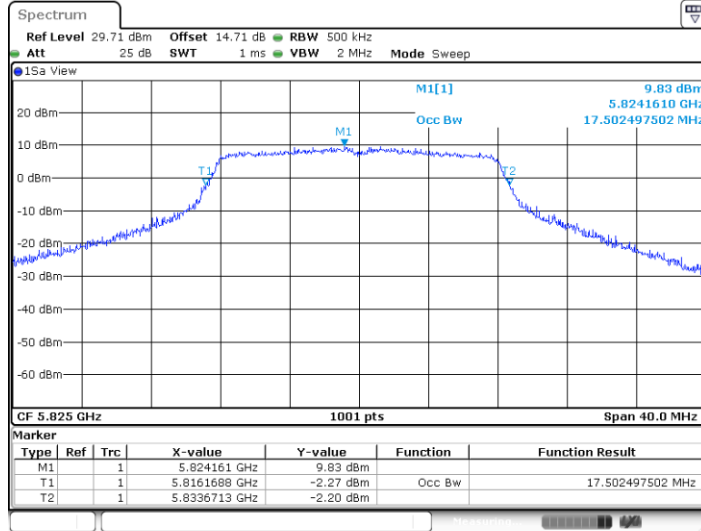

Date: 1.FEB.2024 11:44:47




11N20SISO\_5180

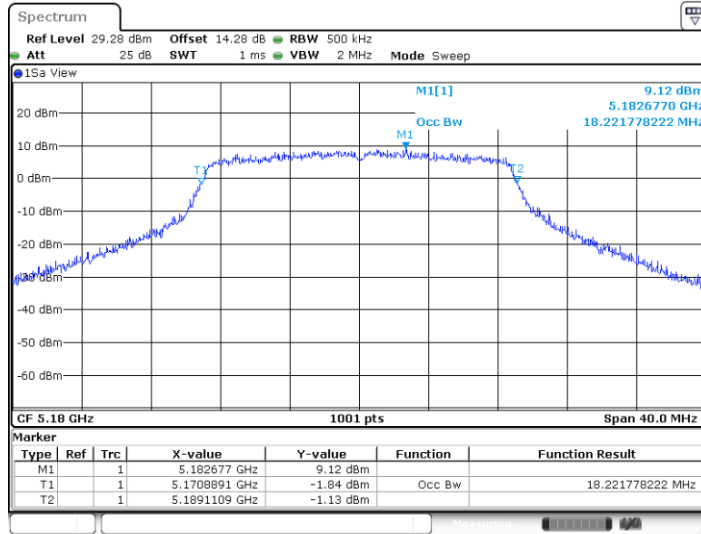

Date: 1.FEB.2024 11:46:14


11N20SISO\_5220

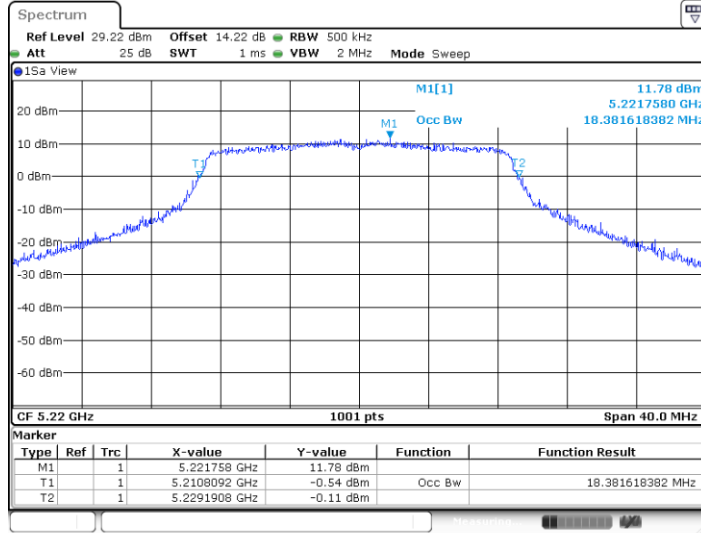

Date: 1.FEB.2024 11:46:58




11N20SISO\_5240

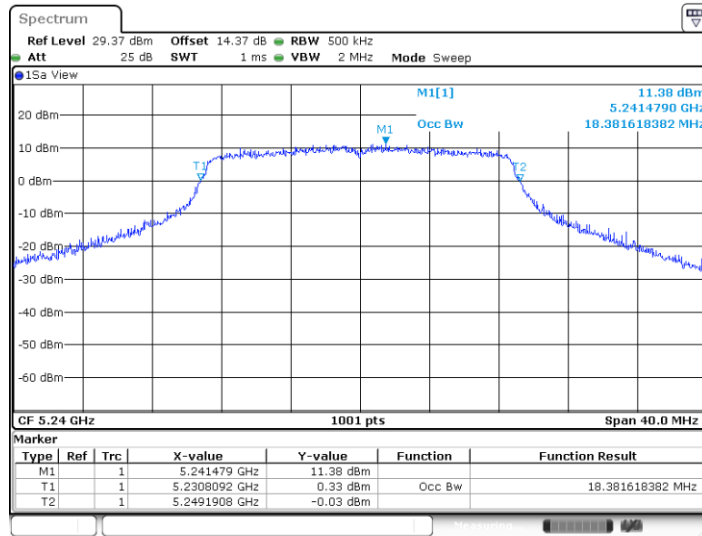

Date: 1.FEB.2024 11:47:46


11N20SISO\_5260

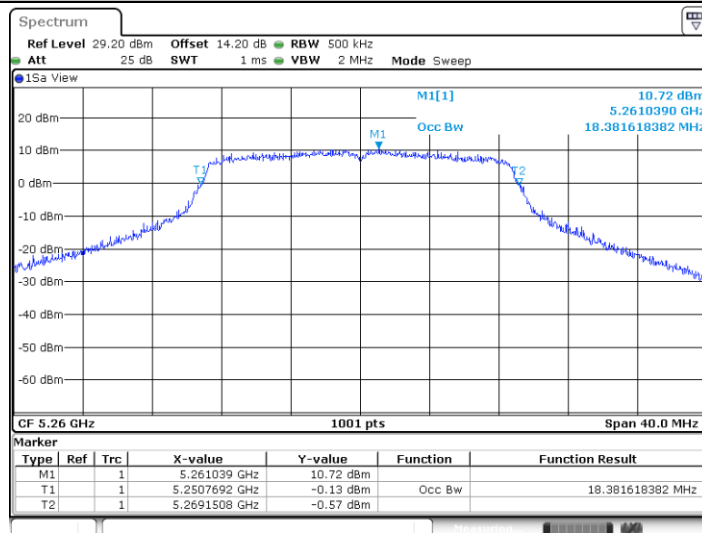

Date: 1.FEB.2024 11:48:24




11N20SISO\_5300

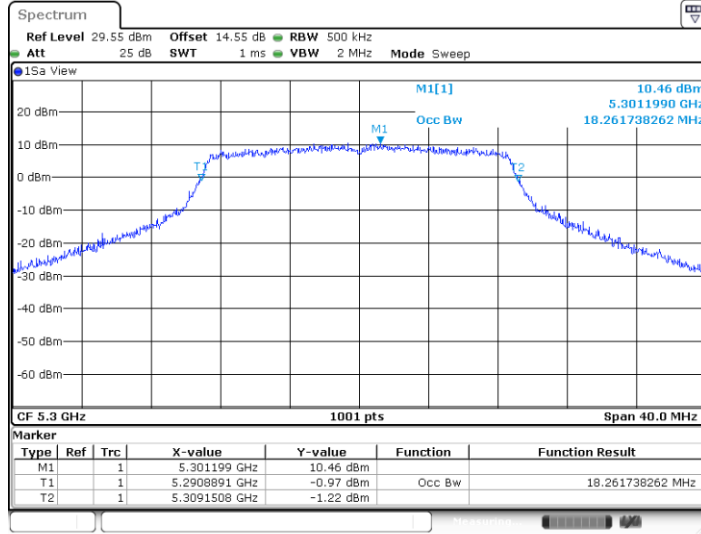

Date: 1.FEB.2024 11:48:55


11N20SISO\_5320

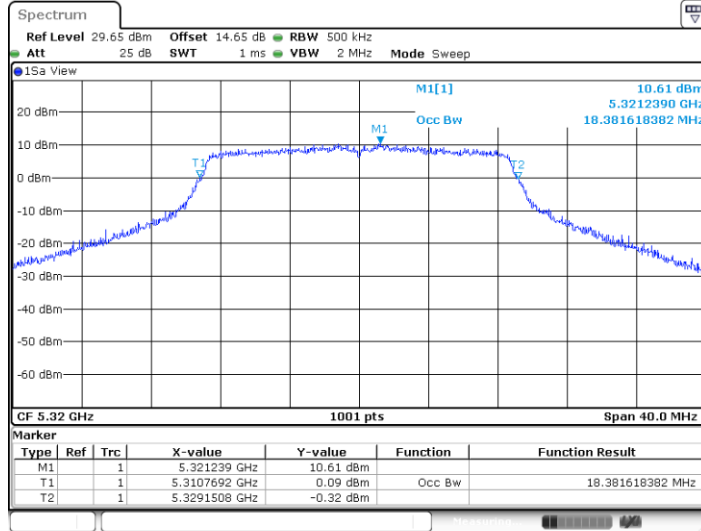

Date: 1.FEB.2024 11:59:01




11N20SISO\_5500

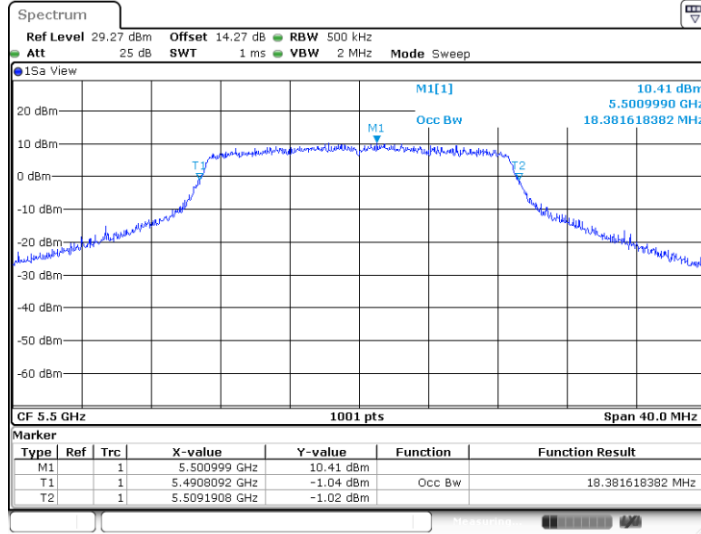

Date: 1.FEB.2024 11:59:29


11N20SISO\_5580

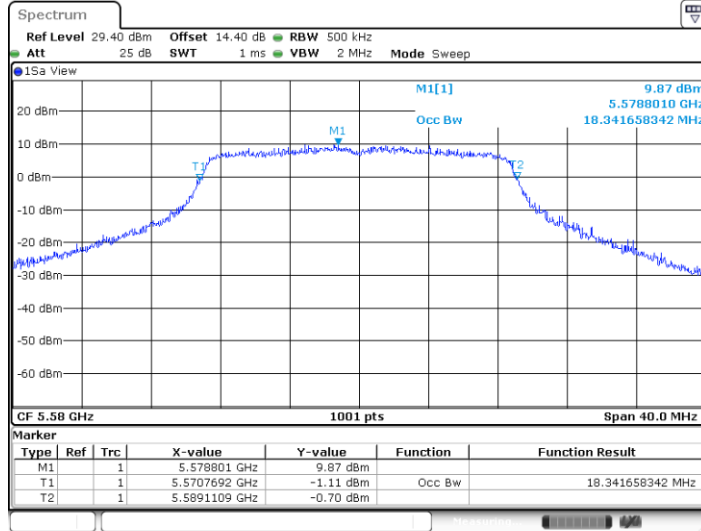

Date: 1.FEB.2024 12:00:01




11N20SISO\_5700

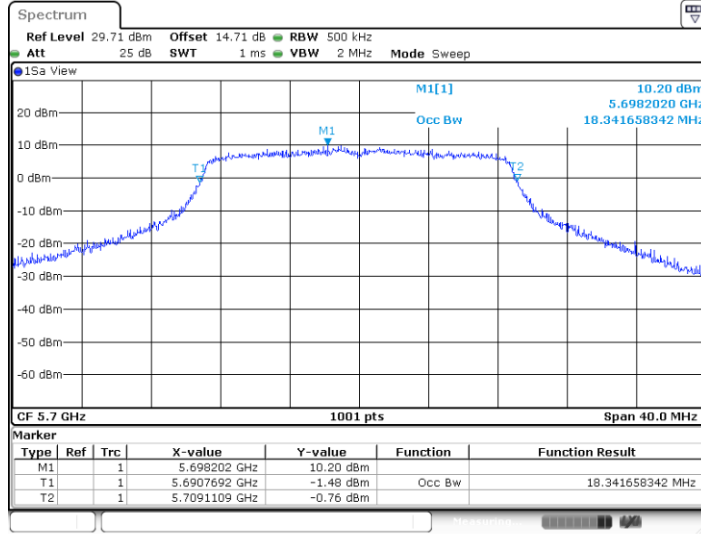

Date: 1.FEB.2024 12:00:30


11N20SISO\_5745

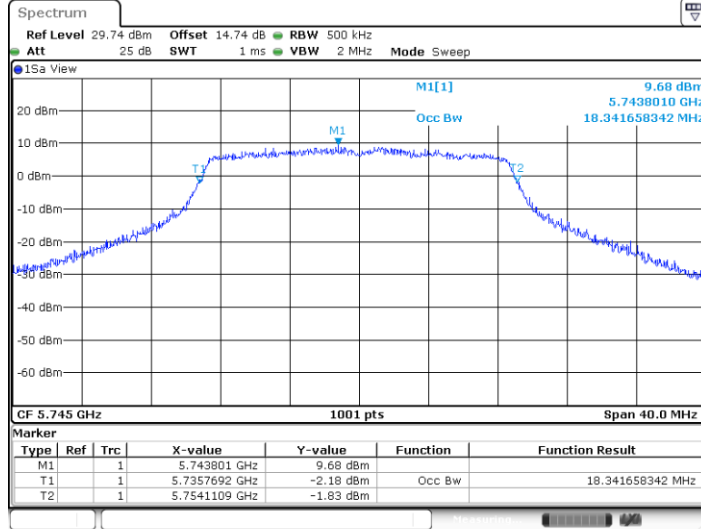

Date: 1.FEB.2024 12:01:18




11N20SISO\_5785

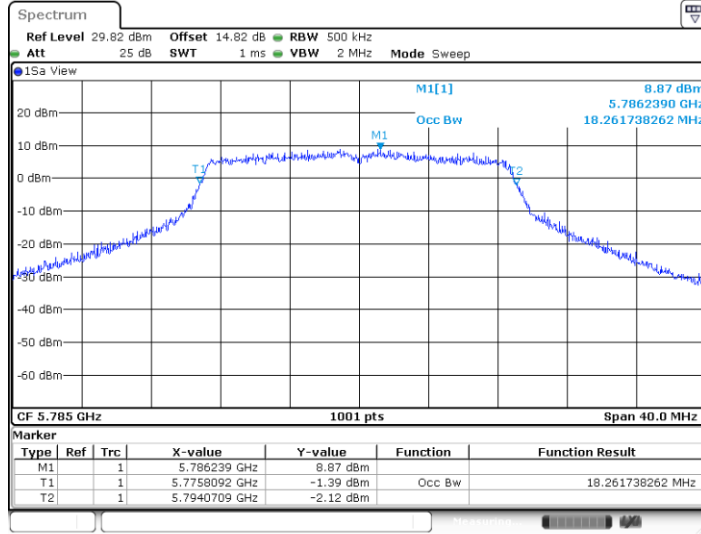

Date: 1.FEB.2024 12:02:07

11N20SISO\_5825

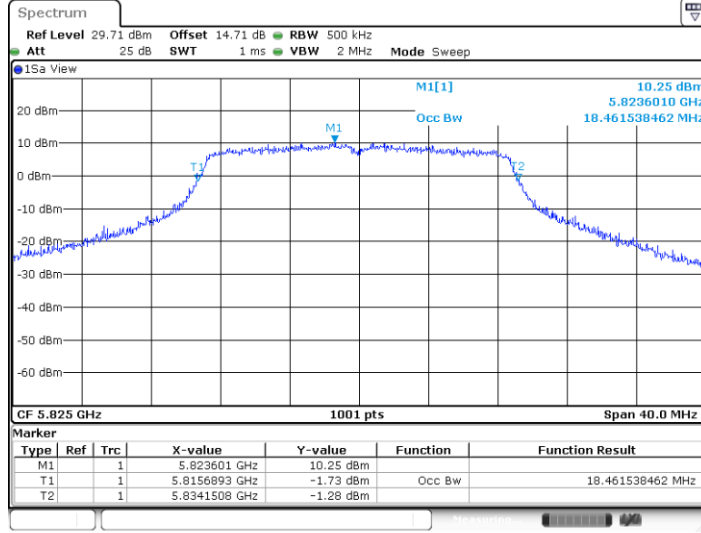


Date: 1.FEB.2024 12:02:48






11N40SISO\_5190

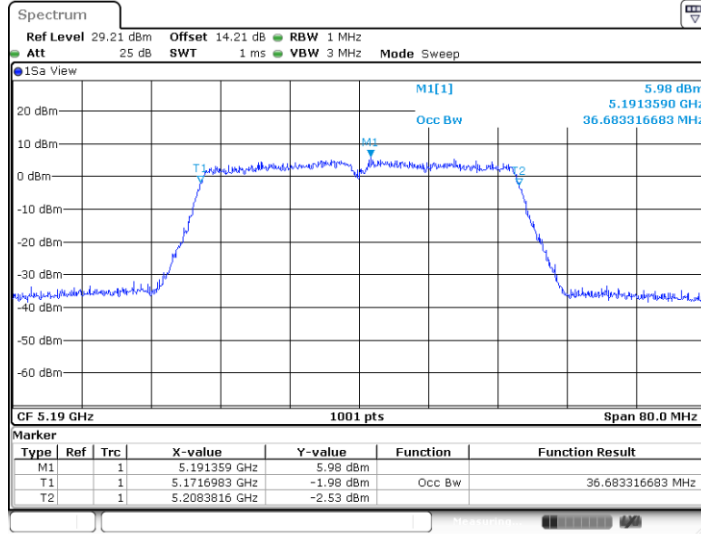

Date: 1.FEB.2024 12:04:28


11N40SISO\_5230

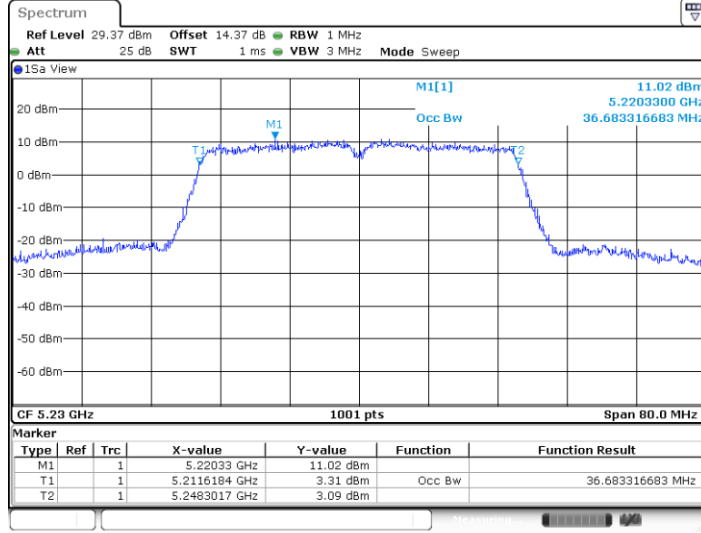

Date: 1.FEB.2024 12:05:42




11N40SISO\_5270

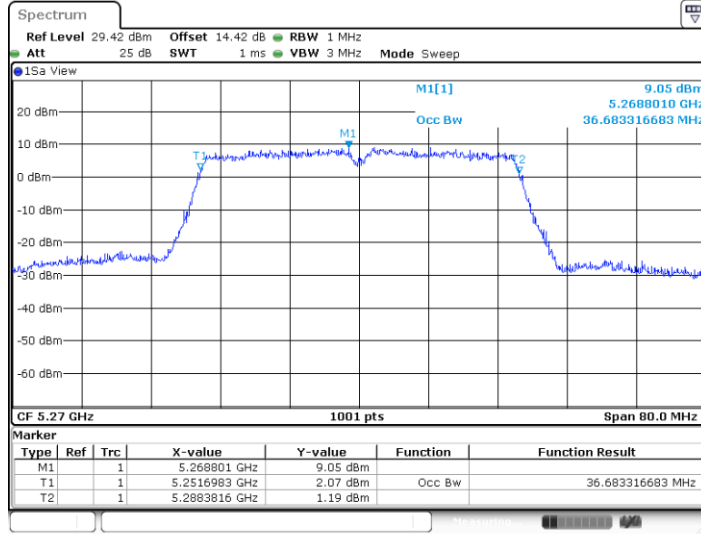

Date: 1.FEB.2024 12:06:24


11N40SISO\_5310

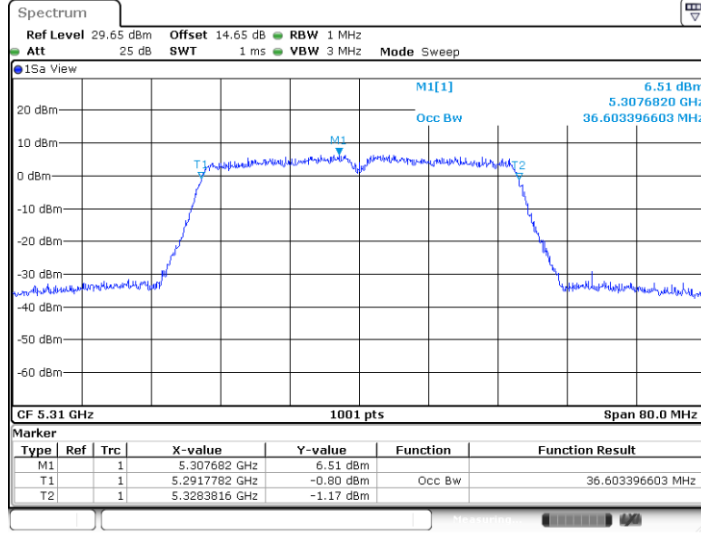

Date: 1.FEB.2024 12:07:06




11N40SISO\_5510

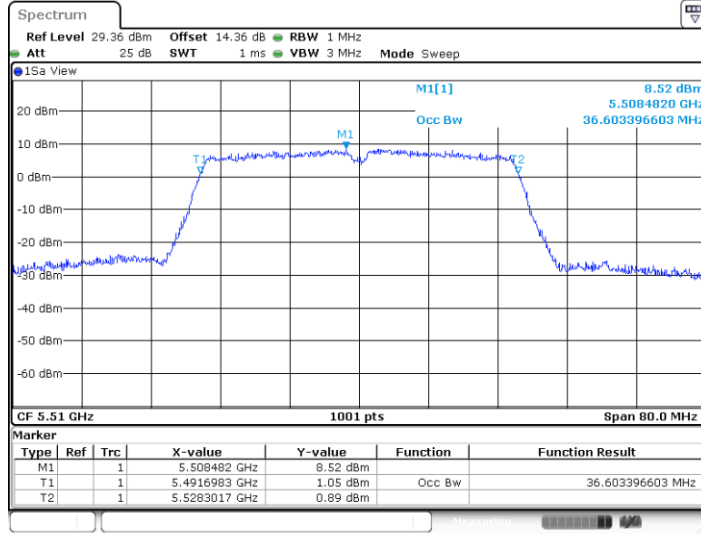

Date: 1.FEB.2024 12:07:38


11N40SISO\_5550

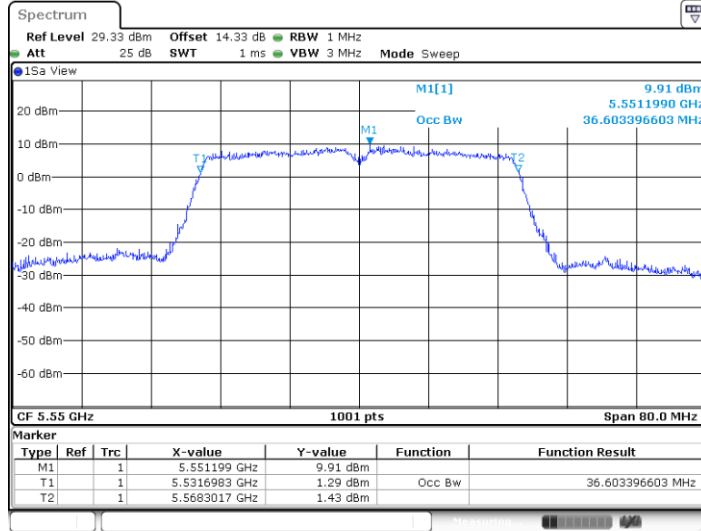

Date: 1.FEB.2024 12:08:18




11N40SISO\_5670

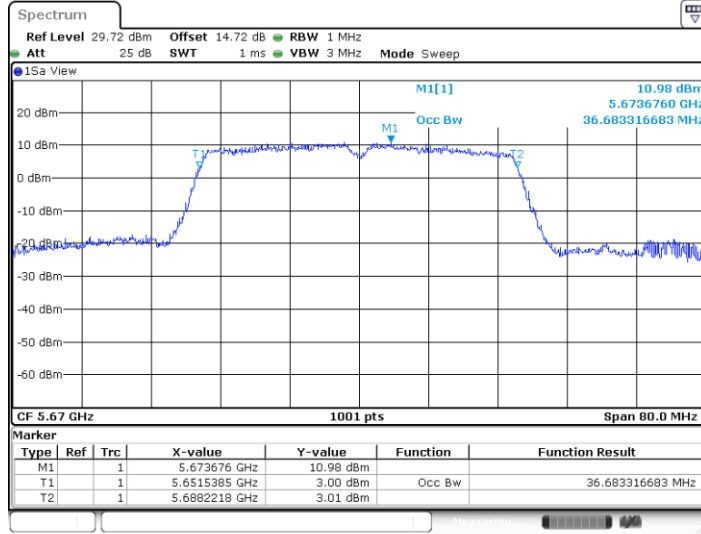

Date: 1.FEB.2024 12:09:16


11N40SISO\_5755

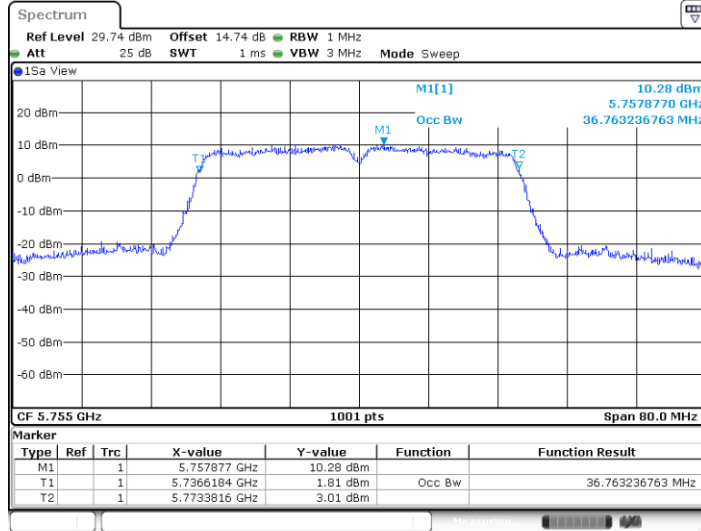

Date: 1.FEB.2024 12:12:14




11N40SISO\_5795

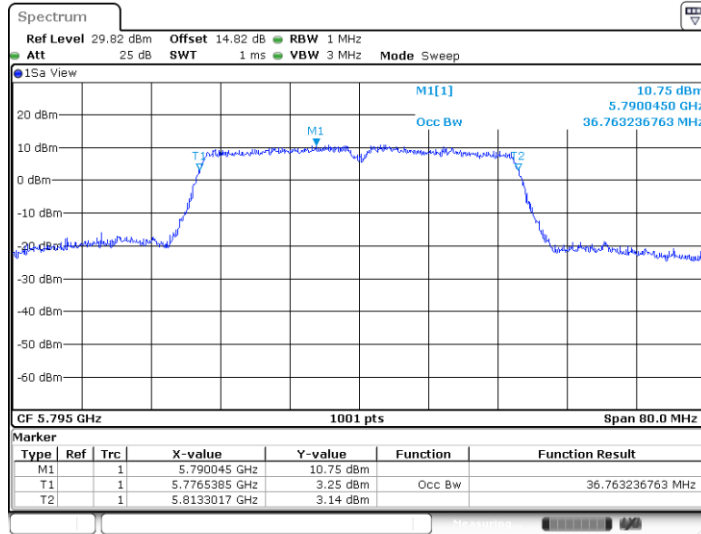

Date: 1.FEB.2024 12:13:02


11AC80SISO\_5210

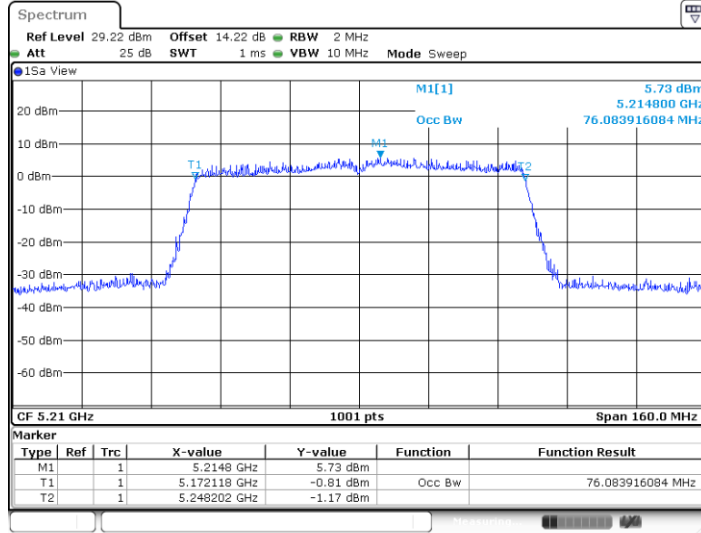

Date: 1.FEB.2024 12:18:05




11AC80SISO\_5290

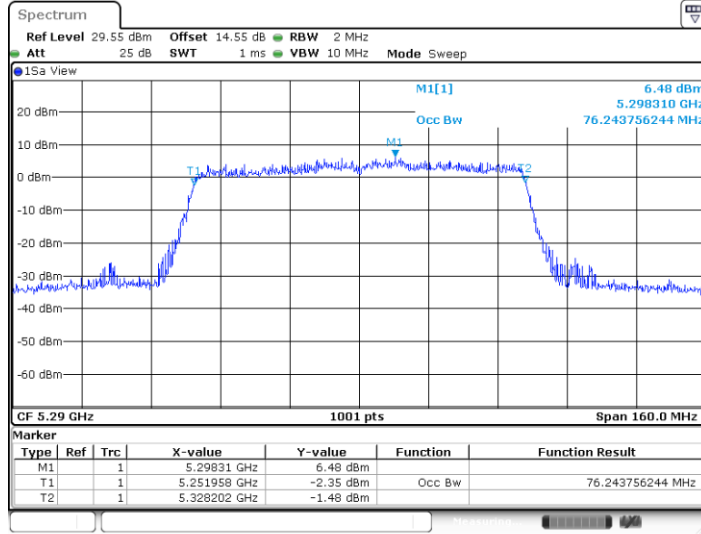

Date: 1.FEB.2024 12:19:36


11AC80SISO\_5530

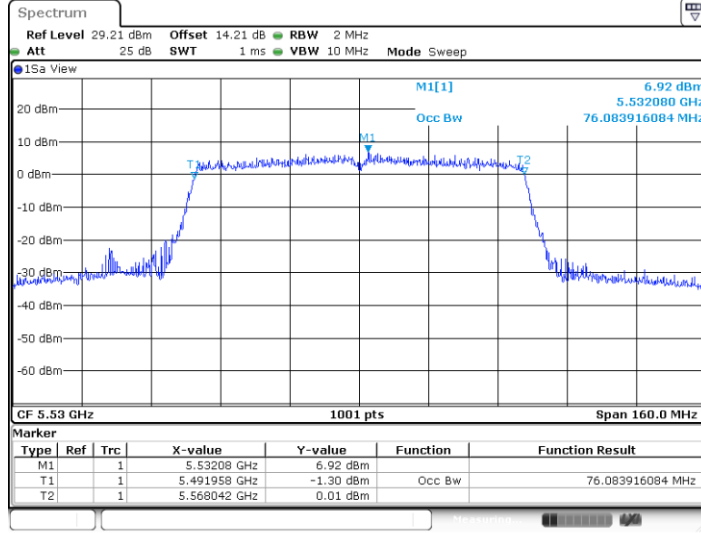

Date: 1.FEB.2024 12:20:38




11AC80SISO\_5610

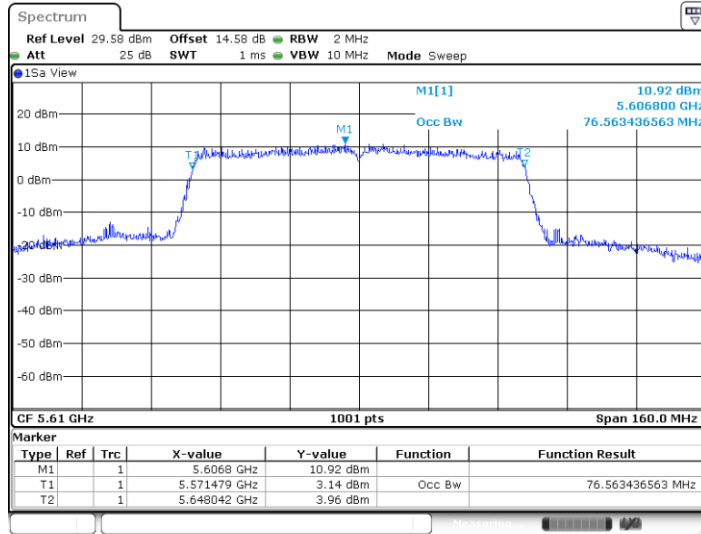

Date: 1.FEB.2024 12:21:56

11AC80SISO\_5775

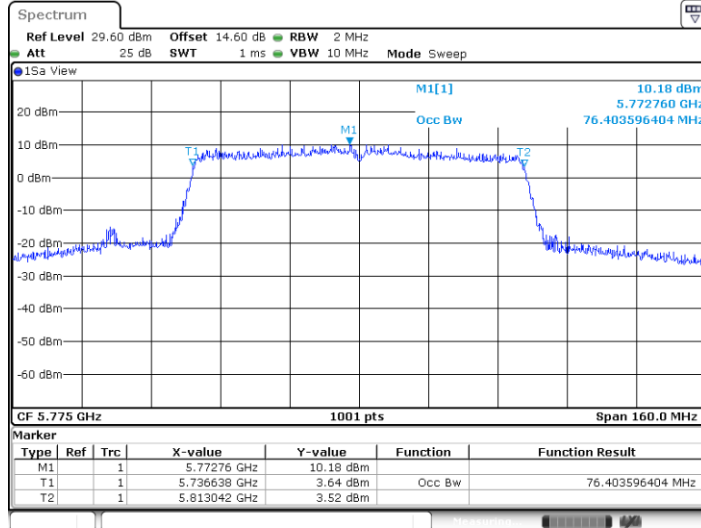

Date: 1.FEB.2024 12:22:57



### Min emission bandwidth for UNII-3

#### Test Result

TestMode	Antenna	Freq(MHz)	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	15.68	5737.08	5752.76	0.5	PASS
		5785	15.92	5777.20	5793.12	0.5	PASS
		5825	15.72	5816.84	5832.56	0.5	PASS
11N20SISO	Ant1	5745	15.12	5737.40	5752.52	0.5	PASS
		5785	16.96	5776.36	5793.32	0.5	PASS
		5825	16.56	5816.48	5833.04	0.5	PASS
11N40SISO	Ant1	5755	35.52	5737.08	5772.60	0.5	PASS
		5795	35.76	5777.00	5812.76	0.5	PASS
11AC80SISO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS





Test Graphs B4

