
Report ID: P37332-EME-00003

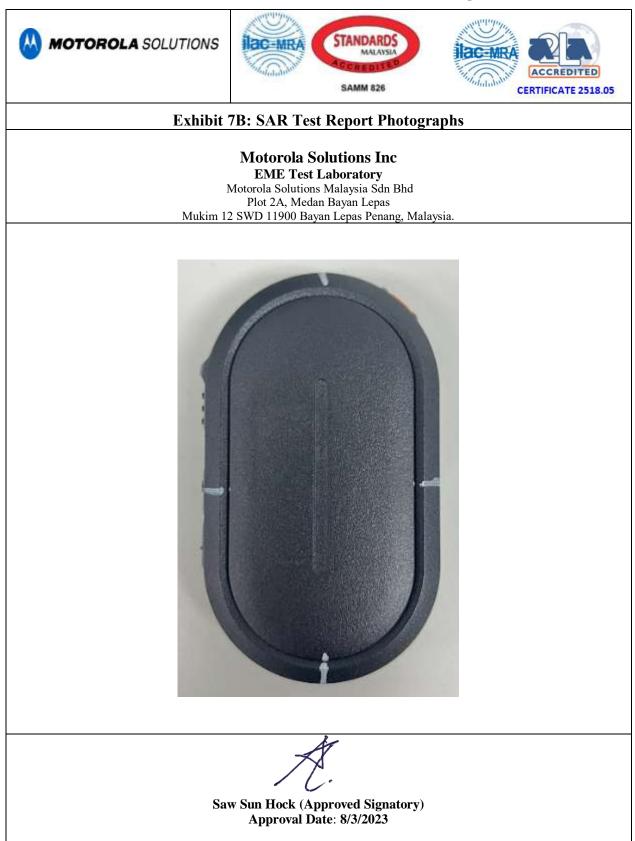


Date	Revision	Comments
8/01/2023	А	Initial release

# **Report Revision History**

## 1.0 Highest SAR Test Position per body location

#### 1.1 Body

DUT with antenna LDS MDA-LB-008 with offered battery PMNN4602A and body worn kit PMLN8538A against the phantom without an audio accessory attached.

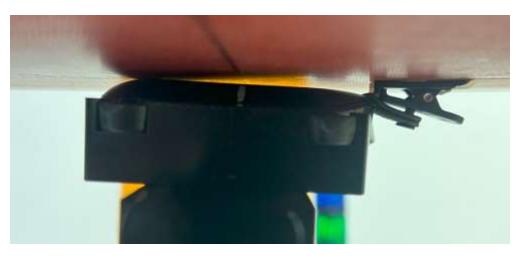

	Separation Distances (mm)		
	@ bottom surface of the	<i>ⓐ</i> upper surface of the	
Antenna kit #	DUT	DUT	
LDS MDA-LB-008	0	8	

#### 1.2 Face

Not Applicable

## 2.0 Other SAR tested positions at the body

#### 2.1 Body worn

DUT with antenna LDS MDA-LB-008 with offered battery PMNN4602A and body worn kit PMLN8537A against the phantom without an audio accessory attached.



	Separation Distances (mm)		
	(a) bottom surface of the	(a) upper surface of the	
Antenna kit #	DUT	DUT	
LDS MDA-LB-008	12	20	

#### FCC ID: AZ499FT7172 / IC: 109U-99FT7172

#### 3.0 DUT and Accessory Photos

The purpose of these photos is to illustrate the tested accessories. Refer to Part 1 section 7.0 for additional details on the offered accessories. Battery is a build in battery.

## 3.1 Body worn accessories



Front View Badge Clip PMLN8538A



Front View Belt Clip PMLN8537A



DUT Side View Badge Clip PMLN8538A



DUT Side View Belt Clip PMLN8537A

#### **3.2** Audio accessories:



**PMLN8536A** 

## 3.3 DUT Dimensions

	Height	Width	Depth
	(mm)	(mm)	(mm)
Radio with battery PMNN4602A	84	49	19

For illustration purposes only - the following figure reflects the location of the device's dimensions.



D2 = (Depth @ Bottom) / (Depth @ PTT)