



SAR TEST REPORT

Test Report No.: 32AE0142-SH-A-R01

Applicant : CANON INC.
Type of Equipment : **Wireless Module (Platform: Wireless File transmitter)**
/with host device: HD camcorder
Model No. : CH9-1214 (Platform: DS585862)
FCC ID : AZD215
Test Standard : **FCC 47CFR §2.1093,**
Supplement C (Edition 01-01) to OET Bulletin 65
Test Result : **Complied**
Maximum SAR(1g) Value : **0.73 W/kg** (5200MHz, IEEE 802.11n(20HT), MCS0(BPSK/OFDM) (NII))
0.55 W/kg (5765MHz, IEEE 802.11n(20HT), MCS0(BPSK/OFDM) (DTS))


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: September 5, 6 and 9, 2011

Test engineer:


Hiroshi Naka
Engineer of WiSE Japan, UL Verification Service

Approved by:


Toyokazu Imamura
Leader of WiSE Japan, UL Verification Service

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".



CONTENTS P **AGE**

SECTION 1: Customer information 3
SECTION 2: Equipment under test (EUT)..... 3
SECTION 3: Test specification, procedures and results..... 4
3.1 Test specification 4
3.2 Exposure limit 4
3.3 Procedure and result..... 4
3.4 Test location 4
3.5 Confirmation before SAR testing 5
3.6 Confirmation after SAR testing 6
3.7 Measurement procedure 6
3.8 Test setup of EUT 6
SECTION 4: Operation of EUT during testing 7
4.1 Operating modes for SAR testing 7
SECTION 5: Uncertainty assessment..... 8
SECTION 6: Confirmation before testing..... 9
6.1 Assessment for the conducted power of EUT / Correction of the power at EMC test and at SAR test..... 9
SECTION 7: Measurement results..... 13
7.1 SAR for 2412-2462MHz band..... 13
7.2 SAR for 5180-5320MHz band (W52/53 band)..... 14
7.3 SAR for 5745-5825MHz band (W58 band) 13

Contents of appendixes

APPENDIX 1: Photographs of test setup..... 16
Appendix 1-1 Photograph of EUT, Platform, antenna position 16
Appendix 1-2 Photograph of host device 17
Appendix 1-3 EUT configuration 18
Appendix 1-4 Photograph of test setup 19
APPENDIX 2: SAR Measurement data..... 21
Appendix 2-1 Evaluation procedure 21
Appendix 2-2 Measurement data (Body liquid) / 2.4GHz band 22
Appendix 2-3 Measurement data (Body liquid) / 5180-5320MHz band (W52/53 band) 32
Appendix 2-4 Measurement data (Body liquid) / 5745-5825MHz band (W58 band) 43
APPENDIX 3: Test instruments..... 51
Appendix 3-1 Equipment used 51
Appendix 3-2 Dosimetry assessment setup 52
Appendix 3-3 Configuration and peripherals 52
Appendix 3-4 System components 53
Appendix 3-5 Test system specification 54
Appendix 3-6 Simulated tissues composition 54
Appendix 3-7 Simulated tissues parameter confirmation 55
Appendix 3-8 System validation data 56
Appendix 3-9 Validation uncertainty..... 57
Appendix 3-10 Validation measurement data 58
Appendix 3-11 Calibration certificate: Dipole (D2450V2)..... 60
Appendix 3-12 Calibration certificate: Dipole (D5GHzV2) 69
Appendix 3-13 Calibration certificate: E-Field Probe (EX3DV4) 83
Appendix 3-14 References..... 94

REVISION HISTORY

Revision	Test report No.	Date	Page revised	Contents
Original	32AE0142-SH-A	October 21, 2011	-	-
1	32AE0142-SH-A-R01	December 6, 2011	P1,2,3,6	(p3) Deleted unnecessary EUT information for SAR testing in clause 2.2. (p6) Corrected PDF conversion error.

*. **By issue of new revision report, the report of an old revision becomes invalid.**

SECTION 1: Customer information

Company Name	CANON INC.
Brand Name	Canon
Address	30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 Japan
Telephone Number	81-3-3757-6798
Facsimile Number	81-3-3757-8431
Contact Person	Kiyoshi Sahoyama

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of EUT

Type of Equipment	Wireless Module
Model Number	CH9-1214
Serial Number	06
Condition of EUT	Production prototype (Not for sale; This sample is equivalent to mass-production items) (*. Receipt date of sample: September 2, 2011 / *. No modification by the test lab.)
Category Identified	Portable device
Tested consideration	During SAR test, the dc power of the EUT was supplied via a HD camcorder that was operated by the full-charged battery..
Platform Information	The EUT is assembled into the Wireless File transmitter, model: DS58586x. (*1) DS58586x only has the case structure with which EUT is covered and has one port where the host device is connected with EUT electrically. DS58586x is connected with a limited HD camcorder via this special signal/dc power connector.
Type of Equipment:	Wireless File transmitter
Model Number / Serial:	DS585862 (*1) / serial number: 06
Manufacture:	Canon
Power rating:	DC3.3V (supplied from HD camcorder)
Size of EUT:	24.7(W) × 23.9(L) × 56.0(H) (mm)
Condition of EUT:	Engineering prototype

*1. The Wireless File transmitter of platform has variant models as DS585862 (tested sample), DS585861, DS585863, DS585864 and DS585865. These models are the same electrically and mechanically, but difference is only the country of the destination for export.

Model	DS585861 (*2)	DS585862	DS585863 (*2)	DS585864 (*2)	DS585865 (*2)
Frequency band	2412-2472MHz 5180-5320MHz 5500-5700MHz	2412-2462MHz 5180-5320MHz 5745-5825MHz	2412-2472MHz 5745-5805MHz	2412-2462MHz 5280-5320MHz 5500-5700MHz	2412-2472MHz 5180-5320MHz 5500-5825MHz

*2. These models are not exported to North America.

2.2 Product Description

Equipment type	Transceiver	Transceiver	Transceiver	Transceiver
Frequency of operation	2412-2462MHz	2412-2462MHz	5180-5320MHz (5190-5310MHz:11n(40HT))	5745-5825MHz (5755-5795MHz:11n(40HT))
Channel spacing	5MHz		20MHz(11a, 11n(20HT)), 40MHz(11n(40HT))	
Bandwidth	20MHz	20MHz, 40MHz(11n(40HT))		
ITU code	G1D		D1D	
Type of modulation	DSSS		OFDM	
Qty of Antenna	1 pc.			
Antenna type/	PIFA (Planar Inverted F Antenna)			
Model name	Dual Band WLAN Antenna Cable Assembly 2011 (P/N: 2174096-1)			
Antenna connector type	RF module side: U.FL connector compatible/ antenna side: soldered			
Antenna gain (Peak)	1.95 dBi (at 2500MHz / 2400-2450-2500MHz points)		-1.32 dBi (at 5340MHz / 5160-5250-5340MHz points), -0.43 dBi (at 5785MHz / 5725-5785-5845MHz points)	
Transmit power	*. Refers to section 6 in this report.			
Power rating	DC 3.3V, *. The dc power is supplied from the constant voltage circuit of the HD camcorder.			
Operation temperature range	-20 to +70 deg.C			

*. The EUT do not use the special transmitting technique such as "beam-forming" and "time-space code diversity."

SECTION 3: Test specification, procedures and results

3.1 Requirements for compliance testing defined by the FCC / Test specification

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

- Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).
- IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01):

Supplement C (Edition 01-01) - Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions

OET Bulletin 65 (Edition 97-01) - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields

IEEE Std. 1528-2003:

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Supplement C

In additions;

KDB 447498 D01(v04)(Nov.13, 2009): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

KDB 248227 (rev.1.2)(May 29, 2007): SAR Measurement Procedures for 802.11a/b/g Transmitters

3.2 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body (averaged over the entire body)	Partial-Body (averaged over any 1g of tissue)	Hands, Wrists, Feet and Ankles (averaged over any 10g of tissue)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Whole-Body (averaged over the entire body)	Partial-Body (averaged over any 1g of tissue)	Hands, Wrists, Feet and Ankles (averaged over any 10g of tissue)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

The limit applied in this test report is;

General population / Uncontrolled exposure, Partial-Body (averaged over any 1g of tissue) limit: 1.6 W/kg

3.3 Procedures and Results

Item	Test Procedure	Limit	Exclusion	Remarks	Result
Human exposure	FCC OET Bulletin 65, Supplement C	1.6 W/kg (FCC 47CFR §2.1093)	none	SAR measurement (in accordance with KDB447498, KDB248227)	Complied (*1)

Note: UL Japan's SAR Work Procedures No.13-EM-W0429 and 13-EM-W0430. Other than above, no addition, deviation nor exclusion has been made from standards

*1. The maximum SAR(1g) of each frequency band was as follows;

0.24 W/kg (2437MHz, IEEE 802.11b, 1Mbps(DBPSK/DSSS) /2412-2462 MHz band) (DTS)

0.73 W/kg (5200MHz, IEEE 802.11n(20HT), MCS0(BPSK/OFDM) /5180-5240MHz band) (NII)

0.55 W/kg (5765MHz, IEEE 802.11n(20HT), MCS0(BPSK/OFDM) /5745-5825MHz band) (DTS)

The SAR(1g) was <0.8W/kg for all configuration. Therefore according to the KDB447498 D01, the EUT was approved for used in a multi-platform.

3.4 Test Location

No.7 shielded room (2.76(Width) × 3.76m(Depth) × 2.4m(Height)) for SAR testing.

UL Japan, Inc., Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number: +81 463 50 6400 / Facsimile number: +81 463 50 6401

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400 / Facsimile: +81 463 50 6401

3.5 Confirmation before SAR testing

3.5.1 Correlation of Output Power between EMC and SAR tests

It was checked that the antenna port power was correlated within 0~+5% (FCC requirements)
The result is shown in Section 6.

- *. **Output power at SAR test:** SAR power was measured before SAR testing. (EUT serial number: 06)
For 2.4GHz band, the average and the peak power of 11b, 11g, 11n(20HT) and 11n(40HT) mode were measured at default channel
For 5GHz band, the average and the peak power of 11a, 11n(20HT) and 11n(40HT) mode were measured at all channel.
- *. **Output power at EMC radio test:** EMC power was measured during EMC testing. (EUT serial number: 06)
For the SAR vs. EMC power reference, the average and the peak power of 11b, 11g, 11a, 11n(20HT) and 11n(40HT) mode were measured at the same channel of SAR measured.

3.5.2 Average power for SAR tests

Step.1 Data rate check

The data rate check was measurement on the middle channel for 802.11b/g/n (2.4GHz) and the middle (or near the middle) default channel of 802.11a/n (5GHz).

11b		11g		11a		11n(20HT)			11n(40HT)		
Modulation	Data rate [Mbps]	Modulation	Data rate [Mbps]	Modulation	Data rate [Mbps]	Modulation	MCS Index	Spatial Stream	Modulation	MCS Index	Spatial Stream
DBPSK/DSSS	1	BPSK/OFDM	6	BPSK/OFDM	6	BPSK/OFDM	MCS0	1	BPSK/OFDM	MCS0	1
DQPSK/DSSS	2	BPSK/OFDM	9	BPSK/OFDM	9	QPSK/OFDM	MCS1	1	QPSK/OFDM	MCS1	1
CCK/DSSS	5.5	QPSK/OFDM	12	QPSK/OFDM	12	QPSK/OFDM	MCS2	1	QPSK/OFDM	MCS2	1
CCK/DSSS	11	QPSK/OFDM	18	QPSK/OFDM	18	16QAM/OFDM	MCS3	1	16QAM/OFDM	MCS3	1
		16QAM/OFDM	24	16QAM/OFDM	24	16QAM/OFDM	MCS4	1	16QAM/OFDM	MCS4	1
		16QAM/OFDM	36	16QAM/OFDM	36	64QAM/OFDM	MCS5	1	64QAM/OFDM	MCS5	1
		64QAM/OFDM	48	64QAM/OFDM	48	64QAM/OFDM	MCS6	1	64QAM/OFDM	MCS6	1
		64QAM/OFDM	54	64QAM/OFDM	54	64QAM/OFDM	MCS7	1	64QAM/OFDM	MCS7	1

Step.2 Decision of SAR test channel

For the SAR test reference, the average and peak output powers were measured on default channels of 802.11b/g/n(20HT)/n(40HT) (for 2.4GHz band) and all channels of 802.11a/n(20HT)/n(40HT) (for W52/53 and W58 band) by the calibrated power sensor and power meter (65MHz measurement bandwidth).

Mode	GHz	Channel	"Default Test Channel"			
			FCC 15.247		UNII	
			802.11b	802.11g		
802.11 b/g	2.412	1	√	Δ		
	2.437	6	√	Δ		
	2.462	11	√	Δ		
802.11a	5.18	36			√	
	5.20	40				*
	5.22	44				*
	5.24	48			√	
	5.26	52			√	
	5.28	56				*
	5.30	60				*
	5.32	64			√	
	5.745	149	√		√	
	5.765	153		*		*
	5.785	157	√			*
	5.805	161		*	√	
FCC 15.247	5.825	165	√			

√ = "default test channels"

* = Possible 802.11a channels with maximum average output > the "default test channels"

Δ = Possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

3.6 Confirmation after SAR testing

It was checked that the power drift [W] is within ±5% in the evaluation procedure of SAR testing. The verification of power drift during the SAR test is that DASY4 system calculates the power drift by measuring the e-field at the same location at beginning and the end of the scan measurement for each test position. The result is shown in APPENDIX 2.

- *. DASY4 system calculation Power drift value[dB] = 20log(Ea)/(Eb) (where, Before SAR testing: Eb[V/m] / After SAR testing: Ea[V/m])
Limit of power drift[W] = ±5%
Power drift limit (X) [dB] = 10log(P_drift)=10log(1.05/1)=10log(1.05)-10log(1)=0.21dB
from E-field relations with power.
 $S=E \times H = E^2 / \eta = P / (4 \times \pi \times r^2)$ (η : Space impedance) → $P = (E^2 \times 4 \times \pi \times r^2) / \eta$
Therefore, The correlation of power and the E-field
Power drift limit (X) dB = 10log(P_drift) = 10log(E_drift)^2 = 20log(E_drift)
From the above mentioned, the calculated power drift of DASY4 system must be the less than ±0.21dB.

3.7 Measurement procedure

Operation mode: **I EEE 802.11b/g/a/n(20HT)/n(40HT)**

Step 1	Worst position search. (at lowest data rate, at the highest average power channel)
Step 2	Change the channel (at the worst SAR position)
Step 3	Change the operation mode
Step 4	Change the frequency band and repeat step1 to 3.

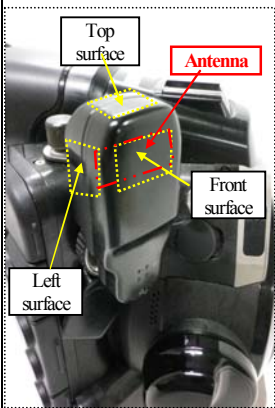



- *. Radiated power is monitored by Spectrum Analyzer during SAR test.

3.8 Test setup of EUT

Setup	Explanation
Front&touch	The part of front surface of Wireless File transmitter touched to the middle section of flat phantom. (*1)
Top&touch	The top section of Wireless File transmitter touched to the middle section of flat phantom. (*1)
Left-front&touch	The part of left section of Wireless File transmitter touched to the middle section of flat phantom. (*1)
Other direction	The SAR test was not applied on the other positions except the positions that were defined in the above. Because the separation distance between the user and the antenna of Wireless File transmitter becomes larger than 60mm on other SAR test positions. Therefore, three positions that were defined in the above were only SAR tested. (Refer to Appendix 1-2 for the separation distance.)

- *1. For each test direction, the antenna section was closed to the phantom as much as possible. The test directions show the photographs in the below.

- *. The other than the above test directions, the SAR test was not applied. Because the separation gap between the antenna section of Wireless File transmitter and the phantom bottom surface was larger in other test direction. The tested direction in above was a case where the antenna was closest to the phantom bottom surface in each Wireless File transmitter direction, therefore the worst SAR value was not shown in other than above tested direction.

Wireless File transmitter direction	Top&touch	Front&touch	Left-front&touch
			

SECTION 4: Operation of EUT during testing

4.1 Operating modes for SAR testing

This EUT has IEEE.802.11b/g/a/11n(20HT)/11n(40HT) continuous transmitting modes. The frequency and the modulation used in the SAR testing are shown as a following.

Operation mode	11b	11g	11n(20HT)	11n(40HT)	11a	11n(20HT)	11n(40HT)
Tx frequency band	2412-2462MHz			2422-2452MHz	5180-5320MHz 5745-5825MHz		5190-5310MHz 5755-5795MHz
Tested frequency	Refer to tested frequency list in below. (*2)				Refer to tested frequency list in below. (*2)		
Modulation	DBPSK/DSSS		BPSK/OFDM		BPSK/OFDM		
Data rate	1Mbps(*1)	6Mbps(*1)	MCS0(*1)		6Mbps(*1)	MCS0(*1)	
Crest factor	1.0(100% duty cycle)				1.0(100% duty cycle)		
Controlled software	Tera Term-rftest mode(*9) During SAR test, the EUT was connected with the host note PC via ribbon flat cable. The software installed in PC made the transmitting condition.						

*1. It was lowest data rate.

*2. Decision of SAR tested channels are described in the below the "SAR test applied channel list".

[SAR test applied channels list]

Mode	GHz	Channel	default		SAR tested channel					Remarks	
			11bga 11n(20HT)	11n (40HT)	11b	11g	11a	11n (20HT)	11n (40HT)		
802.11 b/g/n	2412	1	√	-	√	(*5)(*6)	-	(*5)(*6)	-	default channel. *5. worst average power of 11g, 11n(20HT).	
	2422	3	-	√	-	-	-	-	√	worst average power of 11n(40HT).	
	2437	6	√	√	√	n/a(*6)	-	n/a(*6)	n/a(*8)	default channel	
	2452	9	-	√	-	-	-	-	-	n/a(*8)	-
	2462	11	√	-	√	n/a(*6)	-	n/a(*6)	-	-	default channel
802.11 a/n	5.18	36	√	-	-	-	-	-	-	Replaced test channel to 40 from 36.	
	5.19	38	-	√	-	-	-	-	√	low channel of 11n(40HT).	
	5.20	40	*	-	-	-	√(*3)	(*4)(*7)	-	*3. worst average power of 11a *4. worst average power of 11n(20HT).	
	5.22	44	*	-	-	-	-	-	-	-	
	5.23	46	-	√	-	-	-	-	√	middle channel of 11n(40HT).	
	5.24	48	√	-	-	-	√	n/a(*7)	-	default channel	
	5.26	52	√	-	-	-	√	n/a(*7)	-	default channel	
	5.27	54	-	√	-	-	-	-	√	middle channel of 11n(40HT).	
	5.28	56	*	-	-	-	-	-	-	-	
	5.30	60	*	-	-	-	-	-	-	-	
	5.31	62	-	√	-	-	-	-	√	high channel of 11n(40HT).	
	5.32	64	√	-	-	-	√	n/a(*7)	-	default channel	
	5.745	149	√	-	-	-	-	-	-	Replaced test channel to 153 from 149.	
	5.755	151	-	√	-	-	-	-	√	low channel of 11n(40HT).	
	5.765	153	*	-	-	-	√(*3)	(*4)(*7)	-	*3. worst average power of 11a *4. worst average power of 11n(20HT).	
5.785	157	√	-	-	-	√	n/a(*7)	-	default channel.		
5.795	159	-	√	-	-	-	-	√	high channel of 11n(40HT).		
5.805	161	*	-	-	-	-	-	-	-		
5.825	165	√	-	-	-	√	n/a(*7)	-	default channel.		

√ = "default test channels of requested by KDB248227"

* = Possible 802.11a channels with maximum average output > the "default test channels"

*6. For these operation mode, the average antenna terminal conducted power were not 0.25dB higher than 11b mode. (refer to section 6 in this report)

*7. For these operation mode, the average antenna terminal conducted power were not 0.25dB higher than 11a mode. (refer to section 6 in this report)

*8. The measured SAR(1g) was less than 0.8W/kg (1/2 of the SAR(1g) limit) in the default channel that had worst average antenna terminal conducted power. Therefore, the SAR tests for other default channels were omitted. (KDB648474)

*9. The screen sample of the software used. (command: [antenna number] [channel] [bandwidth(0:20MHz/1:40MHz)] [power(13dBm)] [data rate] [rf-on/off])

```

COM19:115200baud - Tera Term VT
ファイル(F) 編集(E) 設定(S) コントロール(O) ウィンドウ(W) ヘルプ(H)
on
Dry> nell-attach
ioexp init
SDIOH Timer[0] is already created. [sdioph_ctrl.c<83>]
NELL(LUGH) version Feb 9 2011, 13:51:32
Dry> enterTEST
=====
==== Enter TEST MODE ====
=====
Dry> rftest 1 1 0 13 0 2
[testmode] setch : 1 ch
[testmode] set channel width : 20 MHz
[testmode] setrate : 1 Mbps
[testmode] get channel width : 20 MHz
[testmode] getch : 1 ch
[testmode] getrate : 1 Mbps
[testmode] set RF power : 13 dBm (corr_offset = 0xc3219e10, corr_1A = 0x0)
[testmode] duty cycle tx mode : on, data rate : 1 Mbps (50 %)
[testmode] duty cycle tx mode : off
[testmode] setrate : 1 Mbps
[testmode] get channel width : 20 MHz
[testmode] continuous tx mode : ON
Dry> rftest 1 1 0 13 0 18
[testmode] setrate : 1 Mbps
[testmode] get channel width : 20 MHz
[testmode] continuous tx mode : OFF
Dry>

```

SECTION 5: Uncertainty Assessment (SAR measurement)

Uncertainty of SAR measurement system	Under 3GHz	
	1g SAR	10g SAR
combined measurement uncertainty of the measurement system (k=1)	± 11.7%	± 11.4%
expanded uncertainty (k=2)	± 23.3%	± 22.8%

Error Description	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui		Vi, veff
						(1g)	(10g)	
A Measurement System						(std. uncertainty)	(std. uncertainty)	
1 Probe calibration	±5.9 %	Normal	1	1	1	±5.9 %	±5.9 %	∞
2 Axial isotropy	±4.7 %	Rectangular	√3	0.7	0.7	±1.9 %	±1.9 %	∞
3 Hemispherical isotropy (*flat phantom, <5°)	±2.6 %	Rectangular	√3	0.7	0.7	±1.1 %	±1.1 %	∞
4 Boundary effects	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
5 Probe linearity	±4.7 %	Rectangular	√3	1	1	±2.7 %	±2.7 %	∞
6 System detection limit	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
7 System readout electronics	±0.3 %	Normal	1	1	1	±0.3 %	±0.3 %	∞
8 Response time	±0.8 %	Rectangular	√3	1	1	±0.5 %	±0.5 %	∞
9 Integration time	±2.6 %	Rectangular	√3	1	1	±1.5 %	±1.5 %	∞
10 RF ambient – noise	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
11 RF ambient – reflections	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
12 Probe positioner mechanical tolerance	±0.4 %	Rectangular	√3	1	1	±0.2 %	±0.2 %	∞
13 Probe positioning with respect to phantom shell	±2.9 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
14 Max.SAR evaluation	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
B Test Sample Related								
15 Device positioning	±5.0 %	Normal	1	1	1	±5.0 %	±5.0 %	5
16 Device holder uncertainty	±5.0 %	Normal	1	1	1	±5.0 %	±5.0 %	5
17 Power drift	±5.0 %	Rectangular	√3	1	1	±2.9 %	±2.9 %	∞
C Phantom and Setup								
18 Phantom uncertainty	±4.0 %	Rectangular	√3	1	1	±2.3 %	±2.3 %	∞
19 Liquid conductivity (target)	±5.0 %	Rectangular	√3	0.64	0.43	±1.8 %	±1.2 %	∞
20 Liquid conductivity (meas.)	±2.9 %	Normal	1	0.64	0.43	±1.9 %	±1.2 %	3
21 Liquid permittivity (target)	±5.0 %	Rectangular	√3	0.6	0.49	±1.7 %	±1.4 %	∞
22 Liquid permittivity (meas.)	±2.9 %	Normal	1	0.6	0.49	±1.7 %	±1.4 %	3
Combined Standard Uncertainty						±11.7 %	±11.4 %	59
Expanded Uncertainty (k=2)						±23.3 %	±22.8 %	

*. This measurement uncertainty budget is suggested by IEEE 1528 and determined by Schmid & Partner Engineering AG (DASY4 Uncertainty Budget). [6]

Uncertainty of SAR measurement system	5~6 GHz	
	1g SAR	10g SAR
combined measurement uncertainty of the measurement system (k=1)	± 13.6%	± 13.3%
expanded uncertainty (k=2)	± 27.2%	± 26.7%

Error Description	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui		vi, veff
						(1g)	(10g)	
A Measurement System						(std. uncertainty)	(std. uncertainty)	
1 Probe calibration	±6.8 %	Normal	1	1	1	±6.8 %	±6.8 %	∞
2 Axial isotropy	±4.7 %	Rectangular	√3	0.7	0.7	±1.9 %	±1.9 %	∞
3 Hemispherical isotropy (*flat phantom, <5°)	±2.6 %	Rectangular	√3	0.7	0.7	±1.1 %	±1.1 %	∞
4 Boundary effects	±2.0 %	Rectangular	√3	1	1	±1.2 %	±1.2 %	∞
5 Probe linearity	±4.7 %	Rectangular	√3	1	1	±2.7 %	±2.7 %	∞
6 System detection limit	±1.0 %	Rectangular	√3	1	1	±0.6 %	±0.6 %	∞
7 System readout electronics	±0.3 %	Normal	1	1	1	±0.3 %	±0.3 %	∞
8 Response time	±0.8 %	Rectangular	√3	1	1	±0.5 %	±0.5 %	∞
9 Integration time	±2.6 %	Rectangular	√3	1	1	±1.5 %	±1.5 %	∞
10 RF ambient – noise	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
11 RF ambient – reflections	±3.0 %	Rectangular	√3	1	1	±1.7 %	±1.7 %	∞
12 Probe positioner mechanical tolerance	±0.8 %	Rectangular	√3	1	1	±0.5 %	±0.5 %	∞
13 Probe positioning with respect to phantom shell	±9.9 %	Rectangular	√3	1	1	±5.7 %	±5.7 %	∞
14 Max.SAR evaluation	±4.0 %	Rectangular	√3	1	1	±2.3 %	±2.3 %	∞
B Test Sample Related								
15 Device positioning	±5.0 %	Normal	1	1	1	±5.0 %	±5.0 %	∞
16 Device holder uncertainty	±5.0 %	Normal	1	1	1	±5.0 %	±5.0 %	∞
17 Power drift	±5.0 %	Rectangular	√3	1	1	±5.0 %	±2.9 %	∞
C Phantom and Setup								
18 Phantom uncertainty	±4.0 %	Rectangular	√3	1	1	±2.3 %	±2.3 %	∞
19 Liquid conductivity (target)	±5.0 %	Rectangular	√3	0.64	0.43	±1.8 %	±1.2 %	∞
20 Liquid conductivity (meas.)	±3.0 %	Normal	1	0.64	0.43	±1.9 %	±1.3 %	∞
21 Liquid permittivity (target)	±5.0 %	Rectangular	√3	0.6	0.49	±1.7 %	±1.4 %	∞
22 Liquid permittivity (meas.)	±3.2 %	Normal	1	0.6	0.49	±1.9 %	±1.6 %	∞
Combined Standard Uncertainty						±13.6 %	±13.3 %	∞
Expanded Uncertainty (k=2)						±27.2 %	±26.7 %	

*. This measurement uncertainty budget is suggested by Schmid & Partner Engineering AG. [6]

SECTION 6: Confirmation before testing

6.1 Assessment for the conducted power of EUT / Correction of the power at EMC test and at SAR test

6.1.1 2412-2462MHz band (802.11b/g/n(20HT)/n(40HT))

Worst data rate / worst channel determination (with full charged battery#1) / vs. power at EMC test (EUT serial number: 06)

Table with columns: Output power, Tx mode: 11b, Power Reading Results, Power at EMC test. Rows include channels 1, 6, 11, 2437 with various modulation and power values.

* The average antenna terminal conducted power of lowest data rate was worst. Therefore, each channel was measured at lowest data rate.

* The output power did not depend on the battery condition.

Table with columns: Output power, Tx mode: 11g, Power Reading Results, Power at EMC test. Rows include channels 1, 6, 11, 2437 with various modulation and power values.

* The average antenna terminal conducted power of lowest data rate was worst. Therefore, each channel was measured at lowest data rate.

Table with columns: Output power, Tx mode: 11n(20HT), Power Reading Results, Power at EMC test. Rows include channels 1, 6, 11, 2437 with various modulation and power values.

* The average power of higher data rate was less than 0.25dB higher than the lowest data rate. Therefore, each channel was measured at lowest data rate.

Table with columns: Output power, Tx mode: 11n(40HT), Power Reading Results, Power at EMC test. Rows include channels 3, 6, 9, 2437 with various modulation and power values.

* The average power of higher data rate was less than 0.25dB higher than the lowest data rate. Therefore, each channel was measured at lowest data rate.

- * Calculating formula: Results = ["P/M Reading"] + ["Cbl.loss"(Cable loss)] + ["Att.loss"(Attenuator)]
* At the same sample, the difference between the SAR reference power and the power of EMC test was not less than 0dB and not higher than 0.21dB.
* SAR reference; Measured date: May 9, 2011 / Measured by: Hiroshi Naka / Place: preparation room of No. 7 shielded room. (25 deg C / 44%RH)
* EMC test; This reference is described in the test report of 31CE0052-HO-01-B and -C.
* The maximum average power of 11g and 11a(20HT) were less than 0.25dB higher than the corresponding 11b. However, the SAR test was applied the maximum average power channel of 11g and 11n(20HT).
* A red-letter figure shows the maximum power of SAR reference (in data rate, in channel) and of EMC test.
* The duty cycle of each mode and on each data rate were 100% (no off time) in the software used.

6.1.2 5180-5320MHz band (W52/53 band) (802.11a/n(20HT)/n(40HT))

Worst data rate / worst channel determination (with full charged battery#1) / vs. power at EMC test (EUT serial number: 06)

[Output power]		Tx mode:		11a(W52/53)		5180-5320MHz		*PAR=Peak(dB)-Ave(dB)[dB]											
Ch.	Freq. [MHz]	D/R [Mbps]	Ant. No.	worst: o default: x	Modulation	P/M Reading		Cbl.Loss [dB]	Att.loss [dB]	Power Reading Results				Δ worst ave [dB]	PAR [dB]	Power at EMC test			
						Ave [dBm]	Pk [dB]			Ave [dBm]	Pk [dBm]	Ave [mW]	Pk [mW]			Ave [dB]	Δ (sar-emb) [dB]	Pk [dB]	Δ (sar-emb) [dB]
36	5180	6	single	x	BPSK OFDM	2.70	12.10	0.90	10.06	13.66	23.06	23.23	202.30	-0.20	9.40	13.63	0.03	23.02	0.04
40	5200	6	single	o	BPSK OFDM	2.90	12.25	0.90	10.06	13.86	23.21	24.32	209.41	0.00	9.35	13.84	0.02	23.18	0.03
44	5220	6	single		BPSK OFDM	2.55	12.05	0.90	10.06	13.51	23.01	22.44	199.99	-0.35	9.50				
48	5240	6	single	x	BPSK OFDM	2.55	12.05	0.90	10.06	13.51	23.01	22.44	199.99	-0.35	9.50	13.47	0.04	22.90	0.11
52	5260	6	single	x	BPSK OFDM	2.51	11.90	0.90	10.06	13.47	22.86	22.23	193.20	-0.39	9.39	13.45	0.02	22.84	0.02
56	5280	6	single		BPSK OFDM	2.51	11.86	0.90	10.06	13.47	22.82	22.23	191.43	-0.39	9.35	13.47	0.00	22.82	0.00
60	5300	6	single		BPSK OFDM	2.34	12.02	0.90	10.06	13.30	22.98	21.38	198.61	-0.56	9.68				
64	5320	6	single	x	BPSK OFDM	2.23	11.68	0.90	10.06	13.19	22.64	20.84	183.65	-0.67	9.45	13.17	0.02	22.64	0.00
40	5200	6	(Battery#2)			2.90	12.26	0.90	10.06	13.86	23.22	24.32	209.89	0.00	9.36	13.84	0.02	23.18	0.04
[Data Rate change]														Δ low rate	Ave	Δ ave	pk	Δ pk	
52	5260	6	single	o	BPSK OFDM	2.51	11.90	0.90	10.06	13.47	22.86	22.23	193.20	0.00	9.39	13.45	0.02	22.84	0.02
52	5260	9	single		BPSK OFDM	2.48	11.74	0.90	10.06	13.44	22.70	22.08	186.21	-0.03	9.26	13.41	0.03	22.54	0.16
52	5260	12	single		QPSK OFDM	2.46	11.89	0.90	10.06	13.42	22.85	21.98	192.75	-0.05	9.43	13.42	0.00	22.72	0.13
52	5260	18	single		QPSK OFDM	2.49	11.45	0.90	10.06	13.45	22.41	22.13	174.18	-0.02	8.96	13.44	0.01	22.21	0.20
52	5260	24	single		16QAM OFDM	2.48	12.16	0.90	10.06	13.44	23.12	22.08	205.12	-0.03	9.68	13.41	0.03	22.97	0.15
52	5260	36	single		16QAM OFDM	2.39	11.98	0.90	10.06	13.35	22.94	21.63	196.79	-0.12	9.59	13.35	0.00	22.74	0.20
52	5260	48	single		64QAM OFDM	2.46	11.72	0.90	10.06	13.42	22.68	21.98	185.35	-0.05	9.26	13.37	0.05	22.50	0.18
52	5260	54	single		64QAM OFDM	2.38	11.88	0.90	10.06	13.34	22.84	21.58	192.31	-0.13	9.50	13.34	0.00	22.70	0.14

* The average antenna terminal conducted power of lowest data rate was worst. Therefore, each channel was measured at lowest data rate.

* The output power did not depend on the battery condition.

[Output power]		Tx mode:		11n(20HT)(W52/53)		5180-5320MHz		*PAR=Peak(dB)-Ave(dB)[dB]											
Ch.	Freq. [MHz]	D/R [Mbps]	Ant. No.	worst: o default: x	Modulation	P/M Reading		Cbl.Loss [dB]	Att.loss [dB]	Power Reading Results				Δ worst ave [dB]	PAR [dB]	Power at EMC test			
						Ave [dBm]	Pk [dB]			Ave [dBm]	Pk [dBm]	Ave [mW]	Pk [mW]			Ave [dB]	Δ (sar-emb) [dB]	Pk [dB]	Δ (sar-emb) [dB]
36	5180	MCS0	single	x	BPSK OFDM	2.85	11.59	0.90	10.06	13.81	22.55	24.04	179.89	-0.07	8.74	13.67	0.14	22.36	0.19
40	5200	MCS0	single	o	BPSK OFDM	2.92	11.65	0.90	10.06	13.88	22.61	24.43	182.39	0.00	8.73	13.88	0.00	22.60	0.01
44	5220	MCS0	single		BPSK OFDM	2.48	11.15	0.90	10.06	13.44	22.11	22.08	162.55	-0.44	8.67				
48	5240	MCS0	single	x	BPSK OFDM	2.51	11.30	0.90	10.06	13.47	22.26	22.23	168.27	-0.41	8.79	13.43	0.04	22.11	0.15
52	5260	MCS0	single	x	BPSK OFDM	2.51	11.36	0.90	10.06	13.47	22.32	22.23	170.61	-0.41	8.85	13.45	0.02	22.23	0.09
56	5280	MCS0	single		BPSK OFDM	2.49	11.30	0.90	10.06	13.45	22.26	22.13	168.27	-0.43	8.81	13.45	0.00	22.26	0.00
60	5300	MCS0	single		BPSK OFDM	2.35	11.18	0.90	10.06	13.31	22.14	21.43	163.68	-0.57	8.83				
64	5320	MCS0	single	x	BPSK OFDM	2.25	11.10	0.90	10.06	13.21	22.06	20.94	160.69	-0.67	8.85	13.20	0.01	21.98	0.08
[Data Rate change]														Δ low rate	Ave	Δ ave	pk	Δ pk	
52	5260	MCS0	single	o	BPSK OFDM	2.51	11.36	0.90	10.06	13.47	22.32	22.23	170.61	0.00	8.85	13.45	0.02	22.23	0.09
52	5260	MCS1	single		QPSK OFDM	2.48	11.30	0.90	10.06	13.44	22.26	22.08	168.27	-0.03	8.82	13.44	0.00	22.18	0.08
52	5260	MCS2	single	o	QPSK OFDM	2.51	11.29	0.90	10.06	13.47	22.25	22.23	167.88	0.00	8.78	13.47	0.00	22.14	0.11
52	5260	MCS3	single		16QAM OFDM	2.48	11.41	0.90	10.06	13.44	22.37	22.08	172.58	-0.03	8.93	13.44	0.00	22.24	0.13
52	5260	MCS4	single		16QAM OFDM	2.50	11.46	0.90	10.06	13.46	22.42	22.18	174.58	-0.01	8.96	13.46	0.00	22.24	0.18
52	5260	MCS5	single		64QAM OFDM	2.49	11.22	0.90	10.06	13.45	22.18	22.13	165.20	-0.02	8.73	13.45	0.00	22.12	0.06
52	5260	MCS6	single		64QAM OFDM	2.49	11.46	0.90	10.06	13.45	22.42	22.13	174.58	-0.02	8.97	13.44	0.01	22.25	0.17
52	5260	MCS7	single		64QAM OFDM	2.48	11.43	0.90	10.06	13.44	22.39	22.08	173.38	-0.03	8.95	13.43	0.01	22.27	0.12

* The average antenna terminal conducted power of lowest data rate was worst. Therefore, each channel was measured at lowest data rate.

[Output power]		Tx mode:		11n(40HT)(W52/53)		5190-5310MHz		*PAR=Peak(dB)-Ave(dB)[dB]											
Ch.	Freq. [MHz]	D/R [Mbps]	Ant. No.	worst: o default: x	Modulation	P/M Reading		Cbl.Loss [dB]	Att.loss [dB]	Power Reading Results				Δ worst ave [dB]	PAR [dB]	Power at EMC test			
						Ave [dBm]	Pk [dB]			Ave [dBm]	Pk [dBm]	Ave [mW]	Pk [mW]			Ave [dB]	Δ (sar-emb) [dB]	Pk [dB]	Δ (sar-emb) [dB]
38	5190	MCS0	single	x	BPSK OFDM	2.94	11.62	0.90	10.06	13.90	22.58	24.55	181.13	0.00	8.68	13.82	0.08	22.41	0.17
46	5230	MCS0	single	x	BPSK OFDM	2.64	11.42	0.90	10.06	13.60	22.38	22.91	172.98	-0.30	8.78	13.60	0.00	22.37	0.01
54	5270	MCS0	single	x	BPSK OFDM	2.53	11.47	0.90	10.06	13.49	22.43	22.34	174.98	-0.41	8.94	13.49	0.00	22.27	0.16
62	5310	MCS0	single	x	BPSK OFDM	2.37	11.26	0.90	10.06	13.33	22.22	21.53	166.72	-0.57	8.89	13.33	0.00	22.02	0.20
[Data Rate change]														Δ low rate	Ave	Δ ave	pk	Δ pk	
54	5270	MCS0	single		BPSK OFDM	2.53	11.47	0.90	10.06	13.49	22.43	22.34	174.98	0.00	8.94	13.49	0.00	22.27	0.16
54	5270	MCS1	single		QPSK OFDM	2.53	11.34	0.90	10.06	13.49	22.30	22.34	169.82	0.00	8.81	13.49	0.00	22.29	0.01
54	5270	MCS2	single	o	QPSK OFDM	2.57	11.47	0.90	10.06	13.53	22.43	22.54	174.98	0.04	8.90	13.50	0.03	22.23	0.20
54	5270	MCS3	single		16QAM OFDM	2.53	12.12	0.90	10.06	13.49	23.08	22.34	203.24	0.00	9.59	13.46	0.03	22.90	0.18
54	5270	MCS4	single		16QAM OFDM	2.55	11.70	0.90	10.06	13.51	22.66	22.44	184.50	0.02	9.15	13.49	0.02	22.65	0.01
54	5270	MCS5	single		64QAM OFDM	2.53	11.92	0.90	10.06	13.49	22.88	22.34	194.09	0.00	9.39	13.48	0.01	22.87	0.01
54	5270	MCS6	single		64QAM OFDM	2.55	11.65	0.90	10.06	13.51	22.61	22.44	182.39	0.02	9.10	13.49	0.02	22.60	0.01
54	5270	MCS7	single		64QAM OFDM	2.53	11.35	0.90	10.06	13.49	22.31	22.34	170.22	0.00	8.82	13.45	0.04	22.25	0.06

* The average power of higher data rate was less than 0.25dB higher than the lowest data rate. Therefore, each channel was measured at lowest data rate.

* Calculating formula: Results = ["P/M Reading"] + ["Cbl.loss"(Cable loss)] + ["Att.loss"(Attenuator)]

* At the same sample, the difference between the SAR reference power and the power of EMC test was not less than 0dB and not higher than 0.21dB.

* SAR reference; Measured date: May 9, 2011 / Measured by: Hiroshi Naka / Place: preparation room of No. 7 shielded room. (25 deg.C / 44 %RH)
 EMC test; This reference is described in the test report of 31CE0052-HO-01-B and -C.

* The maximum average power of 11a(20HT) was less than 0.25dB higher than the corresponding 11a. However, the SAR test was applied the maximum average power channel of 11n(20HT).

* A red-letter figure shows the maximum power of SAR reference (in data rate, in channel) and of EMC test.

* The duty cycle of each mode and on each data rate were 100% (no off time) in the software used.

6.1.3 5745-5825MHz band (W58 band) (802.11a/n(20HT)/n(40HT))

Worst data rate / worst channel determination (with full charged battery#1) / vs. power at EMC test (EUT serial number: 06)

[Output power]		Tx mode:		11a(W58)		5745-5825MHz		*PAR:Peak(dB)-Ave(dB)(dB)				Power at EMC test								
Ch.	Freq. [MHz]	D/R [Mbps]	Ant. No.	worst: o	default: x	Modulation	P/M Reading	Cbl.Loss [dB]	Att.loss [dB]	Power Reading Results		Δ worst ave.(dB)	PAR [dB]	Ave. [dB]	Δ (sar- emc)	Pk [dB]	Δ (sar- emc)			
							Ave.(dBm)	Pk(dB)			Ave.(dBm)	Pk(dBm)	Ave(mW)	Pk(mW)						
149	5745	6	single	x	l	BPSK OFDM	1.64	11.03	0.90	10.06	12.60	21.99	18.20	158.12	-0.36	9.39				
153	5765	6	single	o		BPSK OFDM	2.00	11.12	0.90	10.06	12.96	22.08	19.77	161.44	0.00	9.12				
157	5785	6	single	x		BPSK OFDM	1.90	10.66	0.90	10.06	12.86	21.62	19.32	145.21	-0.10	8.76	12.86	0.00	21.57	0.05
161	5805	6	single	o		BPSK OFDM	1.86	10.53	0.90	10.06	12.82	21.49	19.14	140.93	-0.14	8.67				
165	5825	6	single	x		BPSK OFDM	1.59	10.39	0.90	10.06	12.55	21.35	17.99	136.46	-0.41	8.80				
153	5765	6	(Battery#2)				2.00	11.14	0.90	10.06	12.96	22.10	19.77	162.18	0.00	9.14				
[Data Rate change]																				
157	5785	6	single			BPSK OFDM	1.90	10.66	0.90	10.06	12.86	21.62	19.32	145.21	0.00	8.76	12.86	0.00	21.57	0.05
157	5785	9	single			BPSK OFDM	1.93	10.56	0.90	10.06	12.89	21.52	19.45	141.91	0.03	8.63	12.88	0.01	21.34	0.18
157	5785	12	single			QPSK OFDM	1.93	10.70	0.90	10.06	12.89	21.66	19.45	146.55	0.03	8.77	12.87	0.02	21.59	0.07
157	5785	18	single	o		QPSK OFDM	1.99	10.28	0.90	10.06	12.95	21.24	19.72	133.05	0.09	8.29	12.94	0.01	21.17	0.07
157	5785	24	single			16QAM OFDM	1.92	10.86	0.90	10.06	12.88	21.82	19.41	152.05	0.02	8.94	12.79	0.09	21.74	0.08
157	5785	36	single			16QAM OFDM	1.85	10.79	0.90	10.06	12.81	21.75	19.10	149.82	-0.05	8.94	12.73	0.08	21.57	0.18
157	5785	48	single			64QAM OFDM	1.92	10.41	0.90	10.06	12.88	21.37	19.41	137.09	0.02	8.49	12.76	0.12	21.25	0.12
157	5785	54	single			64QAM OFDM	1.84	10.61	0.90	10.06	12.90	21.57	19.05	143.55	-0.06	8.77	12.75	0.05	21.53	0.04

* The average power of higher data rate was less than 0.25dB higher than the lowest data rate. Therefore, each channel was measured at lowest data rate.

* The output power did not depend on the battery condition.

[Output power]		Tx mode:		11n(20HT)(W58)		5745-5825MHz		*PAR:Peak(dB)-Ave(dB)(dB)				Power at EMC test								
Ch.	Freq. [MHz]	D/R [Mbps]	Ant. No.	worst: o	default: x	Modulation	P/M Reading	Cbl.Loss [dB]	Att.loss [dB]	Power Reading Results		Δ worst ave.(dB)	PAR [dB]	Ave. [dB]	Δ (sar- emc)	Pk [dB]	Δ (sar- emc)			
							Ave.(dBm)	Pk(dB)			Ave.(dBm)	Pk(dBm)	Ave(mW)	Pk(mW)						
149	5745	MCS0	single	x	l	BPSK OFDM	1.83	10.23	0.90	10.06	12.79	21.19	19.01	131.52	-0.19	8.40				
153	5765	MCS0	single	o		BPSK OFDM	2.02	10.36	0.90	10.06	12.98	21.32	19.86	135.52	0.00	8.34				
157	5785	MCS0	single	x		BPSK OFDM	1.91	10.32	0.90	10.06	12.87	21.28	19.36	134.28	-0.11	8.41	12.82	0.05	21.08	0.20
161	5805	MCS0	single	o		BPSK OFDM	1.77	10.31	0.90	10.06	12.73	21.27	18.75	133.97	-0.25	8.54				
165	5825	MCS0	single	x		BPSK OFDM	1.56	10.26	0.90	10.06	12.52	21.22	17.86	132.43	-0.46	8.70				
[Data Rate change]																				
157	5785	MCS0	single			BPSK OFDM	1.91	10.32	0.90	10.06	12.87	21.28	19.36	134.28	0.00	8.41	12.82	0.05	21.08	0.20
157	5785	MCS1	single			QPSK OFDM	1.92	10.27	0.90	10.06	12.88	21.23	19.41	132.74	0.01	8.35	12.84	0.04	21.12	0.11
157	5785	MCS2	single			QPSK OFDM	1.96	10.42	0.90	10.06	12.92	21.38	19.59	137.40	0.05	8.46	12.85	0.07	21.19	0.19
157	5785	MCS3	single	o		16QAM OFDM	1.98	10.40	0.90	10.06	12.94	21.36	19.68	136.77	0.07	8.42	12.94	0.00	21.18	0.18
157	5785	MCS4	single			16QAM OFDM	1.94	10.30	0.90	10.06	12.90	21.26	19.50	133.66	0.03	8.36	12.90	0.00	21.10	0.16
157	5785	MCS5	single			64QAM OFDM	1.96	10.25	0.90	10.06	12.92	21.21	19.59	132.13	0.05	8.29	12.88	0.04	21.01	0.20
157	5785	MCS6	single			64QAM OFDM	1.94	10.27	0.90	10.06	12.90	21.23	19.50	132.74	0.03	8.33	12.89	0.01	21.05	0.18
157	5785	MCS7	single			64QAM OFDM	1.93	10.27	0.90	10.06	12.89	21.23	19.45	132.74	0.02	8.34	12.84	0.05	21.12	0.11

* The average power of higher data rate was less than 0.25dB higher than the lowest data rate. Therefore, each channel was measured at lowest data rate.

[Output power]		Tx mode:		11n(40HT)(W58)		5755-5795MHz		*PAR:Peak(dB)-Ave(dB)(dB)				Power at EMC test								
Ch.	Freq. [MHz]	D/R [Mbps]	Ant. No.	worst: o	default: x	Modulation	P/M Reading	Cbl.Loss [dB]	Att.loss [dB]	Power Reading Results		Δ worst ave.(dB)	PAR [dB]	Ave. [dB]	Δ (sar- emc)	Pk [dB]	Δ (sar- emc)			
							Ave.(dBm)	Pk(dB)			Ave.(dBm)	Pk(dBm)	Ave(mW)	Pk(mW)						
151	5755	MCS0	single			BPSK OFDM	1.73	10.20	0.90	10.06	12.69	21.16	18.58	130.62	-0.18	8.47				
159	5795	MCS0	single	o		BPSK OFDM	1.91	10.18	0.90	10.06	12.87	21.14	19.36	130.02	0.00	8.27	12.82	0.05	21.14	0.00
[Data Rate change]																				
159	5795	MCS0	single			BPSK OFDM	1.91	10.18	0.90	10.06	12.87	21.14	19.36	130.02	0.00	8.27	12.82	0.05	21.14	0.00
159	5795	MCS1	single	o		QPSK OFDM	1.94	10.21	0.90	10.06	12.90	21.17	19.50	130.92	0.03	8.27	12.90	0.00	21.17	0.00
159	5795	MCS2	single			QPSK OFDM	1.92	10.32	0.90	10.06	12.88	21.28	19.41	134.28	0.01	8.40	12.84	0.04	21.08	0.20
159	5795	MCS3	single			16QAM OFDM	1.89	10.85	0.90	10.06	12.85	21.81	19.28	151.71	-0.02	8.96	12.82	0.03	21.63	0.18
159	5795	MCS4	single			16QAM OFDM	1.89	10.48	0.90	10.06	12.85	21.44	19.28	139.32	-0.02	8.59	12.85	0.00	21.26	0.18
159	5795	MCS5	single			64QAM OFDM	1.87	10.89	0.90	10.06	12.83	21.85	19.19	153.11	-0.04	9.02	12.83	0.00	21.67	0.18
159	5795	MCS6	single			64QAM OFDM	1.93	10.45	0.90	10.06	12.89	21.41	19.45	138.36	0.02	8.52	12.87	0.02	21.40	0.01
159	5795	MCS7	single			64QAM OFDM	1.92	10.23	0.90	10.06	12.88	21.19	19.41	131.52	0.01	8.31	12.88	0.00	21.18	0.01

* The average power of higher data rate was less than 0.25dB higher than the lowest data rate. Therefore, each channel was measured at lowest data rate.

* Calculating formula: Results = [{"P/M Reading"}] + [{"Cbl.loss"}(Cable loss)] + [{"Att.loss"}(Attenuator)]

* At the same sample, the difference between the SAR reference power and the power of EMC test was not less than 0dB and not higher than 0.21dB.

* SAR reference; Measured date: May 9, 2011 / Measured by: Hiroshi Naka / Place: preparation room of No. 7 shielded room. (25 deg.C/44%RH)

* EMC test; This reference is described in the test report of 31CE0052-HO-01-B and -C.

* The maximum average power of 11a(20HT) was less than 0.25dB higher than the corresponding 11a. However, the SAR test was applied the maximum average power channel of 11n(20HT).

* A red-letter figure shows the maximum power of SAR reference (in data rate, in channel) and of EMC test.

* The duty cycle of each mode and on each data rate were 100% (no off time) in the software used.

6.1.4 Comparison the power measurement results on September 2, 2011 and May 9, 2011 (last SAR test) on the same sample

Comparison of power on May 9, 2011 and September 2, 2011 (before SAR test) (EUT serial number: 06)

Mode	Freq. [MHz]	Data Rate [Mbps]	Results (Average power)		Remarks
			May 9, 2011 [dB]	September 2, 2011 [dB]	
802.11b	2412	1	13.20	13.18	w/Battery(1)
	2437		13.33	13.23	
	2462		13.20	12.85	w/Battery(2)
	2437		13.33	13.27	
802.11a	5180	6	13.66	13.63	w/Battery(1)
	5200		13.86	13.84	
	5220		13.51	13.43	
	5240		13.51	13.47	
	5260		13.47	13.48	
	5280		13.47	13.48	
	5300		13.30	13.32	
	5320		13.19	13.18	
802.11a	5200	6	13.86	13.85	w/Battery(2)
	5745		12.60	12.67	w/Battery(1)
	5765		12.96	12.98	
	5785		12.86	12.89	
	5805		12.82	12.79	
	5825		12.55	12.56	
5765	12.96	13.02	w/Battery(2)		

*. SAR reference; Measured date: September 2, 2011 / Measured by: Hiroshi Naka / Place: preparation room of No. 7 shielded room. (25 deg.C / 62%RH)

*. From the above-mentioned result, it was judged that the performance of the RF module was the same.

SECTION 7: Measurement results

7.1 SAR for 2412-2462MHz band

Measurement date: September 12, 2011

Measurement by: Hiroshi Naka

[Liquid measurement (Body liquid)]

Used Target Frequency [MHz]	Target Body Tissue		Measured Body Tissue				Environment		Date measured
	Permittivity [-]	Conductivity [S/m]	Permittivity (εr) [-]	Conductivity (σ) [S/m]	Temp. [deg.C.]	Depth [mm]	Temp. [deg.C.]	Humidity [%]	
2450	52.7	1.95	50.17 (-4.8%)	1.976 (+1.3%)	23.7	158, in phantom	23.8	63	September 12, 2011, before SAR test.

*. The target value is a parameter defined in OET65 Supplement C.

[SAR measurement results (Body liquid)]

SAR measurement results											
Mode	Frequency		Modulation & Data rate [Mbps] / crest factor	EUT setup conditions			Liquid temp. [deg.C]		Power drift [dB]	SAR(1g) [W/kg] maximum value of multi-peak	Remarks
	ch	[MHz]		Position	Cap [mm]	Battery No.	Before	After			
Step 1: Worst position search											
11b	6	2437	DBPSK&DSSS/ 1Mbps/ 1.0	Top&touch	0	1	23.6	23.6	-0.20	< 0.10	-
	6	2437	DBPSK&DSSS/ 1Mbps/ 1.0	Front&touch	0	2	23.5	23.5	-0.008	0.16	-
	6	2437	DBPSK&DSSS/ 1Mbps/ 1.0	Left-front&touch	0	1	23.5	23.5	0.110	0.24	(→Worst direction) →Worst SAR of 2.4GHz.
Step 2: Change the channel											
-	1	2412	DBPSK&DSSS/ 1Mbps/ 1.0	Left-front&touch	0	2	23.5	23.5	0.035	0.22	-
	11	2462	DBPSK&DSSS/ 1Mbps/ 1.0	Left-front&touch	0	1	23.5	23.6	0.087	0.21	-
Step 3: Change the operation mode											
11g	6	2437	BPSK&OFDM/ 6Mbps/ 1.0	Left-front&touch	0	2	23.6	23.5	-0.20	0.21	-(*)
11n (20HT)	6	2437	BPSK&OFDM/ MCS0/ 1.0	Left-front&touch	0	1	23.5	23.5	-0.176	0.20	-(*)
11n (40HT)	3	2422	BPSK&OFDM/ MCS0/ 1.0	Left-front&touch	0	2	23.5	23.6	-0.154	0.23	-
	6	2437	BPSK&OFDM/ MCS0/ 1.0	Left-front&touch	0	1	23.6	23.6	-0.132	0.22	-
	9	2452	BPSK&OFDM/ MCS0/ 1.0	Left-front&touch	0	2	23.6	23.6	-0.117	0.21	-

Notes:

- *1. For these operation mode, the average antenna terminal conducted power were less than or not more than 0.25dB of 11b mode. (refer to section 6 in this report)
- *. Battery was fully charged before starting the SAR measurement.
- *. The other than above test direction, the SAR test was not applied. Because the separation gap between the antenna section of Wireless File transmitter and the phantom bottom surface was larger in other test direction. The tested direction in above was a case where the antenna was closest to the phantom bottom surface in each Wireless File transmitter direction, therefore the worst SAR value was not shown in other than above tested direction.
- *. Calibration frequency of the SAR measurement probe (and used conversion factors)

SAR test frequency [MHz]	Probe calibration frequency [MHz]	Validity [MHz]	Used conversion factor	Uncertainty
2412	2450	-38MHz, within ±50 of cal.frequency	8.05	±11.0%
2422	2450	-28MHz, within ±50 of cal.frequency	8.05	±11.0%
2437	2450	-13MHz, within ±50 of cal.frequency	8.05	±11.0%
2452	2450	+2MHz, within ±50 of cal.frequency	8.05	±11.0%
2462	2450	+12MHz, within ±50 of cal.frequency	8.05	±11.0%

*. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

7.2 SAR for 5180-5320MHz band (W52/53 band)

Measurement date: September 5, 2011

Measurement by: Hiroshi Naka

[Liquid measurement (Body liquid)]

Used Target Frequency [MHz]	Target Body Tissue		Measured Body Tissue				Environment		Date measured
	Permittivity [-]	Conductivity [S/m]	Permittivity (εr) [-]	Conductivity (σ) [S/m]	Temp. [deg.C.]	Depth [mm]	Temp. [deg.C.]	Humidity [%]	
5200	49.01	5.299	49.80 (+1.6%)	5.554 (+4.8%)	24.0	149 in phantom	24.1	63	September 5, 2011 before SAR test
5240	48.96	5.346	49.79 (+1.7%)	5.582 (+4.4%)					
5260	48.93	5.369	49.76 (+1.7%)	5.632 (+4.9%)					
5320	48.85	5.439	49.46 (+1.3%)	5.694 (+4.7%)					
5190	49.30	5.288	49.82 (+1.6%)	5.527 (+4.5%)					
5230	48.97	5.334	49.75 (+1.6%)	5.580 (+4.6%)					
5270	48.92	5.381	49.73 (+1.7%)	5.630 (+4.6%)					
5310	48.87	5.428	49.61 (+1.5%)	5.682 (+4.7%)					

*. The target value is a parameter defined in OET65 Supplement C. In the current standards (e.g., IEEE 1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given at 3000MHz and 5800MHz. As an intermediate solution, dielectric parameters for the frequencies between 5000 to 5800 MHz were obtained using linear interpolation. Furthermore, dielectric parameters for the frequencies above 5800MHz were obtained using linear extrapolation. (refer to Appendix 3-7 in this report)

[SAR measurement results (Body liquid)]

SAR measurement results											
Mode	Frequency		Modulation & Data rate [Mbps] / crest factor	EUT setup conditions			Liquid temp. [deg.C]		Power drift [dB]	SAR(1g) [W/kg]	Remarks
	ch	[MHz]		Position	Cap [mm]	Battery No.	Before	After		maximum value of multi-peak	
Step 1: Worst position search											
11a	40	5200	BPSK&OFDM / 6Mbps / 1.0	Top&touch	0	1	23.9	23.9	-0.20	0.72	→Worst direction
	40	5200	BPSK&OFDM / 6Mbps / 1.0	Front&touch	0	2	23.9	23.9	-0.188	0.71	-
	40	5200	BPSK&OFDM / 6Mbps / 1.0	Left-front&touch	0	1	24.0	23.9	-0.15	0.34	-
Step 2: Change the channel											
11a	48	5240	BPSK&OFDM / 6Mbps / 1.0	Top&touch	0	2	23.9	23.9	-0.195	0.66	-
	52	5260	BPSK&OFDM / 6Mbps / 1.0	Top&touch	0	1	23.9	23.9	0.070	0.64	-
	64	5320	BPSK&OFDM / 6Mbps / 1.0	Top&touch	0	2	23.9	23.8	-0.084	0.58	-
Step 3: Change the operation mode											
11n (20HT)	40	5200	BPSK&OFDM / MCS0 / 1.0	Top&touch	0	1	23.8	23.7	-0.180	0.73	→Worst SAR of W52/53.
11n (40HT)	38	5190	BPSK&OFDM / MCS0 / 1.0	Top&touch	0	2	23.7	23.6	-0.141	0.72	-
11n (40HT)	46	5230	BPSK&OFDM / MCS0 / 1.0	Top&touch	0	1	23.6	23.6	-0.167	0.66	-
	54	5270	BPSK&OFDM / MCS0 / 1.0	Top&touch	0	2	23.6	23.6	-0.045	0.63	-
11n (40HT)	62	5310	BPSK&OFDM / MCS0 / 1.0	Top&touch	0	1	23.6	23.6	-0.006	0.59	-

Notes:

- *1. For these operation mode, the average antenna terminal conducted power were less than or not more than 0.25dB of 11a mode. (refer to section 6 in this report)
- *. Battery was fully charged before starting the SAR measurement.
- *. The other than above test direction, the SAR test was not applied. Because the separation gap between the antenna section of Wireless File transmitter and the phantom bottom surface was larger in other test direction. The tested direction in above was a case where the antenna was closest to the phantom bottom surface in each Wireless File transmitter direction, therefore the worst SAR value was not shown in other than above tested direction.
- *. Calibration frequency of the SAR measurement probe (and used conversion factors)

SAR test frequency [MHz]	Probe calibration frequency [MHz]	Validity [MHz]	Used conversion factor	Uncertainty
5190	5200	-10MHz, within ±50 of cal.frequency	4.16	±13.1%
5200	5200	0MHz, within ±50 of cal.frequency	4.16	±13.1%
5230	5200	+30MHz, within ±50 of cal.frequency	4.16	±13.1%
5240	5200	+40MHz, within ±50 of cal.frequency	4.16	±13.1%
5260	5300	-40MHz, within ±50 of cal.frequency	3.80	±13.1%
5270	5300	-30MHz, within ±50 of cal.frequency	3.80	±13.1%
5310	5300	+10MHz, within ±50 of cal.frequency	3.80	±13.1%
5320	5300	+20MHz, within ±50 of cal.frequency	3.80	±13.1%

7.3 SAR for 5745-5825MHz band (W58 band)

Measurement date: September 6, 2011

Measurement by: Hiroshi Naka

[Liquid measurement (Body liquid)]

Used Target Frequency [MHz]	Target Body Tissue		Measured Body Tissue				Environment		Date measured
	Permittivity [-]	Conductivity [S/m]	Permittivity (εr) [-]	Conductivity (σ) [S/m]	Temp. [deg.C.]	Depth [mm]	Temp. [deg.C.]	Humidity [%]	
5765	48.25	5.959	48.95 (+1.5%)	6.208 (+4.2%)	24.9	149 in phantom	25.0	63	September 6, 2011 before SAR test
5785	48.22	5.982	48.78 (+1.2%)	6.220 (+4.0%)					
5825	48.17	6.029	48.93 (+1.6%)	6.310 (+4.7%)					
5755	48.26	5.947	49.05 (+1.6%)	6.216 (+4.5%)					
5795	48.21	5.994	48.96 (+1.6%)	6.252 (+4.3%)					

*. The target value is a parameter defined in OET65 Supplement C. In the current standards (e.g., IEEE 1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given at 3000MHz and 5800MHz. As an intermediate solution, dielectric parameters for the frequencies between 5000 to 5800 MHz were obtained using linear interpolation. Furthermore, dielectric parameters for the frequencies above 5800MHz were obtained using linear extrapolation. (refer to Appendix 3-7 in this report)

[SAR measurement results (Body liquid)]

SAR measurement results											
Frequency			Modulation & Data rate [Mbps] / crest factor	EUT setup conditions			Liquid temp. [deg.C]		Power drift [dB]	SAR(1g) [W/kg] maximum value of multi-peak	Remarks
Mode	ch	[MHz]		Position	Cap [mm]	Battery No.	Before	After			
Step 1: Worst position search											
11a	153	5765	BPSK&OFDM / 6Mbps / 1.0	Top&touch	0	1	24.5	24.4	-0.150	0.51	-
	153	5765	BPSK&OFDM / 6Mbps / 1.0	Left-front&touch	0	2	24.4	24.4	-0.129	0.24	-
	153	5765	BPSK&OFDM / 6Mbps / 1.0	Front&touch	0	1	24.4	24.3	-0.194	0.55	(→Worst direction)
Step 2: Change the channel											
-	157	5785	BPSK&OFDM / 6Mbps / 1.0	Front&touch	0	2	24.3	24.3	-0.178	0.50	-
	165	5825	BPSK&OFDM / 6Mbps / 1.0	Front&touch	0	1	24.3	24.3	0.019	0.44	-
Step 3: Change the operation mode											
11n (20HT)	153	5765	BPSK&OFDM / MCS0 / 1.0	Front&touch	0	2	24.3	24.3	-0.101	0.55	(→Worst SAR of W58. (*1))
11n (40HT)	151	5755	BPSK&OFDM / MCS0 / 1.0	Front&touch	0	1	24.3	24.3	-0.20	0.50	-
	159	5795	BPSK&OFDM / MCS0 / 1.0	Front&touch	0	2	24.3	24.2	-0.138	0.49	-

Notes:

- *1. For these operation mode, the average antenna terminal conducted power were less than or not more than 0.25dB of 11a mode. (refer to section 6 in this report)
- *. Battery was fully charged before starting the SAR measurement.
- *. The other than above test direction, the SAR test was not applied. Because the separation gap between the antenna section of Wireless File transmitter and the phantom bottom surface was larger in other test direction. The tested direction in above was a case where the antenna was closest to the phantom bottom surface in each Wireless File transmitter direction, therefore the worst SAR value was not shown in other than above tested direction.
- *. Calibration frequency of the SAR measurement probe (and used conversion factors)

SAR test frequency [MHz]	Probe calibration frequency [MHz]	Validity [MHz]	Used conversion factor	Uncertainty
5755	5800	-45MHz, within ±50 of cal.frequency	3.50	±13.1%
5765	5800	-35MHz, within ±50 of cal.frequency	3.50	±13.1%
5785	5800	-15MHz, within ±50 of cal.frequency	3.50	±13.1%
5795	5800	-5MHz, within ±50 of cal.frequency	3.50	±13.1%
5825	5800	+25MHz, within ±50 of cal.frequency	3.50	±13.1%