

APPENDIX 2: SAR Measurement data

Appendix 2-1: Evaluation procedure

The SAR evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and suitable horizontal grid spacing of EUT. Based on these data, the area of the maximum absorption was determined by splines interpolation.

Step 3: Around this point found in the Step 2 (area scan), a volume of 30mm(X axis)×30mm(Y axis)×30mm(Z axis) was assessed by measuring 7×7×7 points under 3GHz.

And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated.

On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- (1) The data at the surface were extrapolated, since the center of the dipoles is 1mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- (2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10×10×10) were interpolated to calculate the average.
- (3) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the E-field at the same location as in Step 1 for the assessment of the power drift.

Step 5: Repeat Step 1-Step 4 with other condition or/and setup of EUT.

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1)

Step 1: Change the positions

Step 1-1: Top & touch (separation distance=0mm) / 11b(1Mbps), 2437MHz

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2437 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
- Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
- Phantom: ELI4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1c-pre8,PC1953+wm219+label,11b(1m,14d),m2437/

Area Scan:75x60,15 (6x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 1.14 mW/g

Area Scan:75x60,15 (51x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 1.40 mW/g


Z Scan:160,5 (1x1x33): Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 1.30 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 24.7 V/m; Power Drift = 0.043 dB; Maximum value of SAR (measured) = 1.32 mW/g

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.698 mW/g; SAR(10 g) = 0.244 mW/g

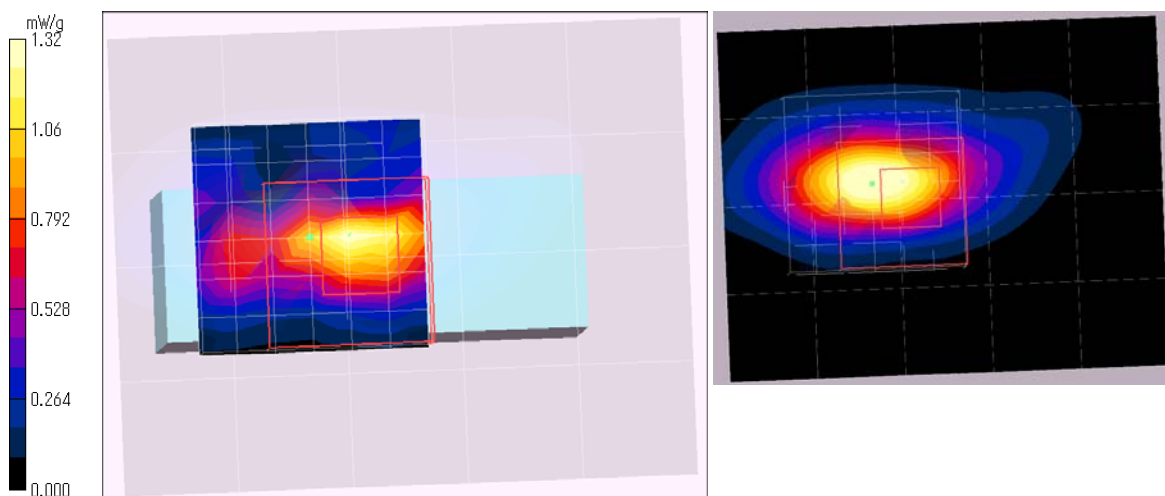

Remarks: *. Date tested: 2012/08/22; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
*. liquid depth: 153mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 44 %RH,
*. liquid temperature: 23.4(start)23.4(end)23.3(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g) / small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 1: Change the positions (cont'd)

Step 1-2: Bottom & touch (separation distance=0mm) / 11b(1Mbps), 2437MHz

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2437 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

DASY4 Configuration: Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
Sensor-Surface: 2mm (Mechanical Surface Detection) Electronics: DAE4 Sn626; Calibrated: 2012/02/15
Phantom: ELI4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1e-2,m2437,PC1953+wm219+label,btm&touch(d0mm),11b(1m,sef14d)/

Area Scan:135x60,15 (10x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 1.05 mW/g

Area Scan:135x60,15 (91x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 1.23 mW/g


Z Scan:160,5 (1x1x33): Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 1.29 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 16.0 V/m; Power Drift = 0.111 dB; Maximum value of SAR (measured) = 1.29 mW/g

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g)=0.690 mW/g; SAR(10 g)=0.330 mW/g

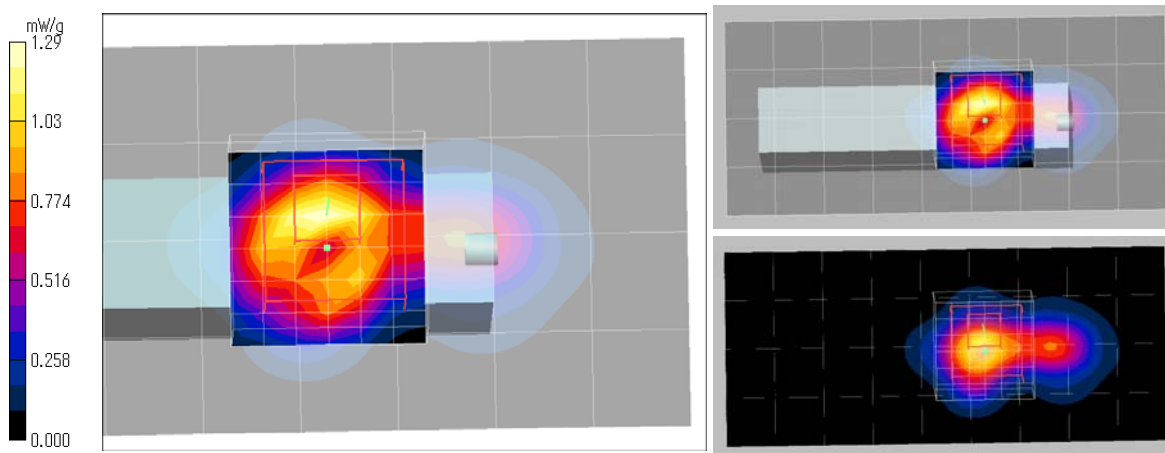

Remarks: *. Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
*. liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 47 %RH,
*. liquid temperature: 23.2(start)/23.2(end)/23.3(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g) /small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 1: Change the positions (cont'd)

Step 1-3: Top& touch (separation distance=0mm) / 11b(1Mbps), 2437MHz

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2437 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
- Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1e-4,m2437,top&touch(d=0mm),PC1953+wm219+label,11b(1m,set14d)/

Area Scan:135x60,15 (10x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.226 mW/g


Area Scan:135x60,15 (91x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 0.228 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 7.78 V/m; Power Drift = -0.064 dB, Maximum value of SAR (measured) = 0.232 mW/g

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.052 mW/g

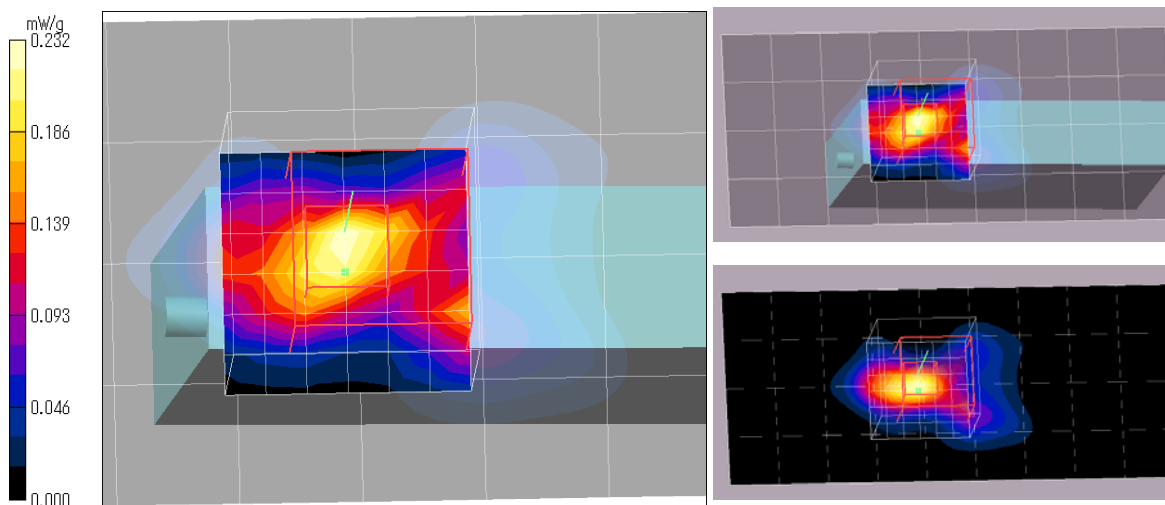

Remarks: * Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 47%RH,
* liquid temperature: 23.1(start)/23.1(end)/23.3(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 1: Change the positions (cont'd)

Step 1-4: Rear (LCD) & touch (separation distance=0mm) / 11b(1Mbps), 2437MHz

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2437 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn626; Calibrated: 2012/02/15

- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1e-5,PC1953+wm219,rear&touch(d0mm),11b(1m,set14d),m2437/

Area Scan:135x90,15 (10x7x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.125 mW/g


Area Scan:135x90,15 (91x61x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 0.140 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 4.58 V/m; Power Drift = 0.20 dB, Maximum value of SAR (measured) = 0.175 mW/g

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.053 mW/g

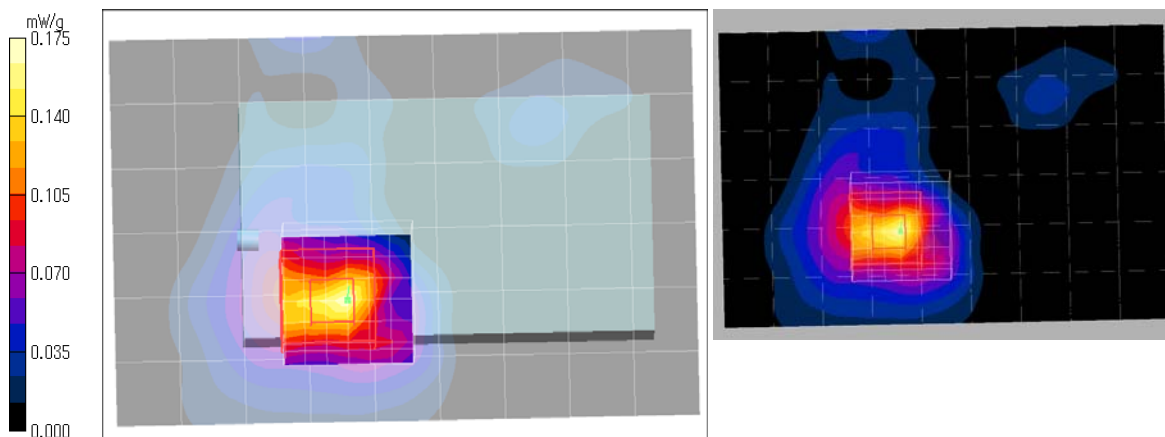

Remarks: *. Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,

*. liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 47%RH,

*. liquid temperature: 23.0(start)/23.0(end)/23.3(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 1: Change the positions (cont'd)

Step 1-5: Front (Lens) & touch (separation distance=0mm) / 11b(1Mbps), 2437MHz

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2437 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn626; Calibrated: 2012/02/15

- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1e-6,PC1953+wm219,frt&touch(d0mm),11b(1m,sef14d),m2437/

Area Scan:135x90,15 (10x7x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.262 mW/g


Area Scan:135x90,15 (91x61x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 0.281 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 4.23 V/m; Power Drift = 0.0304 dB, Maximum value of SAR (measured) = 0.286 mW/g

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.071 mW/g

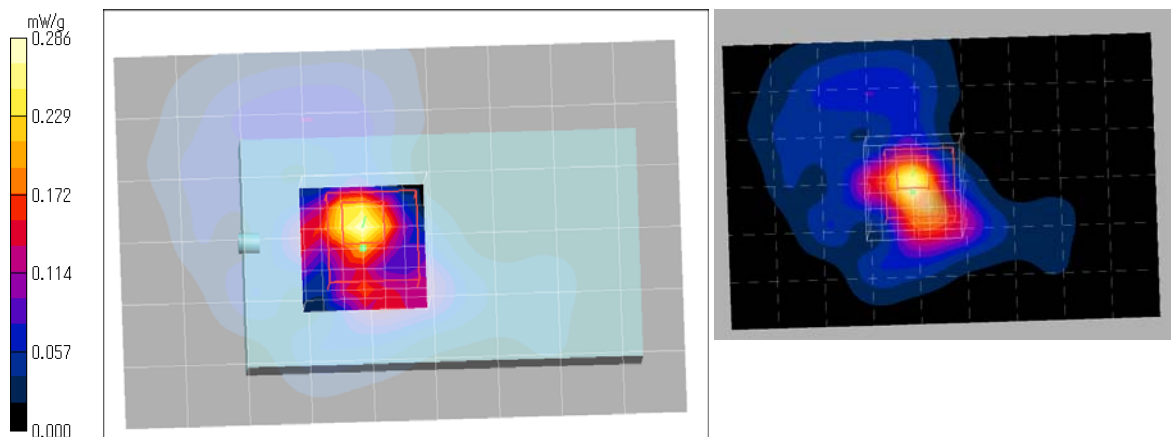

Remarks: * Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,

* liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 47%RH,

* liquid temperature: 23.0(start)23.0(end)23.3(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 1: Change the positions (cont'd)

Step 1-6: Right & touch (separation distance=0mm) / 11b(1Mbps), 2437MHz

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2437 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
- Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1e-8,PC1953+wm219,right&touch(d0mm),11b(1m,set14d),m2437/

Area Scan:90x60,15 (7x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.036 mW/g


Area Scan:90x60,15 (61x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 0.109 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 4.43 V/m; Power Drift = -0.20 dB, Maximum value of SAR (measured) = 0.040 mW/g

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00902 mW/g

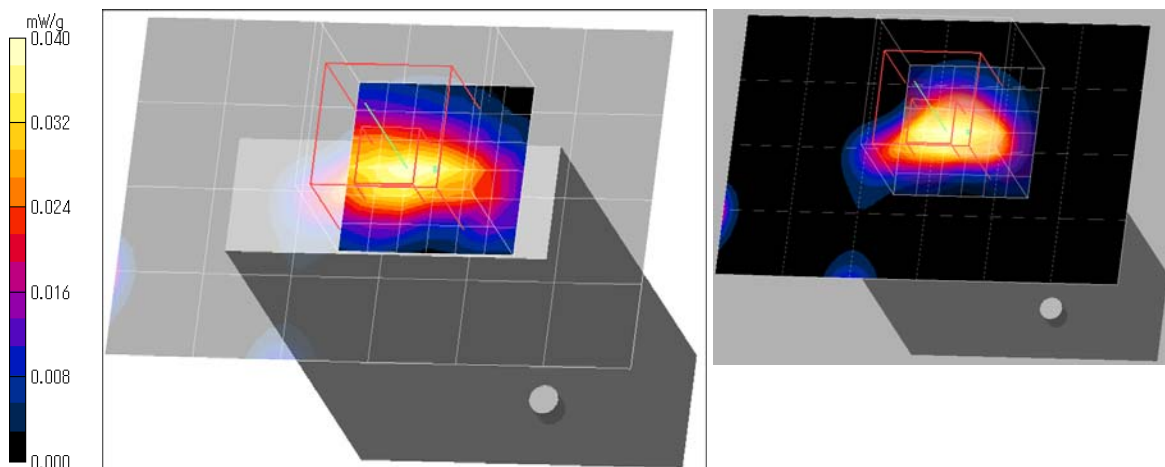

Remarks: * Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 47%RH,
* liquid temperature: 23.0(start)/23.0(end)/23.3(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g) / small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 2: Change the channels

Step 2-1: 2412MHz / Left & touch (separation distance=0mm),11b(1Mbps)

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2412 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
- Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
- Phantom: ELI4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1c-pre9,PC1953+wm219+label,left&touch(d0mm),11b(1m,set14d),m2412/

Area Scan:75x60,15 (6x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.945 mW/g


Area Scan:75x60,15 (51x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 1.22 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 23.3 V/m; Power Drift = -0.12 dB; Maximum value of SAR (measured) = 1.10 mW/g

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.202 mW/g

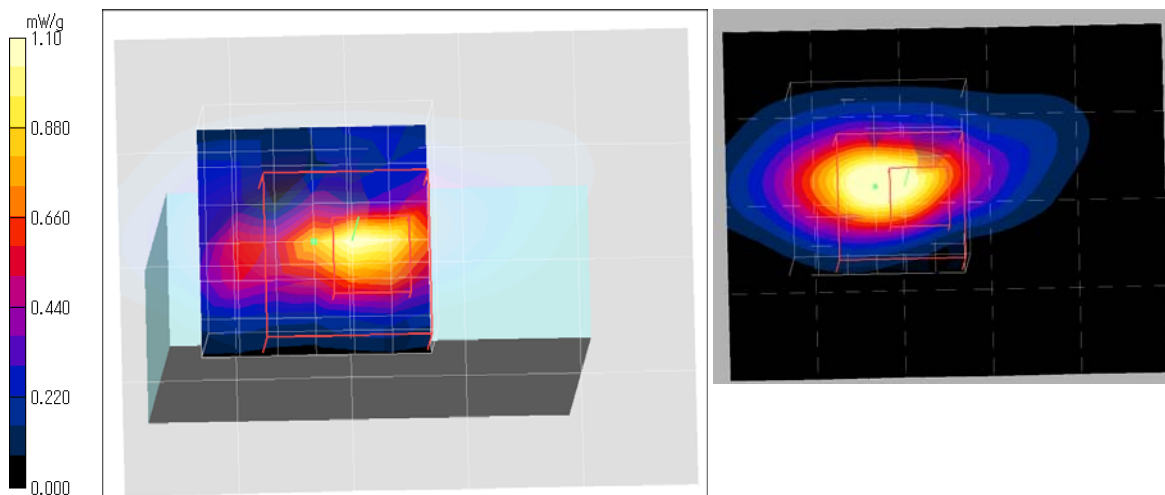

Remarks: *. Date tested: 2012/08/22; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
*. liquid depth: 153mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 44 %RH,
*. liquid temperature: 23.4(start)23.4(end)23.3(in check) deg.C.; *. White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 2: Change the channels (cont'd)

Step 2-2: 2462MHz / Left & touch (separation distance=0mm),11b(1Mbps)

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2462 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
- Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1c-pre7,PC1953+wm219+label,left&touch(d0mm),11b(1m,set14d),m2462/

Area Scan:75x60,15 (6x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 1.07 mW/g

Area Scan:75x60,15 (51x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 1.32 mW/g


Z Scan:160,5 (1x1x33): Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 1.42 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 24.6 V/m; Power Drift = 0.172 dB; Maximum value of SAR (measured) = 1.43 mW/g

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g)=0.752 mW/g; SAR(10 g)=0.265 mW/g

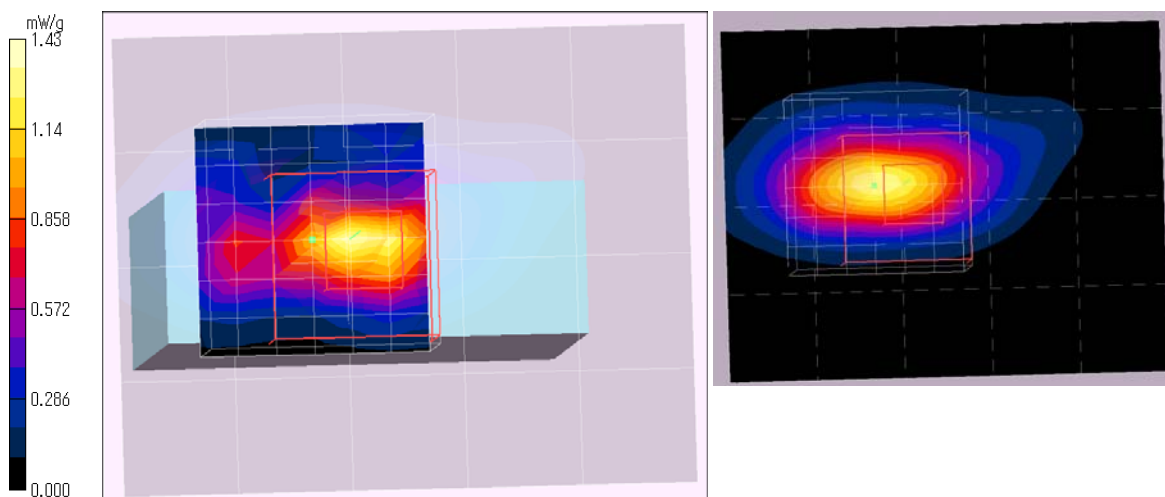

Remarks: * Date tested: 2012/08/22; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 153mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 44%RH,
* liquid temperature: 23.4(start)/23.4(end)/23.3(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g) / small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 2: Change the channels (cont'd)

Step 2-3: 2412MHz / Bottom & touch (separation distance=0mm),11b(1Mbps)

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2412 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
- Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1e-3,m2412,PC1953+wm219+label,btm&touch(d0mm),11b(1m,sef14d)/

Area Scan:135x60,15 (10x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.690 mW/g

Area Scan:135x60,15 (91x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 0.816 mW/g


Z Scan:160,5 (1x1x33): Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 1.16 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 14.8 V/m; Power Drift = -0.107 dB; Maximum value of SAR (measured) = 1.16 mW/g

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g)=0.621 mW/g; SAR(10 g)=0.295 mW/g

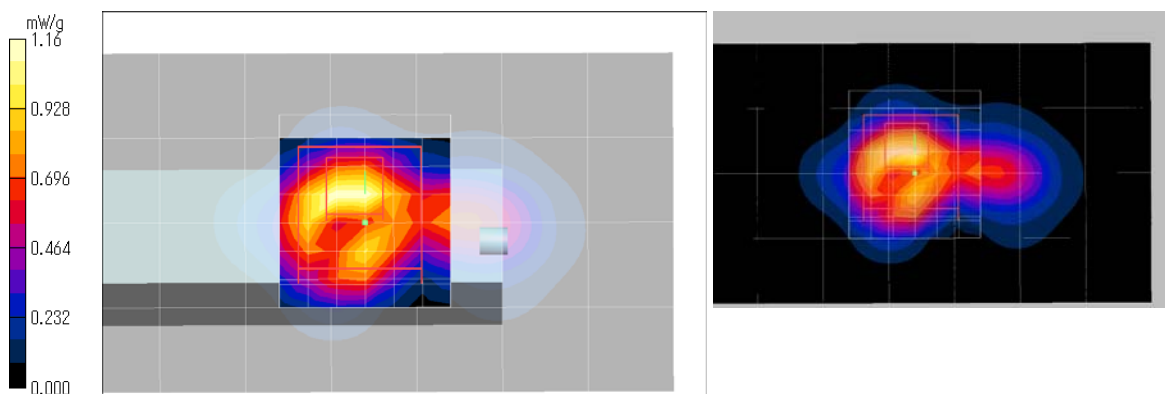

Remarks: * .Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place:No.7 shielded room,
* .liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 47%RH,
* .liquid temperature: 23.2(start)/23.1(end)/23.3(in check) deg.C.; * .White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 2: Change the channels (cont'd)

Step 2-4: 2462MHz / Bottom & touch (separation distance=0mm),11b(1Mbps)

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2462 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

DASY4 Configuration: Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn626; Calibrated: 2012/02/15

Phantom: ELI4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dcle-rere1,m2462,PC1953+wm219+label,btm&touch(d0mm),11b(1m,set14d)/

Area Scan:135x60,15 (10x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.817 mW/g

Area Scan:135x60,15 (91x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 0.977 mW/g


Z Scan:160,5 (1x1x33): Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 1.33 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 16.5 V/m; Power Drift = -0.177 dB; Maximum value of SAR (measured) = 1.34 mW/g

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.340 mW/g

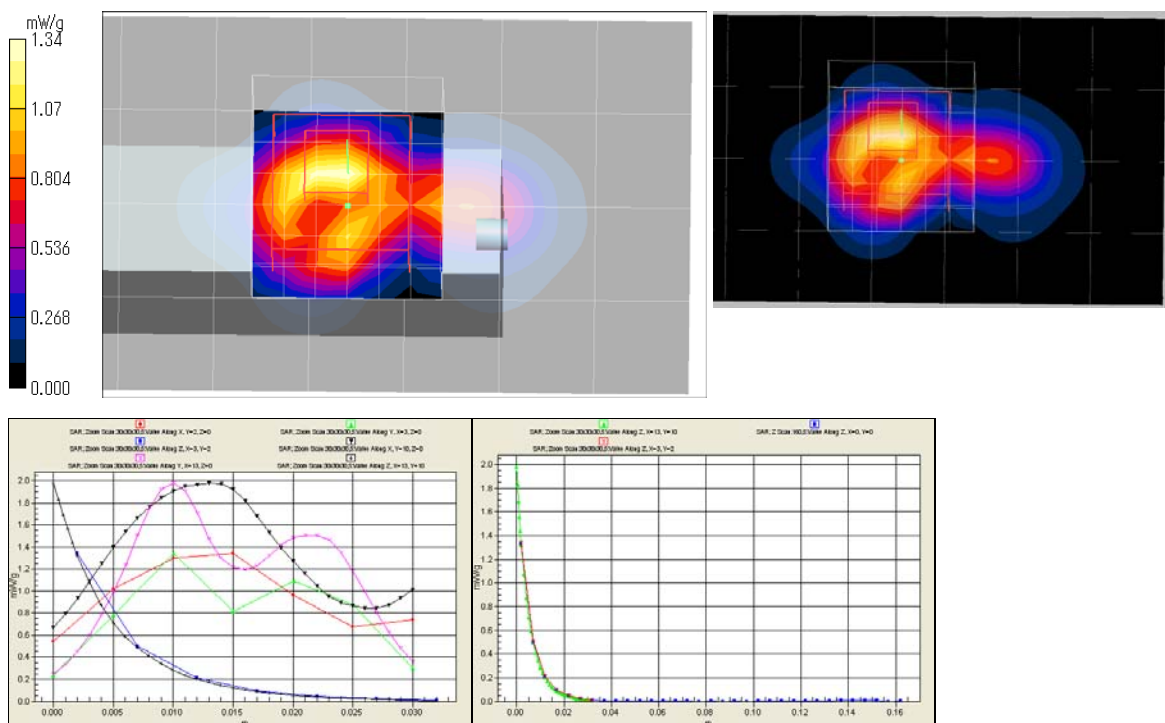

Remarks: * Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg C. / 47%RH,
* liquid temperature: 23.1(start)/23.1(end)/23.3(in check) deg.C.; *.White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

Appendix 2-2: Measurement data / Platform(1)-Digital camera(1) (cont'd)

Step 3: Repeat worst SAR condition

Step 3-1: Left & touch (separation distance=0mm) / 11b(1Mbps), 2462MHz

> Worst SAR(1g) of Platform (1)-digital camera (1)

EUT: Wireless module / Platform(1)-Digital camera(1); Type: WM219 / PC1953; Serial: D3A2 / 63

Communication System: IEEE 802.11b(1Mbps, DBPSK/DSSS); Frequency: 2462 MHz; Crest Factor: 1.0

Medium: M2450; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21

- Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15

- Phantom: ELI4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

dc1e-rere7,PC1953+wm219,left&touch(d0mm),11b(1m,set14d),m2462/

Area Scan:75x60,15 (6x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 1.26 mW/g

Area Scan:75x60,15 (51x41x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 1.39 mW/g


Z Scan:160,5 (1x1x33): Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 1.28 mW/g

Zoom Scan:30x30x30,5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 24.4 V/m; Power Drift = -0.0314 dB; Maximum value of SAR (measured) = 1.29 mW/g

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.776 mW/g (> Worst SAR(1g)); SAR(10 g) = 0.268 mW/g

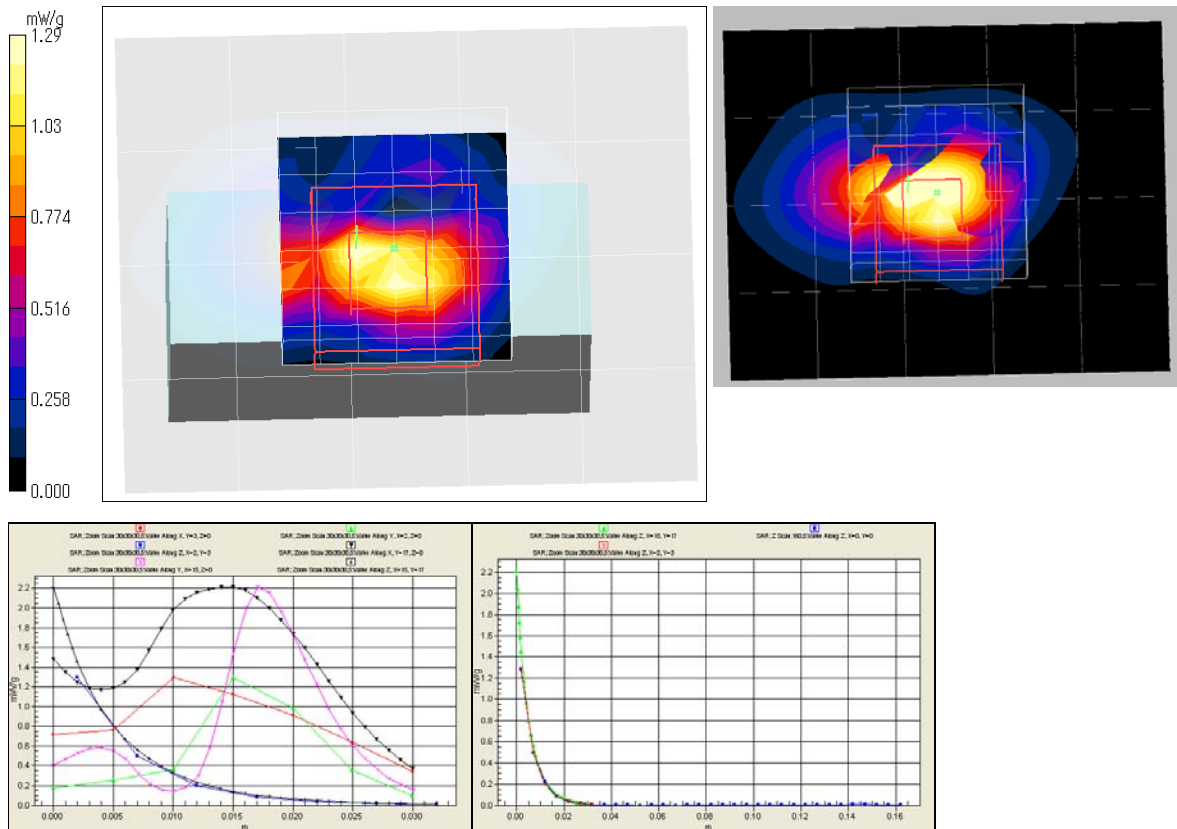

Remarks: * Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
* liquid depth: 152mm; Position: distance of EUT to phantom: 0mm (2mm to liquid); ambient: 24.5deg.C. / 47%RH,
* liquid temperature: 23.0(start)/23.0(end)/23.3(in check) deg.C.; *.White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

APPENDIX 3: Test instruments

Appendix 3-1: Equipment used

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
COTS-KSAR-01	DASY4	Schmid&Partner Engineering AG	DASY4 V4.7 B80	-	SAR	-
COTS-KSEP-01	Dielectric measurement	Agilent	85070	1	SAR	-
KSAR-01	SAR measurement system	Schmid&Partner Engineering AG	DASY4	1088	SAR	Pre Check
SSRBT-01	SAR robot	Schmid&Partner Engineering AG	RX60B L	F04/5Z71A1/A /01	SAR	2012/02/06 * 12
KDAE-01	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	626	SAR	2012/02/15 * 12
KPB-01	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3679	SAR	2012/06/21 * 12
KSDA-01	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	822	SAR	2012/01/10 * 12
KPFL-01	Flat Phantom	Schmid&Partner Engineering AG	Oval flat phantom ELI 4.0	1059	SAR	2011/10/26 * 12
SSNA-01	Network Analyzer	Agilent	8753ES	US39171777	SAR	2011/12/15 * 12
KEPP-01	Dielectric probe	Agilent	85070E/8710-2036	2540	SAR	2012/02/20 * 12
KSG-08	Signal Generator	Rohde & Schwarz	SMT06	100763	SAR(daily)	2012/06/26 * 12
KPA-12	RF Power Amplifier	MILMEGA	AS2560-50	1018582	SAR(daily)	Pre Check
KCPL-07	Directional Coupler	Pulsar Microwave Corp.	CCS30-B26	0621	SAR(daily)	Pre Check
KPM-06	Power Meter	Rohde & Schwarz	NRVD	101599	SAR(daily)	2011/09/13 * 12
KIU-08	Power sensor	Rohde & Schwarz	NRV-Z4	100372	SAR(daily)	2011/09/13 * 12
KIU-09	Power sensor	Rohde & Schwarz	NRV-Z4	100371	SAR(daily)	2011/09/13 * 12
KPM-05	Power meter	Agilent	E4417A	GB41290718	SAR(daily)	2012/03/22 * 12
KPSS-01	Power sensor	Agilent	E9327A	US40440544	SAR(daily)	2012/03/22 * 12
KAT10-P1	Attenuator	Weinschel	24-10-34	BY5927	SAR(daily)	2012/02/15 * 12
KAT10-CS1	Attenuator	HUBER+SUHNER	6810.17.A	768898-1	SAR(daily)	2012/01/10 * 12
KAT10-CS2	Attenuator	HUBER+SUHNER	6810.17.A	768898-2	SAR(daily)	2012/01/10 * 12
KRU-01	Ruler(300mm)	Shinwa	13134	-	SAR	2012/03/08 * 12
KRU-03	Ruler(150mm,caliper)	Niigata Seiki	SK-M150	806164	SAR	2012/03/08 * 12
KRU-04	Ruler(300mm)	Shinwa	13134	-	SAR	2012/05/29 * 12
KRU-05	Ruler(100x50mm,L)	Shinwa	12101	-	SAR	2012/05/29 * 12
KOS-13	Digital thermometer	HANNA	Checktemp-2	KOS-13	SAR	2012/01/06 * 12
KOS-14	Thermo-Hygrometer data logger	SATO KEIRYOKI	SK-L200THII α / SK-LTHII α-2	015246/08169	SAR	2012/01/06 * 12
SOS-11	Humidity Indicator	A&D	AD-5681	4063424	SAR	2012/02/06 * 12
SSA-04	Spectrum Analyzer	Advantest	R3272	101100994	SAR(mon.)	2011/12/28 * 12
SWTR-03	DI water	MonotaRo	34557433	-	SAR(daily)	Pre Check
SWTR-04	DI water	MonotaRo	34557433	-	SAR(daily)	Pre Check
KPM-08	Power meter	Anritsu	ML2495A	6K00003356	Ant.pwr	2011/09/12 * 12
KPSS-04	Power sensor	Anritsu	MA2411B	012088	Ant.pwr	2011/09/12 * 12
KAT10-S3	Attenuator	Agilent	8490D 010	50924	Ant.pwr	2012/02/15 * 12
KSLM245-01	Tissue simulation liquid (2450MHz,body)	Schmid&Partner Engineering AG	SL AAM 245	-	SAR	(Daily check) Target value ±5%
No.7 Shielded room	SAR shielded room (2.76m(W)x3.76m(D)x2.4m(H))	TDK	-	-	SAR	(Daily check) Ambient noise: < 12mW/kg

The expiration date of calibration is the end of the expired month.


As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations. All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

[Test Item] SAR: Specific Absorption Rate, Ant.pwr: Antenna terminal conducted power

Appendix 3-2: Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probes EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than ± 0.25 dB.

Appendix 3-3: Configuration and peripherals

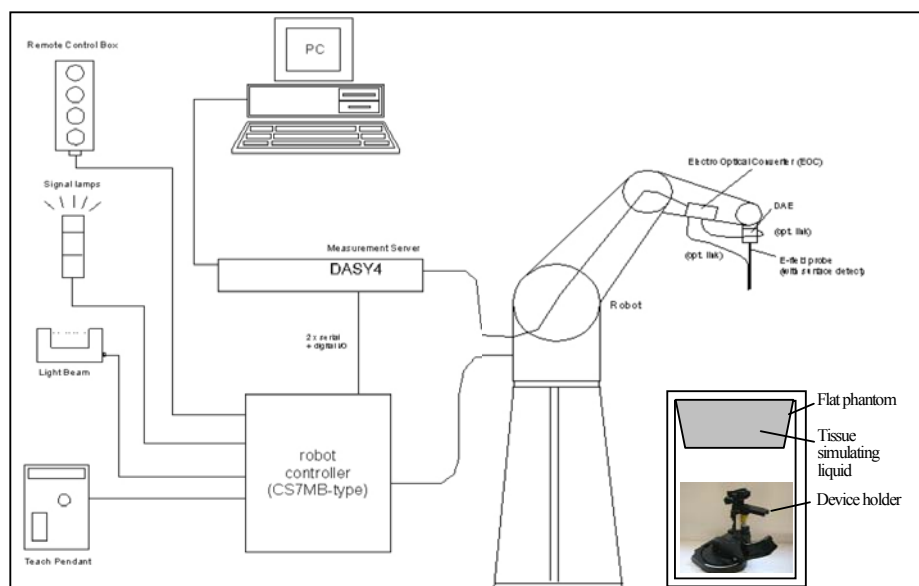

The DASY4 system for performing compliance tests consist of the following items:

1	A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2	A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3	A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4	The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5	The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6	A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7	A computer operating Windows XP.
8	DASY4 software.
9	Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10	The phantom.
11	The device holder for EUT. (low-loss dielectric palette) (*. when it was used.)
12	Tissue simulating liquid mixed according to the given recipes.
13	Validation dipole kits allowing to validate the proper functioning of the system.

Appendix 3-4: System components

1) EX3DV4 Probe Specification

Construction:

- Symmetrical design with triangular core.
- Built-in shielding against static charges.
- PEEK enclosure material (resistant to organic solvents, e.g., DGBE).

Calibration (S/N 3679):

Basic broad band calibration in air.

Conversion Factors(Head and Body): 2450, 5200, 5300, 5500, 5600, 5800MHz

Frequency:

10 MHz to > 6GHz, Linearity: ± 0.2 dB (30MHz to 6GHz)

Directivity:

± 0.3 dB in HSL (rotation around probe axis)

± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range:

$10\mu\text{W/g}$ to $> 100\text{ mW/g}$; Linearity: ± 0.2 dB (noise: typically $< 1\mu\text{W/g}$)

Dimensions:

Overall length: 330mm (Tip: 20mm)

Tip diameter: 2.5mm (Body: 12mm)

Typical distance from probe tip to dipole centers: 1mm

Application:

High precision dosimetric measurement in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6GHz with precision of better 30%.



EX3DV4 E-field Probe



2) Phantom (Flat type)

Construction:

A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom position and measurement grids by manually teaching three points with the robot.

Shell Thickness:


Bottom plate: 2 ± 0.2 mm

Dimensions:

Bottom elliptical: 600×400mm, Depth: 190mm

Filling Volume:

Approx. 30 liters

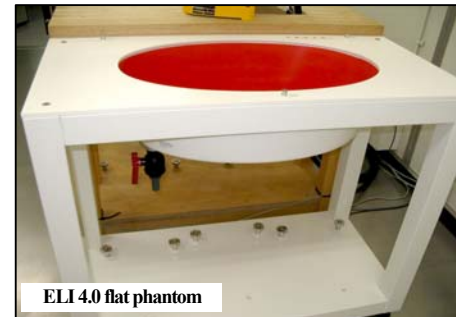

ELI 4.0 flat phantom

3) Device Holder

For this measurement, the urethane foam was used as device holder.

In combination with the Twin SAM Phantom V4.0/V4.0c or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Transmitter devices can be easily and accurately positioned.

The low-loss dielectric urethane foam was used for the mounting section of device holder.

Device holder



Appendix 3-5: Test system specification

RX60L Robot

- Number of Axes : 6
- Reach : 800mm
- Control Unit : CS7M
- Manufacture : Stäubli Unimation Corp. Robot Model: RX60
- Payload : 1.6 kg
- Repeatability : ± 0.025 mm
- Programming Language : V+

DASY4 Measurement server

- Features : 166MHz low power Pentium MMX.
32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system. Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision).
Emergency stop relay for robot safety chain. Two expansion slots for future applications.
- Manufacture : Schmid & Partner Engineering AG

Data Acquisition Electronic (DAE)

- Features : Signal amplifier, multiplexer, A/D converter and control logic.
Serial optical link for communication with DASY4 embedded system (fully remote controlled).
2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
- Measurement Range : 1 μ V to > 200mV (16bit resolution and two range settings: 4mV, 400mV)
- Input Offset voltage : < 1 μ V (with auto zero)
- Input Resistance : 200M Ω
- Dimension : 60 $\times$ 60 $\times$ 68mm
- Battery Power : > 10hr of operation (with two 9V battery)
- Manufacture : Schmid & Partner Engineering AG

Software

- Item : Dosimetric Assessment System DASY4
- Software version No. : DASY4, V4.7 B80
- Manufacture / Origin : Schmid & Partner Engineering AG

E-Field Probe

- Model : EX3DV4 (sn: 3679)
- Frequency : 10MHz to 6GHz
- Manufacture : Schmid & Partner Engineering AG
- Construction : Symmetrical design with triangular core
- Linearity : ± 0.2 dB (30MHz to 3GHz)

Phantom

- Type : ELI 4.0 oval flat phantom
- Shell Thickness : Bottom plate: 2 $\pm$ 0.2mm
- Manufacture : Schmid & Partner Engineering AG
- Shell Material : Fiberglass
- Dimensions : Bottom elliptical: 600 $\times$ 400mm, Depth: 190mm

Appendix 3-6: Simulated tissue composition

Liquid type	☐ / Head, HSL 2450	☒ / Body, MSL 2450
M/N / Control No.	SL AAH 245 / KSLH245-01	SL AAM 245 / KSLM245-01
Ingredient	Mixture (%)	Mixture (%)
Water	52-75 %	52-75 %
C ₈ H ₁₈ O ₃ (DGBE) (Diethylene glycol monobutyl ether)	25-48%	25-48%
NaCl	<1.0%	<1.0%
Manufacture	Schmid&Partner Engineering AG	Schmid&Partner Engineering AG

Appendix 3-7: Simulated tissue parameter confirmation

The dielectric parameters were checked prior to assessment using the 85070E dielectric probe kit. The dielectric parameters measurement is reported in each correspondent section.

Dielectric parameter measurement results												
Date	Freq. [MHz]	Ambient		Liq.T. [deg.C.]		Liquid Depth [mm]	Parameters	Target value		Measured	Deviation for #1 (Std.) [%]	Limit [%]
		Temp [deg.C.]	Humidity [%RH]	Before	After			#1:Std. (*1)	#2:Cal. (*2)			
August 22, 2012	2450	24.3	52	23.3	23.3	153	Relative permittivity: ϵ_r [-]	52.7	50.6	50.48	-4.2	± 5
							Conductivity: σ [S/m]	1.95	2.01	1.958	+0.4	± 5
August 23, 2012	2450	23.9	53	23.1	23.1	152	Relative permittivity: ϵ_r [-]	52.7	50.6	50.31	-4.5	± 5
							Conductivity: σ [S/m]	1.95	2.01	1.962	+0.6	± 5

*1. The target value is a parameter defined in OET65, Supplement C.

*2. The target value is a parameter defined in the calibration data sheet of D2450V2 (sn:822) dipole calibrated by Schmid & Partner Engineering AG (Certification No. D2450V2-822_Jan12, the data sheet was filed in this report.).

*. **Decision on Simulated Tissues of 2450MHz**

In the current standards (e.g., IEEE 1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given at 2000MHz, 2450 and 3000MHz. As an intermediate solution, dielectric parameters for the frequencies between 2000 to 2450 MHz and 2450-3000MHz were obtained using linear interpolation. Therefore the dielectric parameters of Wi-Fi frequency of 2.4GHz band which were SAR tested were decided as following.

Standard					Interpolated				
f (MHz)	Head Tissue		Body Tissue		f (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
(1800-)2000	40.0	1.40	53.3	1.52	2412	39.26	1.771	52.75	1.914
2450	39.2	1.80	52.7	1.95	2437	39.21	1.793	52.72	1.938
3000	38.5	2.40	52.0	2.73	2462	39.18	1.819	52.68	1.967

Appendix 3-8: System check data



Prior to the SAR assessment of EUT, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The system check results are in the table below.

System check results															
Date	Freq. [MHz]	Liquid Type	Ambient		Liquid Temp. [deg.C.]			Liquid Depth [mm]	Permittivity measured ϵ_r [-]	Conductivity measured σ [S/m]	Power drift [dB]	System check target & measured			
			Temp [deg.C.]	Humidity [%RH]	Check	Before	After					SAR 1g [W/kg] (at 250mW)		Deviation [%]	Limit [%]
												Target value	Measured		
August 22, 2012	2450	Body	24.4	46	23.3	23.9	23.8	153	50.5	1.96	0.072	13.2 (*3)	13	-1.5	±10
August 23, 2012	2450	Body	24.3	52	23.1	23.5	23.4	152	50.3	1.96	0.028	13.2 (*3)	12.8	-3.0	±10

Note: Refer to Appendix 3-9 System Check measurement data for the above result representation in plot data.

*3. The target value is a parameter defined in the calibration data sheet of D2450V2 (sn:822) dipole calibrated by Schmid & Partner Engineering AG (Certification No. D2450V2-822_Jan12, the data sheet was filed in this report.).

*. We performed the system check based on FCC requirement, "The 1g or 10g SAR values measured using the required tissue dielectric parameters should be within 10% of manufacturer calibrated dipole SAR values. However these manufacturer calibrated dipole target SAR values should be substantially similar to those defined in IEEE Standard 1528." and FCC permits "SAR system verification with the actual liquid used for EUT's SAR measurement, should be the default operating procedures." We confirmed the this dipole manufacture's validation data for head is within 5% against IEEE Standard 1528 (manufacture's cal.: 52.1W/kg (-0.6%, vs. standard=52.4W/kg). so we can only use Body liquid validation data for our system check procedure

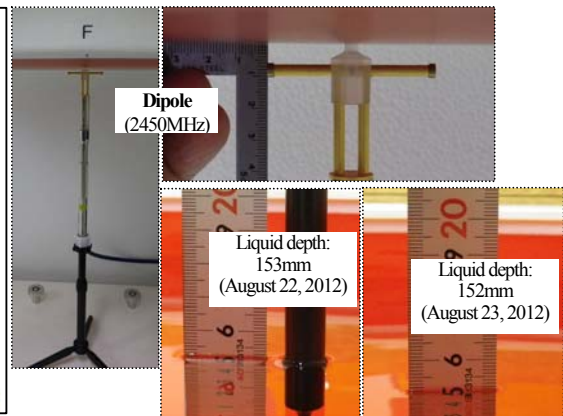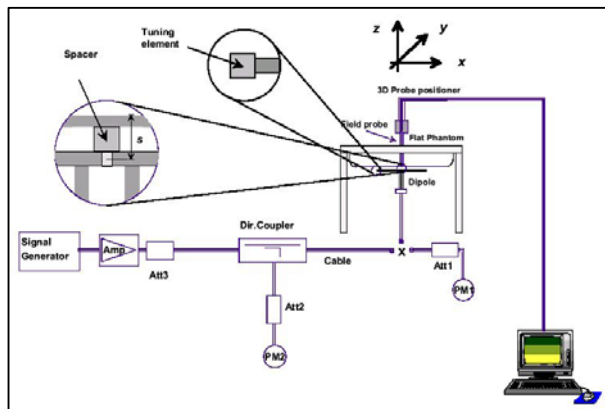


Test setup for the system performance check

Appendix 3-9: System check measurement data**(Date: August 22, 2012) 2450MHz System check (Body tissue) / Forward conducted power: 250mW****EUT: Dipole 2450 MHz; Type: D2450V2; Serial: 822****Communication System: CW; Frequency: 2450 MHz; Crest Factor: 1.0****Medium: M2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³**

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
 - Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
 - Phantom: ELI4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Area Scan:60x60,15 (5x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 19.1 mW/g**Area Scan:60x60,15 (41x41x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 19.9 mW/g**Z Scan:160,5 (1x1x33):** Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 19.7 mW/g**Zoom Scan:30x30x30,5 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 100.5 V/m; Power Drift = 0.072 dB, Maximum value of SAR (measured) = 19.7 mW/g

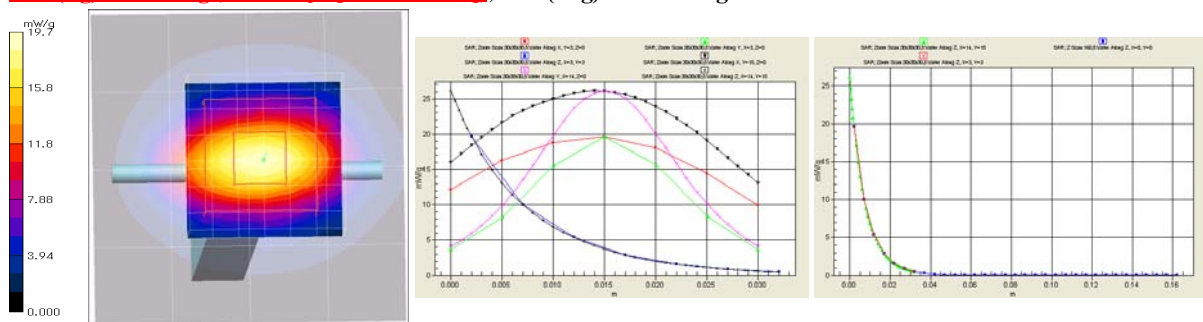Peak SAR (extrapolated) = 26.1 W/kg (-3.6%, vs.speag-cal.=27.1W/kg)**SAR(1 g) = 13 mW/g (-1.5%, vs.speag-cal.=13.2 mW/g); SAR(10 g) = 6.14 mW/g**


Remarks: * Date tested: 2012/08/22; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
 * liquid depth: 153mm; Position: distance of dipole to phantom: 8mm (10mm to liquid); ambient: 24.4 deg.C. / 46 %RH,
 * liquid temperature: 23.9(start)/23.8(end)/23.3(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

(Date: August 23, 2012) 2450MHz System check (Body tissue) / Forward conducted power: 250mW**EUT: Dipole 2450 MHz; Type: D2450V2; Serial: 822****Communication System: CW; Frequency: 2450 MHz; Crest Factor: 1.0****Medium: M2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³**

DASY4 Configuration: - Probe: EX3DV4 - SN3679; ConvF(6.77, 6.77, 6.77); Calibrated: 2012/06/21
 - Sensor-Surface: 2mm (Mechanical Surface Detection) - Electronics: DAE4 Sn626; Calibrated: 2012/02/15
 - Phantom: ELI4.0; Type: QDOVA001BA; Serial: 1059; Phantom section: Flat Section
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 184

Area Scan:60x60,15 (5x5x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 19.3 mW/g**Area Scan:60x60,15 (41x41x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (interpolated) = 19.5 mW/g**Z Scan:160,5 (1x1x33):** Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (interpolated) = 19.5 mW/g**Zoom Scan:30x30x30,5 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm;

Reference Value = 100.4 V/m; Power Drift = 0.028 dB, Maximum value of SAR (interpolated) = 19.5 mW/g

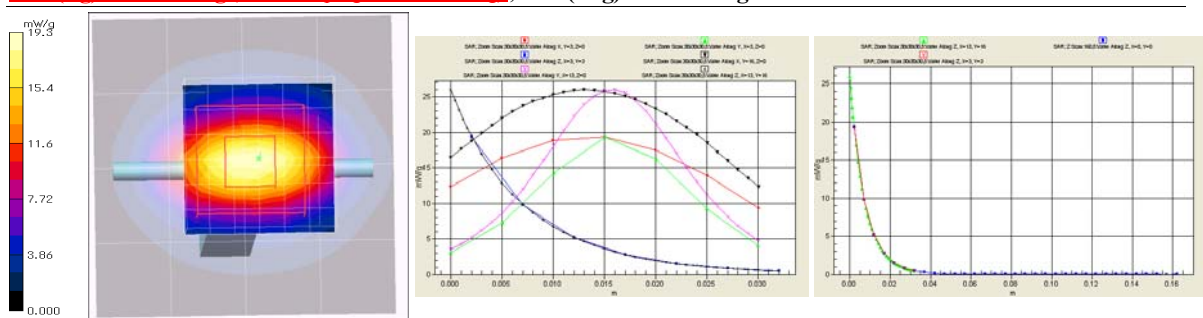Peak SAR (extrapolated) = 26.0 W/kg (-3.9%, vs.speag-cal.=27.1W/kg)**SAR(1 g) = 12.8 mW/g (-3.0%, vs.speag-cal.=13.2 mW/g); SAR(10 g) = 6.05 mW/g**

Remarks: * Date tested: 2012/08/23; Tested by: Hiroshi Naka; Tested place: No.7 shielded room,
 * liquid depth: 152mm; Position: distance of dipole to phantom: 8mm (10mm to liquid); ambient: 24.3 deg.C. / 52 %RH,
 * liquid temperature: 23.5(start)/23.4(end)/23.1(in check) deg.C.; * White cubic: zoom scan area, Red cubic: big=SAR(10g)/small=SAR(1g)

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumioka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400 / Facsimile: +81 463 50 6401

Appendix 3-10: System check uncertainty

Uncertainty of system validation (Body tissue, conductivity& permittivity tolerance: $\leq \pm 5\%$, CW) (v04)	Under 3GHz (v04)	
	1g SAR	10g SAR
Combined measurement uncertainty of the measurement system (k=1)	$\pm 9.5\%$	$\pm 9.2\%$
Expanded uncertainty (k=2)	$\pm 19.0\%$	$\pm 18.4\%$

	Error Description (Under 3GHz) (v04)	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g) (std. uncertainty)	ui (10g) (std. uncertainty)	Vi, veff
A	Measurement System								
1	Probe Calibration Error(2.45GHz $\pm$ 100MHz)	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	∞
2	Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
3	Hemispherical isotropy (*flat phantom, $<5^\circ$)	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	∞
4	Boundary effects	$\pm 1.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.8\%$	$\pm 0.8\%$	∞
5	Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
6	System detection limit	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
7	Response Time Error ($<5\text{ms}/100\text{ms}$ wait)	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
8	Integration Time Error (CW)	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
9	System readout electronics (DAE)	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
10	RF ambient conditions-noise [R0]	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
11	RF ambient conditions-reflections [R0]	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
12	Probe positioner mechanical tolerance	$\pm 1.1\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
13	Probe positioning with respect to phantom shell	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
14	Max.SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
B	Dipole								
15	Dipole to liquid distance(10mm $\pm$ 0.2mm, $<2\text{deg.}$)	$\pm 2.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
16	Drift of output power (measured, $<0.2\text{dB}$)	$\pm 2.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.4\%$	$\pm 1.4\%$	∞
C	Phantom and Setup								
17	Phantom uncertainty	$\pm 2.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
18	Liquid conductivity (target) ($\leq 5\%$)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
19	Liquid conductivity (meas.)	$\pm 2.9\%$	Normal	1	0.64	0.43	$\pm 1.9\%$	$\pm 1.2\%$	3
20	Liquid permittivity (target) ($\leq 5\%$)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
21	Liquid permittivity (meas.)	$\pm 2.9\%$	Normal	1	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	3
	Combined Standard Uncertainty						$\pm 9.5\%$	$\pm 9.2\%$	7711
	Expanded Uncertainty (k=2)						$\pm 19.0\%$	$\pm 18.4\%$	

*. This measurement uncertainty budget is suggested by IEEE 1528 and determined by Schmid & Partner Engineering AG.[6]