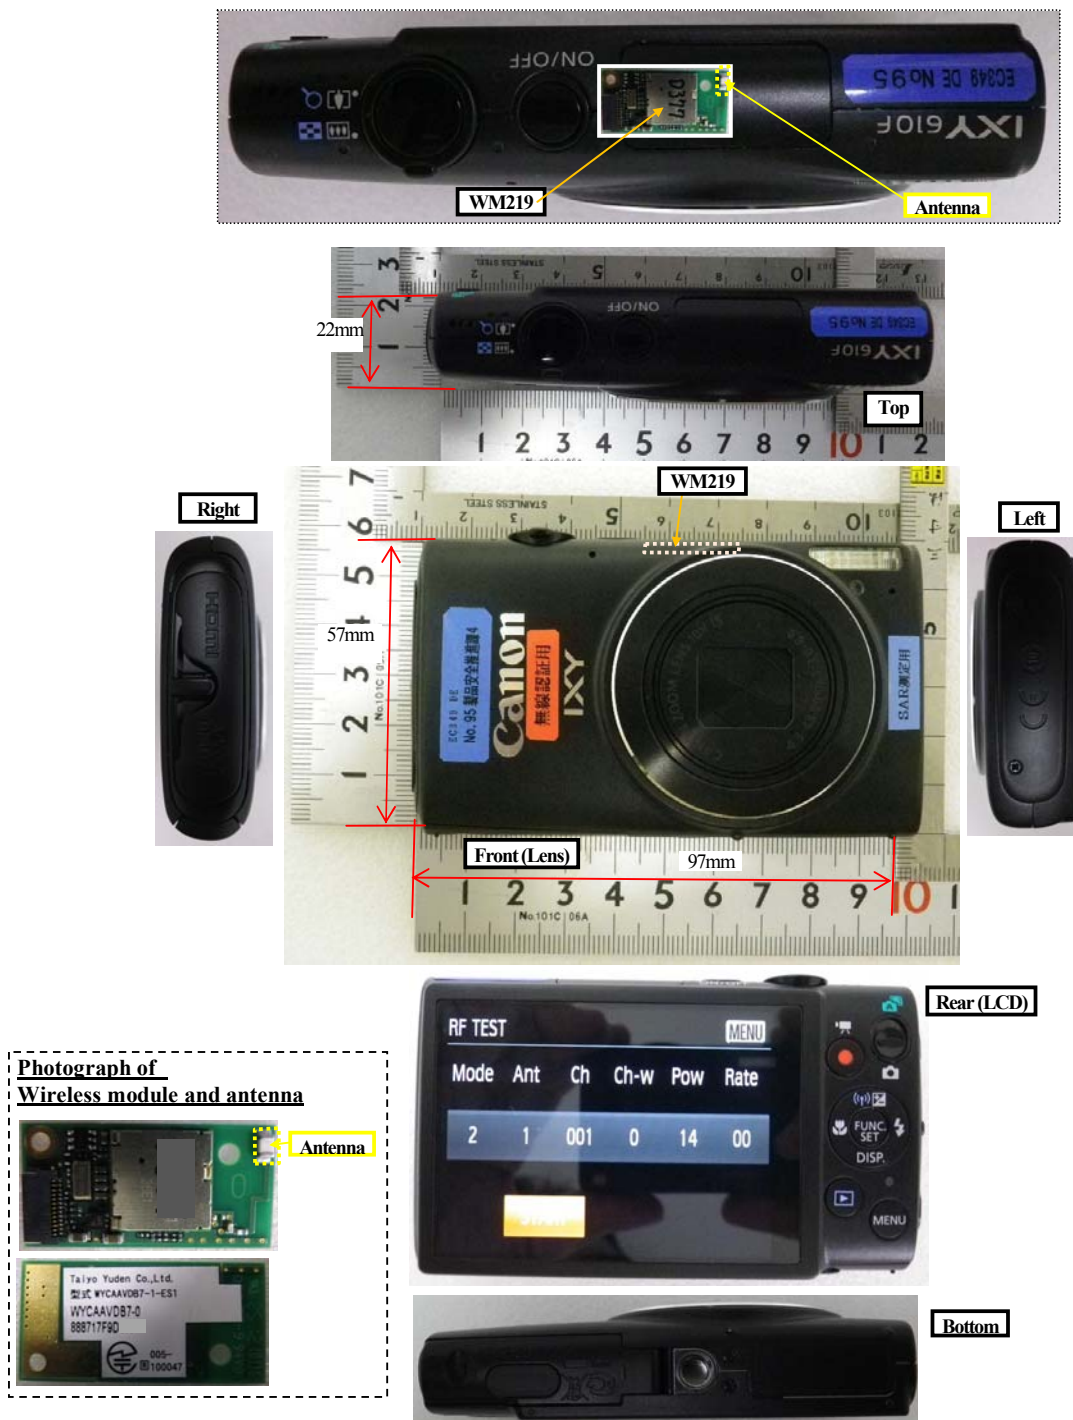
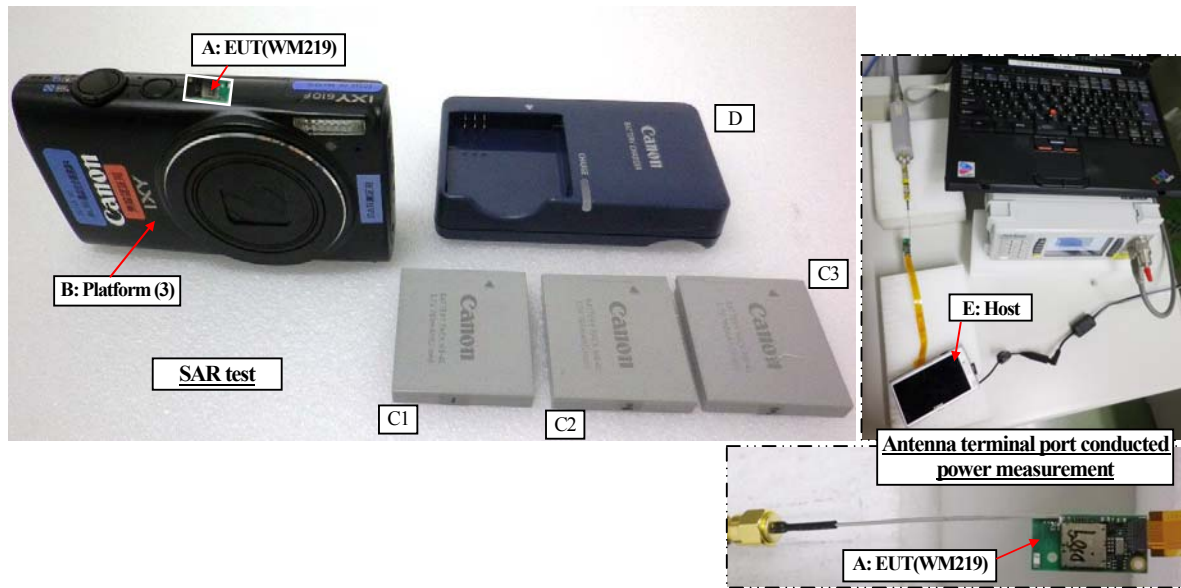


APPENDIX 1: Photographs of EUT and SAR test setup

Appendix 1-1: Photograph of Platform (3)-Digital camera (3) (model: PC1897) and antenna position



Appendix 1-2: EUT and support equipment



Description of EUT and Support Equipment










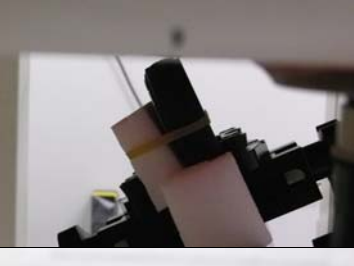








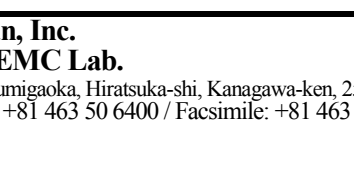
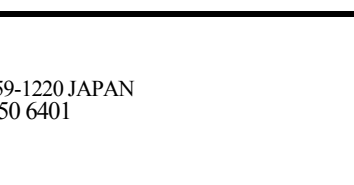

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Wireless Module	WM219	D389	Mitsumi	EUT.
B	Digital Camera (3)	PC1897	95	Canon	Platform (3).
C1	Battery Pack for Digital camera (3) DC3.7V, 760mAh, 2.9Wh (Li-ion)	NB-4L	01	Canon	Accessory of platform (3), Battery No. #1.
C2			02		Accessory of platform (3), Battery No. #2.
C3			03		Accessory of platform (3), Battery No. #3.
D	Battery Charger for Battery Pack: NB-4L	CB-2LV	01	Canon	Support equipment.
*. The following equipment was used for the antenna terminal port conducted power measurement.					
E	Digital Camera (Host)	PC1739	431030032124	Canon	Support equipment.
-	DC Coupler	DR-90	-	Canon	Support equipment. With DC cable: 0.15m, Unshielded.
-	AC Adaptor	CA-DC10N	-	Canon	Support equipment. With DC cable: 1.9m, Unshielded. With AC cable: 1.9m, Unshielded.

<Platform type of EUT and SAR accessory>




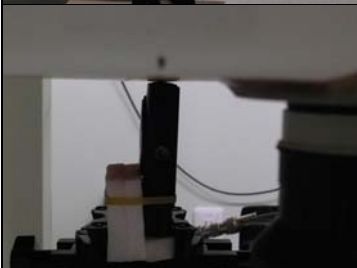





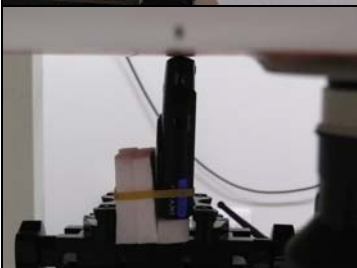
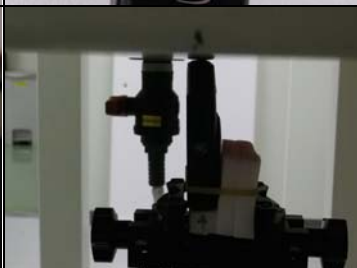

*. The EUT has the following platforms.

Platform No.	Platform type	Model	SAR accessory	Battery option
Platform (1)	Digital camera (1)	PC1953	none	Single (Model: NB-11L, DC3.6V, 680mAh, 2.5Wh (Li-ion))
Platform (2)	Digital camera (2)	PC1907	none	Single (Model: NB-9L, DC3.5V, 870mAh, 3.1Wh (Li-ion))
Platform (3)	Digital camera (3)	PC1897	none	Single (Model: NB-4L, DC3.7V, 760mAh, 2.9Wh (Li-ion))

Appendix 1-3: Photograph of test setup / Platform (3) - Digital camera (3)

Position	Setup photographs		
Top (Touch) Worst position			
			
Top-rear (Touch)			
			
Rear (LCD) (Touch)			
			
Front (Lens) (Touch)			

Appendix 1-3: Photograph of test setup / Platform (3) - Digital camera (3) (cont'd)

Position	Setup photographs		
Left (Touch)			
			
Right (Touch)			
			
Bottom (Touch)	