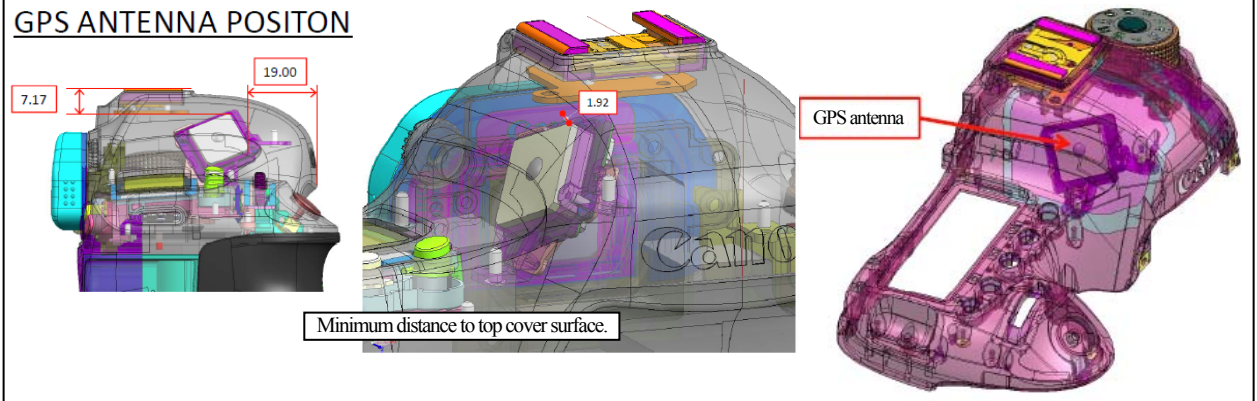


* The size on a photograph is a size actually measured on platform(1).
* **Size of Platform(1) (DS126401):**
(W×D×H)
144.5 × 71.1 × 110.5 mm

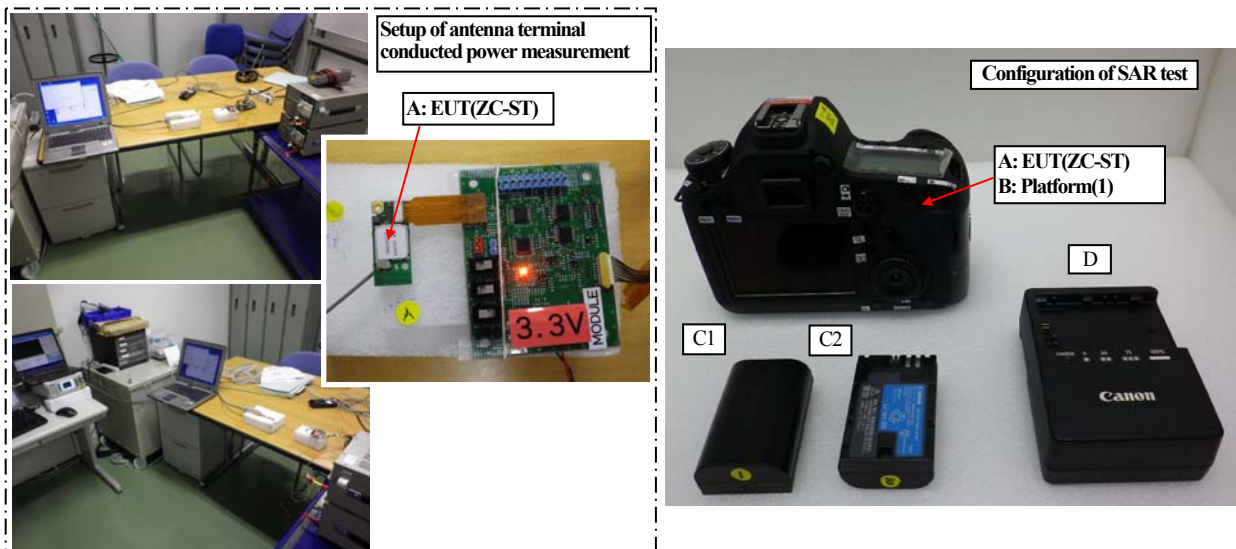
Appendix 1-2: Difference of Platform(1) and Platform(2)

Platform No.	Platform type	Model	Difference of each platform	SAR accessory	Battery option
Platform(1)	Digital camera(1)	DS126401	Platform type (1); with GPS module.	none	LP-E6 (DC7.2V, 1800mAh)
Platform(2)	Digital camera(2)	DS126402	Platform type (1); without GPS module	none	LP-E6 (DC7.2V, 1800mAh)

- *. The structure of platform(1) and platform(2) is same. A difference is the existence of a GPS module.
*. An integral-type GPS module and antenna are located in the place of the following figure.



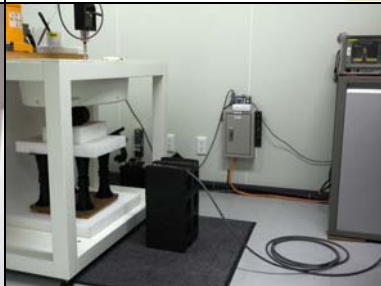
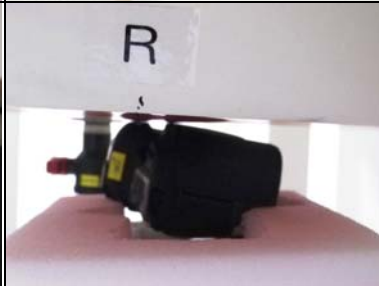
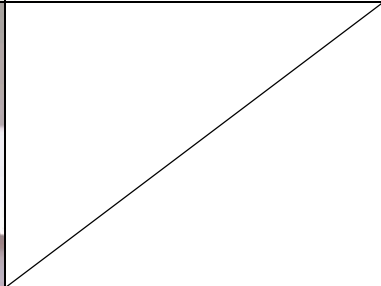
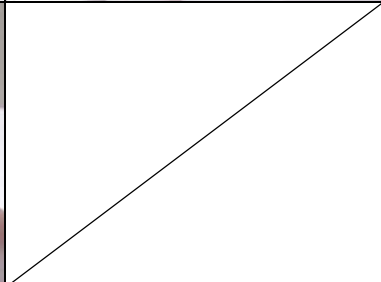
Appendix 1-3: EUT and support equipment



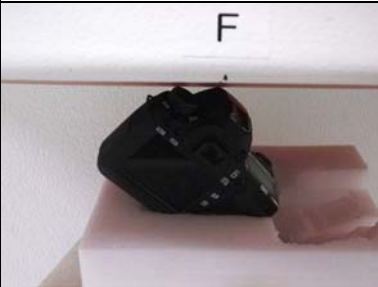
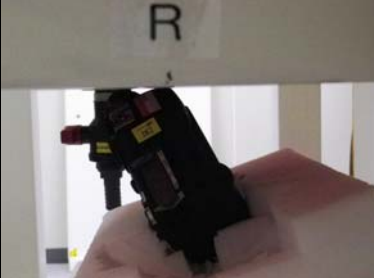
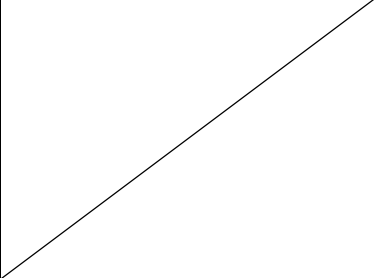
Description of EUT and Support Equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Wireless Module	ZC-ST	ES40197	Canon	EUT.
B	Digital Camera (1)	DS126401	559	Canon	Platform (1).
C1	Li-ion Battery (Digital camera(1))	LP-E6	01	Canon	Accessory of platform(1), Battery No. #1.
C2	DC7.2V, 1800mAh, 13Wh		02		Accessory of platform(1), Battery No. #2.
D	Battery Charger	LC-E6	YDAC	Canon	Support equipment.

Appendix 1-4: Photograph of test setup

Position	Setup photographs		
Top-left (Touch)			
			
Front (Lens) (Touch)			
			
Front-left (Touch)			
			

Appendix 1-4: Photograph of test setup (cont'd)

Position	Setup photographs		
Additional test Top-left-front (ch.6) (Touch) Worst position			
			
Top-left-front (ch.1) (Touch) Worst position			
Top-left-front (ch.11) (Touch) Worst position			