



# RADIO TEST REPORT

**Test Report No.: 32IE0081-SH-02-C**

**Applicant** : Canon Inc.  
**Type of Equipment** : Wireless Module  
**Model No.** : WM222  
**FCC ID** : AZD222  
**Test regulation** : FCC Part15 Subpart C: 2012  
**Test result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

**Date of test:** August 20 to 29, 2012

**Tested by:**

*T. Arai*

Tatsuya Arai  
Engineer of WiSE Japan,  
UL Verification Service

**Approved by :**

*T. Imamura*

Toyokazu Imamura  
Leader of WiSE Japan,  
UL Verification Service

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".



**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN  
Telephone : +81 463 50 6400  
Facsimile : +81 463 50 6401

13-EM-F0429

**Contents**

|  | <b><u>Page</u></b> |
|--|--------------------|
| <b>SECTION 1: Customer information .....</b>                           | <b>4</b>           |
| <b>SECTION 2: Equipment under test (E.U.T.) .....</b>                  | <b>4</b>           |
| <b>SECTION 3: Test specification, procedures &amp; results .....</b>   | <b>5</b>           |
| <b>SECTION 4: Operation of E.U.T. during testing.....</b>              | <b>8</b>           |
| <b>SECTION 5: Conducted emission .....</b>                             | <b>9</b>           |
| <b>SECTION 6: Radiated emission .....</b>                              | <b>10</b>          |
| <b>SECTION 7: Out of band emissions (Antenna port conducted) .....</b> | <b>12</b>          |
| <b>SECTION 8: 6dB bandwidth &amp; Occupied bandwidth (99%).....</b>    | <b>12</b>          |
| <b>SECTION 9: Maximum peak output power.....</b>                       | <b>12</b>          |
| <b>SECTION 10: Peak power density .....</b>                            | <b>12</b>          |
| <b>Contents of APPENDIXES.....</b>                                     | <b>13</b>          |
| <b>APPENDIX 1: Data of Radio tests.....</b>                            | <b>14</b>          |
| <b>APPENDIX 2: Test instruments .....</b>                              | <b>106</b>         |
| <b>APPENDIX 3: Photographs of test setup.....</b>                      | <b>107</b>         |

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



---

## **SECTION 1: Customer information**

Company Name : Canon Inc.  
Address : 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, 146-8501 Japan  
Telephone Number : +81-3-3757-6218  
Facsimile Number : +81-3-3757-8431  
Contact Person : Ryoji Kon

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Wireless Module  
Model Number : WM222  
Serial Number : 34F  
Rating : DC3.3V  
Country of Mass-production : Philippines  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Receipt Date of Sample : August 6, 2012  
Modification of EUT : No modification by the test lab.

### **2.2 Product description**

Model: WM222 (referred to as the EUT in this report) is a Wireless Module.

Clock frequency(ies) in the system : 32kHz, 38.4MHz

#### <Radio part>

Equipment type : Transceiver  
Frequency of operation : 2412-2462MHz (IEEE 802.11b, 11g, 11n-HT20)  
2422-2452MHz (IEEE 802.11n-HT40)  
Bandwidth : 20MHz (IEEE 802.11b, 11g, 11n-HT20), 40MHz (IEEE 802.11n-HT40)  
Channel spacing : 5MHz  
Type of modulation : DSSS (IEEE 802.11b), OFDM (IEEE 802.11g/n)  
Antenna type : Monopole type chip  
Antenna connector type : Microwave coaxial (MURATA MM8030-2610)  
Antenna gain : -0.94 dBi  
ITU code : D1D, G1D  
Operation temperature range : -20 to +55 deg.C

#### FCC 15.31 (e) / 212

The module is constantly provided the stable voltage from the host device regardless of input voltage. Therefore, this EUT complies with the requirement.

#### FCC 15.203 / 212

The antenna is not removable from the EUT. Therefore, the equipment complies with the antenna requirement.  
The antenna connector is a unique type and not used by end user.

---

## **UL Japan, Inc.**

### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test specification**

Test specification : FCC Part 15 Subpart C: 2012, final revised on August 13, 2012 and effective September 12, 2012  
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
 Section 15.207 Conducted limits  
 Section 15.209 Radiated emission limits, general requirements  
 Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,  
 and 5725-5850MHz

\* The revision on August 13, 2012 does not affect the test specification applied to the EUT.

### **3.2 Procedures & Results**

| Item   | Test Procedure   | Specification                   | Remarks              | Deviation | Worst Margin  | Results  |
|--|--|---------------------------------|----------------------|-----------|---|----------|
| Conducted emission                           | ANSI C63.4:2009<br>7. AC powerline conducted emission measurements | FCC 15.207                      | -                    | N/A       | 16.8dB<br>Freq.: 0.21700MHz<br>Detector: Average<br>Phase: N<br>Mode: Tx 2412MHz,<br>IEEE 802.11g                   | Complied |
| 6dB bandwidth                                | ANSI C63.4:2009<br>13. Measurement of intentional radiators        | FCC 15.247 (a)(2)               | Conducted            | N/A       | * See data  | Complied |
| Maximum peak output power                    | ANSI C63.4:2009<br>13. Measurement of intentional radiators        | FCC 15.247 (b)(3)               | Conducted            | N/A       |   | Complied |
| Out of band emission & Restricted band edges | ANSI C63.4:2009<br>13. Measurement of intentional radiators        | FCC 15.109, 15.247 (d) & 15.209 | Conducted / Radiated | N/A       | 1.4dB<br>Freq.: 336.008MHz<br>Detector: Quasi-Peak<br>Polarization: Horizontal<br>Mode: Tx 2412MHz,<br>IEEE 802.11g | Complied |
| Power density                                | ANSI C63.4:2009<br>13. Measurement of intentional radiators        | FCC 15.247 (e)                  | Conducted            | N/A       | * See data  | Complied |

Note: UL Japan's EMI Work Procedures No.13-EM-W0420 and 13-EM-W0422.

These tests were also referred to "Guidance on Measurement for Digital Transmission Systems Section15.247".

### **3.3 Addition to standard**

| Item                     | Test Procedure   | Specification | Remarks   | Worst Margin | Results |
|--------------------------|--|---------------|-----------|--------------|---------|
| Occupied bandwidth (99%) | ANSI C63.4:2009<br>13. Measurement of intentional radiators, RSS-Gen 4.6.1 | -             | Conducted | -            | -       |

Note: UL Japan's Work Procedures No. 13-EM-W0420 and 13-EM-W0422

\* Other than above, no addition, exclusion nor deviation has been made from the standard.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

| Item  | Frequency range | No.1 SAC <sup>*1</sup> /SR <sup>*2</sup><br>(±) | No.2 SAC/SR<br>(±) | No.3 SAC/SR<br>(±) |
|---|-----------------|---|--------------------|--------------------|
| <b>Conducted emission<br/>(AC Mains) LISN</b>           | 150kHz-30MHz    | 3.6 dB  | 3.6 dB             | 3.5 dB             |
| <b>Radiated emission<br/>(Measurement distance: 3m)</b> | 9kHz-30MHz      | 3.7 dB  | 3.7 dB             | 3.6 dB             |
|   | 30MHz-300MHz    | 4.9 dB  | 5.1 dB             | 4.9 dB             |
|   | 300MHz-1GHz     | 5.0 dB  | 5.2 dB             | 4.9 dB             |
|   | 1GHz-15GHz      | 4.8 dB  | 4.8 dB             | 4.9 dB             |
| <b>Radiated emission<br/>(Measurement distance: 1m)</b> | 15GHz-18GHz     | 5.6 dB  | 5.6 dB             | 5.6 dB             |
|   | 18GHz-40GHz     | 4.6 dB  | 4.3 dB             | 4.4 dB             |

\*1: SAC=Semi-Anechoic Chamber

\*2: SR= Shielded Room is applied besides radiated emission

#### Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

#### Radiated emission test

The data listed in this test report meets the limits unless the uncertainty is taken into consideration.

#### Antenna port conducted test

Power measurement uncertainty above 1GHz for this test was: (±) 1.5dB

Spurious emission (Conducted) measurement (below 1GHz) uncertainty for this test was: (±) 1.7dB

Spurious emission (Conducted) measurement (1G-3GHz) uncertainty for this test was: (±) 2.3dB

Spurious emission (Conducted) measurement (3G-18GHz) uncertainty for this test was: (±) 3.0dB

Spurious emission (Conducted) measurement (18G-26.5GHz) uncertainty for this test was: (±) 2.9dB

Bandwidth measurement uncertainty for this test was: (±) 5.4%

### UL Japan, Inc.

#### Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

|  | FCC<br>Registration<br>No. | IC<br>Registration<br>No. | Width x Depth x<br>Height (m) | Size of reference<br>ground plane (m) /<br>horizontal<br>conducting plane | Maximum<br>measurement<br>distance |
|--|----------------------------|---------------------------|-------------------------------|---|------------------------------------|
| <input type="checkbox"/> No.1 semi-anechoic chamber            | 697847                     | 2973D-1                   | 20.6 x 11.3 x 7.65            | 20.6 x 11.3   | 10m                                |
| <input checked="" type="checkbox"/> No.2 semi-anechoic chamber | 697847                     | 2973D-2                   | 20.6 x 11.3 x 7.65            | 20.6 x 11.3   | 10m                                |
| <input checked="" type="checkbox"/> No.3 semi-anechoic chamber | 697847                     | 2973D-3                   | 12.7 x 7.7 x 5.35             | 12.7 x 7.7  | 5m                                 |
| <input type="checkbox"/> No.4 semi-anechoic chamber            | -                          | -                         | 8.1 x 5.1 x 3.55              | 8.1 x 5.1   | -                                  |
| <input type="checkbox"/> No.1 shielded room                    | -                          | -                         | 6.8 x 4.1 x 2.7               | 6.8 x 4.1   | -                                  |
| <input type="checkbox"/> No.2 shielded room                    | -                          | -                         | 6.8 x 4.1 x 2.7               | 6.8 x 4.1   | -                                  |
| <input checked="" type="checkbox"/> No.3 shielded room         | -                          | -                         | 6.3 x 4.7 x 2.7               | 6.3 x 4.7   | -                                  |
| <input type="checkbox"/> No.4 shielded room                    | -                          | -                         | 4.4 x 4.7 x 2.7               | 4.4 x 4.7   | -                                  |
| <input checked="" type="checkbox"/> No.5 shielded room         | -                          | -                         | 7.8 x 6.4 x 2.7               | 7.8 x 6.4   | -                                  |
| <input type="checkbox"/> No.6 shielded room                    | -                          | -                         | 7.8 x 6.4 x 2.7               | 7.8 x 6.4   | -                                  |

### 3.6 Test setup, Data of EMI & Test instruments

Refer to APPENDIX 3 to 3.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## SECTION 4: Operation of E.U.T. during testing


### 4.1 Operating mode

| Test item   | Mode                         | Tested frequency             | Power setting *1)          | Worst data rate *2) |
|---|------------------------------|------------------------------|----------------------------|---------------------|
| Conducted emission<br>Radiated emission<br>(below 1GHz) *3) | Transmitting IEEE 802.11g    | 2412MHz                      | Max.: 12dBm                | 6Mbps, PN9          |
|   |                              |                              | Min.: 10dBm                |                     |
| Other items   | Transmitting IEEE 802.11b    | 2412MHz, 2437MHz,<br>2462MHz | Max.: 14dBm<br>Min.: 11dBm | 1Mbps, PN9          |
|   | Transmitting IEEE 802.11g    | 2412MHz, 2437MHz,<br>2462MHz | Max.: 12dBm<br>Min.: 10dBm | 6Mbps, PN9          |
|   | Transmitting IEEE 802.11n-20 | 2412MHz, 2437MHz,<br>2462MHz | Max.: 12dBm<br>Min.: 10dBm | MCS3, PN9           |
|   | Transmitting IEEE 802.11n-40 | 2422MHz, 2437MHz,<br>2452MHz | Max.: 11dBm<br>Min.: 9dBm  | MCS5, PN9           |

\*1) The actual output power differs from the setting value. Based on the specifications, the maximum and minimum values are set. Software used for the test: RFTEST ver .14.0  
\*2) The worst condition was determined based on the test result of Maximum Peak Output Power.  
\*3) Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing- Managing Complex Regulatory Approvals - ”of TCB Council Workshop October 2009.

**Justification:** The system was configured in typical fashion (as customer would normally use it) for testing.

### 4.2 Configuration and peripherals

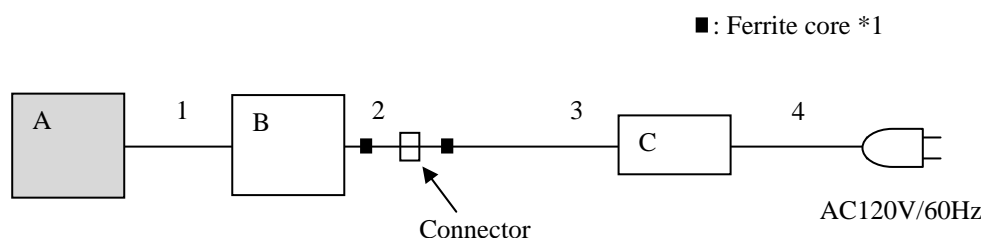

\* Test data was taken under worse case conditions.

#### Description of EUT and support equipment

| No. | Item                  | Model number | Serial number | Manufacturer | Remarks |
|-----|-----------------------|--------------|---------------|--------------|---------|
| A   | Wireless Module       | WM222        | 34F           | Canon        | EUT     |
| B   | Digital Camera        | PC1739       | 431030032124  | Canon        | -       |
| C   | Compact Power Adapter | CA-DC10 N    | 1152          | Canon        | -       |

#### List of cables used

| No. | Cable Name | Length (m) | Shield     |            | Remark |
|-----|------------|------------|------------|------------|--------|
|     |            |            | Cable      | Connector  |        |
| 1   | Jig        | 0.15       | Unshielded | Unshielded | -      |
| 2   | DC         | 0.15       | Unshielded | Unshielded | -      |
| 3   | DC         | 1.9        | Unshielded | Unshielded | -      |
| 4   | AC         | 1.9        | Unshielded | Unshielded | -      |

\*1 The ferrite core was not attached to reduce the noise from the EUT but was used to reduce the noise from Digital Camera. Therefore, that does not affect the emission level of the EUT. Since it was difficult to prepare a cable for Digital Camera to which a ferrite core was not attached, the measurement was performed with the cable with the ferrite core.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## **SECTION 5: Conducted emission**

### **5.1 Operating environment**

Test place : See test data (APPENDIX 1)  
Temperature : See test data (APPENDIX 1)  
Humidity : See test data (APPENDIX 1)

### **5.2 Test configuration**

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 0.8m above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals was aligned and was flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the input power source. All unused 50ohm connectors of the LISN were resistively terminated in 50ohm when not connected to the measuring equipment. Photographs of the set up are shown in APPENDIX 3.

### **5.3 Test conditions**

Frequency range : 0.15 - 30MHz  
EUT position : Table top

### **5.4 Test procedure**

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT via host device within a Shielded room. The EUT was connected to a Line Impedance Stabilization Network (LISN) via host device. An overview sweep with peak detection has been performed. The measurements had been performed with a quasi-peak detector and if required, an average detector. The conducted emission measurements were made with the following detection of the test receiver.

Detection Type : Quasi-Peak/ Average  
IF Bandwidth : 9kHz

### **5.5 Results**

Summary of the test results : Pass  
Refer to APPENDIX 1

---

## **UL Japan, Inc.**

### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 6: Radiated emission**

### **6.1 Operating environment**

Test place : See test data (APPENDIX 1)  
 Temperature : See test data (APPENDIX 1)  
 Humidity : See test data (APPENDIX 1)

### **6.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 0.8m above the conducting ground plane. The rear of EUT was aligned and flushed with rear of tabletop. Photographs of the set up are shown in APPENDIX 3.

### **6.3 Test conditions**

Frequency range : 30MHz to 25GHz  
 EUT position : Table top

### **6.4 Test procedure**

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m (below 15GHz) / 1m (above 15GHz) (Refer to Figure 1). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection.

| Frequency      | 30-1000MHz | 1-25GHz                |                        | 20dBc                      |
|----------------|------------|------------------------|------------------------|----------------------------|
| Detection type | Quasi-Peak | Peak                   | Average *1)            | Peak                       |
| IF Bandwidth   | 120kHz     | RBW: 1MHz<br>VBW: 3MHz | RBW: 1MHz<br>VBW: 10Hz | RBW: 100kHz<br>VBW: 300kHz |

\*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

#### **Worst case:**

| Antenna polarization | Carrier (Band edge) | Spurious   |          |           |          |
|----------------------|---------------------|------------|----------|-----------|----------|
|                      |                     | Below 1GHz | 1-2.8GHz | 2.8-15GHz | 15-25GHz |
| Horizontal           | X                   | Z          | X        | X         | X        |
| Vertical             | Y                   | Z          | Y        | Y         | Y        |

## **UL Japan, Inc.**


### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Figure 1. Antenna angle**

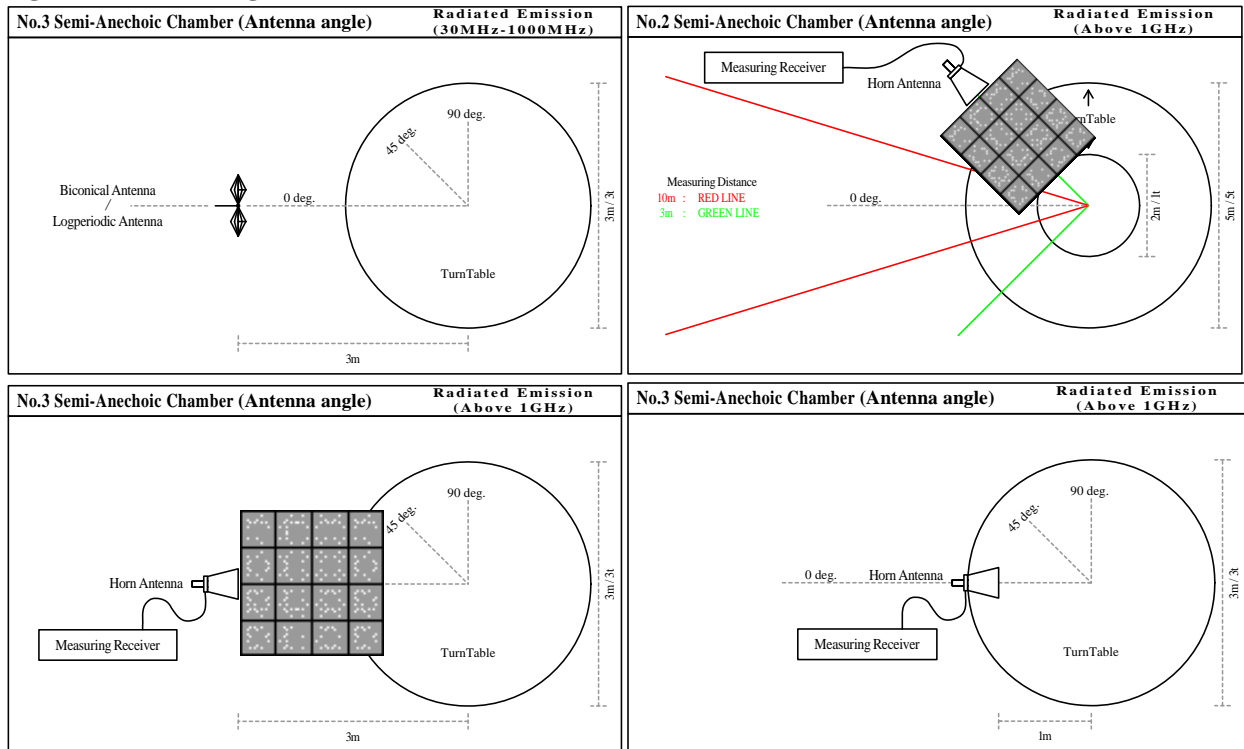

**6.5 Band edge**

Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209 and band edge level at 2400MHz is below the 20dBc. Refer to the data.

**6.6 Results**

Summary of the test results : Pass  
 \* No noise was detected above the 5<sup>th</sup> order harmonics.

Refer to APPENDIX 1

## **SECTION 7: Out of band emissions (Antenna port conducted)**

### **Test procedure**

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=10kHz)

Summary of the test results: Pass

Refer to APPENDIX 1

## **SECTION 8: 6dB bandwidth & Occupied bandwidth (99%)**

### **Test procedure**

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 1

## **SECTION 9: Maximum peak output power**

### **Test procedure**

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Detection type: Peak / Average \*1)

Summary of the test results: Pass

Refer to APPENDIX 1

\*1) Average detector was used only for Reference data of SAR testing.

## **SECTION 10: Peak power density**

### **Test procedure**

The peak power density was measured with a spectrum analyzer connected to the antenna port.

Instrument used : Spectrum Analyzer \*1)

RBW / VBW : 30kHz / 100kHz \*2)

\*1) PSD Option 1 of " Measurement of Digital Transmission Systems Operating under Section 15.247".

\*2) The test was not performed at RBW: 3kHz that was stated in the Regulation. However, the measurement value with RBW: 3kHz is less than the value of RBW: 30kHz and the test data met the limit with RBW: 30kHz.

Summary of the test results: Pass

Refer to APPENDIX 1

---

## **UL Japan, Inc.**

### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **Contents of APPENDIXES**

### **APPENDIX 1: Data of Radio tests**

Conducted emission  
6dB bandwidth  
Maximum peak output power  
Radiated emission  
Spurious emission (Antenna port conducted)  
Peak power density  
Occupied bandwidth

### **APPENDIX 2: Test instruments**

Test instruments

### **APPENDIX 3: Photographs of test setup**

Conducted emission  
Radiated emission  
Pre-check of worst position

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**APPENDIX 1: Data of Radio tests**

**DATA OF CONDUCTED EMISSION TEST**

UL Japan,Inc. Shonan EMC Lab. No.3 Shielded Room  
Date : 2012/08/28


Company : Canon Inc.  
Kind of EUT : Wireless Module  
Model No. : WM222  
Serial No. : 34F

Mode : Tx 11g 2412MHz Power 12dBm  
Job No. : 32IE0081-SH-02  
Power : AC 120V / 60Hz  
Temp./Humi. : 26deg.C. / 58%RH

Remarks : -

Limit1 : FCC 15C (15.207) QP  
Limit2 : FCC 15C (15.207) AV

Engineer : Tatsuya Arai

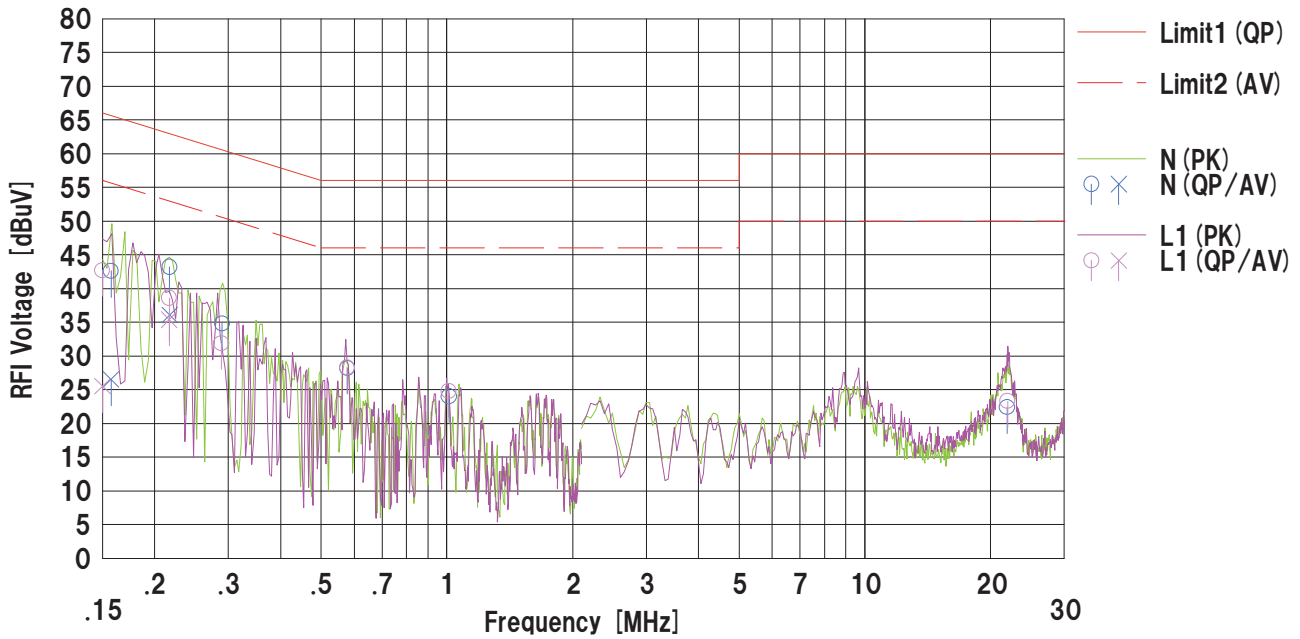

| No. | Freq.<br>[MHz] | Reading        |                | C.Fac<br>[dB] | Results        |                | Limit          |                | Margin       |              | Phase | Comment |
|-----|----------------|----------------|----------------|---------------|----------------|----------------|----------------|----------------|--------------|--------------|-------|---------|
|     |                | <QP><br>[dBuV] | <AV><br>[dBuV] |               | <QP><br>[dBuV] | <AV><br>[dBuV] | <QP><br>[dBuV] | <AV><br>[dBuV] | <QP><br>[dB] | <AV><br>[dB] |       |         |
| 1   | 0.15725        | 29.9           | 13.8           | 12.7          | 42.6           | 26.5           | 65.6           | 55.6           | 23.0         | 29.1         | N     |         |
| 2   | 0.21700        | 30.5           | 23.4           | 12.7          | 43.2           | 36.1           | 62.9           | 52.9           | 19.7         | 16.8         | N     |         |
| 3   | 0.28988        | 22.1           | ---            | 12.7          | 34.8           | ---            | 60.5           | 50.5           | 25.7         | ---          | N     |         |
| 4   | 0.57825        | 15.5           | ---            | 12.7          | 28.2           | ---            | 56.0           | 46.0           | 27.8         | ---          | N     |         |
| 5   | 1.01250        | 11.3           | ---            | 12.7          | 24.0           | ---            | 56.0           | 46.0           | 32.0         | ---          | N     |         |
| 6   | 21.91500       | 8.8            | ---            | 13.6          | 22.4           | ---            | 60.0           | 50.0           | 37.6         | ---          | N     |         |
| 7   | 0.15000        | 30.0           | 12.8           | 12.7          | 42.7           | 25.5           | 66.0           | 56.0           | 23.3         | 30.5         | L1    |         |
| 8   | 0.21650        | 25.9           | 22.7           | 12.7          | 38.6           | 35.4           | 62.9           | 52.9           | 24.3         | 17.5         | L1    |         |
| 9   | 0.28900        | 19.2           | ---            | 12.7          | 31.9           | ---            | 60.5           | 50.5           | 28.6         | ---          | L1    |         |
| 10  | 0.57713        | 15.6           | ---            | 12.7          | 28.3           | ---            | 56.0           | 46.0           | 27.7         | ---          | L1    |         |
| 11  | 1.01025        | 12.1           | ---            | 12.7          | 24.8           | ---            | 56.0           | 46.0           | 31.2         | ---          | L1    |         |
| 12  | 21.94500       | 9.7            | ---            | 13.6          | 23.3           | ---            | 60.0           | 50.0           | 36.7         | ---          | L1    |         |

Calculation:Result [dBuV] =Reading [dBuV] +C.Fac (LISN+Cable+ATT) [dB]  
LISN:SLS-05

# DATA OF CONDUCTED EMISSION TEST

UL Japan,Inc. Shonan EMC Lab. No.3 Shielded Room  
Date : 2012/08/28


Company : Canon Inc.  
Kind of EUT : Wireless Module  
Model No. : WM222  
Serial No. : 34F

Mode : Tx 11g 2412MHz Power 10dBm  
Job No. : 32IE0081-SH-02  
Power : AC 120V / 60Hz  
Temp./Humi. : 26deg.C. / 58%RH

Remarks : -

Limit1 : FCC 15C (15.207) QP  
Limit2 : FCC 15C (15.207) AV

Engineer : Tatsuya Arai

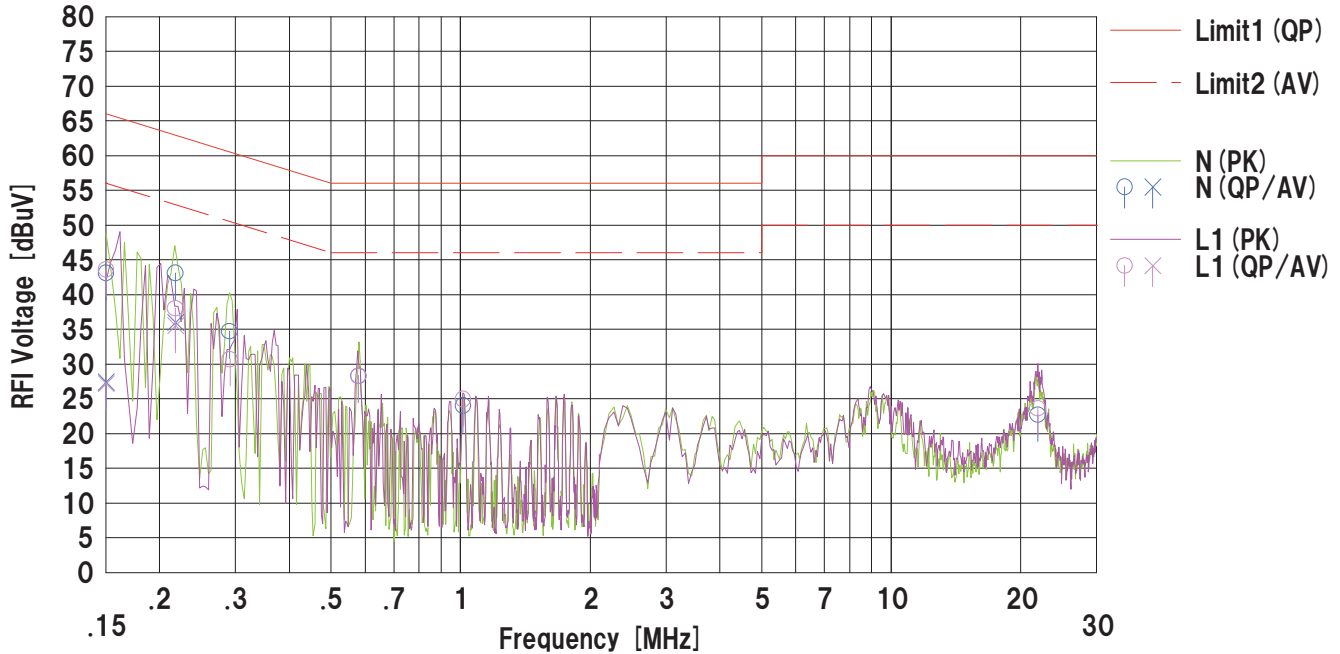


| No. | Freq.<br>[MHz] | Reading        |                | C.Fac<br>[dB] | Results        |                | Limit        |              | Margin |      | Phase | Comment |
|-----|----------------|----------------|----------------|---------------|----------------|----------------|--------------|--------------|--------|------|-------|---------|
|     |                | <QP><br>[dBuV] | <AV><br>[dBuV] |               | <QP><br>[dBuV] | <AV><br>[dBuV] | <QP><br>[dB] | <AV><br>[dB] |        |      |       |         |
| 1   | 0.15018        | 30.4           | 14.7           | 12.7          | 43.1           | 27.4           | 65.9         | 55.9         | 22.8   | 28.5 | N     |         |
| 2   | 0.21775        | 30.4           | 23.3           | 12.7          | 43.1           | 36.0           | 62.9         | 52.9         | 19.8   | 16.9 | N     |         |
| 3   | 0.29075        | 22.0           | ---            | 12.7          | 34.7           | ---            | 60.5         | 50.5         | 25.8   | ---  | N     |         |
| 4   | 0.57975        | 15.6           | ---            | 12.7          | 28.3           | ---            | 56.0         | 46.0         | 27.7   | ---  | N     |         |
| 5   | 1.01400        | 11.3           | ---            | 12.7          | 24.0           | ---            | 56.0         | 46.0         | 32.0   | ---  | N     |         |
| 6   | 2.191900       | 9.1            | ---            | 13.6          | 22.7           | ---            | 60.0         | 50.0         | 37.3   | ---  | N     |         |
| 7   | 0.15018        | 30.9           | 14.5           | 12.7          | 43.6           | 27.2           | 65.9         | 55.9         | 22.3   | 28.7 | L1    |         |
| 8   | 0.21775        | 25.3           | 22.8           | 12.7          | 38.0           | 35.5           | 62.9         | 52.9         | 24.9   | 17.4 | L1    |         |
| 9   | 0.29125        | 18.0           | ---            | 12.7          | 30.7           | ---            | 60.4         | 50.4         | 29.7   | ---  | L1    |         |
| 10  | 0.57975        | 15.6           | ---            | 12.7          | 28.3           | ---            | 56.0         | 46.0         | 27.7   | ---  | L1    |         |
| 11  | 1.01425        | 12.2           | ---            | 12.7          | 24.9           | ---            | 56.0         | 46.0         | 31.1   | ---  | L1    |         |
| 12  | 2.191900       | 10.0           | ---            | 13.6          | 23.6           | ---            | 60.0         | 50.0         | 36.4   | ---  | L1    |         |

Calculation:Result [dBuV] =Reading [dBuV] +C.Fac (LISN+Cable+ATT) [dB]  
LISN:SLS-05

### -6dB Bandwidth

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2412.0000      | 9.974                   | > 0.500        |
| 2437.0000      | 9.927                   | > 0.500        |
| 2462.0000      | 9.932                   | > 0.500        |

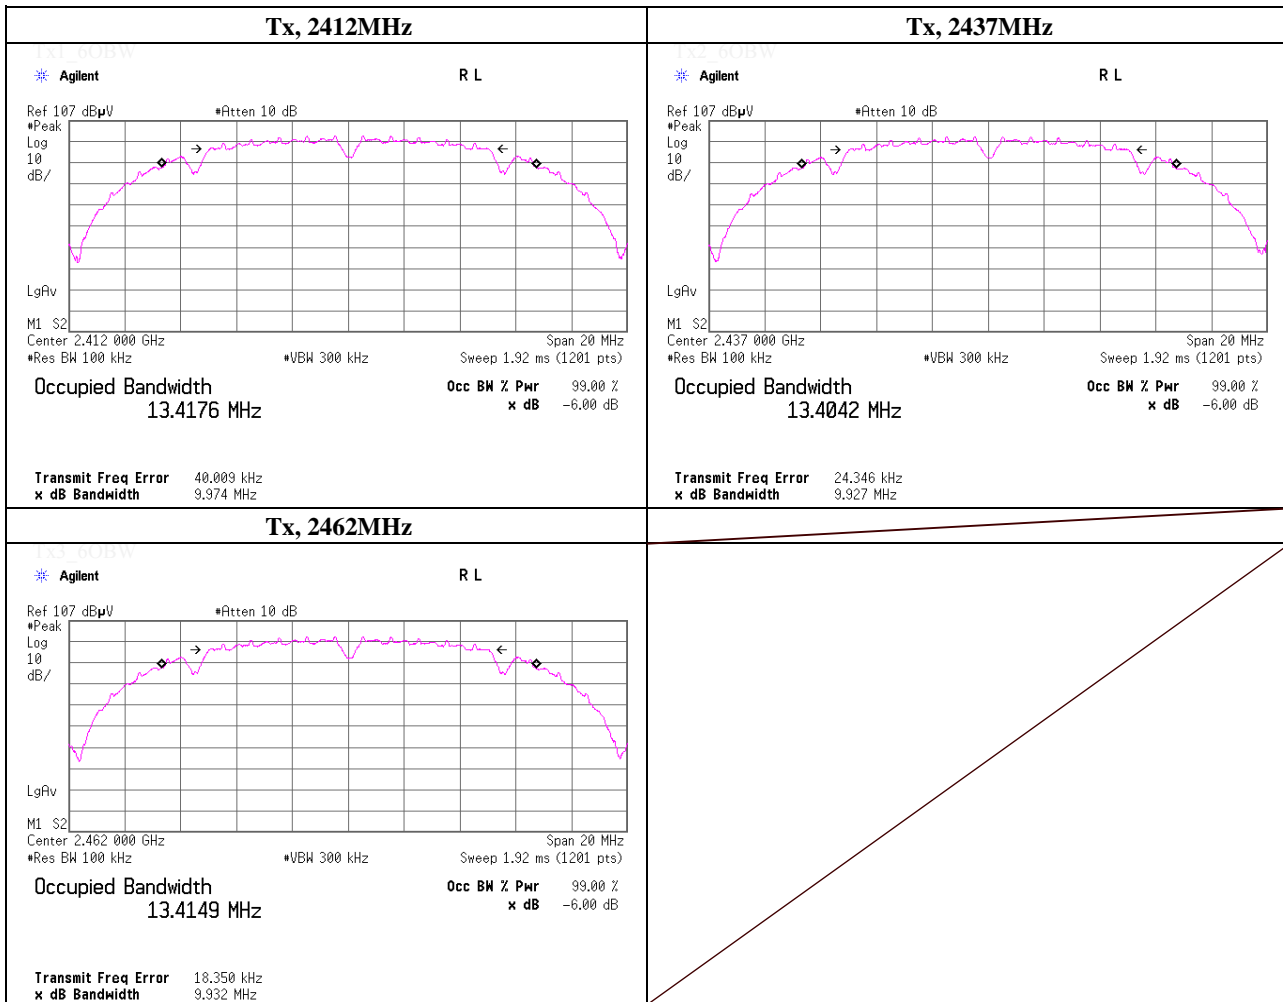

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401



### -6dB Bandwidth

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2412.0000      | 9.930                   | > 0.500        |
| 2437.0000      | 9.936                   | > 0.500        |
| 2462.0000      | 10.003                  | > 0.500        |

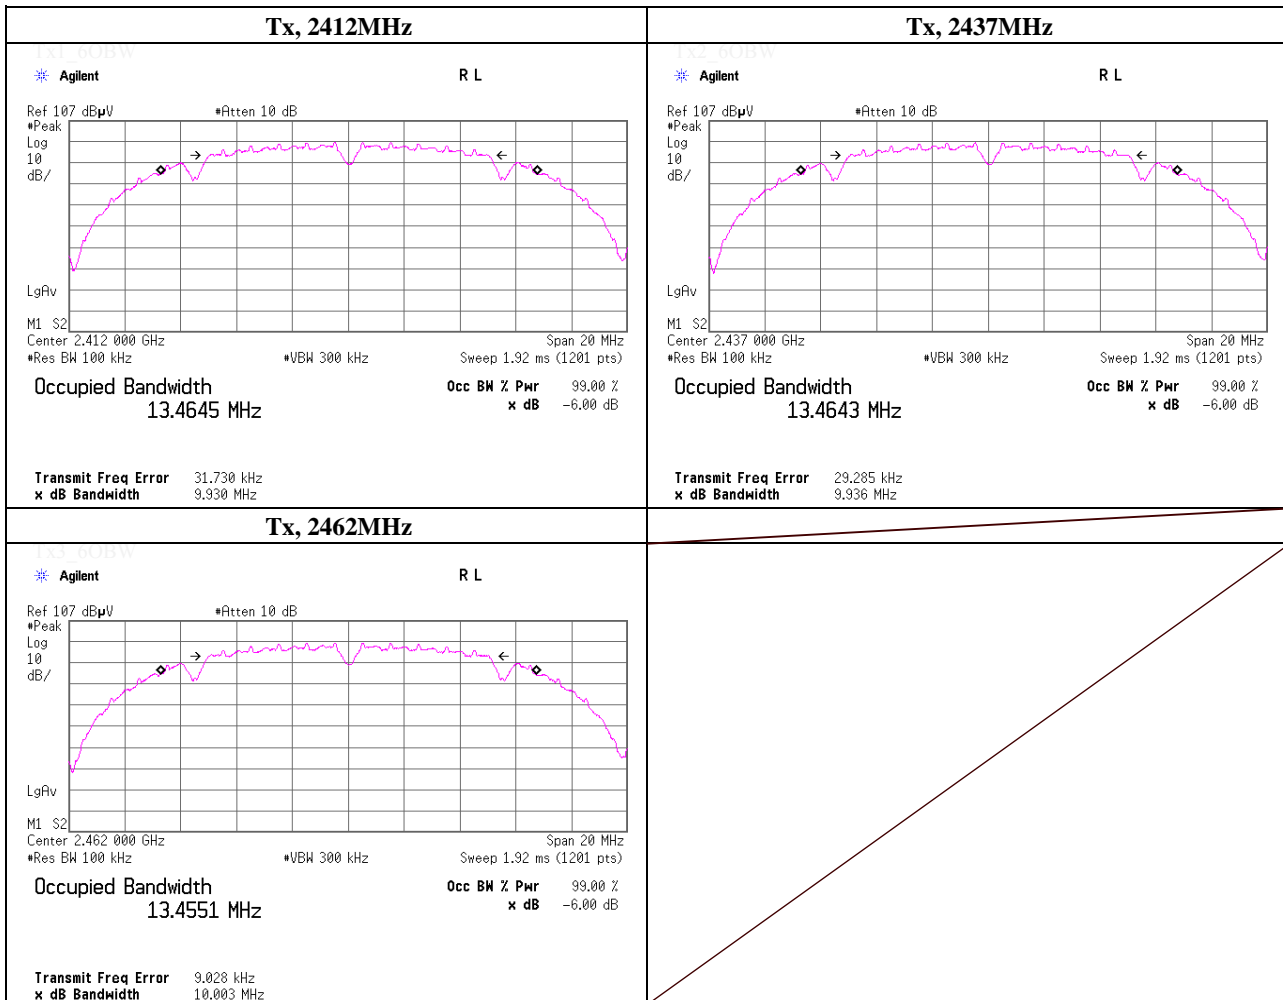

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### -6dB Bandwidth

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2412.0000      | 16.589                  | > 0.500        |
| 2437.0000      | 16.588                  | > 0.500        |
| 2462.0000      | 16.581                  | > 0.500        |

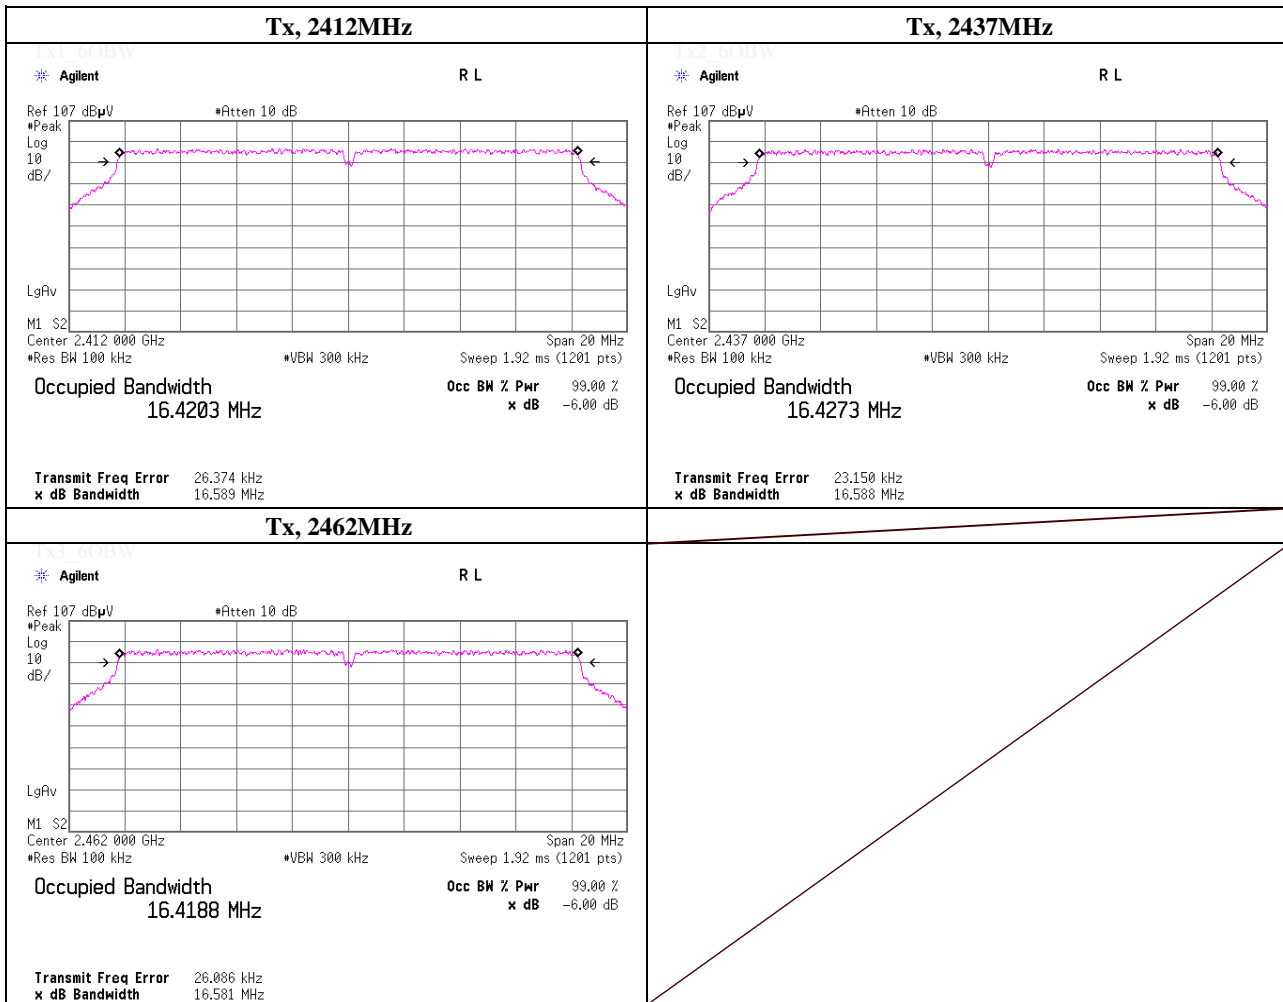

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### -6dB Bandwidth

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2412.0000      | 16.572                  | > 0.500        |
| 2437.0000      | 16.579                  | > 0.500        |
| 2462.0000      | 16.586                  | > 0.500        |

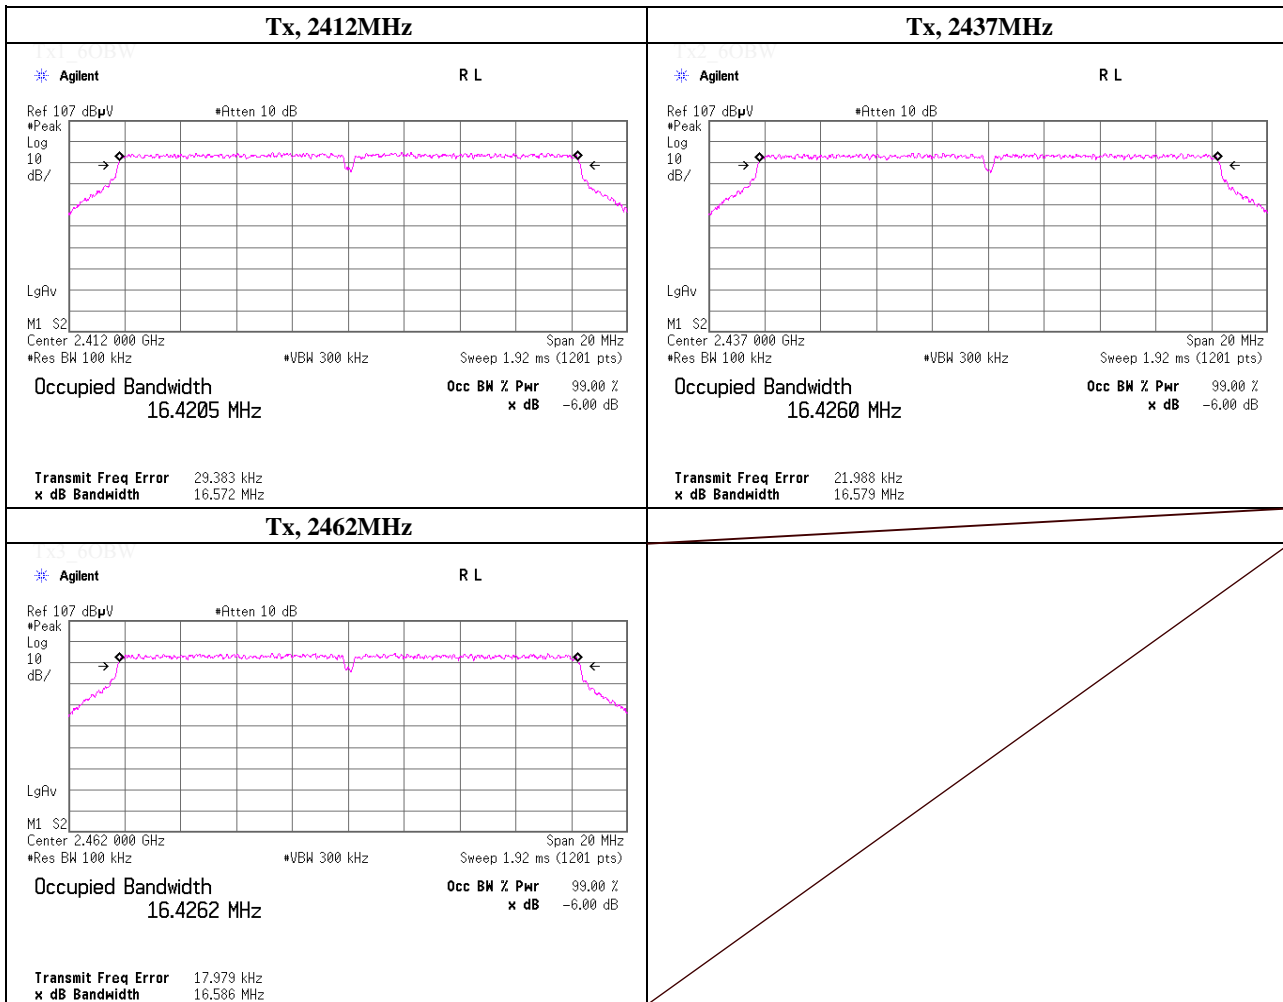

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### -6dB Bandwidth

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2412.0000      | 17.833                  | > 0.500        |
| 2437.0000      | 17.818                  | > 0.500        |
| 2462.0000      | 17.814                  | > 0.500        |

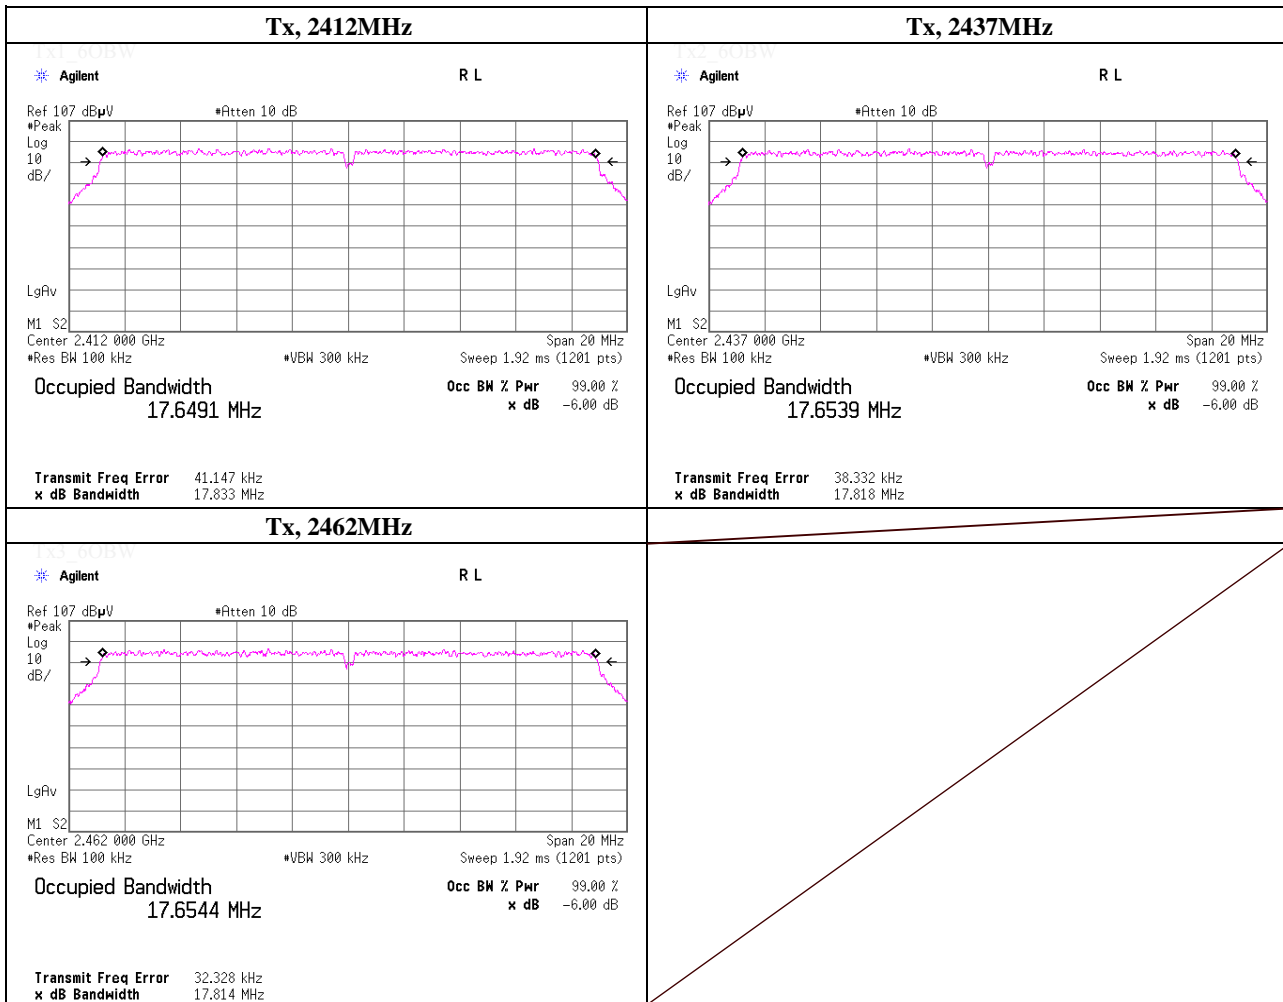

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### -6dB Bandwidth

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2412.0000      | 17.811                  | > 0.500        |
| 2437.0000      | 17.803                  | > 0.500        |
| 2462.0000      | 17.824                  | > 0.500        |

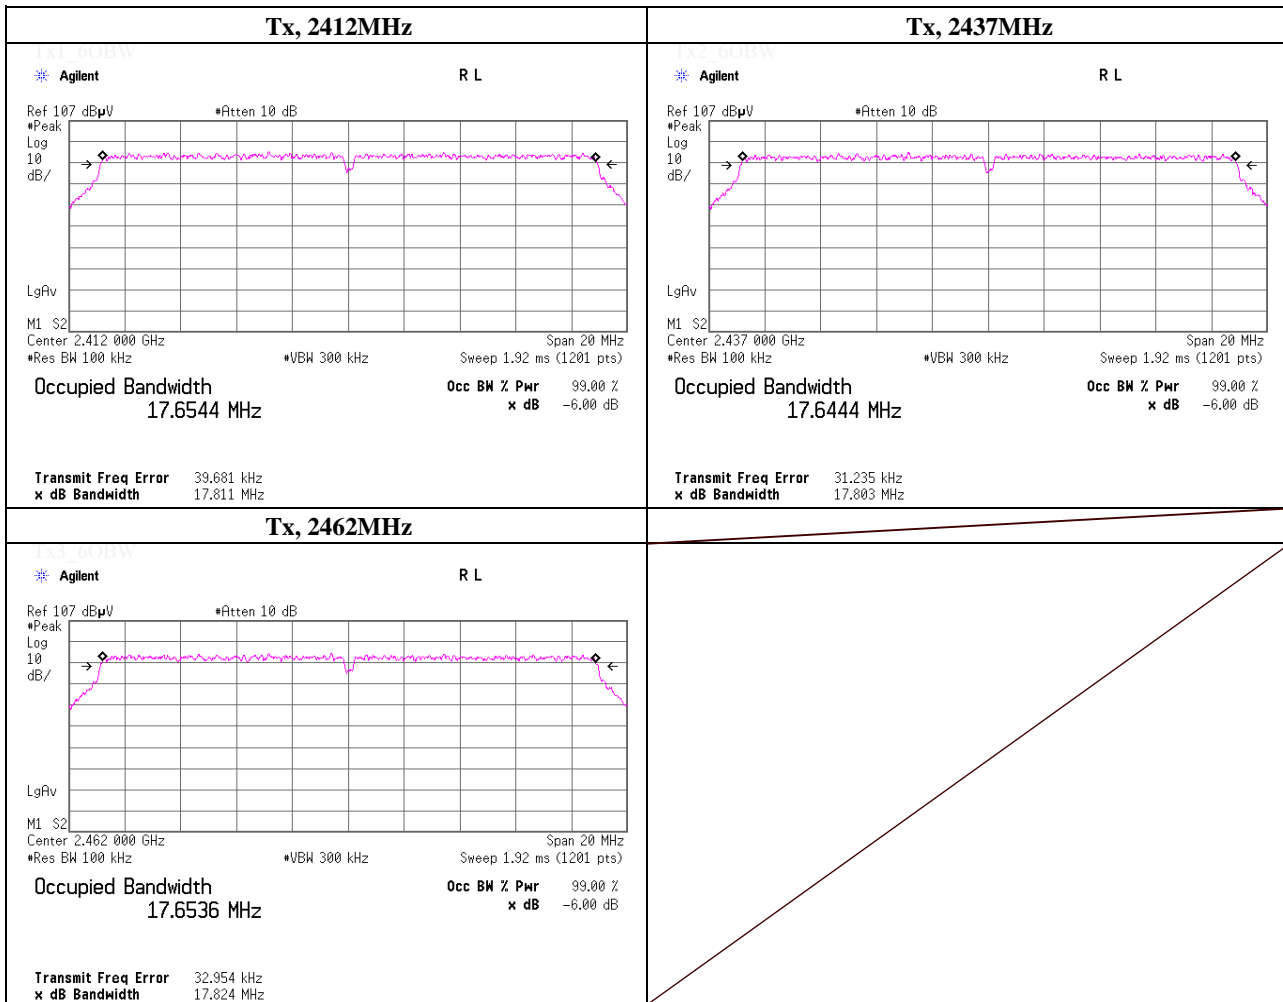

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### -6dB Bandwidth

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2422.0000      | 36.513                  | > 0.500        |
| 2437.0000      | 36.505                  | > 0.500        |
| 2452.0000      | 36.540                  | > 0.500        |

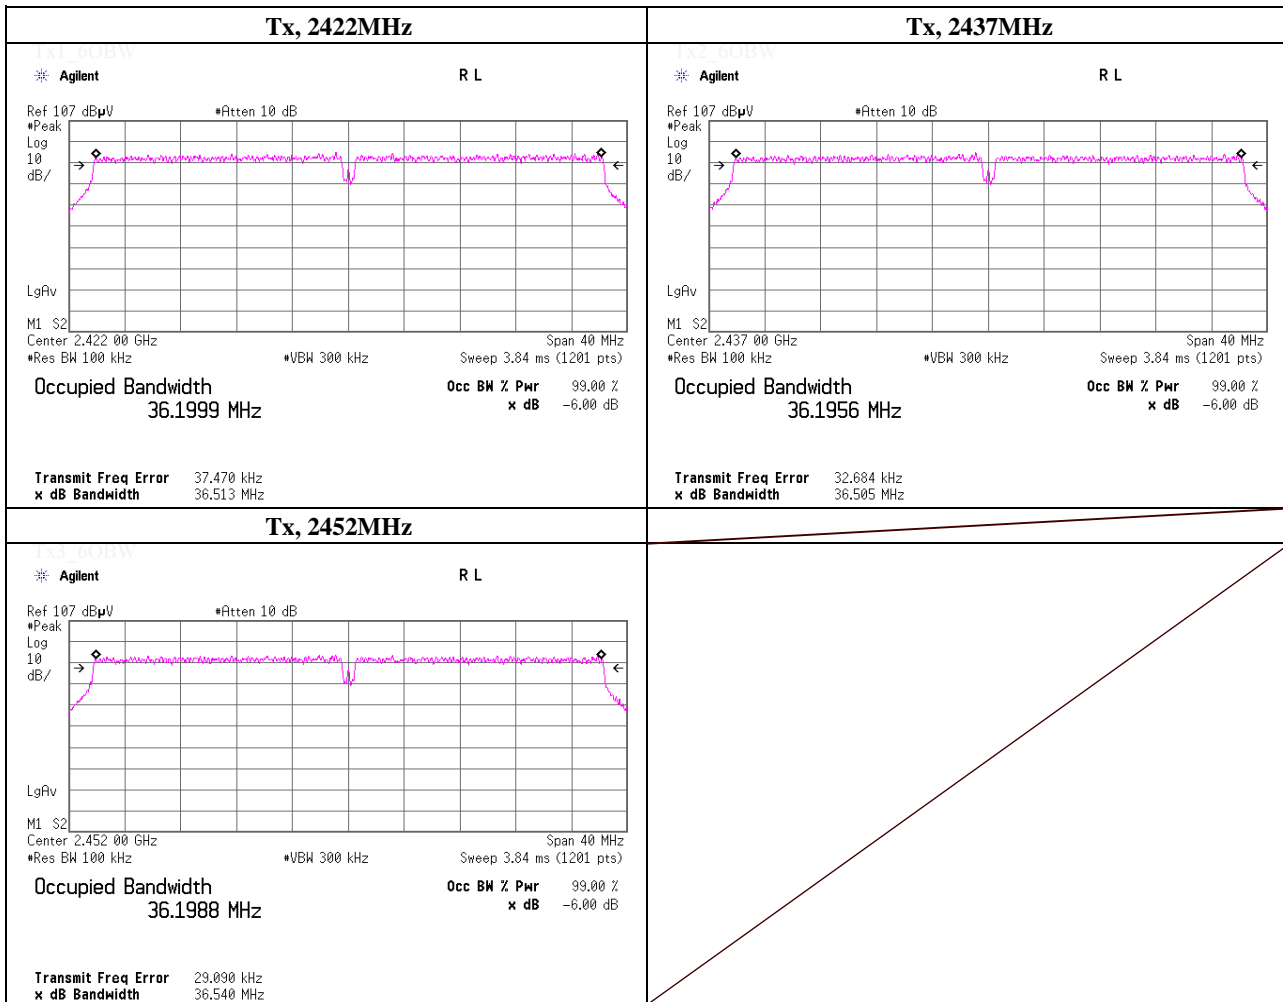

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### -6dB Bandwidth

|                        |   |                    |
|------------------------|---|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.  | No.5 Shielded Room |
| Date                   | August 22, 2012   |                    |
| Temperature / Humidity | 25deg.C , 62%RH   |                    |
| Engineer               | Shinichi Takano   |                    |
| Mode                   | Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm |                    |

| Freq.<br>[MHz] | -6dB Bandwidth<br>[MHz] | Limit<br>[MHz] |
|----------------|-------------------------|----------------|
| 2422.0000      | 36.517                  | > 0.500        |
| 2437.0000      | 36.511                  | > 0.500        |
| 2452.0000      | 36.514                  | > 0.500        |

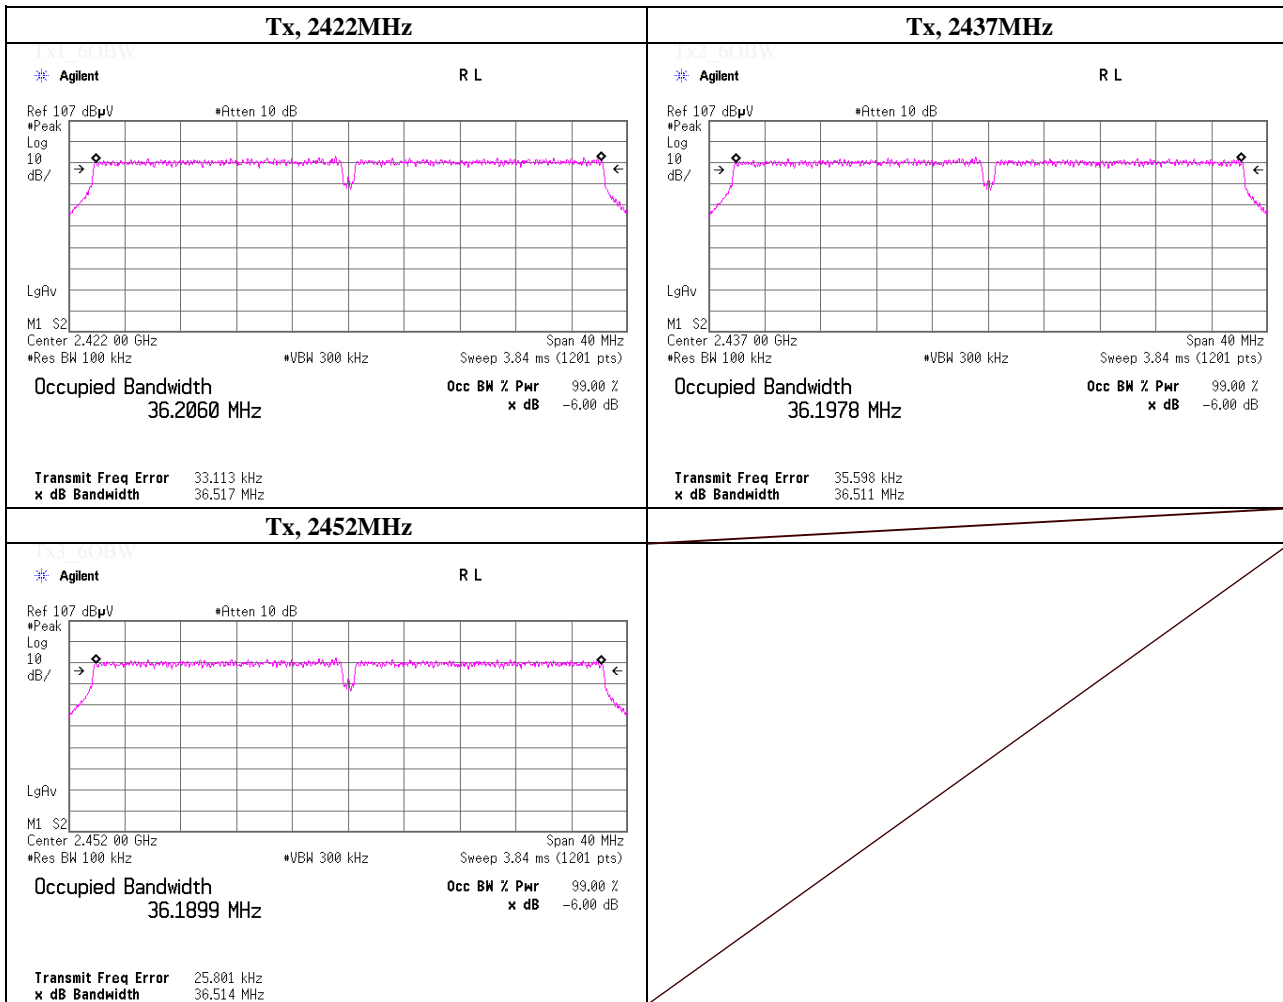

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



















## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 25, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Tatsuya Arai                     | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.2 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2412   | MHz                              |                  |
|                        | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2390.000        | PK       | 54.6           | 27.2            | 24.4      | 38.2      | 68.0            | 73.9           | 5.9         | 106         | 150          |        |
| Hori.    | 4824.000        | PK       | 48.8           | 30.8            | 6.6       | 37.0      | 49.2            | 73.9           | 24.7        | 100         | 148          |        |
| Hori.    | 6432.495        | PK       | 50.1           | 34.5            | 7.6       | 38.3      | 53.9            | 73.9           | 20.0        | 102         | 195          |        |
| Hori.    | 7236.000        | PK       | 46.4           | 36.2            | 8.0       | 39.0      | 51.6            | 73.9           | 22.3        | 100         | 198          |        |
| Hori.    | 9648.000        | PK       | 45.0           | 38.3            | 9.2       | 37.2      | 55.3            | 73.9           | 18.6        | 100         | 144          |        |
| Hori.    | 12060.000       | PK       | 43.4           | 39.2            | 10.5      | 37.9      | 55.2            | 73.9           | 18.7        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 31.6           | 27.2            | 24.4      | 38.2      | 45.0            | 53.9           | 8.9         | 106         | 150          |        |
| Hori.    | 4824.000        | AV       | 42.0           | 30.8            | 6.6       | 37.0      | 42.4            | 53.9           | 11.5        | 100         | 148          |        |
| Hori.    | 6432.495        | AV       | 44.4           | 34.5            | 7.6       | 38.3      | 48.2            | 53.9           | 5.7         | 102         | 195          |        |
| Hori.    | 7236.000        | AV       | 35.8           | 36.2            | 8.0       | 39.0      | 41.0            | 53.9           | 12.9        | 100         | 198          |        |
| Hori.    | 9648.000        | AV       | 35.7           | 38.3            | 9.2       | 37.2      | 46.0            | 53.9           | 7.9         | 100         | 144          |        |
| Hori.    | 12060.000       | AV       | 32.7           | 39.2            | 10.5      | 37.9      | 44.5            | 53.9           | 9.4         | 100         | 0            |        |
| Vert.    | 2390.000        | PK       | 52.4           | 27.2            | 24.4      | 38.2      | 65.8            | 73.9           | 8.1         | 118         | 192          |        |
| Vert.    | 4824.000        | PK       | 48.5           | 30.8            | 6.6       | 37.0      | 48.9            | 73.9           | 25.0        | 100         | 87           |        |
| Vert.    | 6432.495        | PK       | 48.5           | 34.5            | 7.6       | 38.3      | 52.3            | 73.9           | 21.6        | 103         | 296          |        |
| Vert.    | 7236.000        | PK       | 46.4           | 36.2            | 8.0       | 39.0      | 51.6            | 73.9           | 22.3        | 100         | 221          |        |
| Vert.    | 9648.000        | PK       | 45.3           | 38.3            | 9.2       | 37.2      | 55.6            | 73.9           | 18.3        | 100         | 229          |        |
| Vert.    | 12060.000       | PK       | 43.7           | 39.2            | 10.5      | 37.9      | 55.5            | 73.9           | 18.4        | 100         | 0            |        |
| Vert.    | 2390.000        | AV       | 31.5           | 27.2            | 24.4      | 38.2      | 44.9            | 53.9           | 9.0         | 118         | 192          |        |
| Vert.    | 4824.000        | AV       | 41.2           | 30.8            | 6.6       | 37.0      | 41.6            | 53.9           | 12.3        | 100         | 87           |        |
| Vert.    | 6432.495        | AV       | 41.7           | 34.5            | 7.6       | 38.3      | 45.5            | 53.9           | 8.4         | 103         | 296          |        |
| Vert.    | 7236.000        | AV       | 37.2           | 36.2            | 8.0       | 39.0      | 42.4            | 53.9           | 11.5        | 100         | 221          |        |
| Vert.    | 9648.000        | AV       | 36.4           | 38.3            | 9.2       | 37.2      | 46.7            | 53.9           | 7.2         | 100         | 229          |        |
| Vert.    | 12060.000       | AV       | 32.8           | 39.2            | 10.5      | 37.9      | 44.6            | 53.9           | 9.3         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2412.000        | PK       | 83.5           | 27.3              | 24.4      | 38.2      | 97.0            | -              | -           | Carrier |
| Hori.    | 2397.080        | PK       | 55.7           | 27.3              | 24.4      | 38.2      | 69.2            | 77.0           | 7.8         |         |
| Hori.    | 2400.000        | PK       | 41.0           | 27.3              | 24.4      | 38.2      | 54.5            | 77.0           | 22.5        |         |
| Vert.    | 2412.000        | PK       | 79.3           | 27.3              | 24.4      | 38.2      | 92.8            | -              | -           | Carrier |
| Vert.    | 2397.080        | PK       | 50.4           | 27.3              | 24.4      | 38.2      | 63.9            | 72.8           | 8.9         |         |
| Vert.    | 2400.000        | PK       | 38.7           | 27.3              | 24.4      | 38.2      | 52.2            | 72.8           | 20.6        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 25, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Tatsuya Arai                     | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.2 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2437 MHz   |                                  |                  |
|                        | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 4874.000        | PK       | 49.1           | 31.0            | 6.6       | 36.9      | 49.8            | 73.9           | 24.1        | 100         | 334          |        |
| Hori.    | 6497.999        | PK       | 49.6           | 34.7            | 7.6       | 38.4      | 53.5            | 73.9           | 20.4        | 100         | 198          |        |
| Hori.    | 7311.000        | PK       | 46.0           | 36.2            | 8.2       | 39.0      | 51.4            | 73.9           | 22.5        | 100         | 217          |        |
| Hori.    | 9748.000        | PK       | 44.7           | 38.4            | 9.3       | 37.2      | 55.2            | 73.9           | 18.7        | 100         | 146          |        |
| Hori.    | 12185.000       | PK       | 44.0           | 39.2            | 10.5      | 37.7      | 56.0            | 73.9           | 17.9        | 100         | 0            |        |
| Hori.    | 4874.000        | AV       | 43.4           | 31.0            | 6.6       | 36.9      | 44.1            | 53.9           | 9.8         | 100         | 334          |        |
| Hori.    | 6497.999        | AV       | 44.4           | 34.7            | 7.6       | 38.4      | 48.3            | 53.9           | 5.6         | 100         | 198          |        |
| Hori.    | 7311.000        | AV       | 35.2           | 36.2            | 8.2       | 39.0      | 40.6            | 53.9           | 13.3        | 100         | 217          |        |
| Hori.    | 9748.000        | AV       | 36.1           | 38.4            | 9.3       | 37.2      | 46.6            | 53.9           | 7.3         | 100         | 146          |        |
| Hori.    | 12185.000       | AV       | 32.6           | 39.2            | 10.5      | 37.7      | 44.6            | 53.9           | 9.3         | 100         | 0            |        |
| Vert.    | 4874.000        | PK       | 49.5           | 31.0            | 6.6       | 36.9      | 50.2            | 73.9           | 23.7        | 100         | 198          |        |
| Vert.    | 6497.999        | PK       | 48.1           | 34.7            | 7.6       | 38.4      | 52.0            | 73.9           | 21.9        | 183         | 304          |        |
| Vert.    | 7311.000        | PK       | 46.8           | 36.2            | 8.2       | 39.0      | 52.2            | 73.9           | 21.7        | 100         | 226          |        |
| Vert.    | 9748.000        | PK       | 47.5           | 38.4            | 9.3       | 37.2      | 58.0            | 73.9           | 15.9        | 179         | 233          |        |
| Vert.    | 12185.000       | PK       | 43.9           | 39.2            | 10.5      | 37.7      | 55.9            | 73.9           | 18.0        | 100         | 0            |        |
| Vert.    | 4874.000        | AV       | 43.3           | 31.0            | 6.6       | 36.9      | 44.0            | 53.9           | 9.9         | 100         | 198          |        |
| Vert.    | 6497.999        | AV       | 41.3           | 34.7            | 7.6       | 38.4      | 45.2            | 53.9           | 8.7         | 183         | 304          |        |
| Vert.    | 7311.000        | AV       | 36.3           | 36.2            | 8.2       | 39.0      | 41.7            | 53.9           | 12.2        | 100         | 226          |        |
| Vert.    | 9748.000        | AV       | 38.6           | 38.4            | 9.3       | 37.2      | 49.1            | 53.9           | <b>4.8</b>  | 179         | 233          |        |
| Vert.    | 12185.000       | AV       | 32.6           | 39.2            | 10.5      | 37.7      | 44.6            | 53.9           | 9.3         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
Date                            August 23, 2012                                   August 25, 2012                                   August 27, 2012  
Temperature / Humidity    23 deg.C , 61%RH                           25 deg.C , 67%RH                           25 deg.C , 60%RH  
Engineer                     Shinichi Takano                               Tatsuya Arai                                 Tatsuya Arai  
                                     (No.2 SAC)                                   (No.2 SAC)                                   (No.3 SAC)  
Mode                           Tx, 2462   MHz  
                                     Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2483.500        | PK       | 52.1           | 27.4            | 24.4      | 38.1      | 65.8            | 73.9           | 8.1         | 104         | 157          |        |
| Hori.    | 4924.000        | PK       | 52.2           | 31.1            | 6.6       | 36.9      | 53.0            | 73.9           | 20.9        | 100         | 339          |        |
| Hori.    | 6565.537        | PK       | 50.2           | 34.9            | 7.7       | 38.5      | 54.3            | 73.9           | 19.6        | 100         | 201          |        |
| Hori.    | 7386.000        | PK       | 45.5           | 36.3            | 8.3       | 39.0      | 51.1            | 73.9           | 22.8        | 100         | 216          |        |
| Hori.    | 9848.000        | PK       | 44.6           | 38.6            | 9.3       | 37.2      | 55.3            | 73.9           | 18.6        | 100         | 128          |        |
| Hori.    | 12310.000       | PK       | 43.8           | 39.1            | 10.7      | 37.6      | 56.0            | 73.9           | 17.9        | 100         | 0            |        |
| Hori.    | 2483.500        | AV       | 32.6           | 27.4            | 24.4      | 38.1      | 46.3            | 53.9           | 7.6         | 104         | 157          |        |
| Hori.    | 4924.000        | AV       | 47.6           | 31.1            | 6.6       | 36.9      | 48.4            | 53.9           | 5.5         | 100         | 339          |        |
| Hori.    | 6565.537        | AV       | 44.9           | 34.9            | 7.7       | 38.5      | 49.0            | 53.9           | 4.9         | 100         | 201          |        |
| Hori.    | 7386.000        | AV       | 34.8           | 36.3            | 8.3       | 39.0      | 40.4            | 53.9           | 13.5        | 100         | 216          |        |
| Hori.    | 9848.000        | AV       | 36.6           | 38.6            | 9.3       | 37.2      | 47.3            | 53.9           | 6.6         | 100         | 128          |        |
| Hori.    | 12310.000       | AV       | 32.6           | 39.1            | 10.7      | 37.6      | 44.8            | 53.9           | 9.1         | 100         | 0            |        |
| Vert.    | 2483.500        | PK       | 51.8           | 27.4            | 24.4      | 38.1      | 65.5            | 73.9           | 8.4         | 148         | 197          |        |
| Vert.    | 4924.000        | PK       | 50.7           | 31.1            | 6.6       | 36.9      | 51.5            | 73.9           | 22.4        | 100         | 198          |        |
| Vert.    | 6565.537        | PK       | 48.5           | 34.9            | 7.7       | 38.5      | 52.6            | 73.9           | 21.3        | 185         | 295          |        |
| Vert.    | 7386.000        | PK       | 46.2           | 36.3            | 8.3       | 39.0      | 51.8            | 73.9           | 22.1        | 100         | 218          |        |
| Vert.    | 9848.000        | PK       | 46.7           | 38.6            | 9.3       | 37.2      | 57.4            | 73.9           | 16.5        | 157         | 237          |        |
| Vert.    | 12310.000       | PK       | 44.6           | 39.1            | 10.7      | 37.6      | 56.8            | 73.9           | 17.1        | 100         | 0            |        |
| Vert.    | 2483.500        | AV       | 32.7           | 27.4            | 24.4      | 38.1      | 46.4            | 53.9           | 7.5         | 148         | 197          |        |
| Vert.    | 4924.000        | AV       | 44.4           | 31.1            | 6.6       | 36.9      | 45.2            | 53.9           | 8.7         | 100         | 198          |        |
| Vert.    | 6565.537        | AV       | 42.2           | 34.9            | 7.7       | 38.5      | 46.3            | 53.9           | 7.6         | 185         | 295          |        |
| Vert.    | 7386.000        | AV       | 35.5           | 36.3            | 8.3       | 39.0      | 41.1            | 53.9           | 12.8        | 100         | 218          |        |
| Vert.    | 9848.000        | AV       | 39.5           | 38.6            | 9.3       | 37.2      | 50.2            | 53.9           | <b>3.7</b>  | 157         | 237          |        |
| Vert.    | 12310.000       | AV       | 32.5           | 39.1            | 10.7      | 37.6      | 44.7            | 53.9           | 9.2         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 27, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 26 deg.C , 61%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Hikaru Shirasawa                 | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.3 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2412 MHz   |                                  |                  |
|                        | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2390.000        | PK       | 53.1           | 27.2            | 24.4      | 38.2      | 66.5            | 73.9           | 7.4         | 106         | 150          |        |
| Hori.    | 4824.000        | PK       | 52.4           | 31.1            | 6.8       | 41.2      | 49.1            | 73.9           | 24.8        | 111         | 97           |        |
| Hori.    | 6432.175        | PK       | 52.0           | 34.9            | 7.5       | 40.6      | 53.8            | 73.9           | 20.1        | 100         | 144          |        |
| Hori.    | 7236.000        | PK       | 48.5           | 36.6            | 8.5       | 41.4      | 52.2            | 73.9           | 21.7        | 100         | 312          |        |
| Hori.    | 9648.000        | PK       | 45.1           | 38.6            | 9.4       | 38.9      | 54.2            | 73.9           | 19.7        | 100         | 359          |        |
| Hori.    | 12060.000       | PK       | 47.5           | 39.5            | 10.7      | 39.4      | 58.3            | 73.9           | 15.6        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 31.7           | 27.2            | 24.4      | 38.2      | 45.1            | 53.9           | 8.8         | 106         | 150          |        |
| Hori.    | 4824.000        | AV       | 46.1           | 31.1            | 6.8       | 41.2      | 42.8            | 53.9           | 11.1        | 111         | 97           |        |
| Hori.    | 6432.175        | AV       | 46.3           | 34.9            | 7.5       | 40.6      | 48.1            | 53.9           | <b>5.8</b>  | 100         | 144          |        |
| Hori.    | 7236.000        | AV       | 35.8           | 36.6            | 8.5       | 41.4      | 39.5            | 53.9           | 14.4        | 100         | 312          |        |
| Hori.    | 9648.000        | AV       | 33.0           | 38.6            | 9.4       | 38.9      | 42.1            | 53.9           | 11.8        | 100         | 359          |        |
| Hori.    | 12060.000       | AV       | 34.1           | 39.5            | 10.7      | 39.4      | 44.9            | 53.9           | 9.0         | 100         | 0            |        |
| Vert.    | 2390.000        | PK       | 50.1           | 27.2            | 24.4      | 38.2      | 63.5            | 73.9           | 10.4        | 118         | 192          |        |
| Vert.    | 4824.000        | PK       | 50.9           | 31.1            | 6.8       | 41.2      | 47.6            | 73.9           | 26.3        | 113         | 184          |        |
| Vert.    | 6432.175        | PK       | 49.9           | 34.9            | 7.5       | 40.6      | 51.7            | 73.9           | 22.2        | 100         | 243          |        |
| Vert.    | 7236.000        | PK       | 48.2           | 36.6            | 8.5       | 41.4      | 51.9            | 73.9           | 22.0        | 100         | 359          |        |
| Vert.    | 9648.000        | PK       | 46.0           | 38.6            | 9.4       | 38.9      | 55.1            | 73.9           | 18.8        | 100         | 0            |        |
| Vert.    | 12060.000       | PK       | 46.9           | 39.5            | 10.7      | 39.4      | 57.7            | 73.9           | 16.2        | 100         | 359          |        |
| Vert.    | 2390.000        | AV       | 31.5           | 27.2            | 24.4      | 38.2      | 44.9            | 53.9           | 9.0         | 118         | 192          |        |
| Vert.    | 4824.000        | AV       | 43.3           | 31.1            | 6.8       | 41.2      | 40.0            | 53.9           | 13.9        | 113         | 184          |        |
| Vert.    | 6432.175        | AV       | 43.3           | 34.9            | 7.5       | 40.6      | 45.1            | 53.9           | 8.8         | 100         | 243          |        |
| Vert.    | 7236.000        | AV       | 36.0           | 36.6            | 8.5       | 41.4      | 39.7            | 53.9           | 14.2        | 100         | 359          |        |
| Vert.    | 9648.000        | AV       | 33.0           | 38.6            | 9.4       | 38.9      | 42.1            | 53.9           | 11.8        | 100         | 0            |        |
| Vert.    | 12060.000       | AV       | 34.0           | 39.5            | 10.7      | 39.4      | 44.8            | 53.9           | 9.1         | 100         | 359          |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2412.000        | PK       | 81.2           | 27.3              | 24.4      | 38.2      | 94.7            | -              | -           | Carrier |
| Hori.    | 2397.080        | PK       | 54.6           | 27.3              | 24.4      | 38.2      | 68.1            | 74.7           | 6.6         |         |
| Hori.    | 2400.000        | PK       | 37.7           | 27.3              | 24.4      | 38.2      | 51.2            | 74.7           | 23.5        |         |
| Vert.    | 2412.000        | PK       | 75.3           | 27.3              | 24.4      | 38.2      | 88.8            | -              | -           | Carrier |
| Vert.    | 2397.080        | PK       | 49.8           | 27.3              | 24.4      | 38.2      | 63.3            | 68.8           | 5.5         |         |
| Vert.    | 2400.000        | PK       | 36.1           | 27.3              | 24.4      | 38.2      | 49.6            | 68.8           | 19.2        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 27, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 26 deg.C , 61%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Hikaru Shirasawa                 | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.3 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2437 MHz   |                                  |                  |
|                        | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 4874.000        | PK       | 50.8           | 31.3            | 6.9       | 41.1      | 47.9            | 73.9           | 26.0        | 106         | 94           |        |
| Hori.    | 6499.013        | PK       | 51.0           | 35.2            | 7.5       | 40.7      | 53.0            | 73.9           | 20.9        | 100         | 150          |        |
| Hori.    | 7311.000        | PK       | 48.6           | 36.6            | 8.6       | 41.4      | 52.4            | 73.9           | 21.5        | 100         | 359          |        |
| Hori.    | 9748.000        | PK       | 45.7           | 38.7            | 9.5       | 38.9      | 55.0            | 73.9           | 18.9        | 100         | 359          |        |
| Hori.    | 12185.000       | PK       | 46.4           | 39.5            | 10.7      | 39.3      | 57.3            | 73.9           | 16.6        | 100         | 0            |        |
| Hori.    | 4874.000        | AV       | 44.1           | 31.3            | 6.9       | 41.1      | 41.2            | 53.9           | 12.7        | 106         | 94           |        |
| Hori.    | 6499.013        | AV       | 46.1           | 35.2            | 7.5       | 40.7      | 48.1            | 53.9           | 5.8         | 100         | 150          |        |
| Hori.    | 7311.000        | AV       | 34.7           | 36.6            | 8.6       | 41.4      | 38.5            | 53.9           | 15.4        | 100         | 359          |        |
| Hori.    | 9748.000        | AV       | 32.0           | 38.7            | 9.5       | 38.9      | 41.3            | 53.9           | 12.6        | 100         | 359          |        |
| Hori.    | 12185.000       | AV       | 32.2           | 39.5            | 10.7      | 39.3      | 43.1            | 53.9           | 10.8        | 100         | 0            |        |
| Vert.    | 4874.000        | PK       | 51.7           | 31.3            | 6.9       | 41.1      | 48.8            | 73.9           | 25.1        | 100         | 0            |        |
| Vert.    | 6499.013        | PK       | 50.2           | 35.2            | 7.5       | 40.7      | 52.2            | 73.9           | 21.7        | 100         | 232          |        |
| Vert.    | 7311.000        | PK       | 47.9           | 36.6            | 8.6       | 41.4      | 51.7            | 73.9           | 22.2        | 100         | 359          |        |
| Vert.    | 9748.000        | PK       | 45.0           | 38.7            | 9.5       | 38.9      | 54.3            | 73.9           | 19.6        | 100         | 0            |        |
| Vert.    | 12185.000       | PK       | 46.1           | 39.5            | 10.7      | 39.3      | 57.0            | 73.9           | 16.9        | 100         | 359          |        |
| Vert.    | 4874.000        | AV       | 45.1           | 31.3            | 6.9       | 41.1      | 42.2            | 53.9           | 11.7        | 100         | 0            |        |
| Vert.    | 6499.013        | AV       | 42.8           | 35.2            | 7.5       | 40.7      | 44.8            | 53.9           | 9.1         | 100         | 232          |        |
| Vert.    | 7311.000        | AV       | 34.7           | 36.6            | 8.6       | 41.4      | 38.5            | 53.9           | 15.4        | 100         | 359          |        |
| Vert.    | 9748.000        | AV       | 32.6           | 38.7            | 9.5       | 38.9      | 41.9            | 53.9           | 12.0        | 100         | 0            |        |
| Vert.    | 12185.000       | AV       | 32.3           | 39.5            | 10.7      | 39.3      | 43.2            | 53.9           | 10.7        | 100         | 359          |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
Date                            August 23, 2012                                   August 27, 2012                                   August 27, 2012  
Temperature / Humidity    23 deg.C , 61%RH                           26 deg.C , 61%RH                           25 deg.C , 60%RH  
Engineer                     Shinichi Takano                               Hikaru Shirasawa                           Tatsuya Arai  
                                     (No.2 SAC)                                   (No.3 SAC)                                   (No.3 SAC)  
Mode                           Tx, 2462   MHz  
                                     Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[deg.] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|----------------|-----------------|--------|
| Hori.    | 2483.500           | PK       | 51.2              | 27.4               | 24.4         | 38.1         | 64.9               | 73.9              | 9.0            | 104            | 157             |        |
| Hori.    | 4924.000           | PK       | 51.3              | 31.5               | 6.9          | 41.0         | 48.7               | 73.9              | 25.2           | 100            | 292             |        |
| Hori.    | 6565.715           | PK       | 50.9              | 35.3               | 7.7          | 40.8         | 53.1               | 73.9              | 20.8           | 100            | 136             |        |
| Hori.    | 7386.000           | PK       | 47.9              | 36.7               | 8.7          | 41.5         | 51.8               | 73.9              | 22.1           | 100            | 359             |        |
| Hori.    | 9848.000           | PK       | 45.1              | 38.9               | 9.5          | 38.9         | 54.6               | 73.9              | 19.3           | 100            | 359             |        |
| Hori.    | 12310.000          | PK       | 44.5              | 39.5               | 10.8         | 39.3         | 55.5               | 73.9              | 18.4           | 100            | 0               |        |
| Hori.    | 2483.500           | AV       | 32.1              | 27.4               | 24.4         | 38.1         | 45.8               | 53.9              | 8.1            | 104            | 157             |        |
| Hori.    | 4924.000           | AV       | 44.8              | 31.5               | 6.9          | 41.0         | 42.2               | 53.9              | 11.7           | 100            | 292             |        |
| Hori.    | 6565.715           | AV       | 44.0              | 35.3               | 7.7          | 40.8         | 46.2               | 53.9              | <b>7.7</b>     | 100            | 136             |        |
| Hori.    | 7386.000           | AV       | 34.8              | 36.7               | 8.7          | 41.5         | 38.7               | 53.9              | 15.2           | 100            | 359             |        |
| Hori.    | 9848.000           | AV       | 32.2              | 38.9               | 9.5          | 38.9         | 41.7               | 53.9              | 12.2           | 100            | 359             |        |
| Hori.    | 12310.000          | AV       | 31.6              | 39.5               | 10.8         | 39.3         | 42.6               | 53.9              | 11.3           | 100            | 0               |        |
| Vert.    | 2483.500           | PK       | 50.9              | 27.4               | 24.4         | 38.1         | 64.6               | 73.9              | 9.3            | 148            | 197             |        |
| Vert.    | 4924.000           | PK       | 50.8              | 31.5               | 6.9          | 41.0         | 48.2               | 73.9              | 25.7           | 100            | 153             |        |
| Vert.    | 6565.715           | PK       | 50.0              | 35.3               | 7.7          | 40.8         | 52.2               | 73.9              | 21.7           | 100            | 121             |        |
| Vert.    | 7386.000           | PK       | 47.6              | 36.7               | 8.7          | 41.5         | 51.5               | 73.9              | 22.4           | 100            | 359             |        |
| Vert.    | 9848.000           | PK       | 45.0              | 38.9               | 9.5          | 38.9         | 54.5               | 73.9              | 19.4           | 100            | 183             |        |
| Vert.    | 12310.000          | PK       | 44.4              | 39.5               | 10.8         | 39.3         | 55.4               | 73.9              | 18.5           | 100            | 359             |        |
| Vert.    | 2483.500           | AV       | 32.2              | 27.4               | 24.4         | 38.1         | 45.9               | 53.9              | 8.0            | 148            | 197             |        |
| Vert.    | 4924.000           | AV       | 43.6              | 31.5               | 6.9          | 41.0         | 41.0               | 53.9              | 12.9           | 100            | 153             |        |
| Vert.    | 6565.715           | AV       | 41.3              | 35.3               | 7.7          | 40.8         | 43.5               | 53.9              | 10.4           | 100            | 121             |        |
| Vert.    | 7386.000           | AV       | 34.5              | 36.7               | 8.7          | 41.5         | 38.4               | 53.9              | 15.5           | 100            | 359             |        |
| Vert.    | 9848.000           | AV       | 32.1              | 38.9               | 9.5          | 38.9         | 41.6               | 53.9              | 12.3           | 100            | 183             |        |
| Vert.    | 12310.000          | AV       | 31.5              | 39.5               | 10.8         | 39.3         | 42.5               | 53.9              | 11.4           | 100            | 359             |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

|                        |  |                  |                  |                 |
|------------------------|--|------------------|------------------|-----------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab. No.2 and 3 Semi Anechoic Chamber  |                  |                  |                 |
| Date                   | August 23, 2012  | August 25, 2012  | August 27, 2012  | August 29, 2012 |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH | 25 deg.C , 60%RH | 25 deg.C, 57%RH |
| Engineer               | Shinichi Takano  | Tatsuya Arai     | Tatsuya Arai     | Akira Sato      |
|                        | (No.2 SAC)   | (No.2 SAC)       | (No.3 SAC)       | (No.3 SAC)      |
| Mode                   | Tx, 2412 MHz   |                  |                  |                 |
|                        | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm |                  |                  |                 |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 240.000         | QP       | 49.3           | 16.9            | 8.2       | 32.0      | 42.4            | 46.0           | 3.6         | 146         | 84           |        |
| Hori.    | 336.008         | QP       | 53.1           | 14.8            | 8.7       | 32.0      | 44.6            | 46.0           | 1.4         | 100         | 240          |        |
| Hori.    | 432.022         | QP       | 47.9           | 16.8            | 9.2       | 32.0      | 41.9            | 46.0           | 4.1         | 100         | 53           |        |
| Hori.    | 624.009         | QP       | 46.9           | 19.4            | 9.9       | 32.0      | 44.2            | 46.0           | 1.8         | 161         | 32           |        |
| Hori.    | 672.009         | QP       | 40.4           | 20.1            | 10.0      | 31.9      | 38.6            | 46.0           | 7.4         | 151         | 49           |        |
| Hori.    | 2390.000        | PK       | 53.2           | 27.2            | 24.4      | 38.2      | 66.6            | 73.9           | 7.3         | 106         | 157          |        |
| Hori.    | 4824.000        | PK       | 46.5           | 30.8            | 6.6       | 37.0      | 46.9            | 73.9           | 27.0        | 100         | 146          |        |
| Hori.    | 6432.047        | PK       | 49.6           | 34.5            | 7.6       | 38.3      | 53.4            | 73.9           | 20.5        | 100         | 205          |        |
| Hori.    | 7236.000        | PK       | 45.8           | 36.2            | 8.0       | 39.0      | 51.0            | 73.9           | 22.9        | 100         | 205          |        |
| Hori.    | 9648.000        | PK       | 42.4           | 38.3            | 9.2       | 37.2      | 52.7            | 73.9           | 21.2        | 100         | 0            |        |
| Hori.    | 12060.000       | PK       | 44.8           | 39.2            | 10.5      | 37.9      | 56.6            | 73.9           | 17.3        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 33.6           | 27.2            | 24.4      | 38.2      | 47.0            | 53.9           | 6.9         | 106         | 157          |        |
| Hori.    | 4824.000        | AV       | 33.7           | 30.8            | 6.6       | 37.0      | 34.1            | 53.9           | 19.8        | 100         | 146          |        |
| Hori.    | 6432.047        | AV       | 44.5           | 34.5            | 7.6       | 38.3      | 48.3            | 53.9           | 5.6         | 100         | 205          |        |
| Hori.    | 7236.000        | AV       | 34.8           | 36.2            | 8.0       | 39.0      | 40.0            | 53.9           | 13.9        | 100         | 205          |        |
| Hori.    | 9648.000        | AV       | 31.1           | 38.3            | 9.2       | 37.2      | 41.4            | 53.9           | 12.5        | 100         | 0            |        |
| Hori.    | 12060.000       | AV       | 32.8           | 39.2            | 10.5      | 37.9      | 44.6            | 53.9           | 9.3         | 100         | 0            |        |
| Vert.    | 48.004          | QP       | 51.6           | 11.7            | 6.8       | 32.2      | 37.9            | 40.0           | 2.1         | 104         | 257          |        |
| Vert.    | 624.004         | QP       | 45.0           | 19.4            | 9.9       | 32.0      | 42.3            | 46.0           | 3.7         | 100         | 79           |        |
| Vert.    | 2390.000        | PK       | 48.4           | 27.2            | 24.4      | 38.2      | 61.8            | 73.9           | 12.1        | 107         | 171          |        |
| Vert.    | 4824.000        | PK       | 44.6           | 30.8            | 6.6       | 37.0      | 45.0            | 73.9           | 28.9        | 100         | 69           |        |
| Vert.    | 6432.047        | PK       | 48.7           | 34.5            | 7.6       | 38.3      | 52.5            | 73.9           | 21.4        | 186         | 289          |        |
| Vert.    | 7236.000        | PK       | 46.7           | 36.2            | 8.0       | 39.0      | 51.9            | 73.9           | 22.0        | 100         | 222          |        |
| Vert.    | 9648.000        | PK       | 42.3           | 38.3            | 9.2       | 37.2      | 52.6            | 73.9           | 21.3        | 100         | 0            |        |
| Vert.    | 12060.000       | PK       | 43.4           | 39.2            | 10.5      | 37.9      | 55.2            | 73.9           | 18.7        | 100         | 0            |        |
| Vert.    | 2390.000        | AV       | 32.3           | 27.2            | 24.4      | 38.2      | 45.7            | 53.9           | 8.2         | 107         | 171          |        |
| Vert.    | 4824.000        | AV       | 33.6           | 30.8            | 6.6       | 37.0      | 34.0            | 53.9           | 19.9        | 100         | 69           |        |
| Vert.    | 6432.047        | AV       | 42.1           | 34.5            | 7.6       | 38.3      | 45.9            | 53.9           | 8.0         | 186         | 289          |        |
| Vert.    | 7236.000        | AV       | 35.3           | 36.2            | 8.0       | 39.0      | 40.5            | 53.9           | 13.4        | 100         | 222          |        |
| Vert.    | 9648.000        | AV       | 30.9           | 38.3            | 9.2       | 37.2      | 41.2            | 53.9           | 12.7        | 100         | 0            |        |
| Vert.    | 12060.000       | AV       | 32.7           | 39.2            | 10.5      | 37.9      | 44.5            | 53.9           | 9.4         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2412.000        | PK       | 78.2           | 27.3              | 24.4      | 38.2      | 91.7            | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 44.2           | 27.3              | 24.4      | 38.2      | 57.7            | 71.7           | 14.0        |         |
| Vert.    | 2412.000        | PK       | 76.4           | 27.3              | 24.4      | 38.2      | 89.9            | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 41.4           | 27.3              | 24.4      | 38.2      | 54.9            | 69.9           | 15.0        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 25, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Tatsuya Arai                     | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.2 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2437 MHz   |                                  |                  |
|                        | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 4874.000        | PK       | 45.7           | 31.0            | 6.6       | 36.9      | 46.4            | 73.9           | 27.5        | 100         | 337          |        |
| Hori.    | 6498.023        | PK       | 49.4           | 34.7            | 7.6       | 38.4      | 53.3            | 73.9           | 20.6        | 100         | 196          |        |
| Hori.    | 7311.000        | PK       | 45.4           | 36.2            | 8.2       | 39.0      | 50.8            | 73.9           | 23.1        | 100         | 0            |        |
| Hori.    | 9748.000        | PK       | 42.0           | 38.4            | 9.3       | 37.2      | 52.5            | 73.9           | 21.4        | 100         | 0            |        |
| Hori.    | 12185.000       | PK       | 44.0           | 39.2            | 10.5      | 37.7      | 56.0            | 73.9           | 17.9        | 100         | 0            |        |
| Hori.    | 4874.000        | AV       | 34.3           | 31.0            | 6.6       | 36.9      | 35.0            | 53.9           | 18.9        | 100         | 337          |        |
| Hori.    | 6498.023        | AV       | 44.3           | 34.7            | 7.6       | 38.4      | 48.2            | 53.9           | 5.7         | 100         | 196          |        |
| Hori.    | 7311.000        | AV       | 34.3           | 36.2            | 8.2       | 39.0      | 39.7            | 53.9           | 14.2        | 100         | 0            |        |
| Hori.    | 9748.000        | AV       | 31.3           | 38.4            | 9.3       | 37.2      | 41.8            | 53.9           | 12.1        | 100         | 0            |        |
| Hori.    | 12185.000       | AV       | 32.6           | 39.2            | 10.5      | 37.7      | 44.6            | 53.9           | 9.3         | 100         | 0            |        |
| Vert.    | 4874.000        | PK       | 45.4           | 31.0            | 6.6       | 36.9      | 46.1            | 73.9           | 27.8        | 100         | 98           |        |
| Vert.    | 6498.023        | PK       | 48.1           | 34.7            | 7.6       | 38.4      | 52.0            | 73.9           | 21.9        | 186         | 299          |        |
| Vert.    | 7311.000        | PK       | 45.0           | 36.2            | 8.2       | 39.0      | 50.4            | 73.9           | 23.5        | 100         | 230          |        |
| Vert.    | 9748.000        | PK       | 42.9           | 38.4            | 9.3       | 37.2      | 53.4            | 73.9           | 20.5        | 100         | 237          |        |
| Vert.    | 12185.000       | PK       | 44.1           | 39.2            | 10.5      | 37.7      | 56.1            | 73.9           | 17.8        | 100         | 0            |        |
| Vert.    | 4874.000        | AV       | 33.9           | 31.0            | 6.6       | 36.9      | 34.6            | 53.9           | 19.3        | 100         | 98           |        |
| Vert.    | 6498.023        | AV       | 42.7           | 34.7            | 7.6       | 38.4      | 46.6            | 53.9           | 7.3         | 186         | 299          |        |
| Vert.    | 7311.000        | AV       | 34.7           | 36.2            | 8.2       | 39.0      | 40.1            | 53.9           | 13.8        | 100         | 230          |        |
| Vert.    | 9748.000        | AV       | 31.9           | 38.4            | 9.3       | 37.2      | 42.4            | 53.9           | 11.5        | 100         | 237          |        |
| Vert.    | 12185.000       | AV       | 32.7           | 39.2            | 10.5      | 37.7      | 44.7            | 53.9           | 9.2         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 25, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Tatsuya Arai                     | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.2 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2462 MHz   |                                  |                  |
|                        | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2483.500        | PK       | 52.0           | 27.4            | 24.4      | 38.1      | 65.7            | 73.9           | 8.2         | 103         | 159          |        |
| Hori.    | 4924.000        | PK       | 48.7           | 31.1            | 6.6       | 36.9      | 49.5            | 73.9           | 24.4        | 100         | 334          |        |
| Hori.    | 6565.568        | PK       | 50.1           | 34.9            | 7.7       | 38.5      | 54.2            | 73.9           | 19.7        | 100         | 199          |        |
| Hori.    | 7386.000        | PK       | 44.8           | 36.3            | 8.3       | 39.0      | 50.4            | 73.9           | 23.5        | 100         | 0            |        |
| Hori.    | 9848.000        | PK       | 42.3           | 38.6            | 9.3       | 37.2      | 53.0            | 73.9           | 20.9        | 100         | 0            |        |
| Hori.    | 12310.000       | PK       | 44.2           | 39.1            | 10.7      | 37.6      | 56.4            | 73.9           | 17.5        | 100         | 0            |        |
| Hori.    | 2483.500        | AV       | 32.6           | 27.4            | 24.4      | 38.1      | 46.3            | 53.9           | 7.6         | 103         | 159          |        |
| Hori.    | 4924.000        | AV       | 36.1           | 31.1            | 6.6       | 36.9      | 36.9            | 53.9           | 17.0        | 100         | 334          |        |
| Hori.    | 6565.568        | AV       | 45.1           | 34.9            | 7.7       | 38.5      | 49.2            | 53.9           | <b>4.7</b>  | 100         | 199          |        |
| Hori.    | 7386.000        | AV       | 34.5           | 36.3            | 8.3       | 39.0      | 40.1            | 53.9           | 13.8        | 100         | 0            |        |
| Hori.    | 9848.000        | AV       | 31.5           | 38.6            | 9.3       | 37.2      | 42.2            | 53.9           | 11.7        | 100         | 0            |        |
| Hori.    | 12310.000       | AV       | 32.6           | 39.1            | 10.7      | 37.6      | 44.8            | 53.9           | 9.1         | 100         | 0            |        |
| Vert.    | 2483.500        | PK       | 50.7           | 27.4            | 24.4      | 38.1      | 64.4            | 73.9           | 9.5         | 106         | 163          |        |
| Vert.    | 4924.000        | PK       | 46.7           | 31.1            | 6.6       | 36.9      | 47.5            | 73.9           | 26.4        | 100         | 195          |        |
| Vert.    | 6565.568        | PK       | 49.0           | 34.9            | 7.7       | 38.5      | 53.1            | 73.9           | 20.8        | 193         | 295          |        |
| Vert.    | 7386.000        | PK       | 45.4           | 36.3            | 8.3       | 39.0      | 51.0            | 73.9           | 22.9        | 100         | 0            |        |
| Vert.    | 9848.000        | PK       | 43.6           | 38.6            | 9.3       | 37.2      | 54.3            | 73.9           | 19.6        | 100         | 235          |        |
| Vert.    | 12310.000       | PK       | 43.0           | 39.1            | 10.7      | 37.6      | 55.2            | 73.9           | 18.7        | 100         | 0            |        |
| Vert.    | 2483.500        | AV       | 32.2           | 27.4            | 24.4      | 38.1      | 45.9            | 53.9           | 8.0         | 106         | 163          |        |
| Vert.    | 4924.000        | AV       | 35.2           | 31.1            | 6.6       | 36.9      | 36.0            | 53.9           | 17.9        | 100         | 195          |        |
| Vert.    | 6565.568        | AV       | 43.2           | 34.9            | 7.7       | 38.5      | 47.3            | 53.9           | 6.6         | 193         | 295          |        |
| Vert.    | 7386.000        | AV       | 34.5           | 36.3            | 8.3       | 39.0      | 40.1            | 53.9           | 13.8        | 100         | 0            |        |
| Vert.    | 9848.000        | AV       | 31.8           | 38.6            | 9.3       | 37.2      | 42.5            | 53.9           | 11.4        | 100         | 235          |        |
| Vert.    | 12310.000       | AV       | 32.5           | 39.1            | 10.7      | 37.6      | 44.7            | 53.9           | 9.2         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



## Radiated Emission

|                        |  |                  |                  |                 |
|------------------------|--|------------------|------------------|-----------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab. No.2 and 3 Semi Anechoic Chamber  |                  |                  |                 |
| Date                   | August 23, 2012  | August 27, 2012  | August 27, 2012  | August 29, 2012 |
| Temperature / Humidity | 23 deg.C , 61%RH   | 26 deg.C , 61%RH | 25 deg.C , 60%RH | 25 deg.C, 57%RH |
| Engineer               | Shinichi Takano  | Hikaru Shirasawa | Tatsuya Arai     | Akira Sato      |
|                        | (No.2 SAC)   | (No.3 SAC)       | (No.3 SAC)       | (No.3 SAC)      |
| Mode                   | Tx, 2412 MHz   |                  |                  |                 |
|                        | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm |                  |                  |                 |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 240.000         | QP       | 49.4           | 16.9            | 8.2       | 32.0      | 42.5            | 46.0           | 3.5         | 137         | 75           |        |
| Hori.    | 336.002         | QP       | 52.6           | 14.8            | 8.7       | 32.0      | 44.1            | 46.0           | 1.9         | 100         | 74           |        |
| Hori.    | 431.999         | QP       | 47.8           | 16.8            | 9.2       | 32.0      | 41.8            | 46.0           | 4.2         | 100         | 45           |        |
| Hori.    | 623.995         | QP       | 44.5           | 19.4            | 9.9       | 32.0      | 41.8            | 46.0           | 4.2         | 166         | 4            |        |
| Hori.    | 672.000         | QP       | 40.6           | 20.1            | 10.0      | 31.9      | 38.8            | 46.0           | 7.2         | 154         | 50           |        |
| Hori.    | 2390.000        | PK       | 50.1           | 27.2            | 24.4      | 38.2      | 63.5            | 73.9           | 10.4        | 106         | 157          |        |
| Hori.    | 4824.000        | PK       | 48.0           | 31.1            | 6.8       | 41.2      | 44.7            | 73.9           | 29.2        | 100         | 96           |        |
| Hori.    | 6432.290        | PK       | 51.7           | 34.9            | 7.5       | 40.6      | 53.5            | 73.9           | 20.4        | 100         | 136          |        |
| Hori.    | 7236.000        | PK       | 49.2           | 36.6            | 8.5       | 41.4      | 52.9            | 73.9           | 21.0        | 100         | 0            |        |
| Hori.    | 9648.000        | PK       | 46.3           | 38.6            | 9.4       | 38.9      | 55.4            | 73.9           | 18.5        | 100         | 359          |        |
| Hori.    | 12060.000       | PK       | 47.4           | 39.5            | 10.7      | 39.4      | 58.2            | 73.9           | 15.7        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 32.2           | 27.2            | 24.4      | 38.2      | 45.6            | 53.9           | 8.3         | 106         | 157          |        |
| Hori.    | 4824.000        | AV       | 36.4           | 31.1            | 6.8       | 41.2      | 33.1            | 53.9           | 20.8        | 100         | 96           |        |
| Hori.    | 6432.290        | AV       | 45.7           | 34.9            | 7.5       | 40.6      | 47.5            | 53.9           | 6.4         | 100         | 136          |        |
| Hori.    | 7236.000        | AV       | 35.9           | 36.6            | 8.5       | 41.4      | 39.6            | 53.9           | 14.3        | 100         | 0            |        |
| Hori.    | 9648.000        | AV       | 33.1           | 38.6            | 9.4       | 38.9      | 42.2            | 53.9           | 11.7        | 100         | 359          |        |
| Hori.    | 12060.000       | AV       | 34.1           | 39.5            | 10.7      | 39.4      | 44.9            | 53.9           | 9.0         | 100         | 0            |        |
| Vert.    | 48.001          | QP       | 51.6           | 11.7            | 6.8       | 32.2      | 37.9            | 40.0           | 2.1         | 100         | 244          |        |
| Vert.    | 624.005         | QP       | 43.5           | 19.4            | 9.9       | 32.0      | 40.8            | 46.0           | 5.2         | 100         | 84           |        |
| Vert.    | 2390.000        | PK       | 47.1           | 27.2            | 24.4      | 38.2      | 60.5            | 73.9           | 13.4        | 107         | 171          |        |
| Vert.    | 4824.000        | PK       | 48.0           | 31.1            | 6.8       | 41.2      | 44.7            | 73.9           | 29.2        | 100         | 0            |        |
| Vert.    | 6432.290        | PK       | 51.4           | 34.9            | 7.5       | 40.6      | 53.2            | 73.9           | 20.7        | 100         | 136          |        |
| Vert.    | 7236.000        | PK       | 49.2           | 36.6            | 8.5       | 41.4      | 52.9            | 73.9           | 21.0        | 100         | 359          |        |
| Vert.    | 9648.000        | PK       | 46.4           | 38.6            | 9.4       | 38.9      | 55.5            | 73.9           | 18.4        | 100         | 0            |        |
| Vert.    | 12060.000       | PK       | 47.3           | 39.5            | 10.7      | 39.4      | 58.1            | 73.9           | 15.8        | 100         | 359          |        |
| Vert.    | 2390.000        | AV       | 31.7           | 27.2            | 24.4      | 38.2      | 45.1            | 53.9           | 8.8         | 107         | 171          |        |
| Vert.    | 4824.000        | AV       | 35.4           | 31.1            | 6.8       | 41.2      | 32.1            | 53.9           | 21.8        | 100         | 0            |        |
| Vert.    | 6432.290        | AV       | 44.2           | 34.9            | 7.5       | 40.6      | 46.0            | 53.9           | 7.9         | 100         | 136          |        |
| Vert.    | 7236.000        | AV       | 35.9           | 36.6            | 8.5       | 41.4      | 39.6            | 53.9           | 14.3        | 100         | 359          |        |
| Vert.    | 9648.000        | AV       | 32.5           | 38.6            | 9.4       | 38.9      | 41.6            | 53.9           | 12.3        | 100         | 0            |        |
| Vert.    | 12060.000       | AV       | 33.9           | 39.5            | 10.7      | 39.4      | 44.7            | 53.9           | 9.2         | 100         | 359          |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2412.000        | PK       | 76.3           | 27.3              | 24.4      | 38.2      | 89.8            | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 40.6           | 27.3              | 24.4      | 38.2      | 54.1            | 69.8           | 15.7        |         |
| Vert.    | 2412.000        | PK       | 74.1           | 27.3              | 24.4      | 38.2      | 87.6            | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 38.4           | 27.3              | 24.4      | 38.2      | 51.9            | 67.6           | 15.7        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumioka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 27, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 26 deg.C , 61%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Hikaru Shirasawa                 | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.3 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2437 MHz   |                                  |                  |
|                        | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 4874.000        | PK       | 47.7           | 31.3            | 6.9       | 41.1      | 44.8            | 73.9           | 29.1        | 100         | 224          |        |
| Hori.    | 6498.898        | PK       | 50.9           | 35.2            | 7.5       | 40.7      | 52.9            | 73.9           | 21.0        | 100         | 135          |        |
| Hori.    | 7311.000        | PK       | 47.0           | 36.6            | 8.6       | 41.4      | 50.8            | 73.9           | 23.1        | 100         | 0            |        |
| Hori.    | 9748.000        | PK       | 45.7           | 38.7            | 9.5       | 38.9      | 55.0            | 73.9           | 18.9        | 100         | 359          |        |
| Hori.    | 12185.000       | PK       | 45.9           | 39.5            | 10.7      | 39.3      | 56.8            | 73.9           | 17.1        | 100         | 0            |        |
| Hori.    | 4874.000        | AV       | 35.8           | 31.3            | 6.9       | 41.1      | 32.9            | 53.9           | 21.0        | 100         | 224          |        |
| Hori.    | 6498.898        | AV       | 45.1           | 35.2            | 7.5       | 40.7      | 47.1            | 53.9           | <b>6.8</b>  | 100         | 135          |        |
| Hori.    | 7311.000        | AV       | 35.2           | 36.6            | 8.6       | 41.4      | 39.0            | 53.9           | 14.9        | 100         | 0            |        |
| Hori.    | 9748.000        | AV       | 32.7           | 38.7            | 9.5       | 38.9      | 42.0            | 53.9           | 11.9        | 100         | 359          |        |
| Hori.    | 12185.000       | AV       | 32.7           | 39.5            | 10.7      | 39.3      | 43.6            | 53.9           | 10.3        | 100         | 0            |        |
| Vert.    | 4874.000        | PK       | 48.2           | 31.3            | 6.9       | 41.1      | 45.3            | 73.9           | 28.6        | 100         | 14           |        |
| Vert.    | 6498.898        | PK       | 49.4           | 35.2            | 7.5       | 40.7      | 51.4            | 73.9           | 22.5        | 100         | 0            |        |
| Vert.    | 7311.000        | PK       | 48.0           | 36.6            | 8.6       | 41.4      | 51.8            | 73.9           | 22.1        | 100         | 359          |        |
| Vert.    | 9748.000        | PK       | 45.6           | 38.7            | 9.5       | 38.9      | 54.9            | 73.9           | 19.0        | 100         | 359          |        |
| Vert.    | 12185.000       | PK       | 45.7           | 39.5            | 10.7      | 39.3      | 56.6            | 73.9           | 17.3        | 100         | 0            |        |
| Vert.    | 4874.000        | AV       | 35.3           | 31.3            | 6.9       | 41.1      | 32.4            | 53.9           | 21.5        | 100         | 14           |        |
| Vert.    | 6498.898        | AV       | 41.7           | 35.2            | 7.5       | 40.7      | 43.7            | 53.9           | 10.2        | 100         | 0            |        |
| Vert.    | 7311.000        | AV       | 34.9           | 36.6            | 8.6       | 41.4      | 38.7            | 53.9           | 15.2        | 100         | 359          |        |
| Vert.    | 9748.000        | AV       | 32.2           | 38.7            | 9.5       | 38.9      | 41.5            | 53.9           | 12.4        | 100         | 359          |        |
| Vert.    | 12185.000       | AV       | 32.5           | 39.5            | 10.7      | 39.3      | 43.4            | 53.9           | 10.5        | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 27, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 26 deg.C , 61%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Hikaru Shirasawa                 | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.3 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2462 MHz   |                                  |                  |
|                        | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2483.500        | PK       | 51.5           | 27.4            | 24.4      | 38.1      | 65.2            | 73.9           | 8.7         | 103         | 159          |        |
| Hori.    | 4924.000        | PK       | 48.8           | 31.5            | 6.9       | 41.0      | 46.2            | 73.9           | 27.7        | 100         | 291          |        |
| Hori.    | 6565.718        | PK       | 50.7           | 35.3            | 7.7       | 40.8      | 52.9            | 73.9           | 21.0        | 100         | 137          |        |
| Hori.    | 7386.000        | PK       | 47.1           | 36.7            | 8.7       | 41.5      | 51.0            | 73.9           | 22.9        | 100         | 0            |        |
| Hori.    | 9848.000        | PK       | 44.2           | 38.9            | 9.5       | 38.9      | 53.7            | 73.9           | 20.2        | 100         | 359          |        |
| Hori.    | 12310.000       | PK       | 44.1           | 39.5            | 10.8      | 39.3      | 55.1            | 73.9           | 18.8        | 100         | 0            |        |
| Hori.    | 2483.500        | AV       | 31.7           | 27.4            | 24.4      | 38.1      | 45.4            | 53.9           | 8.5         | 103         | 159          |        |
| Hori.    | 4924.000        | AV       | 35.8           | 31.5            | 6.9       | 41.0      | 33.2            | 53.9           | 20.7        | 100         | 291          |        |
| Hori.    | 6565.718        | AV       | 45.5           | 35.3            | 7.7       | 40.8      | 47.7            | 53.9           | 6.2         | 100         | 137          |        |
| Hori.    | 7386.000        | AV       | 35.0           | 36.7            | 8.7       | 41.5      | 38.9            | 53.9           | 15.0        | 100         | 0            |        |
| Hori.    | 9848.000        | AV       | 32.0           | 38.9            | 9.5       | 38.9      | 41.5            | 53.9           | 12.4        | 100         | 359          |        |
| Hori.    | 12310.000       | AV       | 31.7           | 39.5            | 10.8      | 39.3      | 42.7            | 53.9           | 11.2        | 100         | 0            |        |
| Vert.    | 2483.500        | PK       | 49.7           | 27.4            | 24.4      | 38.1      | 63.4            | 73.9           | 10.5        | 106         | 163          |        |
| Vert.    | 4924.000        | PK       | 47.3           | 31.5            | 6.9       | 41.0      | 44.7            | 73.9           | 29.2        | 100         | 359          |        |
| Vert.    | 6565.718        | PK       | 48.3           | 35.3            | 7.7       | 40.8      | 50.5            | 73.9           | 23.4        | 100         | 82           |        |
| Vert.    | 7386.000        | PK       | 47.8           | 36.7            | 8.7       | 41.5      | 51.7            | 73.9           | 22.2        | 100         | 359          |        |
| Vert.    | 9848.000        | PK       | 44.7           | 38.9            | 9.5       | 38.9      | 54.2            | 73.9           | 19.7        | 100         | 359          |        |
| Vert.    | 12310.000       | PK       | 43.8           | 39.5            | 10.8      | 39.3      | 54.8            | 73.9           | 19.1        | 100         | 0            |        |
| Vert.    | 2483.500        | AV       | 31.6           | 27.4            | 24.4      | 38.1      | 45.3            | 53.9           | 8.6         | 106         | 163          |        |
| Vert.    | 4924.000        | AV       | 36.1           | 31.5            | 6.9       | 41.0      | 33.5            | 53.9           | 20.4        | 100         | 359          |        |
| Vert.    | 6565.718        | AV       | 40.0           | 35.3            | 7.7       | 40.8      | 42.2            | 53.9           | 11.7        | 100         | 82           |        |
| Vert.    | 7386.000        | AV       | 34.7           | 36.7            | 8.7       | 41.5      | 38.6            | 53.9           | 15.3        | 100         | 359          |        |
| Vert.    | 9848.000        | AV       | 31.6           | 38.9            | 9.5       | 38.9      | 41.1            | 53.9           | 12.8        | 100         | 359          |        |
| Vert.    | 12310.000       | AV       | 31.6           | 39.5            | 10.8      | 39.3      | 42.6            | 53.9           | 11.3        | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 25, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Tatsuya Arai                     | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.2 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2412   | MHz                              |                  |
|                        | Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2390.000        | PK       | 54.8           | 27.2            | 24.4      | 38.2      | 68.2            | 73.9           | 5.7         | 115         | 153          |        |
| Hori.    | 4824.000        | PK       | 44.6           | 30.8            | 6.6       | 37.0      | 45.0            | 73.9           | 28.9        | 100         | 145          |        |
| Hori.    | 6432.212        | PK       | 50.0           | 34.5            | 7.6       | 38.3      | 53.8            | 73.9           | 20.1        | 100         | 194          |        |
| Hori.    | 7236.000        | PK       | 45.6           | 36.2            | 8.0       | 39.0      | 50.8            | 73.9           | 23.1        | 100         | 0            |        |
| Hori.    | 9648.000        | PK       | 42.2           | 38.3            | 9.2       | 37.2      | 52.5            | 73.9           | 21.4        | 100         | 0            |        |
| Hori.    | 12060.000       | PK       | 43.7           | 39.2            | 10.5      | 37.9      | 55.5            | 73.9           | 18.4        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 34.5           | 27.2            | 24.4      | 38.2      | 47.9            | 53.9           | 6.0         | 115         | 153          |        |
| Hori.    | 4824.000        | AV       | 33.3           | 30.8            | 6.6       | 37.0      | 33.7            | 53.9           | 20.2        | 100         | 145          |        |
| Hori.    | 6432.212        | AV       | 45.2           | 34.5            | 7.6       | 38.3      | 49.0            | 53.9           | <b>4.9</b>  | 100         | 194          |        |
| Hori.    | 7236.000        | AV       | 34.4           | 36.2            | 8.0       | 39.0      | 39.6            | 53.9           | 14.3        | 100         | 0            |        |
| Hori.    | 9648.000        | AV       | 31.2           | 38.3            | 9.2       | 37.2      | 41.5            | 53.9           | 12.4        | 100         | 0            |        |
| Hori.    | 12060.000       | AV       | 32.8           | 39.2            | 10.5      | 37.9      | 44.6            | 53.9           | 9.3         | 100         | 0            |        |
| Vert.    | 2390.000        | PK       | 48.4           | 27.2            | 24.4      | 38.2      | 61.8            | 73.9           | 12.1        | 110         | 223          |        |
| Vert.    | 4824.000        | PK       | 44.8           | 30.8            | 6.6       | 37.0      | 45.2            | 73.9           | 28.7        | 100         | 200          |        |
| Vert.    | 6432.212        | PK       | 48.0           | 34.5            | 7.6       | 38.3      | 51.8            | 73.9           | 22.1        | 104         | 297          |        |
| Vert.    | 7236.000        | PK       | 46.1           | 36.2            | 8.0       | 39.0      | 51.3            | 73.9           | 22.6        | 100         | 231          |        |
| Vert.    | 9648.000        | PK       | 42.0           | 38.3            | 9.2       | 37.2      | 52.3            | 73.9           | 21.6        | 100         | 0            |        |
| Vert.    | 12060.000       | PK       | 43.6           | 39.2            | 10.5      | 37.9      | 55.4            | 73.9           | 18.5        | 100         | 0            |        |
| Vert.    | 2390.000        | AV       | 32.1           | 27.2            | 24.4      | 38.2      | 45.5            | 53.9           | 8.4         | 110         | 223          |        |
| Vert.    | 4824.000        | AV       | 33.3           | 30.8            | 6.6       | 37.0      | 33.7            | 53.9           | 20.2        | 100         | 200          |        |
| Vert.    | 6432.212        | AV       | 42.0           | 34.5            | 7.6       | 38.3      | 45.8            | 53.9           | 8.1         | 104         | 297          |        |
| Vert.    | 7236.000        | AV       | 34.7           | 36.2            | 8.0       | 39.0      | 39.9            | 53.9           | 14.0        | 100         | 231          |        |
| Vert.    | 9648.000        | AV       | 31.1           | 38.3            | 9.2       | 37.2      | 41.4            | 53.9           | 12.5        | 100         | 0            |        |
| Vert.    | 12060.000       | AV       | 32.8           | 39.2            | 10.5      | 37.9      | 44.6            | 53.9           | 9.3         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2412.000        | PK       | 78.7           | 27.3              | 24.4      | 38.2      | 92.2            | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 42.8           | 27.3              | 24.4      | 38.2      | 56.3            | 72.2           | 15.9        |         |
| Vert.    | 2412.000        | PK       | 75.1           | 27.3              | 24.4      | 38.2      | 88.6            | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 43.4           | 27.3              | 24.4      | 38.2      | 56.9            | 68.6           | 11.7        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
Date                            August 23, 2012                                   August 25, 2012                                   August 27, 2012  
Temperature / Humidity    23 deg.C , 61%RH                           25 deg.C , 67%RH                           25 deg.C , 60%RH  
Engineer                     Shinichi Takano                               Tatsuya Arai                                   Tatsuya Arai  
                                     (No.2 SAC)                                   (No.2 SAC)                                   (No.3 SAC)  
Mode                           Tx, 2437   MHz  
                                     Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[deg.] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|----------------|-----------------|--------|
| Hori.    | 4874.000           | PK       | 46.1              | 31.0               | 6.6          | 36.9         | 46.8               | 73.9              | 27.1           | 100            | 340             |        |
| Hori.    | 6498.949           | PK       | 49.4              | 34.7               | 7.6          | 38.4         | 53.3               | 73.9              | 20.6           | 100            | 197             |        |
| Hori.    | 7311.000           | PK       | 45.2              | 36.2               | 8.2          | 39.0         | 50.6               | 73.9              | 23.3           | 100            | 0               |        |
| Hori.    | 9748.000           | PK       | 42.6              | 38.4               | 9.3          | 37.2         | 53.1               | 73.9              | 20.8           | 100            | 0               |        |
| Hori.    | 12185.000          | PK       | 43.5              | 39.2               | 10.5         | 37.7         | 55.5               | 73.9              | 18.4           | 100            | 0               |        |
| Hori.    | 4874.000           | AV       | 34.4              | 31.0               | 6.6          | 36.9         | 35.1               | 53.9              | 18.8           | 100            | 340             |        |
| Hori.    | 6498.949           | AV       | 43.9              | 34.7               | 7.6          | 38.4         | 47.8               | 53.9              | 6.1            | 100            | 197             |        |
| Hori.    | 7311.000           | AV       | 34.4              | 36.2               | 8.2          | 39.0         | 39.8               | 53.9              | 14.1           | 100            | 0               |        |
| Hori.    | 9748.000           | AV       | 31.3              | 38.4               | 9.3          | 37.2         | 41.8               | 53.9              | 12.1           | 100            | 0               |        |
| Hori.    | 12185.000          | AV       | 32.7              | 39.2               | 10.5         | 37.7         | 44.7               | 53.9              | 9.2            | 100            | 0               |        |
| Vert.    | 4874.000           | PK       | 45.2              | 31.0               | 6.6          | 36.9         | 45.9               | 73.9              | 28.0           | 100            | 199             |        |
| Vert.    | 6498.949           | PK       | 48.2              | 34.7               | 7.6          | 38.4         | 52.1               | 73.9              | 21.8           | 182            | 298             |        |
| Vert.    | 7311.000           | PK       | 45.9              | 36.2               | 8.2          | 39.0         | 51.3               | 73.9              | 22.6           | 100            | 0               |        |
| Vert.    | 9748.000           | PK       | 43.1              | 38.4               | 9.3          | 37.2         | 53.6               | 73.9              | 20.3           | 100            | 237             |        |
| Vert.    | 12185.000          | PK       | 42.9              | 39.2               | 10.5         | 37.7         | 54.9               | 73.9              | 19.0           | 100            | 0               |        |
| Vert.    | 4874.000           | AV       | 33.6              | 31.0               | 6.6          | 36.9         | 34.3               | 53.9              | 19.6           | 100            | 199             |        |
| Vert.    | 6498.949           | AV       | 42.4              | 34.7               | 7.6          | 38.4         | 46.3               | 53.9              | 7.6            | 182            | 298             |        |
| Vert.    | 7311.000           | AV       | 34.4              | 36.2               | 8.2          | 39.0         | 39.8               | 53.9              | 14.1           | 100            | 0               |        |
| Vert.    | 9748.000           | AV       | 31.7              | 38.4               | 9.3          | 37.2         | 42.2               | 53.9              | 11.7           | 100            | 237             |        |
| Vert.    | 12185.000          | AV       | 32.7              | 39.2               | 10.5         | 37.7         | 44.7               | 53.9              | 9.2            | 100            | 0               |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 25, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takanc  | Tatsuya Arai                     | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.2 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2462 MHz   |                                  |                  |
|                        | Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2483.500        | PK       | 52.2           | 27.4            | 24.4      | 38.1      | 65.9            | 73.9           | 8.0         | 103         | 157          |        |
| Hori.    | 4924.000        | PK       | 48.3           | 31.1            | 6.6       | 36.9      | 49.1            | 73.9           | 24.8        | 100         | 339          |        |
| Hori.    | 6565.578        | PK       | 49.9           | 34.9            | 7.7       | 38.5      | 54.0            | 73.9           | 19.9        | 100         | 202          |        |
| Hori.    | 7386.000        | PK       | 45.4           | 36.3            | 8.3       | 39.0      | 51.0            | 73.9           | 22.9        | 100         | 0            |        |
| Hori.    | 9848.000        | PK       | 43.1           | 38.6            | 9.3       | 37.2      | 53.8            | 73.9           | 20.1        | 100         | 0            |        |
| Hori.    | 12310.000       | PK       | 44.1           | 39.1            | 10.7      | 37.6      | 56.3            | 73.9           | 17.6        | 100         | 0            |        |
| Hori.    | 2483.500        | AV       | 32.8           | 27.4            | 24.4      | 38.1      | 46.5            | 53.9           | 7.4         | 103         | 157          |        |
| Hori.    | 4924.000        | AV       | 36.6           | 31.1            | 6.6       | 36.9      | 37.4            | 53.9           | 16.5        | 100         | 339          |        |
| Hori.    | 6565.578        | AV       | 44.5           | 34.9            | 7.7       | 38.5      | 48.6            | 53.9           | <b>5.3</b>  | 100         | 202          |        |
| Hori.    | 7386.000        | AV       | 34.5           | 36.3            | 8.3       | 39.0      | 40.1            | 53.9           | 13.8        | 100         | 0            |        |
| Hori.    | 9848.000        | AV       | 31.4           | 38.6            | 9.3       | 37.2      | 42.1            | 53.9           | 11.8        | 100         | 0            |        |
| Hori.    | 12310.000       | AV       | 32.6           | 39.1            | 10.7      | 37.6      | 44.8            | 53.9           | 9.1         | 100         | 0            |        |
| Vert.    | 2483.500        | PK       | 47.9           | 27.4            | 24.4      | 38.1      | 61.6            | 73.9           | 12.3        | 104         | 222          |        |
| Vert.    | 4924.000        | PK       | 46.7           | 31.1            | 6.6       | 36.9      | 47.5            | 73.9           | 26.4        | 100         | 198          |        |
| Vert.    | 6565.578        | PK       | 49.0           | 34.9            | 7.7       | 38.5      | 53.1            | 73.9           | 20.8        | 189         | 297          |        |
| Vert.    | 7386.000        | PK       | 45.9           | 36.3            | 8.3       | 39.0      | 51.5            | 73.9           | 22.4        | 100         | 0            |        |
| Vert.    | 9848.000        | PK       | 43.2           | 38.6            | 9.3       | 37.2      | 53.9            | 73.9           | 20.0        | 100         | 232          |        |
| Vert.    | 12310.000       | PK       | 43.4           | 39.1            | 10.7      | 37.6      | 55.6            | 73.9           | 18.3        | 100         | 0            |        |
| Vert.    | 2483.500        | AV       | 32.6           | 27.4            | 24.4      | 38.1      | 46.3            | 53.9           | 7.6         | 104         | 222          |        |
| Vert.    | 4924.000        | AV       | 34.7           | 31.1            | 6.6       | 36.9      | 35.5            | 53.9           | 18.4        | 100         | 198          |        |
| Vert.    | 6565.578        | AV       | 43.1           | 34.9            | 7.7       | 38.5      | 47.2            | 53.9           | 6.7         | 189         | 297          |        |
| Vert.    | 7386.000        | AV       | 34.5           | 36.3            | 8.3       | 39.0      | 40.1            | 53.9           | 13.8        | 100         | 0            |        |
| Vert.    | 9848.000        | AV       | 31.7           | 38.6            | 9.3       | 37.2      | 42.4            | 53.9           | 11.5        | 100         | 232          |        |
| Vert.    | 12310.000       | AV       | 32.6           | 39.1            | 10.7      | 37.6      | 44.8            | 53.9           | 9.1         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 27, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 26 deg.C , 61%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Hikaru Shirasawa                 | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.3 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2412 MHz   |                                  |                  |
|                        | Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2390.000        | PK       | 53.7           | 27.2            | 24.4      | 38.2      | 67.1            | 73.9           | 6.8         | 115         | 153          |        |
| Hori.    | 4824.000        | PK       | 47.8           | 31.1            | 6.8       | 41.2      | 44.7            | 73.9           | 29.4        | 100         | 96           |        |
| Hori.    | 6432.429        | PK       | 51.7           | 34.9            | 7.5       | 40.6      | 53.5            | 73.9           | 20.4        | 100         | 137          |        |
| Hori.    | 7236.000        | PK       | 48.5           | 36.6            | 8.5       | 41.4      | 52.9            | 73.9           | 21.7        | 100         | 0            |        |
| Hori.    | 9648.000        | PK       | 45.3           | 38.6            | 9.4       | 38.9      | 55.4            | 73.9           | 19.5        | 100         | 359          |        |
| Hori.    | 12060.000       | PK       | 45.7           | 39.5            | 10.7      | 39.4      | 58.2            | 73.9           | 17.4        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 32.9           | 27.2            | 24.4      | 38.2      | 46.3            | 53.9           | 7.6         | 115         | 153          |        |
| Hori.    | 4824.000        | AV       | 36.6           | 31.1            | 6.8       | 41.2      | 33.1            | 53.9           | 20.6        | 100         | 96           |        |
| Hori.    | 6432.429        | AV       | 45.4           | 34.9            | 7.5       | 40.6      | 47.5            | 53.9           | 6.7         | 100         | 137          |        |
| Hori.    | 7236.000        | AV       | 35.8           | 36.6            | 8.5       | 41.4      | 39.6            | 53.9           | 14.4        | 100         | 0            |        |
| Hori.    | 9648.000        | AV       | 32.0           | 38.6            | 9.4       | 38.9      | 42.2            | 53.9           | 12.8        | 100         | 359          |        |
| Hori.    | 12060.000       | AV       | 33.0           | 39.5            | 10.7      | 39.4      | 44.9            | 53.9           | 10.1        | 100         | 0            |        |
| Vert.    | 2390.000        | PK       | 48.0           | 27.2            | 24.4      | 38.2      | 61.4            | 73.9           | 12.5        | 110         | 223          |        |
| Vert.    | 4824.000        | PK       | 48.0           | 31.1            | 6.8       | 41.2      | 44.7            | 73.9           | 29.2        | 100         | 190          |        |
| Vert.    | 6432.429        | PK       | 50.8           | 34.9            | 7.5       | 40.6      | 53.2            | 73.9           | 21.3        | 100         | 267          |        |
| Vert.    | 7236.000        | PK       | 48.7           | 36.6            | 8.5       | 41.4      | 52.9            | 73.9           | 21.5        | 100         | 359          |        |
| Vert.    | 9648.000        | PK       | 45.6           | 38.6            | 9.4       | 38.9      | 55.5            | 73.9           | 19.2        | 100         | 359          |        |
| Vert.    | 12060.000       | PK       | 47.1           | 39.5            | 10.7      | 39.4      | 58.1            | 73.9           | 16.0        | 100         | 0            |        |
| Vert.    | 2390.000        | AV       | 31.9           | 27.2            | 24.4      | 38.2      | 45.3            | 53.9           | 8.6         | 110         | 223          |        |
| Vert.    | 4824.000        | AV       | 35.8           | 31.1            | 6.8       | 41.2      | 32.1            | 53.9           | 21.4        | 100         | 190          |        |
| Vert.    | 6432.429        | AV       | 43.7           | 34.9            | 7.5       | 40.6      | 46.0            | 53.9           | 8.4         | 100         | 267          |        |
| Vert.    | 7236.000        | AV       | 35.7           | 36.6            | 8.5       | 41.4      | 39.6            | 53.9           | 14.5        | 100         | 359          |        |
| Vert.    | 9648.000        | AV       | 32.4           | 38.6            | 9.4       | 38.9      | 41.6            | 53.9           | 12.4        | 100         | 359          |        |
| Vert.    | 12060.000       | AV       | 33.8           | 39.5            | 10.7      | 39.4      | 44.7            | 53.9           | 9.3         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2412.000        | PK       | 74.1           | 27.3              | 24.4      | 38.2      | 87.6            | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 40.7           | 27.3              | 24.4      | 38.2      | 54.2            | 67.6           | 13.4        |         |
| Vert.    | 2412.000        | PK       | 72.3           | 27.3              | 24.4      | 38.2      | 85.8            | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 40.6           | 27.3              | 24.4      | 38.2      | 54.1            | 65.8           | 11.7        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
 Date                            August 23, 2012                                   August 27, 2012                                   August 27, 2012  
 Temperature / Humidity    23 deg.C , 61%RH                           26 deg.C , 61%RH                           25 deg.C , 60%RH  
 Engineer                     Shinichi Takano                               Hikaru Shirasawa                           Tatsuya Arai  
                                      (No.2 SAC)                                       (No.3 SAC)                                       (No.3 SAC)  
 Mode                           Tx, 2437    MHz  
                                      Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 4874.000        | PK       | 49.2           | 31.3            | 6.9       | 41.1      | 46.3            | 73.9           | 27.6        | 100         | 103          |        |
| Hori.    | 6499.068        | PK       | 51.1           | 35.2            | 7.5       | 40.7      | 53.1            | 73.9           | 20.8        | 100         | 149          |        |
| Hori.    | 7311.000        | PK       | 48.4           | 36.6            | 8.6       | 41.4      | 52.2            | 73.9           | 21.7        | 100         | 0            |        |
| Hori.    | 9748.000        | PK       | 44.9           | 38.7            | 9.5       | 38.9      | 54.2            | 73.9           | 19.7        | 100         | 359          |        |
| Hori.    | 12185.000       | PK       | 45.2           | 39.5            | 10.7      | 39.3      | 56.1            | 73.9           | 17.8        | 100         | 0            |        |
| Hori.    | 4874.000        | AV       | 36.0           | 31.3            | 6.9       | 41.1      | 33.1            | 53.9           | 20.8        | 100         | 103          |        |
| Hori.    | 6499.068        | AV       | 45.1           | 35.2            | 7.5       | 40.7      | 47.1            | 53.9           | 6.8         | 100         | 149          |        |
| Hori.    | 7311.000        | AV       | 35.1           | 36.6            | 8.6       | 41.4      | 38.9            | 53.9           | 15.0        | 100         | 0            |        |
| Hori.    | 9748.000        | AV       | 32.6           | 38.7            | 9.5       | 38.9      | 41.9            | 53.9           | 12.0        | 100         | 359          |        |
| Hori.    | 12185.000       | AV       | 32.5           | 39.5            | 10.7      | 39.3      | 43.4            | 53.9           | 10.5        | 100         | 0            |        |
| Vert.    | 4874.000        | PK       | 49.2           | 31.3            | 6.9       | 41.1      | 46.3            | 73.9           | 27.6        | 100         | 3            |        |
| Vert.    | 6499.068        | PK       | 49.8           | 35.2            | 7.5       | 40.7      | 51.8            | 73.9           | 22.1        | 100         | 108          |        |
| Vert.    | 7311.000        | PK       | 47.5           | 36.6            | 8.6       | 41.4      | 51.3            | 73.9           | 22.6        | 100         | 359          |        |
| Vert.    | 9748.000        | PK       | 44.4           | 38.7            | 9.5       | 38.9      | 53.7            | 73.9           | 20.2        | 100         | 359          |        |
| Vert.    | 12185.000       | PK       | 45.2           | 39.5            | 10.7      | 39.3      | 56.1            | 73.9           | 17.8        | 100         | 0            |        |
| Vert.    | 4874.000        | AV       | 35.3           | 31.3            | 6.9       | 41.1      | 32.4            | 53.9           | 21.5        | 100         | 3            |        |
| Vert.    | 6499.068        | AV       | 42.8           | 35.2            | 7.5       | 40.7      | 44.8            | 53.9           | 9.1         | 100         | 108          |        |
| Vert.    | 7311.000        | AV       | 34.6           | 36.6            | 8.6       | 41.4      | 38.4            | 53.9           | 15.5        | 100         | 359          |        |
| Vert.    | 9748.000        | AV       | 32.1           | 38.7            | 9.5       | 38.9      | 41.4            | 53.9           | 12.5        | 100         | 359          |        |
| Vert.    | 12185.000       | AV       | 32.3           | 39.5            | 10.7      | 39.3      | 43.2            | 53.9           | 10.7        | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
Date                           August 23, 2012   August 27, 2012   August 27, 2012  
Temperature / Humidity    23 deg.C , 61%RH                                   26 deg.C , 61%RH                                   25 deg.C , 60%RH  
Engineer                    Shinichi Takano                                      Hikaru Shirasawa                                   Tatsuya Arai  
                                  (No.2 SAC)   (No.3 SAC)   (No.3 SAC)  
Mode                           Tx, 2462   MHz  
                                  Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2483.500        | PK       | 49.5           | 27.4            | 24.4      | 38.1      | 63.2            | 73.9           | 10.7        | 103         | 157          |        |
| Hori.    | 4924.000        | PK       | 49.7           | 31.5            | 6.9       | 41.0      | 47.1            | 73.9           | 26.8        | 100         | 213          |        |
| Hori.    | 6565.647        | PK       | 51.1           | 35.3            | 7.7       | 40.8      | 53.3            | 73.9           | 20.6        | 100         | 151          |        |
| Hori.    | 7386.000        | PK       | 47.2           | 36.7            | 8.7       | 41.5      | 51.1            | 73.9           | 22.8        | 100         | 0            |        |
| Hori.    | 9848.000        | PK       | 44.4           | 38.9            | 9.5       | 38.9      | 53.9            | 73.9           | 20.0        | 100         | 359          |        |
| Hori.    | 12310.000       | PK       | 44.9           | 39.5            | 10.8      | 39.3      | 55.9            | 73.9           | 18.0        | 100         | 0            |        |
| Hori.    | 2483.500        | AV       | 32.7           | 27.4            | 24.4      | 38.1      | 46.4            | 53.9           | 7.5         | 103         | 157          |        |
| Hori.    | 4924.000        | AV       | 36.2           | 31.5            | 6.9       | 41.0      | 33.6            | 53.9           | 20.3        | 100         | 213          |        |
| Hori.    | 6565.647        | AV       | 44.6           | 35.3            | 7.7       | 40.8      | 46.8            | 53.9           | <b>7.1</b>  | 100         | 151          |        |
| Hori.    | 7386.000        | AV       | 35.1           | 36.7            | 8.7       | 41.5      | 39.0            | 53.9           | 14.9        | 100         | 0            |        |
| Hori.    | 9848.000        | AV       | 32.2           | 38.9            | 9.5       | 38.9      | 41.7            | 53.9           | 12.2        | 100         | 359          |        |
| Hori.    | 12310.000       | AV       | 32.0           | 39.5            | 10.8      | 39.3      | 43.0            | 53.9           | 10.9        | 100         | 0            |        |
| Vert.    | 2483.500        | PK       | 45.6           | 27.4            | 24.4      | 38.1      | 59.3            | 73.9           | 14.6        | 104         | 222          |        |
| Vert.    | 4924.000        | PK       | 48.7           | 31.5            | 6.9       | 41.0      | 46.1            | 73.9           | 27.8        | 100         | 158          |        |
| Vert.    | 6565.647        | PK       | 49.6           | 35.3            | 7.7       | 40.8      | 51.8            | 73.9           | 22.1        | 100         | 269          |        |
| Vert.    | 7386.000        | PK       | 46.3           | 36.7            | 8.7       | 41.5      | 50.2            | 73.9           | 23.7        | 100         | 359          |        |
| Vert.    | 9848.000        | PK       | 43.8           | 38.9            | 9.5       | 38.9      | 53.3            | 73.9           | 20.6        | 100         | 359          |        |
| Vert.    | 12310.000       | PK       | 44.4           | 39.5            | 10.8      | 39.3      | 55.4            | 73.9           | 18.5        | 100         | 0            |        |
| Vert.    | 2483.500        | AV       | 32.2           | 27.4            | 24.4      | 38.1      | 46.3            | 53.9           | 8.0         | 104         | 222          |        |
| Vert.    | 4924.000        | AV       | 35.4           | 31.5            | 6.9       | 41.0      | 32.8            | 53.9           | 21.1        | 100         | 158          |        |
| Vert.    | 6565.647        | AV       | 41.4           | 35.3            | 7.7       | 40.8      | 43.6            | 53.9           | 10.3        | 100         | 269          |        |
| Vert.    | 7386.000        | AV       | 34.5           | 36.7            | 8.7       | 41.5      | 38.4            | 53.9           | 15.5        | 100         | 359          |        |
| Vert.    | 9848.000        | AV       | 31.6           | 38.9            | 9.5       | 38.9      | 41.1            | 53.9           | 12.8        | 100         | 359          |        |
| Vert.    | 12310.000       | AV       | 31.9           | 39.5            | 10.8      | 39.3      | 42.9            | 53.9           | 11.0        | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
 Date                            August 23, 2012                                   August 25, 2012                                   August 27, 2012  
 Temperature / Humidity    23 deg.C , 61%RH                           25 deg.C , 67%RH                           25 deg.C , 60%RH  
 Engineer                     Shinichi Takanc                               Tatsuya Arai                                 Tatsuya Arai  
                                   (No.2 SAC)                                   (No.2 SAC)                                   (No.3 SAC)  
 Mode                           Tx, 2422    MHz  
                                   Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2390.000        | PK       | 52.3           | 27.2            | 24.4      | 38.2      | 65.7            | 73.9           | 8.2         | 110         | 149          |        |
| Hori.    | 4844.000        | PK       | 43.9           | 30.9            | 6.6       | 36.9      | 44.5            | 73.9           | 29.4        | 100         | 338          |        |
| Hori.    | 6459.024        | PK       | 49.5           | 34.6            | 7.6       | 38.4      | 53.3            | 73.9           | 20.6        | 100         | 200          |        |
| Hori.    | 7266.000        | PK       | 45.7           | 36.2            | 8.0       | 39.0      | 50.9            | 73.9           | 23.0        | 100         | 0            |        |
| Hori.    | 9688.000        | PK       | 41.8           | 38.3            | 9.2       | 37.2      | 52.1            | 73.9           | 21.8        | 100         | 0            |        |
| Hori.    | 12110.000       | PK       | 43.7           | 39.2            | 10.5      | 37.8      | 55.6            | 73.9           | 18.3        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 35.8           | 27.2            | 24.4      | 38.2      | 49.2            | 53.9           | 4.7         | 110         | 149          |        |
| Hori.    | 4844.000        | AV       | 33.3           | 30.9            | 6.6       | 36.9      | 33.9            | 53.9           | 20.0        | 100         | 338          |        |
| Hori.    | 6459.024        | AV       | 44.8           | 34.6            | 7.6       | 38.4      | 48.6            | 53.9           | 5.3         | 100         | 200          |        |
| Hori.    | 7266.000        | AV       | 34.5           | 36.2            | 8.0       | 39.0      | 39.7            | 53.9           | 14.2        | 100         | 0            |        |
| Hori.    | 9688.000        | AV       | 31.2           | 38.3            | 9.2       | 37.2      | 41.5            | 53.9           | 12.4        | 100         | 0            |        |
| Hori.    | 12110.000       | AV       | 32.9           | 39.2            | 10.5      | 37.8      | 44.8            | 53.9           | 9.1         | 100         | 0            |        |
| Vert.    | 2390.000        | PK       | 50.2           | 27.2            | 24.4      | 38.2      | 63.6            | 73.9           | 10.3        | 103         | 193          |        |
| Vert.    | 4844.000        | PK       | 43.1           | 30.9            | 6.6       | 36.9      | 43.7            | 73.9           | 30.2        | 100         | 4            |        |
| Vert.    | 6459.024        | PK       | 47.5           | 34.6            | 7.6       | 38.4      | 51.3            | 73.9           | 22.6        | 100         | 295          |        |
| Vert.    | 7266.000        | PK       | 45.9           | 36.2            | 8.0       | 39.0      | 51.1            | 73.9           | 22.8        | 100         | 0            |        |
| Vert.    | 9688.000        | PK       | 42.2           | 38.3            | 9.2       | 37.2      | 52.5            | 73.9           | 21.4        | 100         | 0            |        |
| Vert.    | 12110.000       | PK       | 43.4           | 39.2            | 10.5      | 37.8      | 55.3            | 73.9           | 18.6        | 100         | 0            |        |
| Vert.    | 2390.000        | AV       | 32.7           | 27.2            | 24.4      | 38.2      | 46.1            | 53.9           | 7.8         | 103         | 193          |        |
| Vert.    | 4844.000        | AV       | 32.1           | 30.9            | 6.6       | 36.9      | 32.7            | 53.9           | 21.2        | 100         | 4            |        |
| Vert.    | 6459.024        | AV       | 41.8           | 34.6            | 7.6       | 38.4      | 45.6            | 53.9           | 8.3         | 100         | 295          |        |
| Vert.    | 7266.000        | AV       | 34.5           | 36.2            | 8.0       | 39.0      | 39.7            | 53.9           | 14.2        | 100         | 0            |        |
| Vert.    | 9688.000        | AV       | 31.1           | 38.3            | 9.2       | 37.2      | 41.4            | 53.9           | 12.5        | 100         | 0            |        |
| Vert.    | 12110.000       | AV       | 33.0           | 39.2            | 10.5      | 37.8      | 44.9            | 53.9           | 9.0         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

**20dBc Data Sheet (RBW 100kHz, VBW 300kHz)**

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2422.000        | PK       | 76.2           | 27.3              | 24.4      | 38.1      | 89.8            | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 40.1           | 27.3              | 24.4      | 38.2      | 53.6            | 69.8           | 16.2        |         |
| Vert.    | 2422.000        | PK       | 73.4           | 27.3              | 24.4      | 38.1      | 87.0            | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 36.1           | 27.3              | 24.4      | 38.2      | 49.6            | 67.0           | 17.4        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
 Date                            August 23, 2012                                   August 25, 2012                                   August 27, 2012  
 Temperature / Humidity    23 deg.C , 61%RH                           25 deg.C , 67%RH                           25 deg.C , 60%RH  
 Engineer                     Shinichi Takano                               Tatsuya Arai                                   Tatsuya Arai  
                                      (No.2 SAC)                                   (No.2 SAC)                                   (No.3 SAC)  
 Mode                           Tx, 2437   MHz  
                                      Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 4874.000        | PK       | 44.1           | 31.0            | 6.6       | 36.9      | 44.8            | 73.9           | 29.1        | 100         | 342          |        |
| Hori.    | 6499.000        | PK       | 50.2           | 34.7            | 7.6       | 38.4      | 54.1            | 73.9           | 19.8        | 100         | 198          |        |
| Hori.    | 7311.000        | PK       | 44.8           | 36.2            | 8.2       | 39.0      | 50.2            | 73.9           | 23.7        | 100         | 0            |        |
| Hori.    | 9748.000        | PK       | 42.5           | 38.4            | 9.3       | 37.2      | 53.0            | 73.9           | 20.9        | 100         | 0            |        |
| Hori.    | 12185.000       | PK       | 43.0           | 39.2            | 10.5      | 37.7      | 55.0            | 73.9           | 18.9        | 100         | 0            |        |
| Hori.    | 4874.000        | AV       | 33.1           | 31.0            | 6.6       | 36.9      | 33.8            | 53.9           | 20.1        | 100         | 342          |        |
| Hori.    | 6499.000        | AV       | 44.4           | 34.7            | 7.6       | 38.4      | 48.3            | 53.9           | 5.6         | 100         | 198          |        |
| Hori.    | 7311.000        | AV       | 34.3           | 36.2            | 8.2       | 39.0      | 39.7            | 53.9           | 14.2        | 100         | 0            |        |
| Hori.    | 9748.000        | AV       | 31.2           | 38.4            | 9.3       | 37.2      | 41.7            | 53.9           | 12.2        | 100         | 0            |        |
| Hori.    | 12185.000       | AV       | 32.7           | 39.2            | 10.5      | 37.7      | 44.7            | 53.9           | 9.2         | 100         | 0            |        |
| Vert.    | 4874.000        | PK       | 44.0           | 31.0            | 6.6       | 36.9      | 44.7            | 73.9           | 29.2        | 100         | 195          |        |
| Vert.    | 6499.000        | PK       | 48.7           | 34.7            | 7.6       | 38.4      | 52.6            | 73.9           | 21.3        | 187         | 300          |        |
| Vert.    | 7311.000        | PK       | 44.8           | 36.2            | 8.2       | 39.0      | 50.2            | 73.9           | 23.7        | 100         | 0            |        |
| Vert.    | 9748.000        | PK       | 42.5           | 38.4            | 9.3       | 37.2      | 53.0            | 73.9           | 20.9        | 100         | 0            |        |
| Vert.    | 12185.000       | PK       | 43.0           | 39.2            | 10.5      | 37.7      | 55.0            | 73.9           | 18.9        | 100         | 0            |        |
| Vert.    | 4874.000        | AV       | 32.8           | 31.0            | 6.6       | 36.9      | 33.5            | 53.9           | 20.4        | 100         | 195          |        |
| Vert.    | 6499.000        | AV       | 42.4           | 34.7            | 7.6       | 38.4      | 46.3            | 53.9           | 7.6         | 187         | 300          |        |
| Vert.    | 7311.000        | AV       | 34.3           | 36.2            | 8.2       | 39.0      | 39.7            | 53.9           | 14.2        | 100         | 0            |        |
| Vert.    | 9748.000        | AV       | 31.3           | 38.4            | 9.3       | 37.2      | 41.8            | 53.9           | 12.1        | 100         | 0            |        |
| Vert.    | 12185.000       | AV       | 32.7           | 39.2            | 10.5      | 37.7      | 44.7            | 53.9           | 9.2         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |  |                                  |                  |
|------------------------|--|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012  | August 25, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH   | 25 deg.C , 67%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano  | Tatsuya Arai                     | Tatsuya Arai     |
|                        | (No.2 SAC)   | (No.2 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2452 MHz   |                                  |                  |
|                        | Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2483.500        | PK       | 48.7           | 27.4            | 24.4      | 38.1      | 62.4            | 73.9           | 11.5        | 109         | 147          |        |
| Hori.    | 4904.000        | PK       | 44.2           | 31.1            | 6.6       | 36.9      | 45.0            | 73.9           | 28.9        | 100         | 339          |        |
| Hori.    | 6538.970        | PK       | 50.6           | 34.8            | 7.6       | 38.5      | 54.5            | 73.9           | 19.4        | 100         | 198          |        |
| Hori.    | 7356.000        | PK       | 45.1           | 36.3            | 8.2       | 39.0      | 50.6            | 73.9           | 23.3        | 100         | 0            |        |
| Hori.    | 9808.000        | PK       | 42.9           | 38.5            | 9.3       | 37.2      | 53.5            | 73.9           | 20.4        | 100         | 0            |        |
| Hori.    | 12260.000       | PK       | 43.9           | 39.2            | 10.6      | 37.6      | 56.1            | 73.9           | 17.8        | 100         | 0            |        |
| Hori.    | 2483.500        | AV       | 33.4           | 27.4            | 24.4      | 38.1      | 47.1            | 53.9           | 6.8         | 109         | 147          |        |
| Hori.    | 4904.000        | AV       | 33.5           | 31.1            | 6.6       | 36.9      | 34.3            | 53.9           | 19.6        | 100         | 339          |        |
| Hori.    | 6538.970        | AV       | 45.1           | 34.8            | 7.6       | 38.5      | 49.0            | 53.9           | <b>4.9</b>  | 100         | 198          |        |
| Hori.    | 7356.000        | AV       | 34.4           | 36.3            | 8.2       | 39.0      | 39.9            | 53.9           | 14.0        | 100         | 0            |        |
| Hori.    | 9808.000        | AV       | 31.4           | 38.5            | 9.3       | 37.2      | 42.0            | 53.9           | 11.9        | 100         | 0            |        |
| Hori.    | 12260.000       | AV       | 33.2           | 39.2            | 10.6      | 37.6      | 45.4            | 53.9           | 8.5         | 100         | 0            |        |
| Vert.    | 2483.500        | PK       | 48.5           | 27.4            | 24.4      | 38.1      | 62.2            | 73.9           | 11.7        | 110         | 328          |        |
| Vert.    | 4904.000        | PK       | 43.7           | 31.1            | 6.6       | 36.9      | 44.5            | 73.9           | 29.4        | 100         | 195          |        |
| Vert.    | 6538.970        | PK       | 49.1           | 34.8            | 7.6       | 38.5      | 53.0            | 73.9           | 20.9        | 179         | 294          |        |
| Vert.    | 7356.000        | PK       | 45.3           | 36.3            | 8.2       | 39.0      | 50.8            | 73.9           | 23.1        | 100         | 0            |        |
| Vert.    | 9808.000        | PK       | 42.7           | 38.5            | 9.3       | 37.2      | 53.3            | 73.9           | 20.6        | 100         | 0            |        |
| Vert.    | 12260.000       | PK       | 45.5           | 39.2            | 10.6      | 37.6      | 57.7            | 73.9           | 16.2        | 100         | 0            |        |
| Vert.    | 2483.500        | AV       | 32.8           | 27.4            | 24.4      | 38.1      | 46.5            | 53.9           | 7.4         | 110         | 328          |        |
| Vert.    | 4904.000        | AV       | 32.9           | 31.1            | 6.6       | 36.9      | 33.7            | 53.9           | 20.2        | 100         | 195          |        |
| Vert.    | 6538.970        | AV       | 42.7           | 34.8            | 7.6       | 38.5      | 46.6            | 53.9           | 7.3         | 179         | 294          |        |
| Vert.    | 7356.000        | AV       | 34.4           | 36.3            | 8.2       | 39.0      | 39.9            | 53.9           | 14.0        | 100         | 0            |        |
| Vert.    | 9808.000        | AV       | 31.4           | 38.5            | 9.3       | 37.2      | 42.0            | 53.9           | 11.9        | 100         | 0            |        |
| Vert.    | 12260.000       | AV       | 33.2           | 39.2            | 10.6      | 37.6      | 45.4            | 53.9           | 8.5         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

|                        |   |                                  |                  |
|------------------------|---|----------------------------------|------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.  | No.2 and 3 Semi Anechoic Chamber |                  |
| Date                   | August 23, 2012   | August 27, 2012                  | August 27, 2012  |
| Temperature / Humidity | 23 deg.C , 61%RH  | 26 deg.C , 61%RH                 | 25 deg.C , 60%RH |
| Engineer               | Shinichi Takano   | Hikaru Shirasawa                 | Tatsuya Arai     |
|                        | (No.2 SAC)  | (No.3 SAC)                       | (No.3 SAC)       |
| Mode                   | Tx, 2422 MHz  |                                  |                  |
|                        | Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm |                                  |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 2390.000        | PK       | 49.2           | 27.2            | 24.4      | 38.2      | 62.6            | 73.9           | 11.3        | 110         | 149          |        |
| Hori.    | 4844.000        | PK       | 46.9           | 31.2            | 6.8       | 41.1      | 43.8            | 73.9           | 30.1        | 100         | 208          |        |
| Hori.    | 6459.100        | PK       | 52.3           | 35.0            | 7.5       | 40.7      | 54.1            | 73.9           | 19.8        | 100         | 148          |        |
| Hori.    | 7266.000        | PK       | 47.6           | 36.6            | 8.5       | 41.4      | 51.3            | 73.9           | 22.6        | 100         | 0            |        |
| Hori.    | 9688.000        | PK       | 45.8           | 38.6            | 9.5       | 38.9      | 55.0            | 73.9           | 18.9        | 100         | 359          |        |
| Hori.    | 12110.000       | PK       | 46.2           | 39.5            | 10.7      | 39.4      | 57.0            | 73.9           | 16.9        | 100         | 0            |        |
| Hori.    | 2390.000        | AV       | 33.7           | 27.2            | 24.4      | 38.2      | 47.1            | 53.9           | 6.8         | 110         | 149          |        |
| Hori.    | 4844.000        | AV       | 35.7           | 31.2            | 6.8       | 41.1      | 32.6            | 53.9           | 21.3        | 100         | 208          |        |
| Hori.    | 6459.100        | AV       | 46.5           | 35.0            | 7.5       | 40.7      | 48.3            | 53.9           | 5.6         | 100         | 148          |        |
| Hori.    | 7266.000        | AV       | 35.6           | 36.6            | 8.5       | 41.4      | 39.3            | 53.9           | 14.6        | 100         | 0            |        |
| Hori.    | 9688.000        | AV       | 32.8           | 38.6            | 9.5       | 38.9      | 42.0            | 53.9           | 11.9        | 100         | 359          |        |
| Hori.    | 12110.000       | AV       | 33.3           | 39.5            | 10.7      | 39.4      | 44.1            | 53.9           | 9.8         | 100         | 0            |        |
| Vert.    | 2390.000        | PK       | 49.0           | 27.2            | 24.4      | 38.2      | 62.4            | 73.9           | 11.5        | 103         | 193          |        |
| Vert.    | 4844.000        | PK       | 48.2           | 31.2            | 6.8       | 41.1      | 45.1            | 73.9           | 28.8        | 100         | 156          |        |
| Vert.    | 6459.100        | PK       | 49.9           | 35.0            | 7.5       | 40.7      | 51.7            | 73.9           | 22.2        | 100         | 73           |        |
| Vert.    | 7266.000        | PK       | 47.1           | 36.6            | 8.5       | 41.4      | 50.8            | 73.9           | 23.1        | 100         | 359          |        |
| Vert.    | 9688.000        | PK       | 44.9           | 38.6            | 9.5       | 38.9      | 54.1            | 73.9           | 19.8        | 100         | 359          |        |
| Vert.    | 12110.000       | PK       | 45.1           | 39.5            | 10.7      | 39.4      | 55.9            | 73.9           | 18.0        | 100         | 0            |        |
| Vert.    | 2390.000        | AV       | 32.0           | 27.2            | 24.4      | 38.2      | 45.4            | 53.9           | 8.5         | 103         | 193          |        |
| Vert.    | 4844.000        | AV       | 34.9           | 31.2            | 6.8       | 41.1      | 31.8            | 53.9           | 22.1        | 100         | 156          |        |
| Vert.    | 6459.100        | AV       | 42.6           | 35.0            | 7.5       | 40.7      | 44.4            | 53.9           | 9.5         | 100         | 73           |        |
| Vert.    | 7266.000        | AV       | 35.2           | 36.6            | 8.5       | 41.4      | 38.9            | 53.9           | 15.0        | 100         | 359          |        |
| Vert.    | 9688.000        | AV       | 32.6           | 38.6            | 9.5       | 38.9      | 41.8            | 53.9           | 12.1        | 100         | 359          |        |
| Vert.    | 12110.000       | AV       | 33.4           | 39.5            | 10.7      | 39.4      | 44.2            | 53.9           | 9.7         | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori.    | 2422.000        | PK       | 74.1           | 27.3              | 24.4      | 38.1      | 87.7            | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 37.4           | 27.3              | 24.4      | 38.2      | 50.9            | 67.7           | 16.8        |         |
| Vert.    | 2422.000        | PK       | 71.5           | 27.3              | 24.4      | 38.1      | 85.1            | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 35.4           | 27.3              | 24.4      | 38.2      | 48.9            | 65.1           | 16.2        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
 Date                            August 23, 2012                                    August 27, 2012                                    August 27, 2012  
 Temperature / Humidity    23 deg.C , 61%RH                            26 deg.C , 61%RH                            25 deg.C , 60%RH  
 Engineer                     Shinichi Takano                                Hikaru Shirasawa                            Tatsuya Arai  
                                   (No.2 SAC)                                       (No.3 SAC)                                       (No.3 SAC)  
 Mode                            Tx, 2437    MHz  
                                   Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg.] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|-------------|--------------|--------|
| Hori.    | 4874.000        | PK       | 48.6           | 31.3            | 6.9       | 41.1      | 45.7            | 73.9           | 28.2        | 100         | 94           |        |
| Hori.    | 6499.151        | PK       | 51.7           | 35.2            | 7.5       | 40.7      | 53.7            | 73.9           | 20.2        | 100         | 134          |        |
| Hori.    | 7311.000        | PK       | 47.5           | 36.6            | 8.6       | 41.4      | 51.3            | 73.9           | 22.6        | 100         | 0            |        |
| Hori.    | 9748.000        | PK       | 44.6           | 38.7            | 9.5       | 38.9      | 53.9            | 73.9           | 20.0        | 100         | 359          |        |
| Hori.    | 12185.000       | PK       | 45.1           | 39.5            | 10.7      | 39.3      | 56.0            | 73.9           | 17.9        | 100         | 0            |        |
| Hori.    | 4874.000        | AV       | 35.1           | 31.3            | 6.9       | 41.1      | 32.2            | 53.9           | 21.7        | 100         | 94           |        |
| Hori.    | 6499.151        | AV       | 45.4           | 35.2            | 7.5       | 40.7      | 47.4            | 53.9           | 6.5         | 100         | 134          |        |
| Hori.    | 7311.000        | AV       | 34.9           | 36.6            | 8.6       | 41.4      | 38.7            | 53.9           | 15.2        | 100         | 0            |        |
| Hori.    | 9748.000        | AV       | 32.5           | 38.7            | 9.5       | 38.9      | 41.8            | 53.9           | 12.1        | 100         | 359          |        |
| Hori.    | 12185.000       | AV       | 32.3           | 39.5            | 10.7      | 39.3      | 43.2            | 53.9           | 10.7        | 100         | 0            |        |
| Vert.    | 4874.000        | PK       | 46.9           | 31.3            | 6.9       | 41.1      | 44.0            | 73.9           | 29.9        | 100         | 0            |        |
| Vert.    | 6499.151        | PK       | 49.8           | 35.2            | 7.5       | 40.7      | 51.8            | 73.9           | 22.1        | 100         | 73           |        |
| Vert.    | 7311.000        | PK       | 46.8           | 36.6            | 8.6       | 41.4      | 50.6            | 73.9           | 23.3        | 100         | 359          |        |
| Vert.    | 9748.000        | PK       | 45.0           | 38.7            | 9.5       | 38.9      | 54.3            | 73.9           | 19.6        | 100         | 359          |        |
| Vert.    | 12185.000       | PK       | 44.4           | 39.5            | 10.7      | 39.3      | 55.3            | 73.9           | 18.6        | 100         | 0            |        |
| Vert.    | 4874.000        | AV       | 35.2           | 31.3            | 6.9       | 41.1      | 32.3            | 53.9           | 21.6        | 100         | 0            |        |
| Vert.    | 6499.151        | AV       | 41.6           | 35.2            | 7.5       | 40.7      | 43.6            | 53.9           | 10.3        | 100         | 73           |        |
| Vert.    | 7311.000        | AV       | 34.5           | 36.6            | 8.6       | 41.4      | 38.3            | 53.9           | 15.6        | 100         | 359          |        |
| Vert.    | 9748.000        | AV       | 31.8           | 38.7            | 9.5       | 38.9      | 41.1            | 53.9           | 12.8        | 100         | 359          |        |
| Vert.    | 12185.000       | AV       | 32.1           | 39.5            | 10.7      | 39.3      | 43.0            | 53.9           | 10.9        | 100         | 0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
Date                           August 23, 2012   August 27, 2012   August 27, 2012  
Temperature / Humidity   23 deg.C , 61%RH                                   26 deg.C , 61%RH                                   25 deg.C , 60%RH  
Engineer                    Shinichi Takano                                       Hikaru Shirasawa                                   Tatsuya Arai  
                                  (No.2 SAC)   (No.3 SAC)   (No.3 SAC)  
Mode                           Tx, 2452   MHz  
                                  Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[deg.] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|----------------|-----------------|--------|
| Hori.    | 2483.500           | PK       | 49.1              | 27.4               | 24.4         | 38.1         | 62.8               | 73.9              | 11.1           | 109            | 147             |        |
| Hori.    | 4904.000           | PK       | 47.8              | 31.4               | 6.9          | 41.0         | 45.1               | 73.9              | 28.8           | 100            | 114             |        |
| Hori.    | 6539.152           | PK       | 50.9              | 35.3               | 7.6          | 40.7         | 53.1               | 73.9              | 20.8           | 100            | 137             |        |
| Hori.    | 7356.000           | PK       | 47.8              | 36.6               | 8.7          | 41.5         | 51.6               | 73.9              | 22.3           | 100            | 0               |        |
| Hori.    | 9808.000           | PK       | 44.8              | 38.8               | 9.6          | 38.9         | 54.3               | 73.9              | 19.6           | 100            | 359             |        |
| Hori.    | 12260.000          | PK       | 44.5              | 39.5               | 10.8         | 39.3         | 55.5               | 73.9              | 18.4           | 100            | 0               |        |
| Hori.    | 2483.500           | AV       | 32.6              | 27.4               | 24.4         | 38.1         | 46.3               | 53.9              | 7.6            | 109            | 147             |        |
| Hori.    | 4904.000           | AV       | 35.4              | 31.4               | 6.9          | 41.0         | 32.7               | 53.9              | 21.2           | 100            | 114             |        |
| Hori.    | 6539.152           | AV       | 44.4              | 35.3               | 7.6          | 40.7         | 46.6               | 53.9              | 7.3            | 100            | 137             |        |
| Hori.    | 7356.000           | AV       | 35.1              | 36.6               | 8.7          | 41.5         | 38.9               | 53.9              | 15.0           | 100            | 0               |        |
| Hori.    | 9808.000           | AV       | 32.5              | 38.8               | 9.6          | 38.9         | 42.0               | 53.9              | 11.9           | 100            | 359             |        |
| Hori.    | 12260.000          | AV       | 32.0              | 39.5               | 10.8         | 39.3         | 43.0               | 53.9              | 10.9           | 100            | 0               |        |
| Vert.    | 2483.500           | PK       | 46.1              | 27.4               | 24.4         | 38.1         | 59.8               | 73.9              | 14.1           | 110            | 328             |        |
| Vert.    | 4904.000           | PK       | 46.8              | 31.4               | 6.9          | 41.0         | 44.1               | 73.9              | 29.8           | 100            | 0               |        |
| Vert.    | 6539.152           | PK       | 49.0              | 35.3               | 7.6          | 40.7         | 51.2               | 73.9              | 22.7           | 100            | 106             |        |
| Vert.    | 7356.000           | PK       | 47.5              | 36.6               | 8.7          | 41.5         | 51.3               | 73.9              | 22.6           | 100            | 359             |        |
| Vert.    | 9808.000           | PK       | 43.5              | 38.8               | 9.6          | 38.9         | 53.0               | 73.9              | 20.9           | 100            | 359             |        |
| Vert.    | 12260.000          | PK       | 43.8              | 39.5               | 10.8         | 39.3         | 54.8               | 73.9              | 19.1           | 100            | 0               |        |
| Vert.    | 2483.500           | AV       | 33.4              | 27.4               | 24.4         | 38.1         | 47.1               | 53.9              | <b>6.8</b>     | 110            | 328             |        |
| Vert.    | 4904.000           | AV       | 35.5              | 31.4               | 6.9          | 41.0         | 32.8               | 53.9              | 21.1           | 100            | 0               |        |
| Vert.    | 6539.152           | AV       | 41.3              | 35.3               | 7.6          | 40.7         | 43.5               | 53.9              | 10.4           | 100            | 106             |        |
| Vert.    | 7356.000           | AV       | 34.6              | 36.6               | 8.7          | 41.5         | 38.4               | 53.9              | 15.5           | 100            | 359             |        |
| Vert.    | 9808.000           | AV       | 31.4              | 38.8               | 9.6          | 38.9         | 40.9               | 53.9              | 13.0           | 100            | 359             |        |
| Vert.    | 12260.000          | AV       | 31.3              | 39.5               | 10.8         | 39.3         | 42.3               | 53.9              | 11.6           | 100            | 0               |        |


Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

### Spurious emission (Conducted)

**Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm**

**Tx, 2412MHz (above 1GHz)**

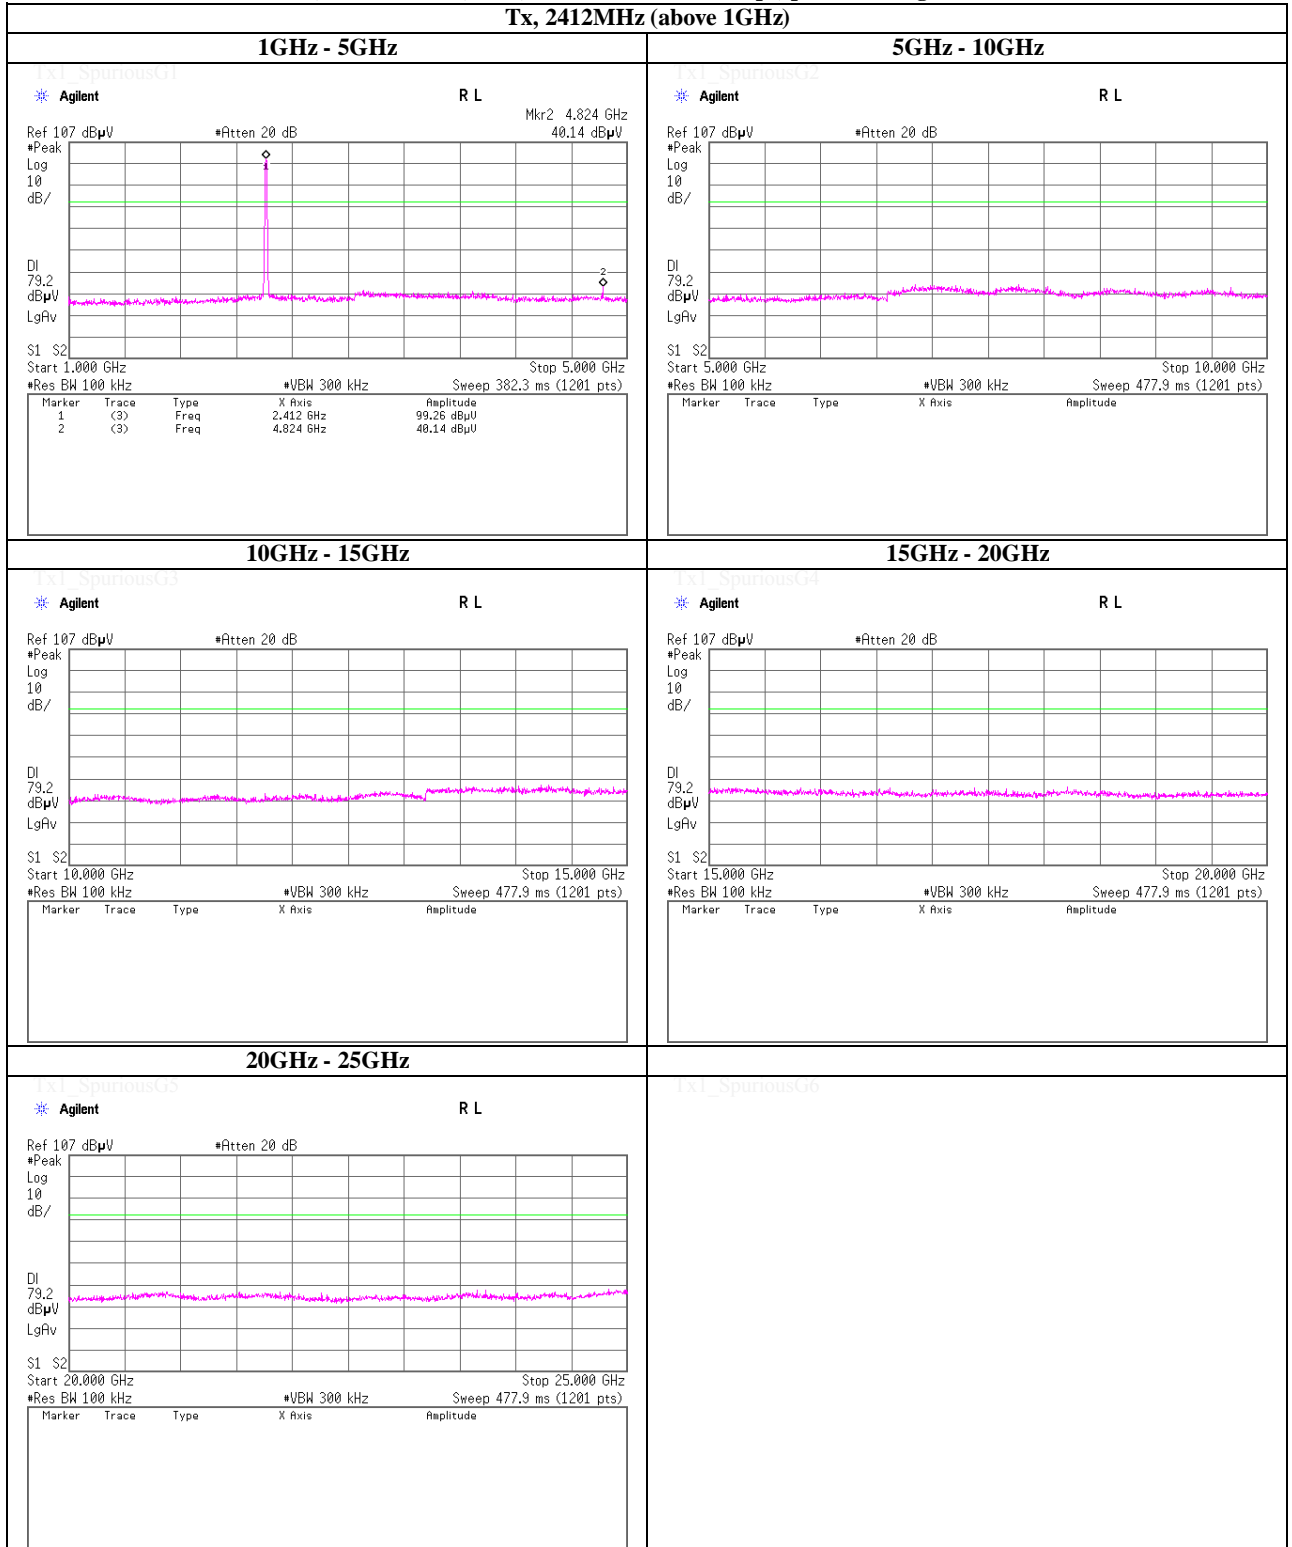

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401



### Spurious emission (Conducted)

**Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm**

**Tx, 2437MHz (above 1GHz)**

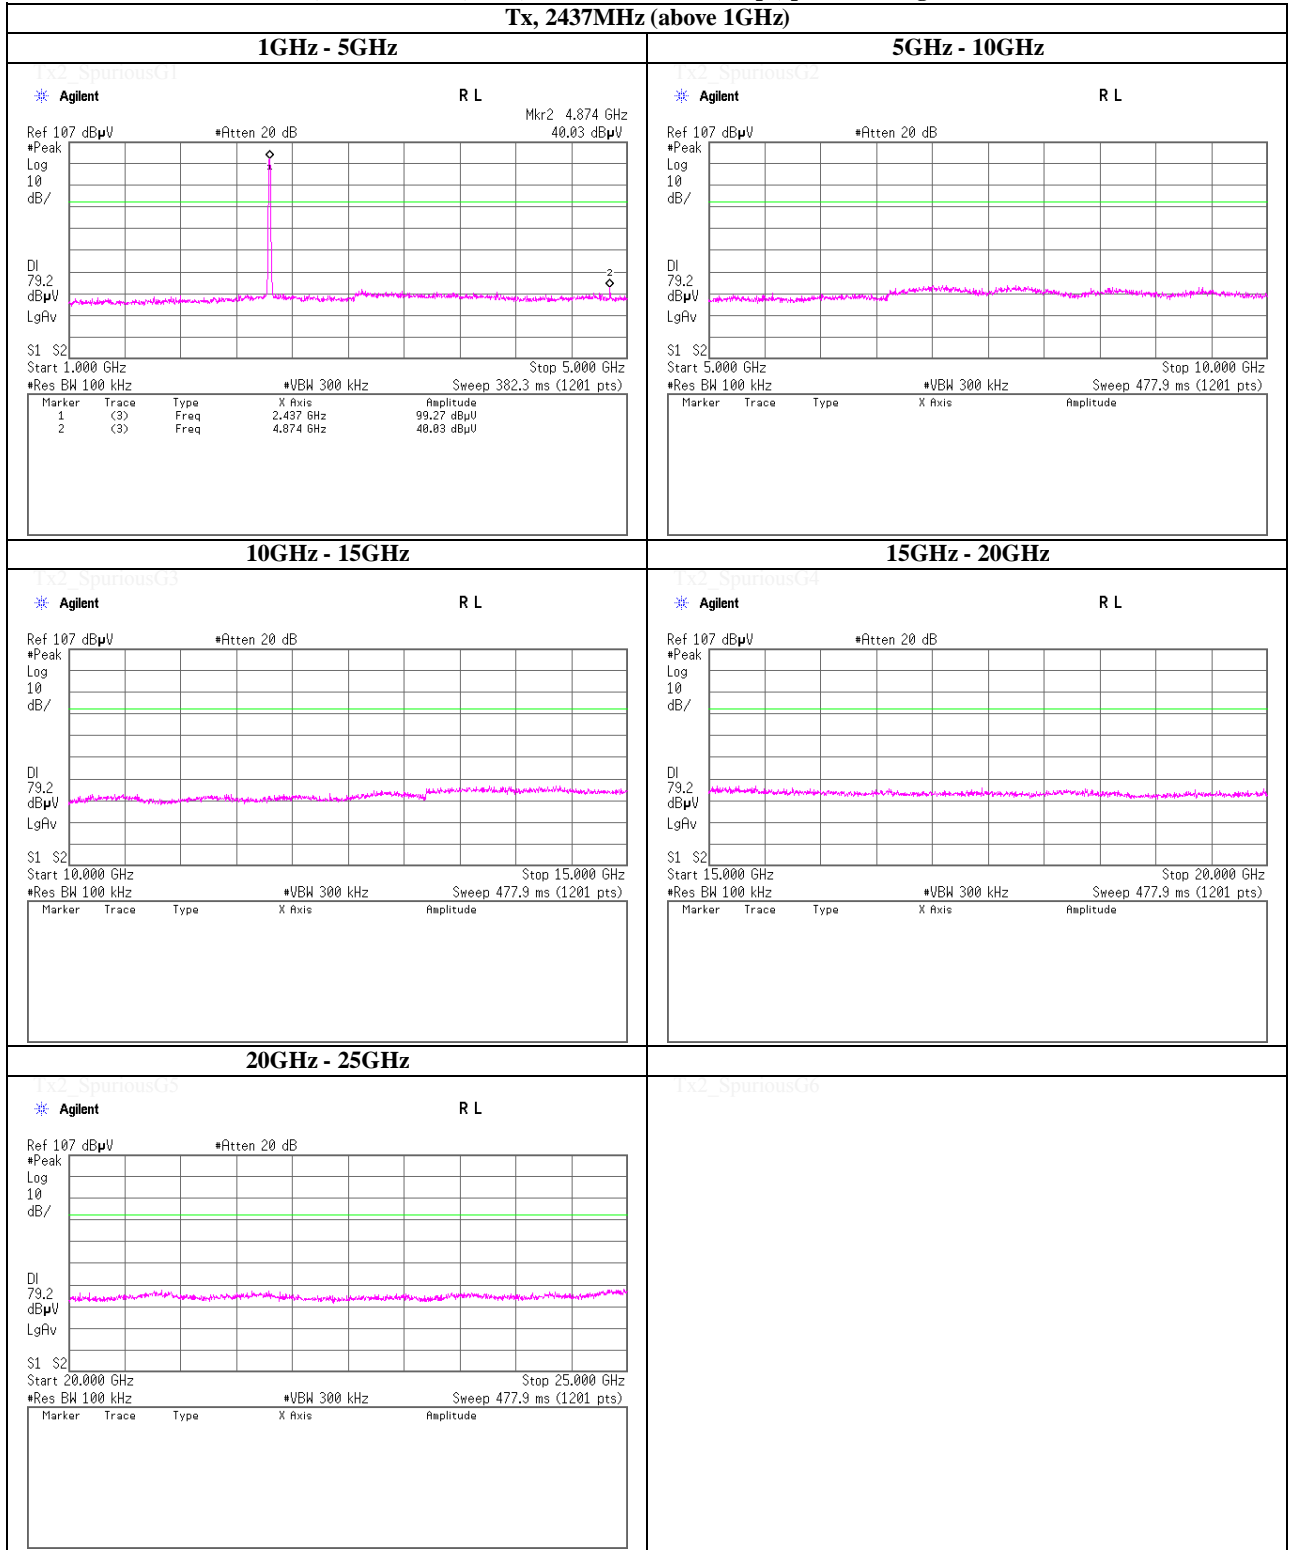

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm**

**Tx, 2462MHz (above 1GHz)**

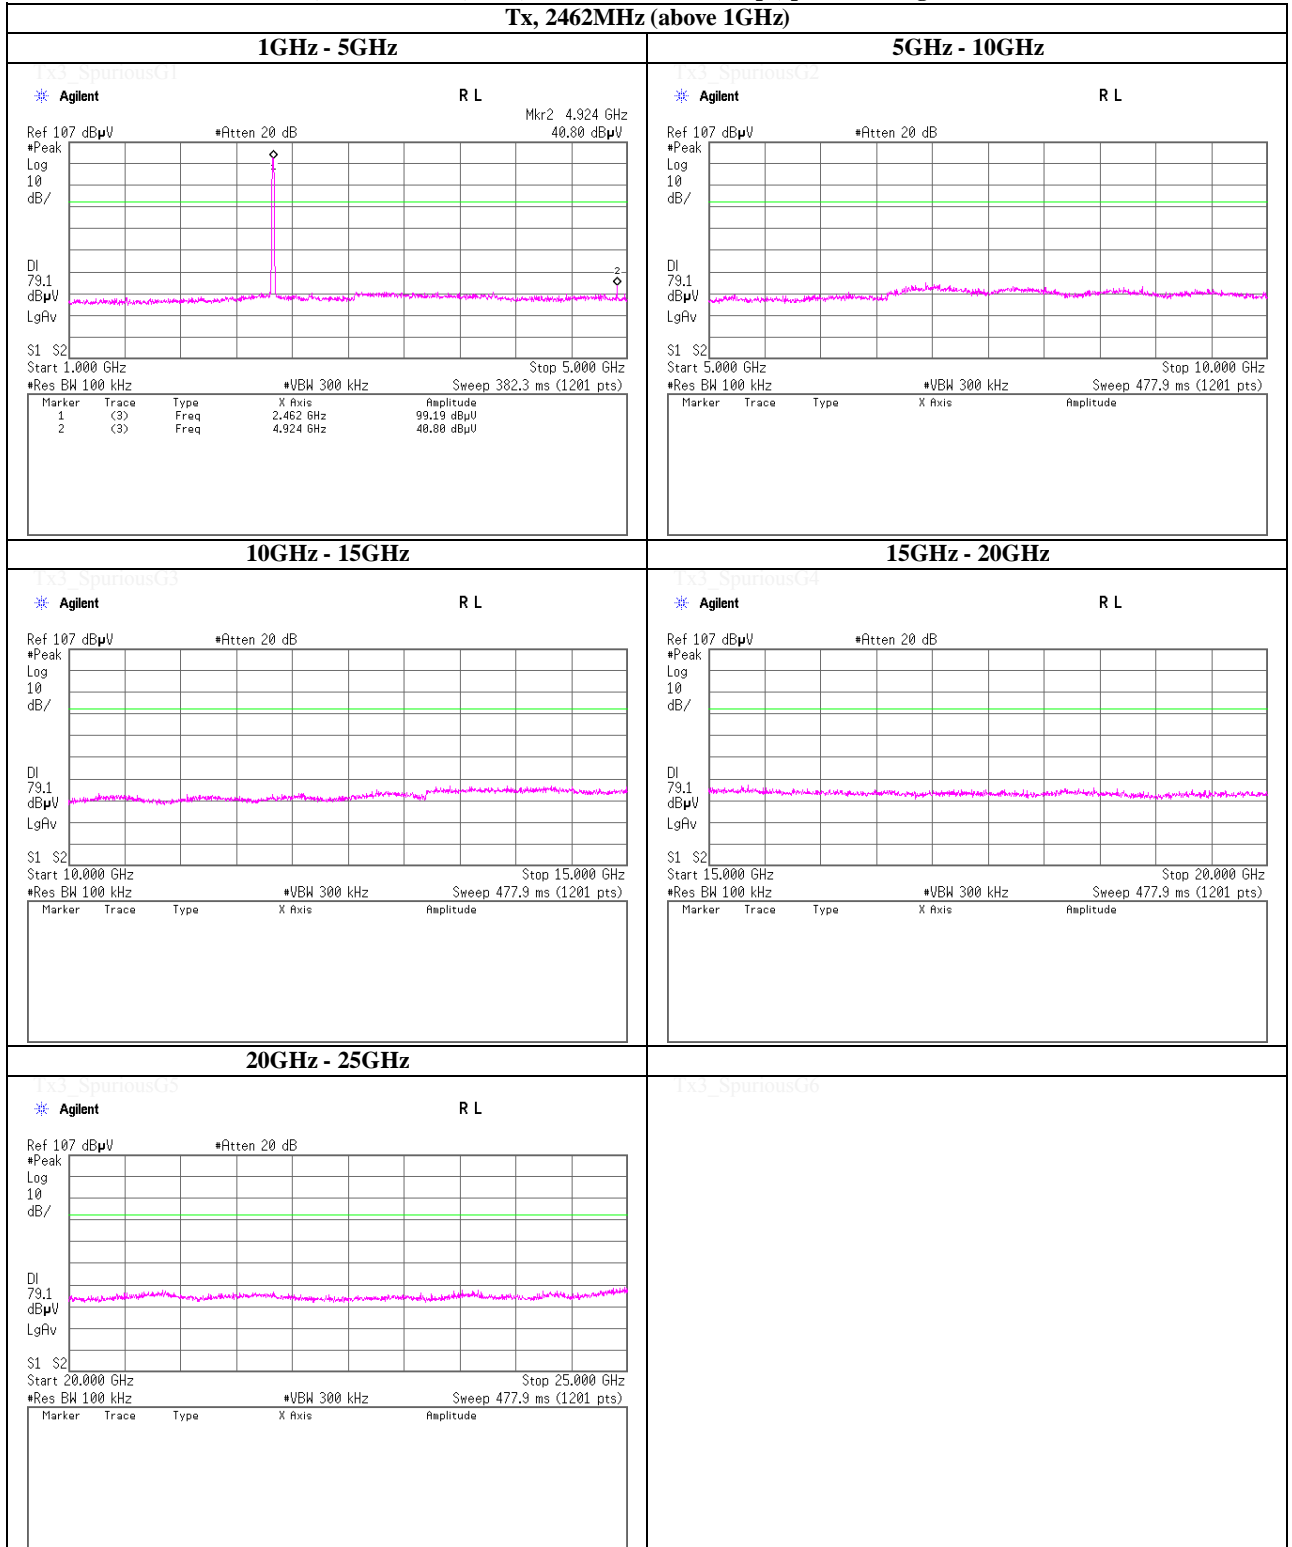

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm**

**Tx, 2412MHz (above 1GHz)**

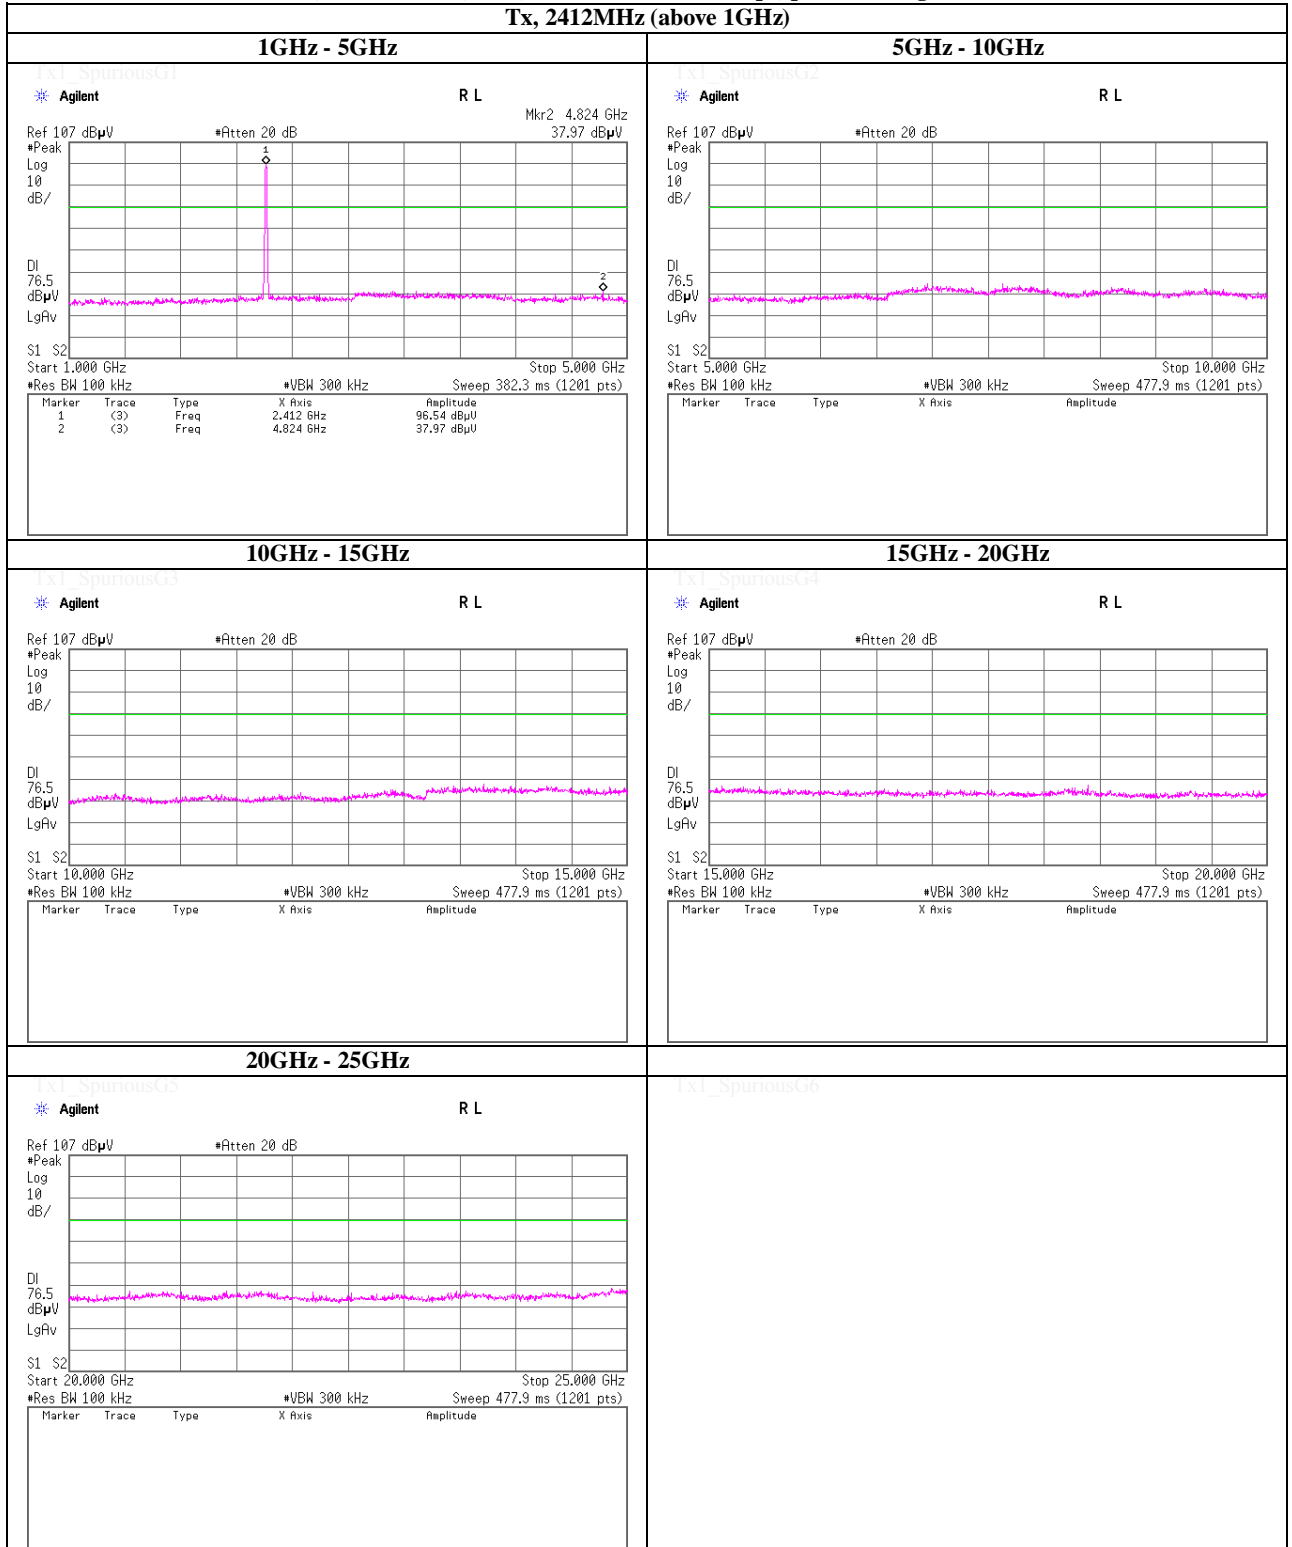

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm**

**Tx, 2437MHz (above 1GHz)**

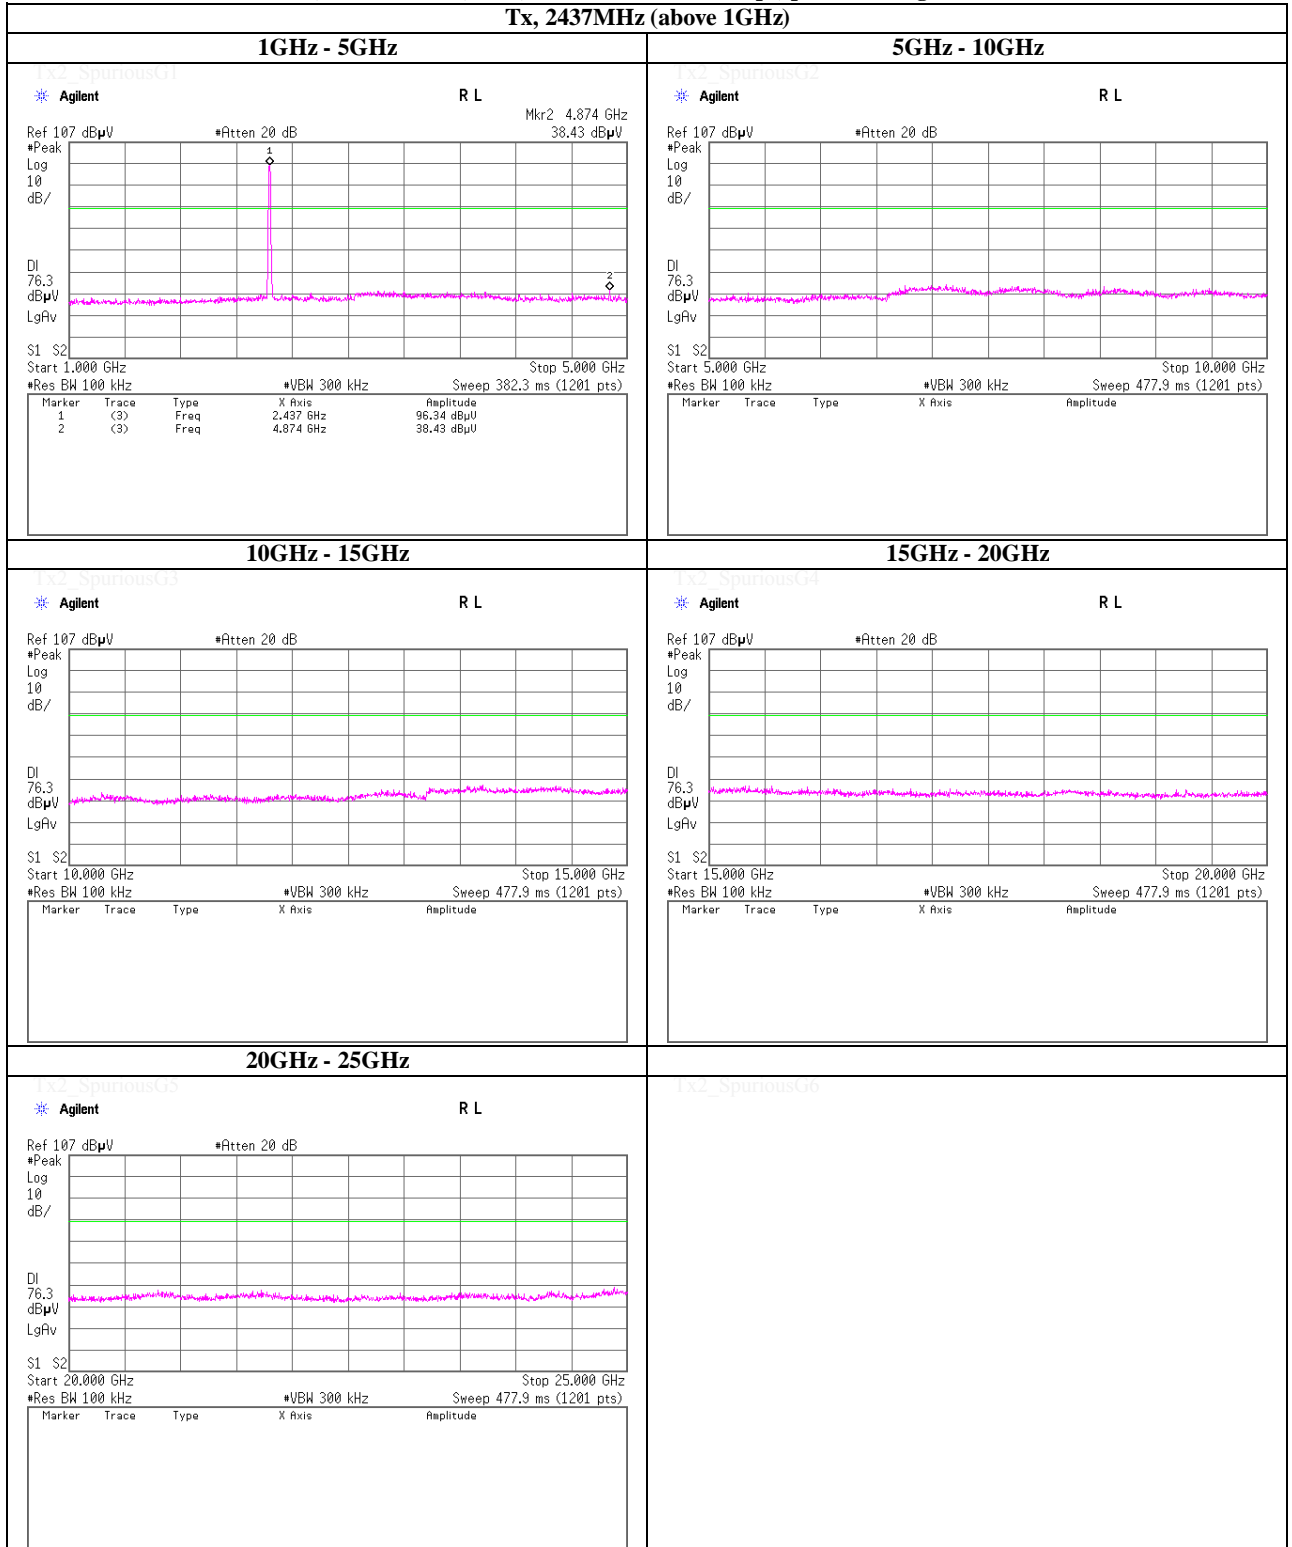

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm**

**Tx, 2462MHz (above 1GHz)**

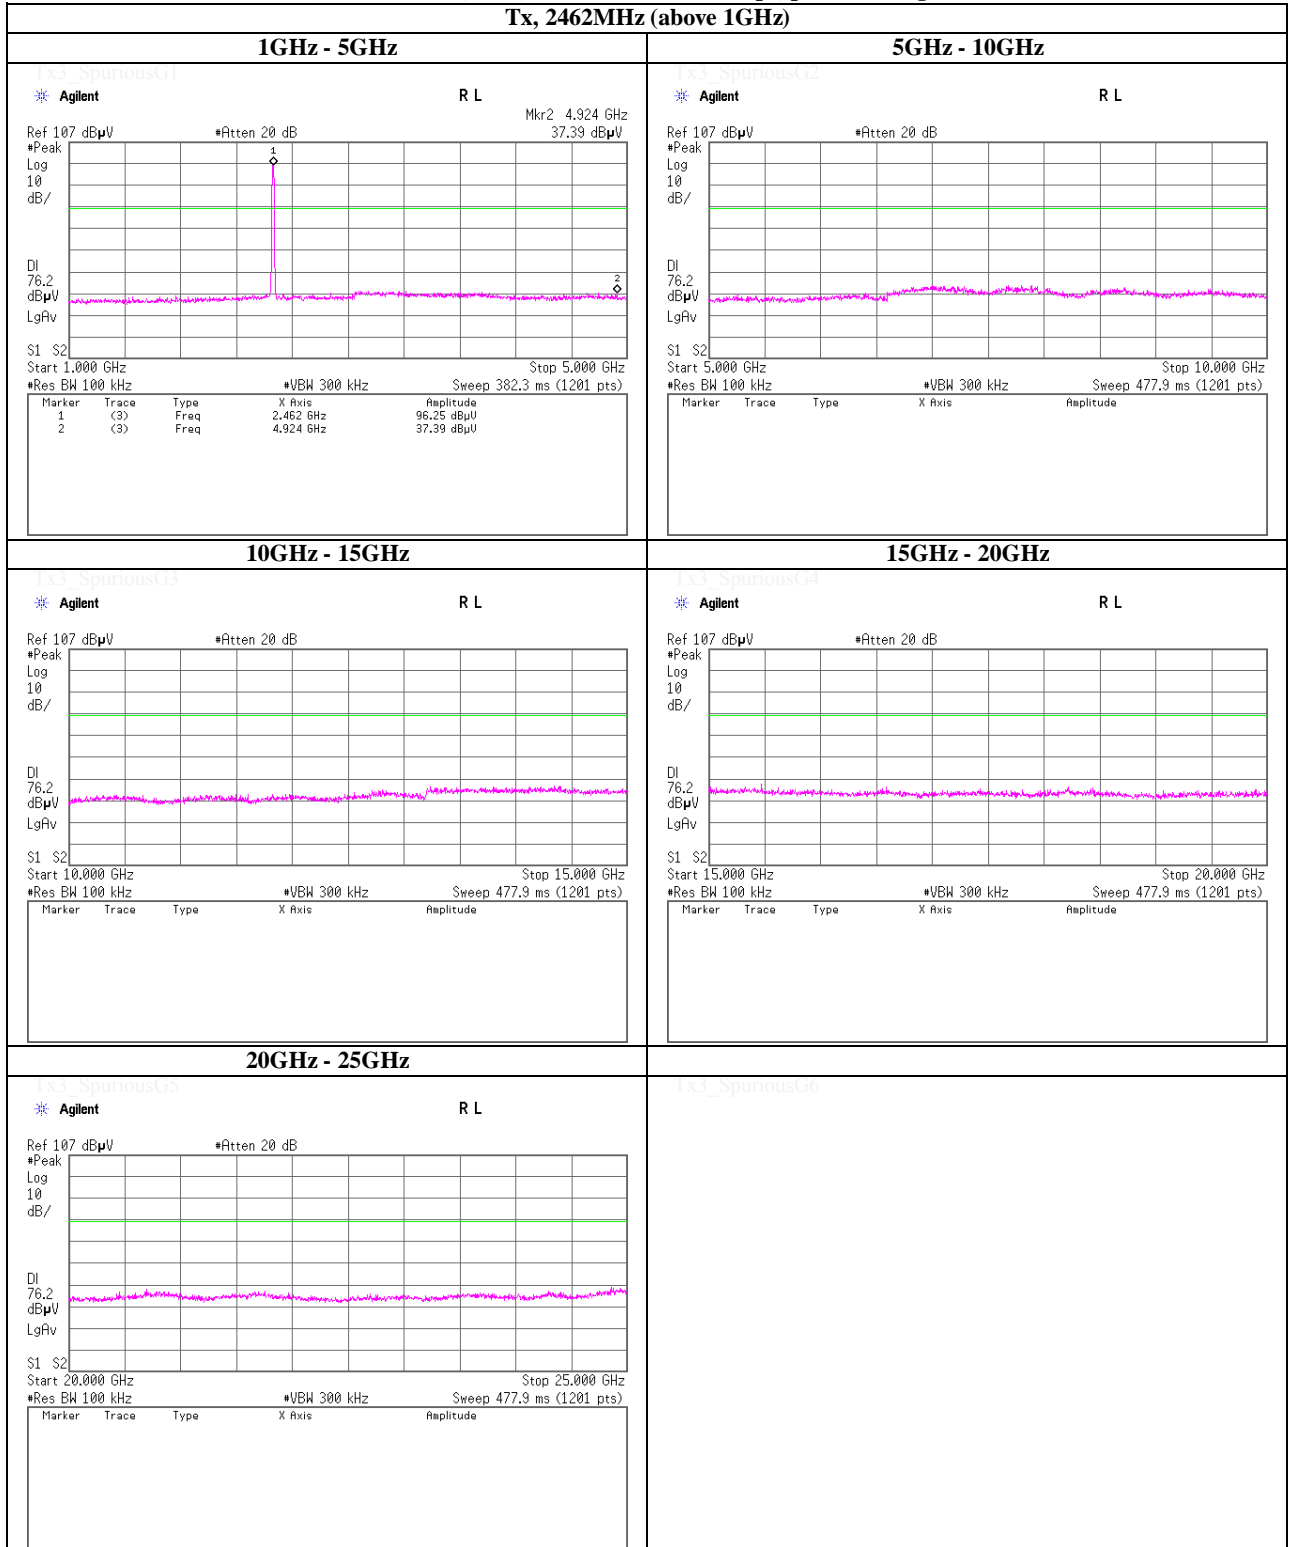

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm**

**Tx, 2412MHz (below 1GHz)**

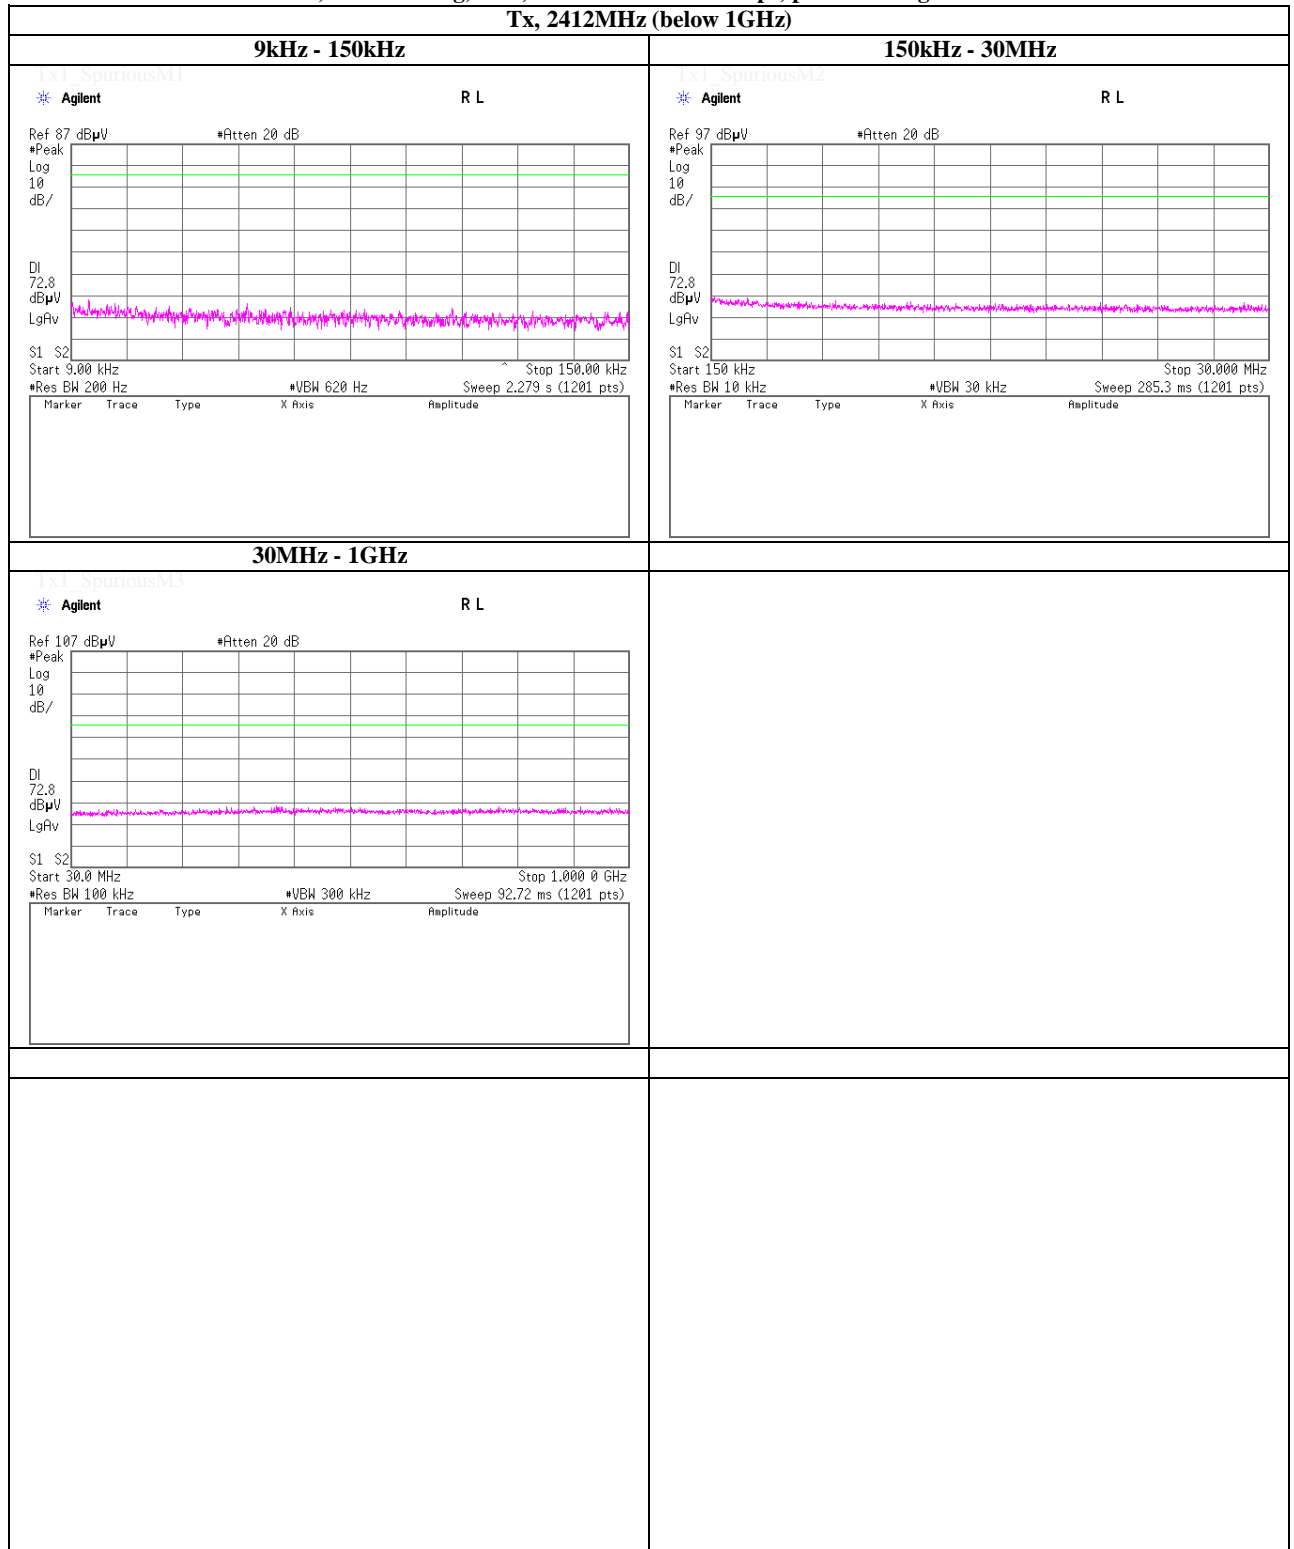

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm**

**Tx, 2412MHz (above 1GHz)**

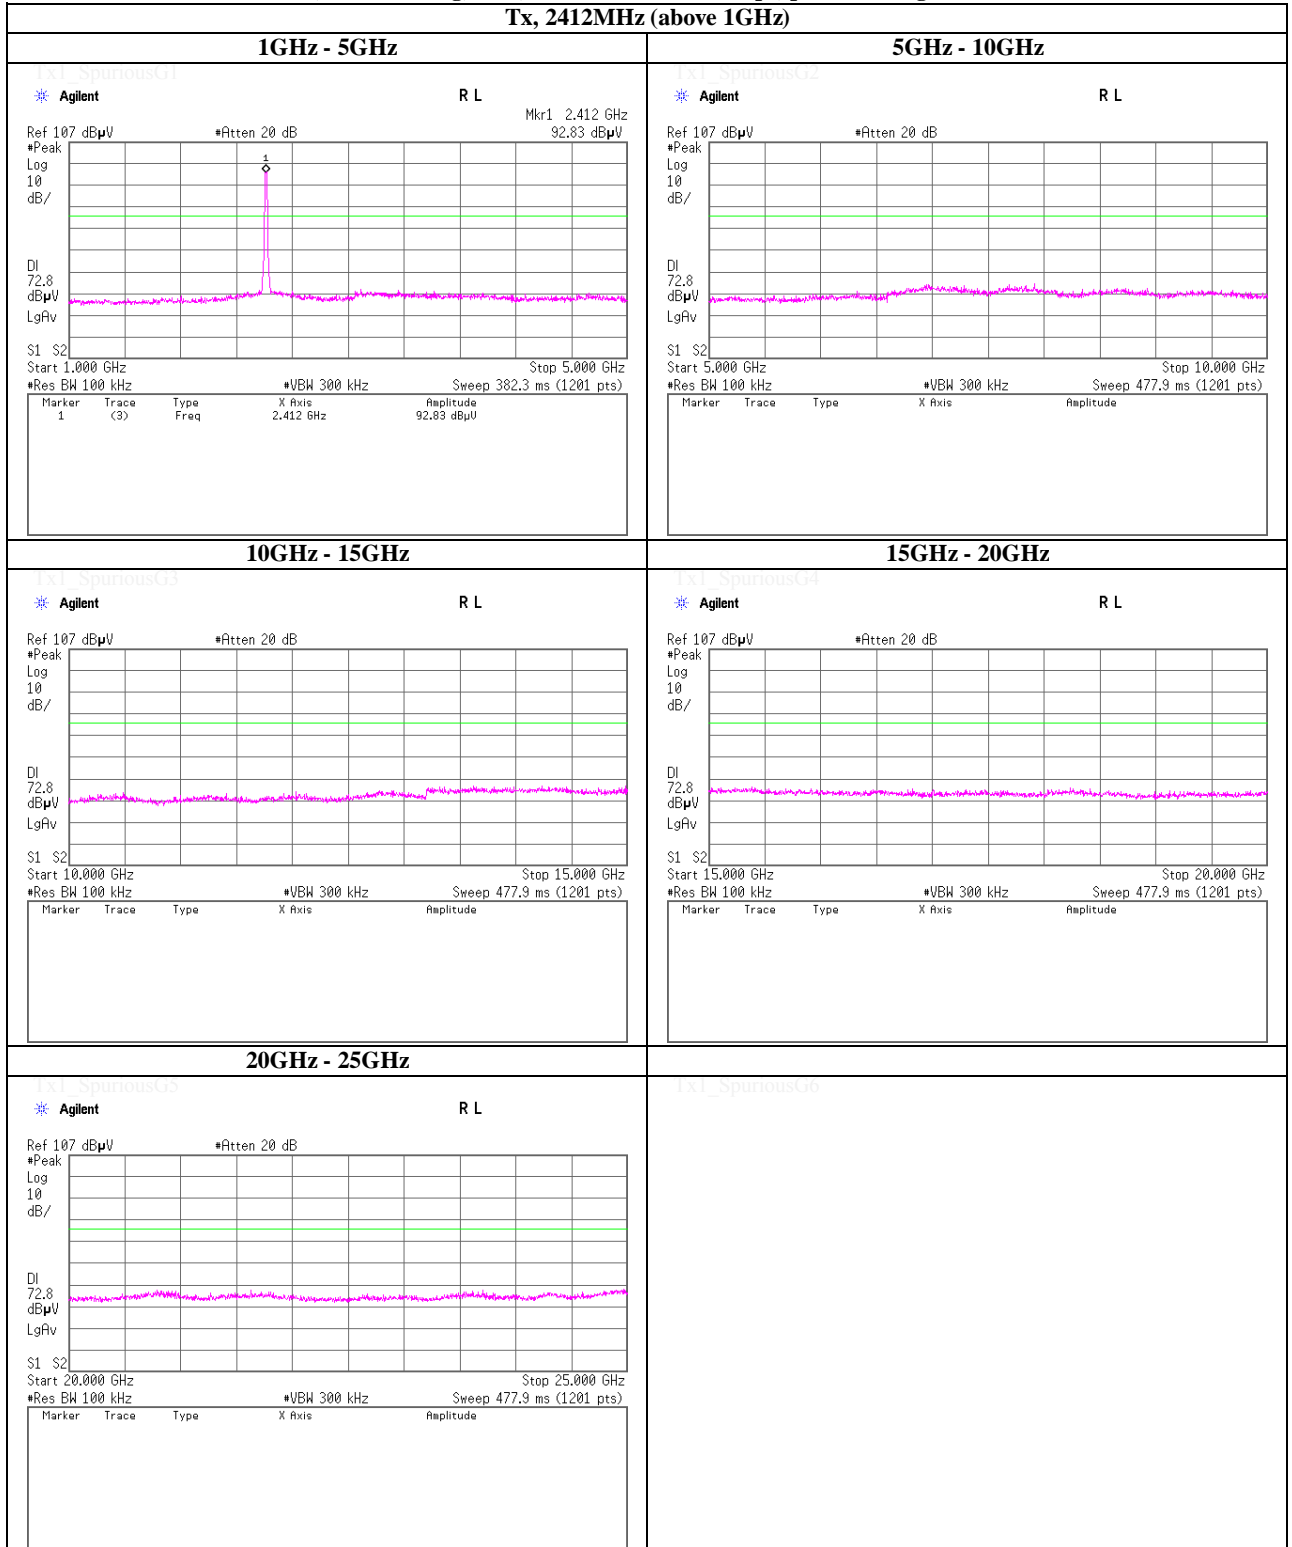

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm**

**Tx, 2437MHz (above 1GHz)**

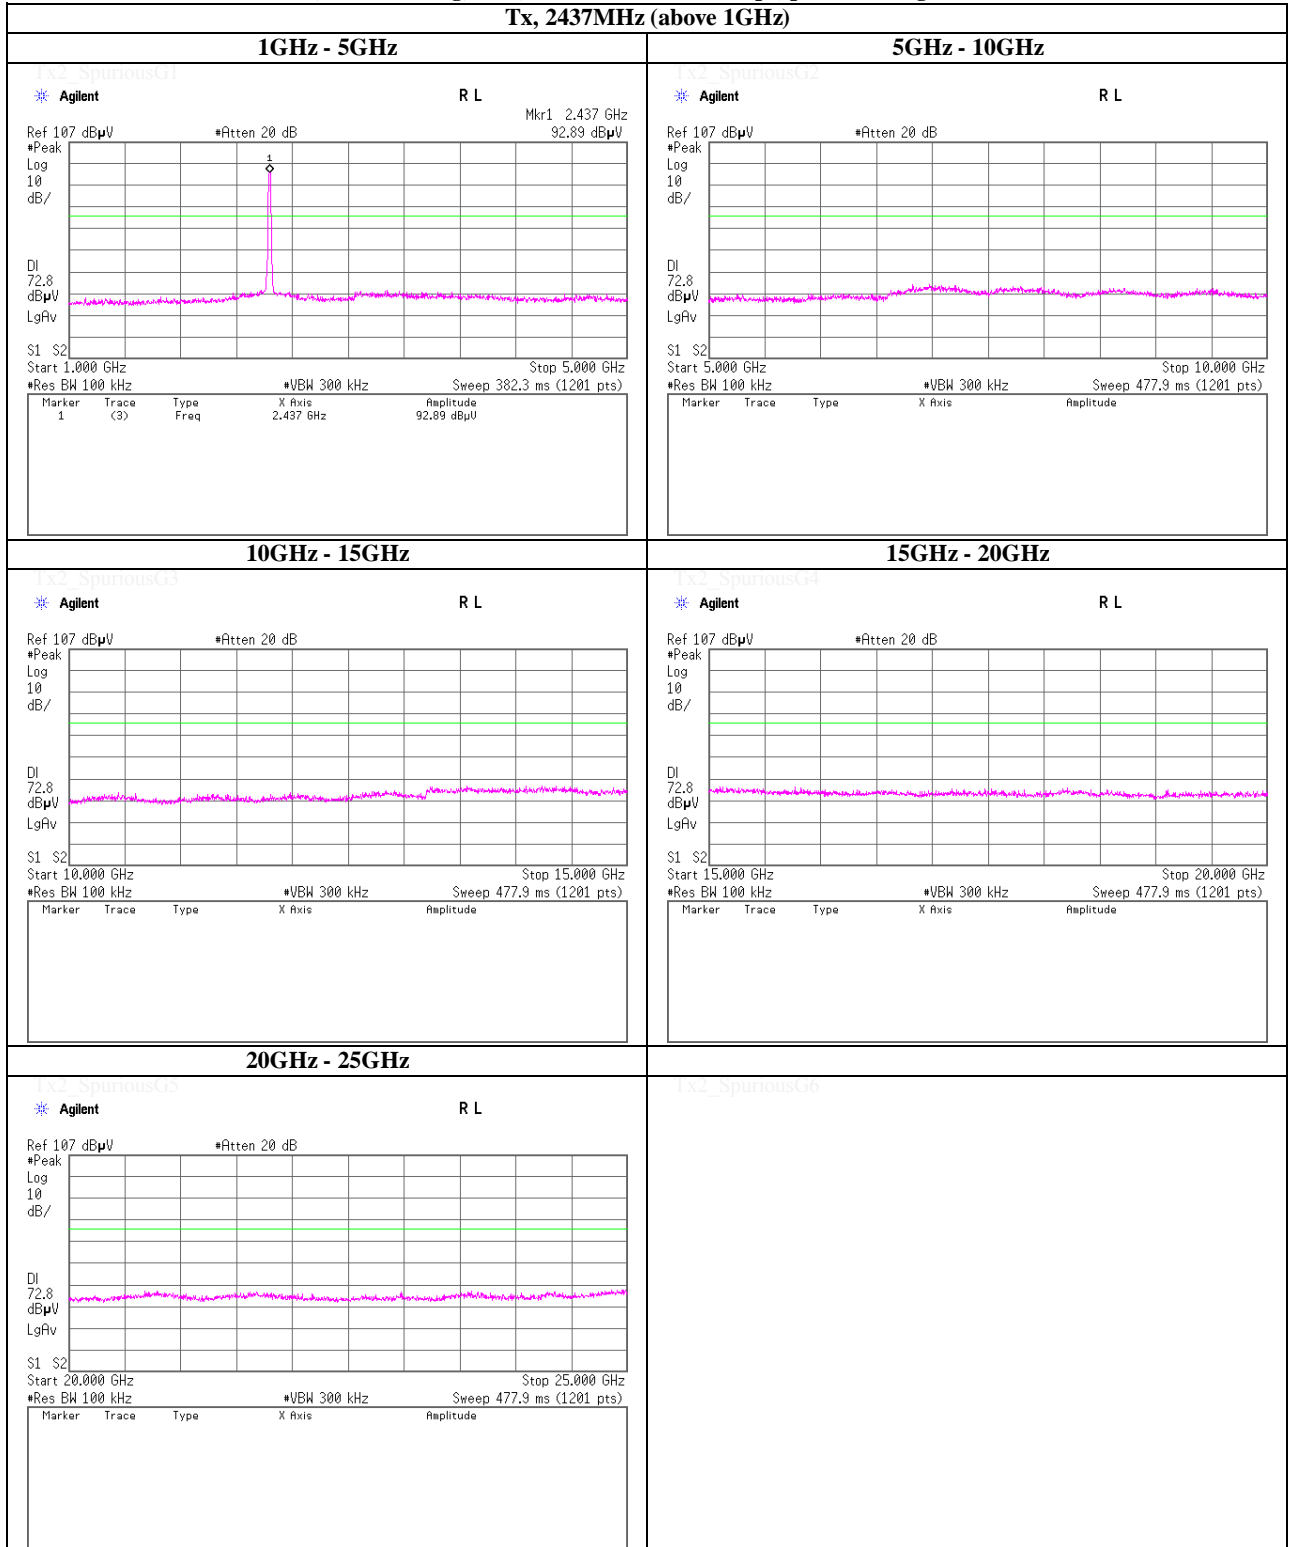

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401



### Spurious emission (Conducted)

**Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm**

**Tx, 2462MHz (above 1GHz)**

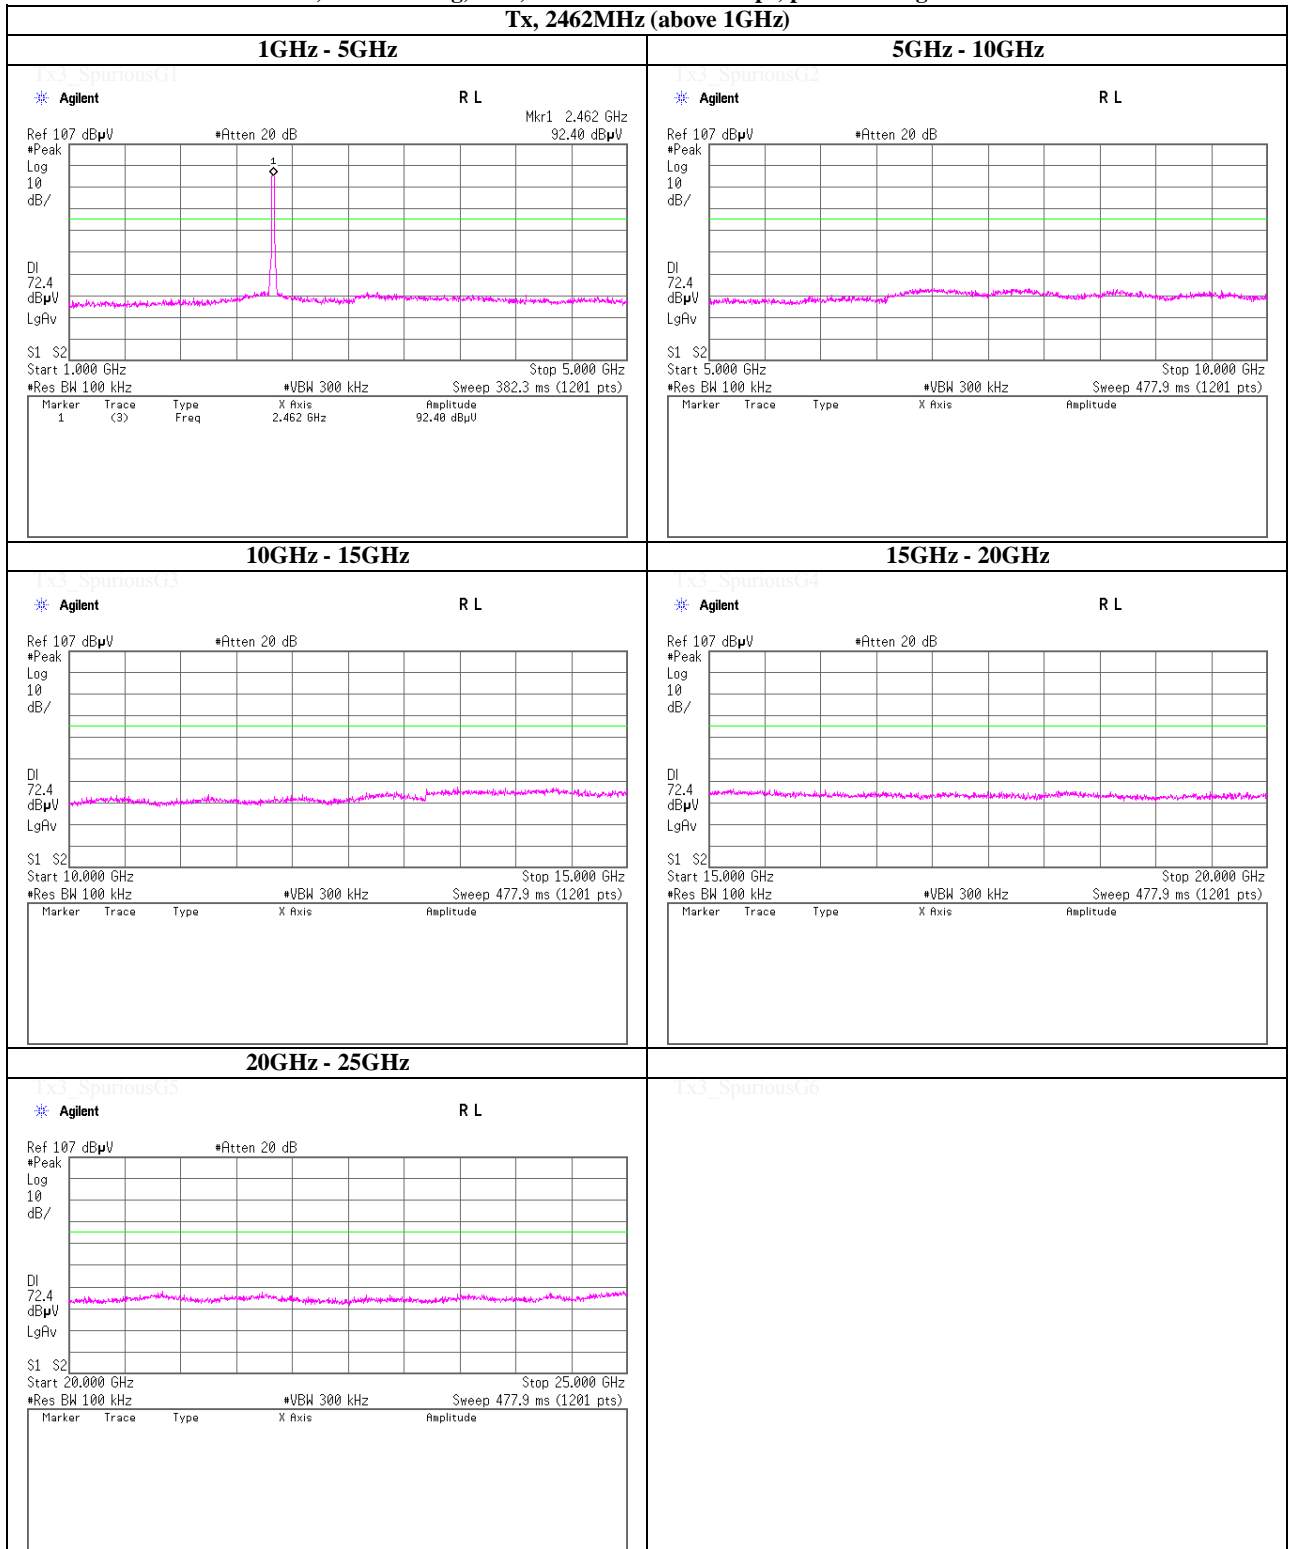

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm

Tx, 2412MHz (below 1GHz)

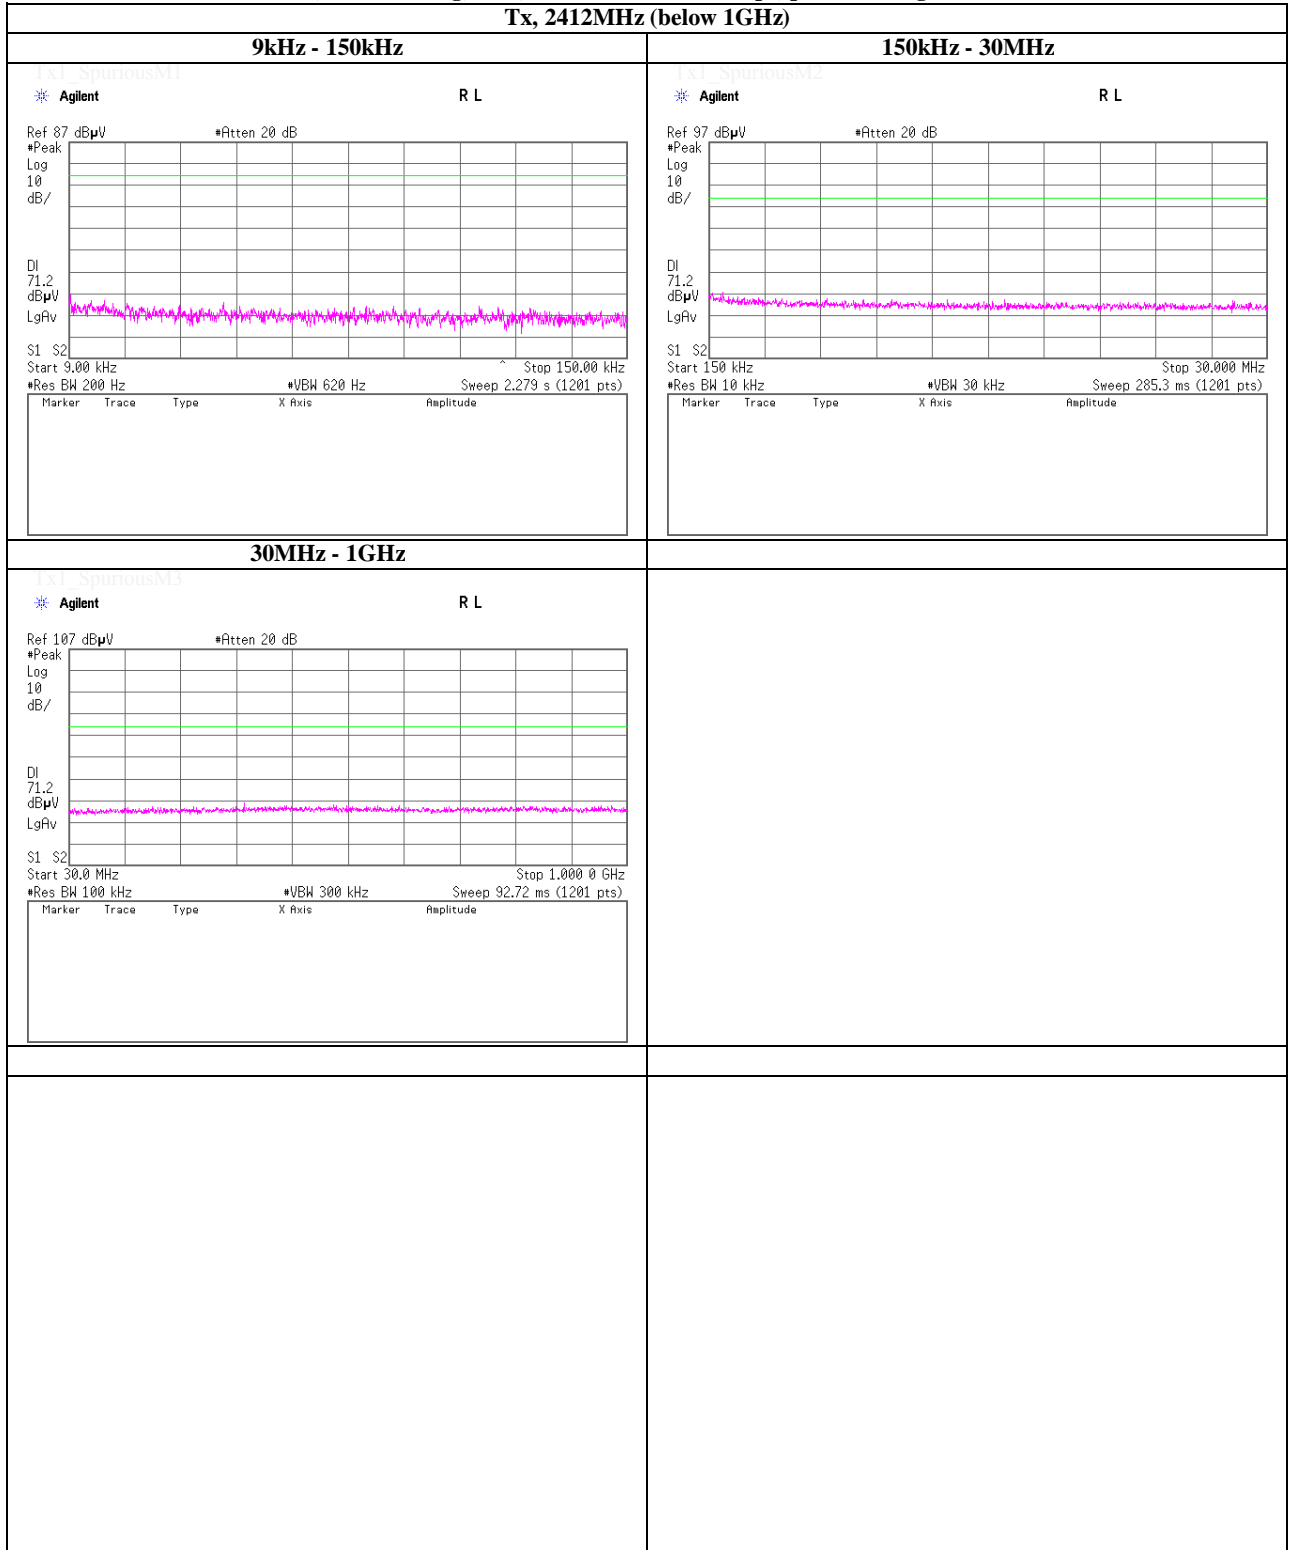

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm**

**Tx, 2412MHz (above 1GHz)**

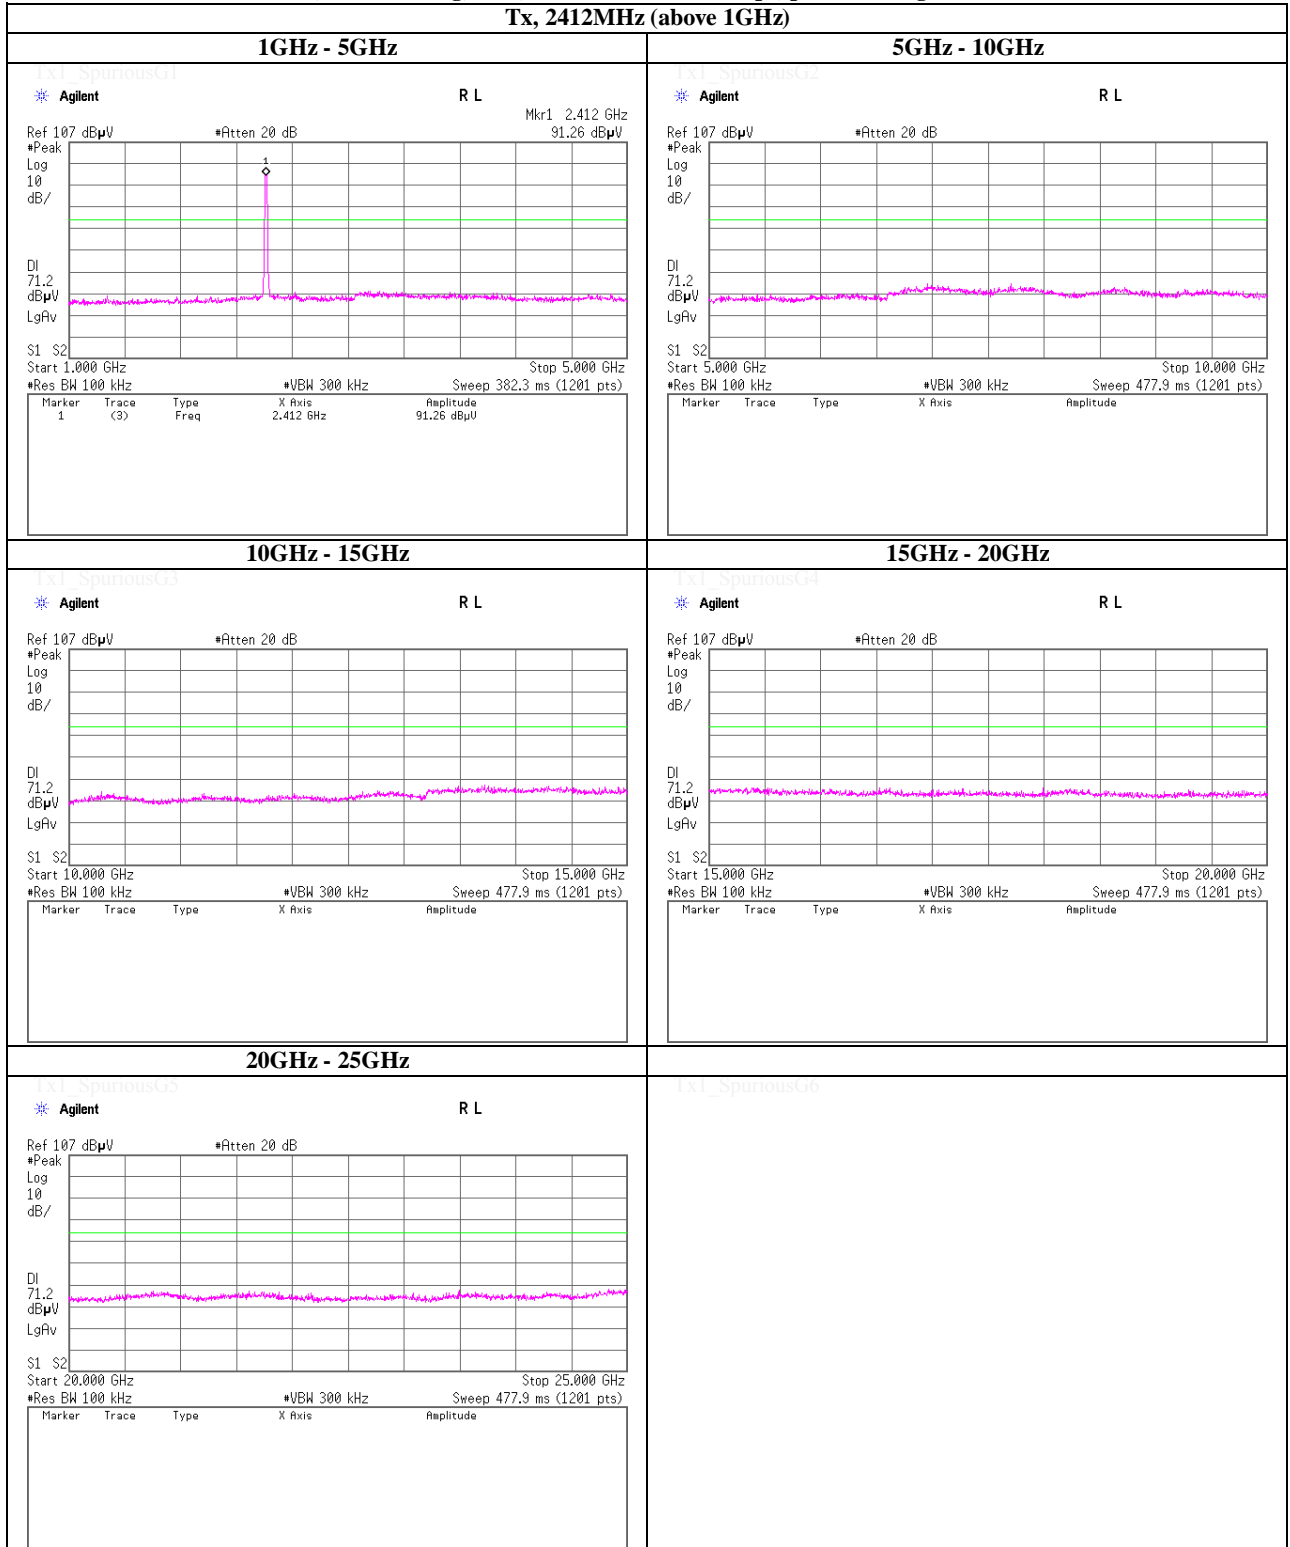

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm**

**Tx, 2437MHz (above 1GHz)**

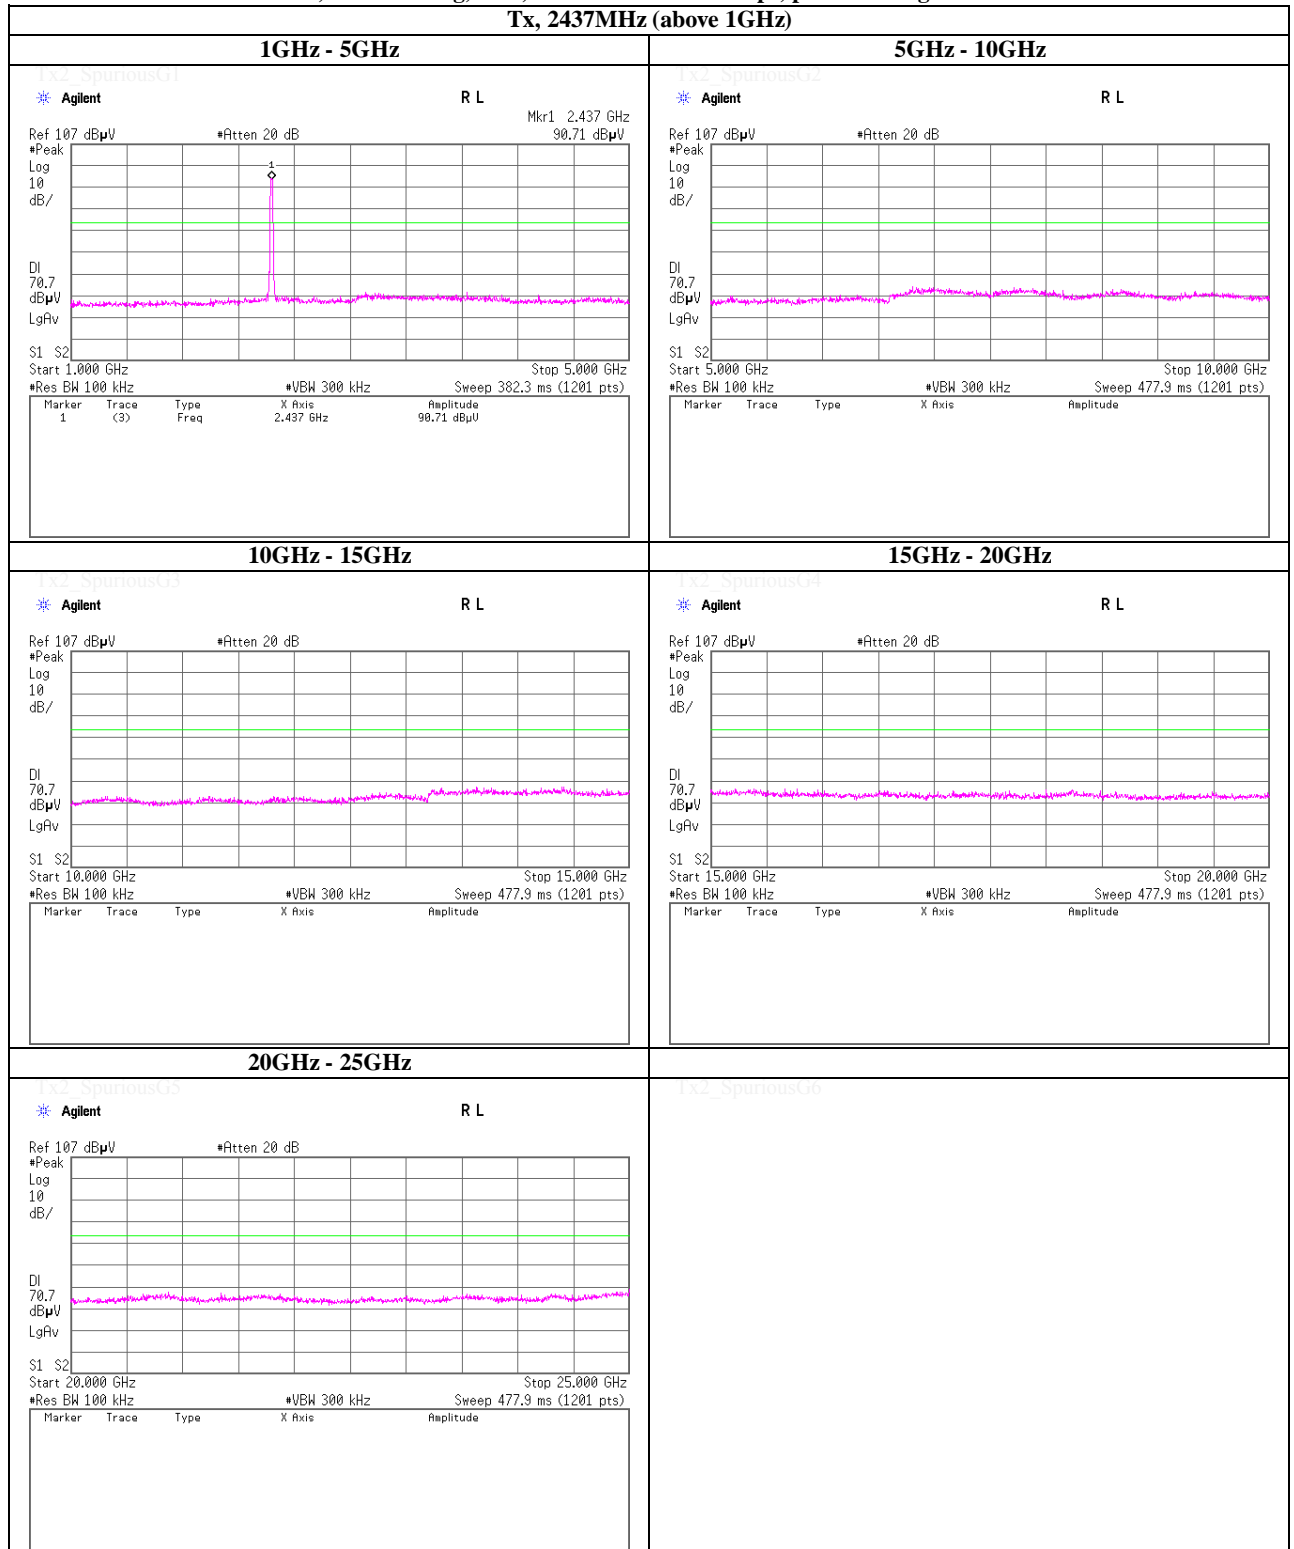

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm**

**Tx, 2462MHz (above 1GHz)**

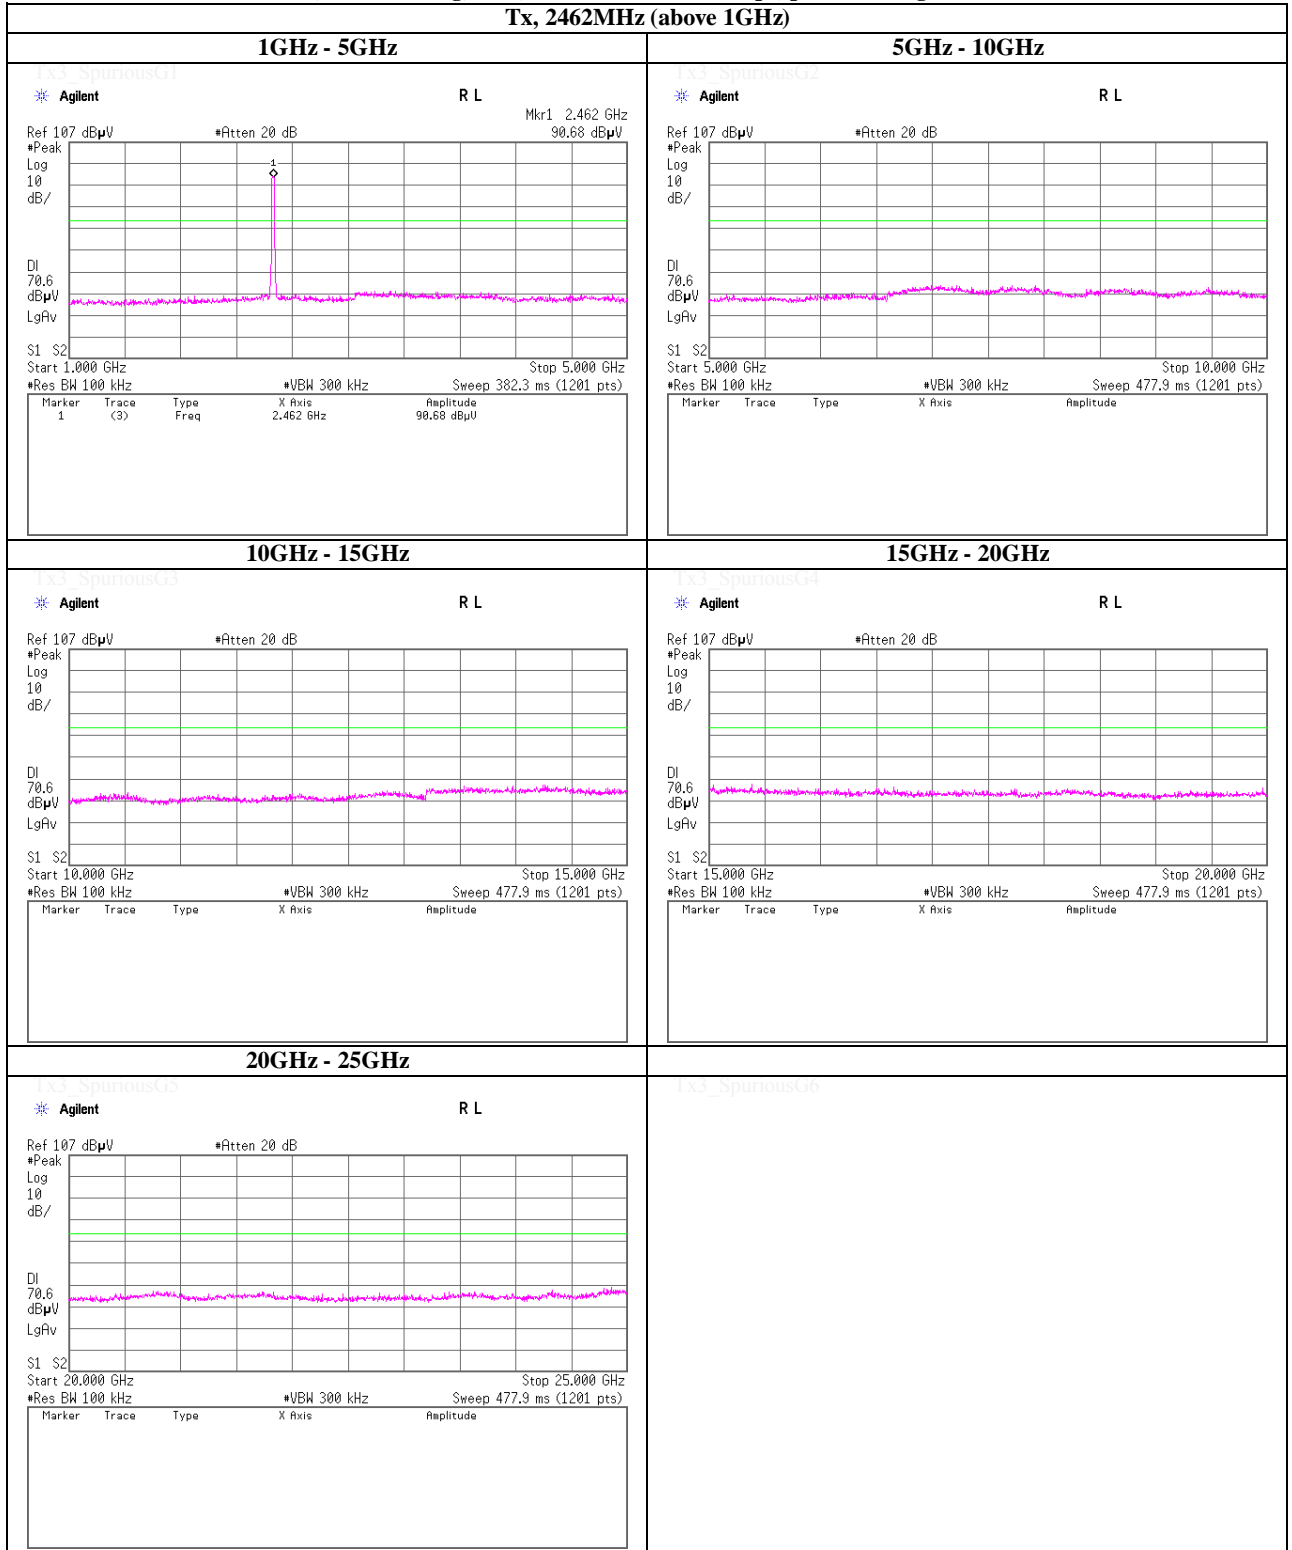

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm

Tx, 2412MHz (above 1GHz)

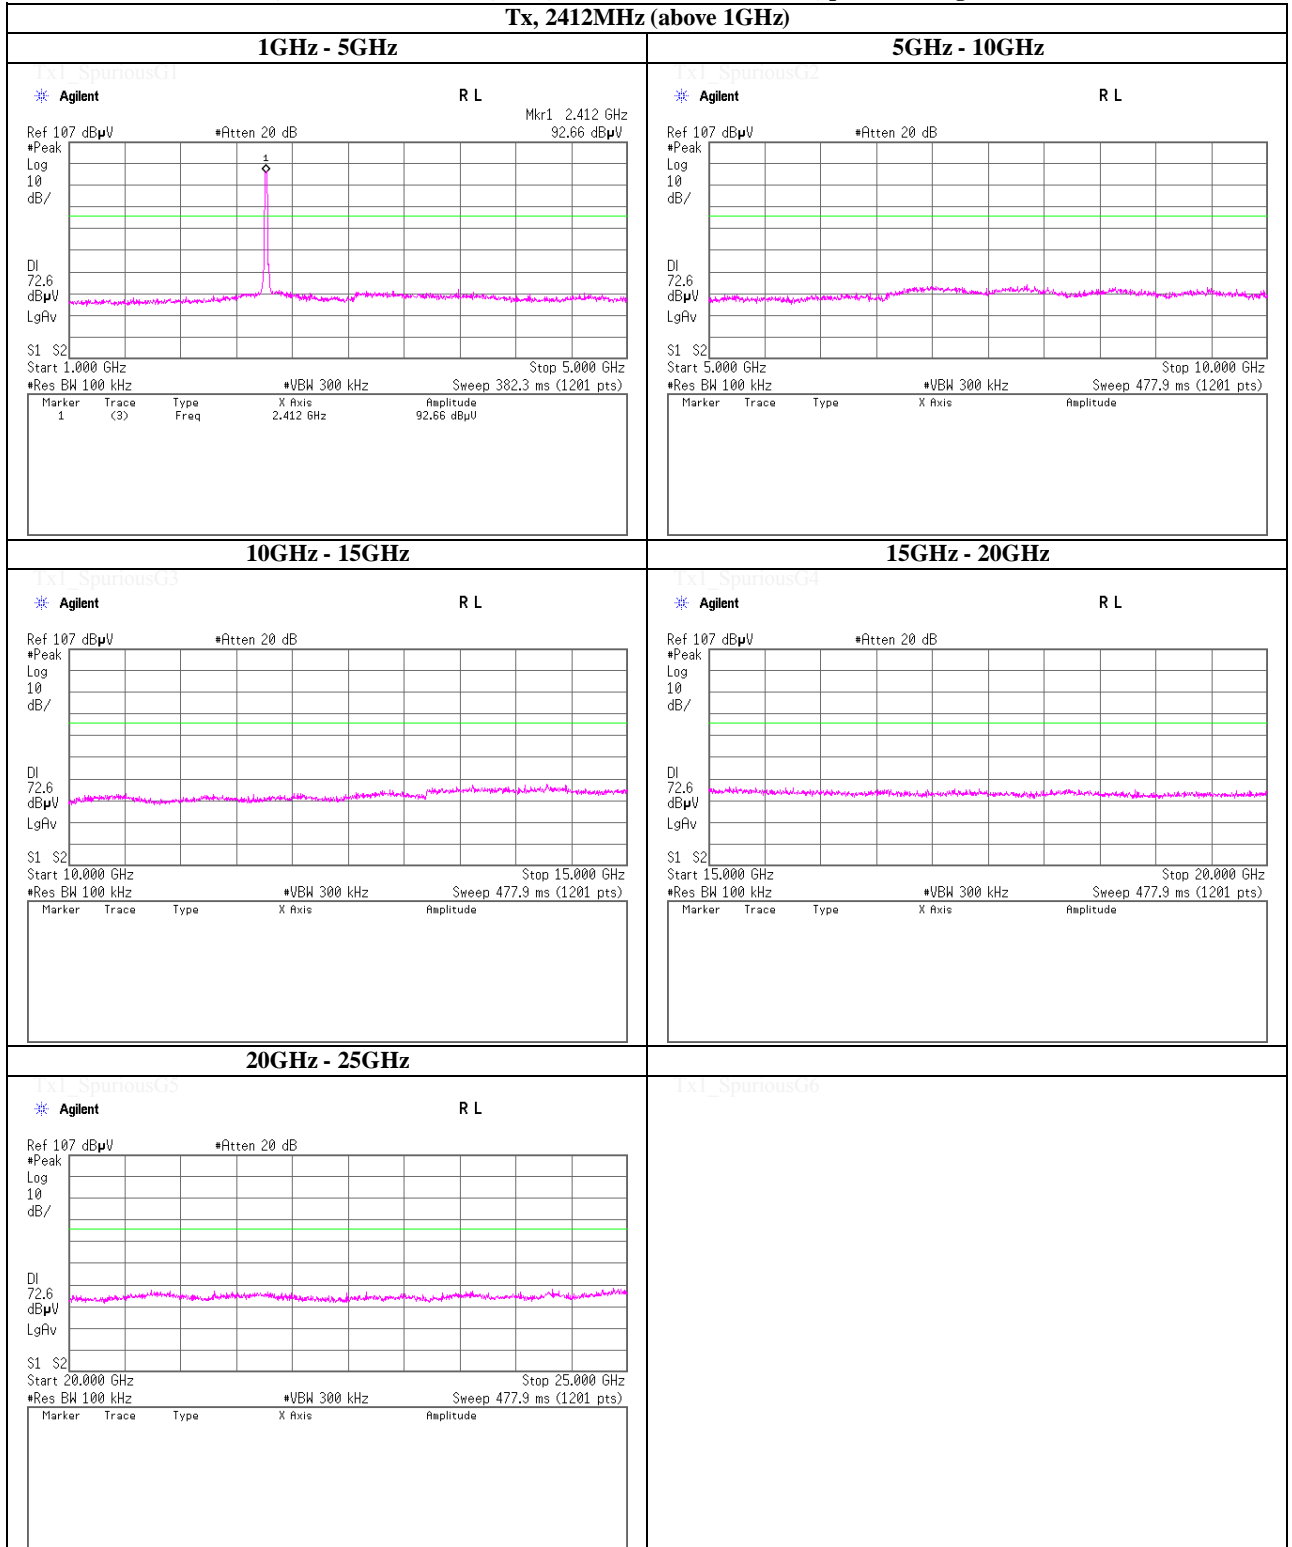

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm

Tx, 2437MHz (above 1GHz)

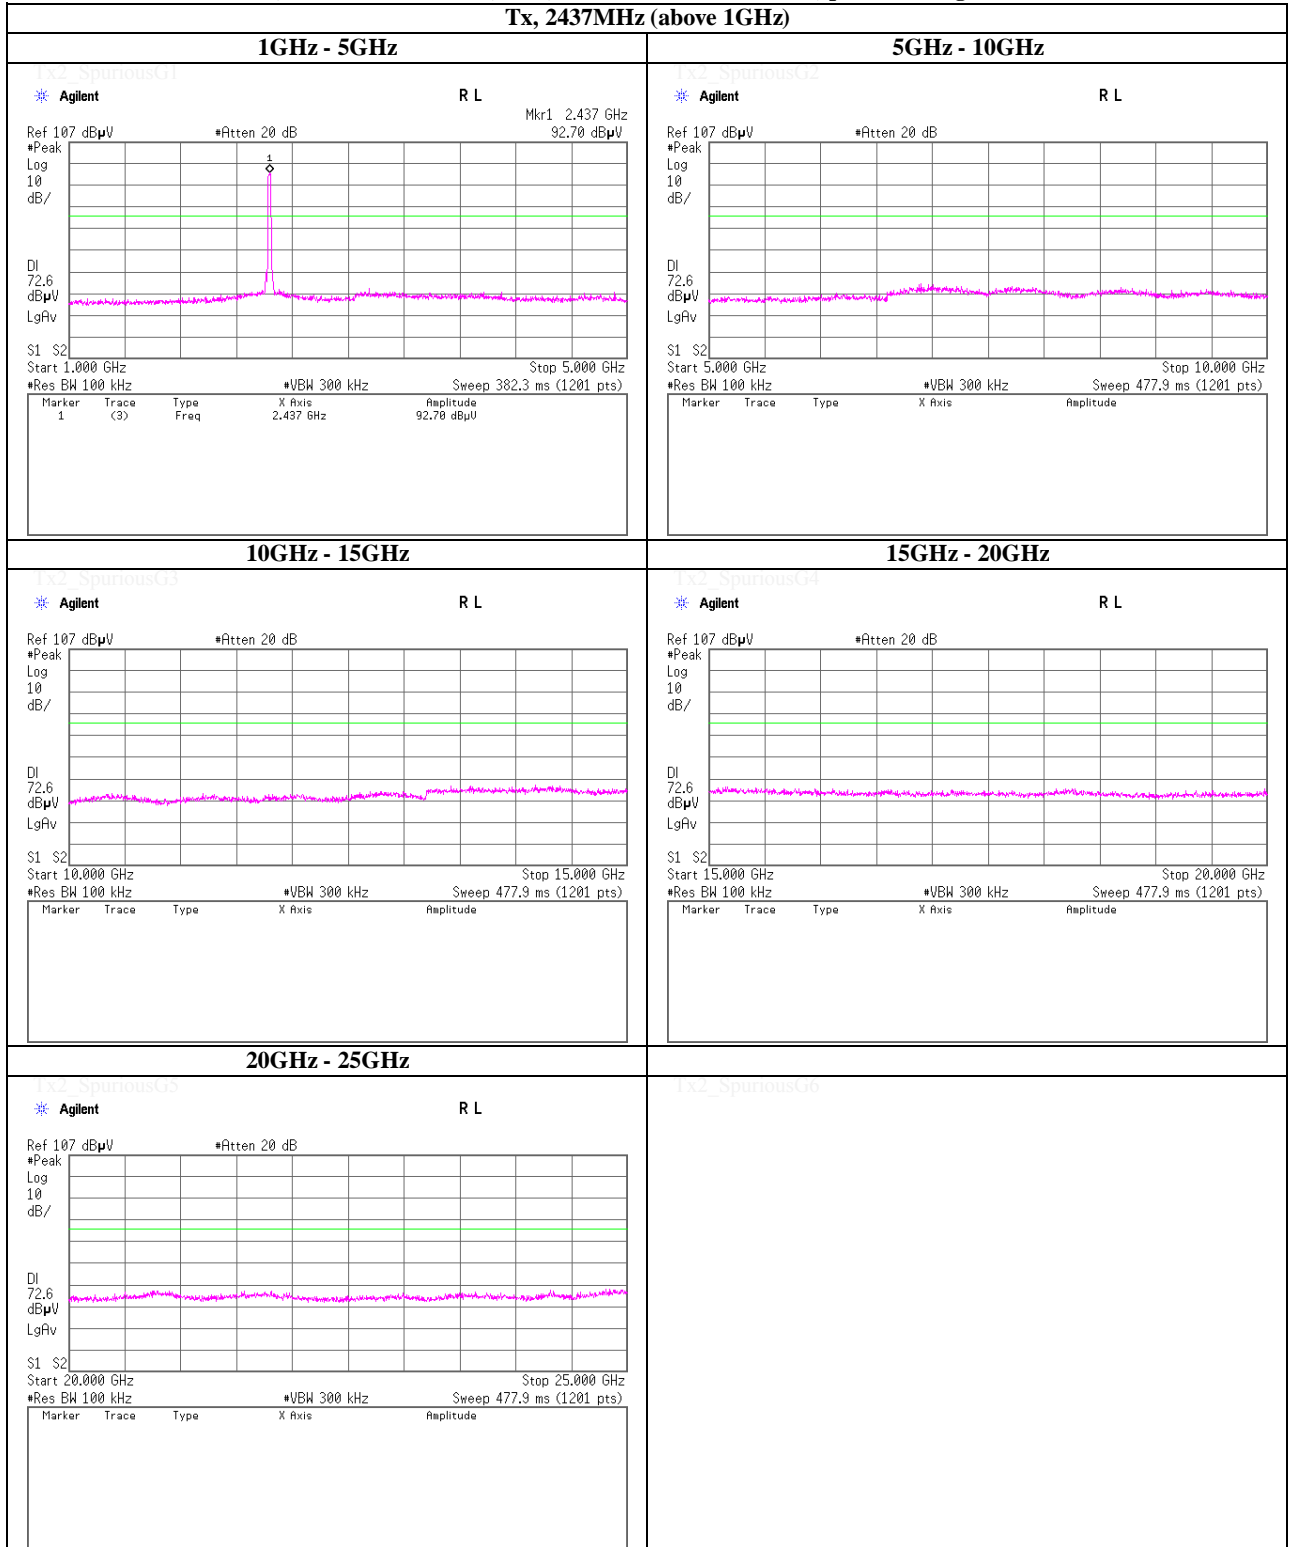

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm

Tx, 2462MHz (above 1GHz)

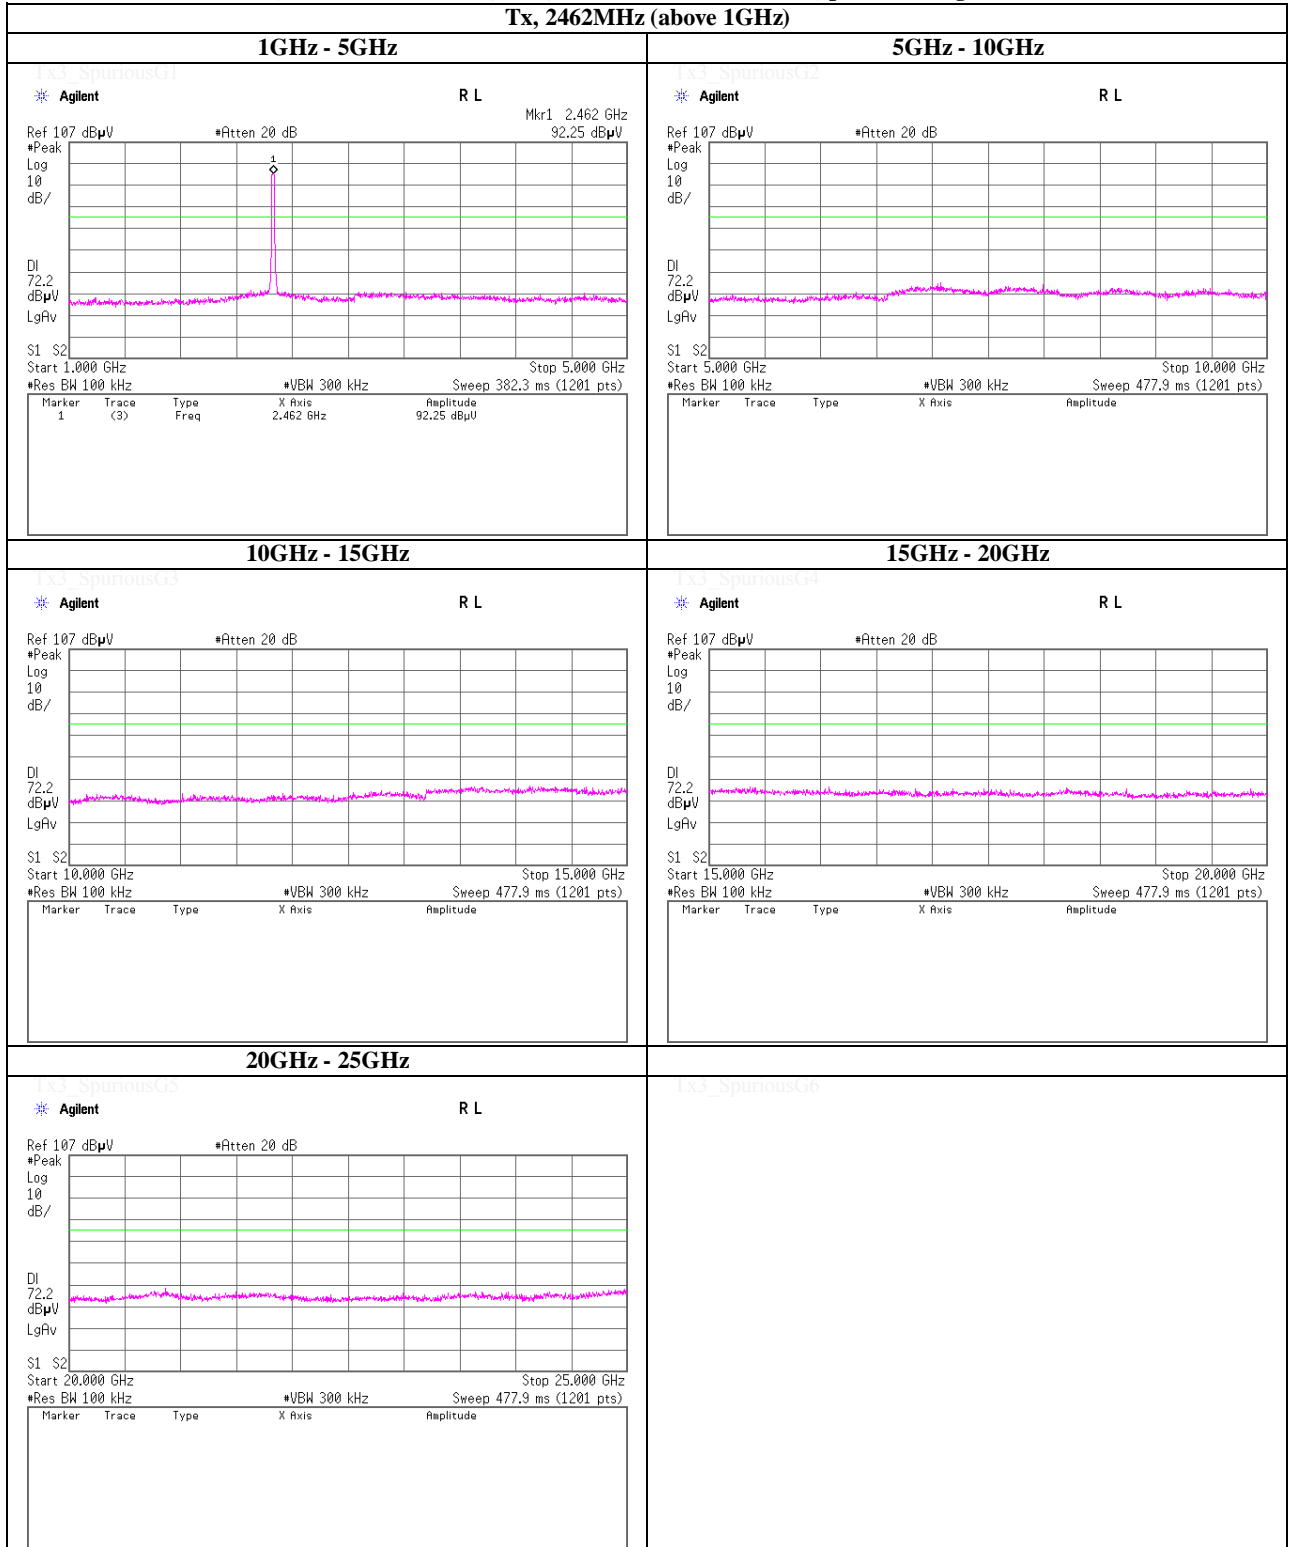

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401



### Spurious emission (Conducted)

Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm

Tx, 2412MHz (above 1GHz)

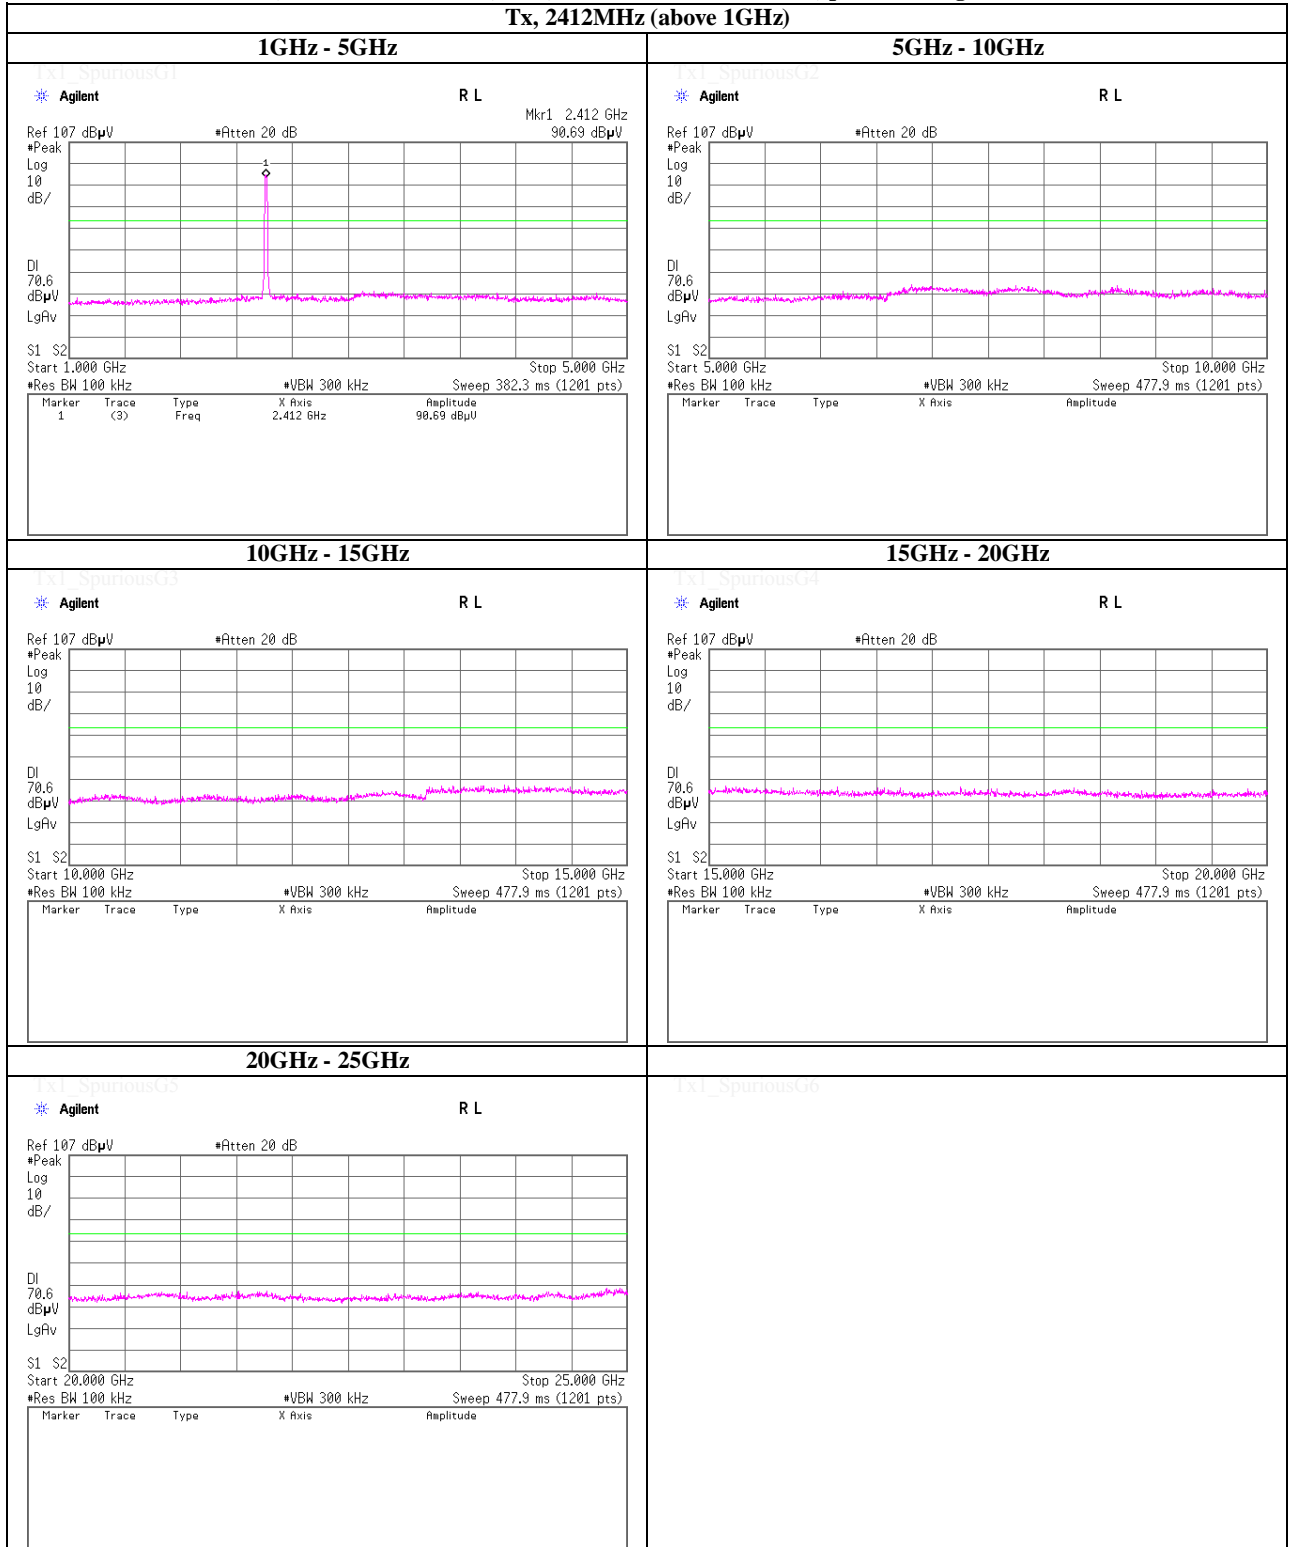

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm

Tx, 2437MHz (above 1GHz)

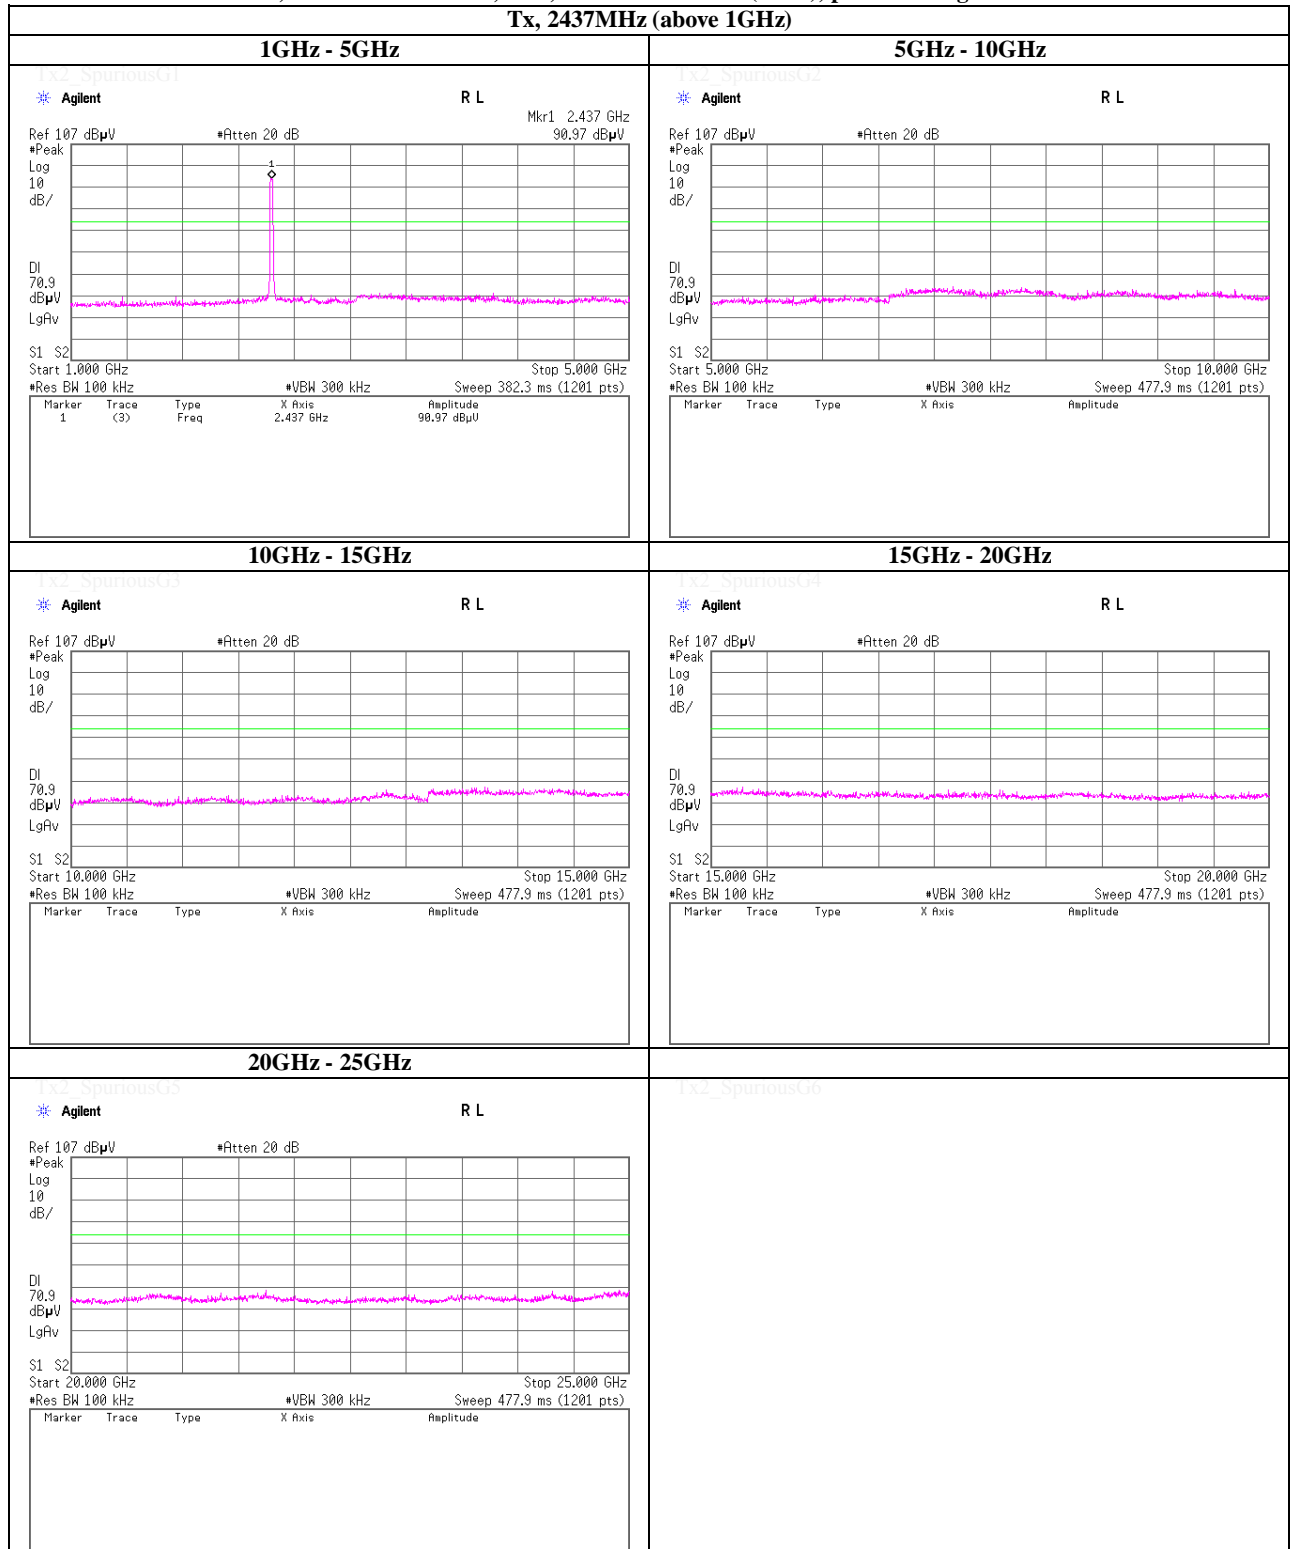

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm

Tx, 2462MHz (above 1GHz)

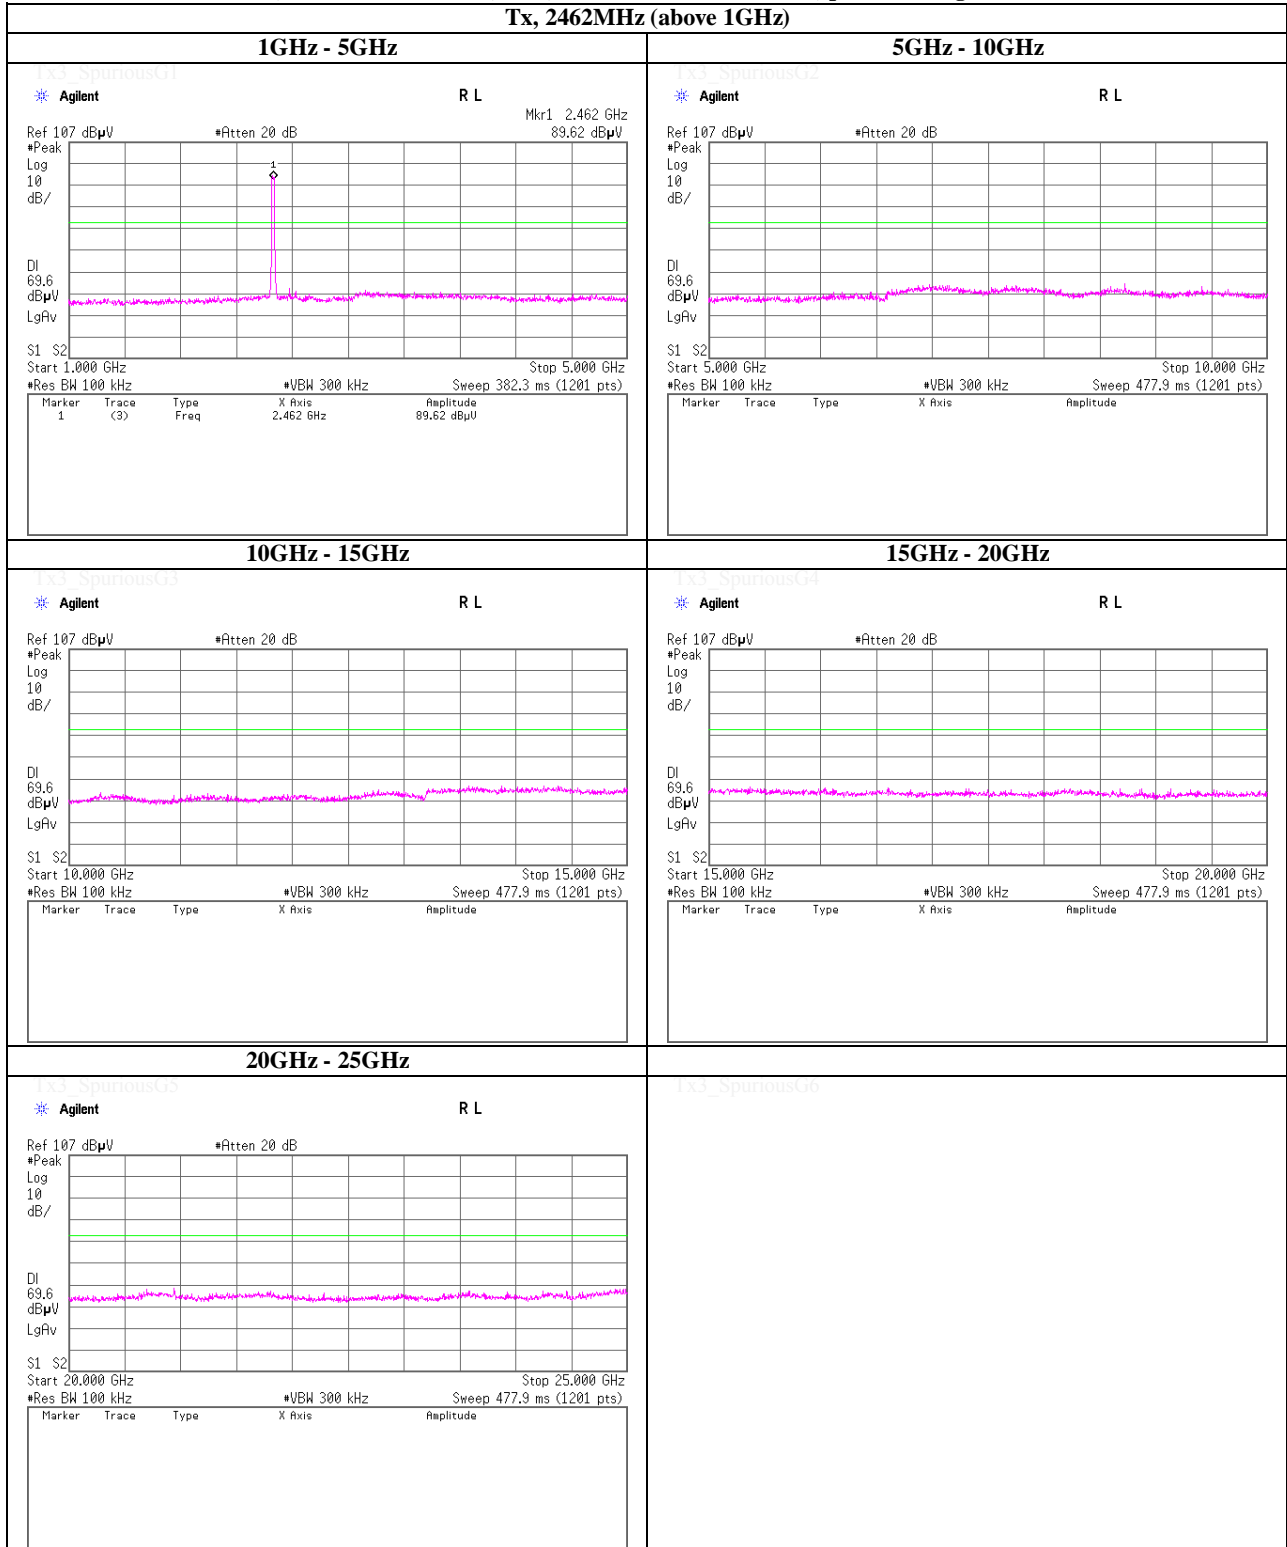

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm

Tx, 2422MHz (above 1GHz)

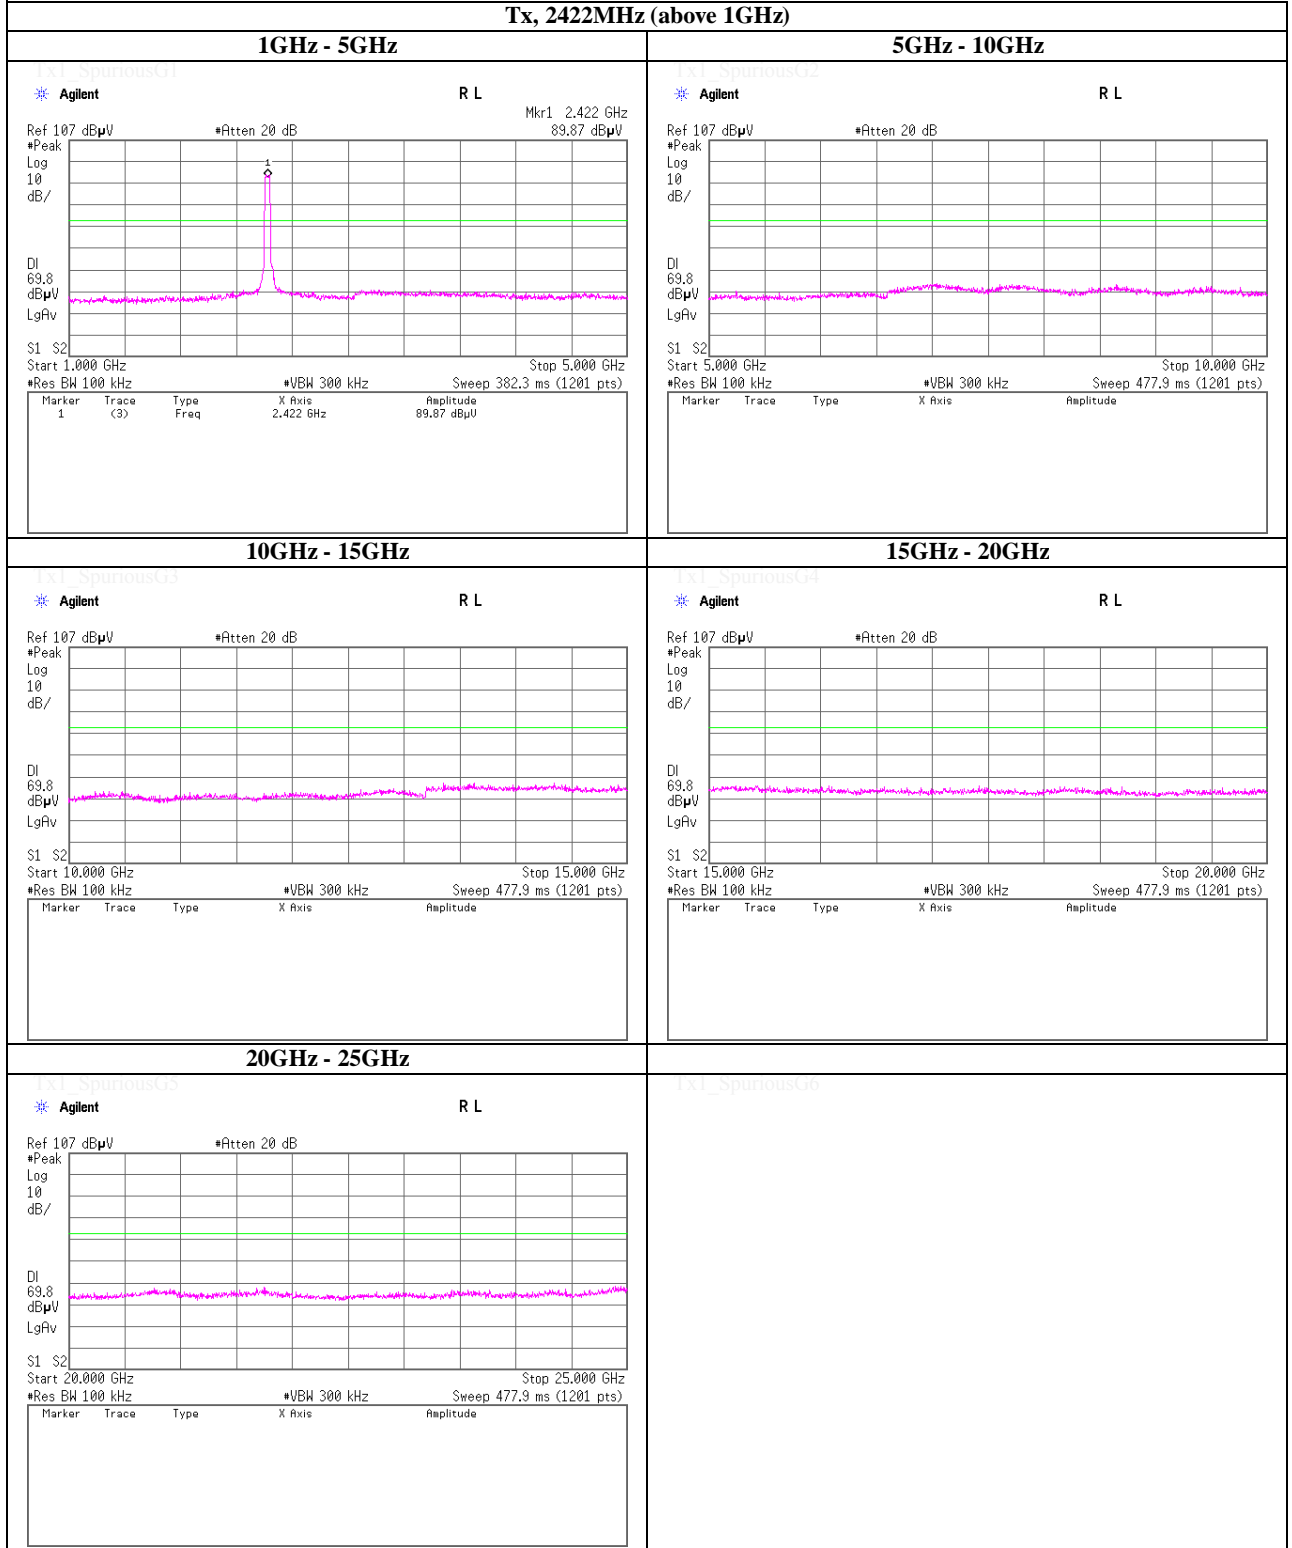

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm

Tx, 2437MHz (above 1GHz)

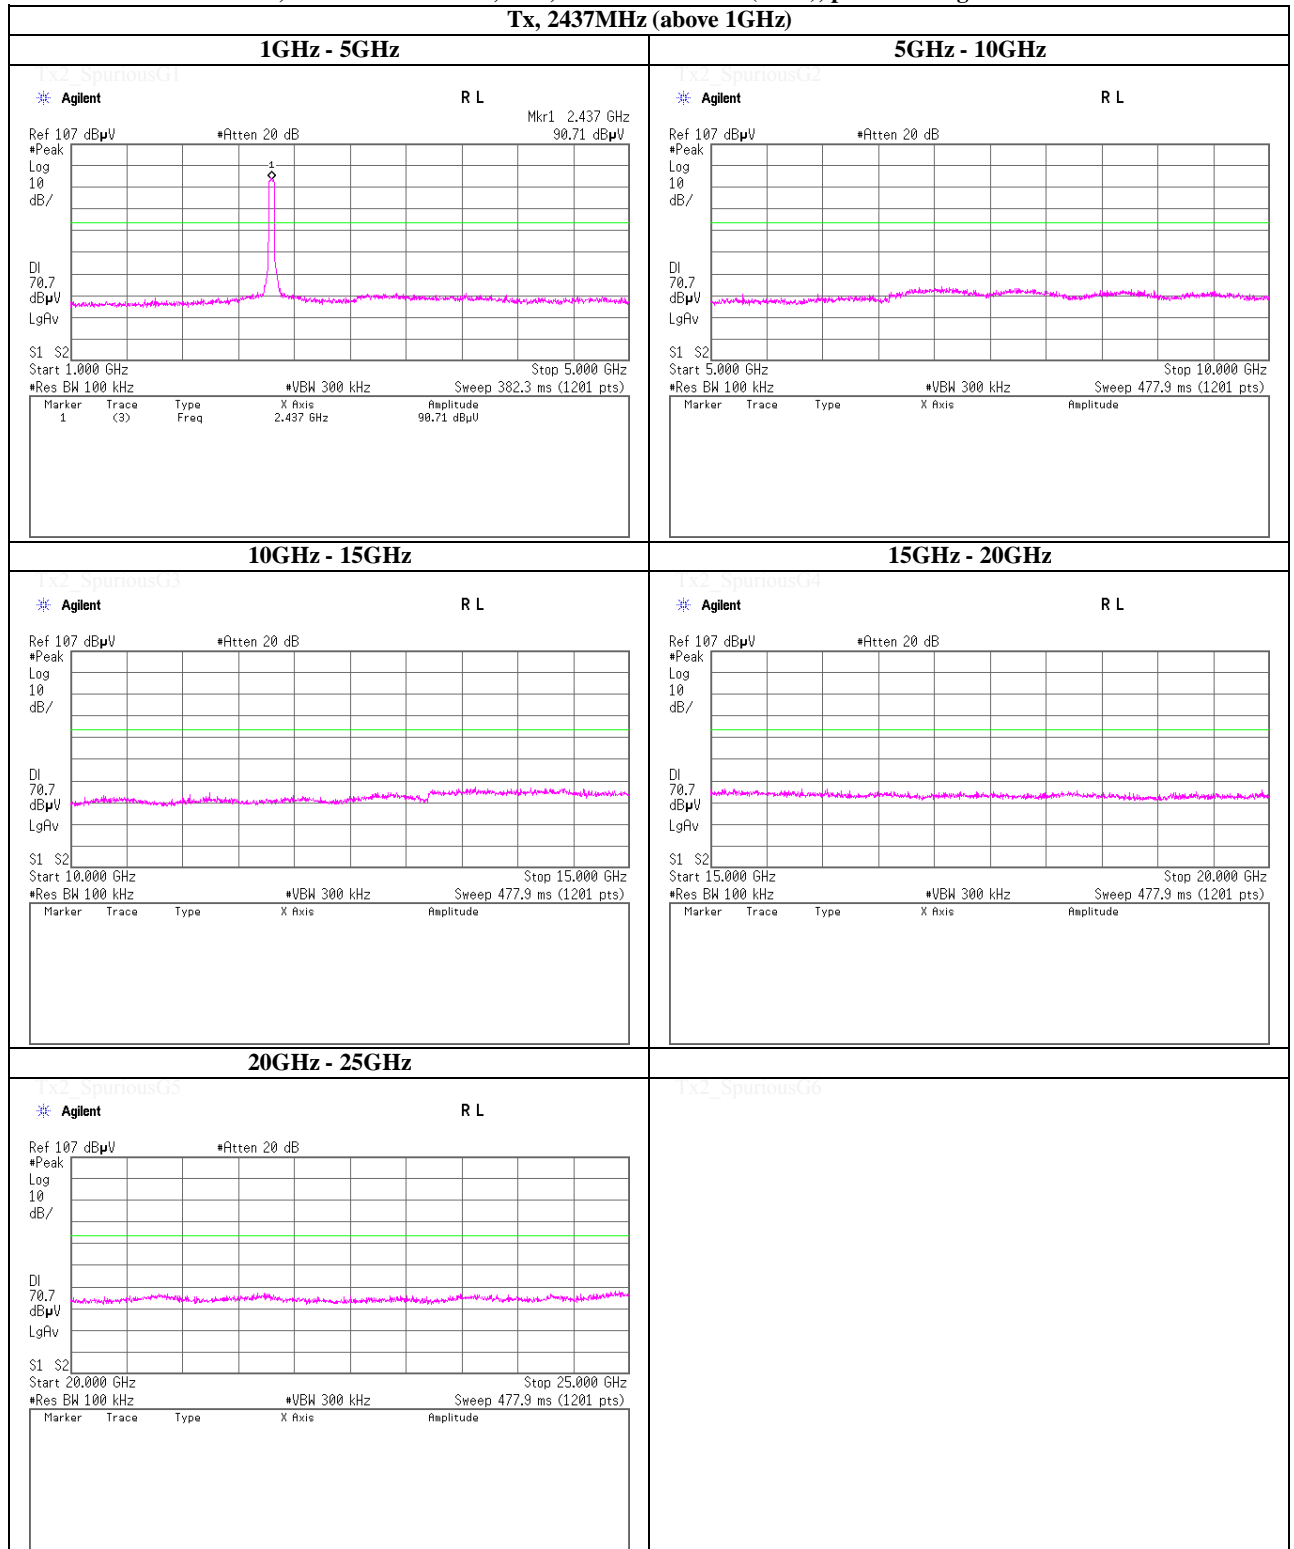

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm

Tx, 2452MHz (above 1GHz)

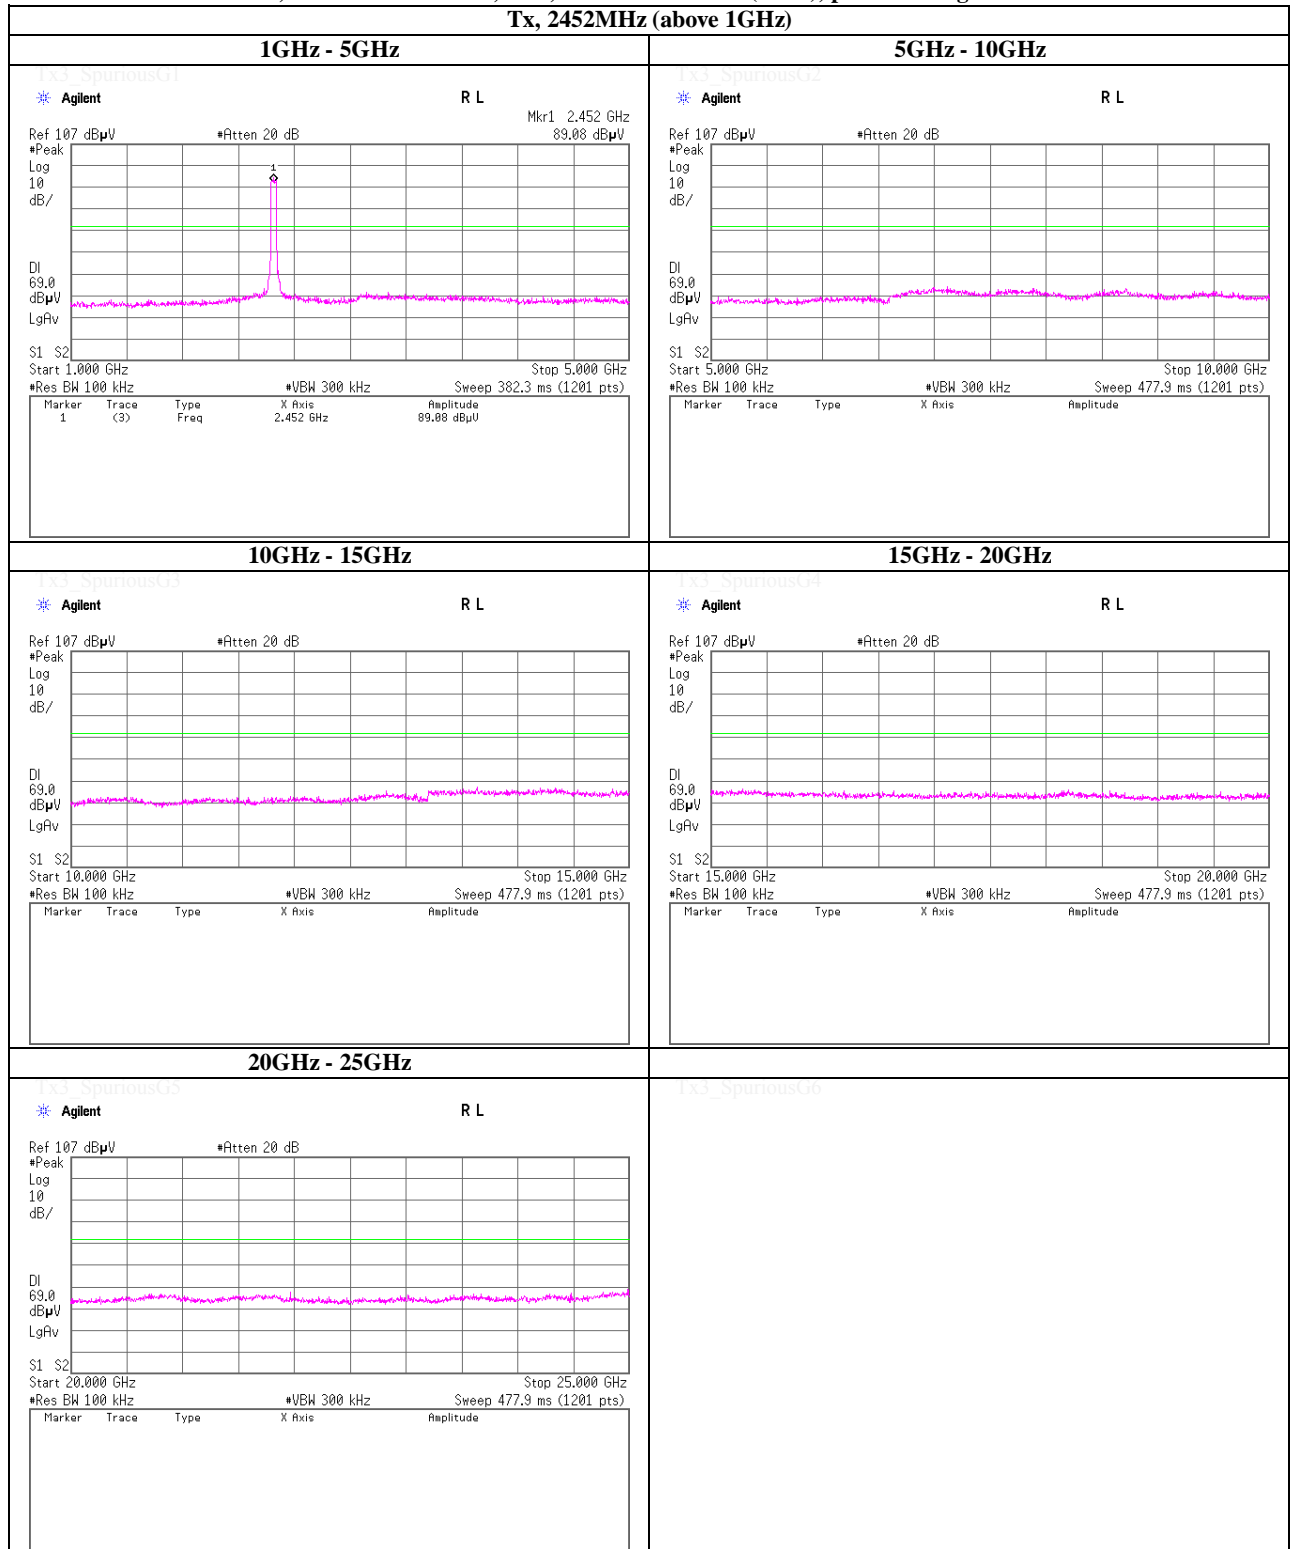

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm**

**Tx, 2422MHz (above 1GHz)**

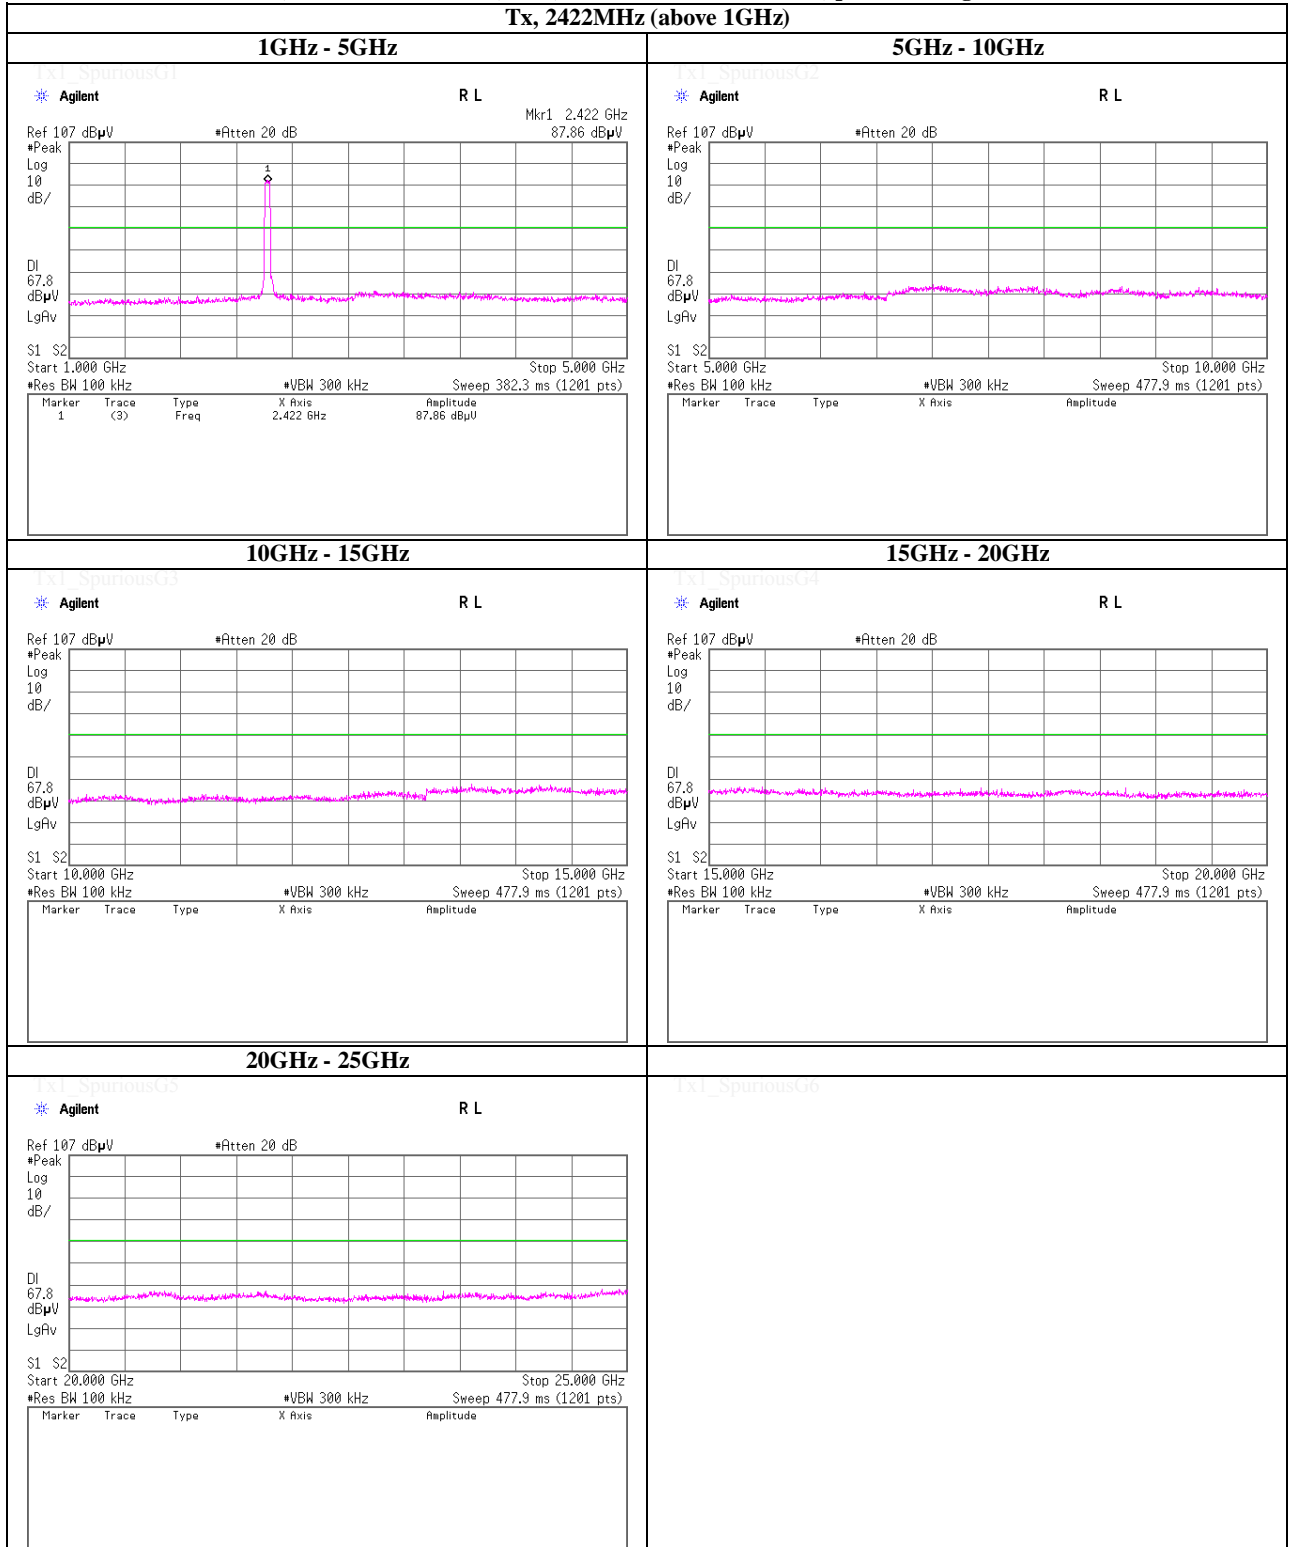

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

**Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm**

**Tx, 2437MHz (above 1GHz)**

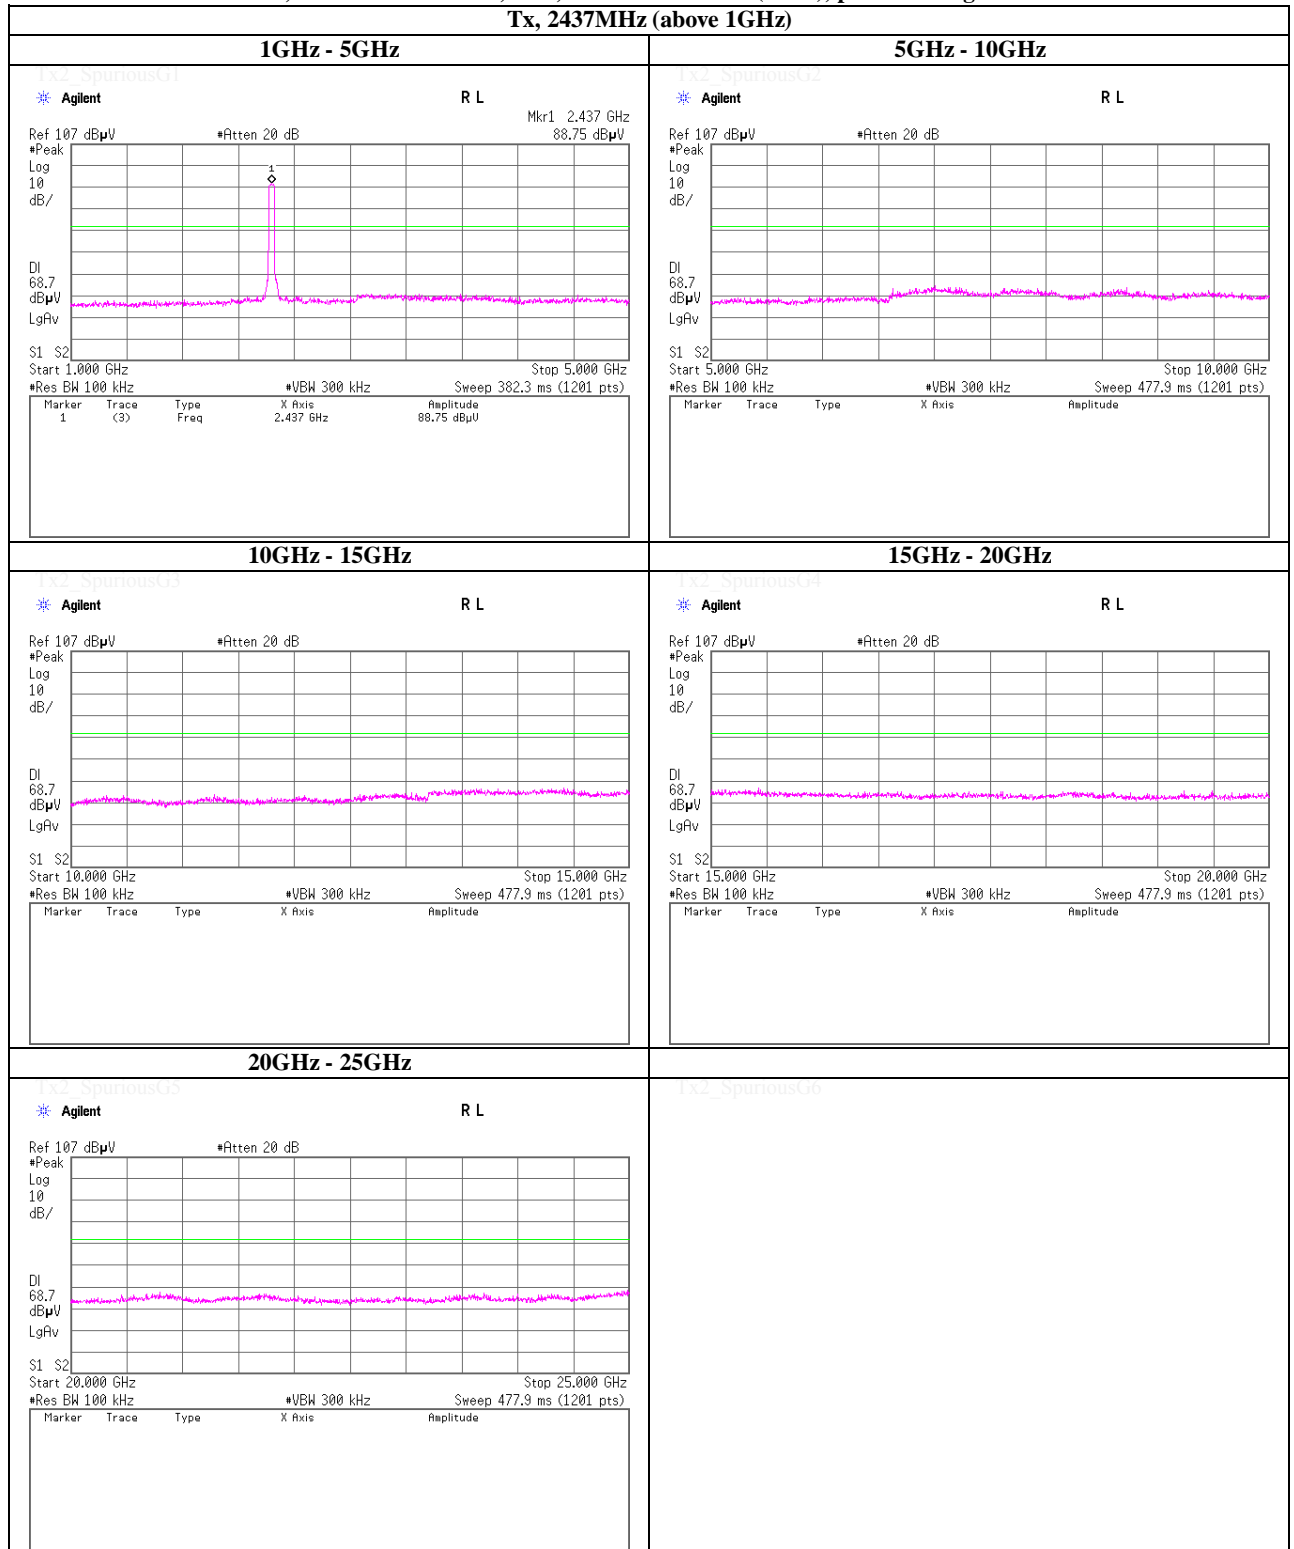

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401



### Spurious emission (Conducted)

**Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm**

**Tx, 2452MHz (above 1GHz)**

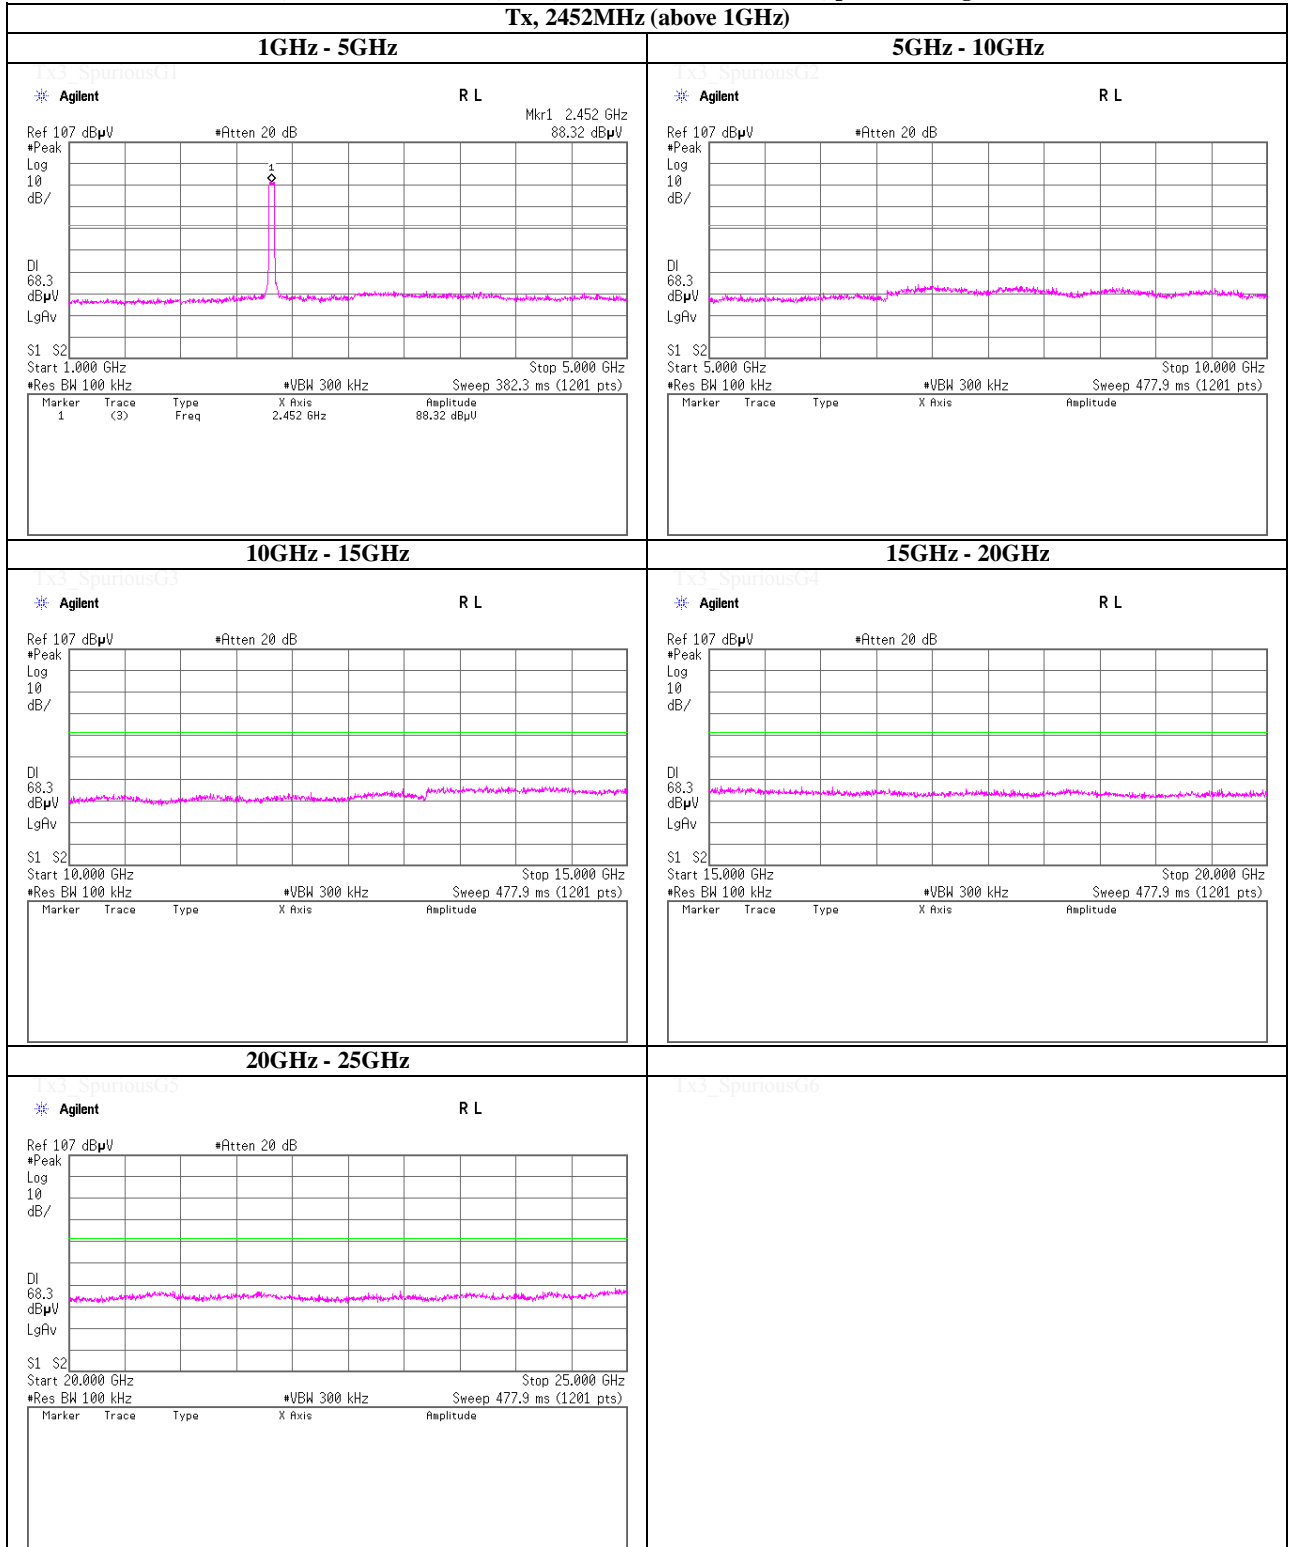

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

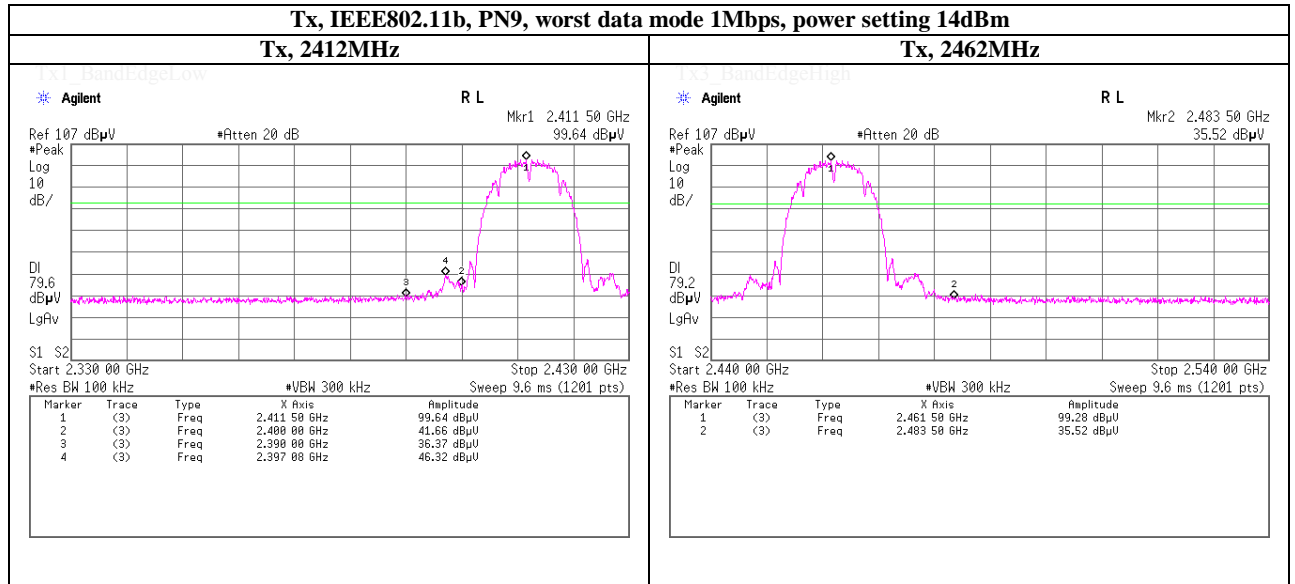

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

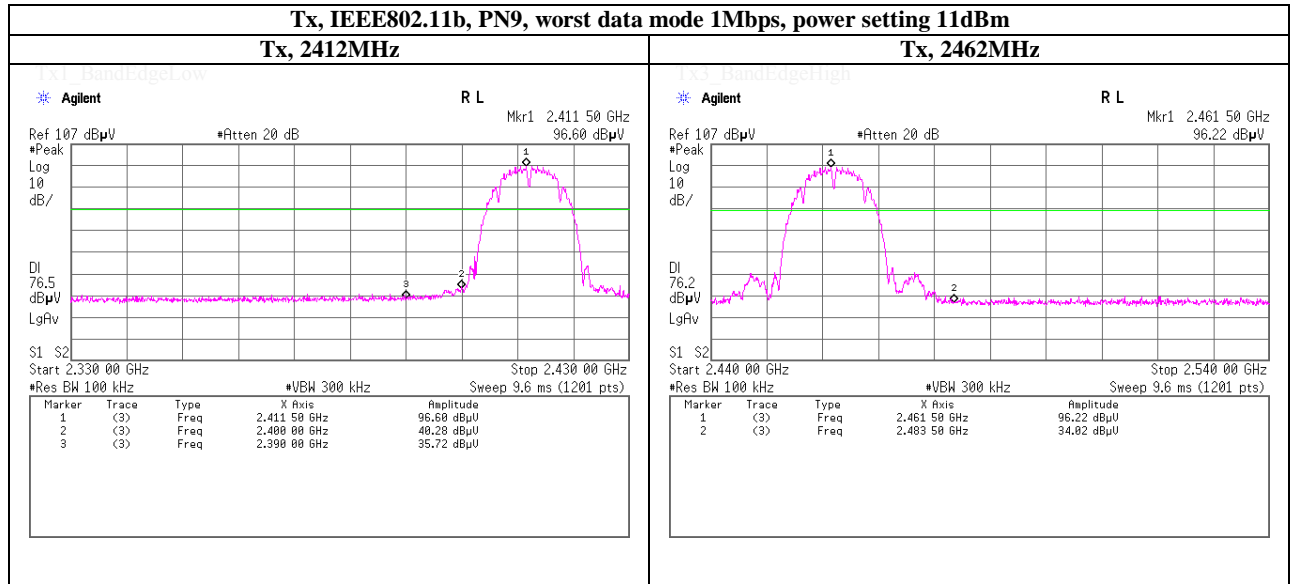

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

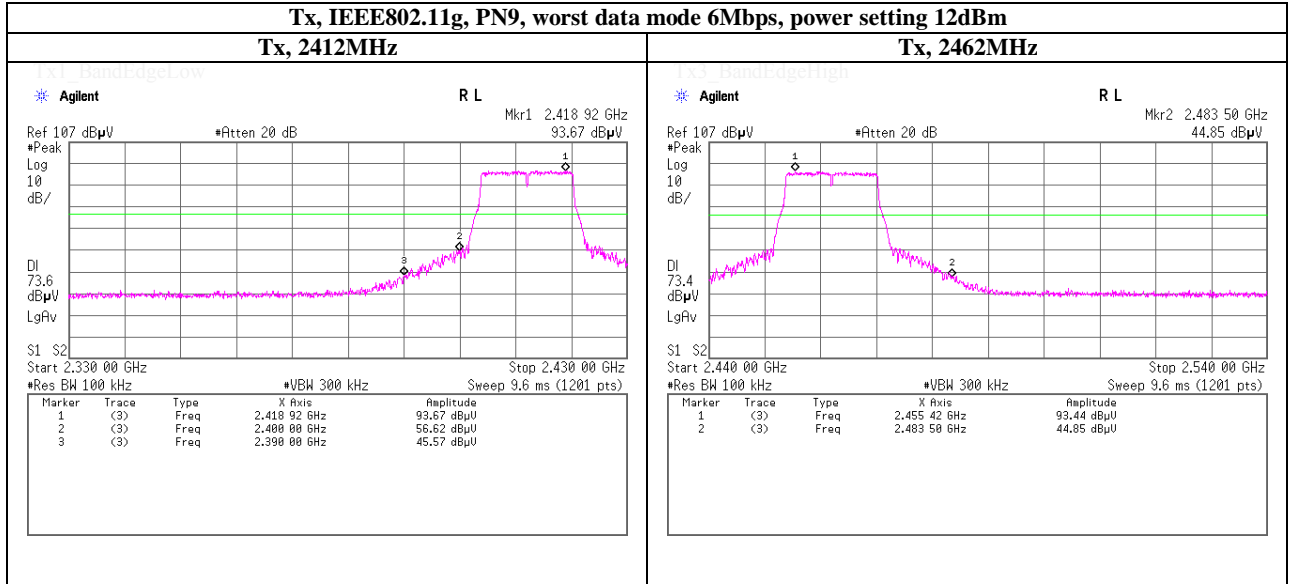

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

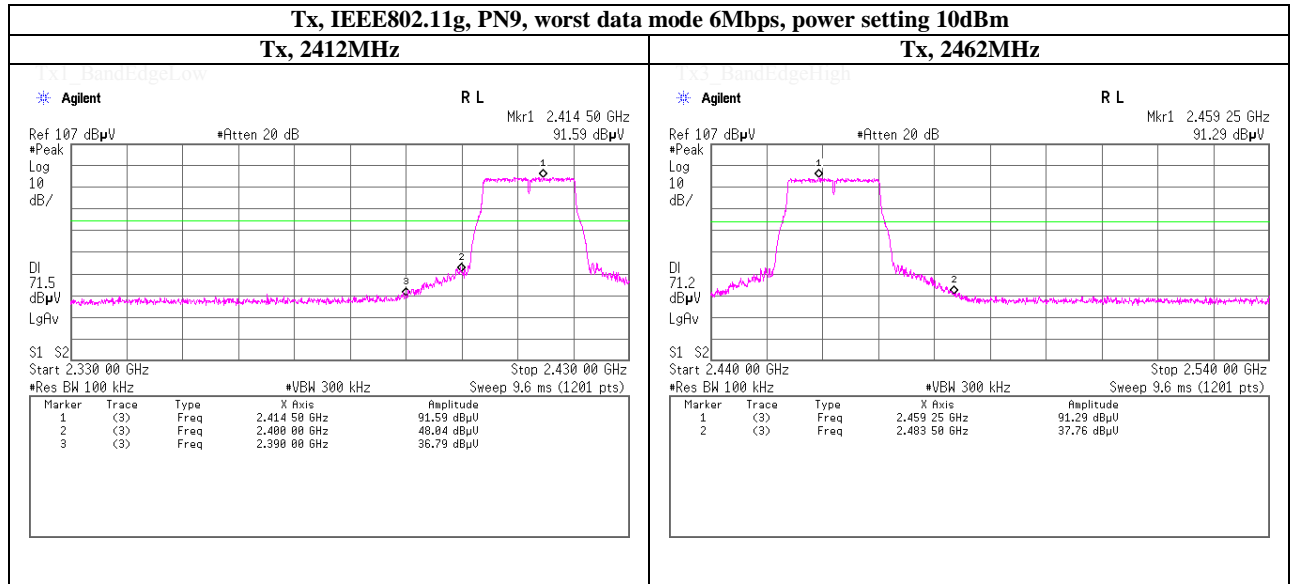

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

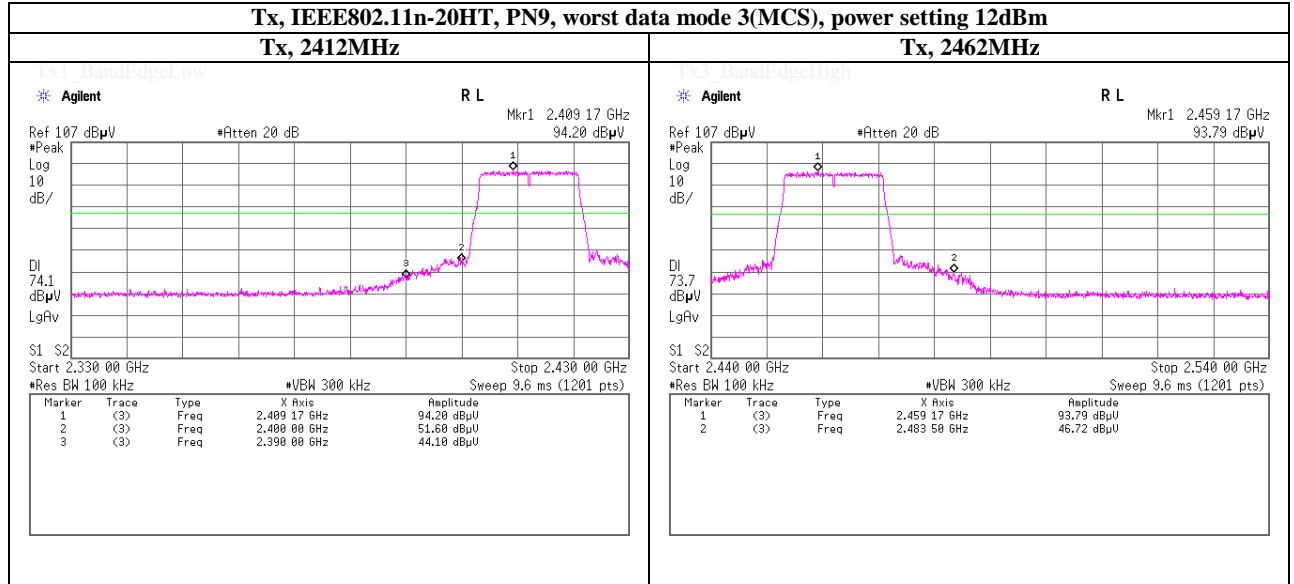

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

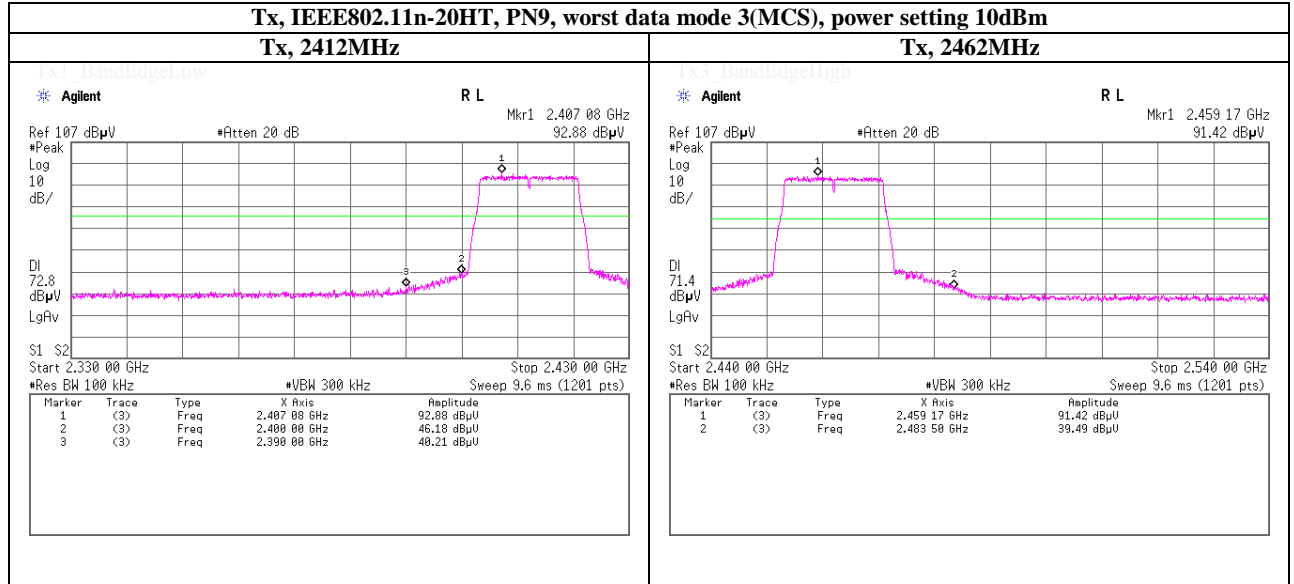

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

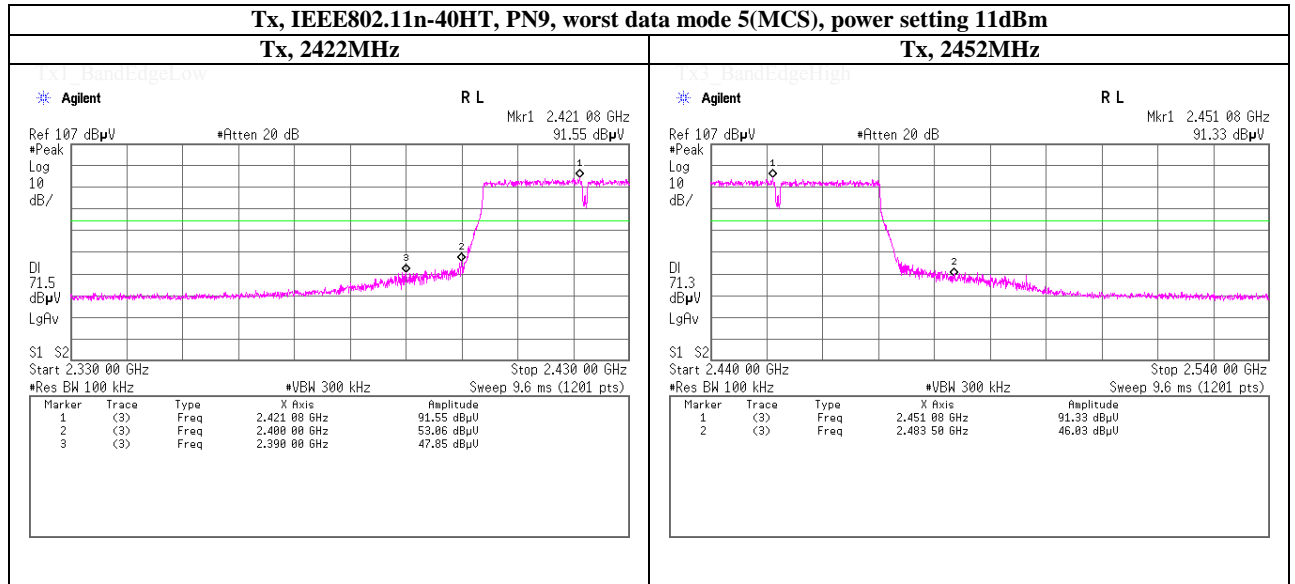

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



## Spurious emission (Conducted)

### Band Edge compliance

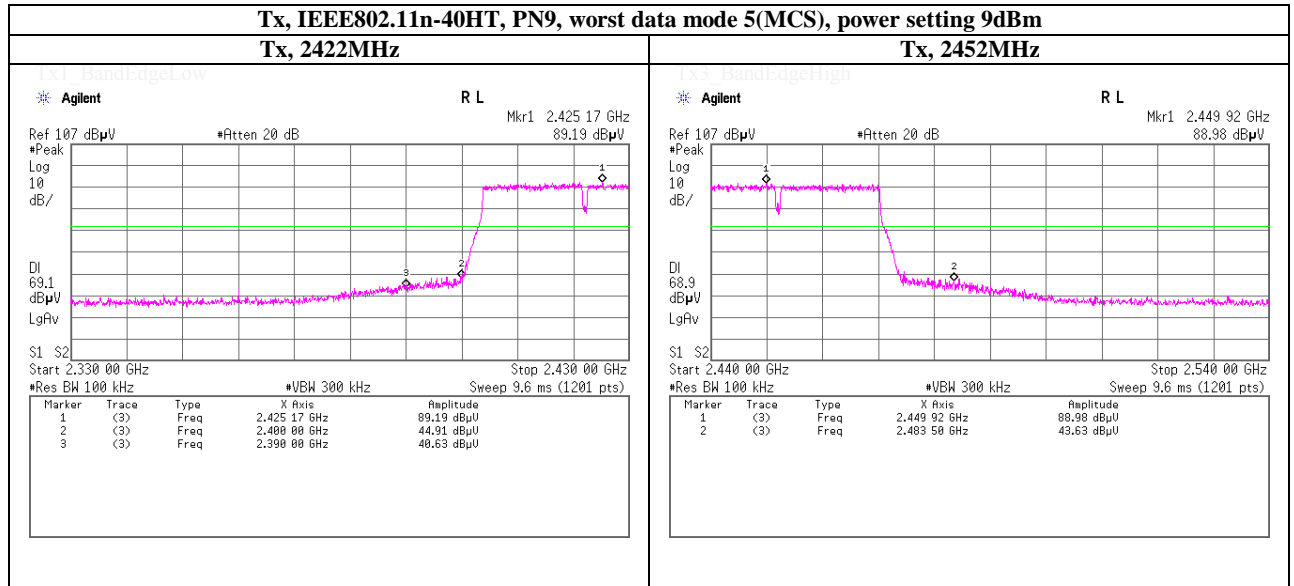

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### Power Density

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 14dBm |                    |

| Ch. Freq.<br>[MHz] | Freq. Reading<br>[MHz] | Reading<br>[dBm] | Cable Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|------------------------|------------------|--------------------|----------------|-----------------|----------------|----------------|
| 2412.0000          | 2412.83                | -12.96           | 1.00               | 9.97           | -1.99           | 8.00           | 9.99           |
| 2437.0000          | 2436.23                | -13.14           | 1.00               | 9.97           | -2.17           | 8.00           | 10.17          |
| 2462.0000          | 2461.22                | -13.15           | 1.00               | 9.97           | -2.18           | 8.00           | 10.18          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

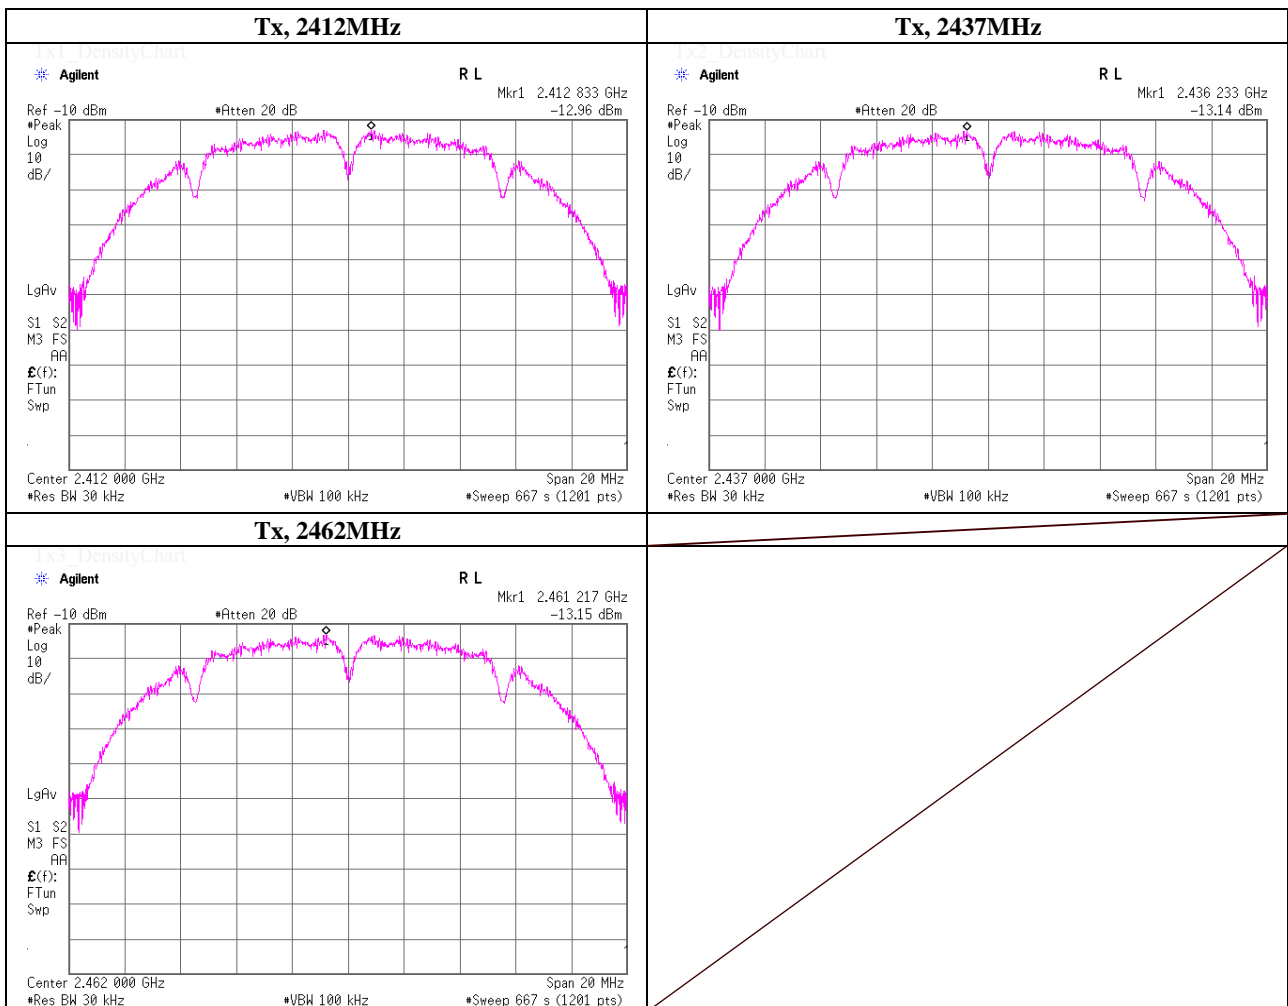

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### Power Density

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11b, PN9, worst data mode 1Mbps, power setting 11dBm |                    |

| Ch. Freq.<br>[MHz] | Freq.<br>Reading<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|---------------------------|------------------|-----------------------|----------------|-----------------|----------------|----------------|
| 2412.0000          | 2411.23                   | -15.78           | 1.00                  | 9.97           | -4.81           | 8.00           | 12.81          |
| 2437.0000          | 2437.83                   | -16.15           | 1.00                  | 9.97           | -5.18           | 8.00           | 13.18          |
| 2462.0000          | 2462.93                   | -16.37           | 1.00                  | 9.97           | -5.40           | 8.00           | 13.40          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

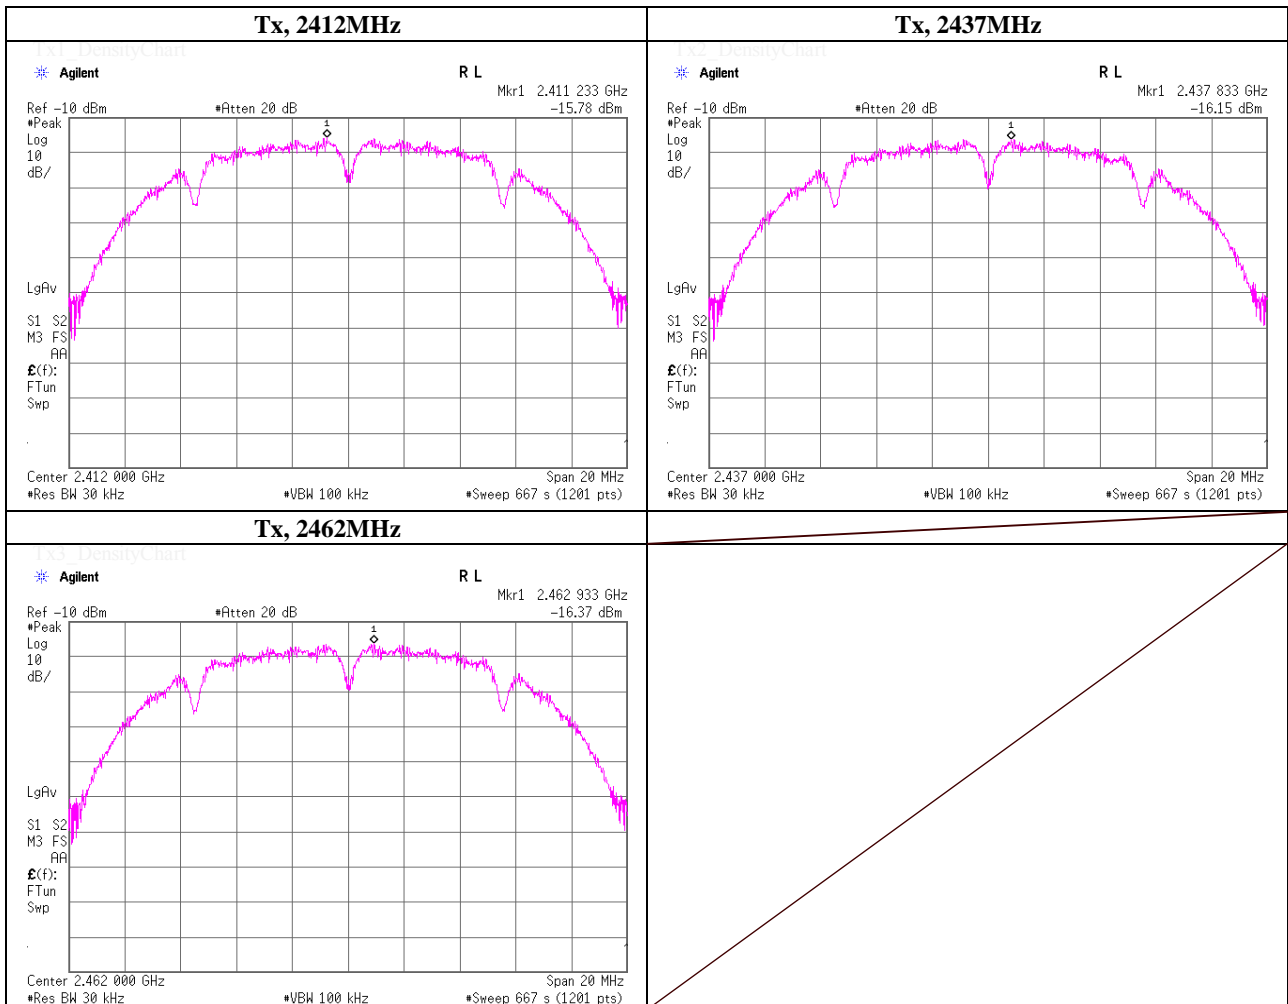

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### Power Density

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 12dBm |                    |

| Ch. Freq.<br>[MHz] | Freq. Reading<br>[MHz] | Reading<br>[dBm] | Cable Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|------------------------|------------------|--------------------|----------------|-----------------|----------------|----------------|
| 2412.0000          | 2419.52                | -15.30           | 1.00               | 9.97           | -4.33           | 8.00           | 12.33          |
| 2437.0000          | 2444.53                | -16.28           | 1.00               | 9.97           | -5.31           | 8.00           | 13.31          |
| 2462.0000          | 2462.67                | -16.66           | 1.00               | 9.97           | -5.69           | 8.00           | 13.69          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

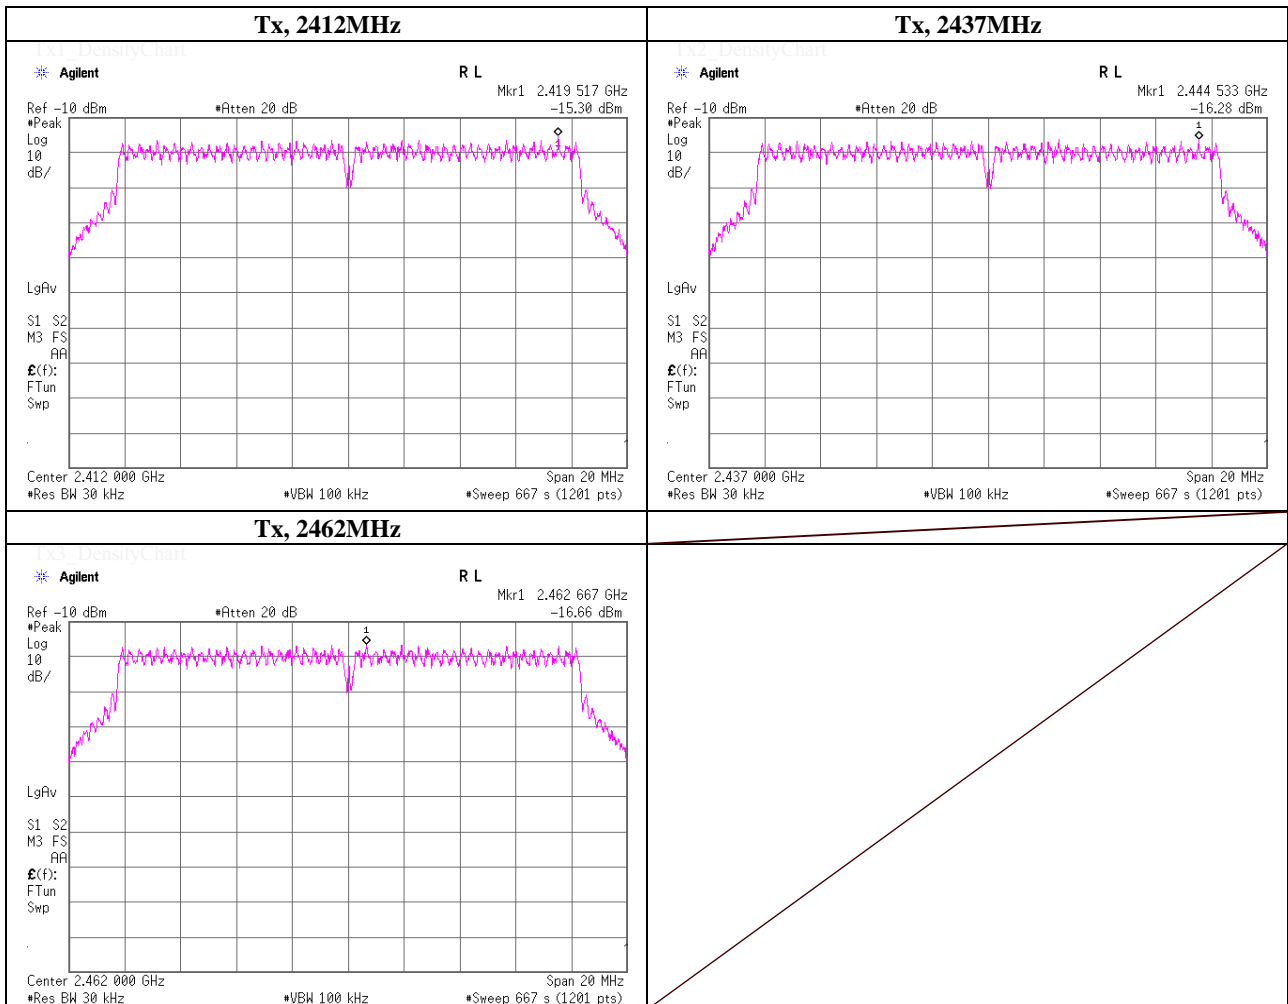

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### Power Density

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.                                   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11g, PN9, worst data mode 6Mbps, power setting 10dBm |                    |

| Ch. Freq.<br>[MHz] | Freq.<br>Reading<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|---------------------------|------------------|-----------------------|----------------|-----------------|----------------|----------------|
| 2412.0000          | 2419.52                   | -17.75           | 1.00                  | 9.97           | -6.78           | 8.00           | 14.78          |
| 2437.0000          | 2444.52                   | -17.75           | 1.00                  | 9.97           | -6.78           | 8.00           | 14.78          |
| 2462.0000          | 2469.52                   | -18.19           | 1.00                  | 9.97           | -7.22           | 8.00           | 15.22          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

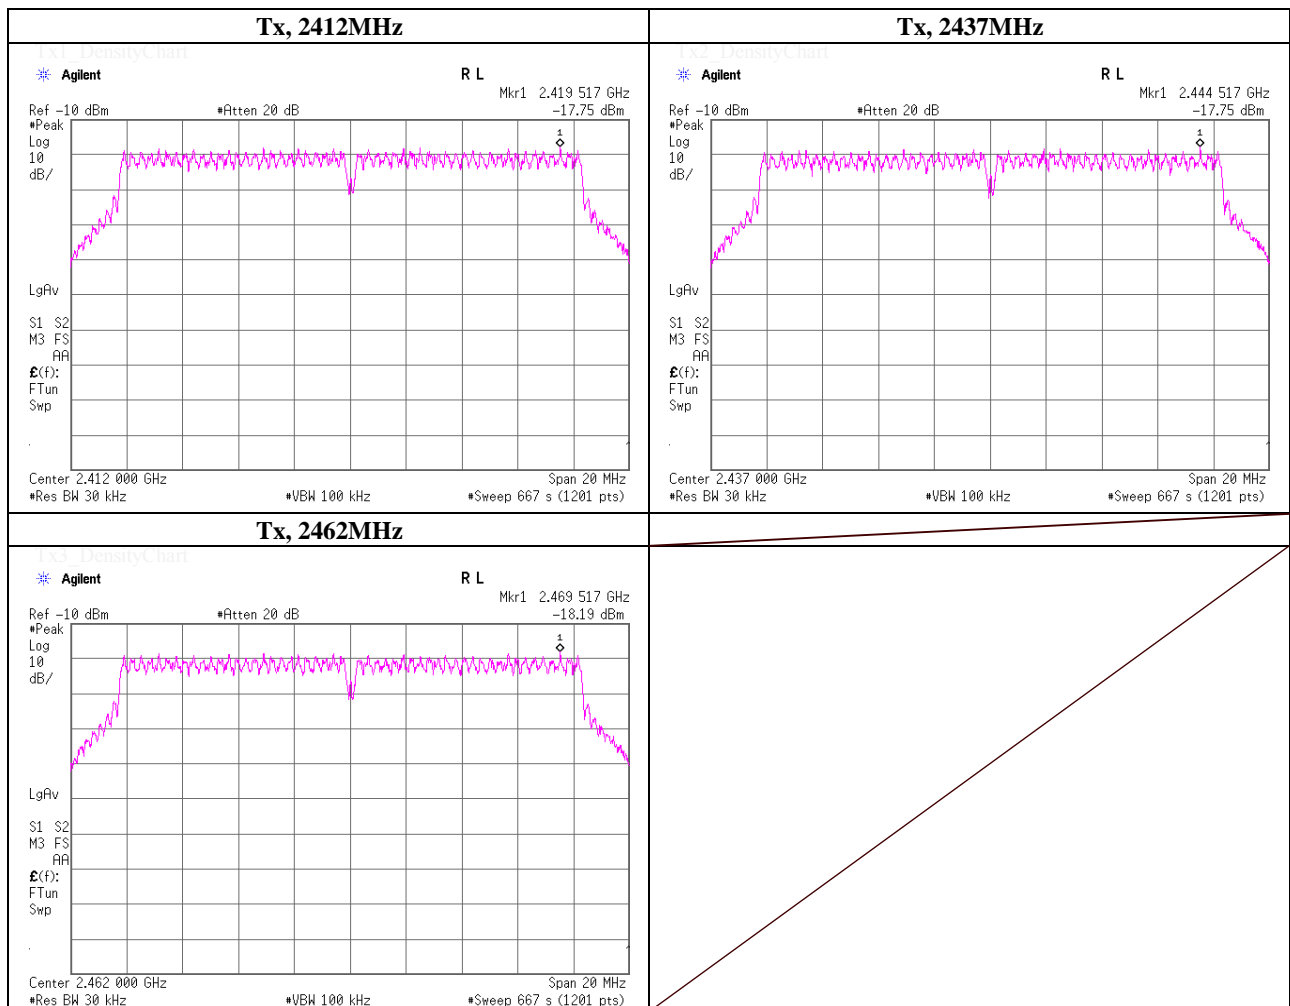

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### Power Density

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 12dBm |                    |

| Ch. Freq.<br>[MHz] | Freq.<br>Reading<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|---------------------------|------------------|-----------------------|----------------|-----------------|----------------|----------------|
| 2412.0000          | 2412.65                   | -16.24           | 1.00                  | 9.97           | -5.27           | 8.00           | 13.27          |
| 2437.0000          | 2437.65                   | -16.50           | 1.00                  | 9.97           | -5.53           | 8.00           | 13.53          |
| 2462.0000          | 2469.52                   | -16.41           | 1.00                  | 9.97           | -5.44           | 8.00           | 13.44          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

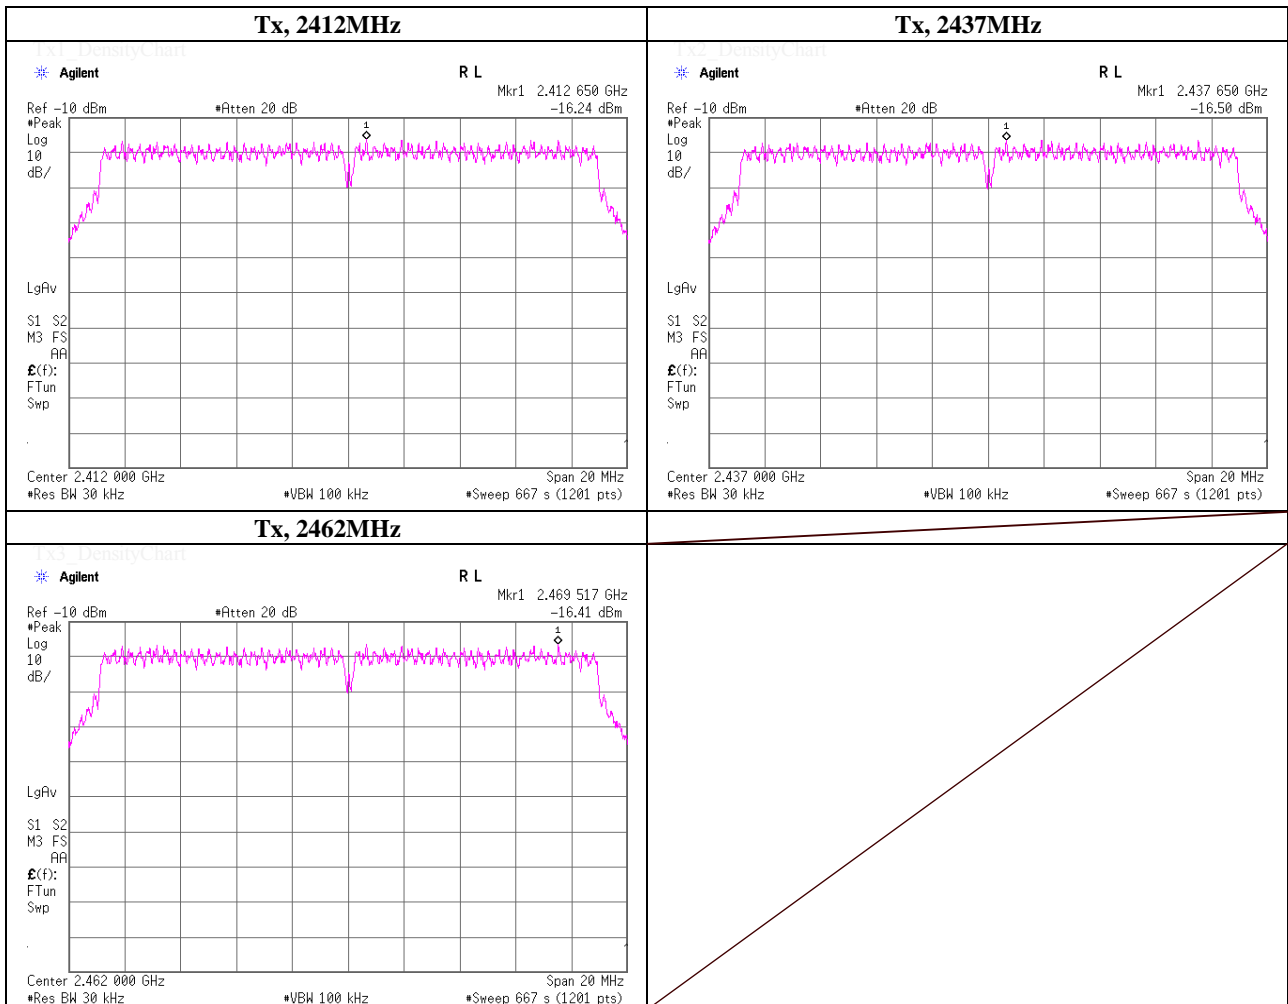

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### Power Density

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11n-20HT, PN9, worst data mode 3(MCS), power setting 10dBm |                    |

| Ch. Freq.<br>[MHz] | Freq.<br>Reading<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|---------------------------|------------------|-----------------------|----------------|-----------------|----------------|----------------|
| 2412.0000          | 2412.65                   | -17.99           | 1.00                  | 9.97           | -7.02           | 8.00           | 15.02          |
| 2437.0000          | 2438.90                   | -17.86           | 1.00                  | 9.97           | -6.89           | 8.00           | 14.89          |
| 2462.0000          | 2462.65                   | -18.30           | 1.00                  | 9.97           | -7.33           | 8.00           | 15.33          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

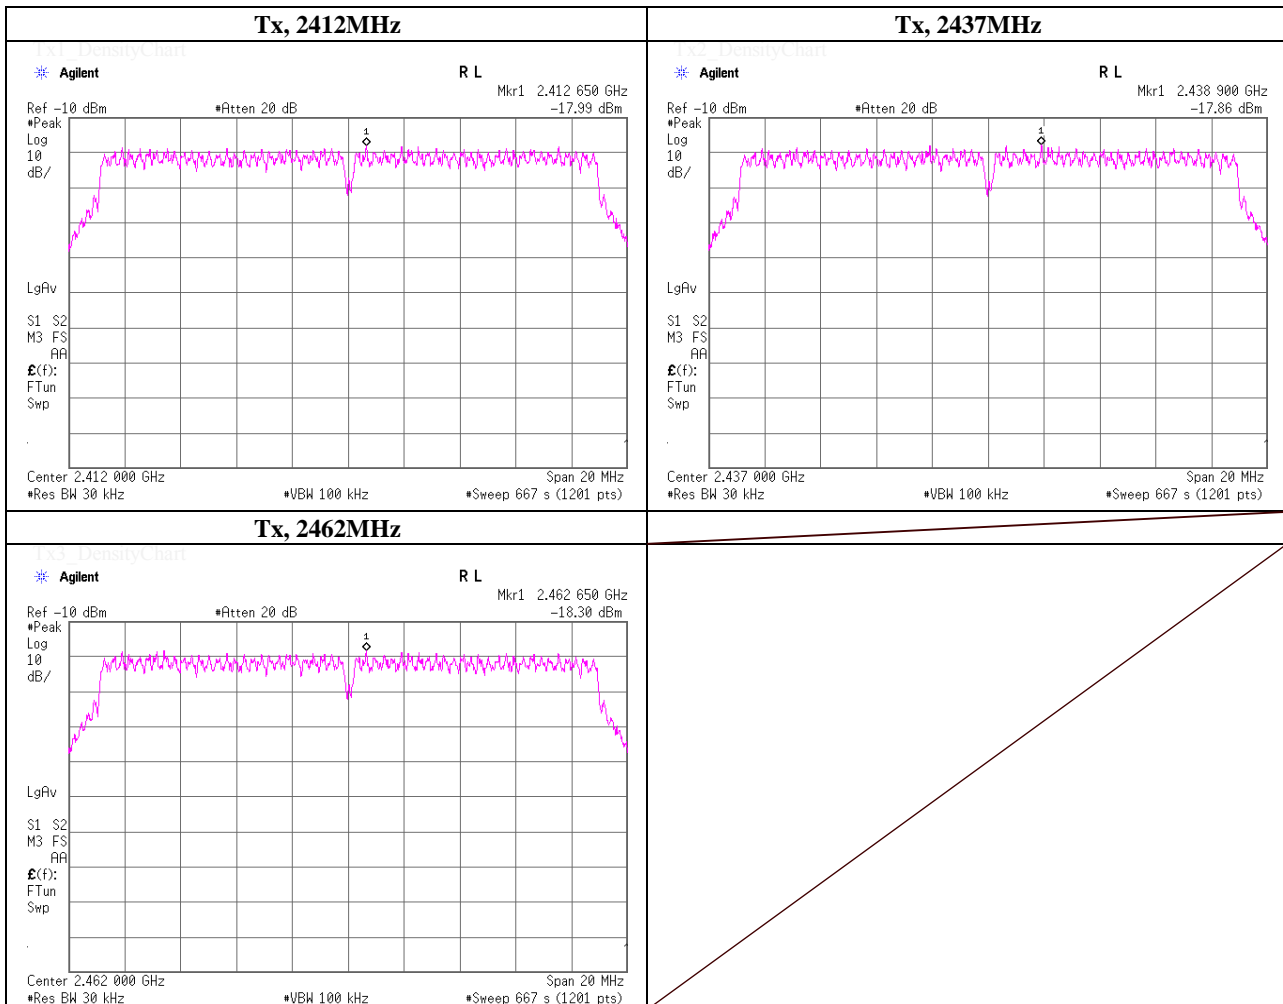

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


### Power Density

|                        |  |                    |
|------------------------|--|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.   | No.5 Shielded Room |
| Date                   | August 22, 2012  |                    |
| Temperature / Humidity | 25deg.C , 62%RH  |                    |
| Engineer               | Shinichi Takano  |                    |
| Mode                   | Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 11dBm |                    |

| Ch. Freq.<br>[MHz] | Freq. Reading<br>[MHz] | Reading<br>[dBm] | Cable Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|------------------------|------------------|--------------------|----------------|-----------------|----------------|----------------|
| 2422.0000          | 2425.77                | -19.64           | 1.00               | 9.97           | -8.67           | 8.00           | 16.67          |
| 2437.0000          | 2452.03                | -19.16           | 1.00               | 9.97           | -8.19           | 8.00           | 16.19          |
| 2452.0000          | 2447.03                | -19.61           | 1.00               | 9.97           | -8.64           | 8.00           | 16.64          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

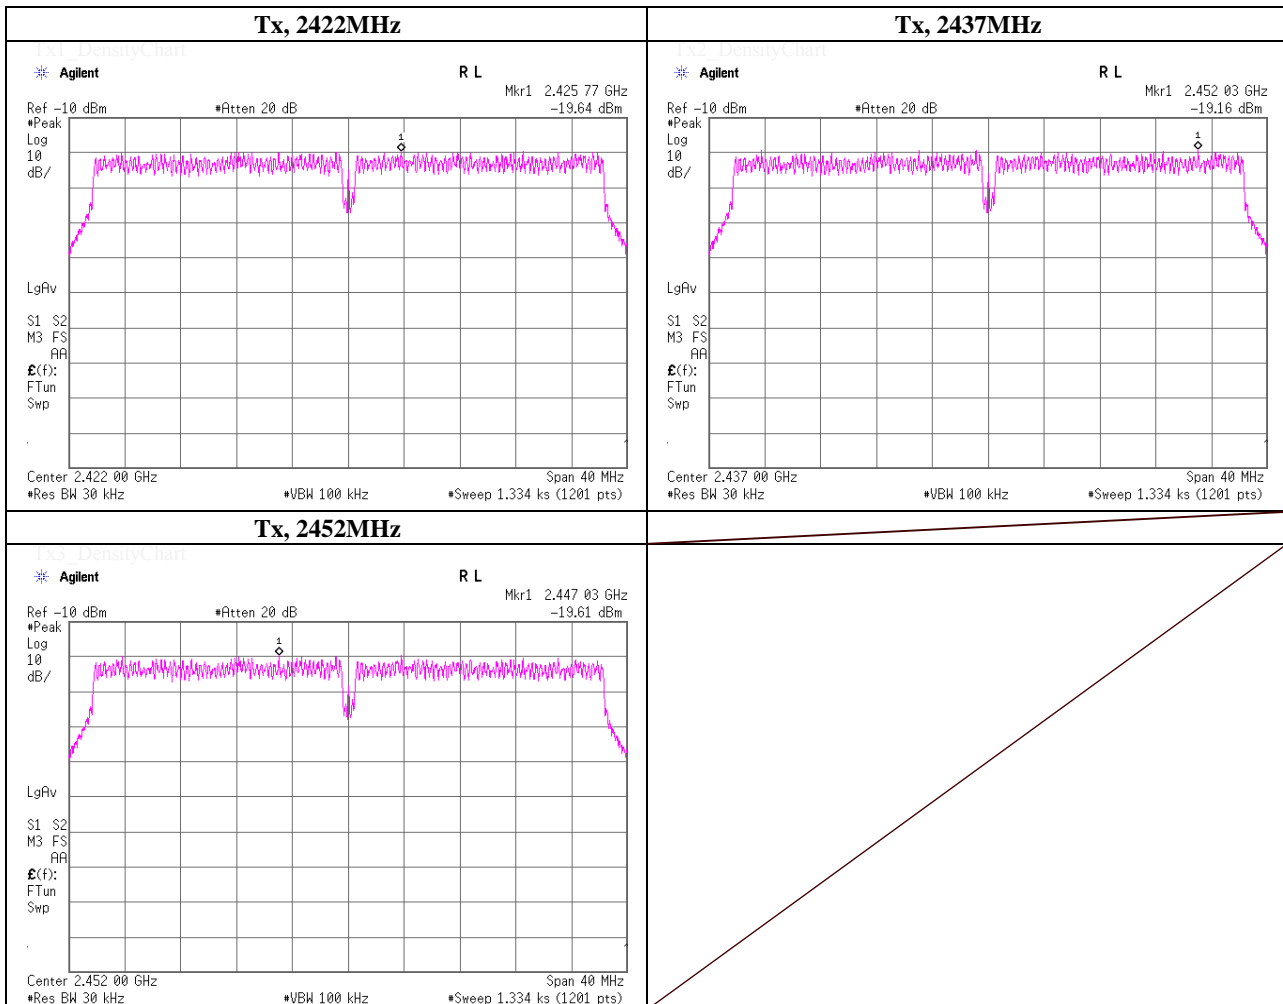

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401




### Power Density

|                        |   |                    |
|------------------------|---|--------------------|
| Test place             | UL Japan, Inc. Shonan EMC Lab.  | No.5 Shielded Room |
| Date                   | August 22, 2012   |                    |
| Temperature / Humidity | 25deg.C , 62%RH   |                    |
| Engineer               | Shinichi Takano   |                    |
| Mode                   | Tx, IEEE802.11n-40HT, PN9, worst data mode 5(MCS), power setting 9dBm |                    |

| Ch. Freq.<br>[MHz] | Freq.<br>Reading<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>[dB] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|---------------------------|------------------|-----------------------|----------------|-----------------|----------------|----------------|
| 2422.0000          | 2425.77                   | -20.97           | 1.00                  | 9.97           | -10.00          | 8.00           | 18.00          |
| 2437.0000          | 2440.77                   | -20.78           | 1.00                  | 9.97           | -9.81           | 8.00           | 17.81          |
| 2452.0000          | 2451.13                   | -21.80           | 1.00                  | 9.97           | -10.83          | 8.00           | 18.83          |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss

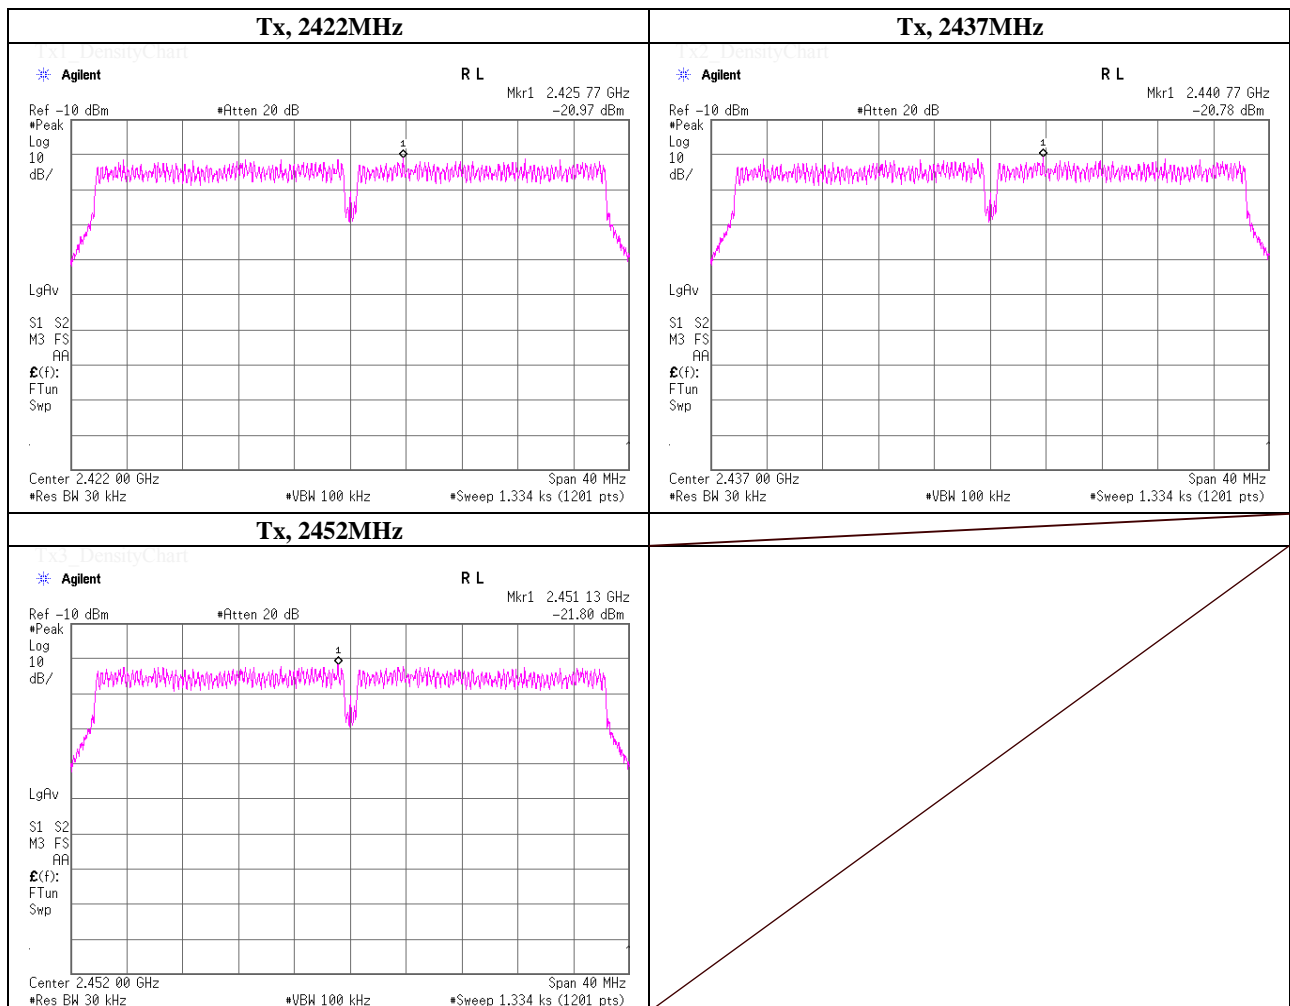

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**99% Occupied Bandwidth**

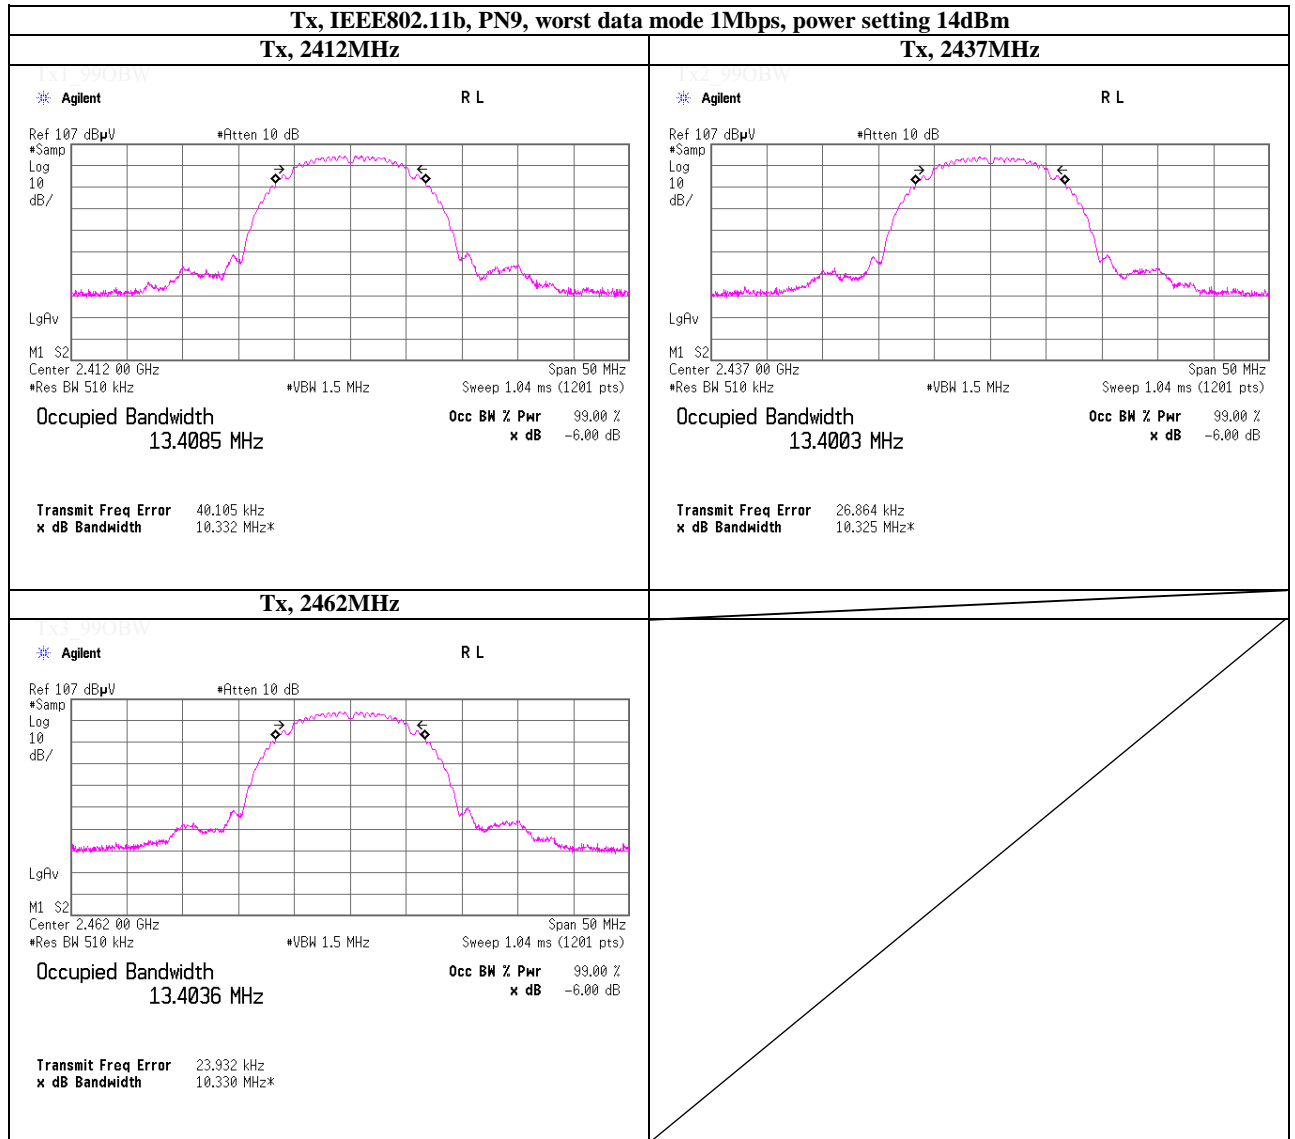

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**99% Occupied Bandwidth**

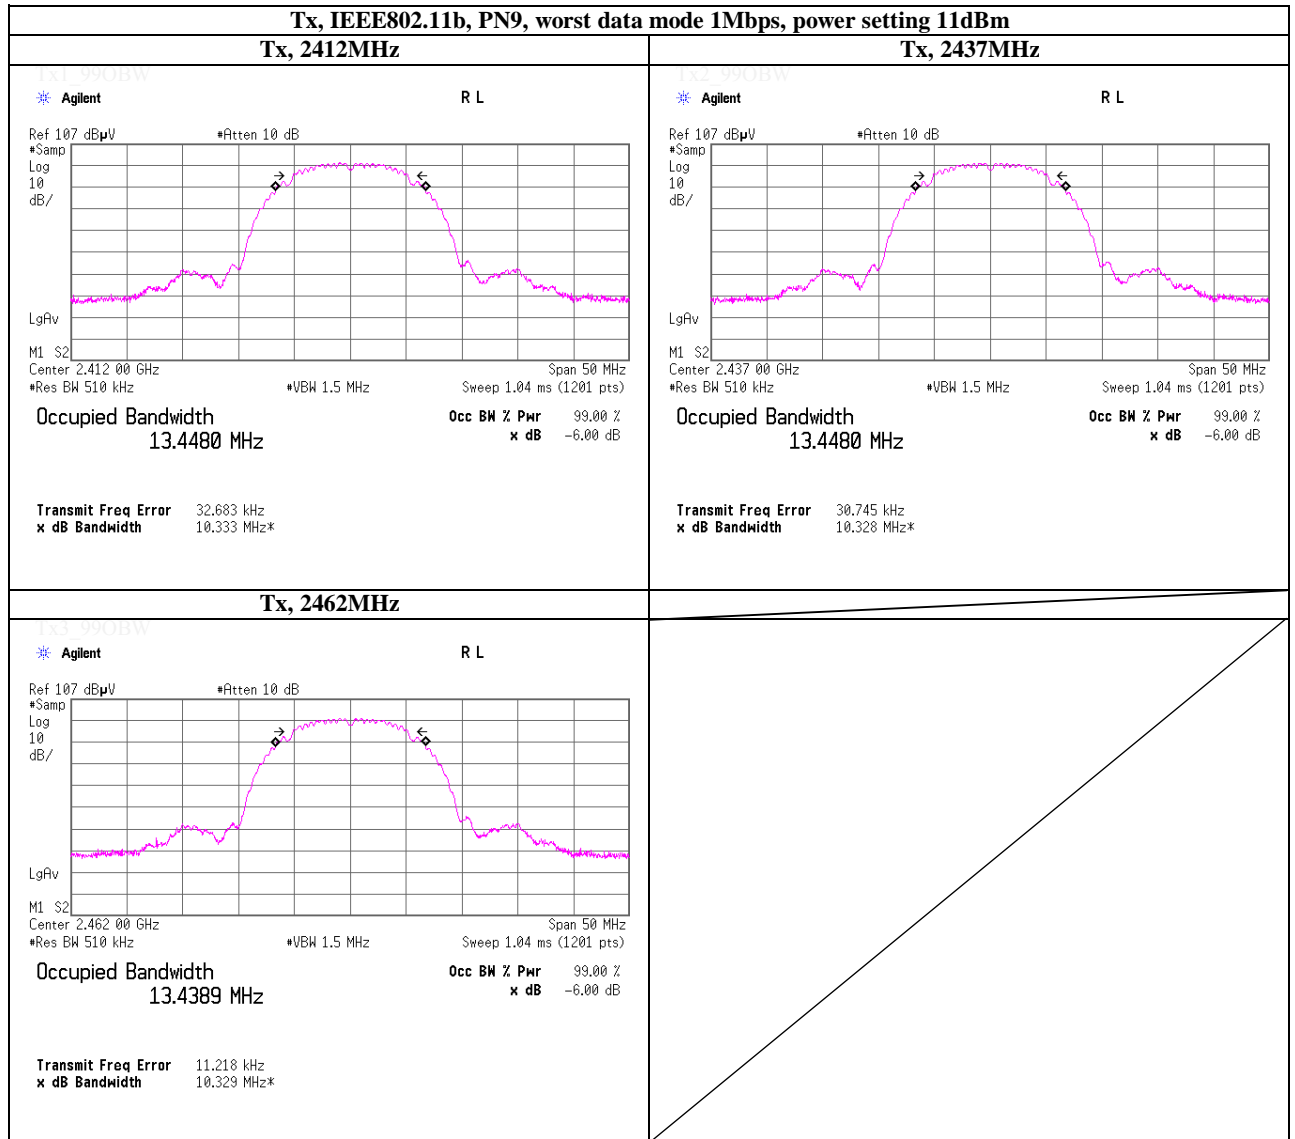

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 99% Occupied Bandwidth

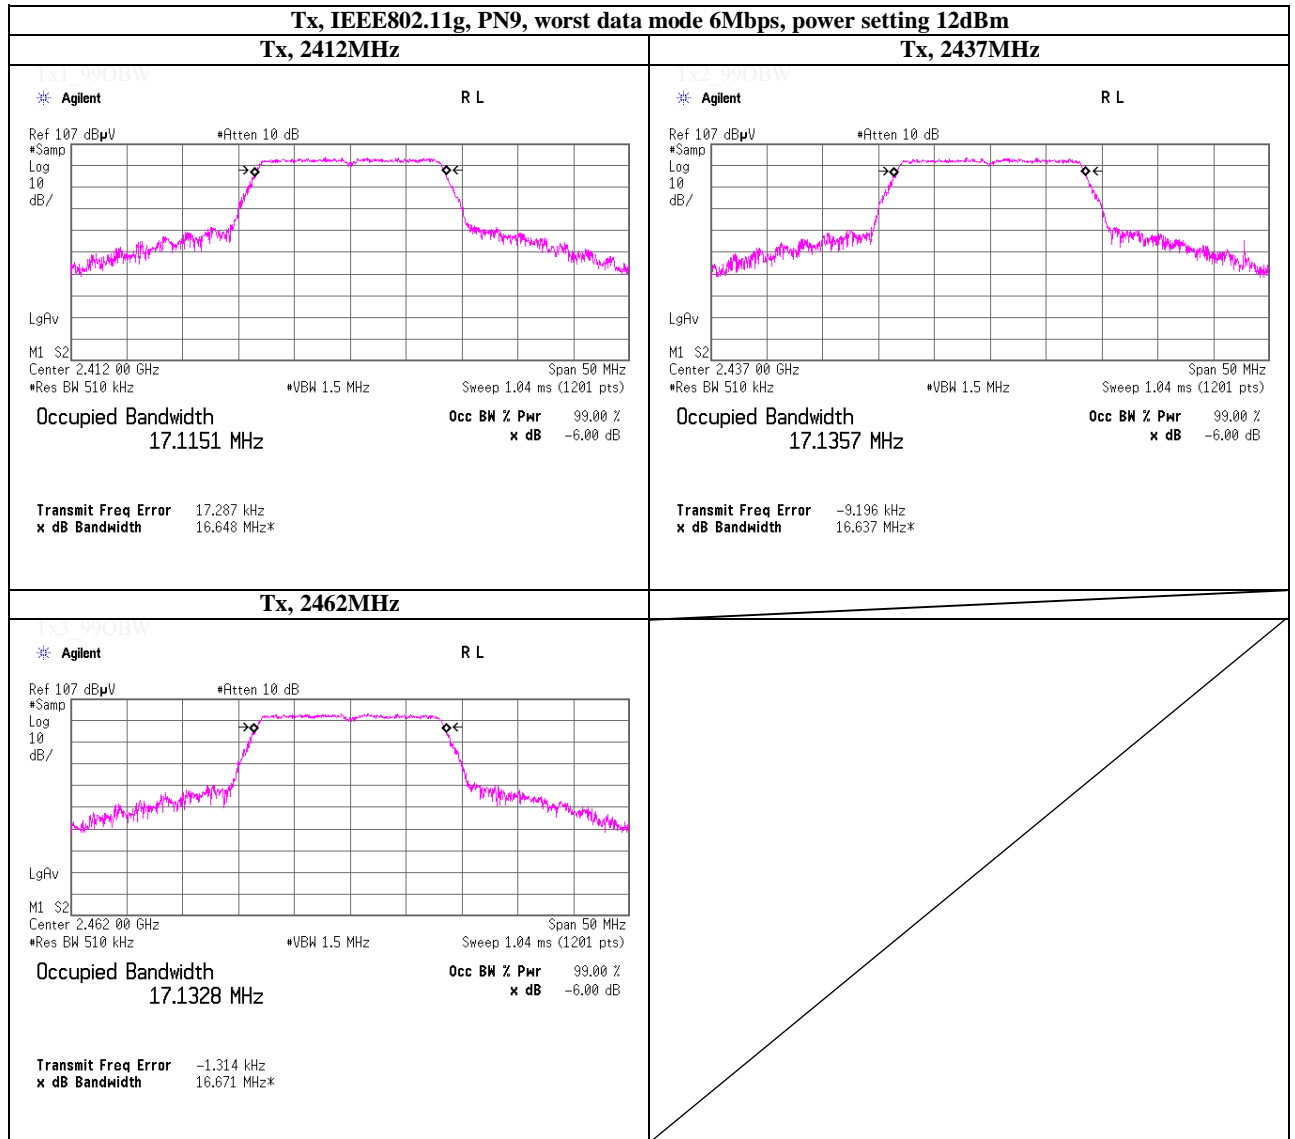

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**99% Occupied Bandwidth**

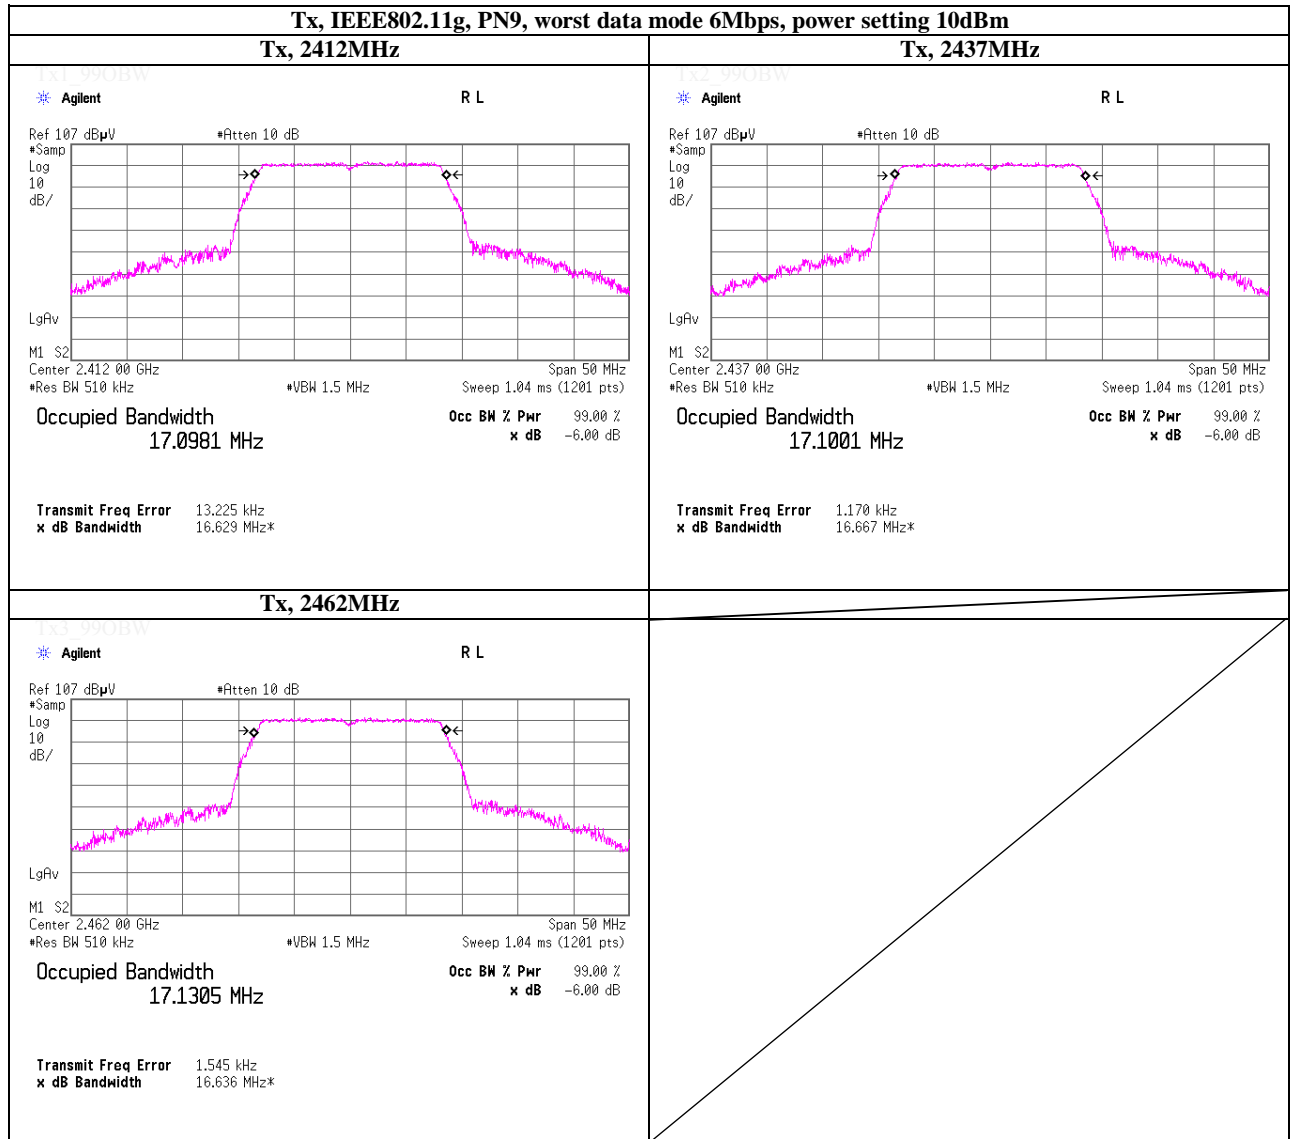

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 99% Occupied Bandwidth

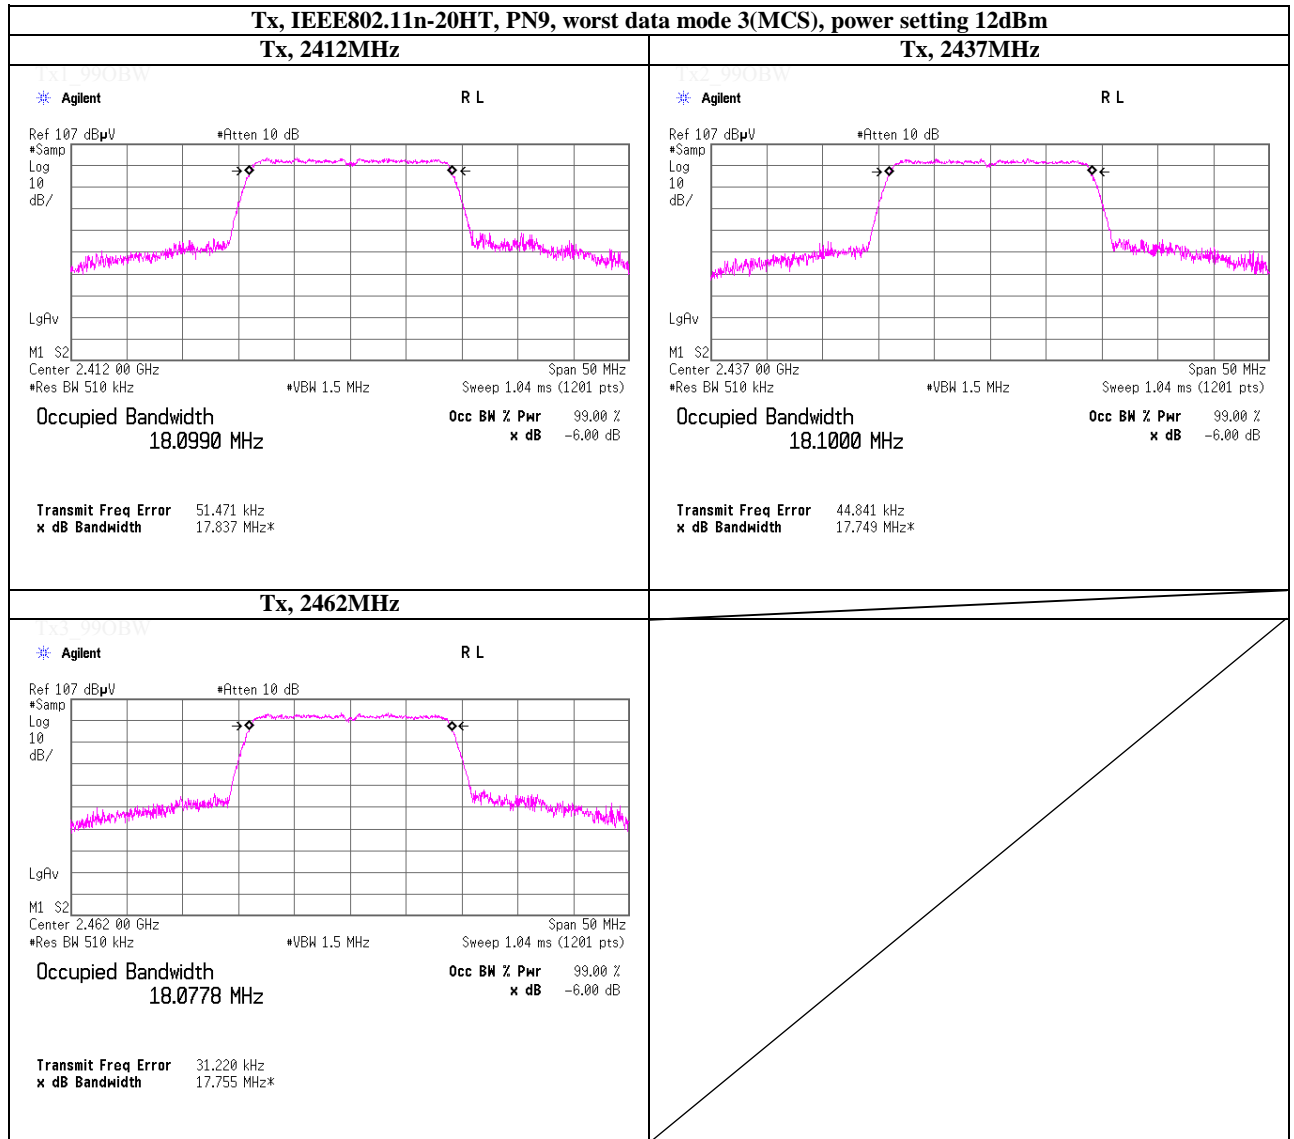

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**99% Occupied Bandwidth**

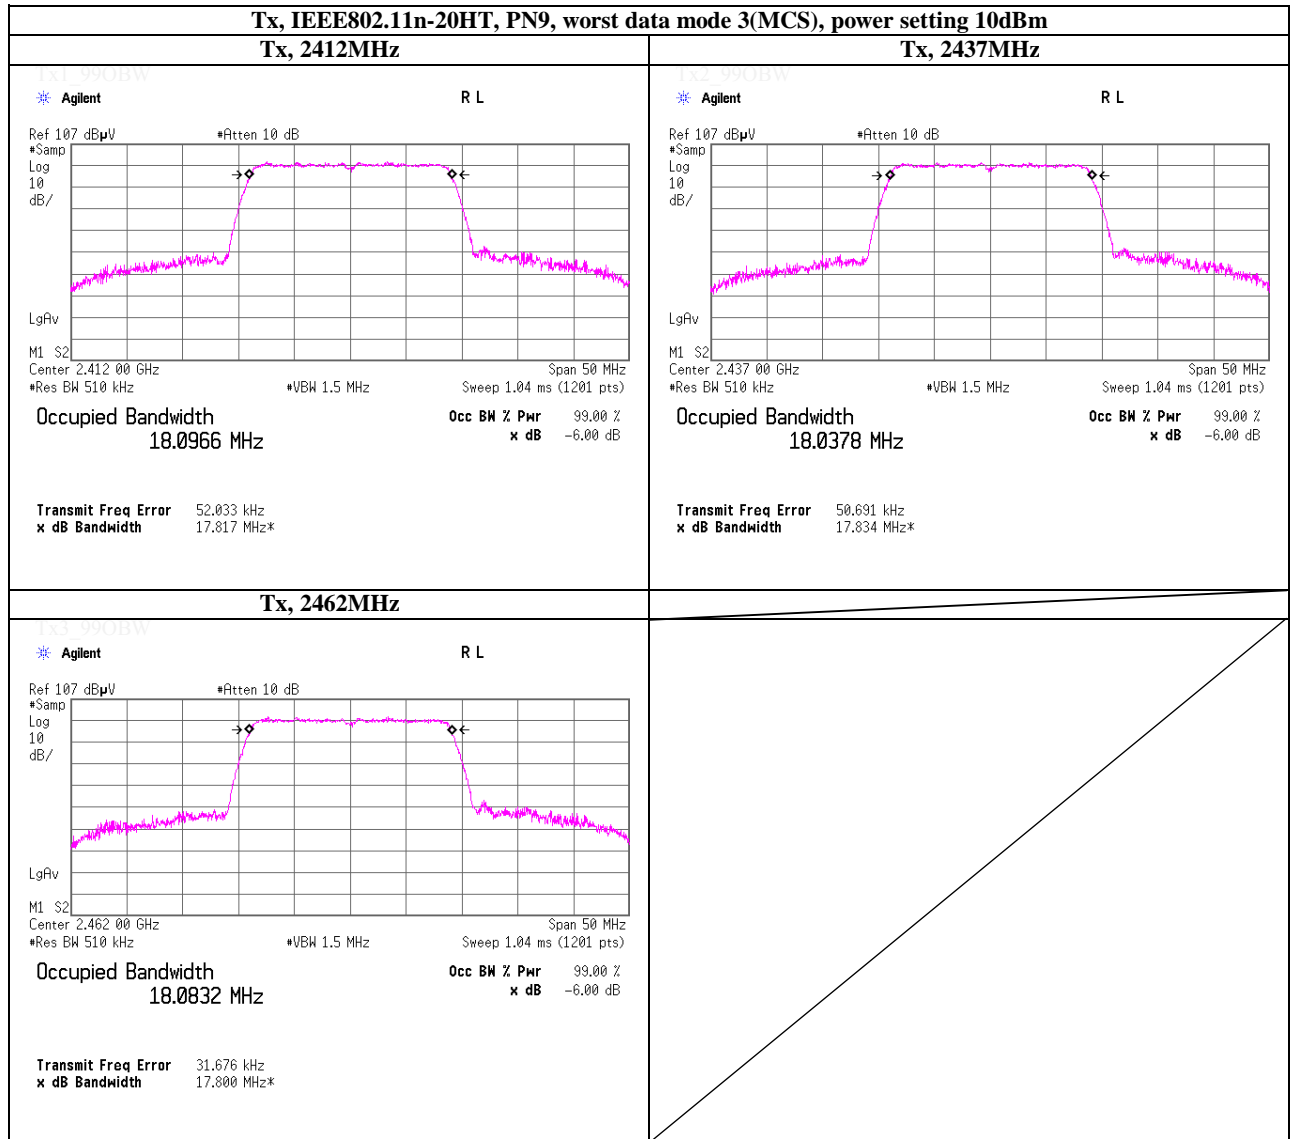

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 99% Occupied Bandwidth

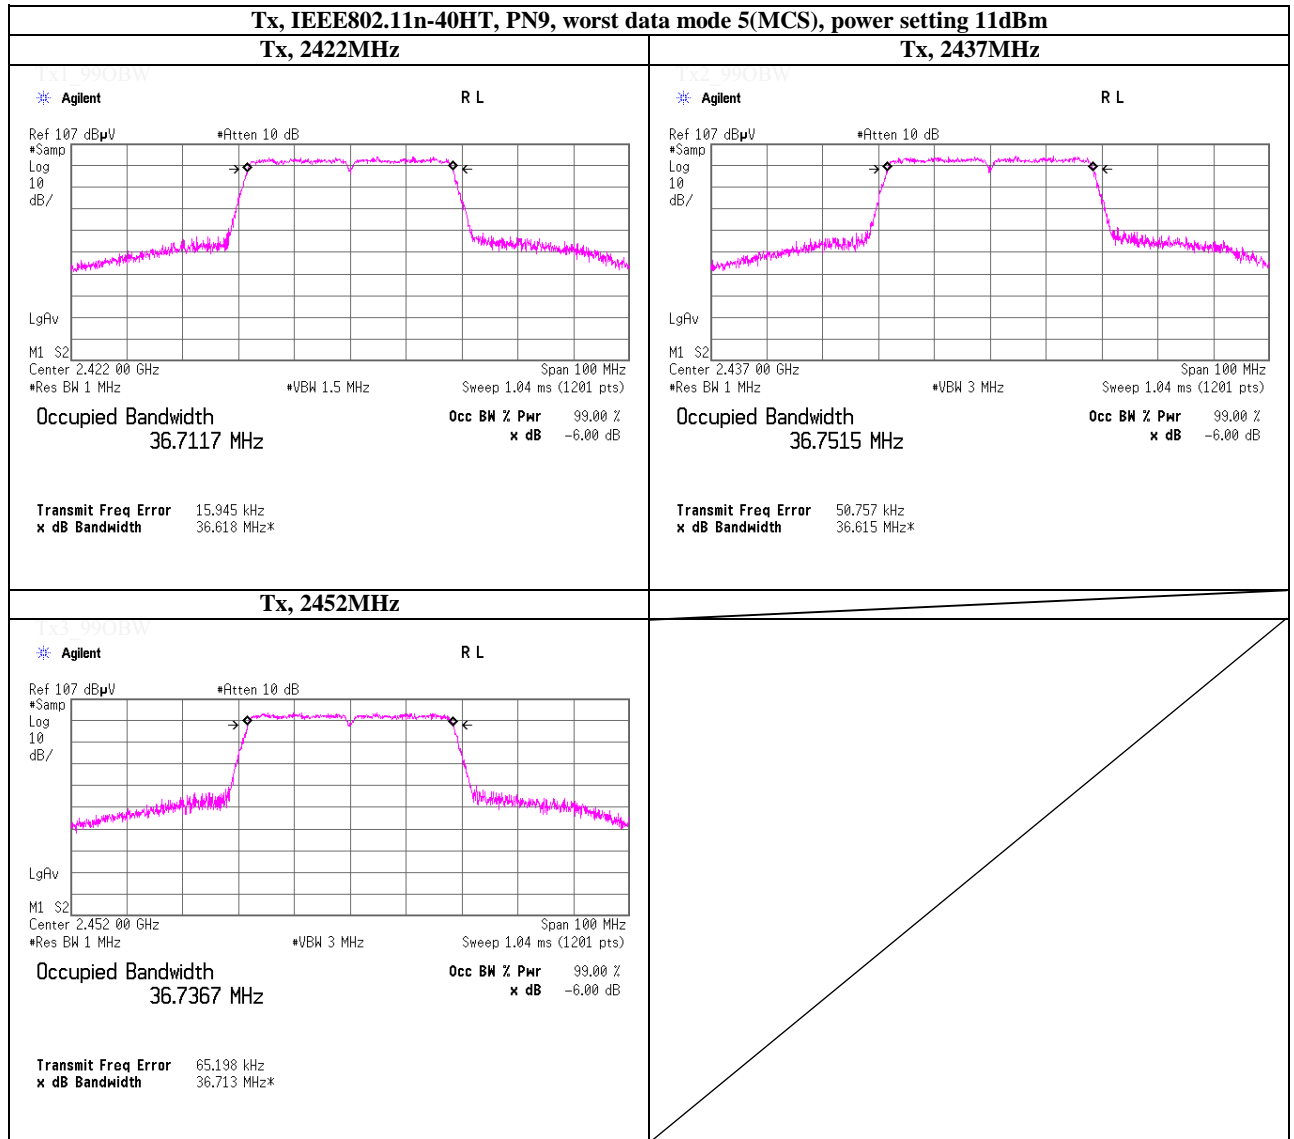

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401



### 99% Occupied Bandwidth

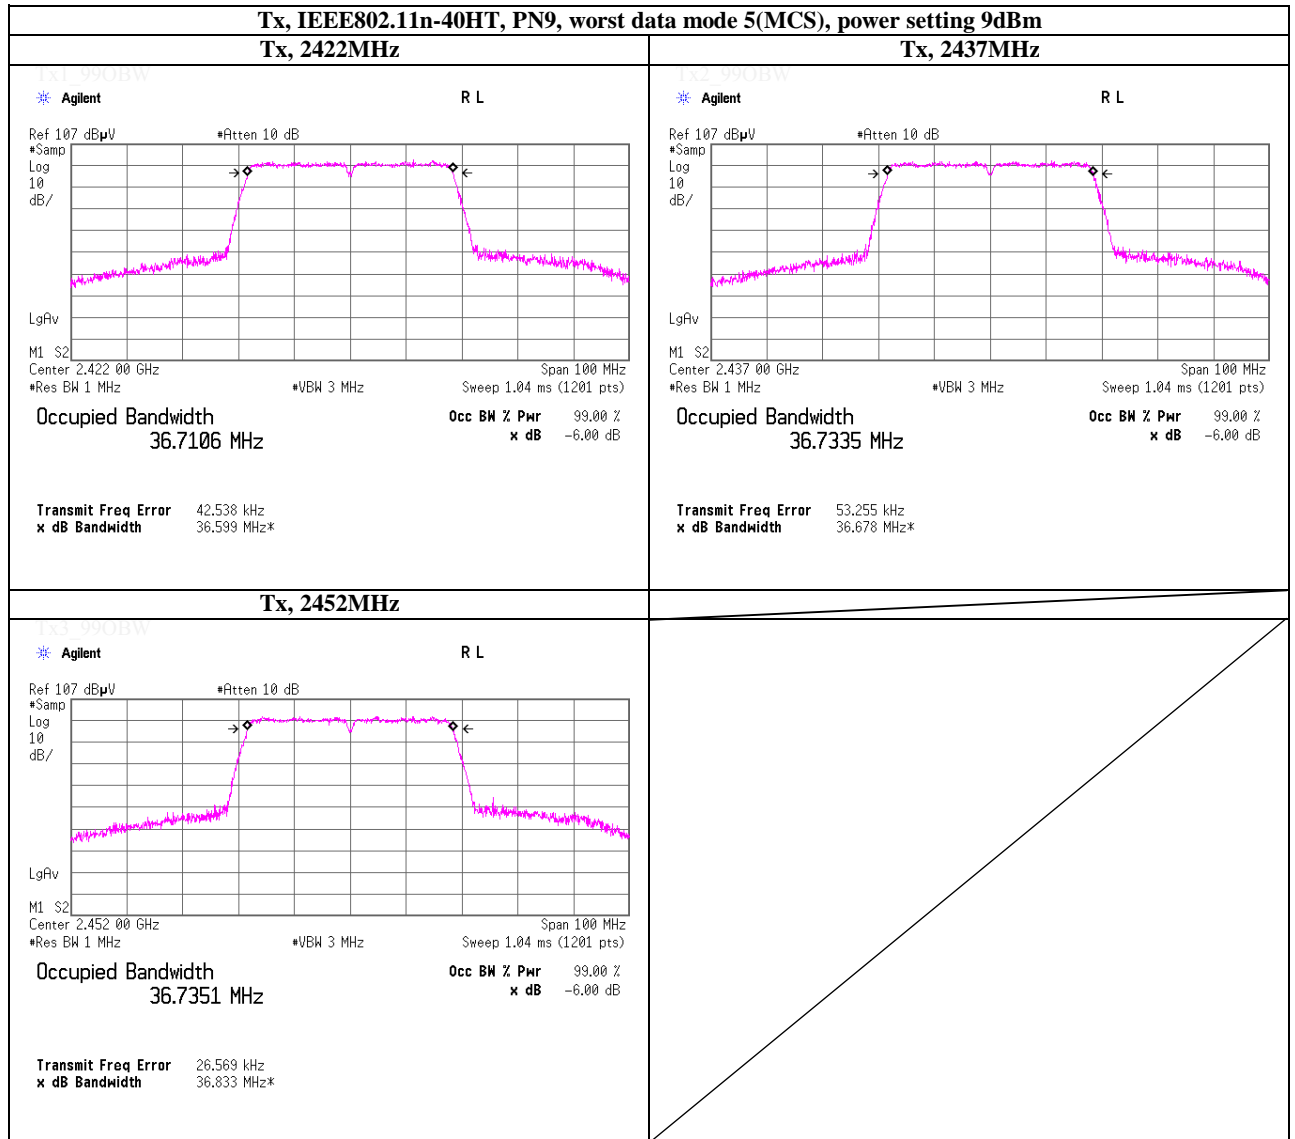

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## APPENDIX 2 Test Instruments

### EMI test equipment

| Control No.                    | Instrument                | Manufacturer                                       | Model No                                   | Serial No               | Test Item | Calibration Date * Interval(month) |
|--------------------------------|---------------------------|--|--|-------------------------|-----------|------------------------------------|
| SSA-02                         | Spectrum Analyzer         | Agilent  | E4448A                                     | MY48250106              | AT/RE     | 2012/03/16 * 12                    |
| SAT10-10                       | Attenuator                | Weinschel Corp.                                    | 54A-10                                     | 37584                   | AT        | 2012/04/06 * 12                    |
| SPM-06                         | Power Meter               | Anritsu  | ML2495A                                    | 0850009                 | AT        | 2012/04/19 * 12                    |
| SPSS-03                        | Power sensor              | Anritsu  | MA2411B                                    | 0917063                 | AT        | 2012/04/19 * 12                    |
| SOS-09                         | Humidity Indicator        | A&D  | AD-5681                                    | 4061484                 | AT        | 2012/03/26 * 12                    |
| KSA-08                         | Spectrum Analyzer         | Agilent  | E4446A                                     | MY46180525              | AT/RE     | 2012/02/16 * 12                    |
| SAEC-02(NSA)                   | Semi-Anechoic Chamber     | TDK  | SAEC-02(NSA)                               | 2                       | RE        | 2011/09/25 * 12                    |
| SAF-05                         | Pre Amplifier             | TOYO Corporation                                   | TPA0118-36                                 | 1440490                 | RE        | 2012/03/12 * 12                    |
| SCC-G02                        | Coaxial Cable             | Suhner   | SUCOFLEX 104A                              | 46498/4A                | RE        | 2012/04/10 * 12                    |
| SCC-G22                        | Coaxial Cable             | Suhner   | SUCOFLEX 104                               | 296199/4                | RE        | 2012/05/22 * 12                    |
| SHA-02                         | Horn Antenna              | Schwarzbeck  | BBHA9120D                                  | 9120D-726               | RE        | 2012/08/17 * 12                    |
| SOS-03                         | Humidity Indicator        | A&D  | AD-5681                                    | 4063325                 | RE        | 2012/02/06 * 12                    |
| SSA-01                         | Spectrum Analyzer         | Agilent  | N9010A-526                                 | MY48031482              | RE        | 2012/04/11 * 12                    |
| SJM-02                         | Measure                   | KOMELON  | KMC-36                                     | -                       | RE        | -                                  |
| COTS-SEMI-1                    | EMI Software              | TSJ  | TEPTO-DV(RE,CE, RFL,MF)                    | -                       | RE/CE     | -                                  |
| SAT20-01                       | Attenuator(above1GHz)     | Agilent  | 8493C-020                                  | 74889                   | RE        | 2011/12/27 * 12                    |
| SFL-02                         | Highpass Filter           | MICRO-TRONICS                                      | HPM50111                                   | 051                     | RE        | 2011/12/27 * 12                    |
| SAEC-03(NSA)                   | Semi-Anechoic Chamber     | TDK  | SAEC-03(NSA)                               | 3                       | RE        | 2011/09/23 * 12                    |
| SAF-06                         | Pre Amplifier             | TOYO Corporation                                   | TPA0118-36                                 | 1440491                 | RE        | 2012/07/18 * 12                    |
| SCC-G03                        | Coaxial Cable             | Suhner   | SUCOFLEX 104A                              | 46499/4A                | RE        | 2012/04/10 * 12                    |
| SCC-G23                        | Coaxial Cable             | Suhner   | SUCOFLEX 104                               | 297342/4                | RE        | 2012/05/22 * 12                    |
| SHA-03                         | Horn Antenna              | Schwarzbeck  | BBHA9120D                                  | 9120D-739               | RE        | 2012/08/17 * 12                    |
| SOS-05                         | Humidity Indicator        | A&D  | AD-5681                                    | 4062518                 | RE        | 2012/02/06 * 12                    |
| SJM-10                         | Measure                   | PROMART  | SEN1935                                    | -                       | RE/CE     | -                                  |
| SHA-05                         | Horn Antenna              | ETS LINDGREN                                       | 3160-09                                    | LM4210                  | RE        | 2012/03/30 * 12                    |
| SAF-09                         | Pre Amplifier             | TOYO Corporation                                   | HAP18-26W                                  | 00000018                | RE        | 2012/03/12 * 12                    |
| SCC-G18                        | Coaxial Cable             | Suhner   | SUCOFLEX 104A                              | 46292/4A                | RE        | 2012/03/12 * 12                    |
| SAF-03                         | Pre Amplifier             | SONOMA   | 310N                                       | 290213                  | RE        | 2012/02/10 * 12                    |
| SAT6-03                        | Attenuator                | JFW  | 50HF-006N                                  | -                       | RE        | 2012/02/10 * 12                    |
| SBA-03                         | Biconical Antenna         | Schwarzbeck  | BBA9106                                    | 91032666                | RE        | 2011/10/23 * 12                    |
| SCC-C1/C2/C3/C4/C5/C10/SRSE-03 | Coaxial Cable&RF Selector | Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO | 8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906 | -/0901-271(RF Selector) | RE        | 2012/04/10 * 12                    |
| SLA-03                         | Logperiodic Antenna       | Schwarzbeck  | UHALP9108A                                 | UHALP 9108-A0901        | RE        | 2011/10/23 * 12                    |
| STR-03                         | Test Receiver             | Rohde & Schwarz                                    | ESI40                                      | 100054/040              | RE/CE     | 2012/06/14 * 12                    |
| SCC-C9/C10/SRSE-03             | Coaxial Cable&RF Selector | Suhner/Suhner/TOYO                                 | RG223U/141PE/NS4906                        | -/0901-271(RF Selector) | CE        | 2012/04/10 * 12                    |
| SLS-05                         | LISN                      | Rohde & Schwarz                                    | ENV216                                     | 100516                  | CE        | 2012/02/23 * 12                    |
| SOS-06                         | Humidity Indicator        | A&D  | AD-5681                                    | 4062118                 | CE        | 2012/03/26 * 12                    |
|                                |                           |  |  |                         |           |                                    |
|                                |                           |  |  |                         |           |                                    |

The expiration date of the calibration is the end of the expired month .  
As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

All equipment is calibrated with valid calibrations . Each measurement data is traceable to the national or international standards .

Test Item :

CE: Conducted emission

RE: Radiated emission ,

AT: Antenna terminal conducted test