

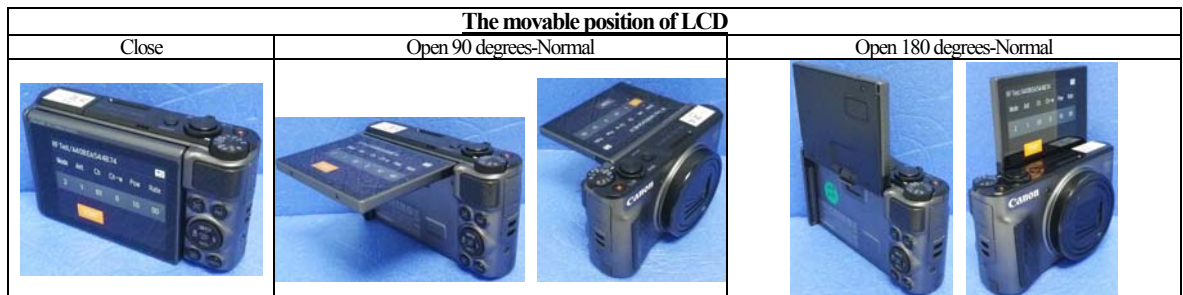
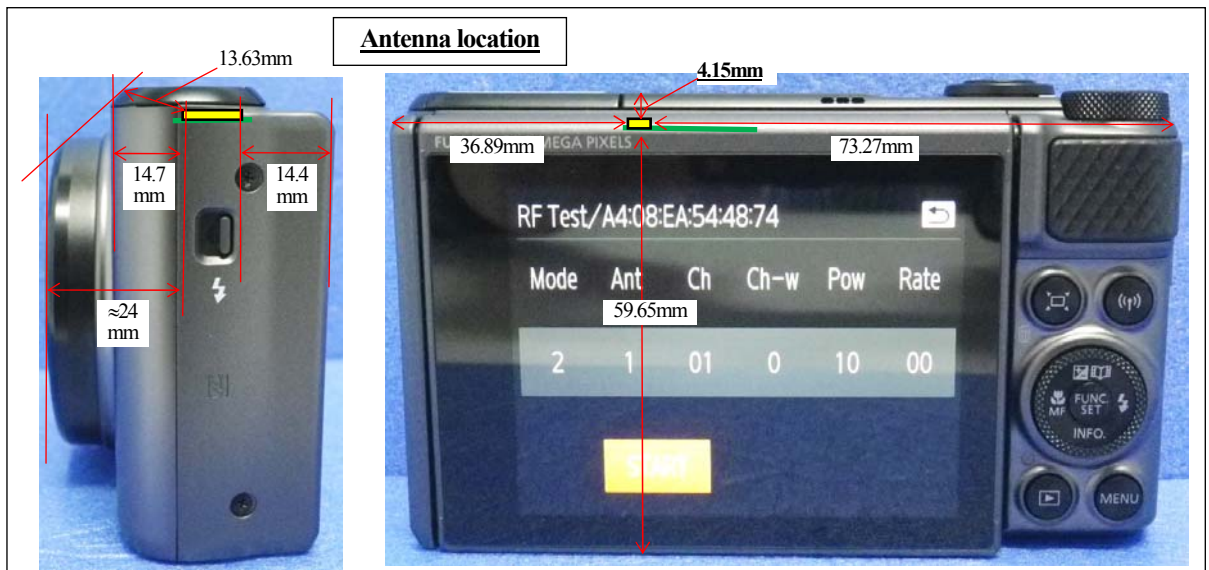


APPENDIX 1: Photographs of EUT and SAR test setup

Appendix 1-1: Photograph of Platform: Digital camera (PC2329) and antenna position

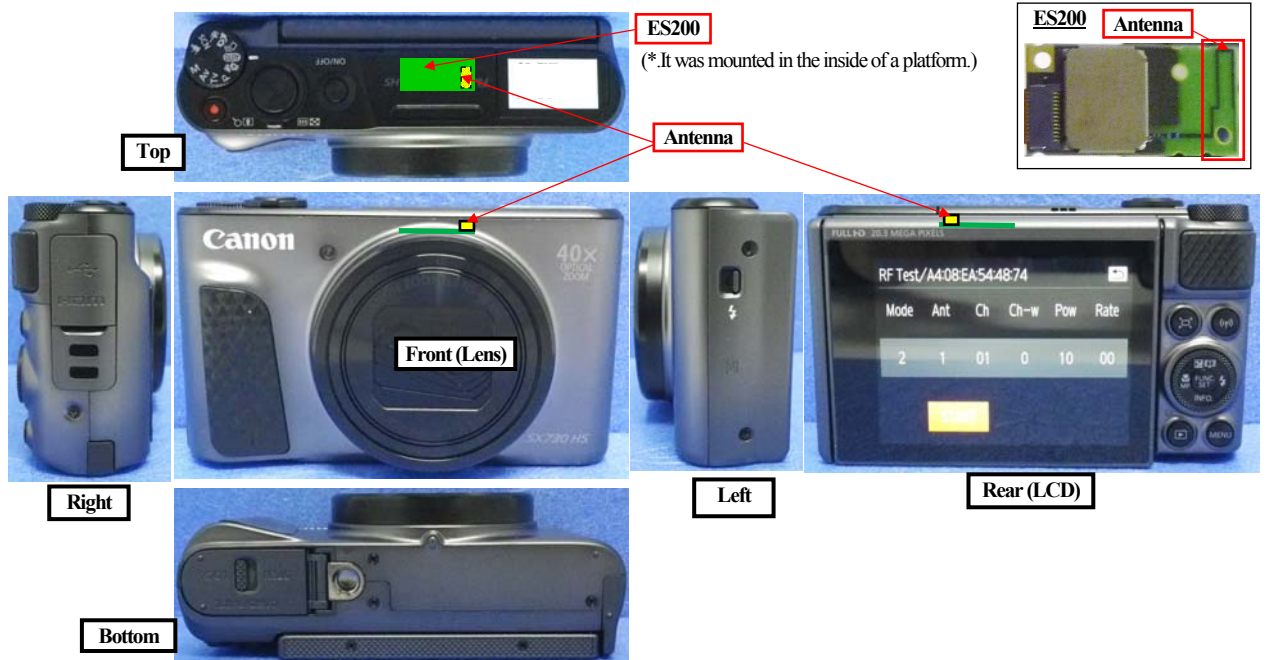

Appendix 1-2: EUT and support equipment

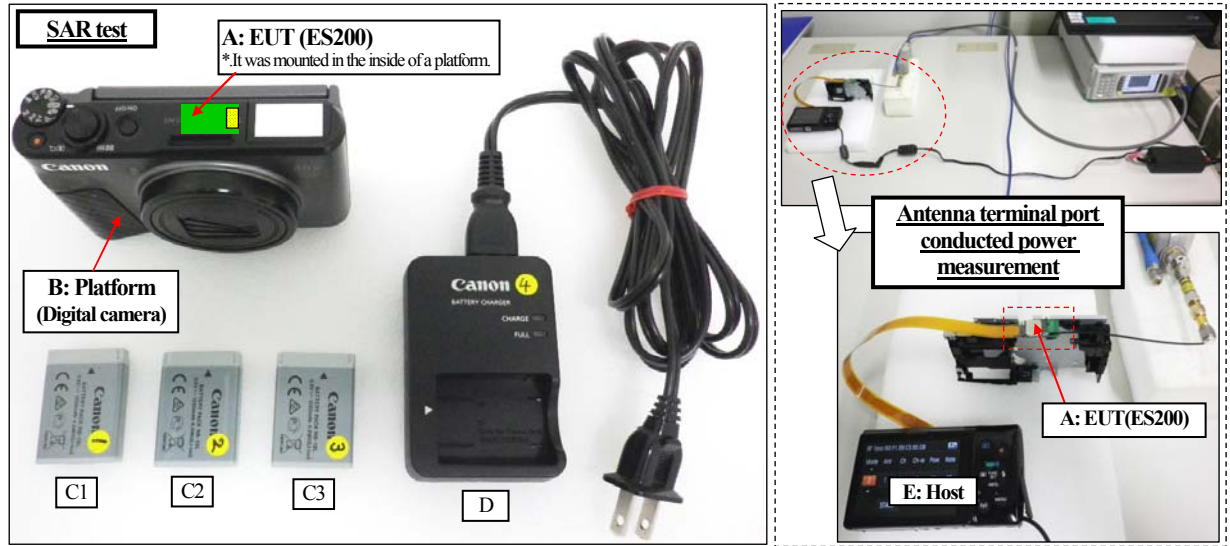

























Description of EUT and Support Equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Wireless Module	ES200	A408EA544874	Canon	EUT.
B	Digital Camera	PC2329	42	Canon	ES200's Platform (7).
C1	Battery Pack (DC 3.6 V, 1250 mAh, 4.5 Wh (Li-ion))	NB-13L	#1	Canon	Accessory of PC2329, Battery ID: #1.
C2			#2		Accessory of PC2329, Battery ID: #2.
C3			#3		Accessory of PC2329, Battery ID: #3.
D	Battery Charger	CB-2LHE	01	Canon	Support equipment. With AC cable: 2m, Unshielded.
* The following equipment was used for the antenna terminal port conducted power measurement.					
E	Digital Camera (Host)	PC2052	211061004458	Canon	Support equipment. (*.Ribbon cable=190mm)
-	DC Coupler	DR-90	-	Canon	Support equipment. With DC cable: 0.15m, Unshielded.
-	AC Adaptor	CA-DC10N	-	Canon	Support equipment. With DC cable: 1.9m, Unshielded. With AC cable: 1.9m, Unshielded.

<Platform type of EUT and SAR accessory>

Platform No.	Platform type	Model	SAR accessory	Battery option
(ES200's) Platform (1)	Digital camera	DS126621	none	Model: LP-E10, DC 7.4 V, 860 mAh, 6.36 Wh (Li-ion)
(ES200's) Platform (2)	Digital camera	DS126591	none	Model: LP-E6, DC 7.2 V, 1800 mAh, 13 Wh (Li-ion)
(ES200's) Platform (3)	Digital camera	DS126601	none	Model: LP-E6, DC 7.2 V, 1800 mAh, 13 Wh (Li-ion)
(ES200's) Platform (4)	Digital camera	DS126651	none	Model: LP-E17, DC 7.2 V, 1040 mAh, 7.5 Wh (Li-ion)
(ES200's) Platform (5)	Digital camera	DS126661	none	Model: LP-E17, DC 7.2 V, 1040 mAh, 7.5 Wh (Li-ion)
(ES200's) Platform (6)	Digital camera	DS126671	none	Model: LP-E17, DC 7.2 V, 1040 mAh, 7.5 Wh (Li-ion)
(ES200's) Platform (7)	Digital camera	PC2329	none	Model: NB-13L, DC 3.6 V, 1250 mAh, 4.5 Wh (Li-ion)

Appendix 1-3: Photograph of test setup

Position	Setup photographs		
Top (Touch) LCD: Close			
			
			
Top (Touch) LCD: Open90			
			
			
Top-front (Touch) LCD: Close			
			

Appendix 1-3: Photograph of test setup (cont'd)

Position	Setup photographs		
Rear (Touch) LCD: Close			
			
Rear (Touch) LCD: Open180			
			
Front (Touch) LCD: Close			