

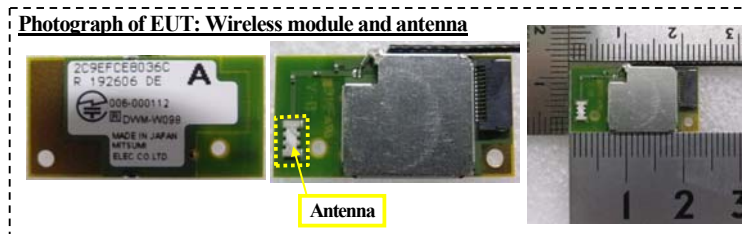
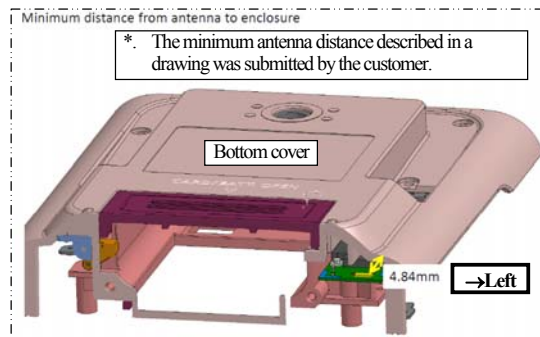


APPENDIX 1: Photographs of EUT and SAR test setup

Appendix 1-1: Photograph of Platform (2)-HD Camcorder (ID0036) and antenna position

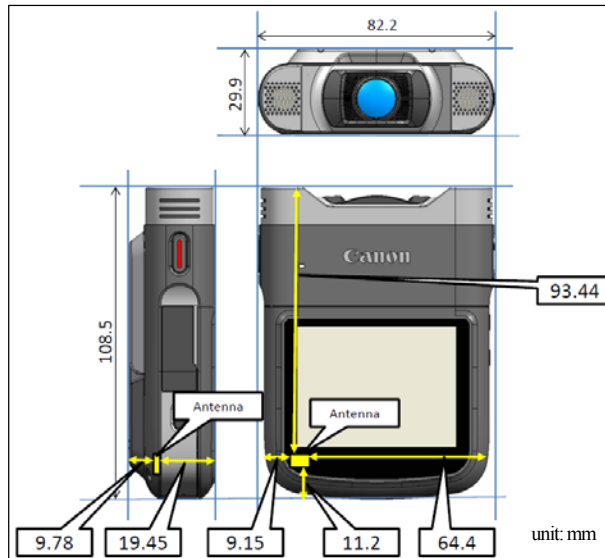

Appendix 1-2: Platform(2), EUT and support equipment

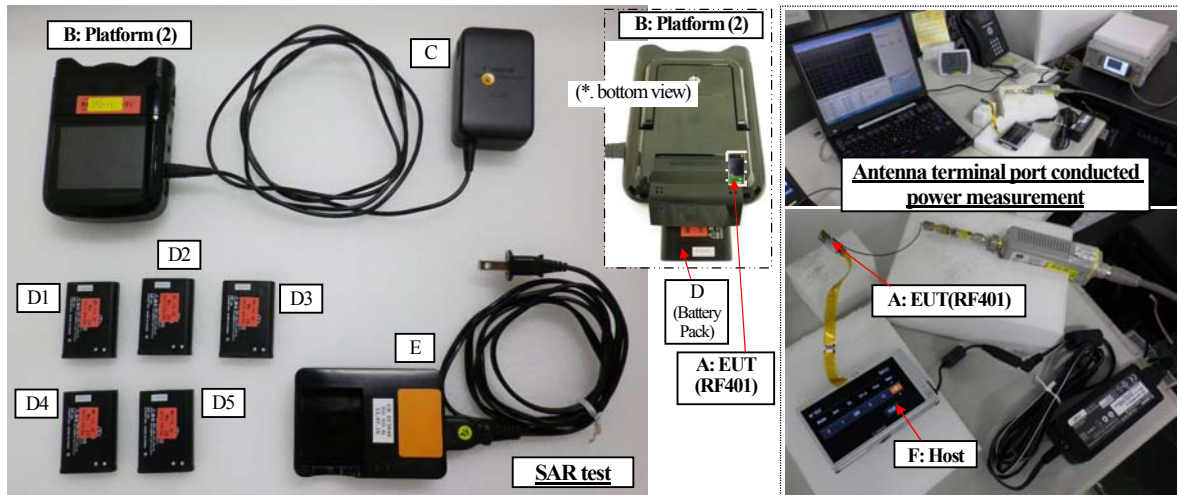

*1. The influence of LCD open was tested by setup#3 as a representative.
*2. In this setup, since antenna separation distance became large, the SAR test was not applied.

Description of EUT and Support Equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Wireless Module	RF401	E8036C	Mitsumi	EUT.
B	HD Camcorder	ID0036	141	Canon	Platform (2) for RF401.
C	Compact Power Adaptor	CA-110	10123004885-1	Canon	Accessory of Platform (2) With DC cable: 1.7m, Unshielded.
D1 ~D5	Battery Pack for HD Camcorder DC3.6V, 1910mAh(6.8Wh), (Li-ion)	NB-12L	#24(D1), #25(D2), #26(D3), #27(D4), #28(D5)	Canon	Accessory of Platform (2)
E	Battery Charger for Battery Pack: NB-12L	CB-EC364E	64	Canon	Support equipment. With AC cable: 1.7m, Unshielded.




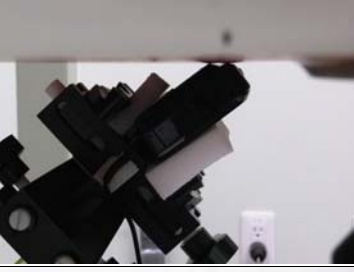













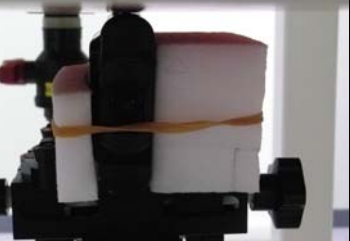
*. The following equipment was used for the antenna terminal port conducted power measurement.

No.	Item	Model number	Serial number	Manufacturer	Remark
F	Digital Camera (Host)	PC1739	-	Canon	Support equipment. Installed Tx control software: RF Test
-	DC Coupler	DR-90	-	Canon	Support equipment. With DC cable: 0.15m, Unshielded.
-	AC Adaptor	CA-DC10N	-	Canon	Support equipment. With DC cable: 1.9m, Unshielded / AC cable: 1.9m, Unshielded.
















<Platform type of EUT and SAR accessory>

Platform No.	Platform type	Model	SAR accessory	Battery option
Platform (1)	Digital Video Camcorder	ID0032	none	Model: NB-4L, DC3.7V, 760mAh (Li-ion)
Platform (2)	HD Camcorder	ID0036	none	Model: NB-12L, DC3.6V, 1910mAh (Li-ion)

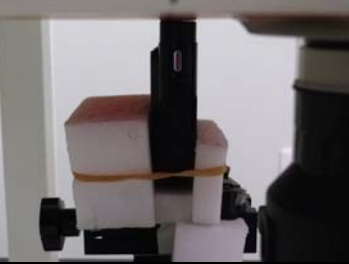Appendix 1-3: Photograph of test setup / Platform (2)-HD Camcorder (ID0036)

Position	Setup photographs (Body liquid)		
Bottom -left (Touch) Step 1-1, Appendix 2-2			
			
Bottom (Touch) Step 1-2, Appendix 2-2			
Left (Touch) Step 1-3, Appendix 2-2			
Top (LCD) Step 1-4, Appendix 2-2			
Right (Touch) Step 1-5, Appendix 2-2			

Appendix 1-3: Photograph of test setup / Platform (2)-HD camcorder (ID0036) (cont'd)

Position	Setup photographs (Body liquid)		
Bottom -rear (Touch) *. Fast SAR estimation..			
Rear (Touch) *. Fast SAR estimation..			
Front (Touch) *. Fast SAR estimation..			
Bottom -left (LCD open) (Touch) Step 1-6, Appendix 2-2			
Bottom -left (LCD open, Battery operation) (Touch) Step 1-7, Step 2-1, Appendix 2-2			

Appendix 1-3: Photograph of test setup / Platform (2)-HD camcorder (ID0036) (cont'd)

Position	Setup photographs (Head liquid)		
Bottom -left (LCD open, Battery operation) (Touch) Step 3-1, Appendix 2-2	