



RADIO TEST REPORT

Test Report No. : 27BE0338-HO-A-2

Applicant : CANON INC.
Type of Equipment : WLAN MODULE UNIT
Model No. : CH91108
FCC ID : AZDCH91108
Test standard : FCC Part 15 Subpart C
Section 15.207, Section 15.247: 2006

Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test:

October 3 to November 7, 2006

Tested by:

Hiroka Umeyama
EMC Services

Takumi Shimada
EMC Services

Motoya Imura
EMC Services

Approved by :

Tetsuo Maeno
Site Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Conducted Emission.....	9
SECTION 6: Spurious Emission	10
SECTION 7: Bandwidth	11
SECTION 8: Maximum Peak Output Power	11
SECTION 9: Peak Power Density.....	11
APPENDIX 1: Photographs of test setup	12
Conducted Emission.....	12
Spurious Emission (Radiated).....	13
Worst Case Position (Horizontal: Y-axis/ Vertical:Y-axis)	14
APPENDIX 2: Data of EMI test.....	15
Conducted Emission.....	15
Conducted Emission.....	17
6dB Bandwidth	29
Maximum Peak OutPut Power	32
Maximum Peak OutPut Power (Reference DATA)	33
Radiated Spurious Emission (below 1GHz).....	34
Conducted Spurious Emission.....	60
Conducted emission Band Edge compliance.....	67
Power Density	68
99% Occupied Bandwidth	71
APPENDIX 3:Test instruments	73

SECTION 1: Client information

Company Name	CANON INC.
Brand name	CANON
Address	30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501, Japan
Telephone Number	+81-3-2757-6798
Facsimile Number	+81-3-3757-8431
Contact Person	Kuniaki Tanaka

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	WLAN MODULE UNIT
Model No.	CH91108
Serial No.	55, 58
Rating	DC3.3V
Country of Manufacture	Japan
Condition of EUT	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Receipt Date of Sample	October 3, 2006
Modification of EUT	No modification by the test lab.

2.2 Product Description

Model No: CH91108 (referred to as the EUT in this report) is the Wireless LAN Module.

Clock frequency in the system	40MHz
Equipment Type	Transceiver
Frequency of Operation	2412-2462 MHz
Bandwidth & Channel spacing	20MHz / 5MHz
Type of Modulation	DSSS / OFDM
ITU code	G1D, D1D
Antenna type	Ant.1: PCB Antenna Ant.2: Film Antenna
Antenna Gain	Ant.1: 2.2dBi / Ant.2: 1.7dBi
Antenna port	Antenna port 1 / Antenna port 2

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C : 2006

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits : 2006
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz : 2006

FCC 15.31 (e)

The EUT is constantly provided the stable voltage (DC3.3V) from the limited host device.

FCC Part 15.203 Antenna requirement

This EUT has the external (particular) antenna connector, and the installation is to be done by the professionals. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.2 Procedures and results

[DSSS and other forms of modulation]

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.2	FCC: Section 15.207 IC: RSS-Gen 7.2.2	-	N/A	2.4dB 0.15967MHz, AV, L (11b, Mid ch, Antenna 2)	Complied
2	6dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.4.2	FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(1)	Conducted	N/A	See data.	Complied
3	Maximum Peak Output Power	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.6	FCC: Section 15.247(b)(3) IC: RSS-210 A8.4(4)	Conducted	N/A		Complied
4	Restricted Band Edges	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247 (d) IC: RSS-210 A8.5	Conducted/ Radiated	N/A		Complied
5	Power Density	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247 (e) IC: RSS-210 A8.2(2)	Conducted	N/A		Complied
6	Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.7 RSS-Gen 4.8	FCC: Section 15.247(d) IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3	Conducted/ Radiated	N/A		0.2dB 7386MHz, Vertical AV [11g, High ch, Antenna 2]

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

*0) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*These tests were also referred to "Guidance on Measurement of Digital Transmission Systems Operating under Section 15.247".

*These tests were performed without any deviations from test procedure except for additions or exclusions.

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS-Gen 4.4.1	-	Conducted	N/A	N/A	N/A

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.4 Uncertainty

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 2.66 dB.
The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.59 dB(3m).
The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 4.62 dB(3m).
The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.27 dB.
The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	2.0 x 2.0 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 5.4 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3 and No.4 semi-anechoic chambers and No.7 shielded room.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The mode used for test : [DSSS and other forms of modulation]

1) Transmitting mode 11b (CCK 11Mbps (Worst), Packet type: Maximum, Payload: PN9)

Low Channel : 2412MHz(Ch1)

Mid Channel : 2437MHz(Ch6)

High Channel : 2462MHz(Ch11)

2) Transmitting mode 11g (OFDM 54Mbps (Worst), Packet type: Maximum, Payload: PN9)

Low Channel : 2412MHz(Ch1)

Mid Channel : 2437MHz(Ch6)


High Channel : 2462MHz(Ch11)

3) Receiving mode (11b/g) Mid Channel

*The test was made with the above modes which had the worst case.

	Tested antenna	Antenna port	Remarks
Spurious emission (Radiated) test	Antenna 1 and 2	Port 1	The test was made with port 1 since port 1 has higher power than port 2.
Antenna Terminal tests	-	Port 1	(Refer to the reference data of Maximum peak output power)

4.2 Configuration and peripherals

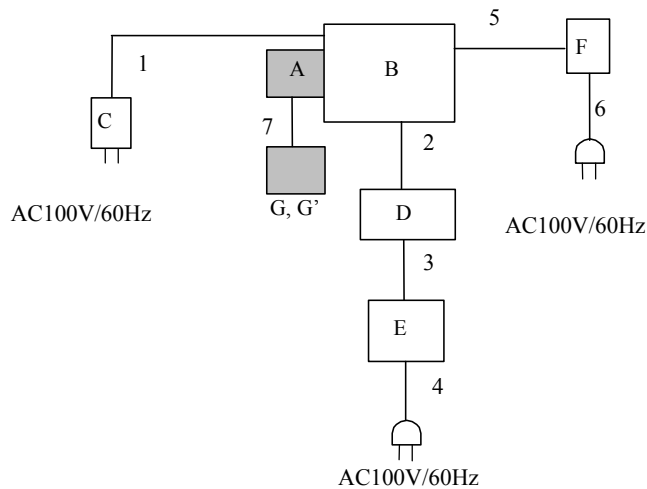

* Cabling and setup were taken into consideration and test data was taken under worst case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	WLAN MODULE UNIT	CH91108	55, 58 *1)	MURATA	EUT
B	CF Adaptor/ PCMCIA slot	-	-	-	-
C	AC Adaptor	02K6750	11S02K6750Z1Z2UP29A0TJ	IBM	-
D	Note PC	2366-LJ7	97-99D4L	IBM	-
E	AC Adaptor	A15D2-05MP	A044719772	COSMO Power Source	-
F	DC Power Supply	PW18-1.3AT	08016530	KENWOOD	-
G	Antenna 1	ANTB24-051A0	-	Sansei Electric Co.,Ltd.	EUT
G'	Antenna 2	HFS21-CA02	-	Hitachi Cable, Ltd.	EUT

*1) 58 is used for Spurious emission test (Antenna 2 and above 1GHz). 55 is used for the other tests.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	DC Cable	1.4	Unshielded	Unshielded
2	RS-232C Cable	1.5	Shielded	Shielded
3	DC Cable	2.0	Unshielded	Unshielded
4	AC Cable	1.8	Unshielded	Unshielded
5	DC Cable	2.0	Unshielded	Unshielded
6	AC Cable	1.0	Unshielded	Unshielded
7	Antenna Cable	0.1	Shielded	Shielded

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

1) For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

2) For the tests on EUT itself (as a stand alone equipment)

Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/(AMN) to the input power source. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector : CISPR quasi-peak and average detector (IF BW 9 kHz)
Measurement range : 0.15-30MHz
Test data : APPENDIX 2
Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2

Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 80cm above the conducting ground plane. The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 and outside the restricted band of FCC15.205.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth	20dBc : RBW: 100kHz VBW: 300kHz (S/A)	AV: RBW:1MHz/VBW:10Hz 20dBc : RBW:100kHz/VBW:300kHz

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2

Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 7: Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

It was measured based on "Power Output Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

Test data : APPENDIX 2
Test result : Pass

SECTION 9: Peak Power Density

[Conducted]

Test Procedure

The Peak Power Density was measured with a spectrum analyzer connected to the antenna port.

It was measured based on "PSD Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

Test data : APPENDIX 2
Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)