



RADIO TEST REPORT

Test Report No.: 31CE0126-SH-01-A

Applicant : CANON INC.
Type of Equipment : Wireless LAN Module
Model No. : FM48944
FCC ID : AZDFM48944
Test regulation : FCC Part15 Subpart C: 2010
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test:

November 15-26, 2010

**Representative
test engineer:**

T. Arai

Tatsuya Arai
Engineer of EMC Service

Approved by:

G. Ishiwata

Go Ishiwata
Assistant Manager of EMC Service

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".



UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

MF058d (15.09.10)

Table of Contents	Page
1 Applicant Information	3
2 Equipment under test (E.U.T.)	3
3 Test specification, procedures and results	4
4 System test configuration	7
5 Conducted emission	9
6 6dB bandwidth & Occupied bandwidth (99%)	10
7 Maximum peak output power	10
8 Out of band emissions (Antenna port conducted)	10
9 Out of band emissions (Radiated)	11
10 Peak power density	12
 Contents of Appendixes	 13
APPENDIX 1: Photographs of test setup	14
APPENDIX 2: Test data	17
APPENDIX 3: Test instruments	76

1 Applicant information

Company Name : CANON INC.
Address : 5-1, Hakusan 7-chome, Toride-shi, Ibaraki-ken, Japan 302-8501
Telephone Number : +81-279-74-2111
Facsimile Number : +81-297-73-7499
Contact Person : Masayuki Hiraide

2 Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Wireless LAN Module
Model No. : FM48944
Serial No. : 4020
Rating : DC3.3V
Country of Mass-production : China
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.
Receipt Date of Sample : November 12, 2010

2.2 Product description

Model: FM48944 (referred to as the EUT in this report) is a Wireless LAN Module.

Equipment type : Transceiver
Frequency of operation : 11b,11g, and 11n-20 : 2412-2462MHz
11n-40 : 2422-2452MHz
Clock frequency : 38.4MHz
Bandwidth & channel spacing : 11b,11g, and 11n-20
Bandwidth : 20MHz
Channel spacing : 5MHz
11n-40
Bandwidth : 40MHz
Channel spacing : 5MHz
Type of modulation : 11b : DSSS
11g, 11n : OFDM
Antenna type : Planar Inverted F Antenna
Antenna gain with cable loss : 1.48dBi
Antenna connector type : None
ITU code : D1D, G1D
Operation temperature range : -20 to +70 deg.C.

FCC Part15.31 (e)

The Wireless LAN Module is provided with stable power supply DC 3.3V from the host device and has power supply regulator which provides DC 1.8 V, therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

The antenna is not removable from the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400
Facsimile: +81 463 50 6401

3 Test specification, procedures and results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2010, final revised on October 13, 2010
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC 15.207	-	N/A	19.3dB (0.50140MHz, QP, 11b Tx 2437MHz)	Complied
6dB Bandwidth	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (a)(2) & 15.209	Conducted	N/A	See data	Complied
Maximum Peak Output Power	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (b)(3) & 15.209	Conducted	N/A		Complied
Out of Band Emission & Restricted Band Edges	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.109, 15.247 (d) & 15.209	Conducted / Radiated	N/A	1.0dB (12310MHz, Vertical, AV, 11b Tx 2462MHz)	Complied
Power Density	"Guidance on Measurement for Digital Transmission Systems Section 15.247" & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC 15.247 (e)	Conducted	N/A	See data	Complied

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	Complied

* Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC ^{*1} /SR ^{*2} (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Conducted emission (AC Mains) AMN/LISN	150kHz-30MHz	3.0 dB	2.6 dB	3.1 dB
Radiated emission (Measurement distance: 3m)	30MHz-300MHz	4.6 dB	4.5 dB	4.9 dB
	300MHz-1GHz	4.5 dB	4.6 dB	5.1 dB
	1GHz-10GHz	3.9 dB	3.9 dB	4.0 dB
Radiated emission (Measurement distance: 1m)	10GHz-18GHz	4.8 dB	4.8 dB	4.8 dB
	18GHz-40GHz	4.2 dB	4.2 dB	4.2 dB

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Conducted emissions, Power Density Measurement (below 1GHz) uncertainty (with a 95% confidence level) for this test was: (±) 1.1dB

Conducted emissions, Power Density Measurement (1G-3GHz) uncertainty (with a 95% confidence level) for this test was: (±) 1.2dB

Conducted emissions, Power Density Measurement (3G-18GHz) uncertainty (with a 95% confidence level) for this test was: (±) 2.9dB

Conducted emissions Measurement (18G-26.5GHz) uncertainty (with a 95% confidence level) for this test was: (±) 3.4dB

Power Measurement uncertainty above 1GHz (with a 95% confidence level) for this test was: (±) 0.8dB

Bandwidth Measurement uncertainty (with a 95% confidence level) for this test was: (±) 5.4%

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

No.1/ No.2/ No.3 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on April 17, 2009 (Registration No.: 697847).

IC Registration No. : 2973D-1 (No1 anechoic chamber)

2973D-2 (No2 anechoic chamber)

2973D-3 (No3 anechoic chamber)

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 Semi-anechoic chamber	20.6 x 11.3 x 7.65 Maximum measurement distance: 10m	No.1 Shielded room	6.8 x 4.1 x 2.7
No.2 Semi-anechoic chamber	20.6 x 11.3 x 7.65 Maximum measurement distance: 10m	No.2 Shielded room	6.8 x 4.1 x 2.7
No.3 Semi-anechoic chamber	12.7 x 7.7 x 5.35 Maximum measurement distance: 5m	No.3 Shielded room	6.3 x 4.7 x 2.7
No.4 Full-anechoic chamber	8.1 x 5.1 x 3.55	No.4 Shielded room	4.4 x 4.7 x 2.7
		No.5 Shielded room	7.8 x 6.4 x 2.7
		No.6 Shielded room	7.8 x 6.4 x 2.7

3.6 Test setup, Data of EMI & Test instruments

Refer to Appendix 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

4 System test configuration

4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Mode	Remarks*
IEEE 802.11b (11b)	11Mbps, PN9
IEEE 802.11g (11g)	12Mbps, PN9
IEEE 802.11n-20: 2.4G Band	MCS 2, PN9
IEEE 802.11n-40: 2.4G Band	MCS 3, PN9
*The worst condition was determined based on the test result of Maximum Peak Output Power (Low Channel)	

Test Item	Operating Mode	Tested frequency
Conducted Emission	11b Tx	2412MHz
Spurious Emission	11g Tx	2437MHz
6dB Bandwidth	11n-20 Tx	2462MHz
Maximum Peak Output Power	11n-40 Tx	2422MHz
Power Density		2437MHz
99% Occupied Bandwidth		2452MHz

*EUT has the power settings by the software as follows;

Power settings: IEEE 802.11b: 13
IEEE 802.11g, 11n-20: 12
IEEE 802.11n-40: 11
Software: Labtool Version 1.0.1.12

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

4.2 Configuration and peripherals

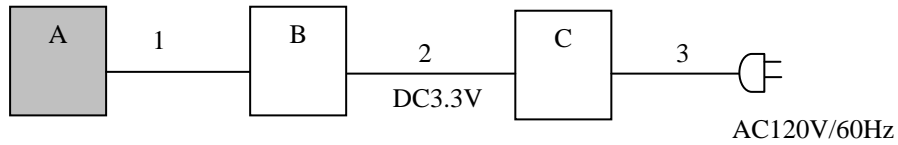

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless LAN Module	FM48944	4020	CANON INC.	EUT
B	Test jig	-	-	CANON INC.	-
C	DC Power Supply	PAN35-10A	NA000955	Kikusui	-

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	Ribbon Cable	0.1	Unshielded	Unshielded
2	DC Cable	1.5	Shielded	Shielded
3	DC Cable	1.8	Unshielded	Unshielded

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

5 Conducted emission

5.1 Operating environment

The test was carried out in No.3 shielded room.

Temperature : See test data
Humidity : See test data

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT was aligned and was flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN. They were folded back and for the forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Photographs of the set up are shown in Appendix 1.

5.3 Test conditions

Frequency range : 0.15 - 30MHz
EUT position : Table top

5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT within a screened room. The EUT was connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection has been performed. The measurements had been performed with a quasi-peak detector and if required, an average detector. The conducted emission measurements were made with the following detector of the test receiver.

Detector Type : Quasi-Peak/ Average
IF Bandwidth : 9kHz

5.5 Results

Summary of the test results : Pass

Date : November 22, 2010

Test engineer : Akio Hayashi

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400
Facsimile: +81 463 50 6401

6 6dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Date : November 15 and 16, 2010

Test engineer : Makoto Hosaka

7 Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

Date : November 15, 2010

Test engineer : Makoto Hosaka

8 Out of band emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

Summary of the test results: Pass

Date : November 16, 2010

Test engineer : Tatsuya Arai

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

9 Out of band emissions (Radiated)

9.1 Operating environment

The test was carried out in No.3 anechoic chamber.

9.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. Photographs of the set up are shown in Appendix 1.

9.3 Test conditions

Frequency range : 30MHz - 26GHz

9.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m(below 10GHz) and 1m(above 10GHz).

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization. Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer *1)
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 3MHz, AV RBW: 1MHz/VBW: 10Hz
Measuring antenna	Biconical (30-300MHz) Logperiodic (300MHz-1GHz)	Horn
Test distance	3m	3m(below 10GHz) 1m(above 10GHz)

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Combinations of the worst case

Model	Worst position	
	Below 1GHz	Above 1GHz
EUT	Horizontal: Y, Vertical: Y	Horizontal: X, Vertical: Z (Fundamental) Horizontal: X, Vertical: Y (below 18GHz) Horizontal: Z, Vertical: Z (above 18GHz)

9.5 Band edge

Band edge level at 2400MHz is less than 20dB of peak point of the carrier. Refer to the data of Out of Band Emissions (Antenna Port Conducted). Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data of Radiated emission.

9.6 Results

Summary of the test results : Pass

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

10 Peak power density

Test procedure

The peak power density was measured with a spectrum analyzer connected to the antenna port.

Instrument used : Spectrum Analyzer *1)
RBW / VBW : 30kHz / 100kHz *2)

*1) PSD Option 1 of " Measurement of Digital Transmission Systems Operating under Section 15.247".

*2) The test was not performed at RBW : 3kHz that was stated in the Regulation.

However, the measurement value with RBW: 3kHz is less than the value of RBW: 30kHz and the test data met the limit with RBW: 30kHz.

Summary of the test results: Pass

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

APPENDIX 1: Photographs of test setup

Page 14	:	Conducted emission
Page 15	:	Radiated emission
Page 16	:	Pre-check of the worst position

APPENDIX 2: Test data

Page 17 - 32	:	Conducted emission
Page 32 - 36	:	6dB bandwidth
Page 37 - 40	:	Maximum peak output power
Page 41 - 52	:	Out of band emissions (Radiated)
Page 53 - 66	:	Out of band emissions (Antenna port conducted)
Page 67 - 71	:	Peak power density
Page 72 - 75	:	Occupied bandwidth

APPENDIX 3: Test instruments

Page 76	:	Test instruments
---------	---	------------------

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401