

APPLICATION FOR CERTIFICATION

Class II PERMISSIVE CHANGE

On Behalf of

Futaba Corporation

Radio Control

Model No. : FHSS1-24G

FCC ID : AZPFHSS1-24G

Brand: Futaba

Prepared for : Futaba Corporation
1080 Yabutsuka Chosei-son Chosei-gun
Chiba, 299-4395 Japan.

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1006377
Report Number : EM-F990738
Date of Test : Jul. 08 ~ 13, 2010
Date of Report : Jul. 21, 2010

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. DESCRIPTION OF VERSION	4
2. GENERAL INFORMATION	5
2.1. Description of Device (EUT).....	5
2.2. Description of Test Facility	6
2.3. Measurement Uncertainty	6
3. CONDUCTED EMISSION MEASUREMENT.....	7
4. RADIATED EMISSION MEASUREMENT	8
4.1. Test Equipment.....	8
4.2. Test Setup	8
4.3. Radiated Emission Limits (§15.209)	10
4.4. Operating Condition of EUT	10
4.5. Test Procedure	10
4.6. Radiated Emission Measurement Results	11
5. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	28
5.1. Test Equipment.....	28
5.2. Block Diagram of Test Setup.....	28
5.3. Specification Limits (§15.247(b)-(1)).....	28
5.4. Operating Condition of EUT	28
5.5. Test Procedure (DA 00-705).....	28
5.6. Test Results.....	29
6. DEVIATION TO TEST SPECIFICATIONS	30
7. PHOTOGRAPHS	31
7.1. Photos of Radiated Measurement at Semi-Anechoic Chamber	31
7.2. Photo of Maximum Peak Output Power Measurement	34
 APPENDIX I (Radiated Test Data for frequency rang above 1GHz at Semi-Anechoic Chamber)	

TEST REPORT CERTIFICATION (Class II Permissive Change)

Applicant : Futaba Corporation
 Manufacturer : Futaba Corporation
 EUT Description : Radio Control
 FCC ID : AZPFHSS1-24G
 (A) Model No. : FHSS1-24G
 (B) Serial No. : N/A
 (C) Brand : Futaba
 (D) Power Supply : DC 6V
 (E) Test Voltage : DC 6V (Via Batteries)

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2009
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207 and §15.209 and §15.247)

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart B & C limits.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

This report is based on reports of EM-F980768.

Date of Test : Jul. 08 ~ 13, 2010

Date of Report : Jul. 21, 2010

Producer : Annie Yu
 (Annie Yu/Assistant Administrator)

Reviewer : Henning Chang
 (Henning Chang/Supervisor)

Signatory : Ben Cheng
 (Ben Cheng/Manager)

1. DESCRIPTION OF VERSION

Edition No.	Date of Rev.	Summary	Report No.
Rev. 0	Nov. 04, 2009	Original Report.	EM-F980768
Rev. 1	Jul. 21, 2010	<ol style="list-style-type: none">1. The change filed under this application is adding a host, model T3PL-24G collocated with Radio Control, FCC ID: AZPFHSS1-24G.2. Supplementary test data are recorded in report of EM-F990738.	EM-F990738

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	:	Radio Control (Transmitter Unit)
Model Number	:	FHSS1-24G
Serial Number	:	N/A
FCC ID	:	AZPFHSS1-24G
Applicant	:	Futaba Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Manufacturer	:	Futaba Corporation 1080 Yabutsuka Chosei-son Chosei-gun Chiba, 299-4395 Japan.
Radio Technology	:	FHSS Modulation
Frequency Band	:	2404.000MHz ~ 2447.500MHz
Tested Frequency	:	2404.000MHz (Channel 01) 2425.000MHz (Channel 15) 2447.500MHz (Channel 30)
Frequency Channel	:	30 channels
Antenna (Pencil Antenna)	:	Antenna Gain: 2.14dBi
Date of Receipt of Sample	:	Jun. 28, 2010
Date of Test	:	Jul. 08 ~ 13, 2010

Information for Class II Permissive Change:

1. This EUT is additional version with original FCC ID AZPFHSS1-24G.
2. The change filed under this application is adding a host, model T3PL-24G collocated with Radio Control, FCC ID: AZPFHSS1-24G.
3. This report is based on reports of EM-F980768.

2.2. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation**
EMC Department
 No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
 Taipei Hsien, Taiwan

Test Location & Facility (AC) : **Semi-Anechoic Chamber**
 No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
 Taipei Hsien, Taiwan.
 May 14, 2009 Renewal on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

2.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	±2.91dB
	300MHz~1000MHz	±2.94dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	± 0.2kHz
Carrier Frequency Separation	± 0.2kHz
Time Of Occupancy	± 0.03sec
Maximum peak Output power	± 0.52dBm
Emission Limitations	± 0.13dB
Band Edges	± 0.13dB

3. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

4.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8564EC	3946A00249	Oct. 27, 09'	Oct. 26, 10'
2.	Test Receiver	R&S	ESCS30	100265	Aug. 28, 09'	Aug. 27, 10'
3.	Pre-Amplifier	HP	8447D	2944A06305	Feb. 03, 10'	Feb. 02, 11'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 13, 10'	Mar. 12, 11'
5.	Log Periodic Antenna	Schwarzbeck	UHALP91 08-A	0810	Mar. 13, 10'	Mar. 12, 11'

4.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8564EC	3946A00249	Oct. 27, 09'	Oct. 26, 10'
2.	Pre-Amplifier	HP	8449B	3008A01284	Jun. 25, 10'	Jun. 24, 11'
3.	Horn Antenna	EMCO	3115	9112-3775	May 10, 10'	May 09, 11'
4.	Horn Antenna	EMCO	3116	2653	Oct. 02, 09'	Oct. 01, 10'

4.2. Test Setup


4.2.1. Block Diagram of connection between EUT and simulators

RADIO CONTROL (EUT)

4.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

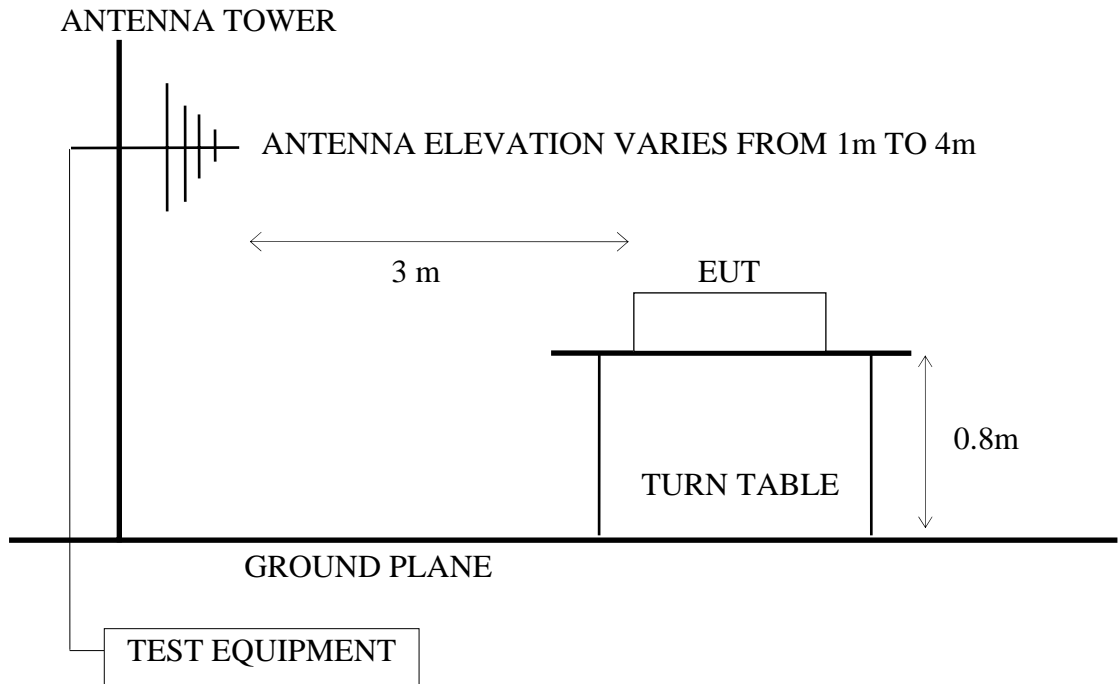

4.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

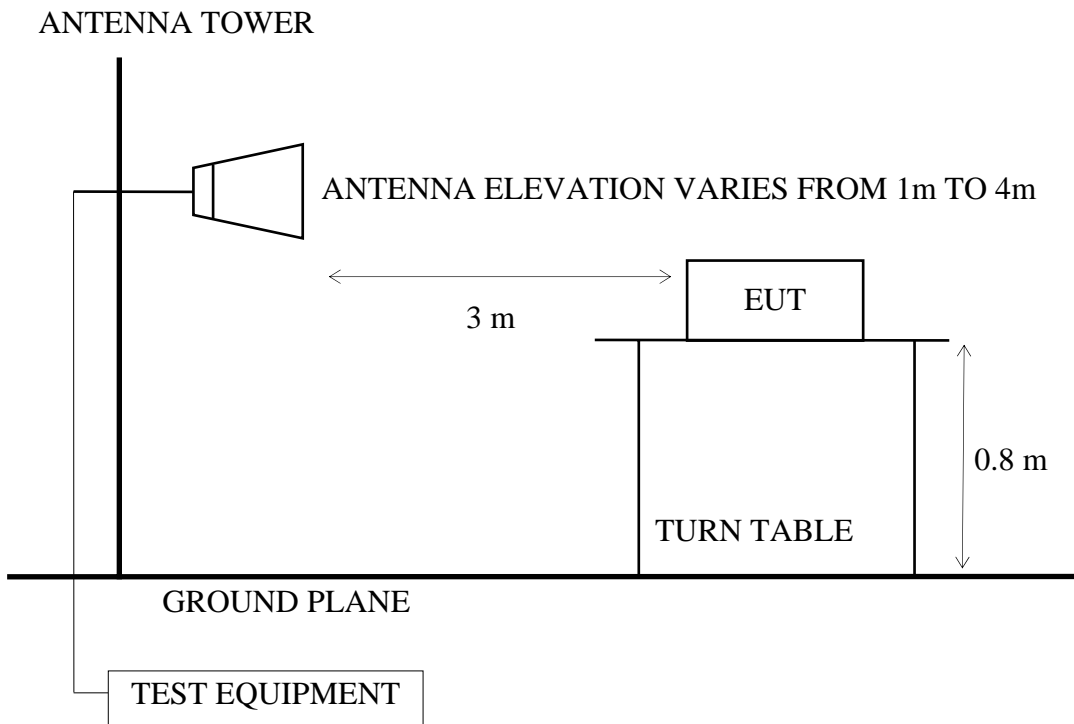

4.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		μV/m	dBμV/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 dBμV/m (Peak) 54.0 dBμV/m (Average)	

- Remark :
- (1) Emission level (dBμV/m) = 20 log Emission level (μV/m)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT (Radio Control) as shown on 4.2.
- 4.4.2. To turn on the power of all equipment.
- 4.4.3. The EUT was set the PC system using test program “Futaba Term”.
- 4.4.4. Transmit Mode: The EUT was set to continuously transmit signals at 2404.000MHz、 2425.000MHz and 2447.500MHz during testing.
- 4.4.5. Receive Mode: The EUT was set to continuously receive signals at 2425.000MHz during testing.

4.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked.

4.6. Radiated Emission Measurement Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

EUT : Radio Control M/N : FHSS1-24G

Test Date : Jul. 08, 2010 Temperature : 27 Humidity : 49%
 Test Date : Jul. 13, 2010 Temperature : 27 Humidity : 49%

For Frequency Range 30MHz~1000MHz:

The EUT emitted the fundamental frequency with data code at the stand, side and lying conditions.

The EUT select **worst position “stand”** and with following test modes was performed during this section testing and all the test results are listed in section 4.6.1.

Mode	Channel	Frequency	Test Mode	Position	Reference Test Data	
					Horizontal	Vertical
1.	01	2404.000MHz	Transmit	Stand	# 1	# 2
2.	15	2425.000MHz		Stand	# 2	# 1
3.	30	2447.500MHz		Stand	# 1	# 2
4.	15	2425.000MHz	Receive	Stand	# 2	# 1

* Above all final readings were measured with Quasi-Peak detector.

For Frequency above 1GHz:

The EUT select **worst position “stand”** and with the following test modes was measured within semi-anechoic chamber. All the graphical results are attached in Appendix I and all the final readings are listed in section 4.6.2.

Mode	Channel	Frequency	Test Mode	Position
1.	01	2404.000MHz	Transmit	Stand
2.	15	2425.000MHz		Stand
3.	30	2447.500MHz		Stand
4.	15	2425.000MHz	Receive	Stand

* Above all final readings were measured with Peak detector and Average detector.

*(**Test Modes 4** emissions level is too low to be measured, therefore, the reading values not reported.)

For Restricted Bands:


The EUT was tested in restricted bands and all the test results are listed in section 4.6.3. (The restricted bands defined in part 15.205(a))

Mode	Channel	Frequency	Test Mode	Reference Test Data	
				Horizontal	Vertical
1.	01	2404.000MHz	Transmit	# 2, #3	#1, #4
2.	30	2447.500MHz	Transmit	#6, #7	#5, #8

4.6.1. Frequency Range 30-1000MHz



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

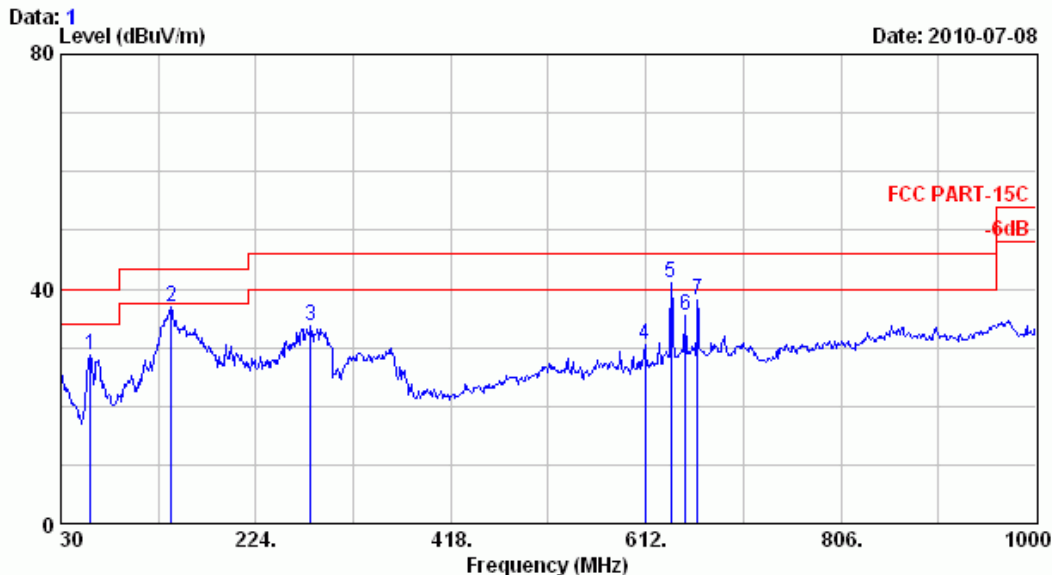


Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2404

	Ant.	Cable	Emission				
Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	59.100	13.16	1.60	13.95	28.71	40.00	11.29
2	139.610	20.15	2.50	14.19	36.84	43.50	6.66
3	278.320	25.25	3.80	4.52	33.57	46.00	12.43
4	611.030	21.41	6.30	2.74	30.45	46.00	15.55
5	637.220	20.92	6.20	13.81	40.92	46.00	5.08
6	651.770	21.72	6.30	7.55	35.56	46.00	10.44
7	663.410	22.52	6.32	9.23	38.06	46.00	7.94

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

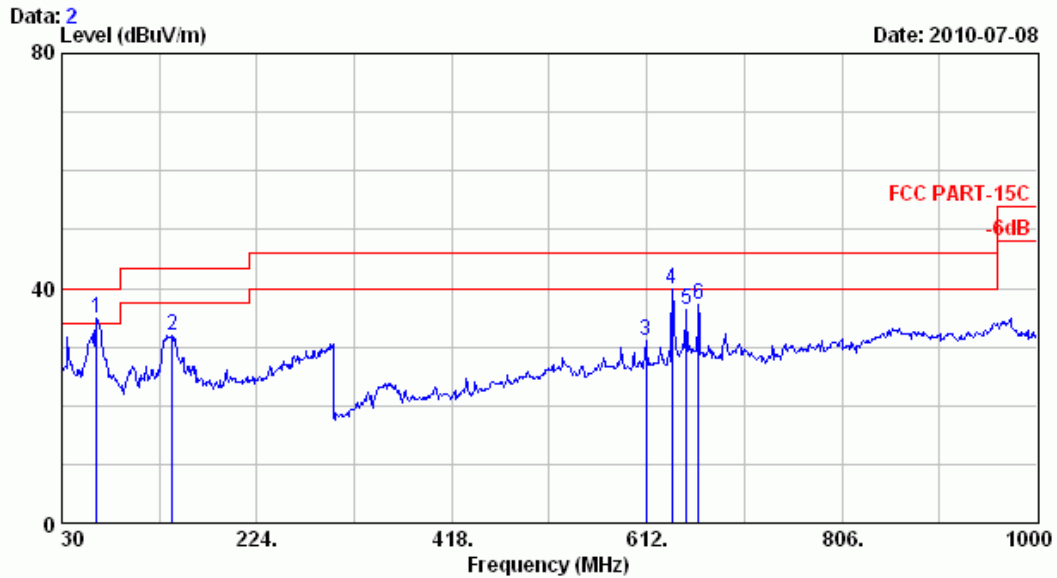


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2404

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	64.920	11.81	1.70	21.49	35.00	40.00	5.00	
2	139.610	20.15	2.50	9.37	32.02	43.50	11.48	
3	611.030	21.41	6.30	3.27	30.98	46.00	15.02	
4	637.220	20.92	6.20	12.66	39.77	46.00	6.23	
5	651.770	21.72	6.30	8.45	36.46	46.00	9.54	
6	663.410	22.52	6.32	8.41	37.24	46.00	8.76	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

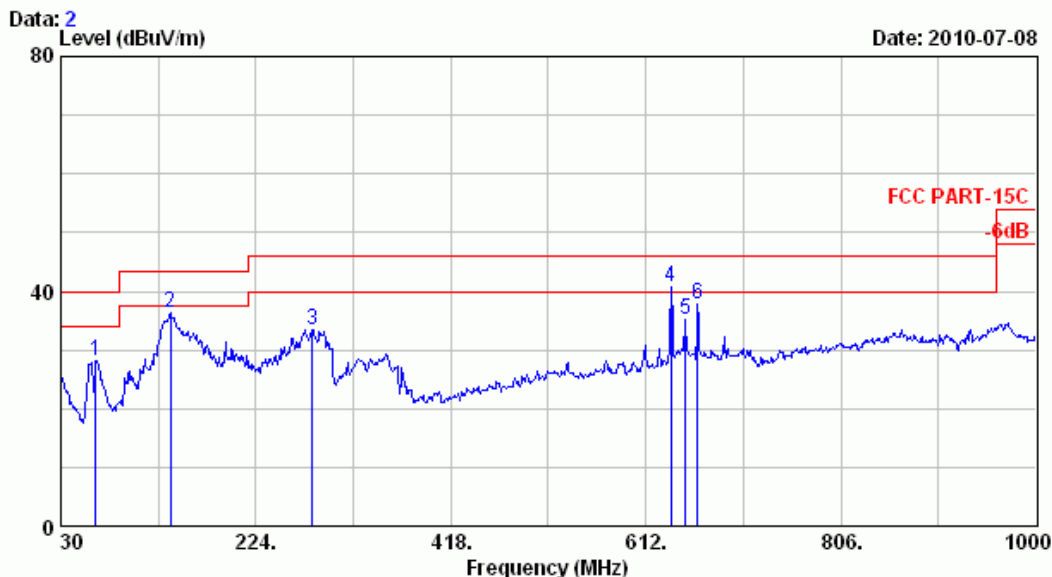


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2425

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	64.920	11.81	1.70	14.72	28.23	40.00	11.77	
2	138.640	20.06	2.50	13.74	36.30	43.50	7.20	
3	280.260	25.30	3.80	4.43	33.52	46.00	12.48	
4	637.220	20.92	6.20	13.71	40.82	46.00	5.18	
5	651.770	21.72	6.30	7.08	35.09	46.00	10.91	
6	663.410	22.52	6.32	8.97	37.80	46.00	8.20	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

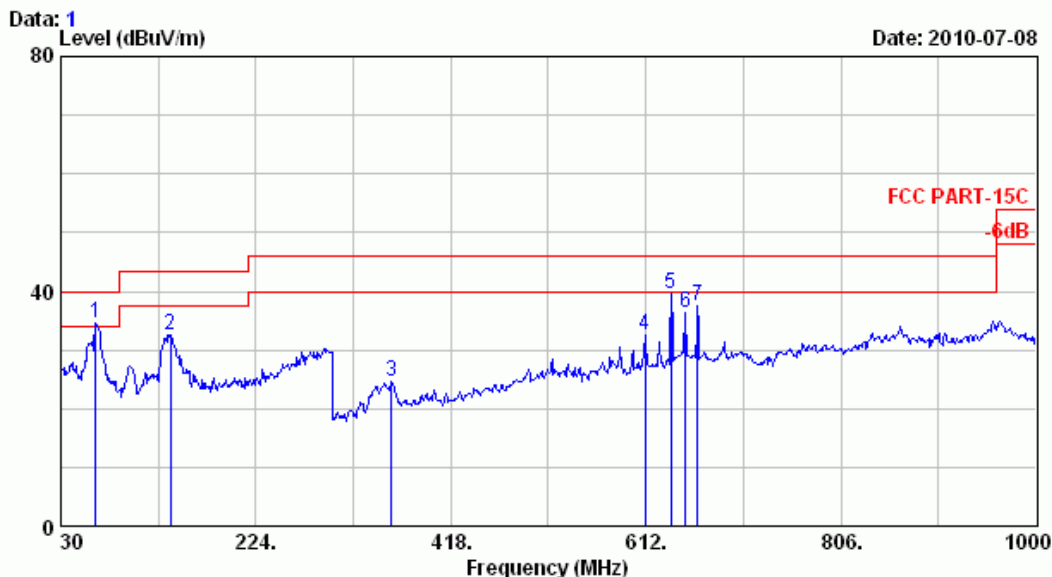


Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2425

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	64.920	11.81	1.70	21.20	34.71	40.00	5.29	
2	138.640	20.06	2.50	10.11	32.67	43.50	10.83	
3	358.830	16.02	4.40	4.19	24.61	46.00	21.39	
4	611.030	21.41	6.30	4.94	32.65	46.00	13.35	
5	637.220	20.92	6.20	12.41	39.52	46.00	6.48	
6	651.770	21.72	6.30	8.20	36.21	46.00	9.79	
7	663.410	22.52	6.32	8.62	37.45	46.00	8.55	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

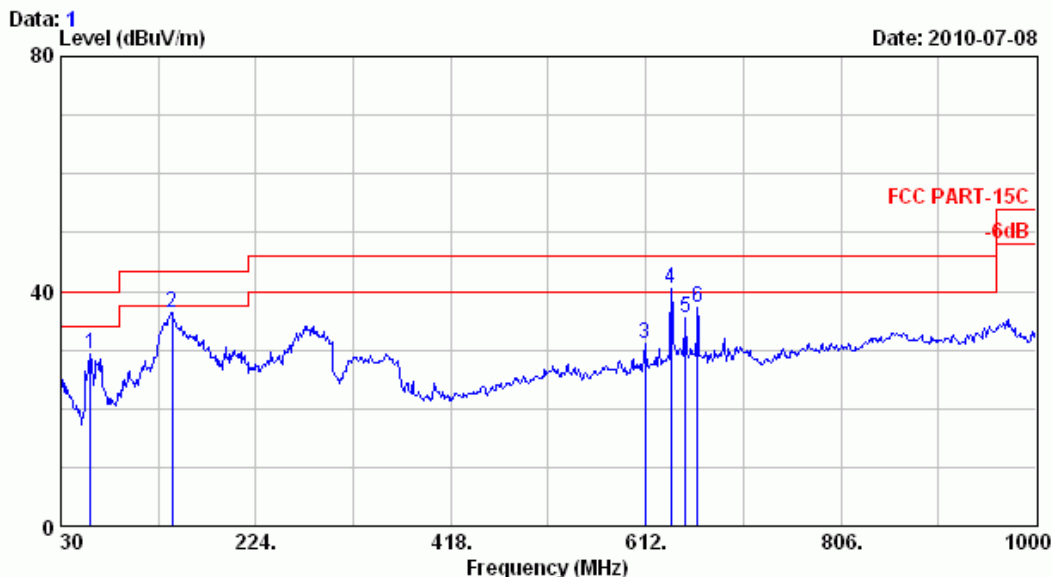


Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	59.100	13.16	1.60	14.43	29.19	40.00	10.81	
2	140.580	20.22	2.50	13.67	36.40	43.50	7.10	
3	611.030	21.41	6.30	3.25	30.96	46.00	15.04	
4	637.220	20.92	6.20	13.44	40.55	46.00	5.45	
5	651.770	21.72	6.30	7.32	35.33	46.00	10.67	
6	663.410	22.52	6.32	8.37	37.20	46.00	8.80	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

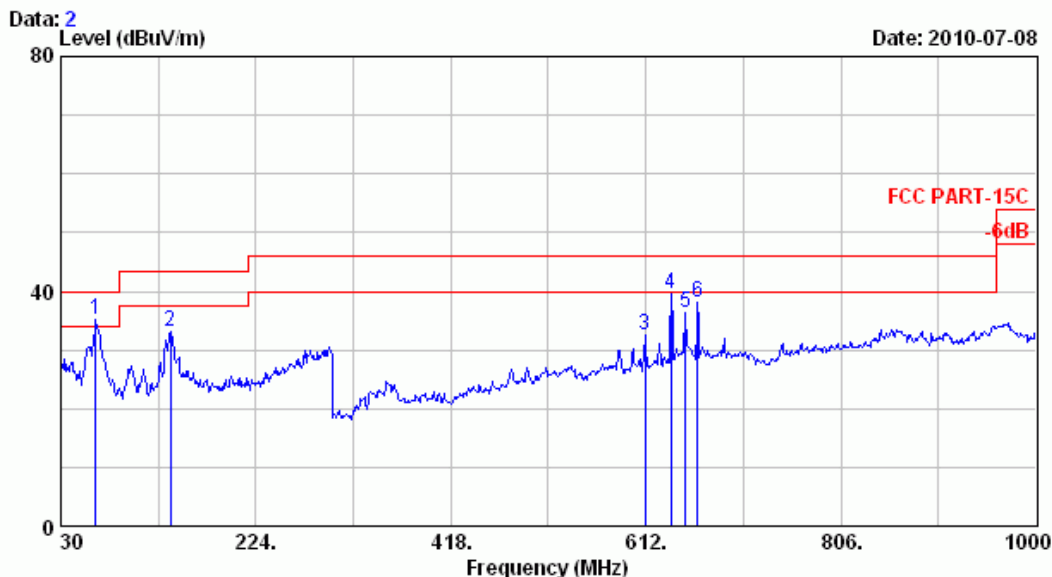


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	64.920	11.81	1.70	21.77	35.28	40.00	4.72	
2	138.640	20.06	2.50	10.58	33.14	43.50	10.36	
3	611.030	21.41	6.30	4.76	32.47	46.00	13.53	
4	637.220	20.92	6.20	12.57	39.68	46.00	6.32	
5	651.770	21.72	6.30	8.45	36.46	46.00	9.54	
6	663.410	22.52	6.32	9.32	38.15	46.00	7.85	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

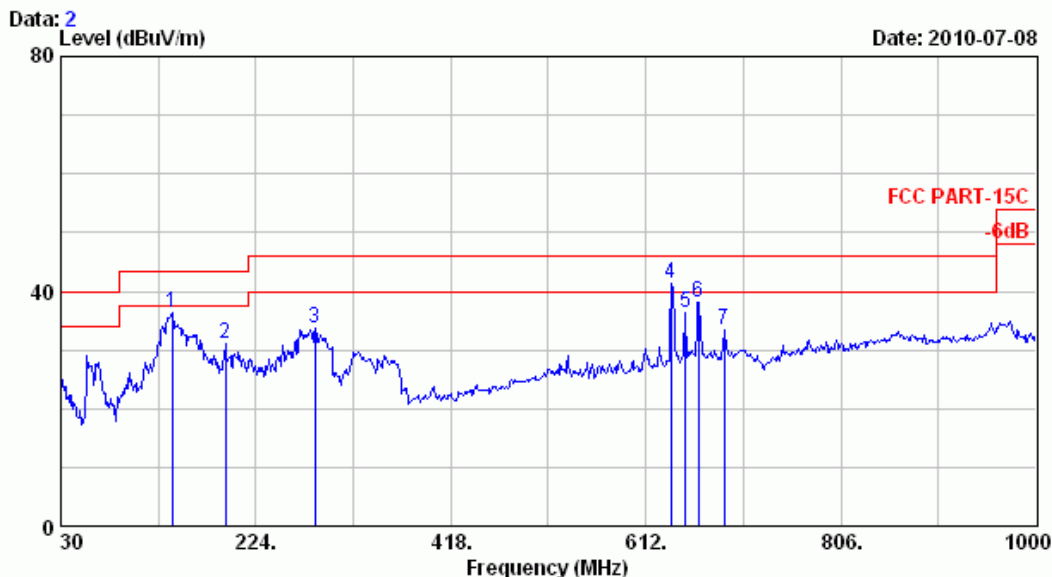


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : RX2425

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	140.580	20.22	2.50	13.50	36.22	43.50	7.28	
2	193.930	21.70	3.00	6.37	31.07	43.50	12.43	
3	283.170	25.45	3.80	4.53	33.78	46.00	12.22	
4	637.220	20.92	6.20	14.16	41.27	46.00	4.73	
5	651.770	21.72	6.30	8.24	36.25	46.00	9.75	
6	664.380	22.61	6.31	9.09	38.01	46.00	7.99	
7	689.600	23.25	6.50	3.57	33.32	46.00	12.68	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

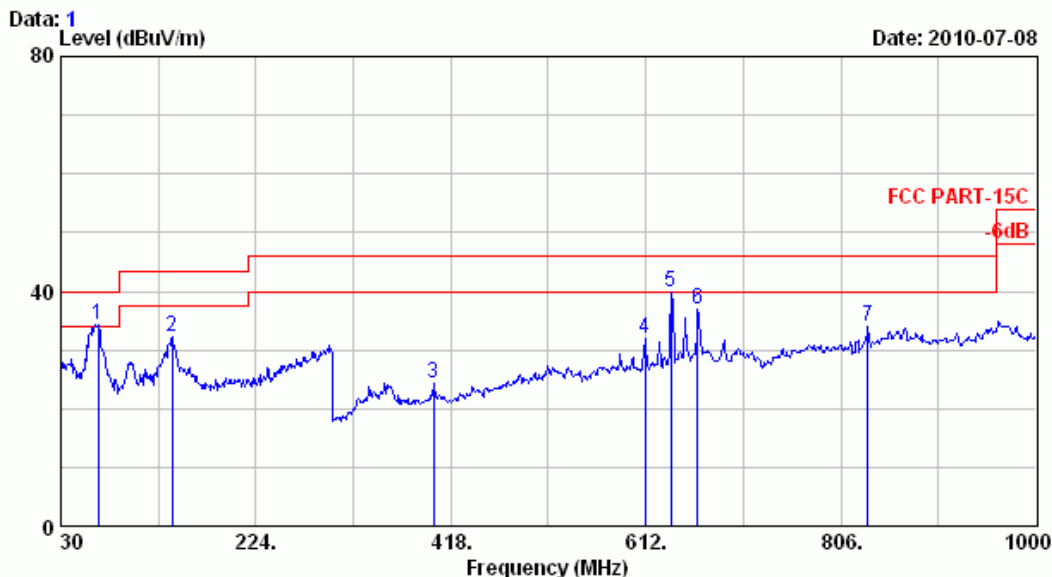

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : RX2425

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	66.860	11.80	1.70	20.93	34.43	40.00	5.57	
2	140.580	20.22	2.50	9.46	32.18	43.50	11.32	
3	400.540	17.66	4.80	1.73	24.19	46.00	21.81	
4	611.030	21.41	6.30	4.20	31.91	46.00	14.09	
5	637.220	20.92	6.20	12.81	39.92	46.00	6.08	
6	663.410	22.52	6.32	8.20	37.03	46.00	8.97	
7	833.160	24.88	7.10	1.99	33.97	46.00	12.03	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

4.6.2. Above 1GHz Frequency Range Measurement Results

Date of Test : Jul. 13, 2010 Temperature : 27
 EUT : Radio Control Humidity : 49%
 Test Mode : Transmit, Channel: 01 (Frequency: 2404.000MHz), Position: Stand

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Peak	2249.920	27.96	6.17	12.40	46.53	74.00	27.47
	2330.560	28.03	6.26	15.39	49.68	74.00	24.32
	2367.520	28.06	6.31	7.05	41.42	74.00	32.58
Average	2249.920	27.96	6.17	8.89	43.02	54.00	10.98
	2330.560	28.03	6.26	9.46	43.75	54.00	10.25
	2367.520	28.06	6.31	5.23	39.60	54.00	14.40

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Peak	2249.920	27.96	6.17	9.00	43.13	74.00	30.87
	2330.560	28.03	6.26	9.62	43.91	74.00	30.09
Average	2249.920	27.96	6.17	6.00	40.13	54.00	13.87
	2330.560	28.03	6.26	6.62	40.91	54.00	13.09

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

Date of Test : Jul. 13, 2010 Temperature : 27
 EUT : Radio Control Humidity : 49%
 Test Mode : Transmit, Channel: 15 (Frequency: 2425.000MHz), Position: Stand

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Peak	2271.760	27.98	6.19	12.40	46.57	74.00	27.43
	2283.520	27.99	6.21	12.64	46.84	74.00	27.16
	2359.120	28.06	6.30	19.05	53.41	74.00	20.59
Average	2271.760	27.98	6.19	8.37	42.54	54.00	11.46
	2283.520	27.99	6.21	8.66	42.86	54.00	11.14
	2359.120	28.06	6.30	13.55	47.91	54.00	6.09

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Peak	2271.760	27.98	6.19	10.36	44.53	74.00	29.47
	2322.160	28.03	6.25	10.54	44.82	74.00	29.18
	2355.760	28.06	6.29	10.29	44.64	74.00	29.36
	2518.720	28.26	6.49	10.56	45.31	74.00	28.69
Average	2271.760	27.98	6.19	6.76	40.93	54.00	13.07
	2322.160	28.03	6.25	6.73	41.01	54.00	12.99
	2355.760	28.06	6.29	7.16	41.51	54.00	12.49
	2518.720	28.26	6.49	6.68	41.43	54.00	12.57

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

Date of Test : Jul. 13, 2010 Temperature : 27

EUT : Radio Control Humidity : 49%

Test Mode : Transmit, Channel: 30 (Frequency: 2447.500MHz), Position: Stand

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Peak	2296.960	27.99	6.23	19.06	53.28	74.00	20.72
	2367.520	28.06	6.31	16.91	51.28	74.00	22.72
	2532.160	28.33	6.52	10.61	45.46	74.00	28.54
Average	2296.960	27.99	6.23	14.03	48.25	54.00	5.75
	2367.520	28.06	6.31	9.64	44.01	54.00	9.99
	2532.160	28.33	6.52	5.85	40.70	54.00	13.30

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Peak	2296.960	27.99	6.23	18.18	52.40	74.00	21.60
	2367.520	28.06	6.31	11.96	46.33	74.00	27.67
	2532.160	28.33	6.52	10.12	44.97	74.00	29.03
Average	2296.960	27.99	6.23	12.30	46.52	54.00	7.48
	2367.520	28.06	6.31	8.46	42.83	54.00	11.17
	2532.160	28.33	6.52	7.89	42.74	54.00	11.26

Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 25GHz, but the emissions level were too low against the official limit and not report.

4.6.3. Restricted Bands Measurement Results

Date of Test : Jul. 08, 2010 Temperature : 27

EUT : Radio Control Humidity : 49%


Test Mode : Transmit, Channel: 01, Frequency: 2404.000MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Peak *	2383.370	28.08	6.33	31.51	65.92	74.00	8.08
Average *	2325.840	28.03	6.26	9.79	44.08	54.00	9.92

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2420MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

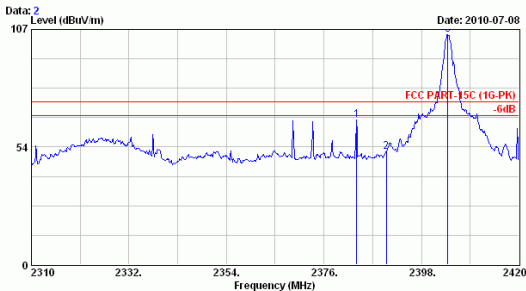


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2404

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2383.370	28.08	6.33	31.51	65.92	74.00	8.08	Peak
2 2390.080	28.10	6.34	16.85	51.29	74.00	22.71	Peak
3 2403.940	28.11	6.36	70.12	104.59	74.00	-30.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

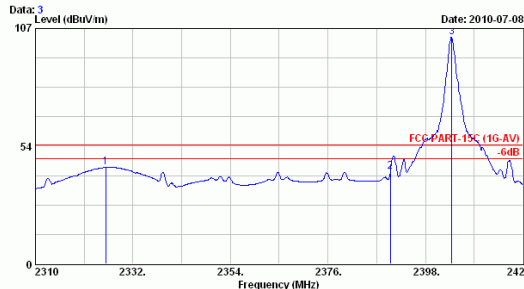

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSSI-24G
 Power Rating : DC 6V
 Test Mode : TX2404

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2325.840	28.03	6.26	9.79	44.08	54.00	9.92	Average
2 2390.080	28.10	6.34	7.49	41.93	54.00	12.07	Average
3 2403.940	28.11	6.36	68.45	102.92	54.00	-48.92	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 08, 2010 Temperature : 27

EUT : Radio Control Humidity : 49%


Test Mode : Transmit, Channel: 01, Frequency: 2404.000MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Peak *	2381.940	28.08	6.33	28.60	63.01	74.00	10.99
Average *	2390.080	28.10	6.34	6.40	40.84	54.00	13.16

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Low frequency section (spurious in the restricted band 2310-2420MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan.R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

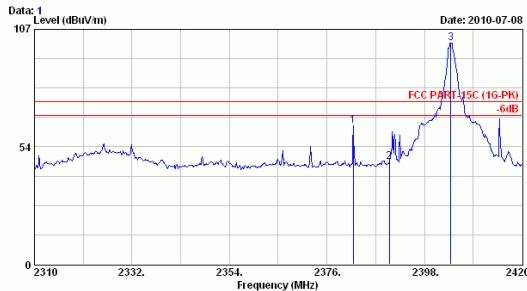


Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:PH881-24G
 Power Rating : DC 6V
 Test Mode : TX2404

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2381.940	28.08	6.33	28.60	63.01	74.00	10.99	Peak
2	2390.080	28.10	6.34	12.36	46.80	74.00	27.20	Peak
3	2403.940	28.11	6.36	66.45	100.92	74.00	-26.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan.R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

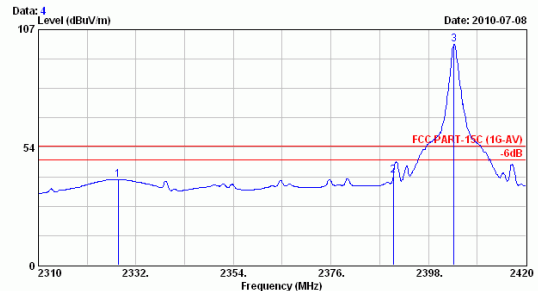

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:PH881-24G
 Power Rating : DC 6V
 Test Mode : TX2404

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2328.040	28.03	6.26	4.65	38.94	54.00	15.06	Average
2	2390.080	28.10	6.34	6.40	40.84	54.00	13.16	Average
3	2403.720	28.11	6.36	65.91	100.38	54.00	-46.38	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 13, 2010 Temperature : 27

EUT : Radio Control Humidity : 49%


Test Mode : Transmit, Channel: 30, Frequency: 2447.500MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Peak *	2493.010	28.20	6.46	21.48	56.14	74.00	17.86
Average *	2525.410	28.33	6.50	4.74	39.57	54.00	14.43

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. High frequency section (spurious in the restricted band 2440-2530MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-Ru Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:temc@temc.com.tw

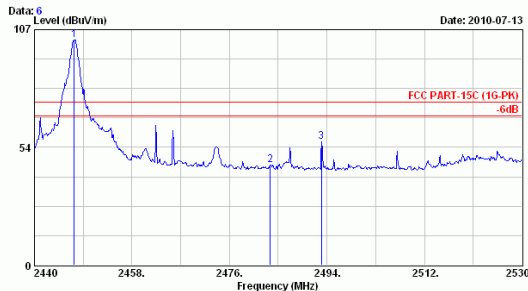


Site no. : A/C Chamber Data no. : 6
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:PH881-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2447.380	28.15	6.41	67.61	102.17	74.00	-28.17	Peak
2 2483.560	28.18	6.45	11.00	45.63	74.00	28.37	Peak
3 2493.010	28.20	6.46	21.48	56.14	74.00	17.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-Ru Tsun, Lin-Kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:temc@temc.com.tw

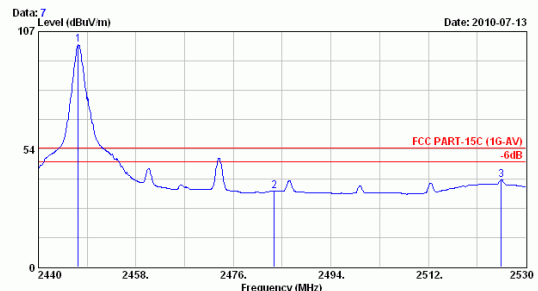

Site no. : A/C Chamber Data no. : 7
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:PH881-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2447.380	28.15	6.41	66.45	101.01	54.00	-47.01	Average
2 2483.560	28.18	6.45	-0.27	34.36	54.00	19.64	Average
3 2525.410	28.33	6.50	4.74	39.57	54.00	14.43	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 13, 2010 Temperature : 27

EUT : Radio Control Humidity : 49%


Test Mode : Transmit, Channel: 30, Frequency: 2447.500MHz

	Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Peak *	2486.710	28.18	6.45	20.04	54.67	74.00	19.33
Average *	2486.260	28.18	6.45	3.16	37.79	54.00	16.21

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. High frequency section (spurious in the restricted band 2440-2530MHz).
 3. '*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

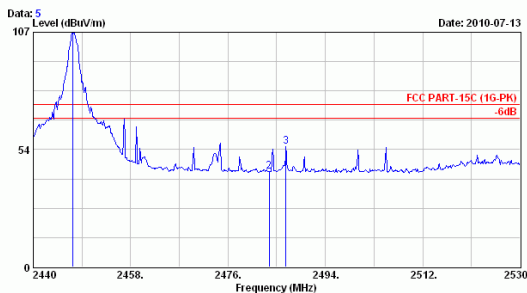


Site no. : A/C Chamber Data no. : 5
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8564EC 27°C / 49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:PH881-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2447.380	28.15	6.41	72.29	106.85	74.00	-32.85	Peak
2 2483.650	28.18	6.45	8.94	43.58	74.00	30.42	Peak
3 2486.710	28.18	6.45	20.04	54.68	74.00	19.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei County, Taiwan R.O.C. Post Code 24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

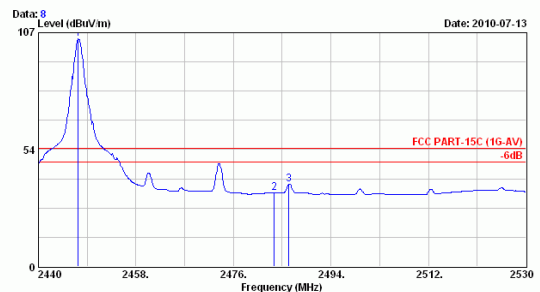

Site no. : A/C Chamber Data no. : 8
 Dis. / Ant. : 3m 3115 (3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C / 49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:PH881-24G
 Power Rating : DC 6V
 Test Mode : TX2447.5

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1 2447.380	28.15	6.41	69.50	104.06	54.00	-50.06	Average
2 2483.560	28.18	6.45	-0.94	33.69	54.00	20.31	Average
3 2486.260	28.18	6.45	3.16	37.80	54.00	16.20	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


5. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Power Meter	Anritsu	ML2487A	6K00005406	Feb. 11, 10'	Feb. 10, 11'
2.	Power Sensor	Anritsu	MA2491A	030873	Feb. 11, 10'	Feb. 10, 11'

5.2. Block Diagram of Test Setup



5.3. Specification Limits (§15.247(b)-(1))

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

5.4. Operating Condition of EUT

- 5.4.1. Set up the EUT and simulator as shown on 5.2.
- 5.4.2. To turn on the power of all equipment.
- 5.4.3. EUT (Radio Control) was on transmitting frequency function during the testing.

5.5. Test Procedure (DA 00-705)

The transmitter output was connected to the power sensor and record the reading of power meter.

5.6. Test Results

PASSED. All the test results are listed below.

Test Date : Jul. 08, 2010 Temperature :25 Humidity : 51%

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	01	2404.000MHz	12.51dBm	21dBm
2.	15	2425.000MHz	12.19dBm	21dBm
3.	30	2447.500MHz	12.01dBm	21dBm

6. DEVIATION TO TEST SPECIFICATIONS

【NONE】

7. PHOTOGRAPHS

7.1. Photos of Radiated Measurement at Semi-Anechoic Chamber

7.1.1. Frequency Range 30MHz~1GHz, Stand



7.1.2. Frequency Range 30MHz~1GHz, Side



7.1.3.Frequency Range 30MHz~1GHz, Lie



7.1.4.Frequency Range Above 1GHz, Stand



7.1.5.Frequency Range Above 1GHz, Side



7.1.6.Frequency Range Above 1GHz, Lie



7.2. Photo of Maximum Peak Output Power Measurement




APPENDIX I

(Radiated Test Data for frequency rang a at
Semi-Anechoic Chamber)


Total Pages: 26 Pages



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

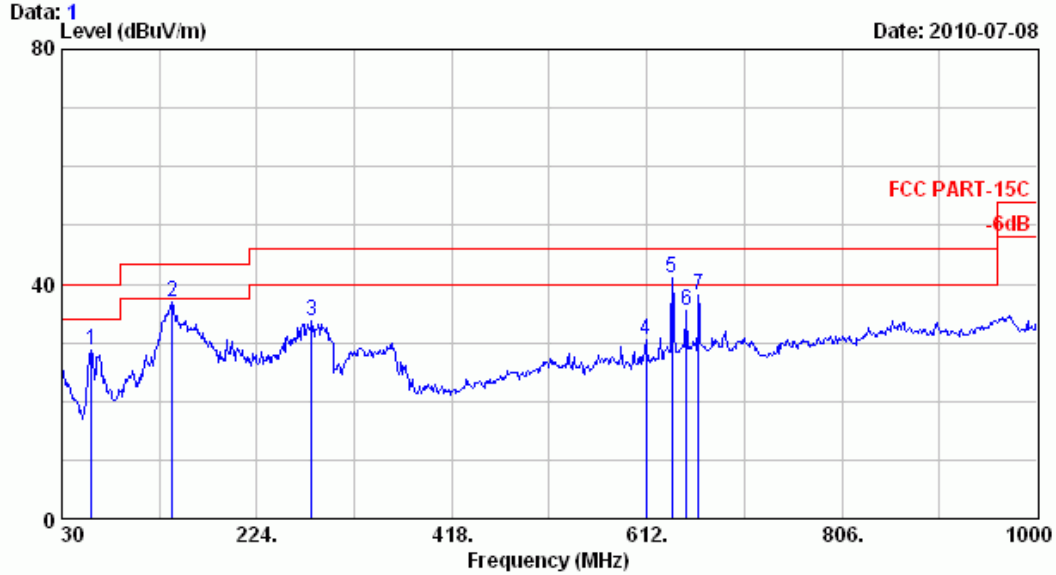


Site no.	: A/C Chamber	Data no.	: 1
Dis. / Ant.	: 3m VBA6106A/UHALP9108A	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		

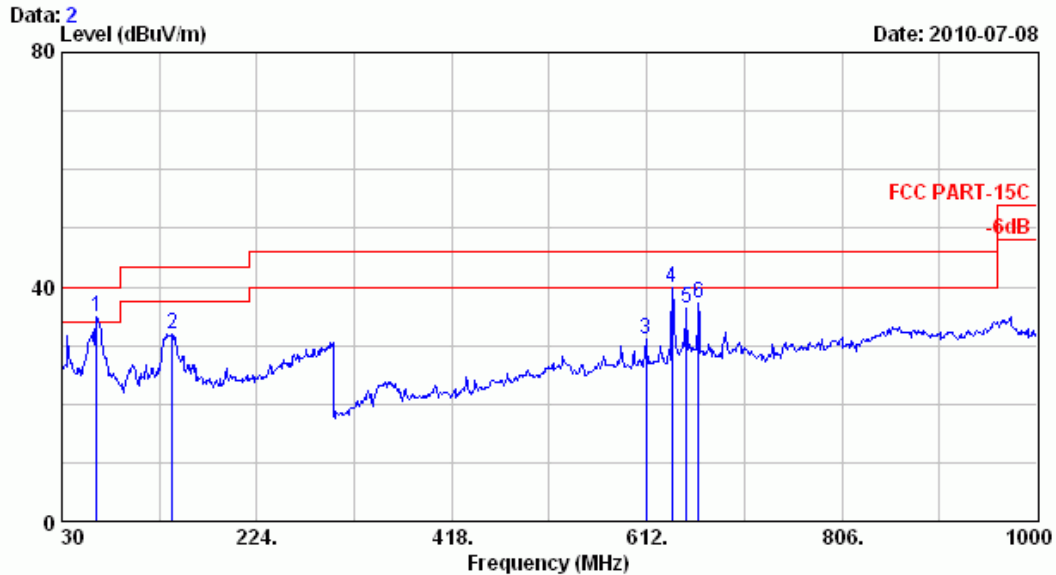


Site no.	: A/C Chamber	Data no.	: 2
Dis. / Ant.	: 3m VBA6106A/UHALP9108A	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

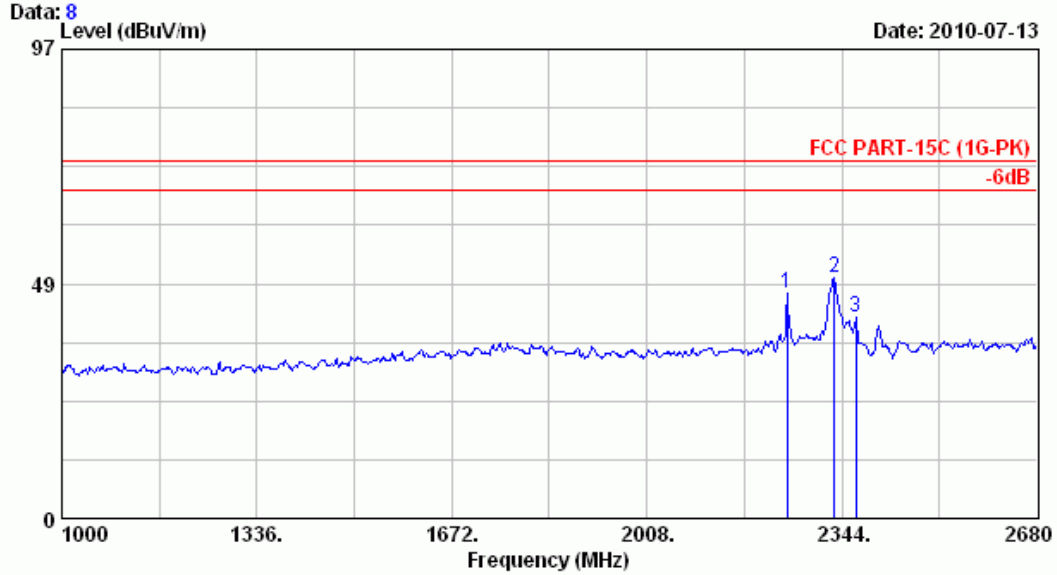


Site no.	: A/C Chamber	Data no.	: 8
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		

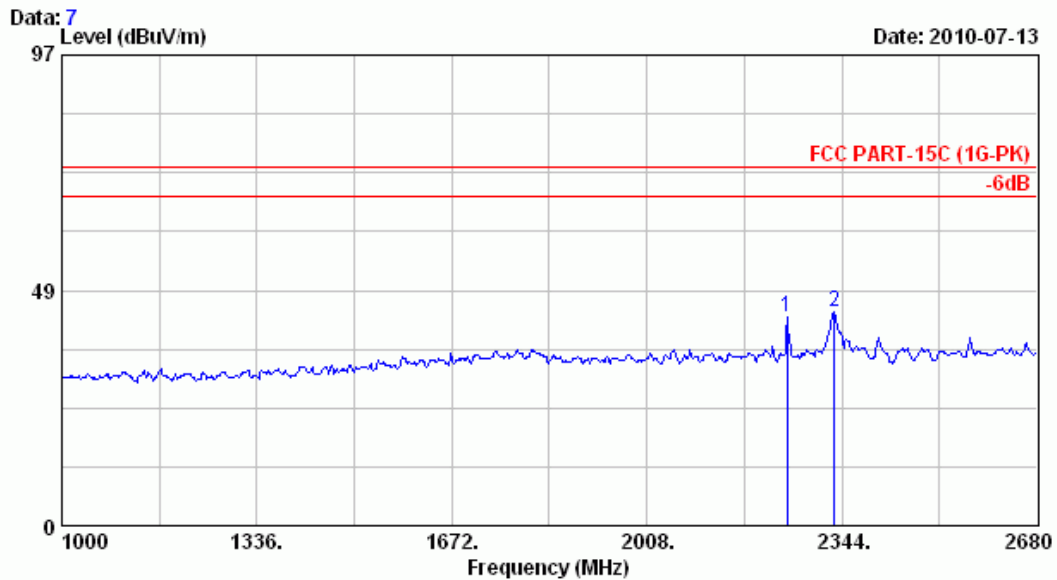


Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

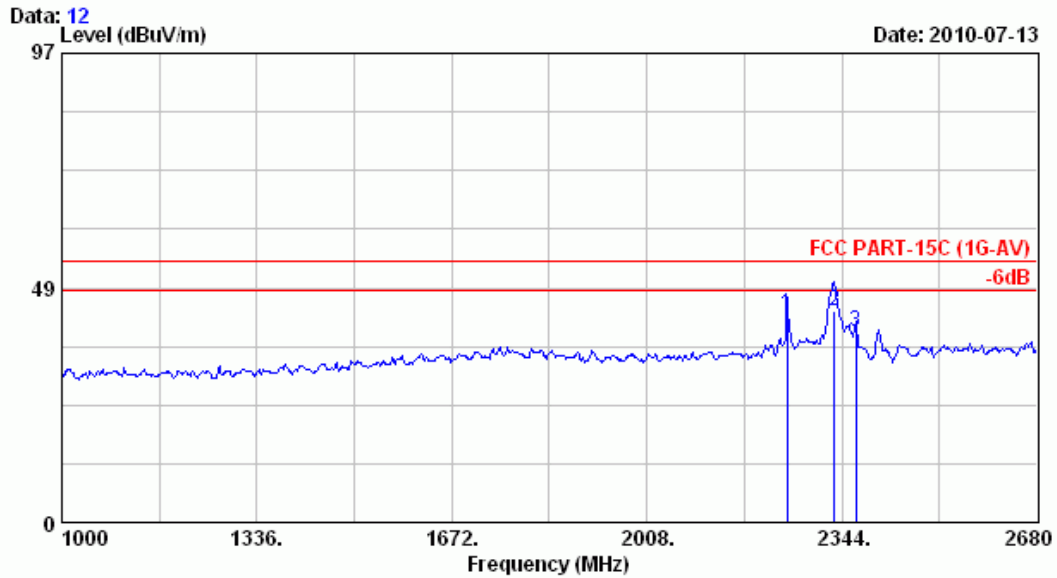


Site no.	: A/C Chamber	Data no.	: 12
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		

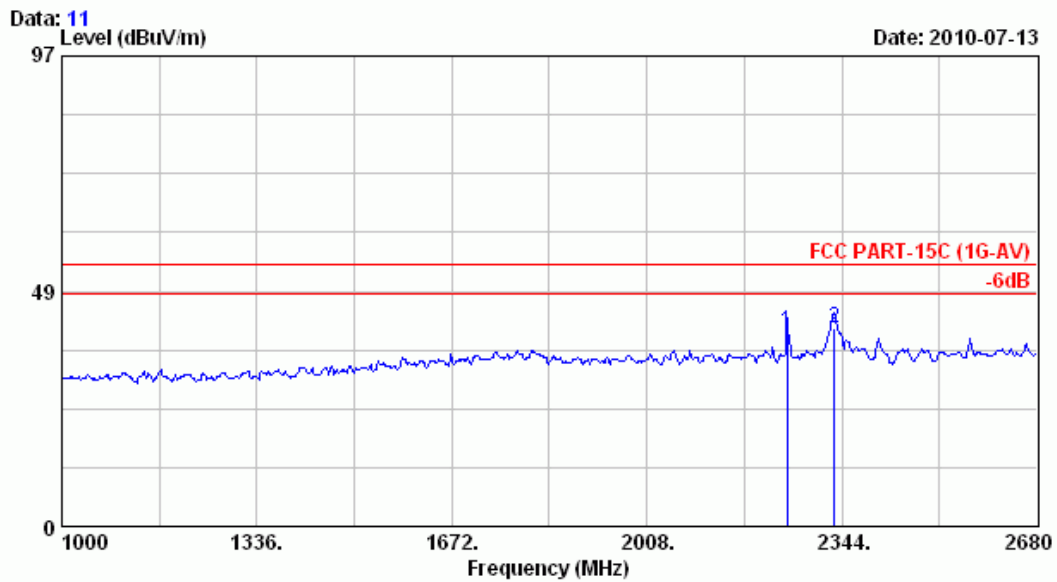


Site no.	: A/C Chamber	Data no.	: 11
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

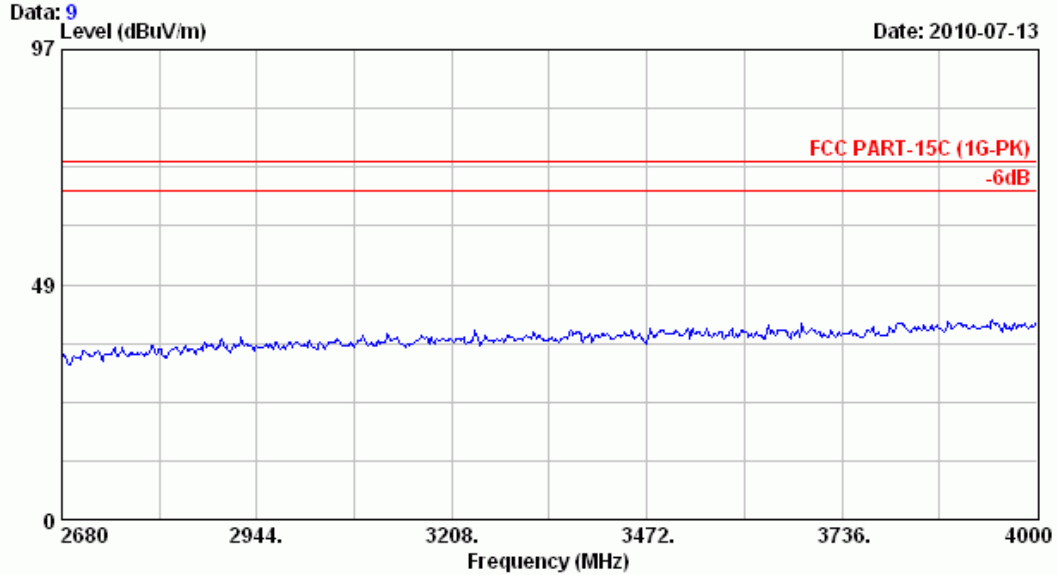


Site no.	: A/C Chamber	Data no.	: 9
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		

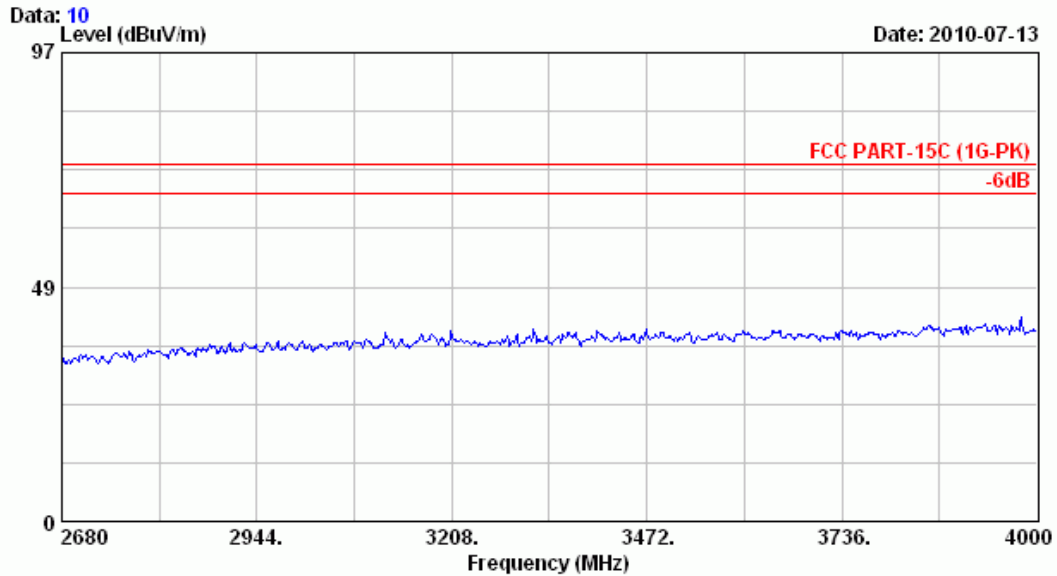


Site no.	: A/C Chamber	Data no.	: 10
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

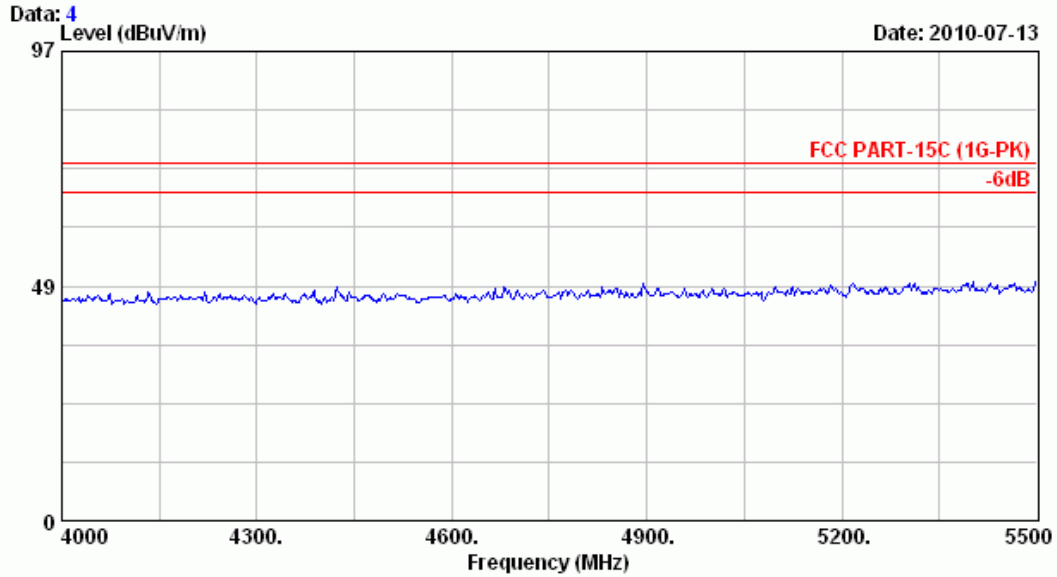


Site no.	: A/C Chamber	Data no.	: 4
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		

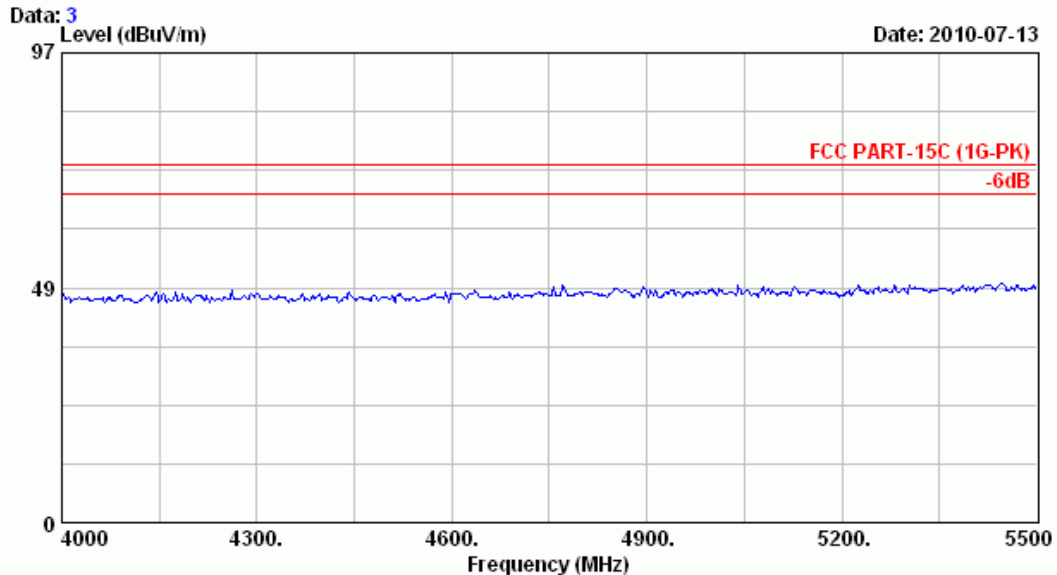


Site no.	: A/C Chamber	Data no.	: 3
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

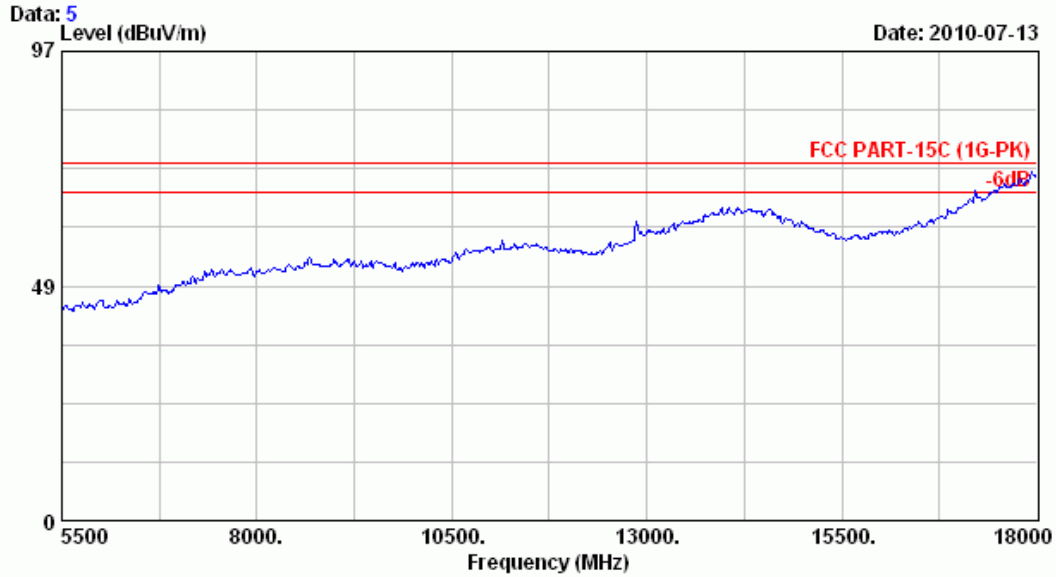


Site no.	: A/C Chamber	Data no.	: 5
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		

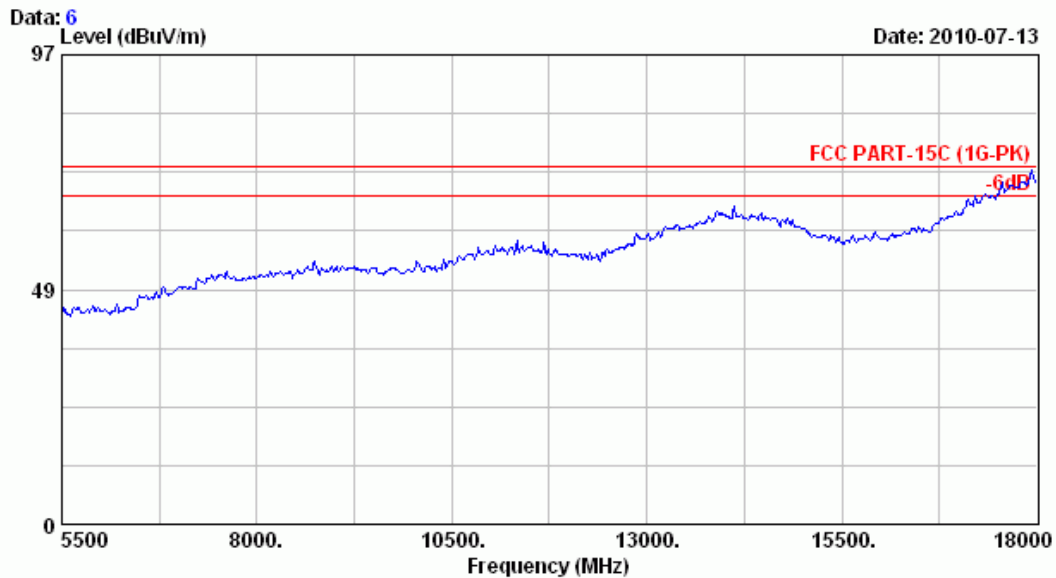


Site no.	: A/C Chamber	Data no.	: 6
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

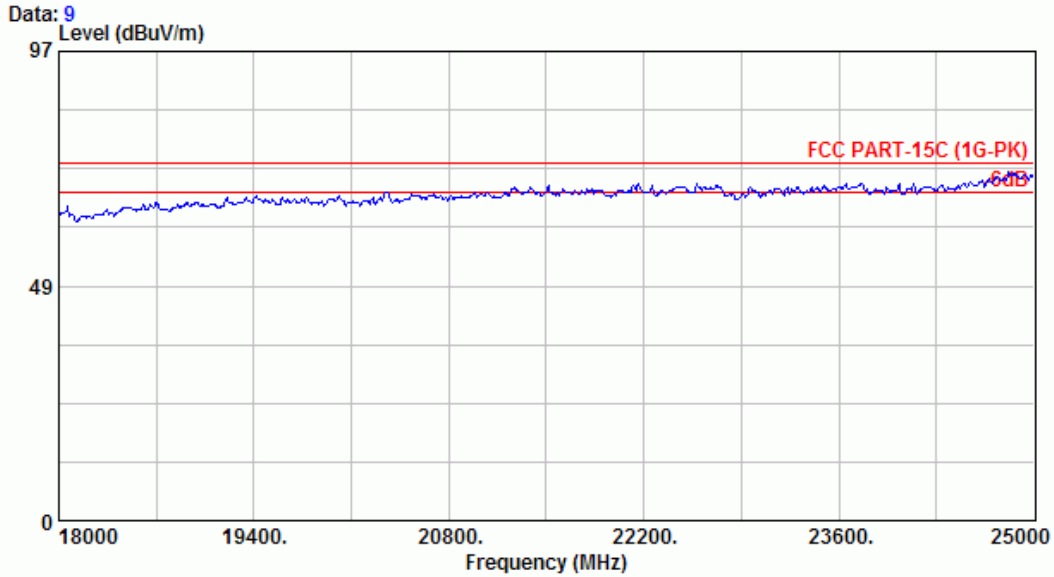


Site no.	: A/C Chamber	Data no.	: 12
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSSI-24G		
Power Rating	: DC 4.8V		
Test Mode	: TX2404		

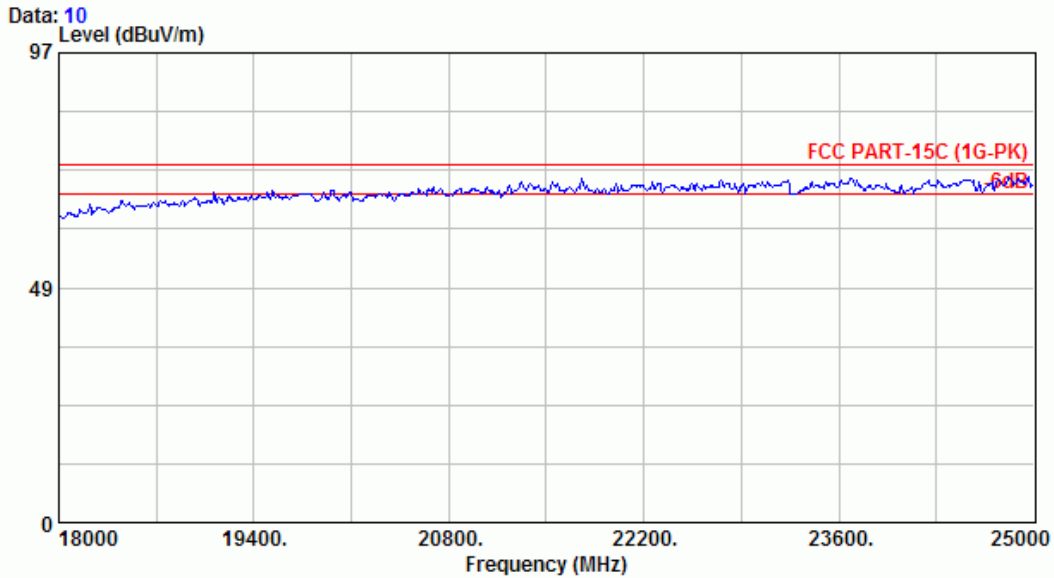


Site no.	: A/C Chamber	Data no.	: 12
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSSI-24G		
Power Rating	: DC 6V		
Test Mode	: TX2404		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

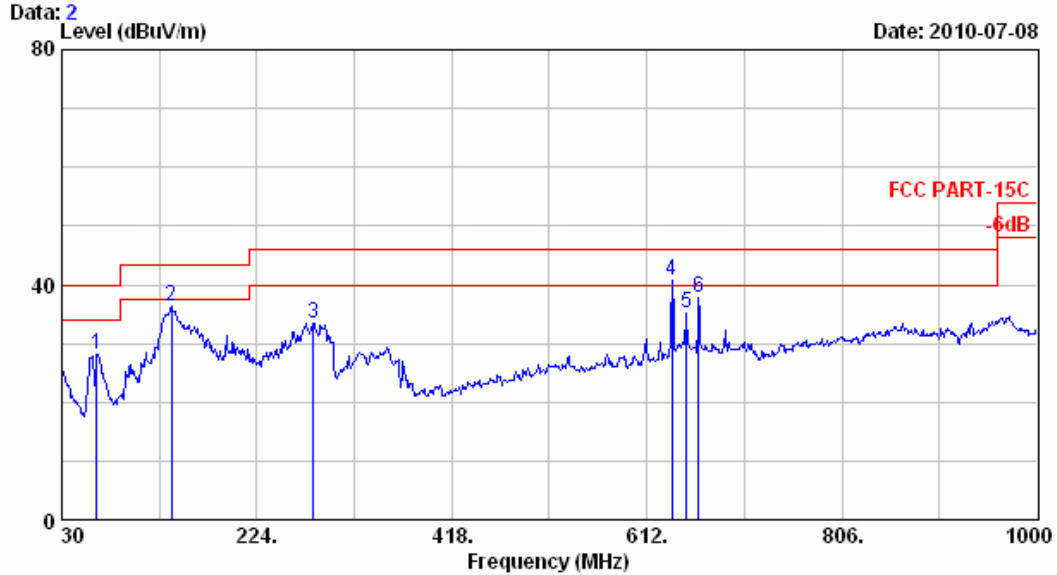


Site no.	: A/C Chamber	Data no.	: 2
Dis. / Ant.	: 3m VBA6106A/UHALP9108A	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		

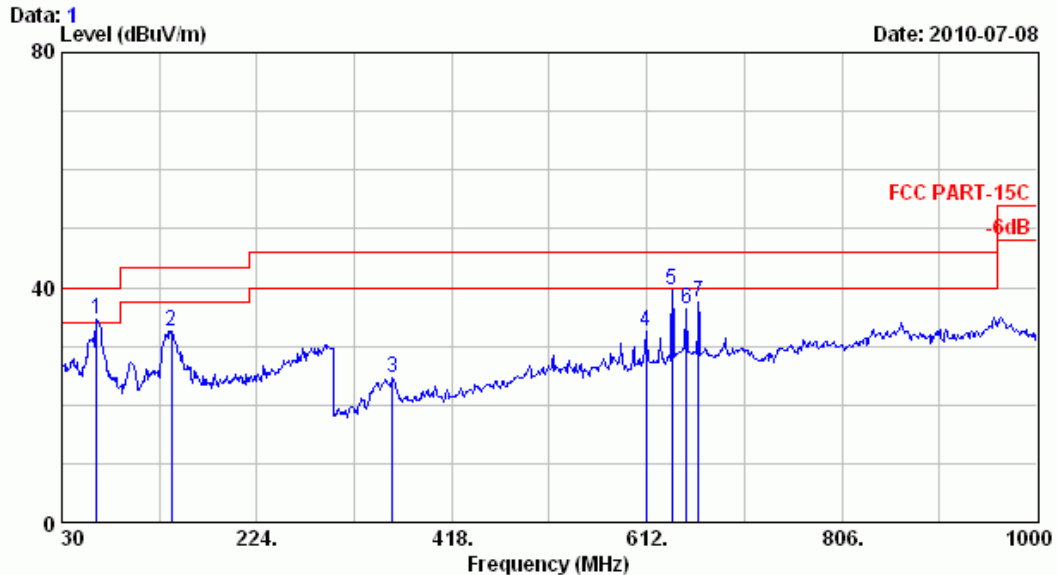


Site no.	: A/C Chamber	Data no.	: 1
Dis. / Ant.	: 3m VBA6106A/UHALP9108A	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

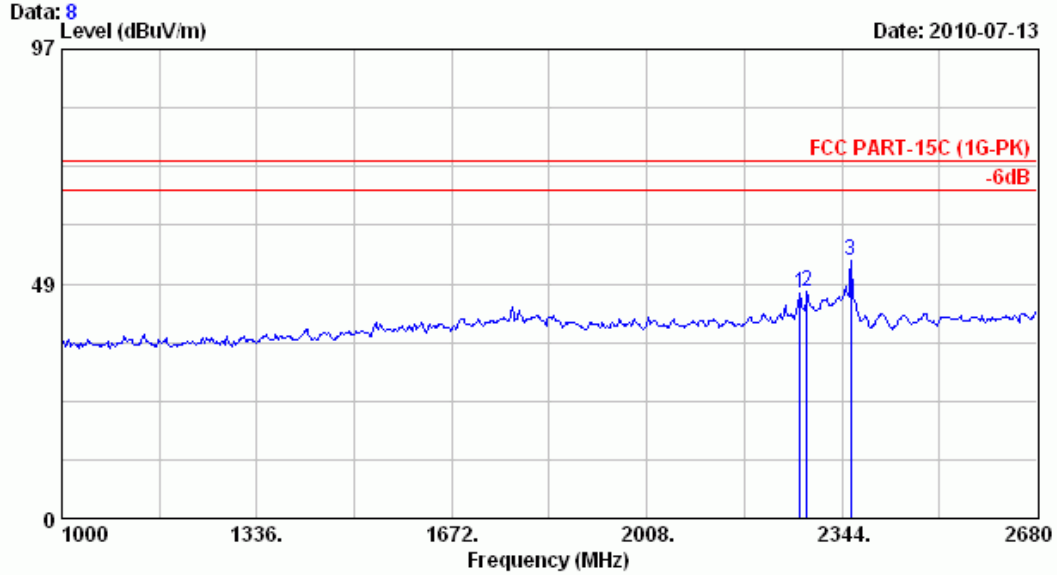


Site no.	: A/C Chamber	Data no.	: 8
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		

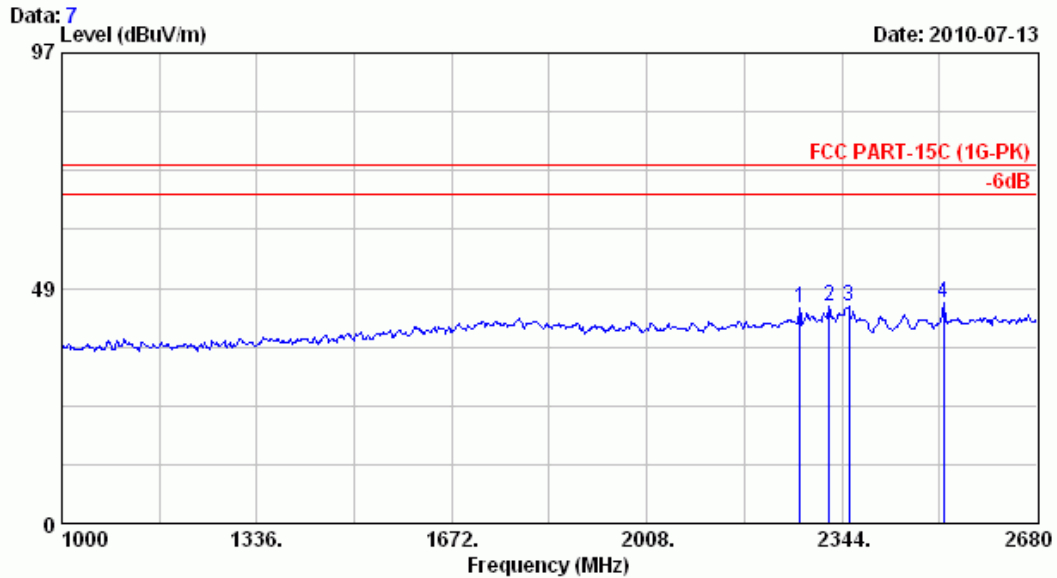


Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

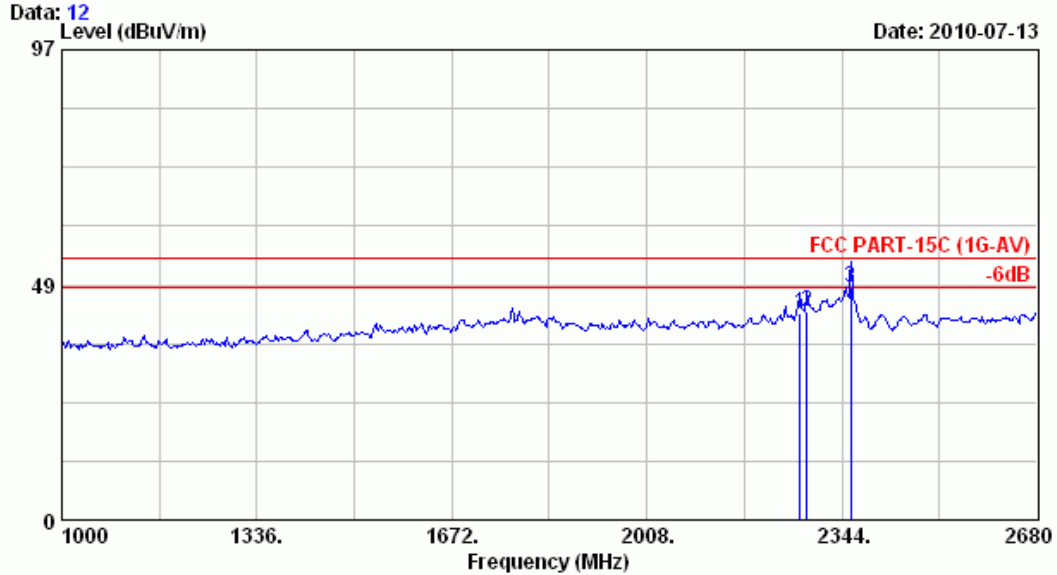


Site no.	: A/C Chamber	Data no.	: 12
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		

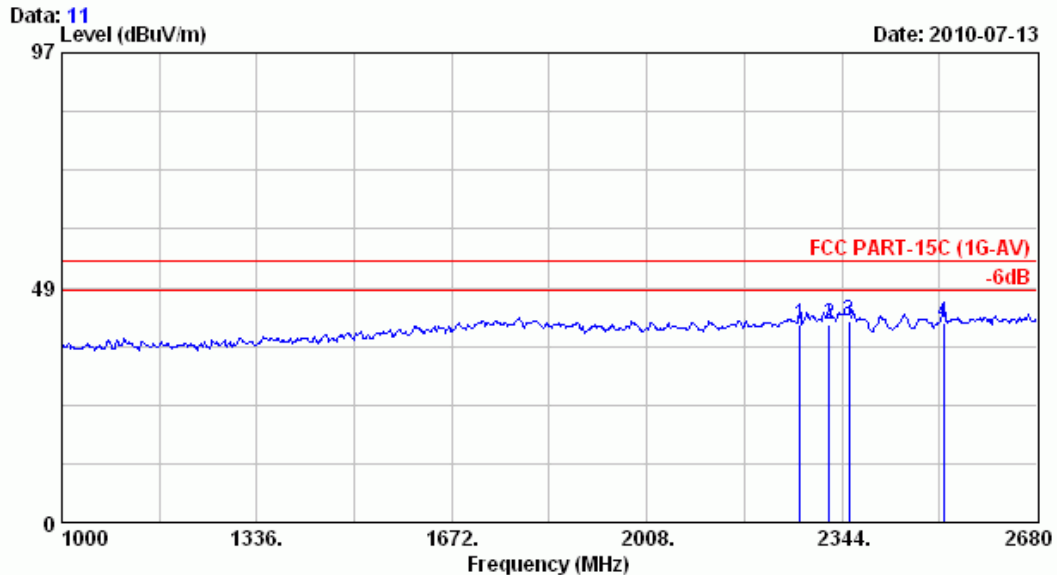


Site no.	: A/C Chamber	Data no.	: 11
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

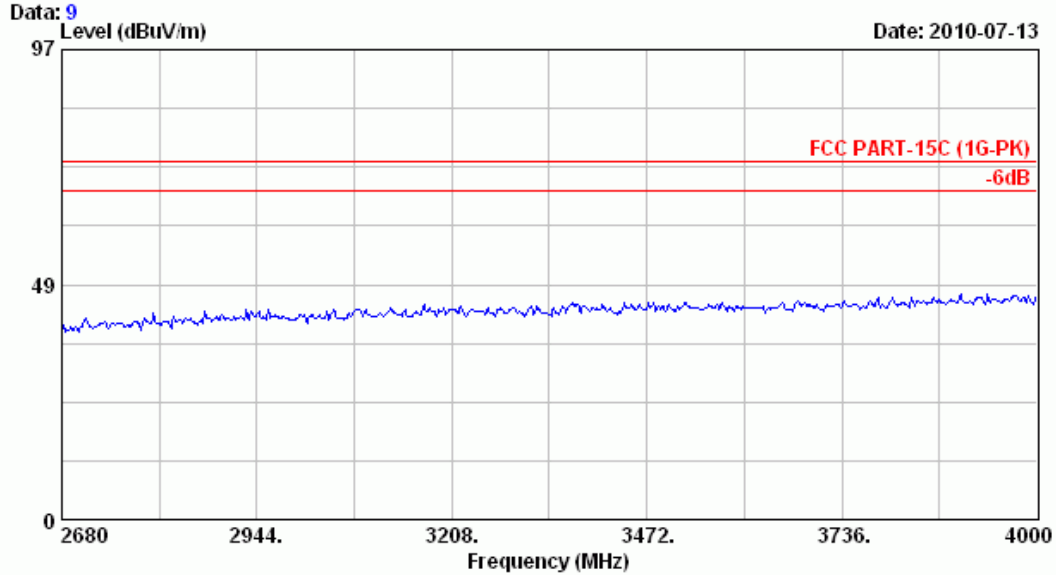


Site no.	: A/C Chamber	Data no.	: 9
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		

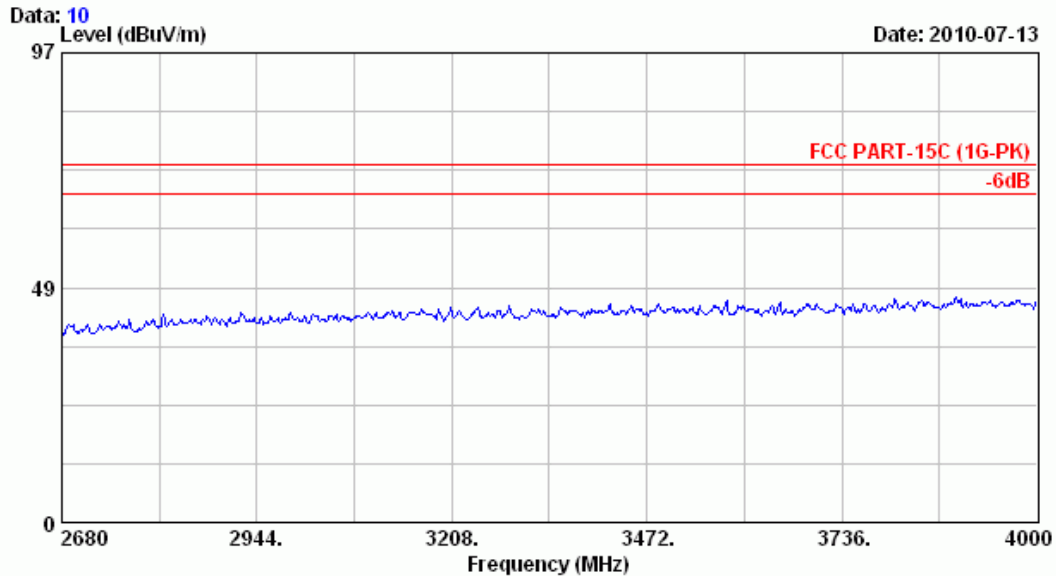


Site no.	: A/C Chamber	Data no.	: 10
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

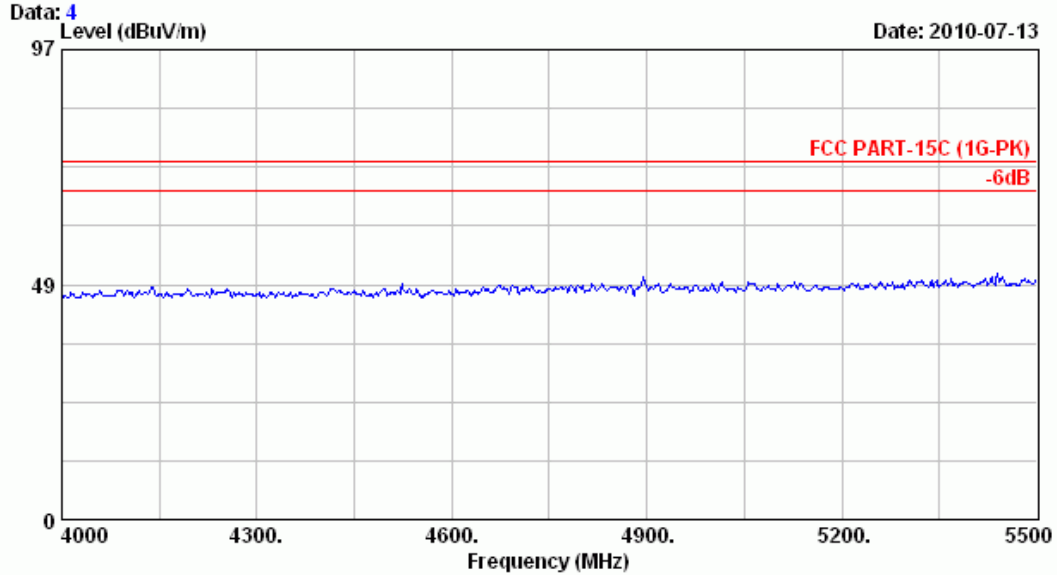


Site no.	: A/C Chamber	Data no.	: 4
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		

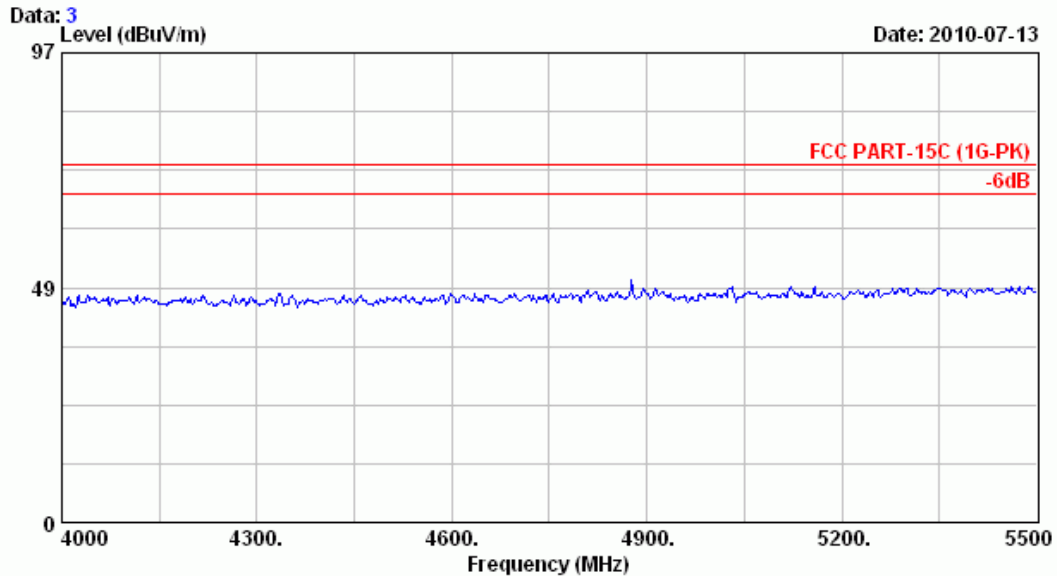


Site no.	: A/C Chamber	Data no.	: 3
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

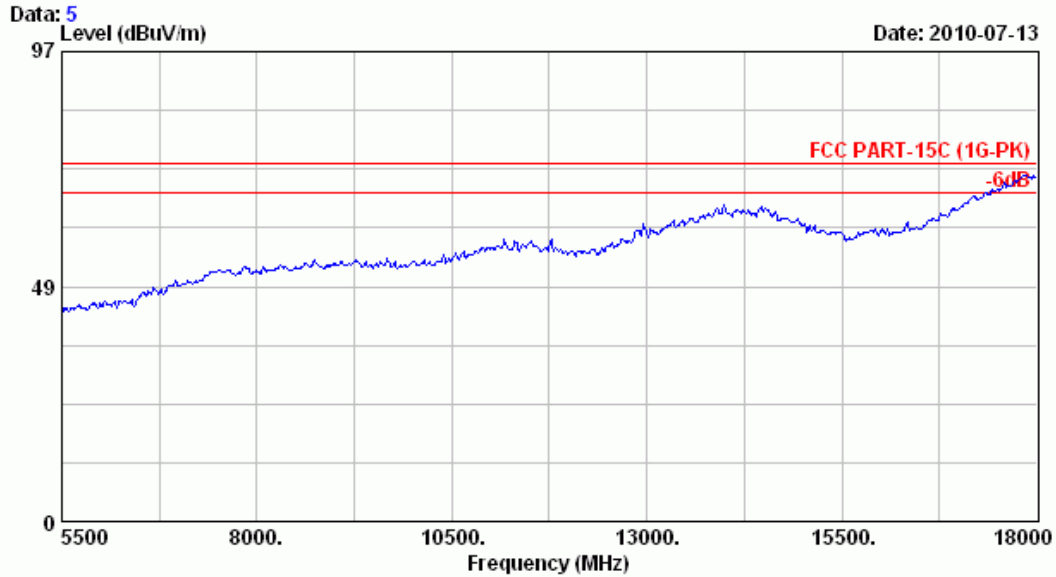


Site no.	: A/C Chamber	Data no.	: 5
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		

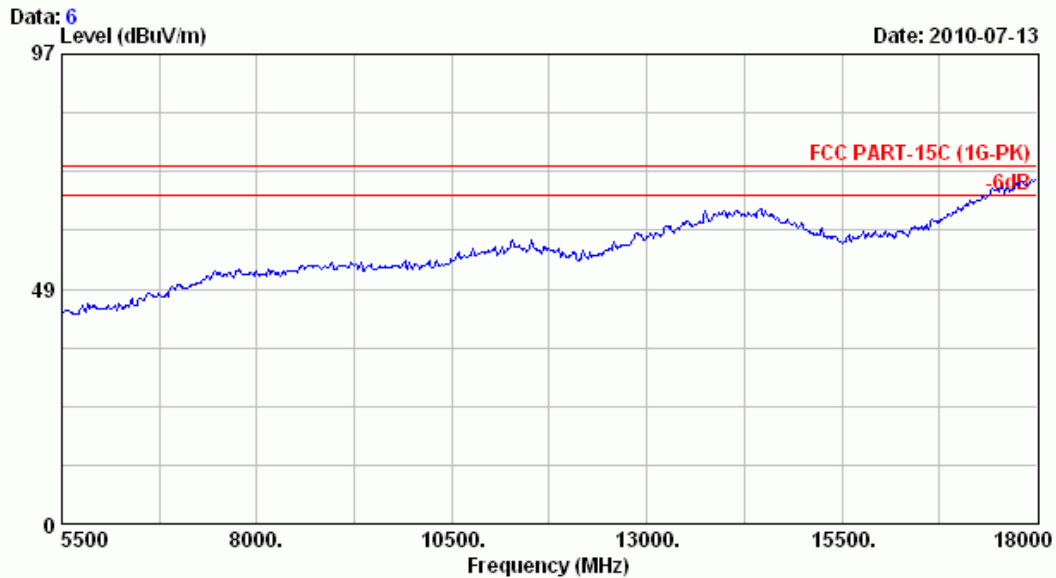


Site no.	: A/C Chamber	Data no.	: 6
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

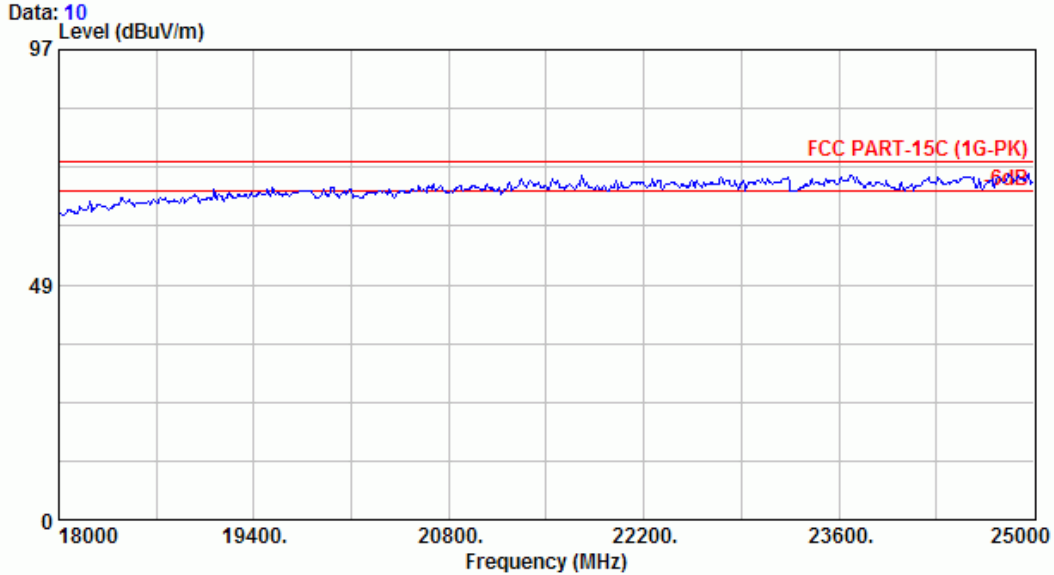


Site no. : A/C Chamber Data no. : 12
 Dis. / Ant. : 3m 3115(3775) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSS1-24G
 Power Rating : DC 6V
 Test Mode : TX2425

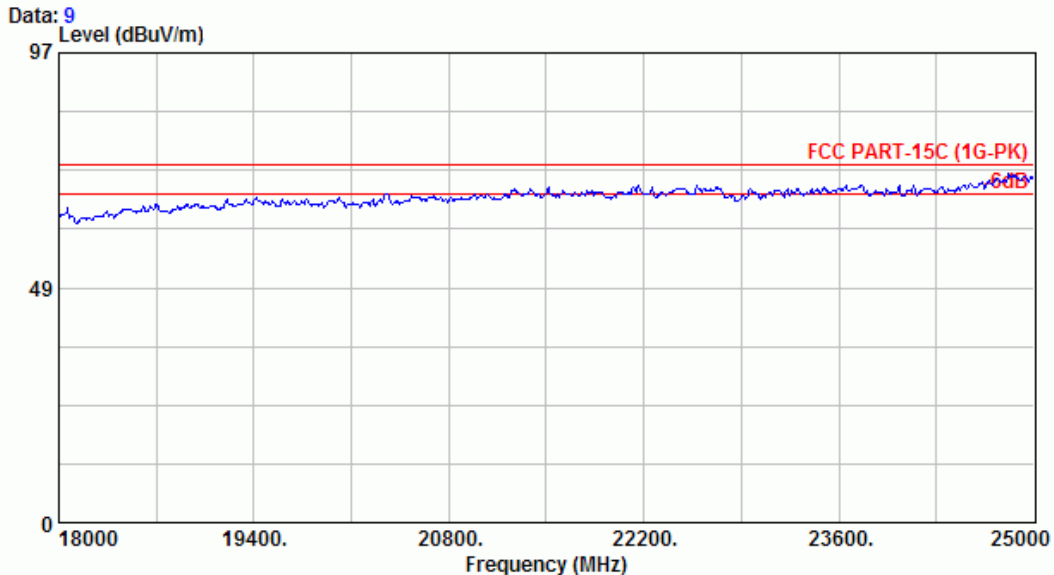


Site no. : A/C Chamber Data no. : 12
 Dis. / Ant. : 3m 3115(3775) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-AV)
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSS1-24G
 Power Rating : DC 6V
 Test Mode : TX2425



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

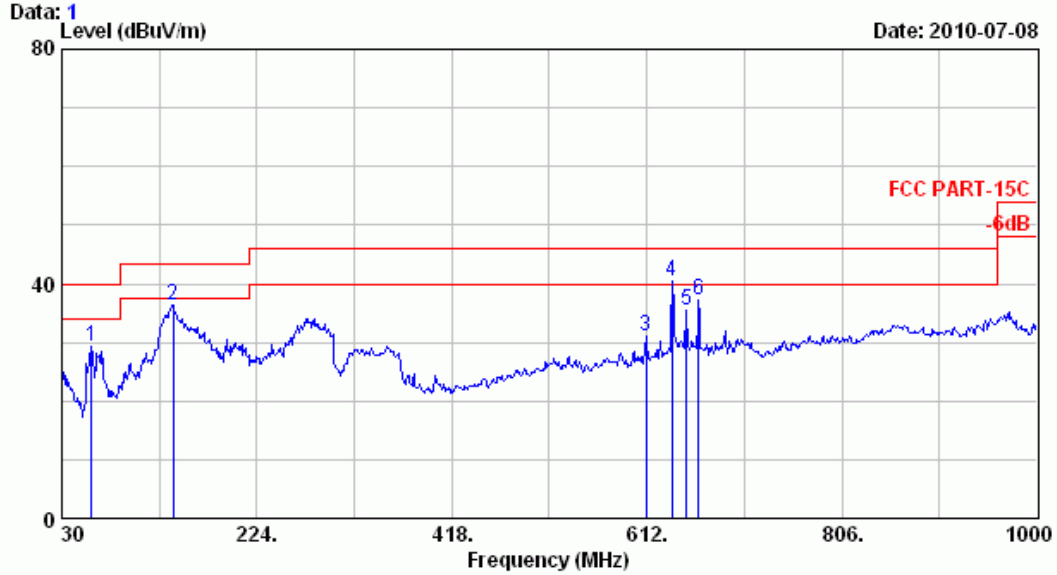


Site no.	: A/C Chamber	Data no.	: 1
Dis. / Ant.	: 3m VBA6106A/UHALP9108A	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		

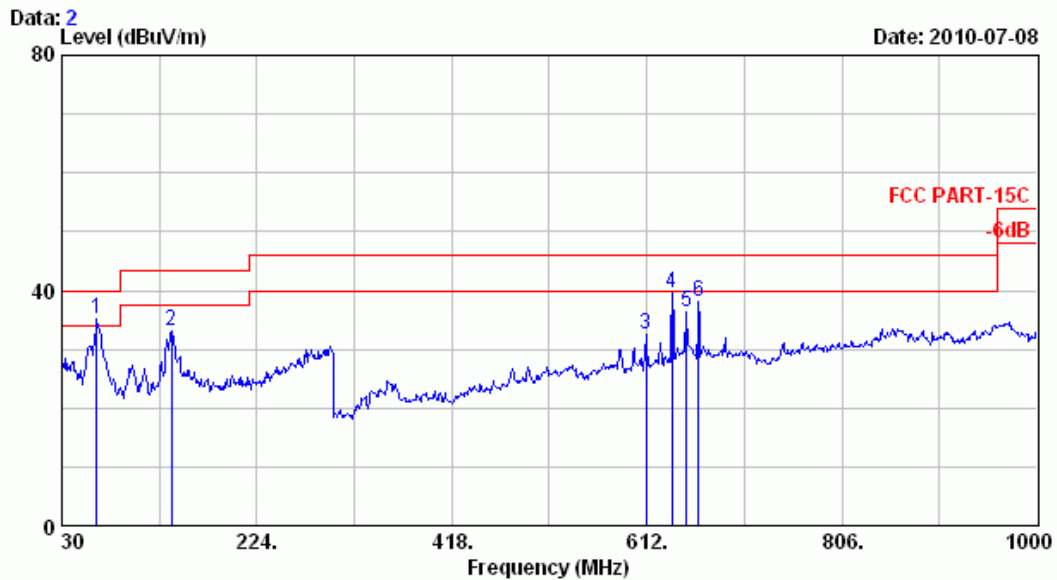


Site no.	: A/C Chamber	Data no.	: 2
Dis. / Ant.	: 3m VBA6106A/UHALP9108A	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

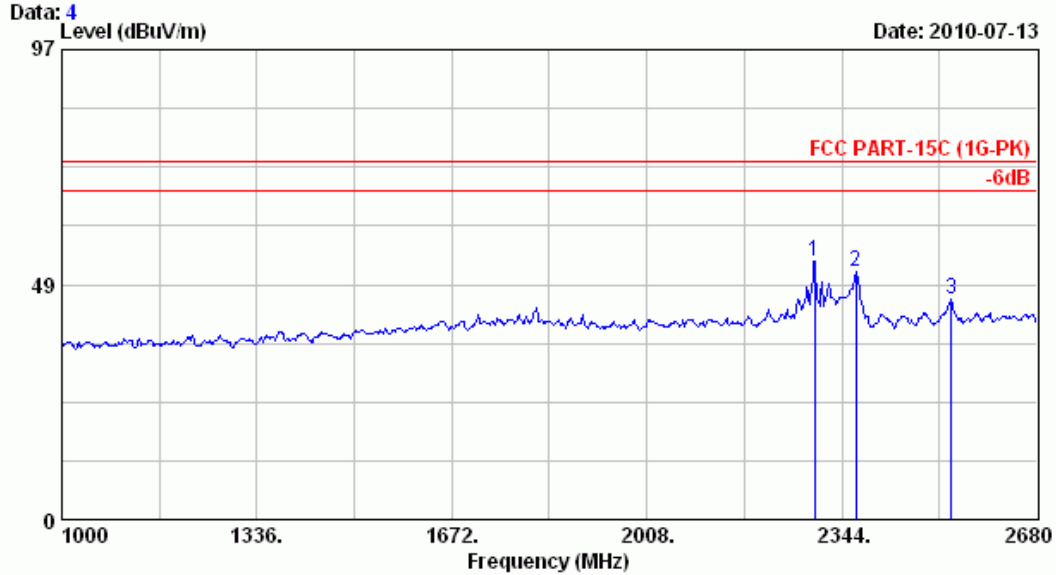


Site no.	: A/C Chamber	Data no.	: 4
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		

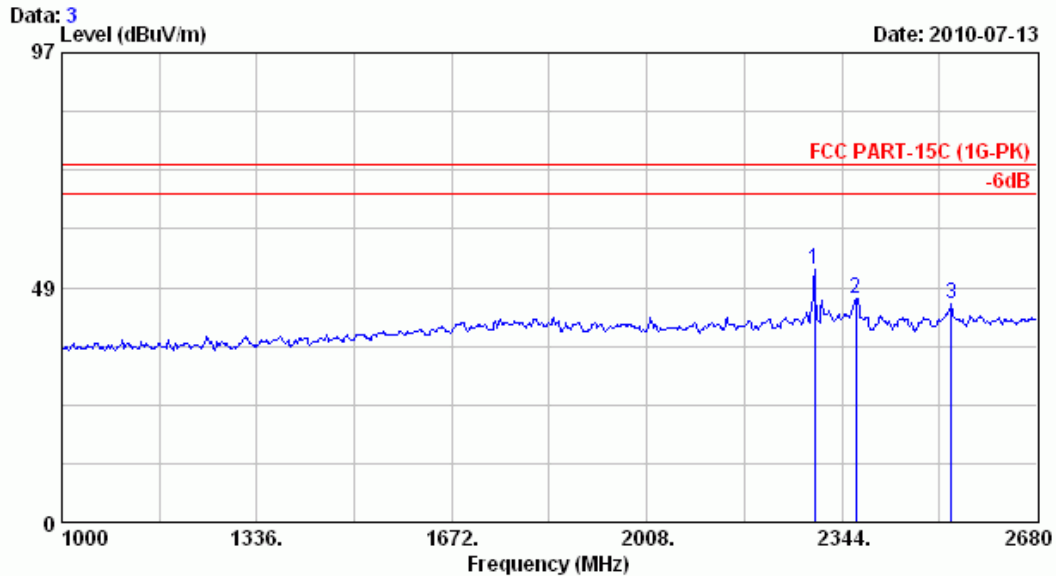


Site no.	: A/C Chamber	Data no.	: 3
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

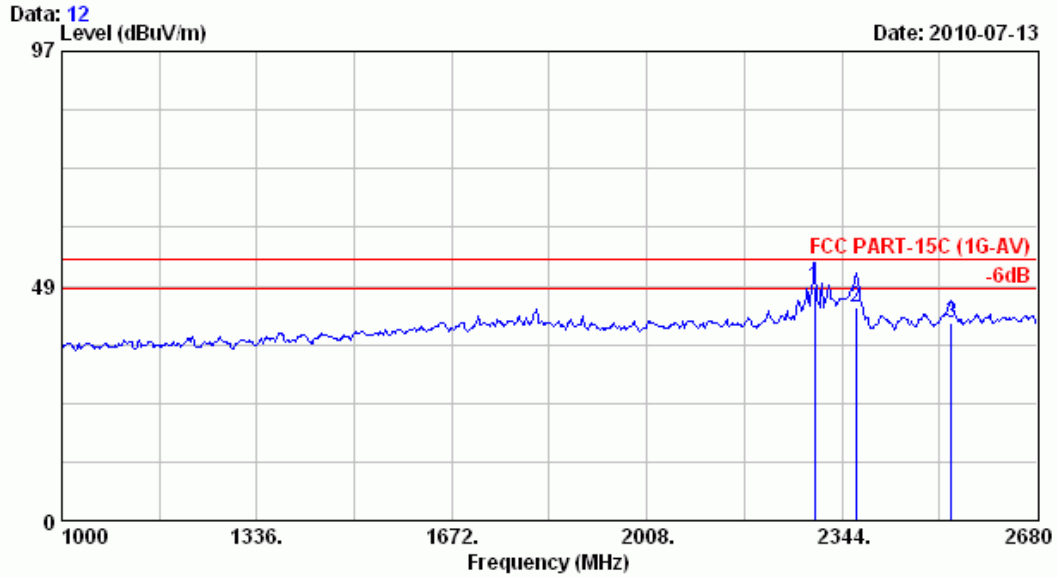


Site no.	: A/C Chamber	Data no.	: 12
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		

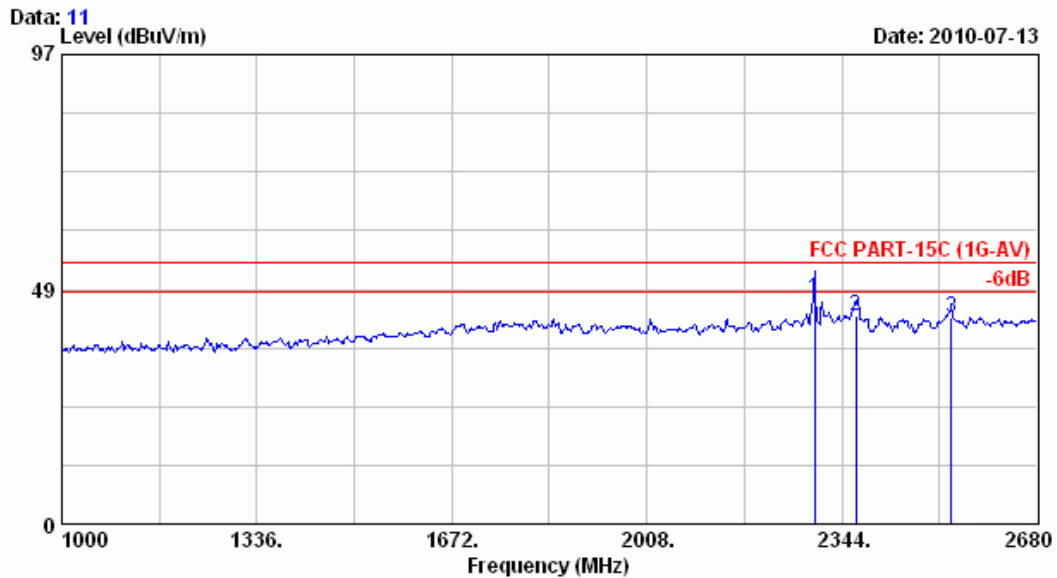


Site no.	: A/C Chamber	Data no.	: 11
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

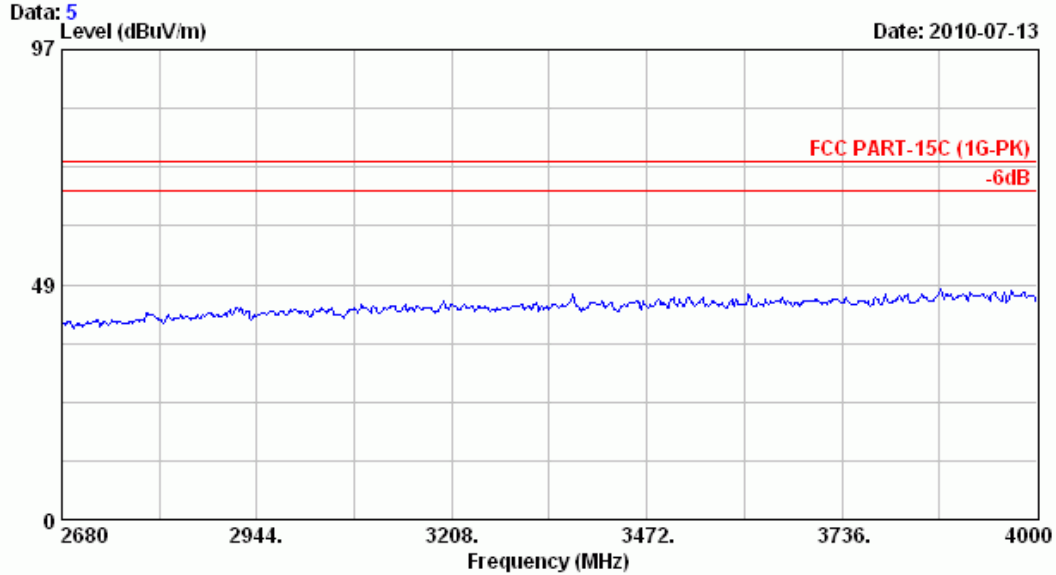


Site no.	: A/C Chamber	Data no.	: 5
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		

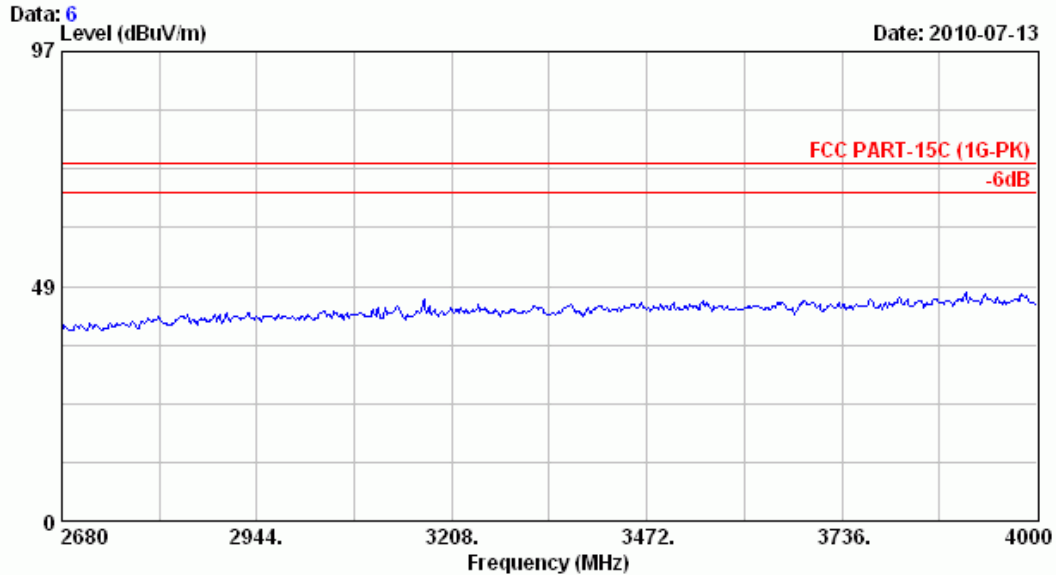


Site no.	: A/C Chamber	Data no.	: 6
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

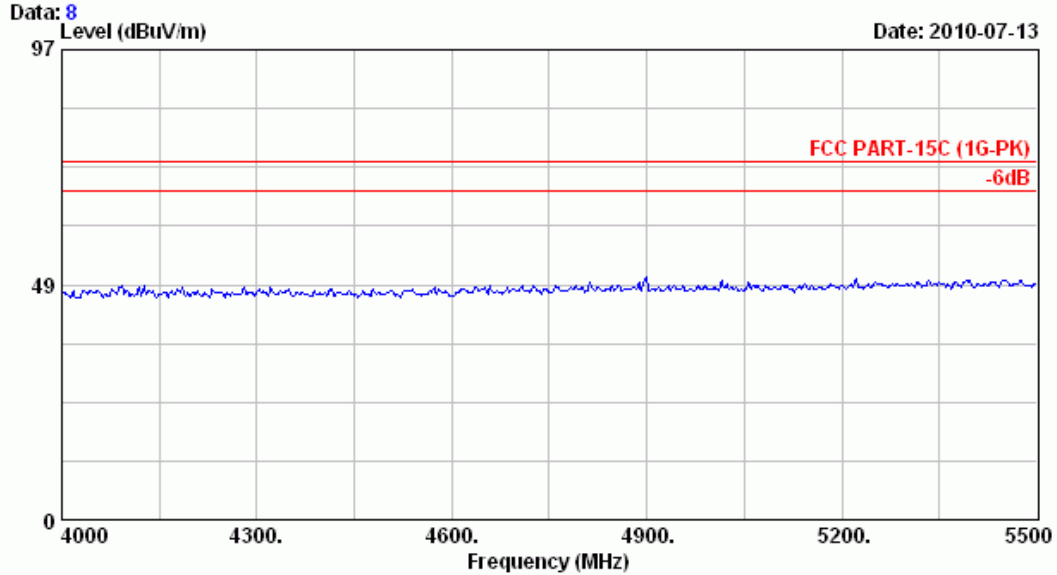


Site no.	: A/C Chamber	Data no.	: 8
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FH881-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		

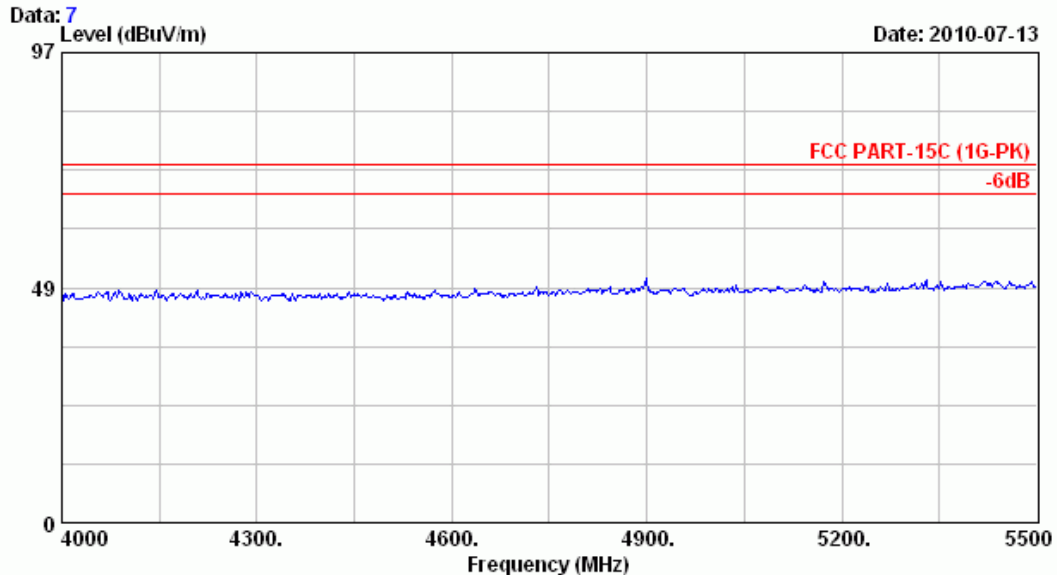


Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FH881-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

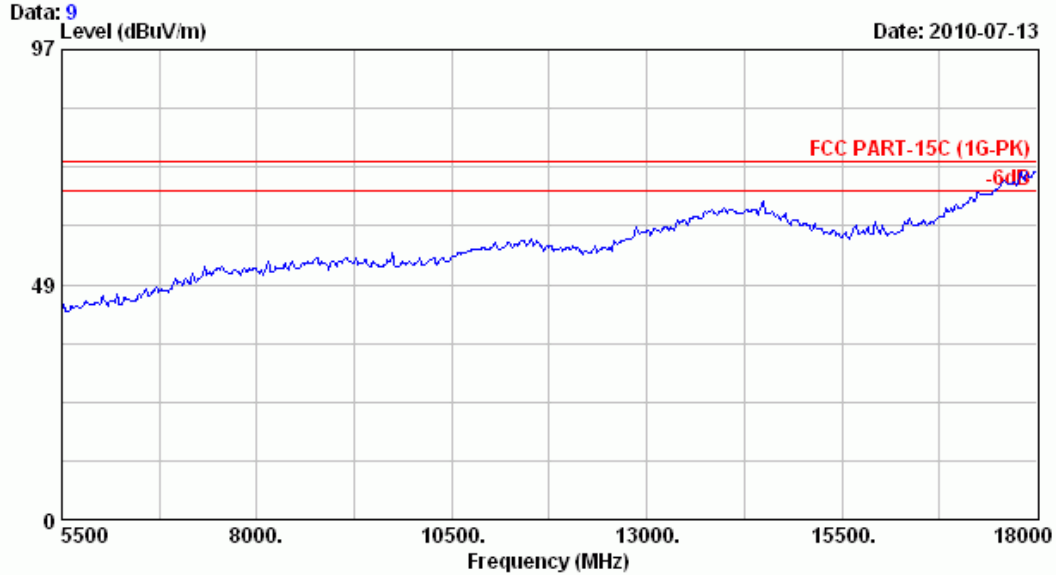


Site no.	: A/C Chamber	Data no.	: 9
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		

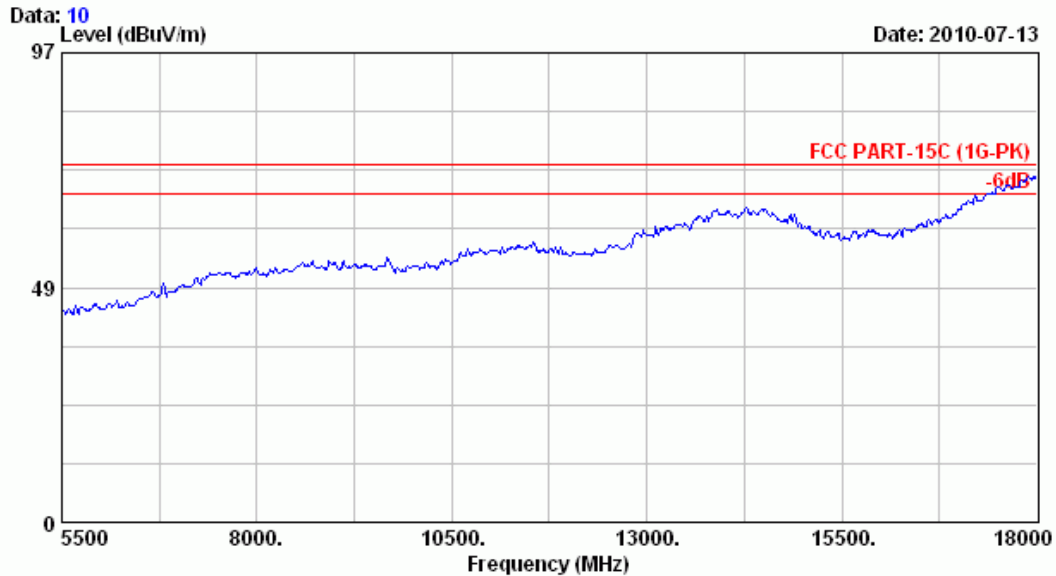


Site no.	: A/C Chamber	Data no.	: 10
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttenc@ttenc.com.tw

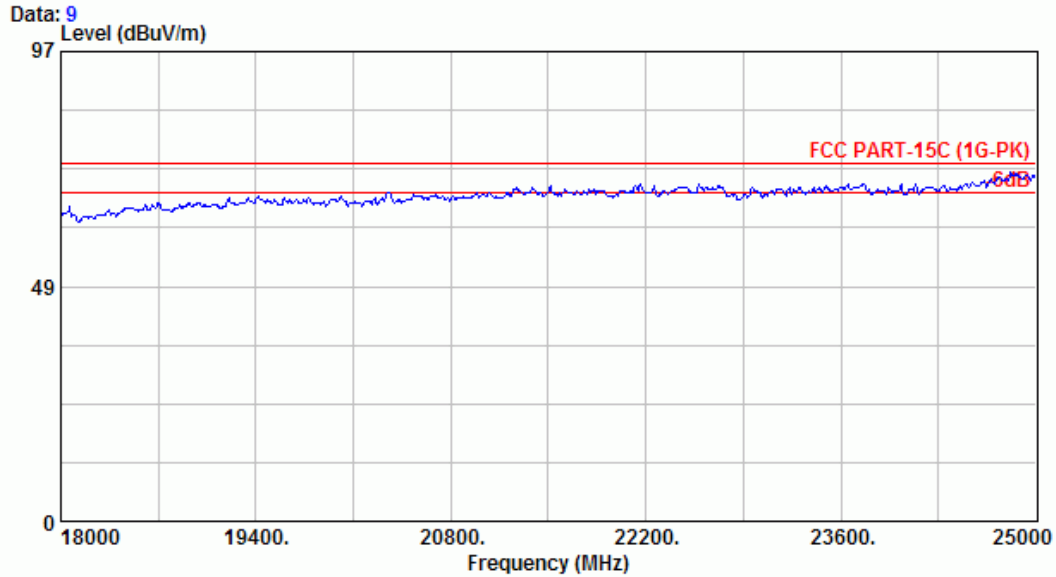


Site no.	: A/C Chamber	Data no.	: 12
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		

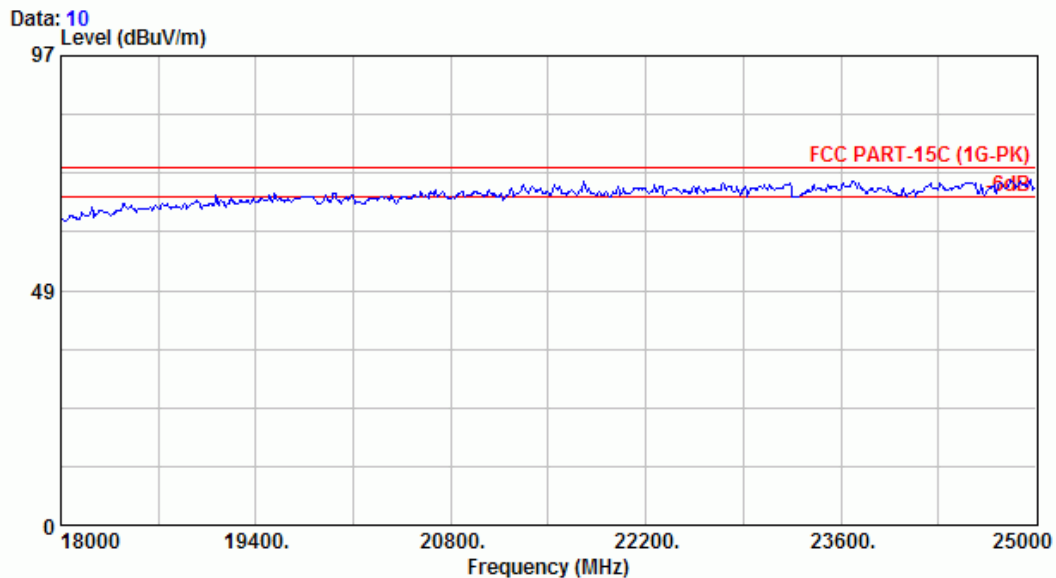


Site no.	: A/C Chamber	Data no.	: 12
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: TX2447.5		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

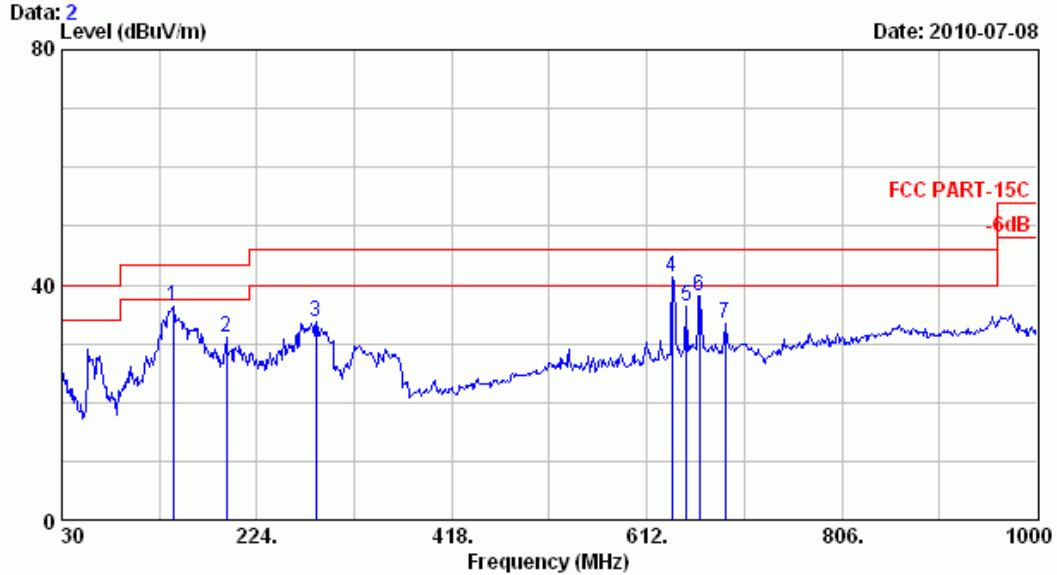


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSS1-24G
 Power Rating : DC 6V
 Test Mode : RX2425

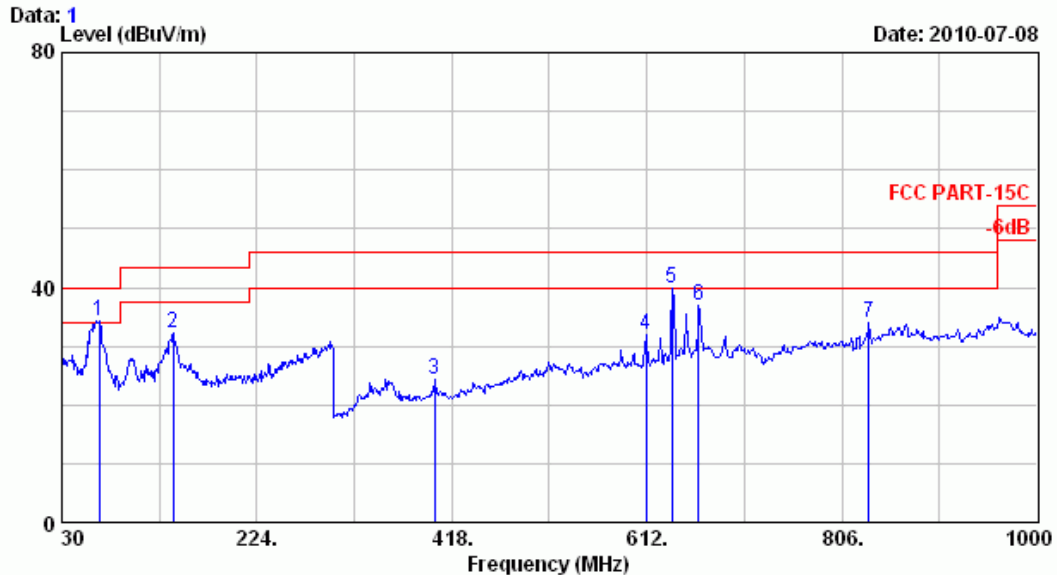


Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : 8564EC 27°C /49% Engineer : Jarwei Wang
 EUT : Radio Control M/N:FHSS1-24G
 Power Rating : DC 6V
 Test Mode : RX2425



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

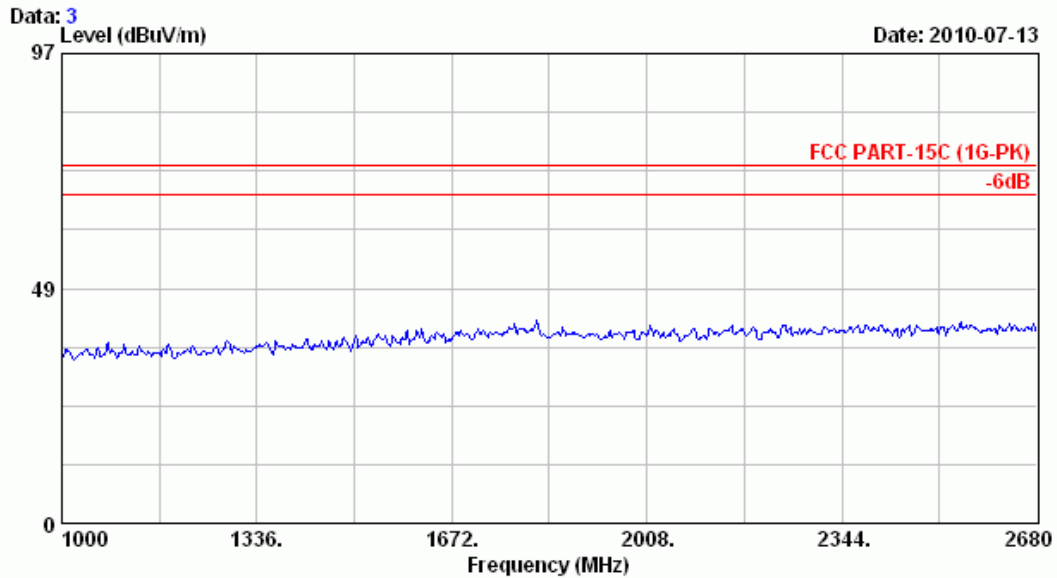


Site no.	: A/C Chamber	Data no.	: 3
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		

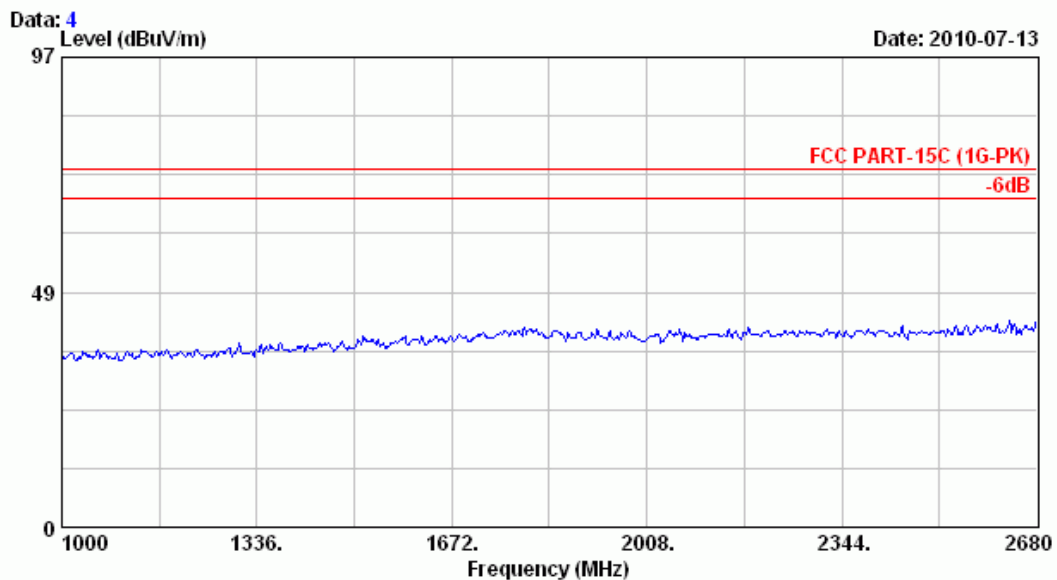


Site no.	: A/C Chamber	Data no.	: 4
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

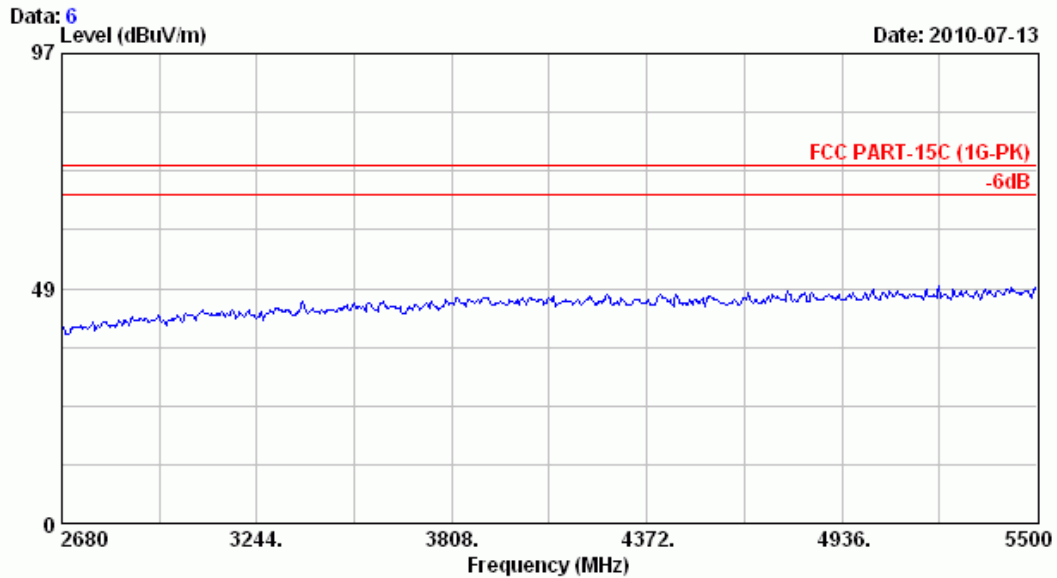


Site no.	: A/C Chamber	Data no.	: 6
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		

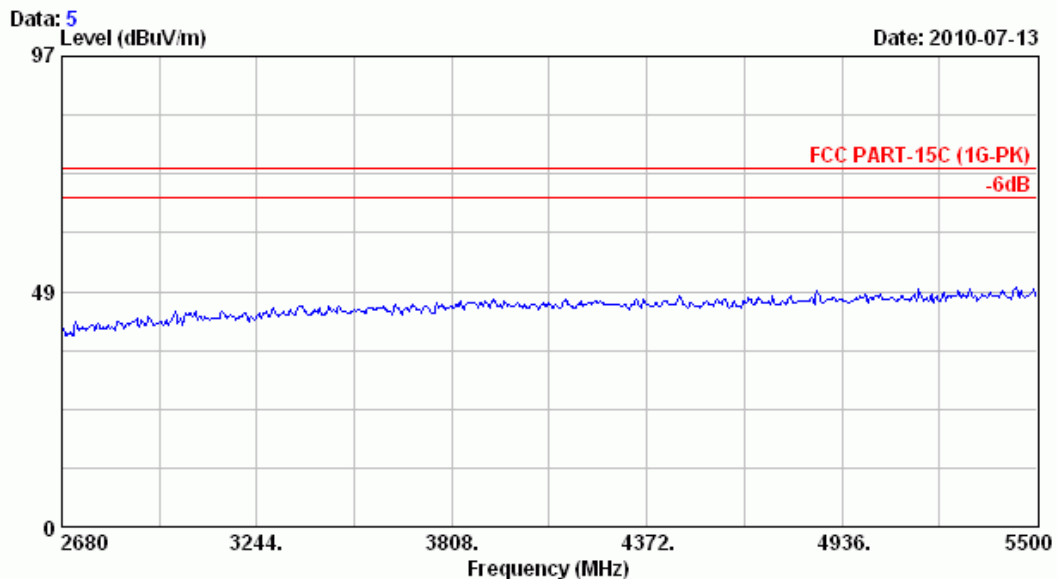


Site no.	: A/C Chamber	Data no.	: 5
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

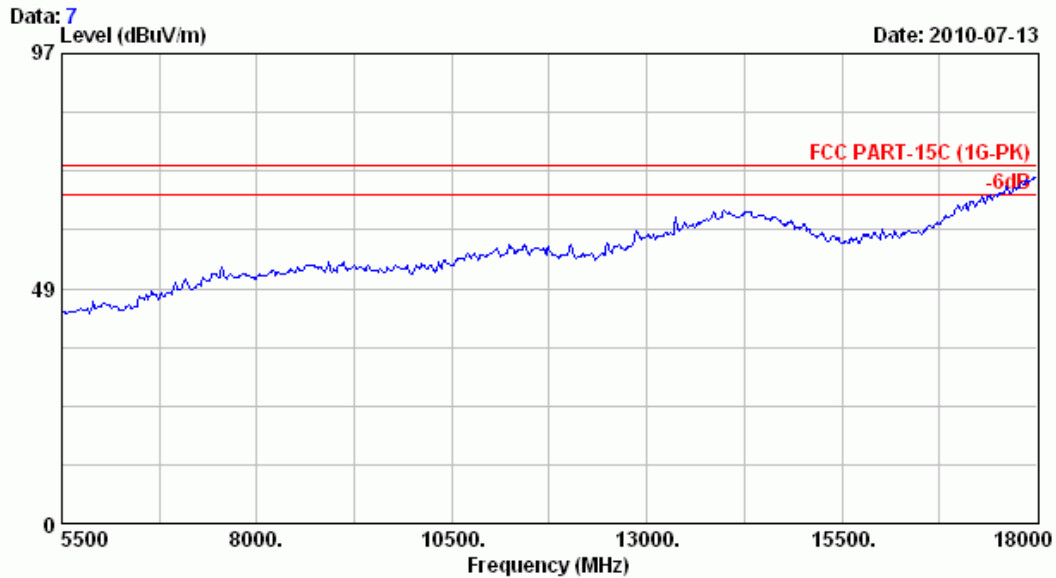


Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m 3115 (3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		

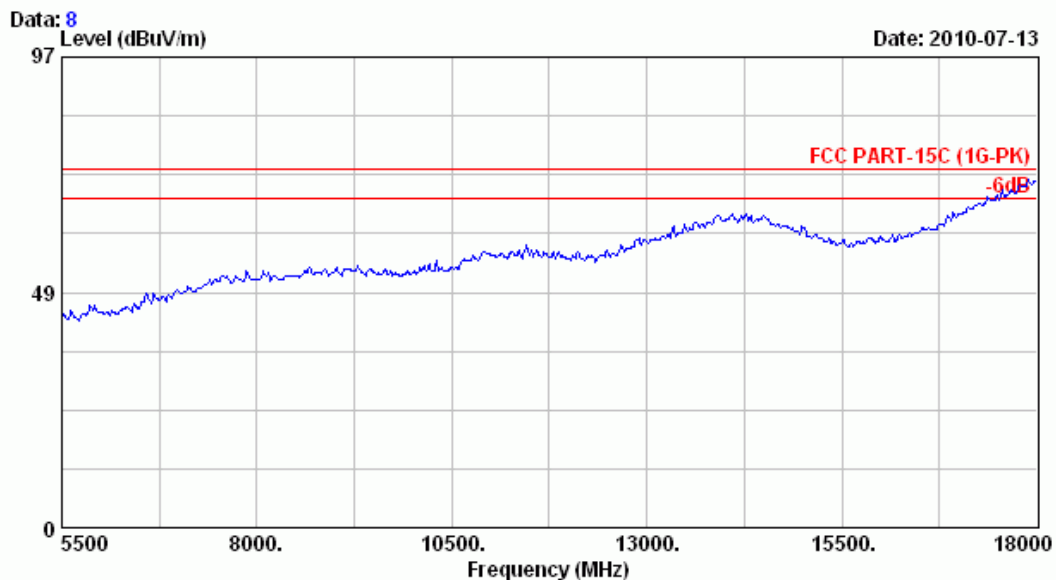


Site no.	: A/C Chamber	Data no.	: 8
Dis. / Ant.	: 3m 3115 (3775)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

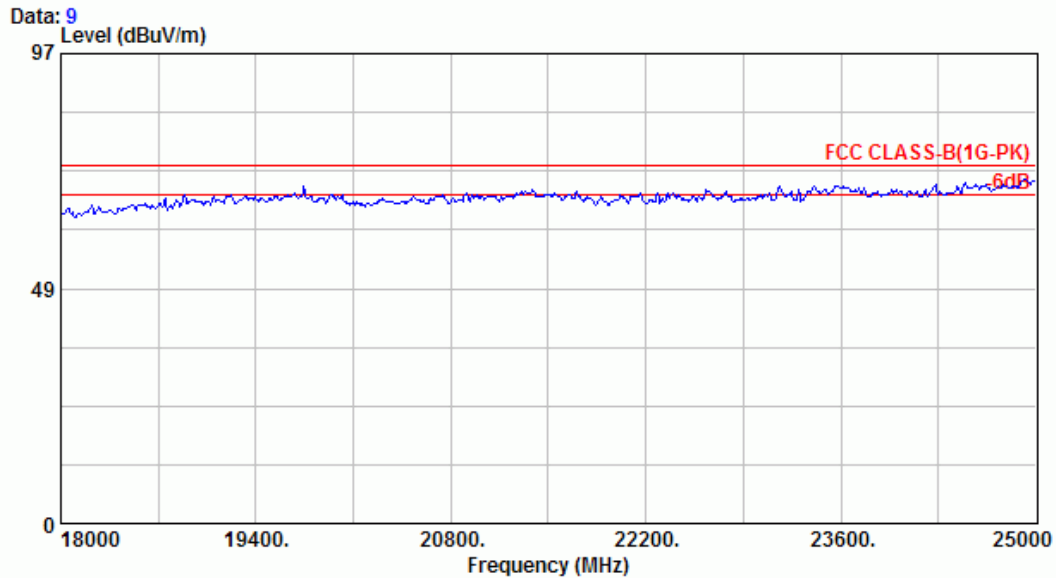

Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		

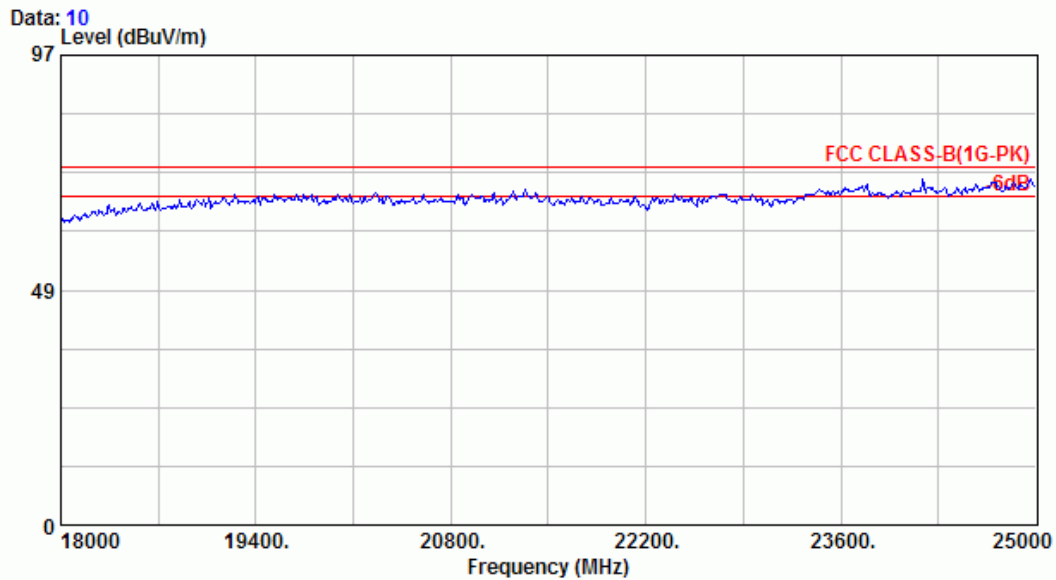

Site no.	: A/C Chamber	Data no.	: 7
Dis. / Ant.	: 3m 3115(3775)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8564EC 27°C /49%	Engineer	: Jarwei Wang
EUT	: Radio Control M/N:FHSS1-24G		
Power Rating	: DC 6V		
Test Mode	: RX2425		